



**F2 Labs**  
16740 Peters Road  
Middlefield, Ohio 44062  
United States of America  
[www.f2labs.com](http://www.f2labs.com)

## CERTIFICATION TEST REPORT

**Manufacturer:** Simavita (Aust.) Pty. Ltd.  
Suite 2.02, Level 2, 54 Miller Street  
North Sydney NSW 2060 AUSTRALIA

**Applicant:** Same as Above

**Product Name:** Smartz™ Pod

**Product Description:** The Smartz™ system is intended to provide monitoring services of continence and related wellness data by remote transmission. It is intended for use by, or under the direction of, healthcare professionals, caregivers and for personal use to collect, transmit and report information related to body position, falls monitoring, continence product status and related wellness data for individuals in institutional environments, including hospitals, nursing homes, rehabilitation facilities and within home environments.

**Operating Voltage/Frequency:** Battery-Operated

**Model:** 9000

**FCC ID:** SBG-9000POD

**Testing Commenced:** 2020-07-09

**Testing Ended:** 2020-07-20

**Summary of Test Results:** **In Compliance, with Modifications**

The EUT complies with the EMC requirements when manufactured identically as the unit tested in this report, including any required modifications and/or manufacturer's statement. Any changes to the design or build of this unit subsequent to this testing may deem it non-compliant.

**Standards:**

- ❖ FCC Part 15 Subpart C, Section 15.249
- ❖ FCC Part 15 Subpart C, Section 15.215(c) – Additional provisions to the general radiated emission limitations
- ❖ FCC Part 15 Subpart A, Section 15.31(e) – Measurement Standards



Order Number: F2P23302F

Applicant: Simavita (Aust.) Pty. Ltd.

Model: 9000

**Evaluation Conducted by:**

Julius Chiller, EMC/Wireless Engineer

**Report Reviewed by:**

Ken Littell, Director of EMC & Wireless Operations

F2 Labs  
26501 Ridge Road  
Damascus, MD 20872  
Ph 301.253.4500

F2 Labs  
16740 Peters Road  
Middlefield, OH 44062  
Ph 440.632.5541

F2 Labs  
8583 Zionsville Road  
Indianapolis, IN 46268  
Ph 317.610.0611

This test report may be reproduced in full; partial reproduction only may be made with the written consent of F2 Labs. The results in this report apply only to the equipment tested.

## TABLE OF CONTENTS

Section	Title	Page
1	ADMINISTRATIVE INFORMATION	4
2	SUMMARY OF TEST RESULTS/MODIFICATIONS	7
3	TABLE OF MEASURED RESULTS	8
4	ENGINEERING STATEMENT	9
5	EUT INFORMATION AND DATA	10
6	LIST OF MEASUREMENT INSTRUMENTATION	11
7	OCCUPIED BANDWIDTH	12
8	FIELD STRENGTH OF EMISSIONS	19
9	PHOTOGRAPHS - TEST SETUPS	28

## 1 ADMINISTRATIVE INFORMATION

### 1.1 Measurement Location:

F2 Labs in Middlefield, Ohio. Site description and attenuation data are on file with the FCC's Sampling and Measurement Branch at the FCC Laboratory in Columbia, MD.

### 1.2 Measurement Procedure:

All measurements were performed according to the 2013 version of ANSI C63.10 and recommended FCC procedure of measurement of DXT operating under Section 15.249. A list of the measurement equipment can be found in Section 6.

### 1.3 Uncertainty Budget:

The uncertainty in EMC measurements arises from several factors which affect the results, some associated with environmental conditions in the measurement room, the test equipment being used, and the measurement techniques adopted.

The measurement uncertainty budgets detailed below are calculated from the test and calibration data and are expressed with a 95% confidence factor using a coverage factor of  $k=2$ . The Uncertainty for a laboratory is referred to as  $U_{lab}$ . For Radiated and Conducted Emissions, the Expanded Uncertainty is compared to the  $U_{cispr}$  values to determine if a specific margin is required to deem compliance.

$U_{lab}$

Measurement Range	Combined Uncertainty	Expanded Uncertainty
Radiated Emissions <1 GHz @ 3m	2.54	5.07dB
Radiated Emissions <1 GHz @ 10m	2.55	5.09dB
Radiated Emissions 1 GHz to 2.7 GHz	1.81	3.62dB
Radiated Emissions 2.7 GHz to 18 GHz	1.55	3.10dB
AC Power Line Conducted Emissions, 150kHz to 30 MHz	1.38	2.76dB
AC Power Line Conducted Emissions, 9kHz to 150kHz	1.66	3.32dB

$U_{cispr}$

Measurement Range	Expanded Uncertainty
Radiated Emissions <1 GHz @ 3m	5.2dB
Radiated Emissions <1 GHz @ 10m	5.2dB
Radiated Emissions 1 GHz to 2.7 GHz	Under Consideration
Radiated Emissions 2.7 GHz to 18 GHz	Under Consideration
AC Power Line Conducted Emissions, 150kHz to 30 MHz	3.6dB
AC Power Line Conducted Emissions, 9kHz to 150kHz	4.0dB

If  $U_{lab}$  is less than or equal to  $U_{cispr}$ , then:

- compliance is deemed to occur if no measured disturbance exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance exceeds the disturbance limit.

If  $U_{lab}$  is greater than  $U_{cispr}$  in table 1, then:

- compliance is deemed to occur if no measured disturbance, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit.

Note: Only measurements listed in the tables above that relate to tests included in this Test Report are applicable.

**1.4 Document History:**

Document Number	Description	Issue Date	Approved By
F2P23302F-11E	First Issue	2020-07-22	K. Littell

## 2 SUMMARY OF TEST RESULTS

Test Name	Standard(s)	Results
99% Occupied Bandwidth	CFR 47 Part 15.215(c)	Complies
-20dB Occupied Bandwidth	CFR 47 Part 15.215(c)	Complies
Field Strength of Emissions	CFR 47 Part 15.249(a)(d)	Complies
Variation of the Input Power	CFR 47 Part 15.231(e)	Complies*
Conducted Emissions	CFR 47 Part 15.207(a)	N/A

\*Requirements met by using new batteries.

Modifications Made to the Equipment
Firmware was updated on all three samples to provide sufficient duty cycle for testing.

**3 TABLE OF MEASURED RESULTS**

<b>Test</b>	<b>Low Channel 2402 MHz</b>	<b>Mid Channel 2426 MHz</b>	<b>High Channel 2480 MHz</b>
Average Field Strength of Fundamental	39.10 dB $\mu$ V/m	38.90 dB $\mu$ V/m	38.50 dB $\mu$ V/m
Average Limit for Fundamental	(93.97 dB $\mu$ V/m)	(93.97 dB $\mu$ V/m)	(93.97 dB $\mu$ V/m)
Peak Field Strength of Fundamental	71.70 dB $\mu$ V/m	71.40 dB $\mu$ V/m	70.20 dB $\mu$ V/m
Peak Limit for Fundamental	113.98dB $\mu$ V/m	113.98dB $\mu$ V/m	113.98dB $\mu$ V/m
-20dB Occupied Bandwidth	1.213 MHz	1.220 MHz	1.224 MHz
99% Occupied Bandwidth	1.070 MHz	1.055 MHz	1.095 MHz

The -20dB bandwidth of the emission shall be contained within the frequency band designated in the rule section under which the equipment is operated.



**Order Number: F2P23302F**

**Applicant: Simavita (Aust.) Pty. Ltd.**

**Model: 9000**

#### **4 ENGINEERING STATEMENT**

This report has been prepared on behalf of Simavita (Aust.) Pty. Ltd. to provide documentation for the testing described herein. This equipment has been tested and found to comply with part 15.249 of the FCC Rules using ANSI C63.10 2013 standard. The test results found in this test report relate only to the items tested.

## 5 EUT INFORMATION AND DATA

### 5.1 Equipment Under Test:

Product: Smartz™ Pod

Model: 9000

Serial Nos.: S-000-36E, S-000-329, S-000-382

Firmware: 0D

Hardware: 06

FCC ID: **SBG-9000POD**

### 5.2 Trade Name:

Simavita (Aust.) Pty. Ltd.

### 5.3 Power Supply:

Battery-Operated

### 5.4 Applicable Rules:

CFR 47, Part 15.249, subpart C

### 5.5 Equipment Category:

Radio Transmitter-DXT

### 5.6 Antenna:

Integral Antenna, 0dBi Gain

### 5.7 Accessories:

Battery – Panosonic CR2016;

Simulator Strips - Simavita

### 5.8 Test Item Condition:

The equipment to be tested was received in good condition.

### 5.9 Testing Algorithm:

EUT was set up to continuously transmit a modulated signal on one channel of the 2.4 GHz BLE band. Three samples were used to record results on a low, mid and high channel.

**6 LIST OF MEASUREMENT INSTRUMENTATION**

Equipment Type	Asset Number	Manufacturer	Model	Serial Number	Calibration Due Date
Shielded Chamber	CL166-E	Albatross Projects	B83117-DF435-T261	US140023	2021-01-03
Temp/Hum. Recorder	CL261	Extech	445814	04	2021-02-12
Receiver	CL151	Rohde & Schwarz	ESU40	100319	2020-10-21
Horn Antenna	CL098	Emco	3115	9809-5580	2021-01-31
Horn Antenna 18-26.5 GHz	CL114	A.H. Systems, Inc.	SAS-572	237	2021-02-04
Pre-Amplifier	CL153	Keysight Tech.	83006A	MY39500791	2020-08-05
Pre-Amplifier	CL250	Com-Power	PAM-118A	18040011	2021-02-17
Pre-Amplifier	CL189	Com-Power	PAM-840A	461303	2021-07-31
Active 18" Loop Antenna	CL163-Loop	A.H. Systems, Inc.	EHA-52B	100	2020-07-24
Antenna, JB3 Combination	CL175	Sunol Sciences	JB3	A030315	2020-10-14
Low Loss Cable Set	--	Pasternack	PE3C0666-252 / PE3C066-50CM	None Spec.	2020-08-31

## 7 FCC PART 15.215(e), OCCUPIED BANDWIDTH

### 7.1 Requirements:


Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the -20dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage.

Bandwidth measurements were made at the low (2.402 GHz), mid (2.426 GHz) and upper (2.480 GHz) frequencies. The bandwidth was measured using the analyzer's marker function.


## 7.2 Occupied Bandwidth Test Data

Test Date(s):	2020-07-09	Test Engineer(s):	J. Chiller
Standards:	CFR 47 Part 15.215(c)	Air Temperature:	20.7°C
		Relative Humidity:	67%


### -20dB, Low Channel

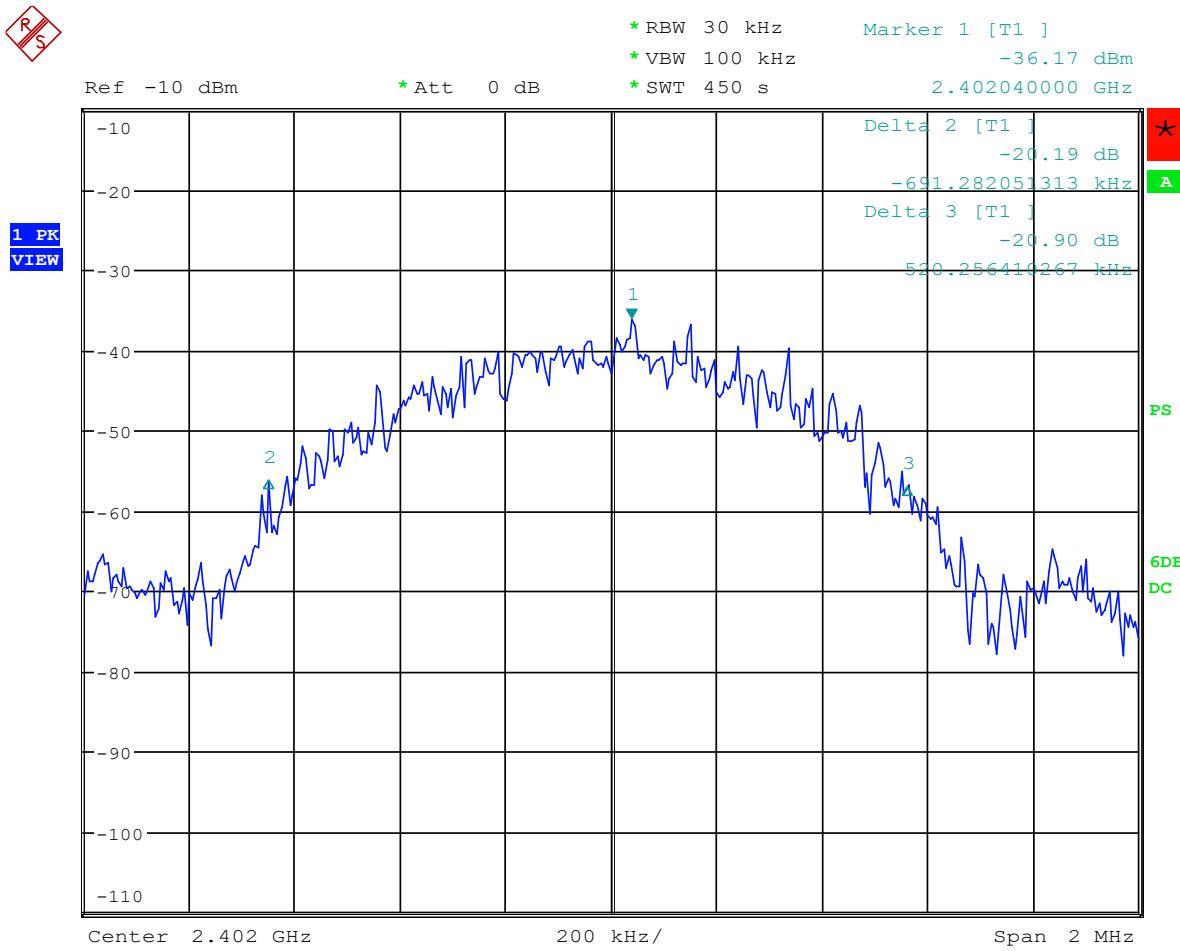

Date: 9.JUL.2020 11:03:08

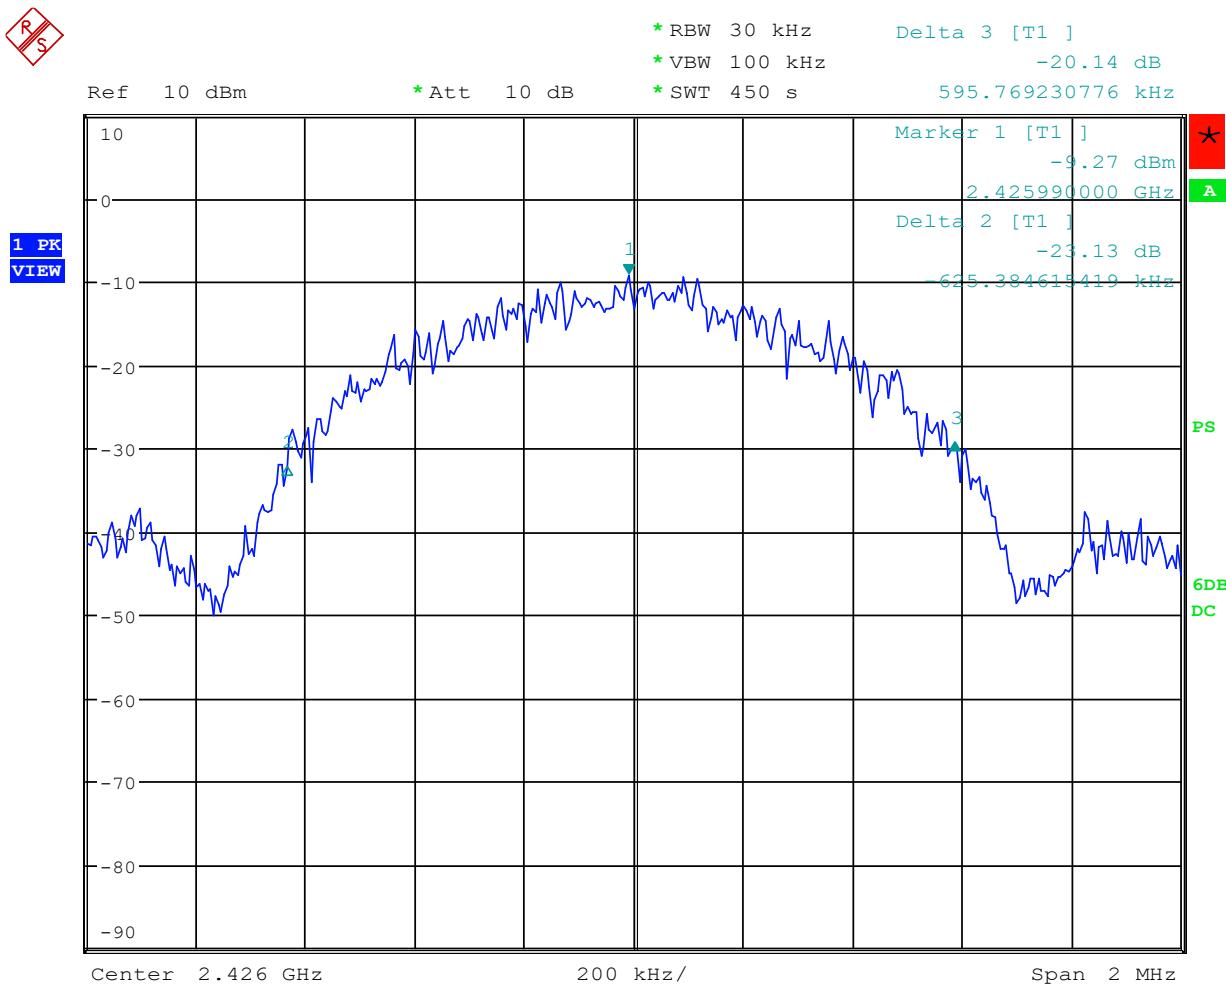
**-20dB, Mid Channel**

Date: 9.JUL.2020 12:28:23

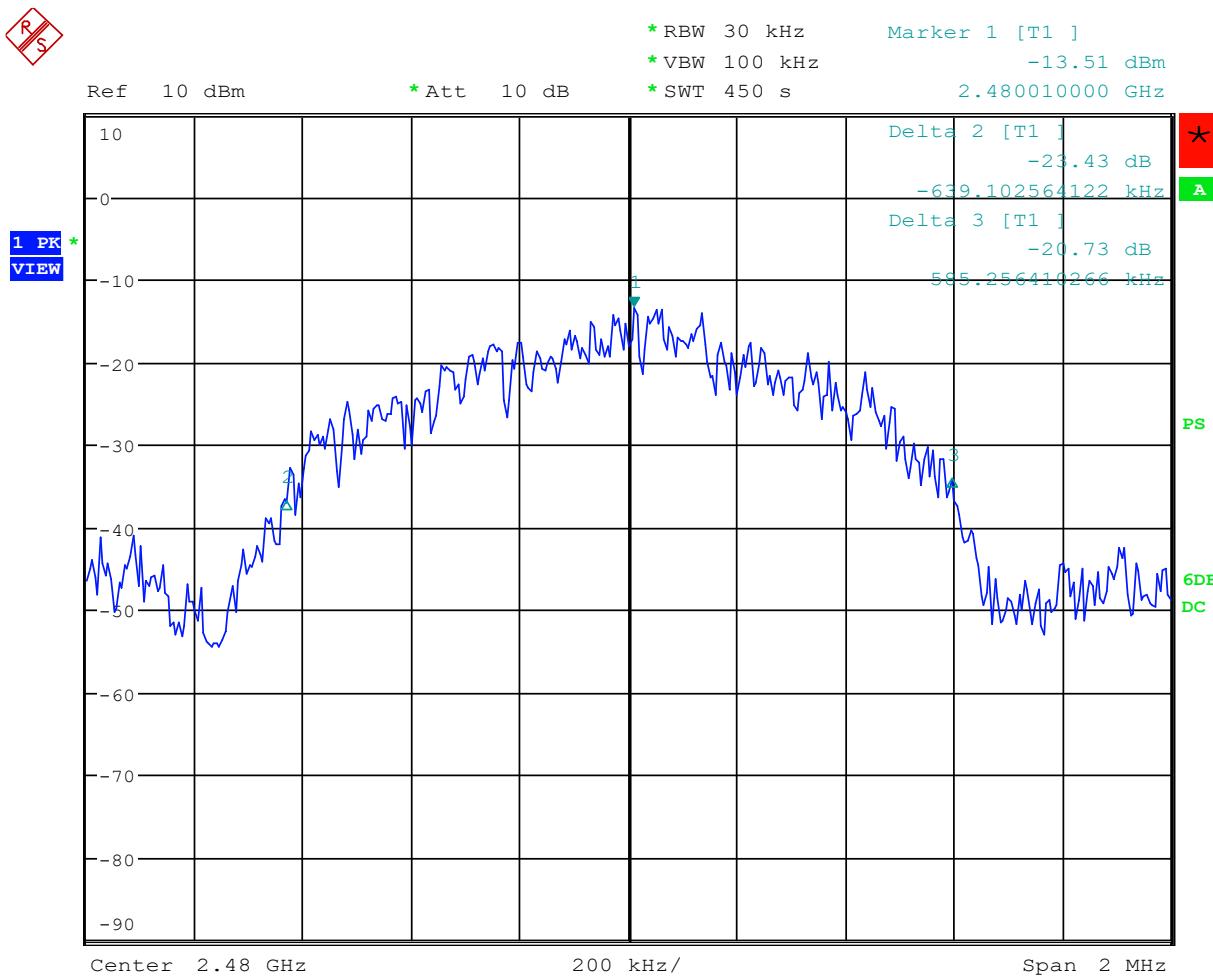**-20dB, High Channel**


Date: 9.JUL.2020 11:44:07

## 99%, Low Channel

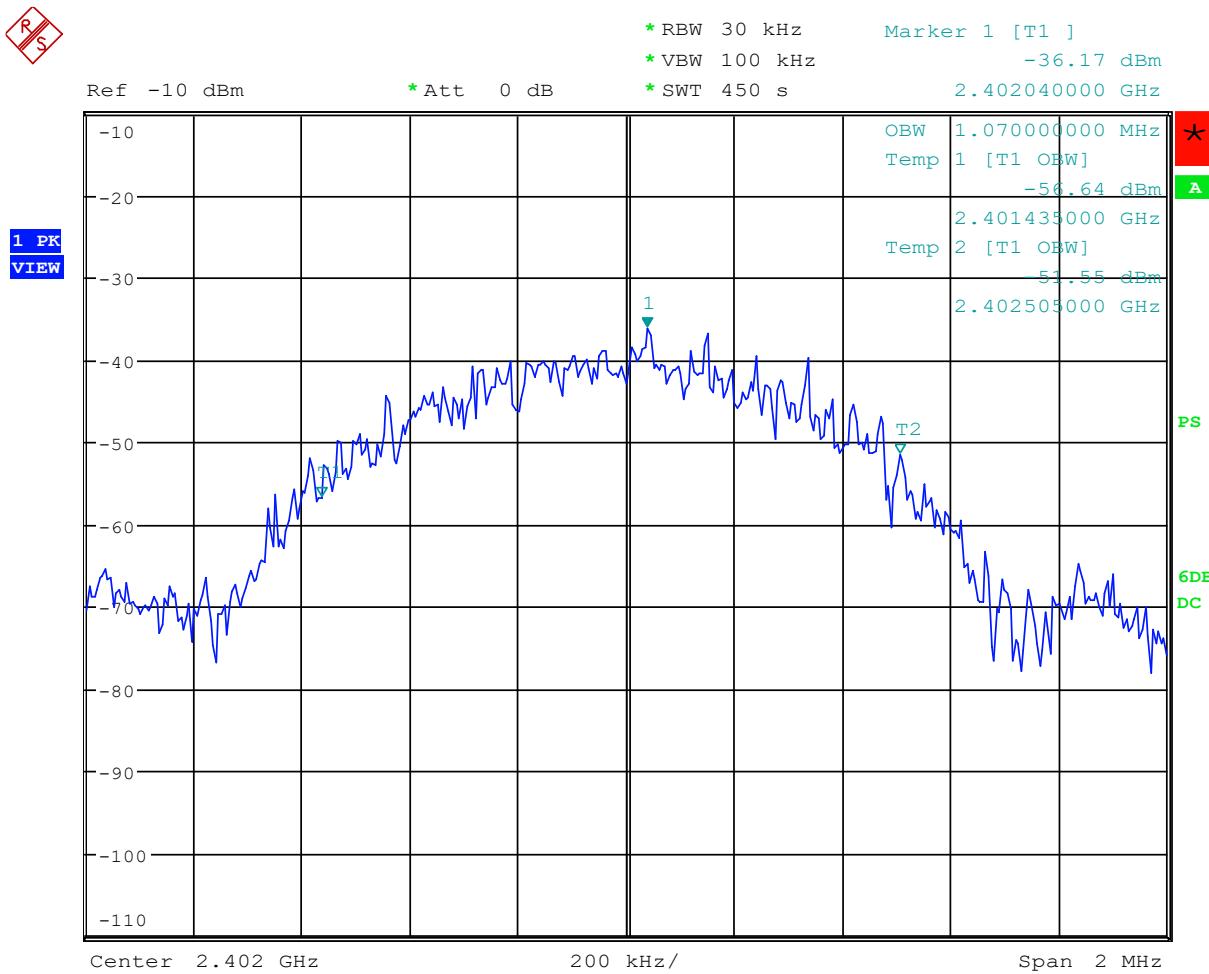


Date: 9.JUL.2020 11:01:08

99%, Mid Channel

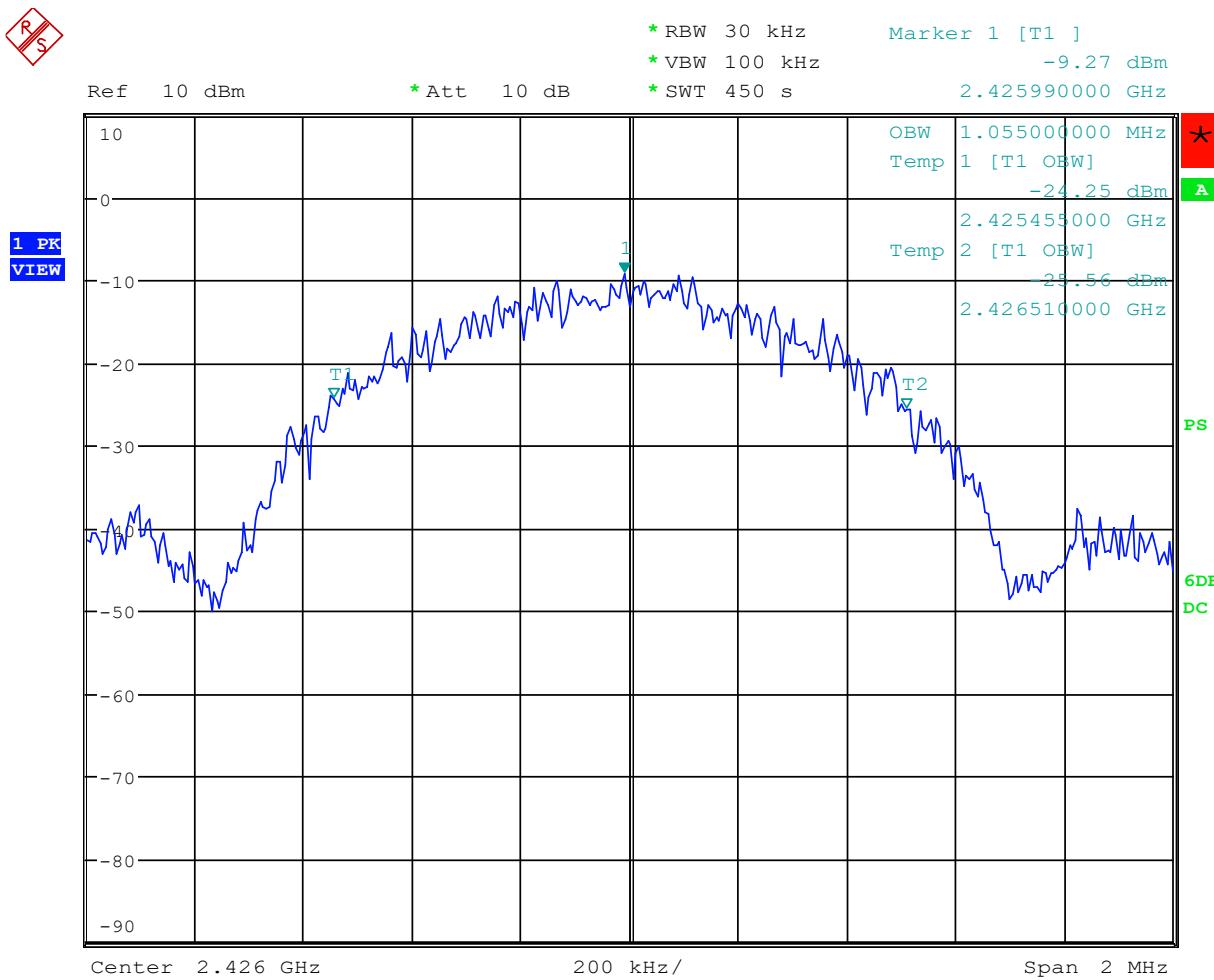

Date: 9.JUL.2020 12:28:57

## 99%, High Channel

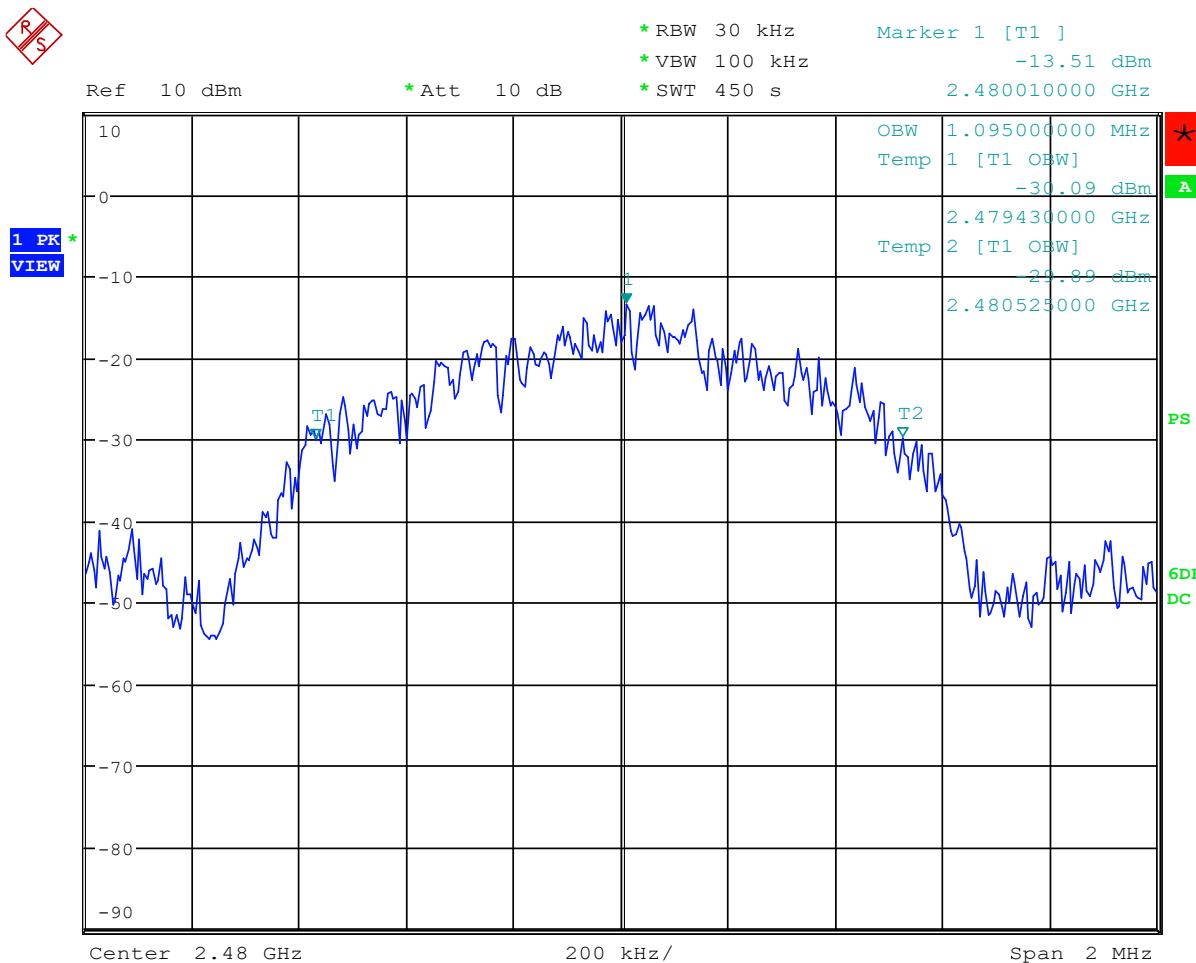

Date: 9.JUL.2020 11:42:51

**8 FIELD STRENGTH OF EMISSIONS FROM INTENTIONAL RADIATORS**

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

<b>Fundamental Frequency</b>	<b>Field Strength of Fundamental (millivolts/meter)</b>	<b>Field Strength of Harmonics (microvolts/meter)</b>
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500


(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

NOTE: During the pre-scan evaluation, the EUT was rotated in all possible directions to find the maximum emissions. The orthogonal position that showed the highest emissions was used. The antenna was raised between 1 and 4 meters and the EUT turntable was rotated 360 degrees to maximize the emissions.


## 8.1 Test Data - Field Strength of Emissions from Intentional Radiators

Test Date(s):	2020-07-20	Test Engineer(s):	J. Chiller
Standards:	CFR 47 Part 15.249(a)	Air Temperature:	20.0°C
		Relative Humidity:	50%

### Lower Band Edge, Horizontal

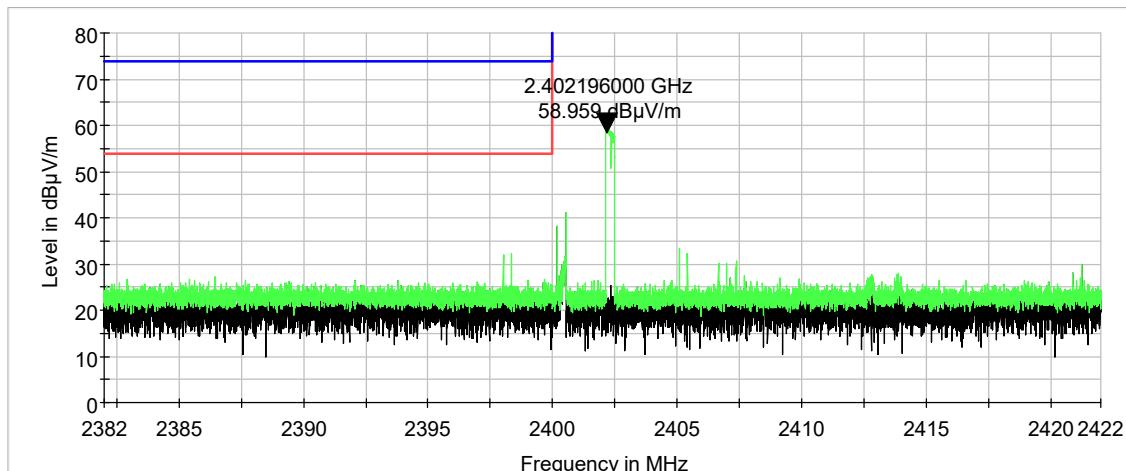

### Upper Band Edge, Horizontal

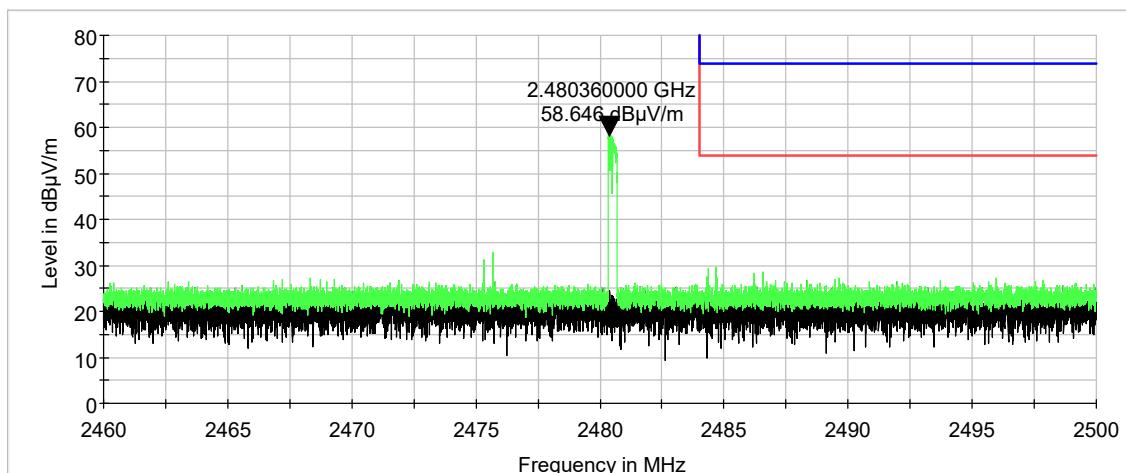


**MaxPeak**

Frequency (MHz)	Antenna Polarization	Bandwidth (kHz)	Antenna Height (cm)	Azimuth (deg)	Reading (dB $\mu$ V)	Cable Loss & Antenna Factor (dB)	Emission (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2390.00	V	1000.00	150.00	84.00	37.7	7.5	45.20	74.0	-28.8
2390.00	H	1000.00	150.00	0.00	36.9	7.5	44.40	74.0	-29.6
2400.00	H	1000.00	150.00	0.00	44.2	7.8	52.00	74.0	-22.0
2400.00	V	1000.00	150.00	84.00	37.4	7.8	45.20	74.0	-28.8
2402.00	H	1000.00	150.00	359.00	63.9	7.8	71.70	114.0	-42.3
2402.00	V	1000.00	150.00	84.00	54.8	7.8	62.60	114.0	-51.4
2426.00	H	1000.00	150.00	208.00	63.6	7.8	71.40	114.0	-42.6
2426.00	V	1000.00	150.00	307.00	53.9	7.8	61.70	114.0	-52.3
2480.00	V	1000.00	150.00	8.00	53.5	8.1	61.60	114.0	-52.4
2480.00	H	1000.00	150.00	36.00	62.1	8.1	70.20	114.0	-43.8
2483.50	V	1000.00	150.00	8.00	37.5	8.1	45.60	74.0	-28.4
2483.50	H	1000.00	150.00	36.00	38.2	8.1	46.30	74.0	-27.7
2490.00	V	1000.00	150.00	8.00	37.2	8.1	45.30	74.0	-28.7
2490.00	H	1000.00	150.00	36.00	37.8	8.1	45.90	74.0	-28.1

**AVG**

Frequency (MHz)	Antenna Polarization	Bandwidth (kHz)	Antenna Height (cm)	Azimuth (deg)	Reading (dB $\mu$ V)	Cable Loss & Antenna Factor (dB)	Emission (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2390.00	V	1000.00	150.00	84.00	23.8	7.5	31.30	54.0	-22.7
2390.00	H	1000.00	150.00	0.00	23.8	7.5	31.30	54.0	-22.7
2400.00	H	1000.00	150.00	0.00	23.9	7.8	31.70	54.0	-22.3
2400.00	V	1000.00	150.00	84.00	23.8	7.8	31.60	54.0	-22.4
2402.00	H	1000.00	150.00	359.00	31.3	7.8	39.10	94.0	-54.9
2402.00	V	1000.00	150.00	84.00	27.0	7.8	34.80	94.0	-59.2
2426.00	H	1000.00	150.00	208.00	31.1	7.8	38.90	94.0	-55.1
2426.00	V	1000.00	150.00	307.00	26.7	7.8	34.50	94.0	-59.5
2480.00	V	1000.00	150.00	8.00	26.7	8.1	34.80	94.0	-59.2
2480.00	H	1000.00	150.00	36.00	30.4	8.1	38.50	94.0	-55.5
2483.50	V	1000.00	150.00	8.00	24.0	8.1	32.10	54.0	-21.9
2483.50	H	1000.00	150.00	36.00	24.0	8.1	32.10	54.0	-21.9
2490.00	V	1000.00	150.00	8.00	23.9	8.1	32.00	54.0	-22.0
2490.00	H	1000.00	150.00	36.00	23.9	8.1	32.00	54.0	-22.0

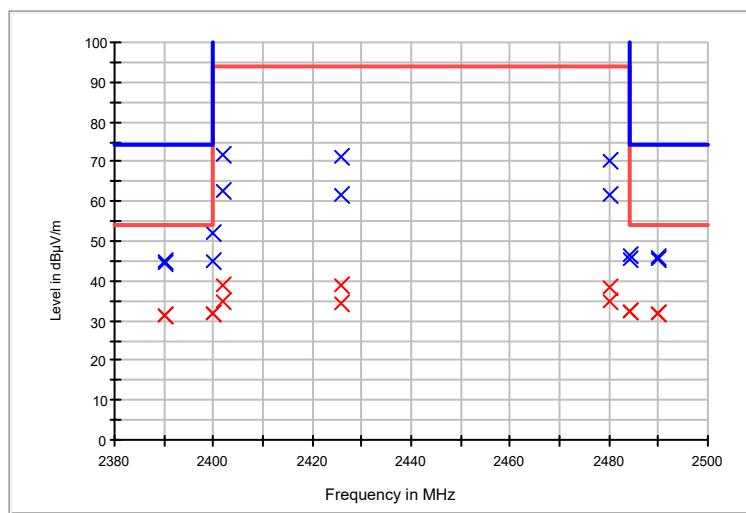

## **8.2 Test Data – Spurious Emissions**


Notes: Plots are peak, max hold pre-scan data included only to determine what frequencies to investigate and measure. During the pre-scan evaluation, the EUT was rotated in all possible directions to find the maximum emissions. The orthogonal position that showed the highest emissions was used. At some frequencies, no emissions from the EUT were measurable over the ambient noise floor. The readings did not change with EUT on and EUT off.

At least 6 of the highest frequencies were measured per ANSI 63.4 in a 3-meter anechoic chamber. Frequencies below 1 GHz were measured using a quasi-peak detector. The antenna was raised between 1 and 4 meters and the EUT turntable was rotated 360 degrees to maximize the emissions. Some of the frequencies did not change with the EUT on or off. At those frequencies, the test distance was shortened to 1 meter and still no emissions from the EUT were visible or over the ambient or limit. Frequencies were scanned from 9kHz to 26 GHz and the highest emissions are listed below.


In the following plots, the black line indicates ambient noise and the red line indicates the measurement with the EUT on. Emissions to be found by the EUT were measured and listed in tables below.



Test Date(s):	2020-07-14	Test Engineer(s):	J. Chiller
Standards:	CFR 47 Part 15.249(d) / Part 15.209	Air Temperature:	20.0°C
		Relative Humidity:	50%

### Characterization Scan, 9 kHz to 150 kHz

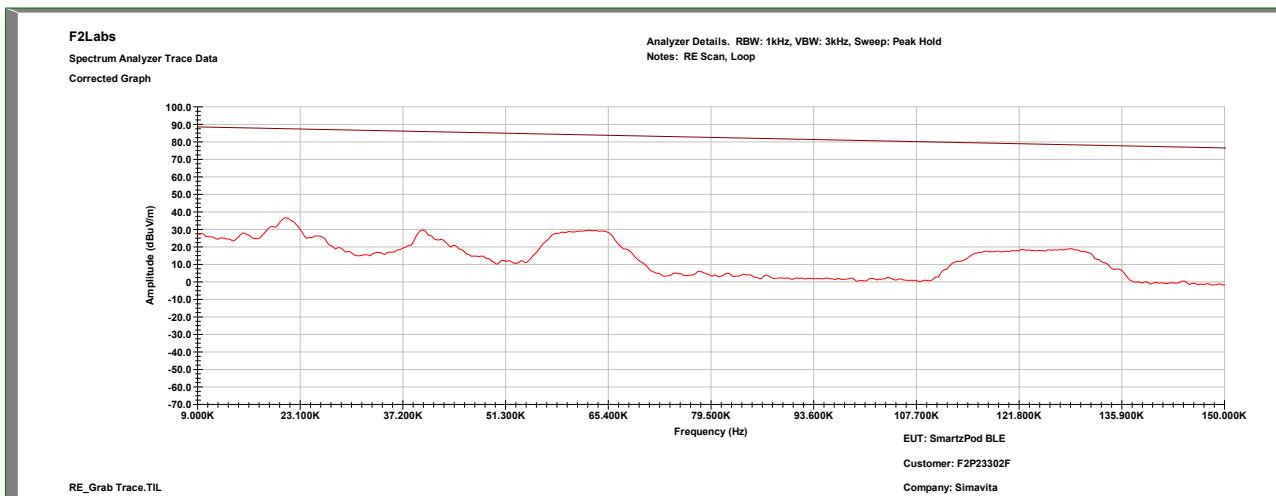

### Characterization Scan, 150 kHz to 30 MHz

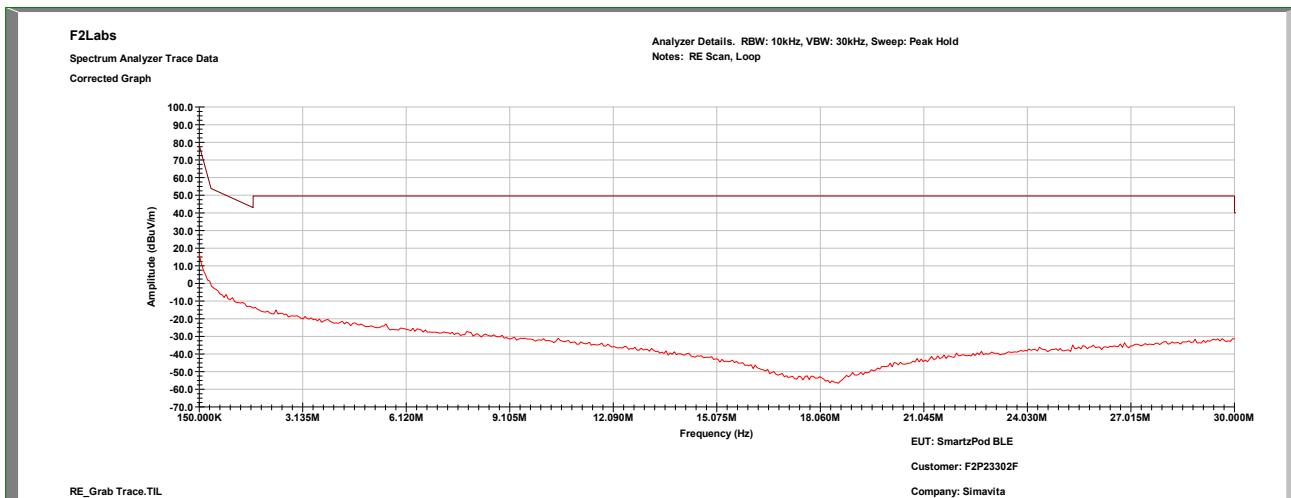


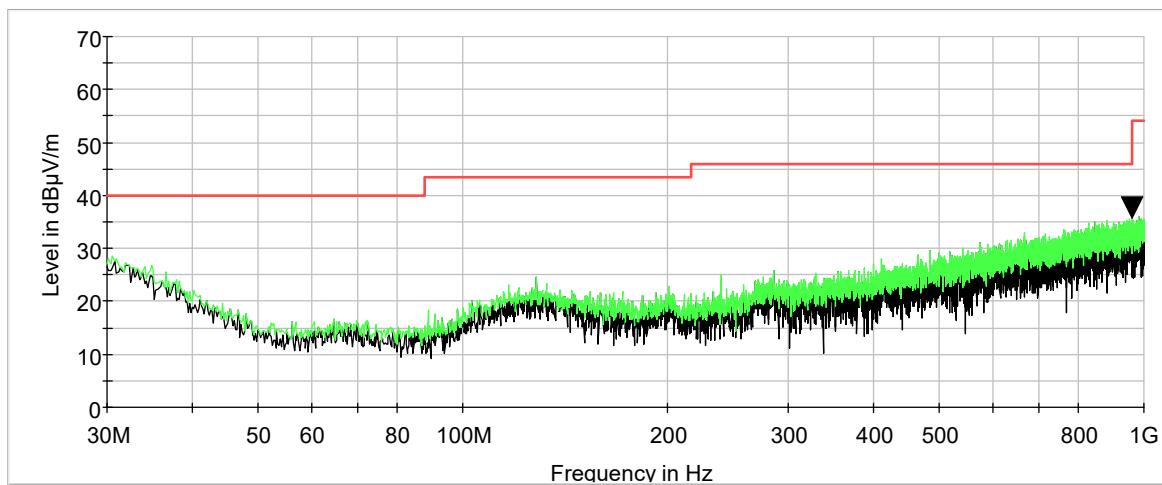
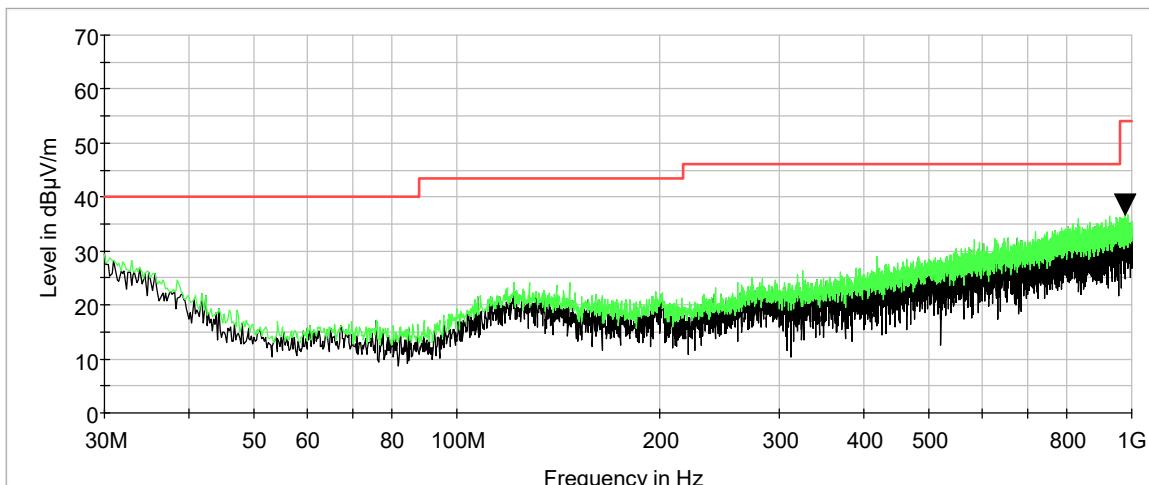
**30 MHz to 1000 MHz, Vertical****30 MHz to 1000 MHz, Horizontal**



## Measurements, 30 MHz to 1000 MHz

Note: Chart below includes data from all three channels.

Frequency (MHz)	Antenna Polarization	Antenna Height (cm)	Azimuth (degrees)	Reading (dB $\mu$ V)	Corrector Factors (dB)	Emission (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
34.840000	V	102.00	0.00	18.7	3.5	22.20	40.0	-17.8
38.520000	H	102.00	0.00	18.6	0.7	19.30	40.0	-20.7
65.880000	V	102.00	0.00	18.1	-6.6	11.50	40.0	-28.5
99.840000	H	102.00	0.00	18.2	-4.0	14.20	43.5	-29.3
128.360000	V	102.00	0.00	18.0	0.2	18.20	43.5	-25.3
199.960000	H	102.00	0.00	18.1	-0.1	18.00	43.5	-25.5
200.520000	V	102.00	0.00	18.0	0.0	18.00	43.5	-25.5
304.880000	H	102.00	0.00	18.2	1.7	19.90	46.0	-26.1
404.240000	V	102.00	0.00	17.5	4.2	21.70	46.0	-24.3
501.440000	H	102.00	0.00	17.9	6.6	24.50	46.0	-21.5
603.080000	V	102.00	0.00	17.8	8.1	25.90	46.0	-20.1
702.200000	H	102.00	0.00	17.8	9.5	27.30	46.0	-18.7

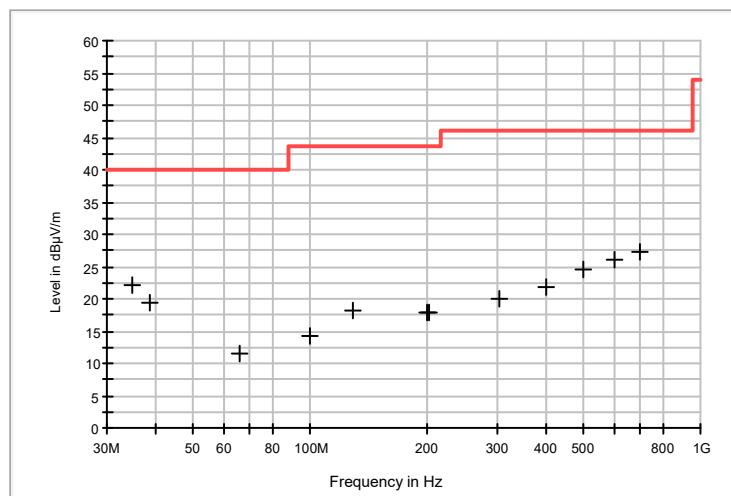


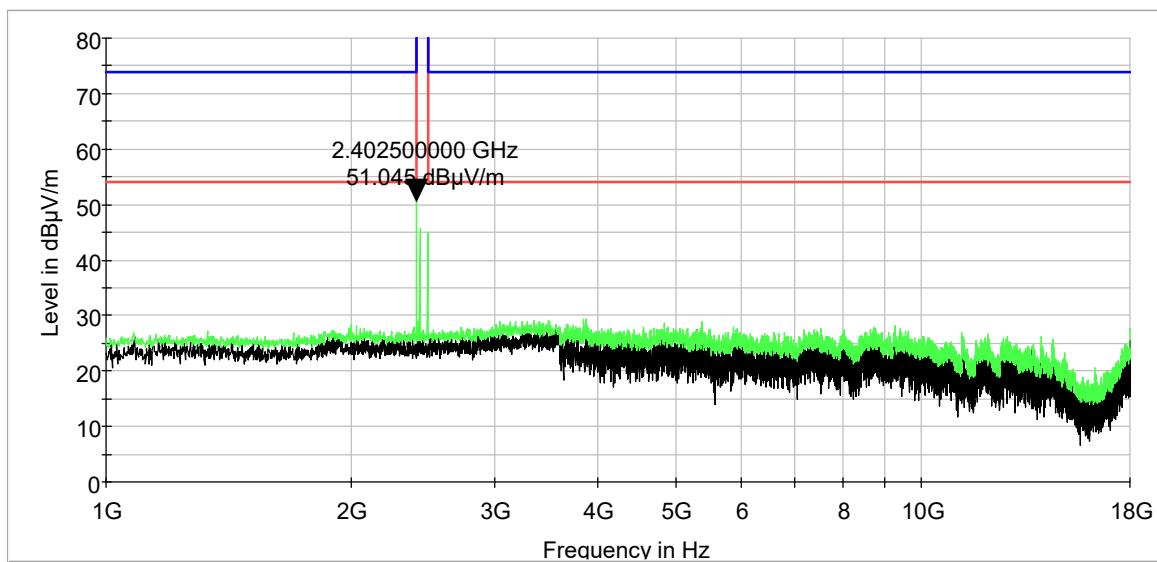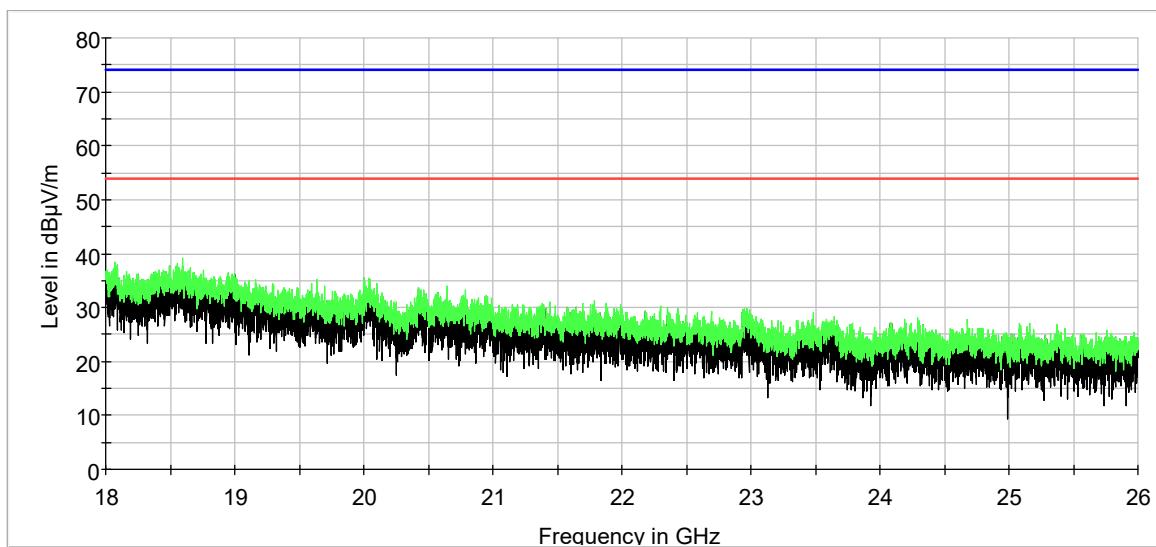**1 GHz to 18 GHz, Vertical****18 GHz to 26 GHz, Vertical**

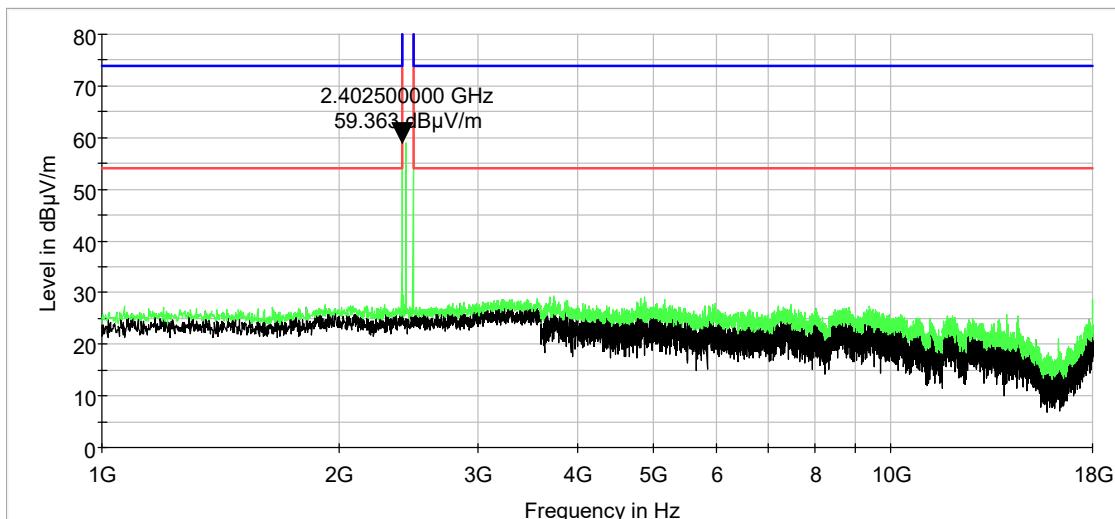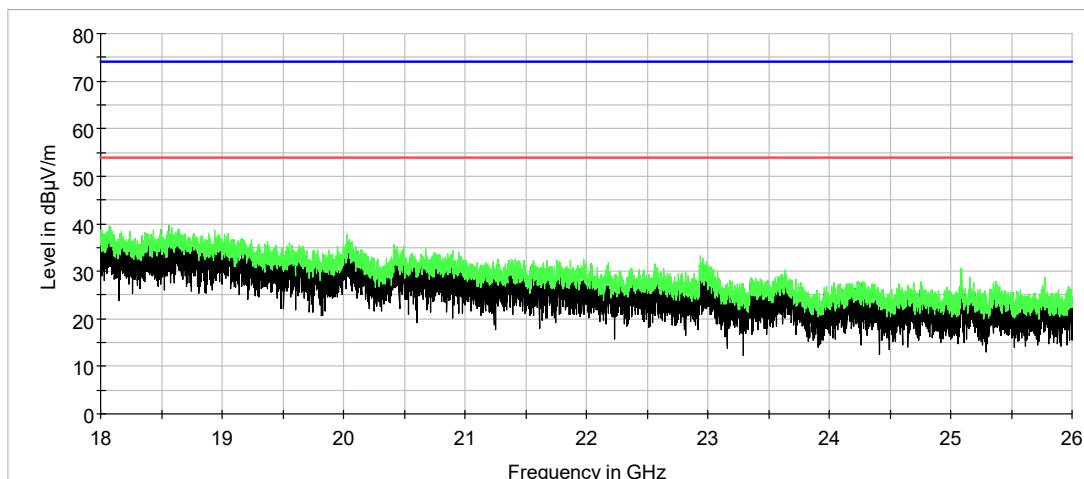**Low Channel, 1 GHz to 18 GHz, Horizontal****Low Channel, 18 GHz to 26 GHz, Horizontal**


## 8 PHOTOGRAPHS - TEST SETUPS

### Spurious Emissions: Less Than 30 MHz

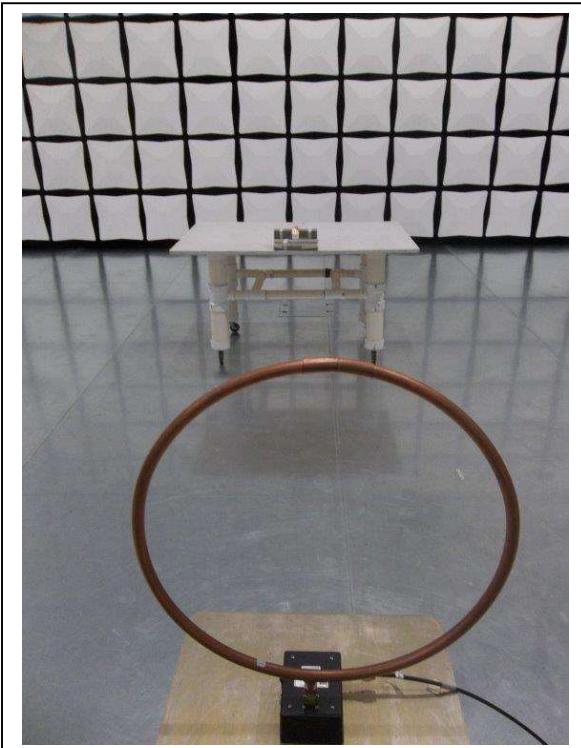

### Spurious Emissions: 30 MHz to 1000 MHz

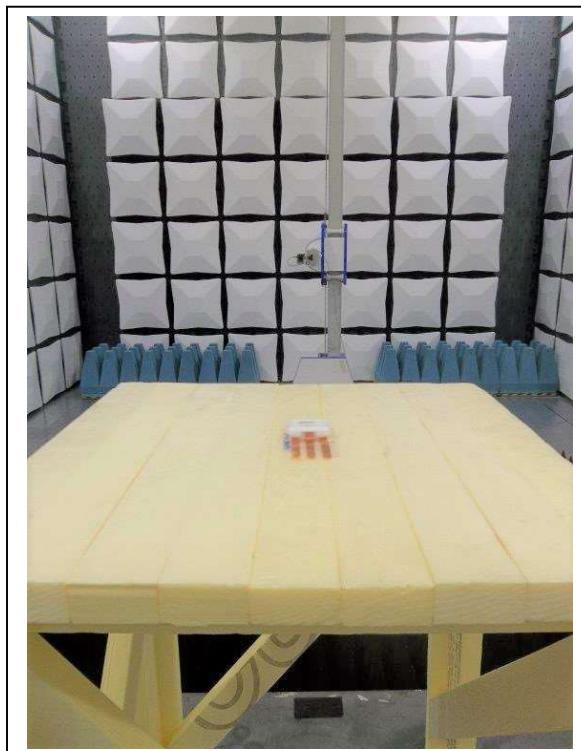

**Spurious Emissions: 1 GHz to 18 GHz****Spurious Emissions: 18 GHz to 26 GHz**

**Field Strength of Emissions, Occupied Bandwidth**