
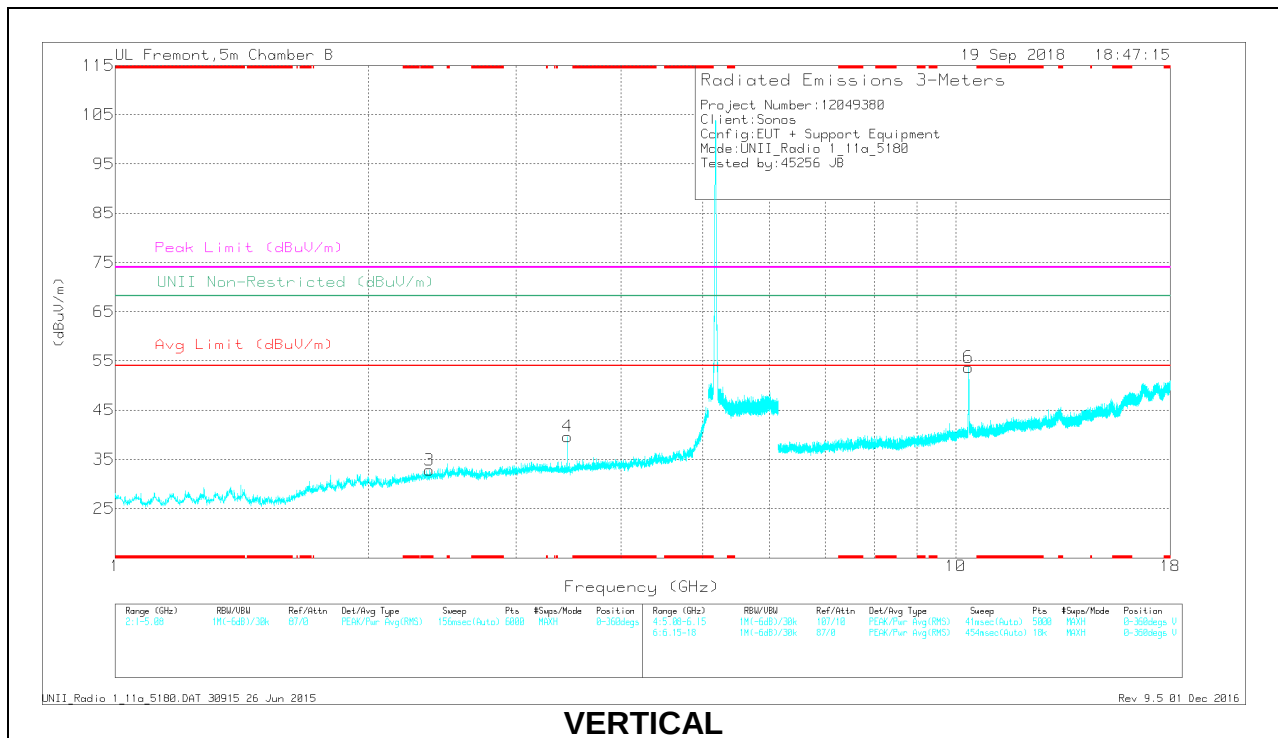


HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

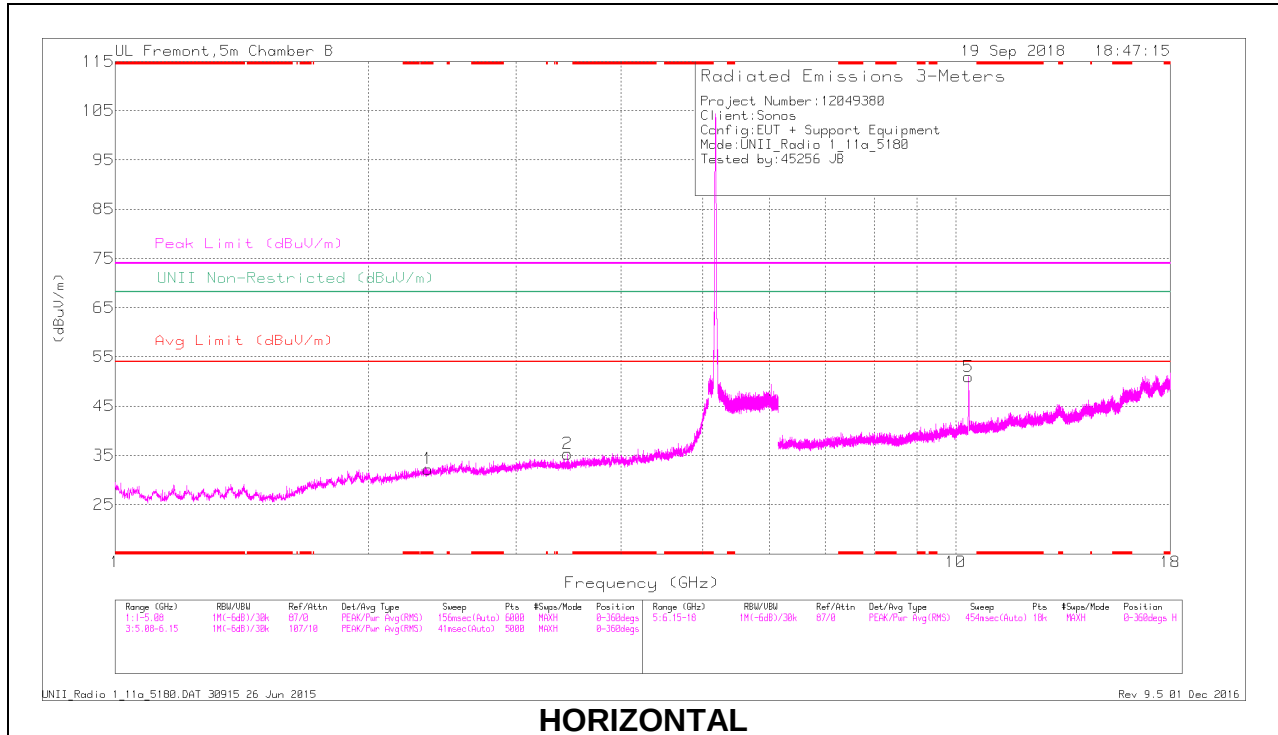

RADIATED EMISSIONS

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.357	32.44	PK	32.2	-32.4	0	32.24	-	-	74	-41.76	-	-	0-360	102	H
3	* 2.366	33.13	PK	32.2	-32.5	0	32.83	-	-	74	-41.17	-	-	0-360	200	V
2	3.453	34.32	PK	32.9	-31.9	0	35.32	-	-	-	-	68.2	-32.88	0-360	199	H
4	3.453	38.65	PK	32.9	-31.9	0	39.65	-	-	-	-	68.2	-28.55	0-360	102	V
5	10.36	36.25	PK	37.8	-23.1	0	50.95	-	-	-	-	68.2	-17.25	0-360	199	H
6	10.363	38.89	PK	37.8	-23	0	53.69	-	-	-	-	68.2	-14.51	0-360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

Radiated Emissions



Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.355	39.4	PK-U	32.2	-32.5	0	39.1	-	-	74	-34.9	-	-	175	308	H
* 2.356	27.3	ADR	32.2	-32.4	0	27.1	54	-26.9	-	-	-	-	175	308	H
* 2.365	39.64	PK-U	32.2	-32.5	0	39.34	-	-	74	-34.66	-	-	129	341	V
* 2.364	27.39	ADR	32.2	-32.6	0	26.99	54	-27.01	-	-	-	-	129	341	V
1.717	39.84	PK-U	29.8	-33	0	36.64	-	-	-	-	68.2	-31.56	150	352	V
1.863	39.45	PK-U	30.9	-33.5	0	36.95	-	-	-	-	68.2	-31.95	316	263	H
3.453	40.53	PK-U	32.9	-31.9	0	41.53	-	-	-	-	68.2	-26.67	121	155	H
3.453	43.69	PK-U	32.9	-31.9	0	44.69	-	-	-	-	68.2	-23.51	112	199	V
10.362	43.19	PK-U	37.8	-23.1	0	57.89	-	-	-	-	68.2	-10.31	319	217	H
10.363	46.15	PK-U	37.8	-23	0	60.95	-	-	-	-	68.2	-7.25	324	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

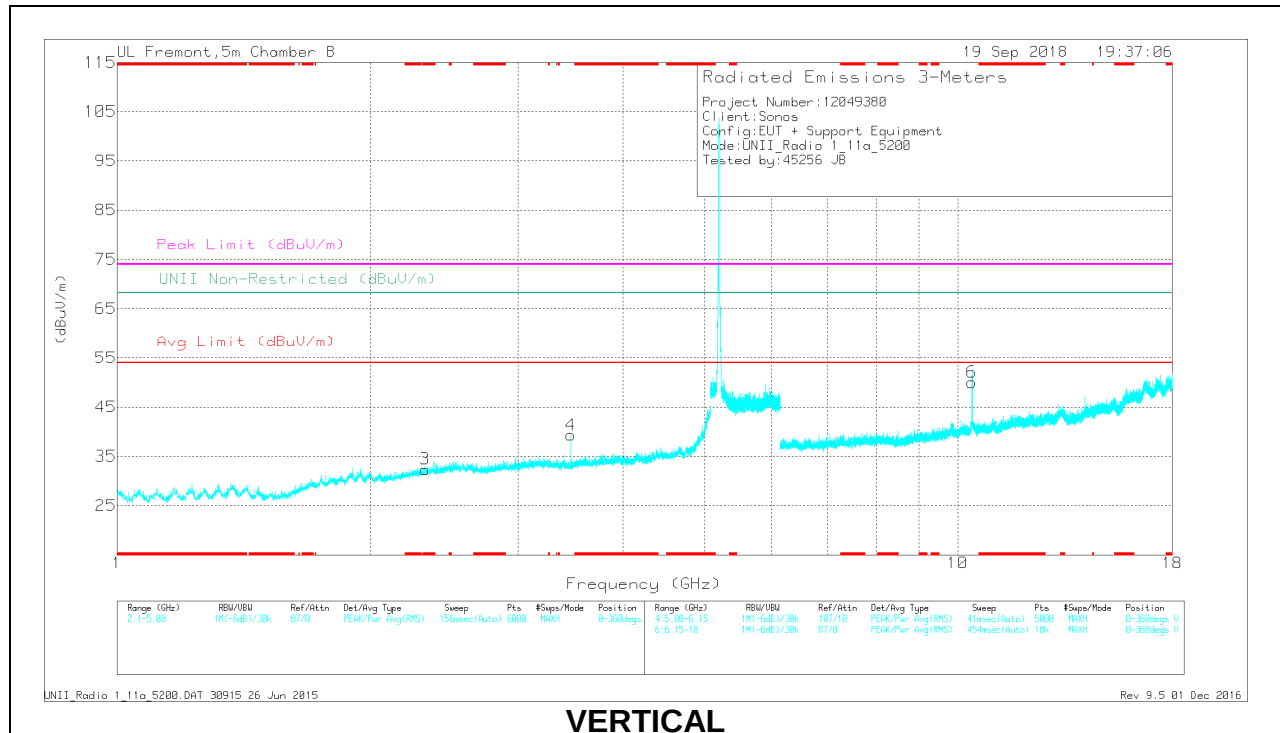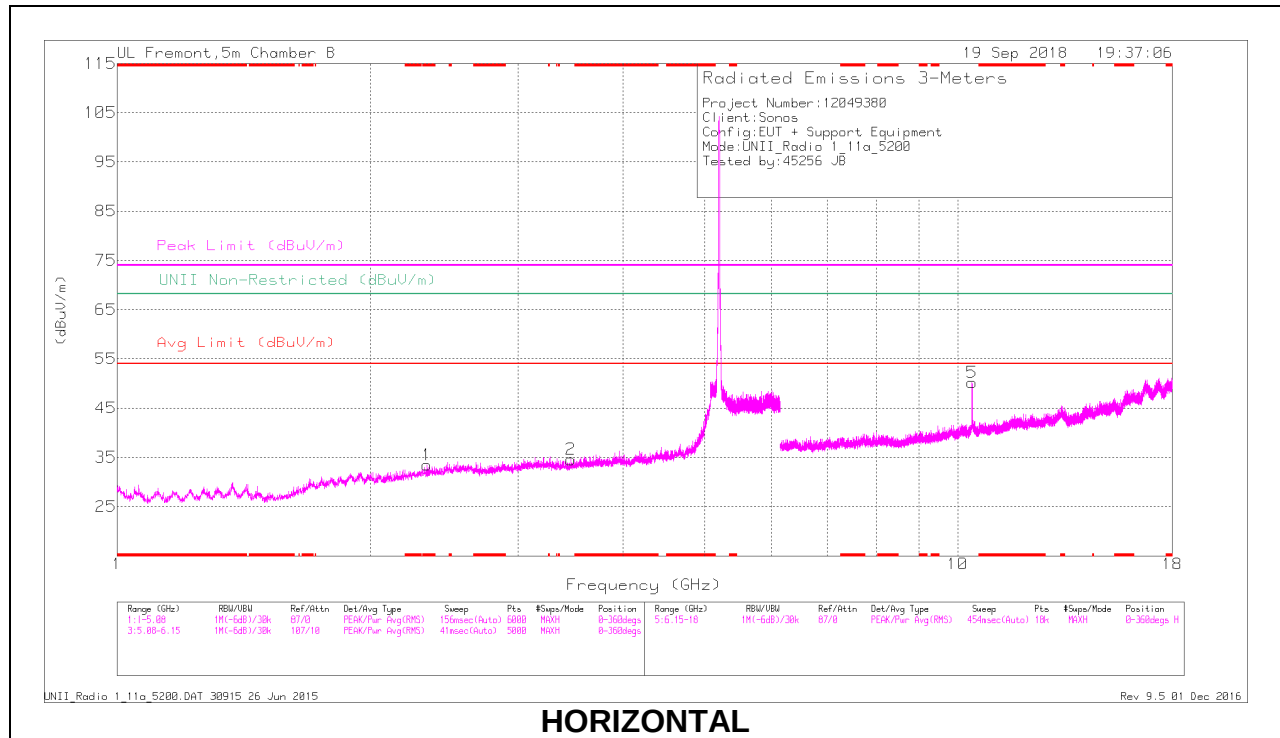

RADIATED EMISSIONS

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.338	33.74	PK	32.1	-32.4	0	33.44	-	-	74	-40.56	-	-	0-360	99	H
3	* 2.325	32.48	PK	32.1	-32.2	0	32.38	-	-	74	-41.62	-	-	0-360	200	V
2	3.466	33.37	PK	32.9	-31.7	0	34.57	-	-	-	-	68.2	-33.63	0-360	199	H
4	3.467	38.15	PK	32.9	-31.7	0	39.35	-	-	-	-	68.2	-28.95	0-360	200	V
6	10.397	34.63	PK	37.9	-22.5	0	50.03	-	-	-	-	68.2	-18.17	0-360	200	V
5	10.401	34.67	PK	37.9	-22.4	0	50.17	-	-	-	-	68.2	-18.03	0-360	102	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

Radiated Emissions



Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.338	40.19	PK-U	32.1	-32.4	0	39.89	-	-	74	-34.11	-	-	149	228	H
* 2.339	27.64	ADR	32.1	-32.4	0	27.34	54	-26.66	-	-	-	-	149	228	H
* 2.323	39.82	PK-U	32.1	-32.2	0	39.72	-	-	74	-34.28	-	-	346	371	V
* 2.323	27.63	ADR	32.1	-32.2	0	27.53	54	-26.47	-	-	-	-	346	371	V
1.717	39.84	PK-U	29.8	-33	0	36.64	-	-	-	-	68.2	-31.56	150	352	V
1.863	39.45	PK-U	30.9	-33.5	0	36.95	-	-	-	-	68.2	-31.95	316	263	H
3.466	40.03	PK-U	32.9	-31.7	0	41.23	-	-	-	-	68.2	-26.97	145	267	H
3.467	42.87	PK-U	32.9	-31.7	0	44.07	-	-	-	-	68.2	-24.13	110	162	V
10.399	40.03	PK-U	37.9	-22.5	0	55.43	-	-	-	-	68.2	-12.77	92	175	V
10.402	43.65	PK-U	37.9	-22.4	0	59.15	-	-	-	-	68.2	-9.05	246	130	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

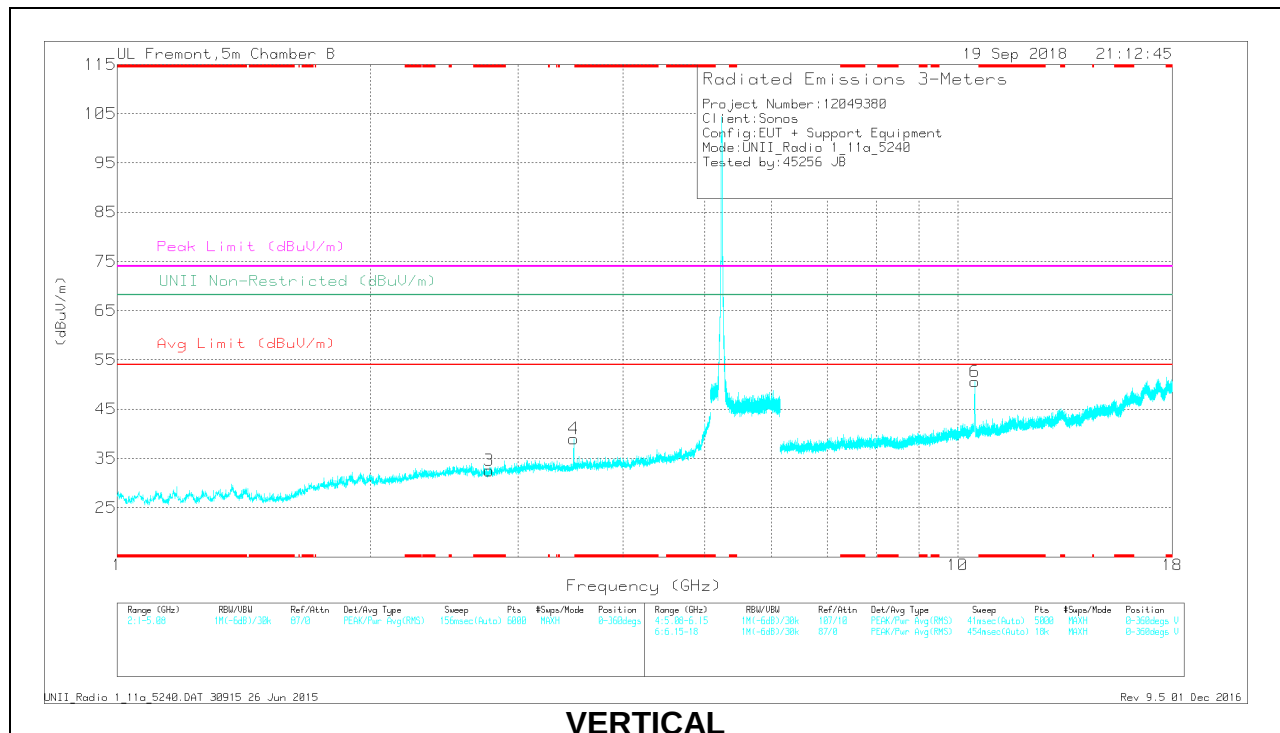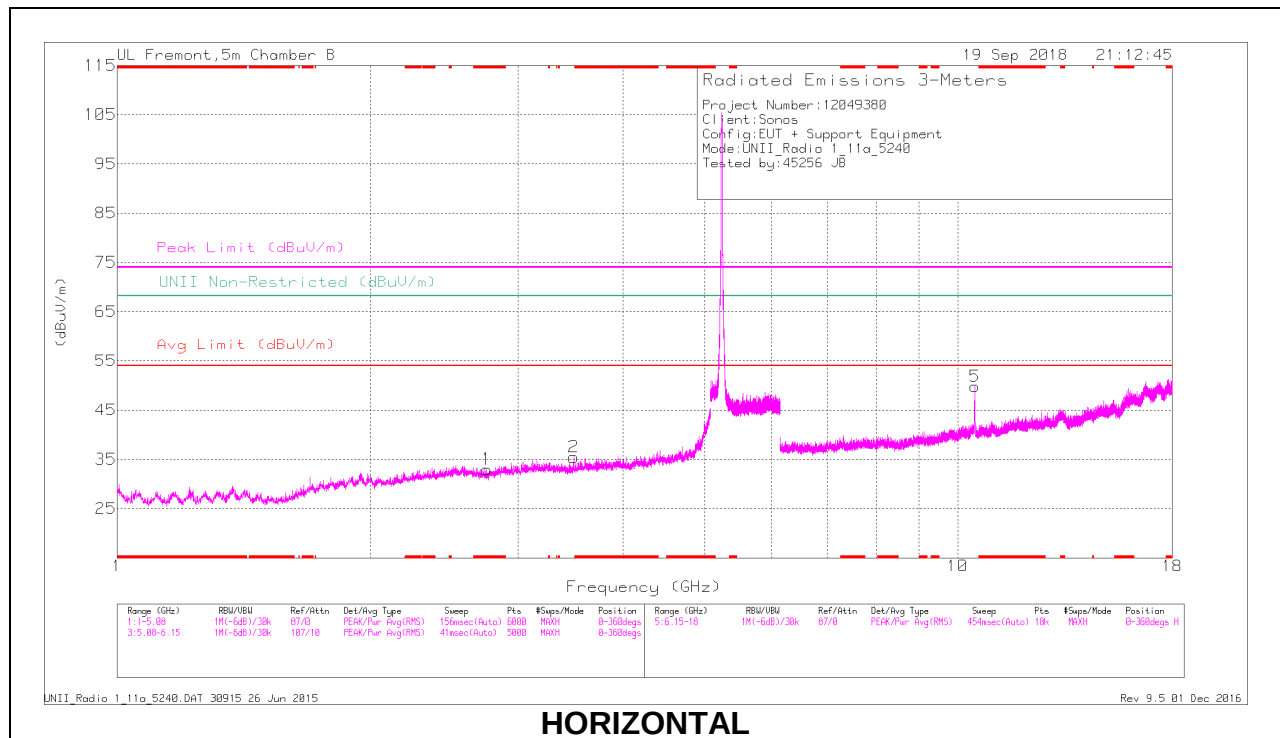

RADIATED EMISSIONS

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.754	32.79	PK	32.4	-32.2	0	32.99	-	-	74	-41.01	-	-	0-360	199	H
3	* 2.77	32.72	PK	32.4	-32.6	0	32.52	-	-	74	-41.48	-	-	0-360	200	V
2	3.493	34.06	PK	32.9	-31.5	0	35.46	-	-	-	-	68.2	-32.74	0-360	102	H
4	3.493	37.58	PK	32.9	-31.5	0	39.98	-	-	-	-	68.2	-29.22	0-360	200	V
5	10.483	34.78	PK	37.8	-22.8	0	49.78	-	-	-	-	68.2	-18.42	0-360	102	H
6	10.484	35.59	PK	37.8	-22.8	0	50.59	-	-	-	-	68.2	-17.61	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.754	39.21	PK-U	32.4	-32.3	0	39.31	-	-	74	-34.69	-	-	128	303	H
* 2.756	26.88	ADR	32.4	-32.2	0	27.08	54	-26.92	-	-	-	-	128	303	H
* 2.771	40.43	PK-U	32.4	-32.6	0	40.23	-	-	74	-33.77	-	-	112	232	V
* 2.769	27.43	ADR	32.4	-32.6	0	27.23	54	-26.77	-	-	-	-	112	232	V
1.717	39.84	PK-U	29.8	-33	0	36.64	-	-	-	-	68.2	-31.56	150	352	V
1.863	39.45	PK-U	30.9	-33.5	0	36.85	-	-	-	-	68.2	-31.35	316	263	H
3.493	39.59	PK-U	32.9	-31.5	0	40.99	-	-	-	-	68.2	-27.21	91	181	H
3.493	43.09	PK-U	32.9	-31.5	0	44.49	-	-	-	-	68.2	-23.71	110	194	V
10.483	42.13	PK-U	37.8	-22.8	0	57.13	-	-	-	-	68.2	-11.07	248	107	H
10.483	42.61	PK-U	37.8	-22.8	0	57.61	-	-	-	-	68.2	-10.39	316	106	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

9.1.1.2. TX ABOVE 1 GHz 802.11a MODE IN THE 5.3 GHz BAND

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

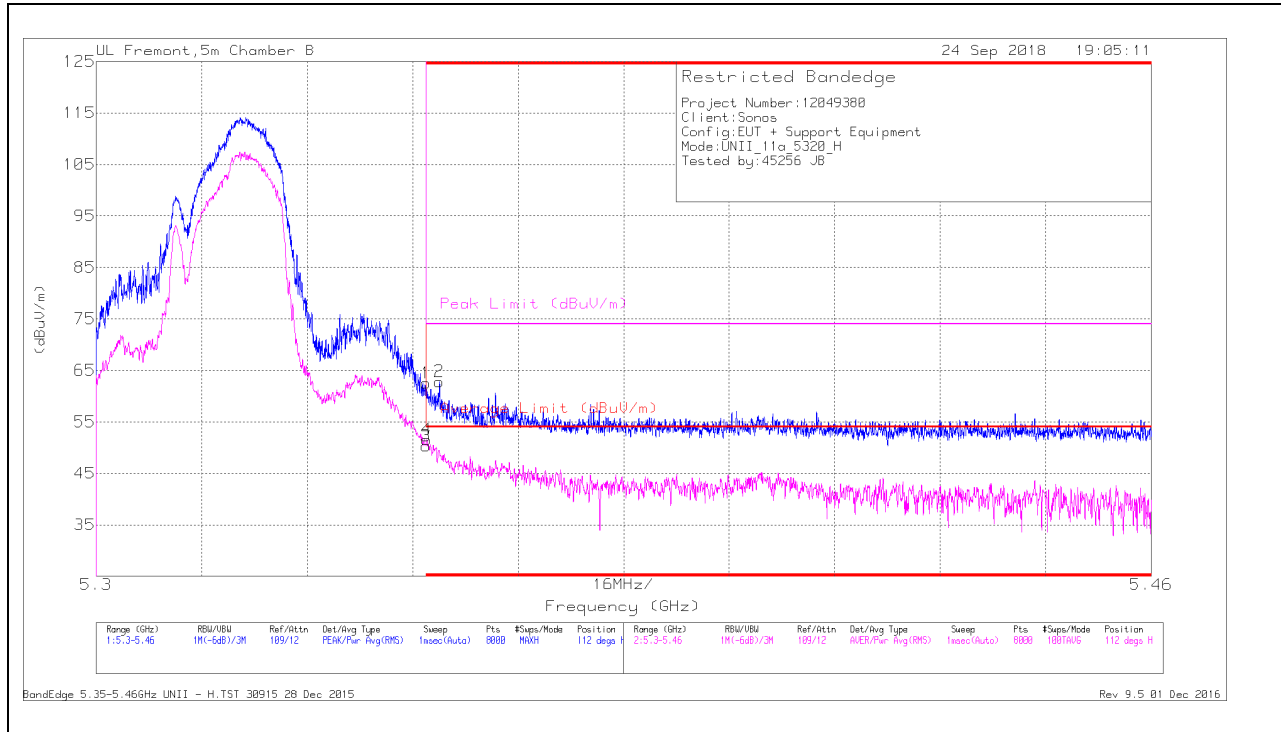

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	45.95	Pk	35	-18.4	0	62.55	-	-	74	-11.45	112	159	H
2	* 5.352	45.84	Pk	35	-18.4	0	62.84	-	-	74	-11.16	112	159	H
3	* 5.35	33.73	RMS	35	-18.4	0	50.33	54	-3.67	-	-	112	159	H
4	* 5.35	34.94	RMS	35	-18.4	0	51.54	54	-2.46	-	-	112	159	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT



Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	38.99	Pk	35	-18.4	0	55.59	-	-	74	-18.41	126	177	V
2	* 5.355	43.1	Pk	35	-18.3	0	59.8	-	-	74	-14.2	126	177	V
3	* 5.35	28.84	RMS	35	-18.4	0	45.44	54	-8.56	-	-	126	177	V
4	* 5.357	30.03	RMS	35	-17.9	0	47.13	54	-6.87	-	-	126	177	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

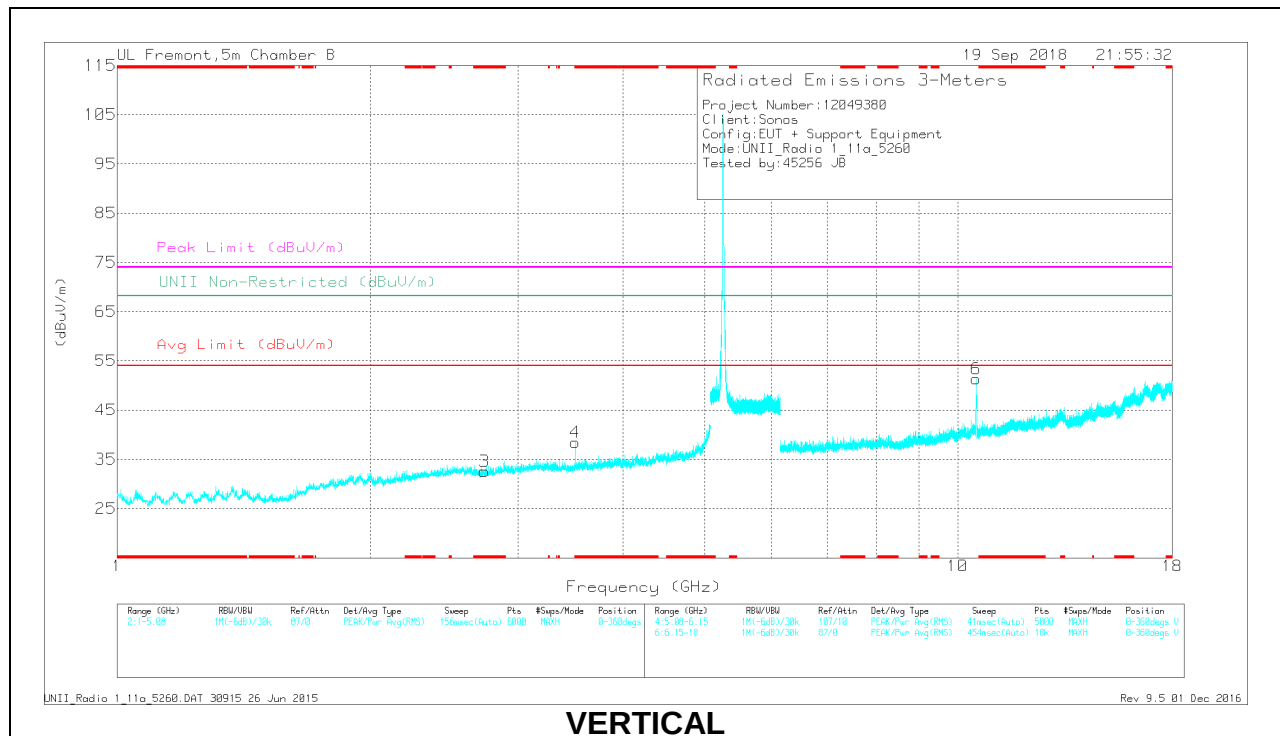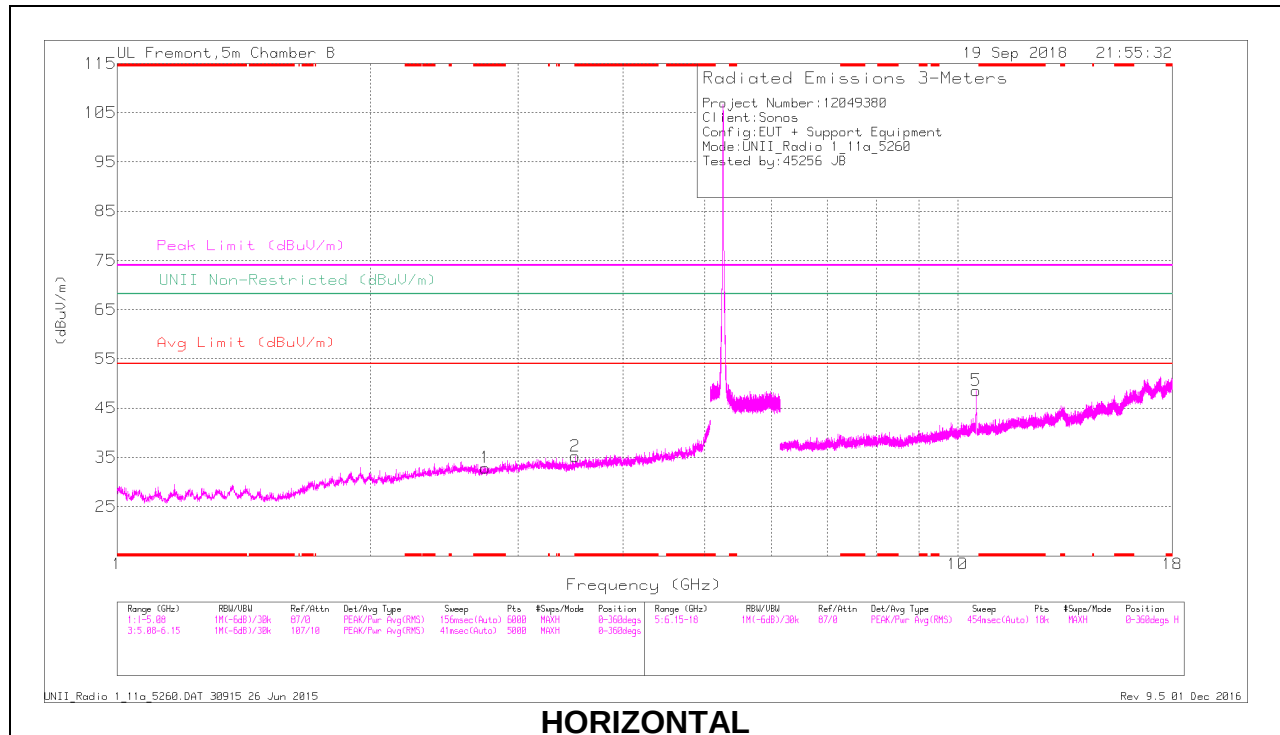

RADIATED EMISSIONS

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.741	32.98	PK	32.3	-32.4	0	32.88	-	-	74	-41.12	-	-	0-360	102	H
2	* 3.506	33.41	PK	32.9	-31.1	0	35.21	-	-	74	-38.79	-	-	0-360	102	H
3	* 2.736	32.67	PK	32.3	-32.4	0	32.57	-	-	74	-41.43	-	-	0-360	200	V
4	* 3.507	36.65	PK	32.9	-31.1	0	38.45	-	-	74	-35.55	-	-	0-360	101	V
5	10.521	34.17	PK	37.8	-23.4	0	48.57	-	-	-	-	68.2	-19.63	0-360	199	H
6	10.523	37.04	PK	37.8	-23.5	0	51.34	-	-	-	-	68.2	-16.86	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

Radiated Emissions



Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.741	39.57	PK-U	32.3	-32.4	0	39.47	-	-	74	-34.53	-	-	125	282	H
* 2.739	27.65	ADR	32.3	-32.4	0	27.55	54	-26.45	-	-	-	-	125	282	H
* 3.507	40.47	PK-U	32.9	-31.1	0	42.27	-	-	74	-31.73	-	-	222	111	H
* 3.507	30.16	ADR	32.9	-31.1	0	31.96	54	-22.04	-	-	-	-	222	111	H
* 2.734	40.12	PK-U	32.3	-32.4	0	40.02	-	-	74	-33.98	-	-	53	230	V
* 2.734	27.66	ADR	32.3	-32.4	0	27.56	54	-26.44	-	-	-	-	53	230	V
* 3.507	42.17	PK-U	32.9	-31.1	0	43.97	-	-	74	-30.03	-	-	113	154	V
* 3.507	35.24	ADR	32.9	-31.1	0	37.04	54	-16.96	-	-	-	-	113	154	V
10.521	41.57	PK-U	37.8	-23.4	0	55.97	-	-	-	-	68.2	-12.23	313	113	V
10.522	43.53	PK-U	37.8	-23.5	0	57.83	-	-	-	-	68.2	-10.37	241	207	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

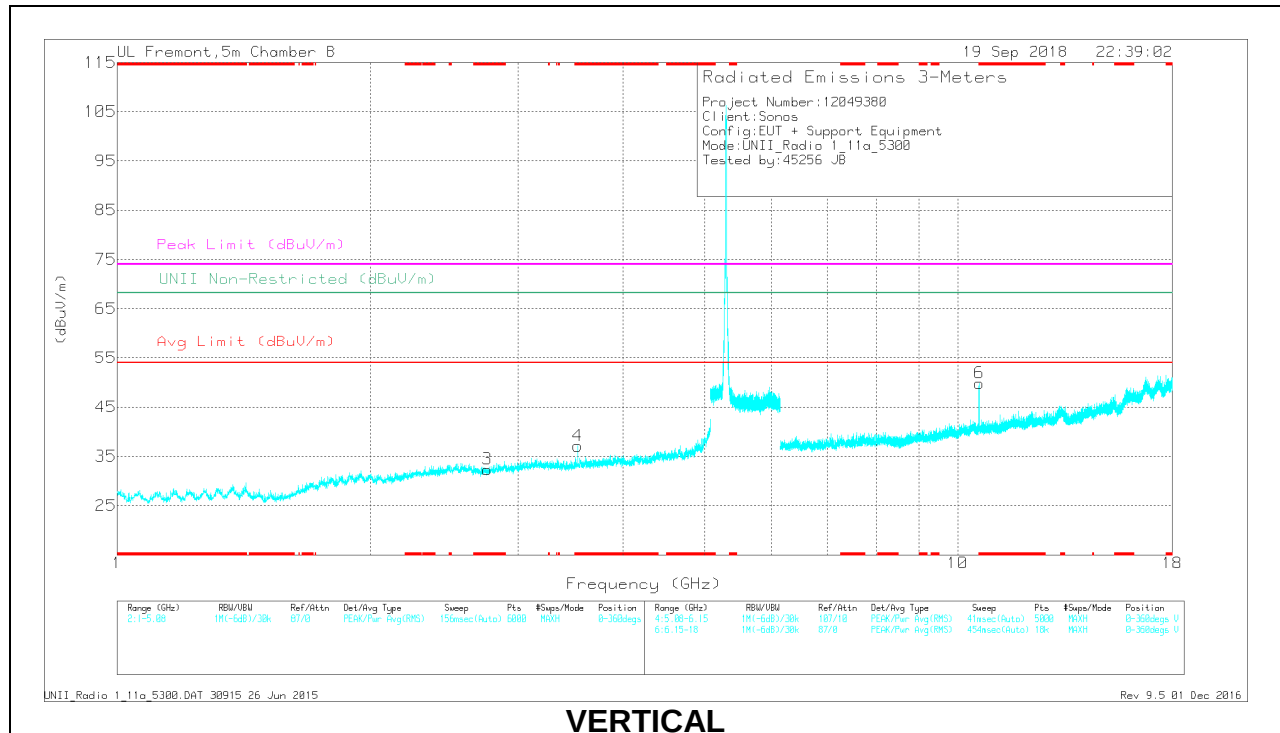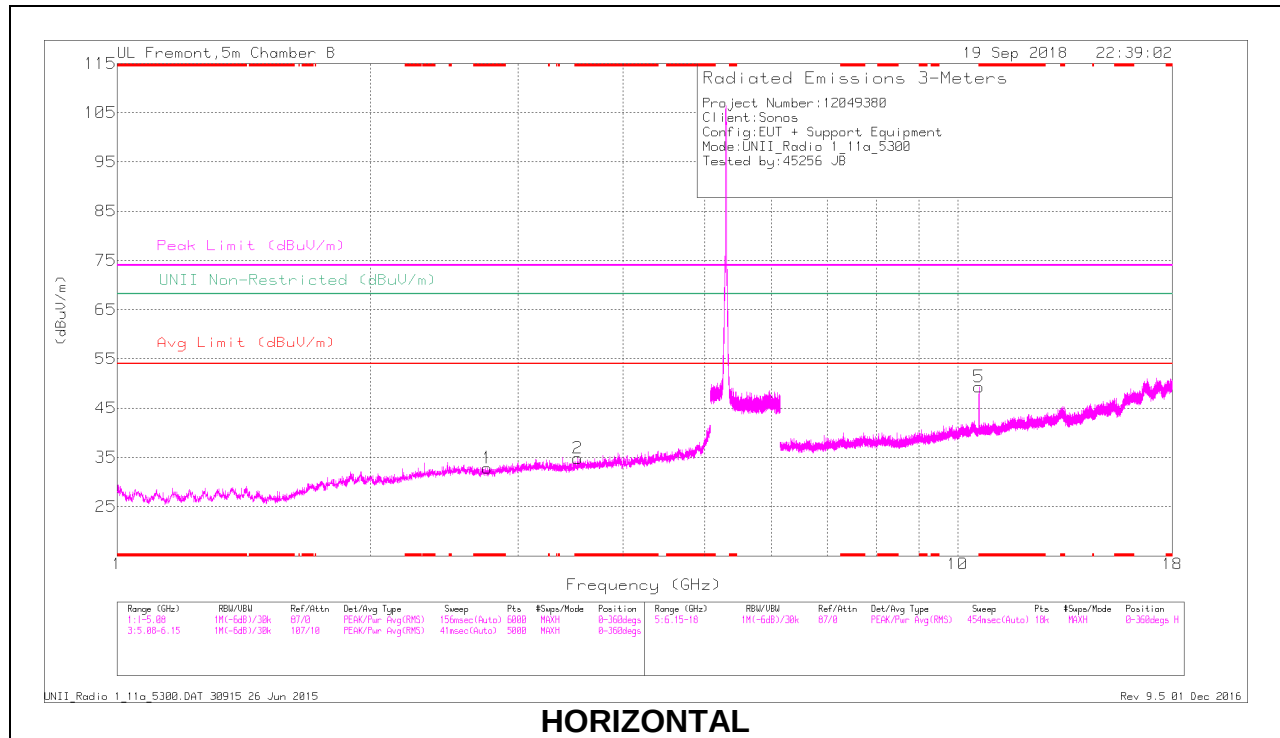

RADIATED EMISSIONS

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Ctrl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.757	32.74	PK	32.4	-32.3	0	32.84	-	-	74	-41.16	-	-	0-360	199	H
2	* 3.533	32.42	PK	33	-30.6	0	34.82	-	-	74	-39.18	-	-	0-360	98	H
3	* 2.757	32.27	PK	32.4	-32.3	0	32.37	-	-	74	-41.63	-	-	0-360	200	V
4	* 3.533	34.73	PK	33	-30.6	0	37.13	-	-	74	-36.87	-	-	0-360	102	V
5	* 10.602	35.03	PK	37.7	-23.4	0	49.33	-	-	74	-24.67	-	-	0-360	102	H
6	* 10.603	35.57	PK	37.7	-23.4	0	49.87	-	-	74	-24.13	-	-	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

Radiated Emissions



Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Ctrl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.757	39.18	PK-U	32.4	-32.3	0	39.28	-	-	74	-34.72	-	-	325	311	H
* 2.757	27.01	ADR	32.4	-32.3	0	27.11	54	-26.89	-	-	-	-	325	311	H
* 3.533	40	PK-U	33	-30.7	0	42.3	-	-	74	-31.7	-	-	70	133	H
* 3.533	29.11	ADR	33	-30.7	0	31.41	54	-22.59	-	-	-	-	70	133	H
* 2.756	39.36	PK-U	32.4	-32.3	0	39.46	-	-	74	-34.54	-	-	95	314	V
* 2.758	27.04	ADR	32.4	-32.3	0	27.14	54	-26.86	-	-	-	-	95	314	V
* 3.533	40.48	PK-U	33	-30.7	0	42.78	-	-	74	-31.22	-	-	110	102	V
* 3.533	33.23	ADR	33	-30.7	0	35.53	54	-18.47	-	-	-	-	110	102	V
* 11.643	32.39	PK-U	38.8	-21.8	0	49.39	-	-	74	-24.61	-	-	245	113	H
* 11.466	20.23	ADR	38.4	-22.9	0	35.83	54	-18.17	-	-	-	-	245	113	H
* 10.603	44.16	PK-U	37.7	-23.4	0	58.46	-	-	74	-15.54	-	-	317	246	V
* 10.603	32.33	ADR	37.7	-23.4	0	46.63	54	-7.37	-	-	-	-	317	246	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

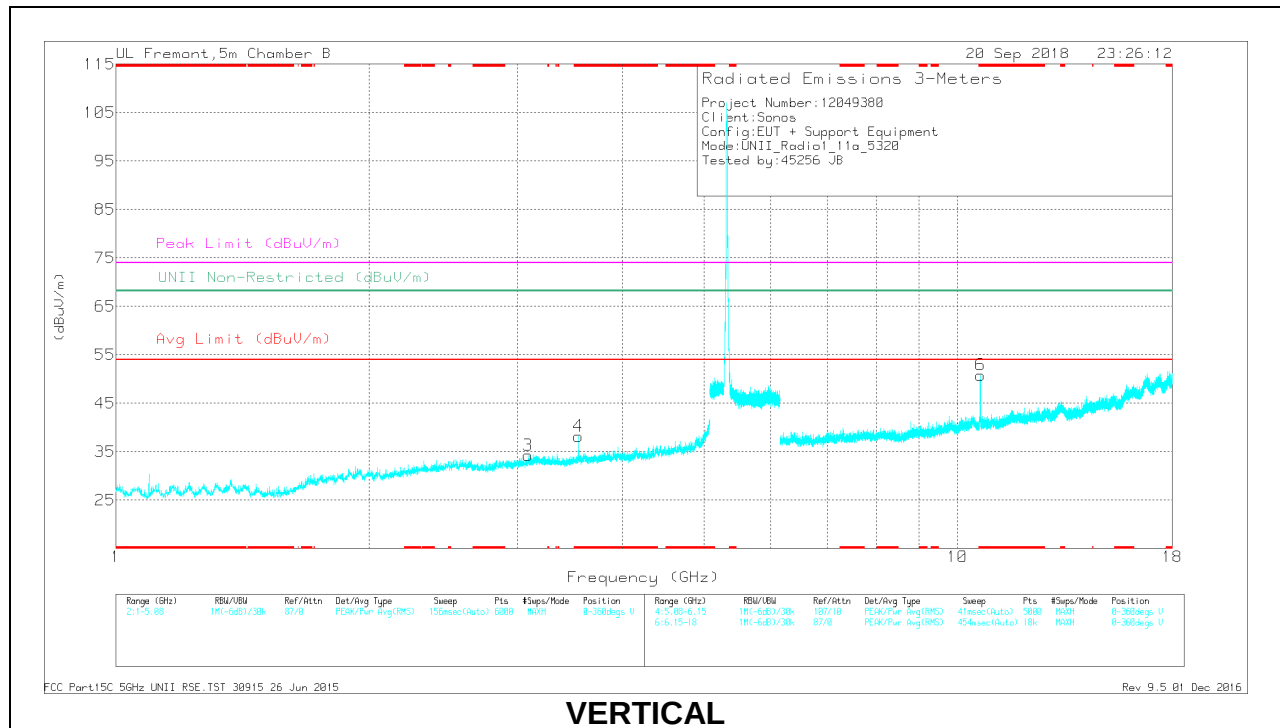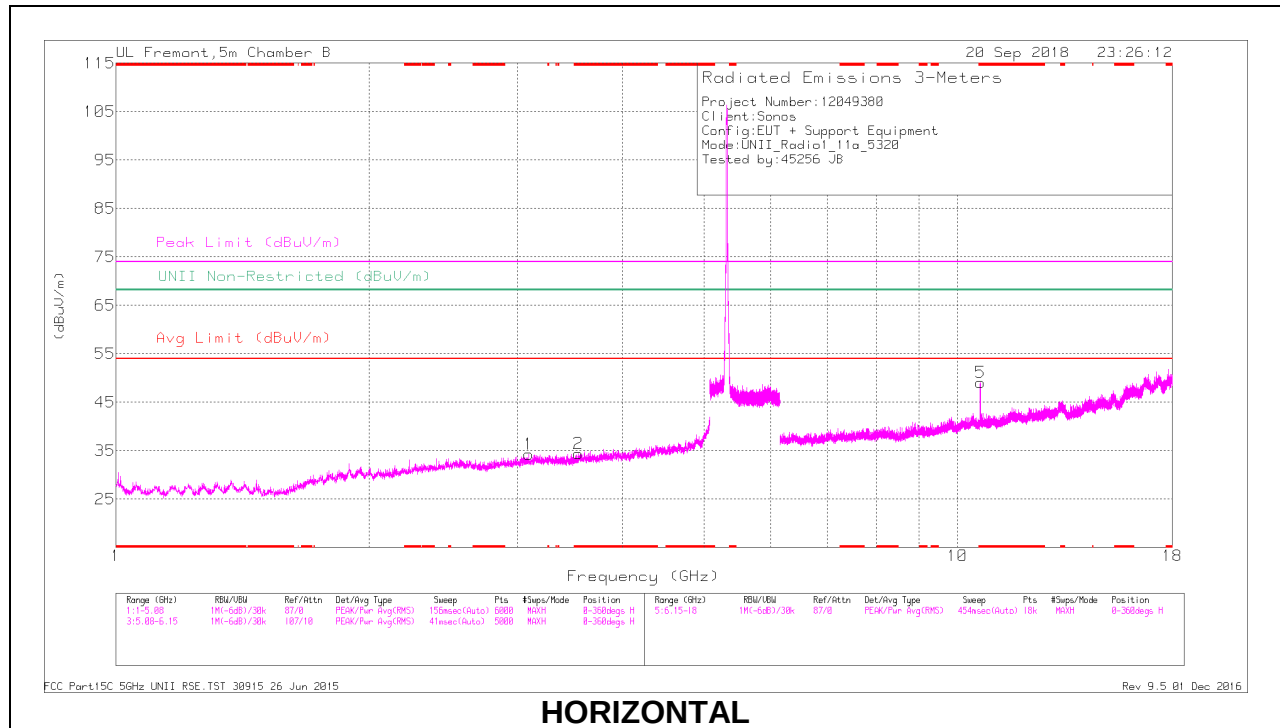

RADIATED EMISSIONS

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Ctrl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNI Non-Restricted (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
2	* 3.546	32.15	PK	33.1	-30.8	0	34.45	-	-	74	-39.55	-	-	0-360	102	H
4	* 3.546	35.93	PK	33.1	-30.8	0	38.23	-	-	74	-35.77	-	-	0-360	199	V
5	* 10.643	34.22	PK	37.8	-23	0	49.02	-	-	74	-24.98	-	-	0-360	199	H
6	* 10.645	35.03	PK	37.8	-23	0	50.83	-	-	74	-23.17	-	-	0-360	200	V
3	3.089	32.96	PK	33.2	-31.9	0	34.26	-	-	-	-	68.2	-33.94	0-360	102	V
1	3.095	32.95	PK	33.3	-32	0	34.25	-	-	-	-	68.2	-33.95	0-360	102	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Ctrl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNI Non-Restricted (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
* 3.546	39.87	PK-U	33.1	-30.8	0	42.17	-	-	74	-31.83	-	-	103	119	H
* 3.547	28.77	ADR	33.1	-30.8	0	31.07	54	-22.93	-	-	-	-	103	119	H
* 3.547	41.26	PK-U	33.1	-30.8	0	43.96	-	-	74	-30.44	-	-	119	189	V
* 3.547	34.03	ADR	33.1	-30.8	0	36.33	54	-17.67	-	-	-	-	119	189	V
* 10.642	43.42	PK-U	37.8	-23	0	58.22	-	-	74	-15.78	-	-	249	173	H
* 10.642	31.82	ADR	37.8	-23	0	46.62	54	-7.38	-	-	-	-	249	173	H
* 10.643	44.49	PK-U	37.8	-23	0	59.29	-	-	74	-14.71	-	-	329	261	V
* 10.643	32.67	ADR	37.8	-23	0	47.47	54	-6.53	-	-	-	-	329	261	V
3.09	38.94	PK-U	33.2	-31.9	0	40.24	-	-	-	-	68.2	-27.96	28	293	V
3.095	39.63	PK-U	33.3	-32	0	40.93	-	-	-	-	68.2	-27.27	350	340	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

9.1.1.3. TX ABOVE 1 GHz 802.11a MODE IN THE 5.6 GHz BAND

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

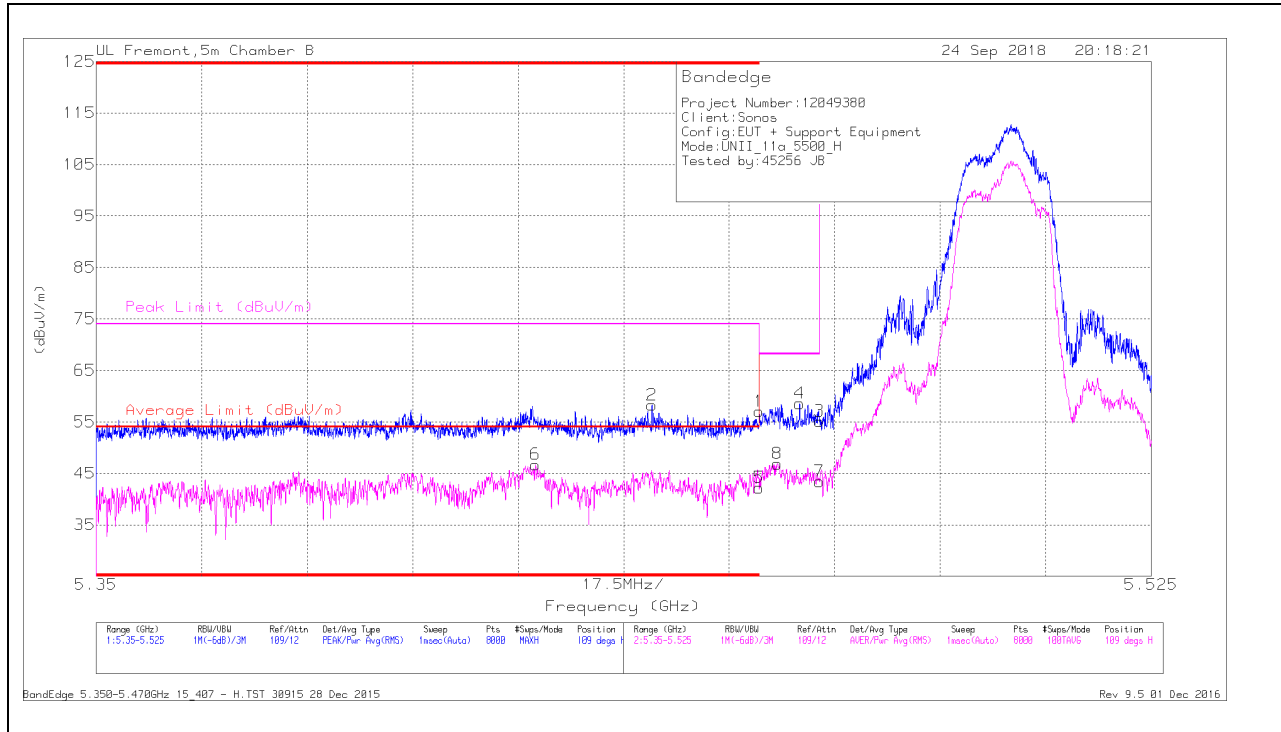

Trace Markers


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/CbI/Ftr/Pad (dB)	DC Corr (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	40.45	Pk	35.3	-18.7	0	57.05	-	-	74	-16.95	109	247	H
2	* 5.442	41.84	Pk	35.2	-18.8	0	58.24	-	-	74	-15.76	109	247	H
5	* 5.46	25.61	RMS	35.3	-18.7	0	42.21	54	-11.79	-	-	109	247	H
6	* 5.423	29.82	RMS	35.2	-18.3	0	46.72	54	-7.28	-	-	109	247	H
8	5.463	29.77	RMS	35.3	-18.2	0	46.87	-	-	-	-	109	247	H
4	5.467	41.58	Pk	35.3	-18.3	0	58.58	-	-	68.2	-9.62	109	247	H
3	5.47	38.44	Pk	35.3	-18.6	0	55.14	-	-	68.2	-13.06	109	247	H
7	5.47	26.74	RMS	35.3	-18.6	0	43.44	-	-	-	-	109	247	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

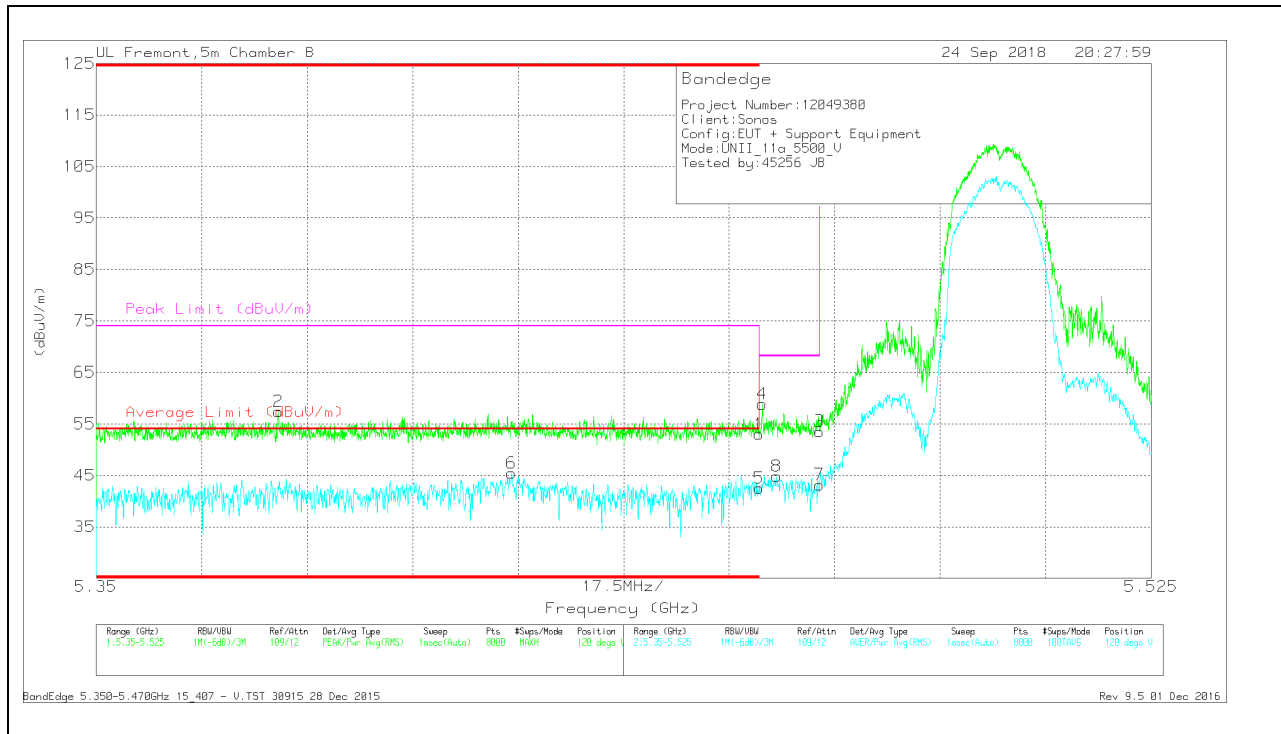

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/CbI/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	36.39	Pk	35.3	-18.7	0	52.99	-	-	74	-21.01	120	245	V
2	* 5.38	40.59	Pk	35.1	-18.3	0	57.39	-	-	74	-16.61	120	245	V
5	* 5.46	25.92	RMS	35.3	-18.7	0	42.52	54	-11.48	-	-	120	245	V
6	* 5.419	28.52	RMS	35.2	-18.3	0	45.42	54	-8.58	-	-	120	245	V
4	5.461	42.24	Pk	35.3	-18.7	0	58.84	-	-	68.2	-9.36	120	245	V
8	5.463	27.71	RMS	35.3	-18.2	0	44.81	-	-	-	-	120	245	V
3	5.47	36.83	Pk	35.3	-18.6	0	53.53	-	-	68.2	-14.67	120	245	V
7	5.47	26.45	RMS	35.3	-18.6	0	43.15	-	-	-	-	120	245	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

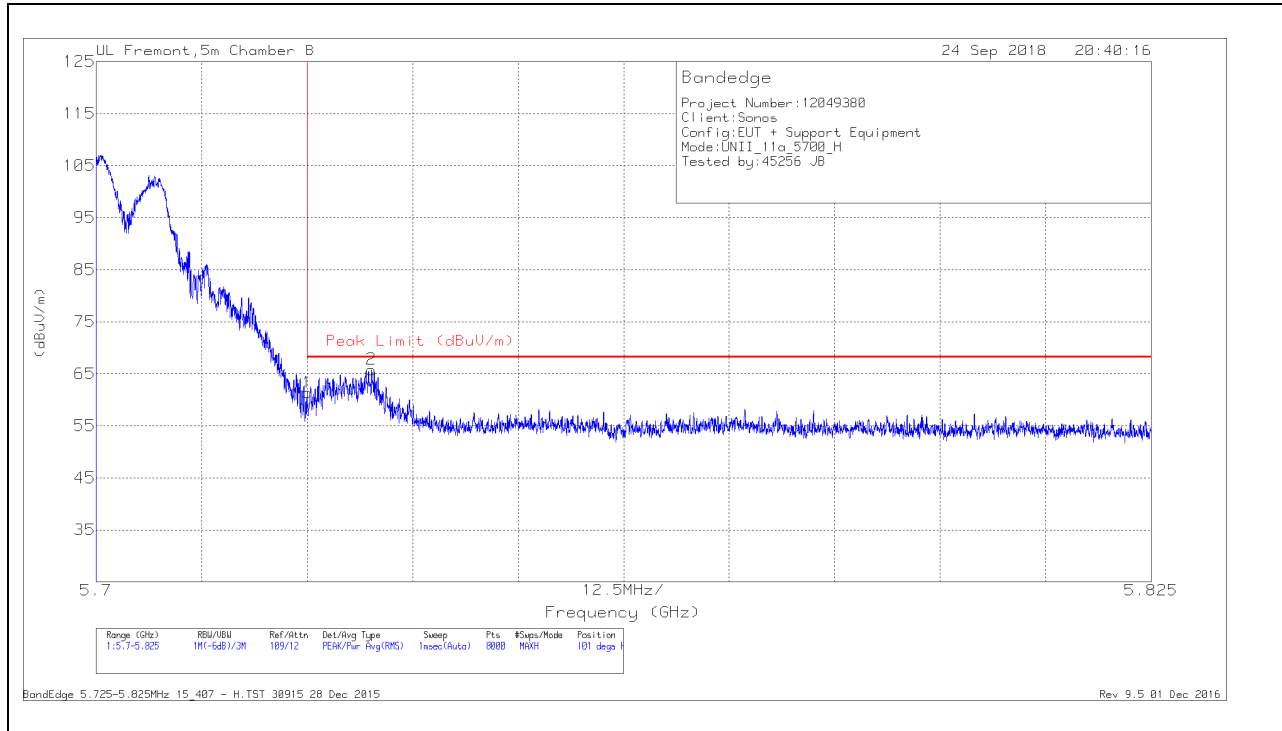


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	45.31	Pk	35.5	-19.4	61.41	68.2	-6.79	101	235	H
2	5.733	49.21	Pk	35.5	-18.9	65.81	68.2	-2.39	101	235	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VERTICAL RESULT

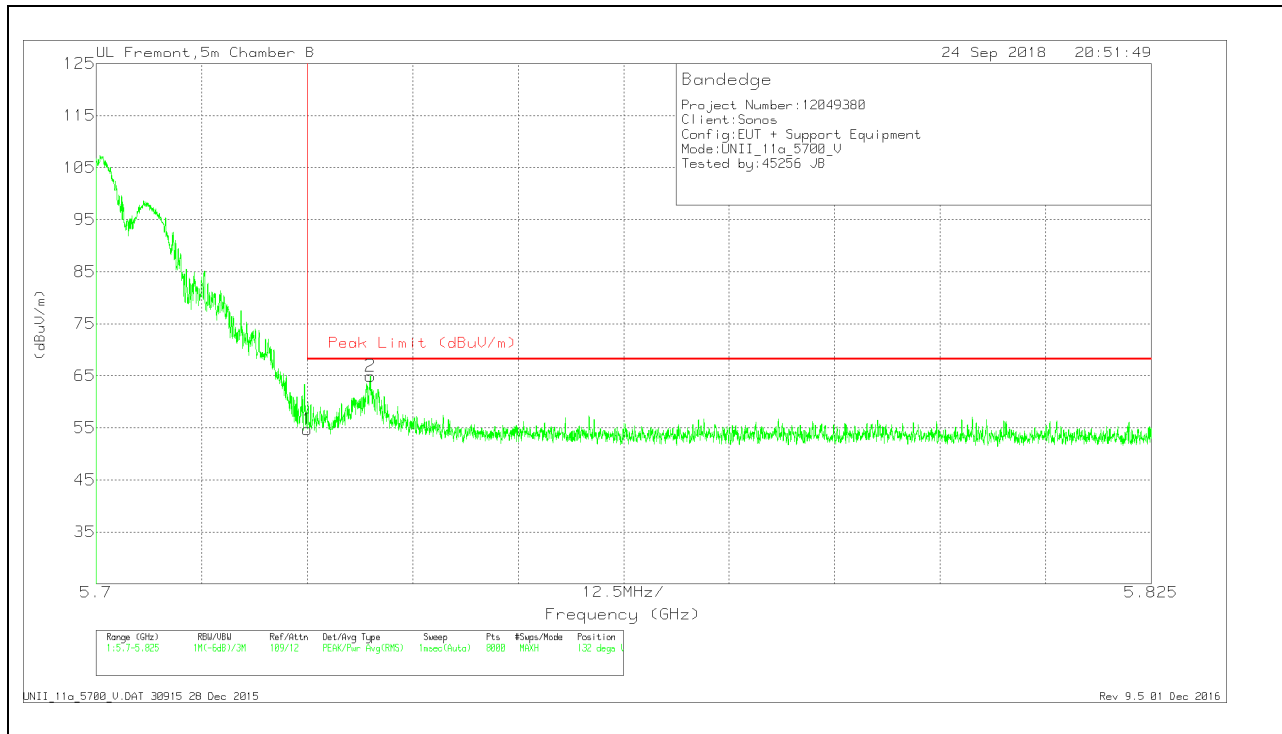



Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Ampl/Cb/Filtr/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	38.61	Pk	35.5	-19.4	0	54.71	68.2	-13.49	132	213	V
2	5.733	48.35	Pk	35.5	-18.9	0	64.95	68.2	-3.25	132	213	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

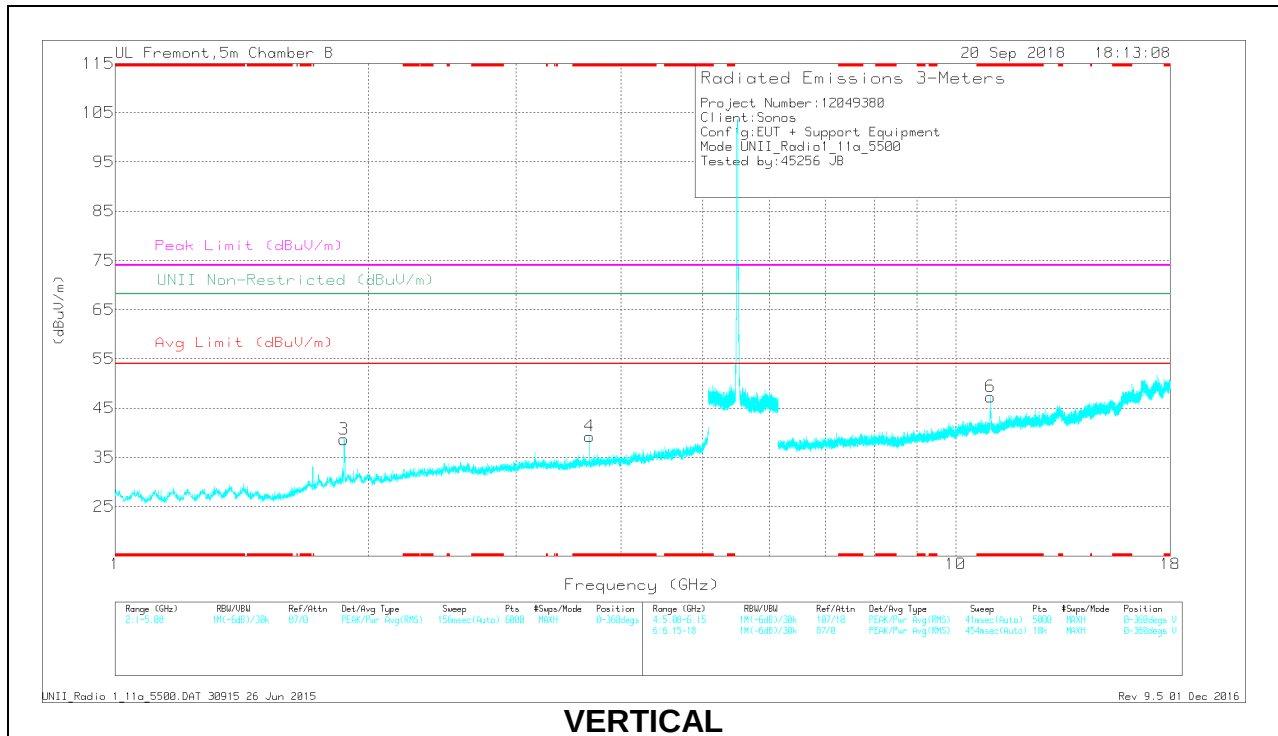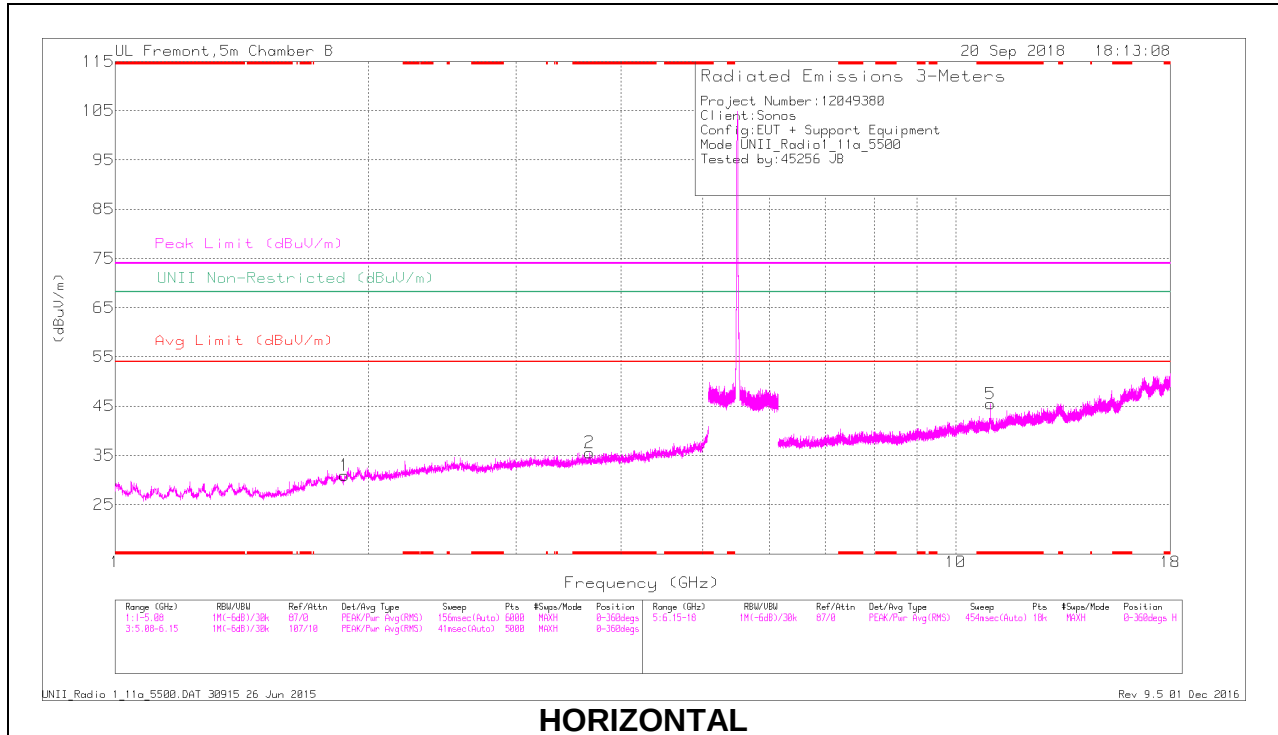

RADIATED EMISSIONS

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Ctrl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
2	* 3.667	33.25	PK	33.3	-31	0	35.55	-	-	74	-38.45	-	-	0-360	102	H
4	* 3.667	36.97	PK	33.3	-31	0	39.27	-	-	74	-34.73	-	-	0-360	200	V
5	* 11.002	29.56	PK	37.9	-22	0	45.46	-	-	74	-28.54	-	-	0-360	102	H
6	* 11.004	31.42	PK	37.9	-22	0	47.32	-	-	74	-26.68	-	-	0-360	200	V
3	1.872	40.96	PK	31	-33.3	0	38.66	-	-	-	-	68.2	-29.54	0-360	200	V
1	1.876	33.22	PK	31	-33.3	0	30.92	-	-	-	-	68.2	-37.28	0-360	102	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

Radiated Emissions



Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Ctrl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
* 3.666	39.86	PK-U	33.3	-31	0	42.16	-	-	74	-31.84	-	-	270	116	H
* 3.667	30.37	ADR	33.3	-31	0	32.67	54	-21.33	-	-	-	-	270	116	H
* 3.667	42.19	PK-U	33.3	-31	0	44.49	-	-	74	-29.51	-	-	106	192	V
* 3.667	35.52	ADR	33.3	-31	0	37.82	54	-16.18	-	-	-	-	106	192	V
* 11.002	38.71	PK-U	37.9	-22	0	54.61	-	-	74	-19.39	-	-	305	179	H
* 11.003	25.93	ADR	37.9	-22	0	41.83	54	-12.17	-	-	-	-	305	179	H
* 11.002	38.47	PK-U	37.9	-22	0	54.37	-	-	74	-19.63	-	-	329	204	V
* 11.004	26.27	ADR	37.9	-22	0	42.17	54	-11.83	-	-	-	-	329	204	V
* 10.603	44.16	PK-U	37.7	-23.4	0	58.86	-	-	74	-15.54	-	-	317	246	V
* 10.603	32.33	ADR	37.7	-23.4	0	46.63	54	-7.37	-	-	-	-	317	246	V
1.874	44.78	PK-U	31	-33.3	0	42.48	-	-	-	-	68.2	-25.72	4	184	V
1.876	39.78	PK-U	31	-33.3	0	37.48	-	-	-	-	68.2	-30.72	121	117	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

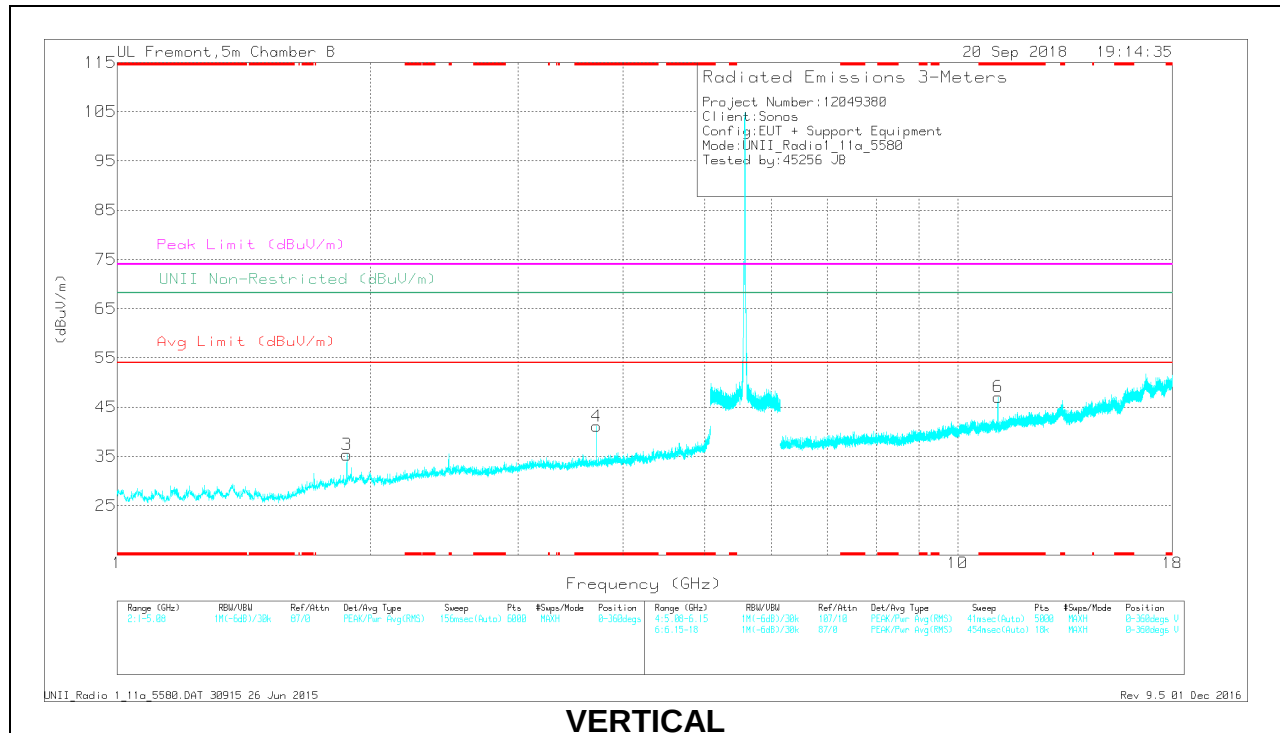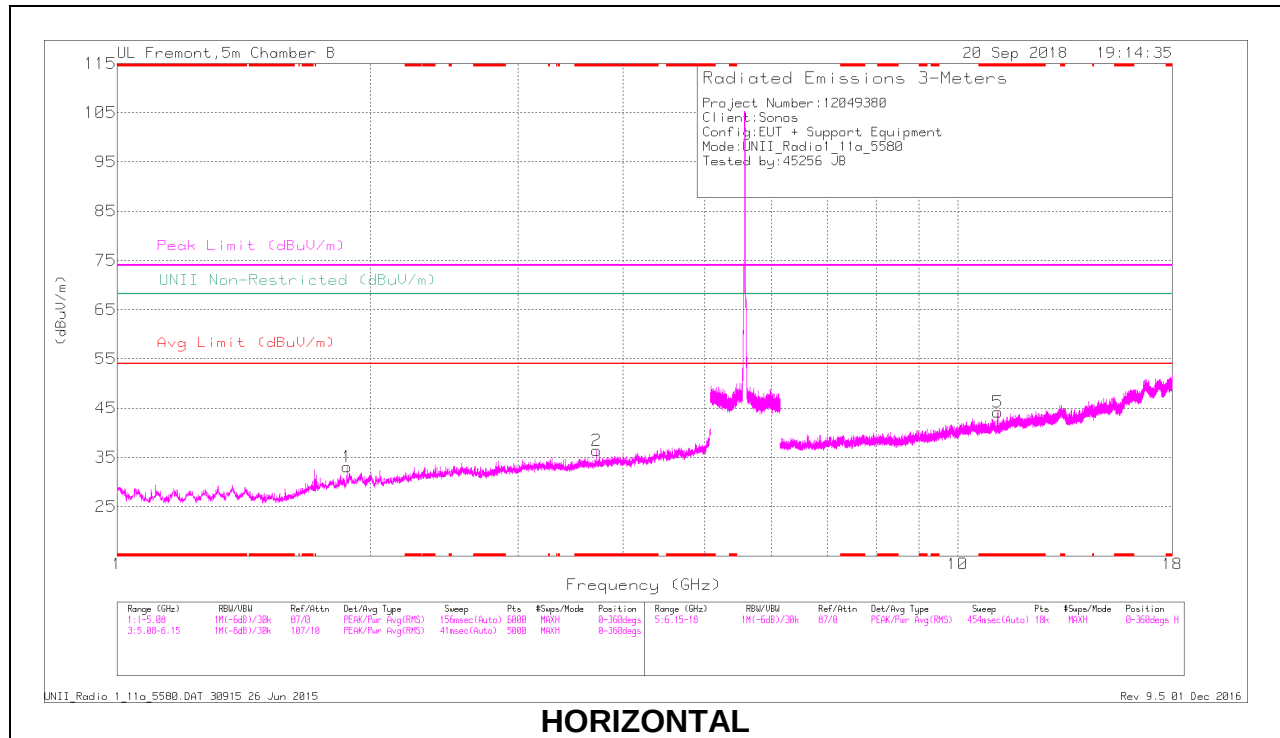

RADIATED EMISSIONS

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Ctrl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
2	* 3.72	34.2	PK	33.3	-31.1	0	36.4	-	-	74	-37.6	-	-	0-360	102	H
4	* 3.72	38.9	PK	33.3	-31.1	0	41.1	-	-	74	-32.9	-	-	0-360	200	V
5	* 11.163	29.39	PK	37.9	-23.1	0	44.19	-	-	74	-29.81	-	-	0-360	200	H
6	* 11.165	32.27	PK	37.9	-23.1	0	47.07	-	-	74	-26.93	-	-	0-360	199	V
1	1.877	35.35	PK	31	-33.3	0	33.05	-	-	-	-	68.2	-35.15	0-360	102	H
3	1.877	37.64	PK	31	-33.3	0	35.34	-	-	-	-	68.2	-32.86	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

Radiated Emissions



Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Ctrl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
* 3.72	40.35	PK-U	33.3	-31.1	0	42.55	-	-	74	-31.45	-	-	265	136	H
* 3.72	32.17	ADR	33.3	-31.1	0	34.37	54	-19.63	-	-	-	-	265	136	H
* 3.72	44.04	PK-U	33.3	-31.1	0	46.24	-	-	74	-27.76	-	-	104	179	V
* 3.72	38.45	ADR	33.3	-31.1	0	40.65	54	-13.35	-	-	-	-	104	179	V
* 11.163	37.47	PK-U	37.9	-23.1	0	52.27	-	-	74	-21.73	-	-	298	243	H
* 11.163	24.93	ADR	37.9	-23.1	0	39.73	54	-14.27	-	-	-	-	298	243	H
* 11.164	39.53	PK-U	37.9	-23.1	0	54.33	-	-	74	-19.67	-	-	328	178	V
* 11.164	27.35	ADR	37.9	-23.1	0	42.15	54	-11.85	-	-	-	-	328	178	V
* 10.603	44.16	PK-U	37.7	-23.4	0	58.86	-	-	74	-15.54	-	-	317	246	V
* 10.603	32.23	ADR	37.7	-23.4	0	46.63	54	-7.37	-	-	-	-	317	246	V
1.875	39.66	PK-U	31	-33.3	0	37.36	-	-	-	-	68.2	-30.84	226	158	V
1.876	40.28	PK-U	31	-33.3	0	37.98	-	-	-	-	68.2	-30.22	239	118	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

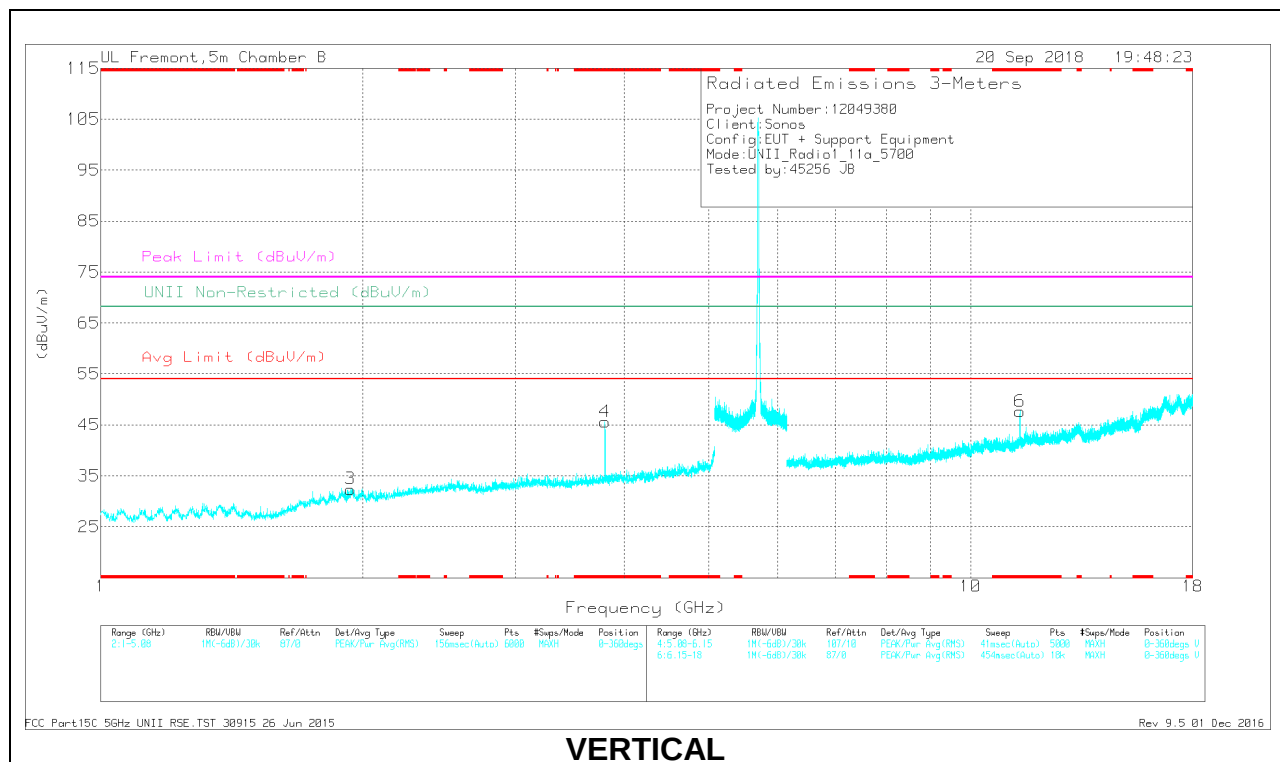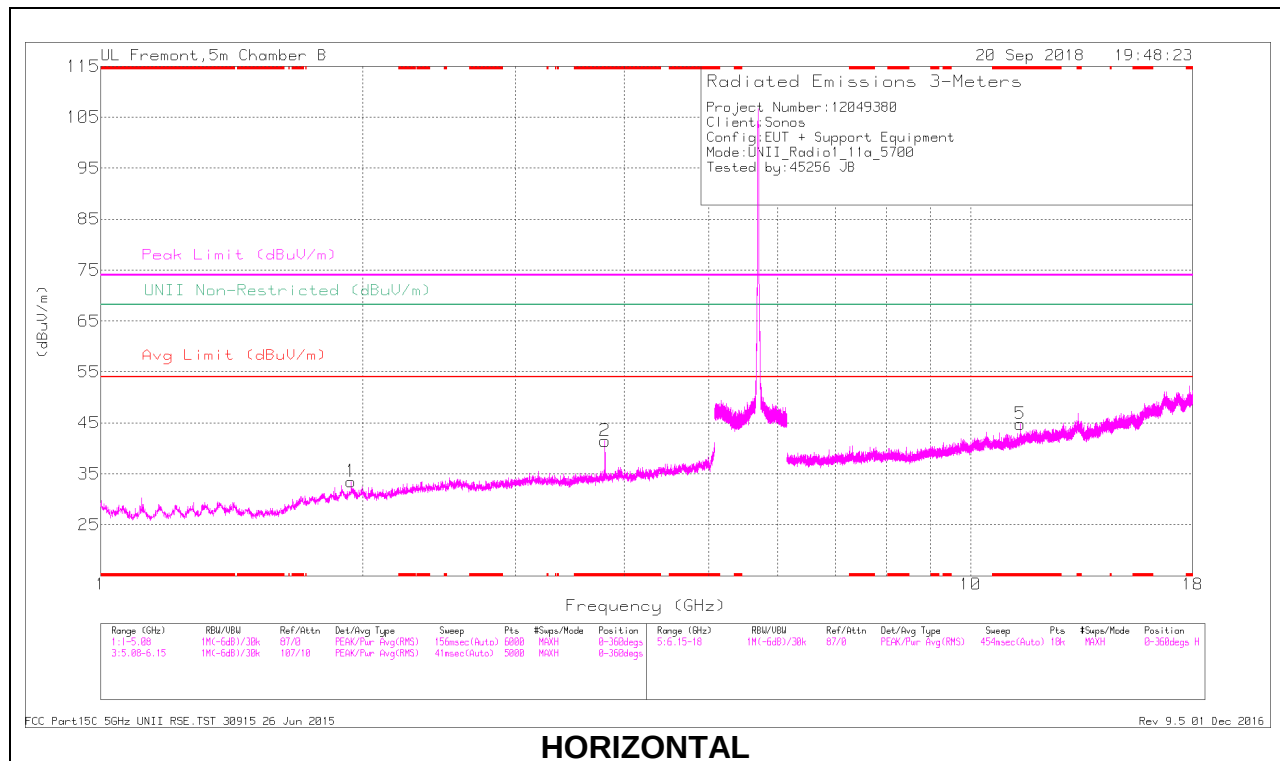

RADIATED EMISSIONS

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 3.8	38.87	PK	33.4	-30.8	0	41.47	-	-	74	-32.53	-	-	0-360	102	H
4	* 3.8	42.99	PK	33.4	-30.8	0	45.59	-	-	74	-28.41	-	-	0-360	200	V
5	* 11.402	29.29	PK	38.4	-22.9	0	44.79	-	-	74	-28.21	-	-	0-360	102	H
6	* 11.397	32.15	PK	38.4	-22.9	0	47.55	-	-	74	-25.35	-	-	0-360	102	V
3	1.937	33.57	PK	31	-32.2	0	32.37	-	-	-	-	68.2	-35.83	0-360	102	V
1	1.94	34.7	PK	31	-32.2	0	33.5	-	-	-	-	68.2	-34.7	0-360	199	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.8	43.08	PK-U	33.4	-30.8	0	45.68	-	-	74	-28.32	-	-	261	131	H
* 3.8	36.28	ADR	33.4	-30.8	0	38.88	54	-15.12	-	-	-	-	261	131	H
* 3.8	45.35	PK-U	33.4	-30.8	0	45.95	-	-	74	-25.04	-	-	103	215	V
* 3.8	42.57	ADR	33.4	-30.8	0	45.17	54	-8.83	-	-	-	-	103	215	V
* 11.403	38.04	PK-U	38.4	-22.9	0	53.54	-	-	74	-20.46	-	-	319	186	H
* 11.402	25.64	ADR	38.4	-22.9	0	41.14	54	-12.86	-	-	-	-	319	186	H
* 11.396	41.66	PK-U	38.4	-22.9	0	57.16	-	-	74	-16.84	-	-	123	338	V
* 11.397	28.79	ADR	38.4	-22.9	0	44.29	54	-9.71	-	-	-	-	123	338	V
1.936	40.38	PK-U	31	-32.2	0	39.18	-	-	-	-	68.2	-29.02	211	125	V
1.939	39.91	PK-U	31	-32.2	0	38.71	-	-	-	-	68.2	-29.49	34	197	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

9.1.1.4. TX ABOVE 1 GHz 802.11a MODE IN THE 5.8 GHz BAND

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

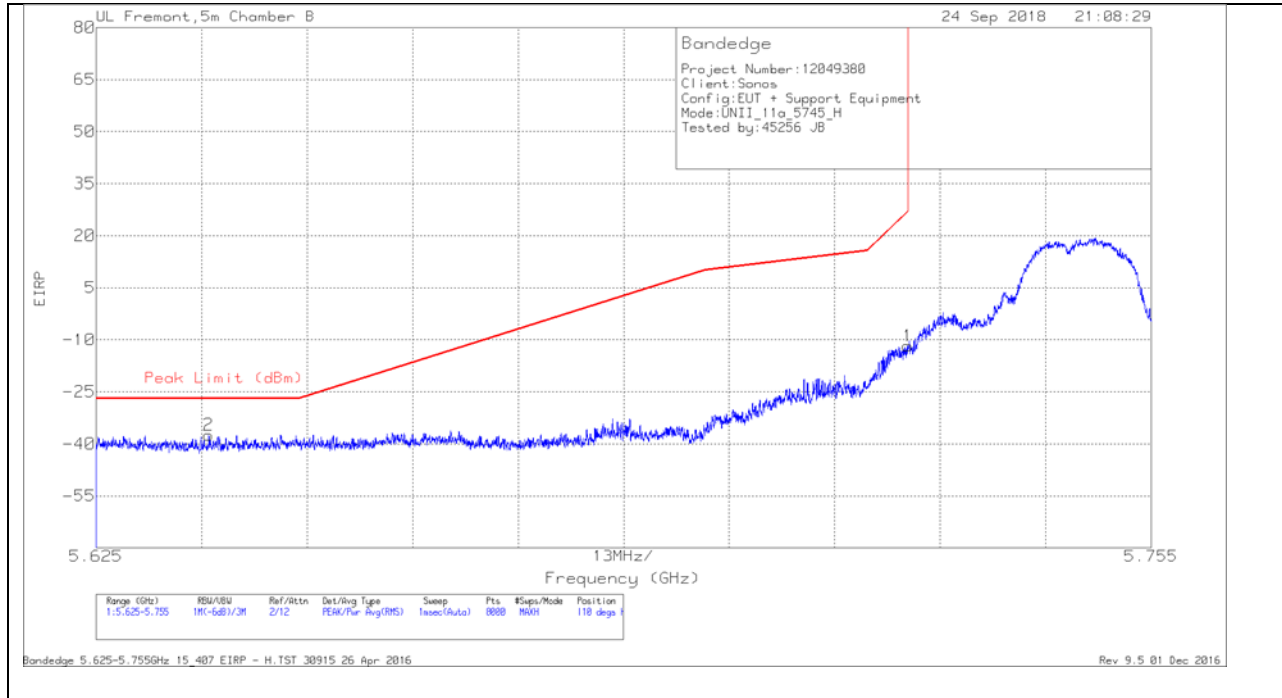


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dBm)	Amp/CbI/Filt/ Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.639	-65.64	Pk	35.5	-19.1	11.8	0	-37.44	-27	-10.44	110	215	H
1	5.725	-39.71	Pk	35.5	-19.4	11.8	0	-11.81	27	-38.81	110	215	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VERTICAL RESULT

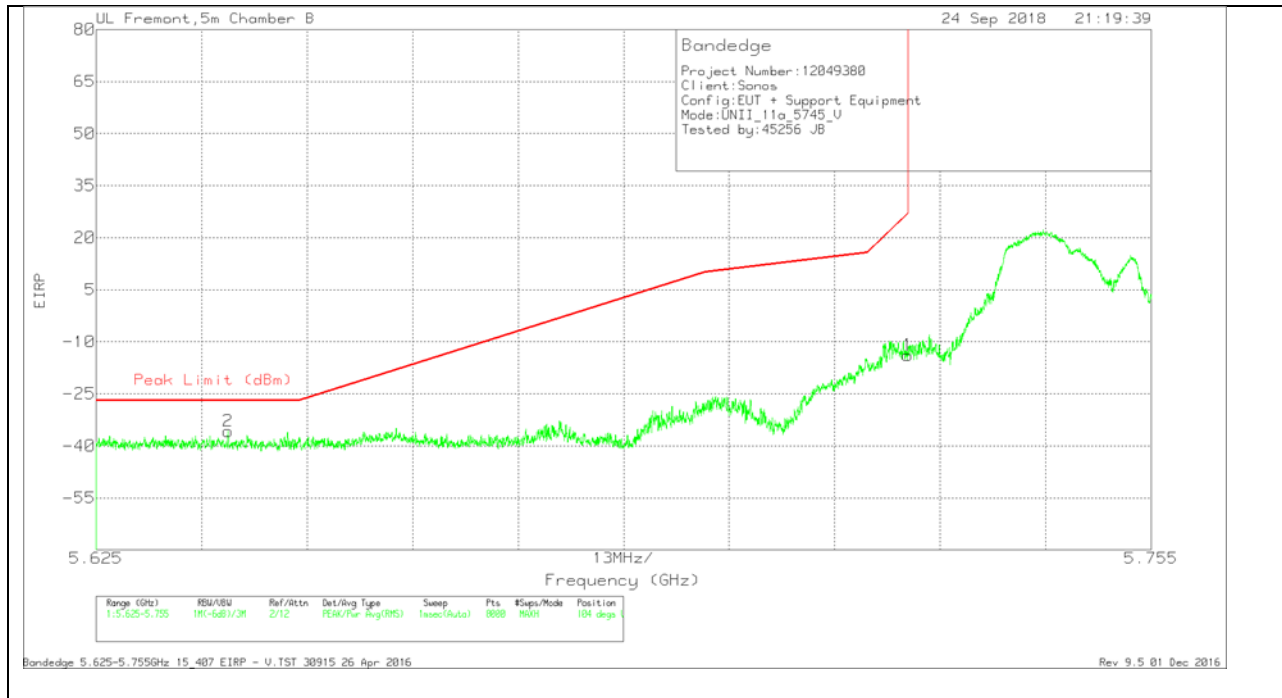

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dBm)	Amp/CbI/Filt/ Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.641	-63.66	Pk	35.5	-19.4	11.8	0	-35.76	-27	-8.76	104	170	V
1	5.725	-41.8	Pk	35.5	-19.4	11.8	0	-13.9	27	-40.9	104	170	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

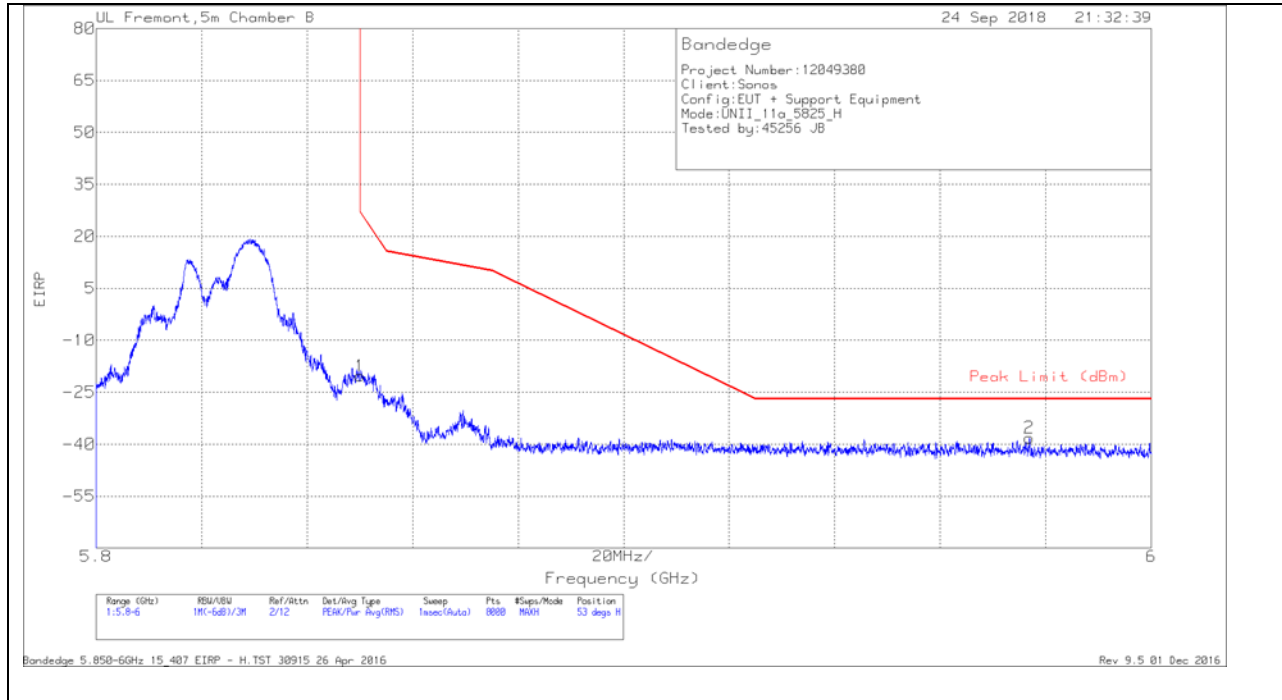


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dBm)	Amp/Cbl/Filtr/ Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-48.42	Pk	35.4	-19.1	11.8	0	-20.32	26.99	-47.31	53	177	H
2	5.977	-66.57	Pk	35.4	-18.8	11.8	0	-38.17	-27	-11.17	53	177	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector

VERTICAL RESULT

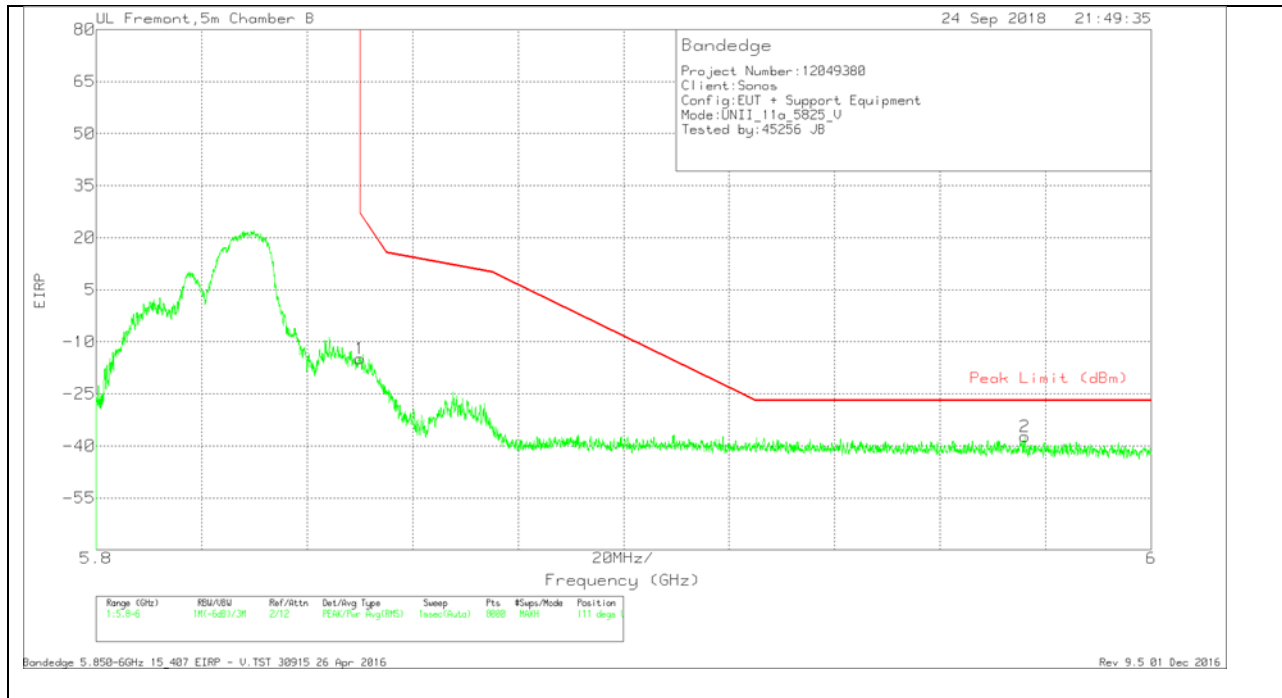



Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-42.95	Pk	35.4	-19.1	11.8	-14.85	26.99	-41.84	111	180	V
2	5.976	-66.15	Pk	35.4	-18.4	11.8	-37.35	-27	-10.35	111	180	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

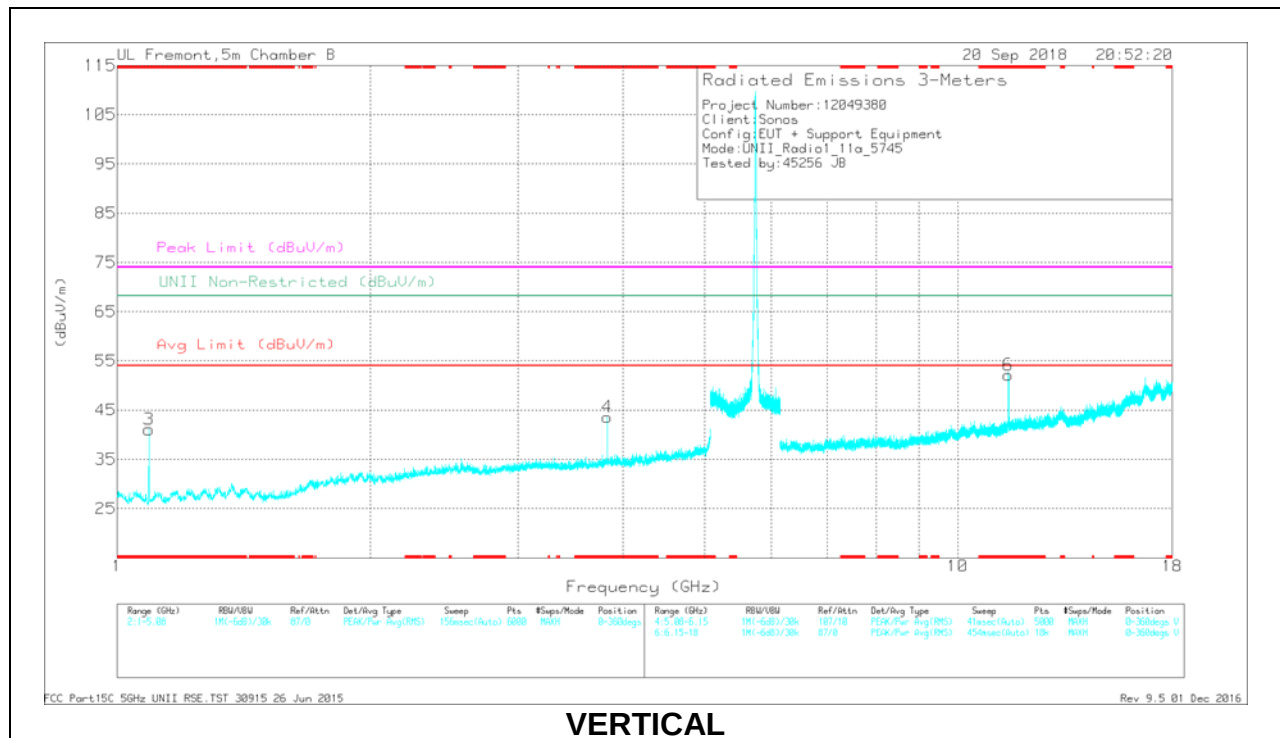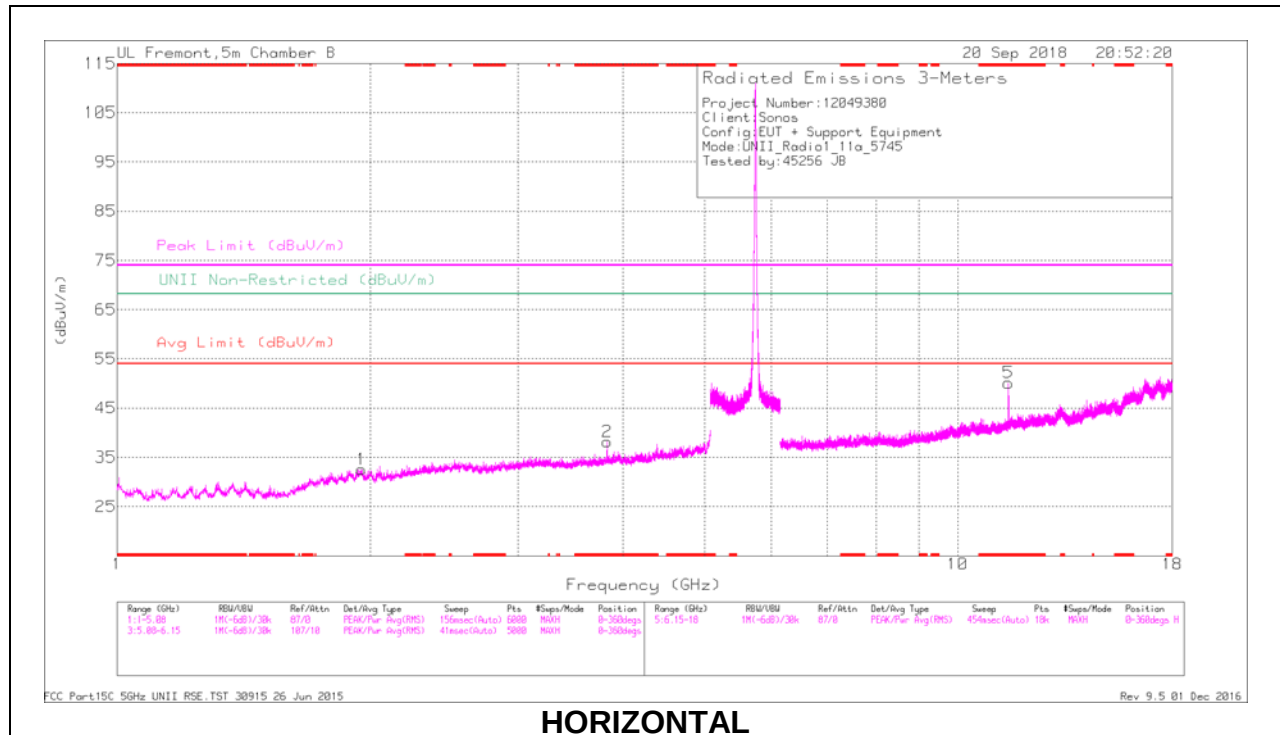

RADIATED EMISSIONS

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 3.83	35.97	Pk	33.4	-31.2	0	38.17	-	-	74	-35.83	-	-	0-360	102	H
3	* 1.091	47.98	Pk	27.3	-34.2	0	41.08	-	-	74	-32.92	-	-	0-360	102	V
4	* 3.83	41.39	Pk	33.4	-31.2	0	43.59	-	-	74	-30.41	-	-	0-360	199	V
5	* 11.492	34.44	Pk	38.4	-22.7	0	50.14	-	-	74	-23.86	-	-	0-360	199	H
6	* 11.491	36.44	Pk	38.4	-22.7	0	52.14	-	-	74	-21.86	-	-	0-360	200	V
1	1.954	33.85	Pk	31	-32.3	0	32.55	-	-	-	-	68.2	-35.65	0-360	102	H



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.83	42.68	PK-U	33.4	-31.2	0	44.88	-	-	74	-29.12	-	-	262	167	H
* 3.83	35.16	ADR	33.4	-31.2	0	37.36	54	-16.64	-	-	-	-	262	167	H
* 1.093	40.86	PK-U	27.3	-34.1	0	34.06	-	-	74	-39.94	-	-	334	269	V
* 1.093	28.97	ADR	27.3	-34.1	0	22.17	54	-31.83	-	-	-	-	334	269	V
* 3.83	45.71	PK-U	33.4	-31.2	0	47.91	-	-	74	-26.09	-	-	104	161	V
* 3.83	41.1	ADR	33.4	-31.2	0	43.3	54	-10.7	-	-	-	-	104	161	V
* 11.491	41.81	PK-U	38.4	-22.7	0	57.51	-	-	74	-16.49	-	-	246	171	H
* 11.492	30.7	ADR	38.4	-22.7	0	46.4	54	-7.6	-	-	-	-	246	171	H
* 11.493	43.44	PK-U	38.4	-22.7	0	59.14	-	-	74	-14.86	-	-	287	232	V
* 11.492	32.74	ADR	38.4	-22.7	0	48.44	-	-	-	-	-	-	287	232	V
1.954	40.62	PK-U	31	-32.3	0	39.32	-	-	-	-	68.2	-28.88	272	309	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK-U - U-NII: Maximum Peak
ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

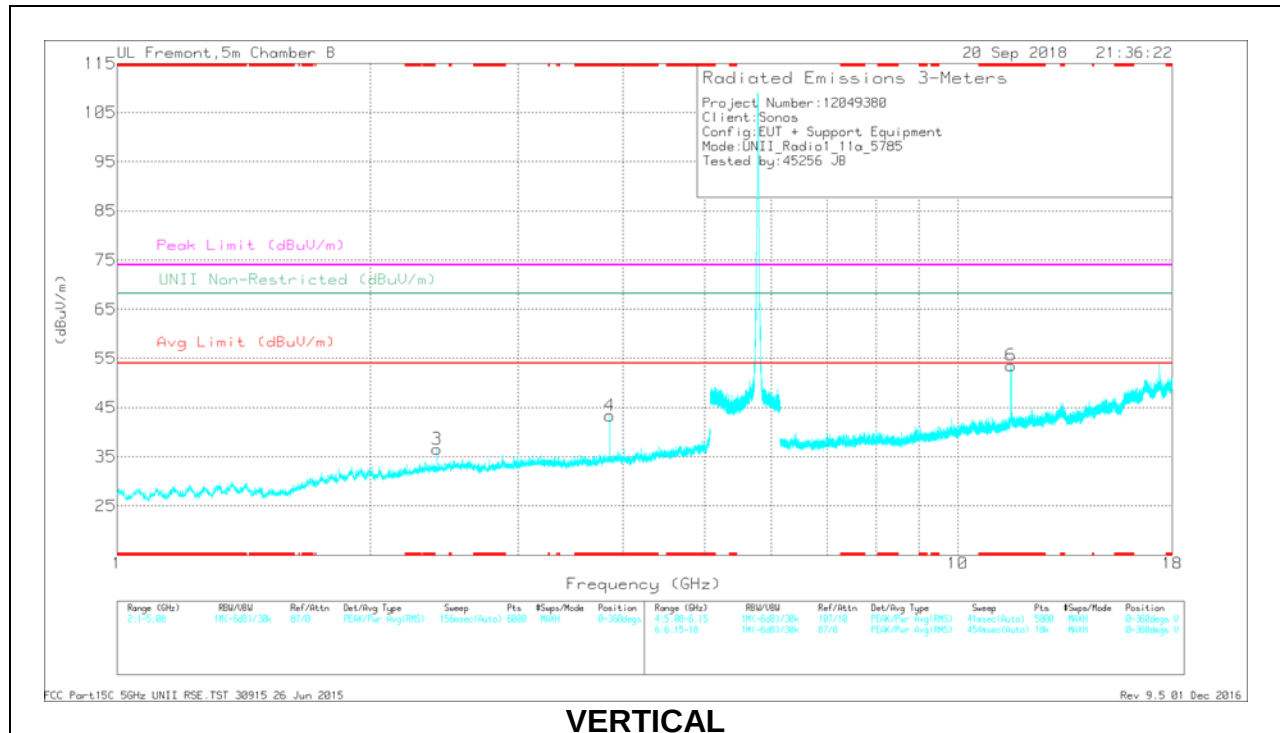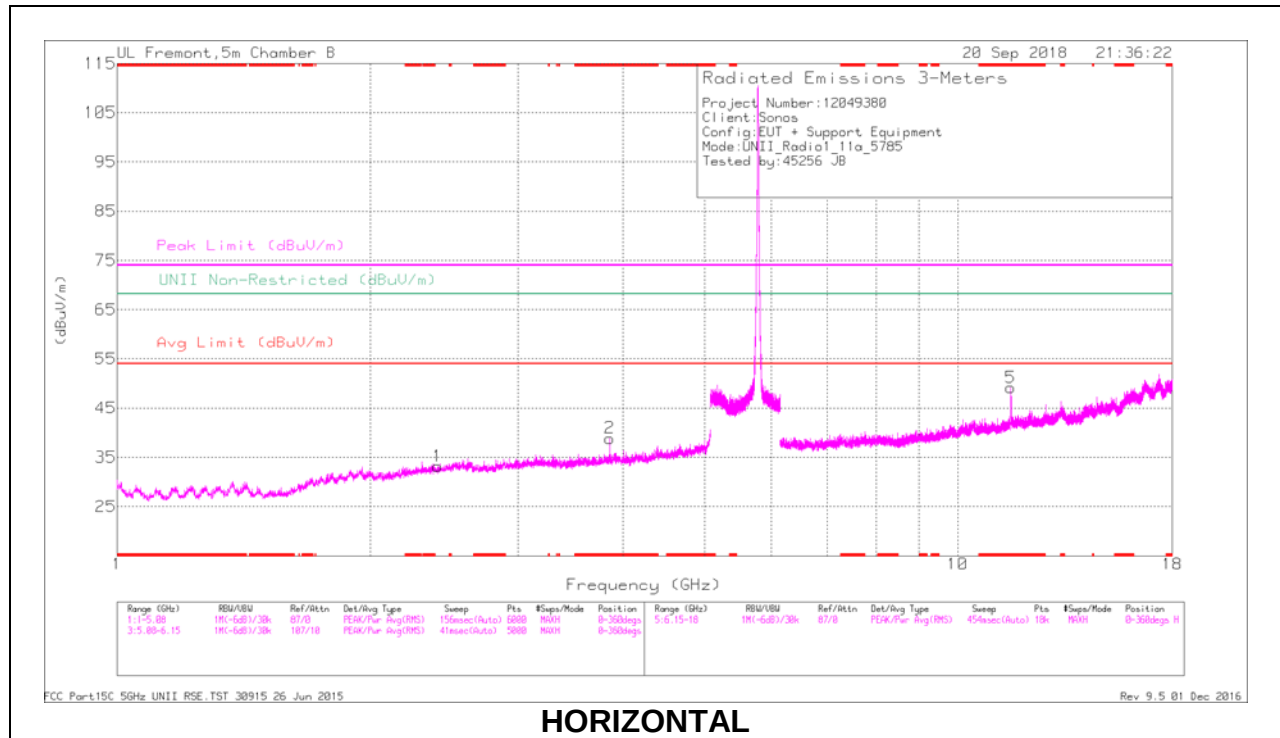

RADIATED EMISSIONS

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Cable/Fit/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Unli Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 3.856	36.59	Pk	33.4	-31.1	0	39.69	-	-	74	-35.11	-	-	0-360	102	H
4	* 3.856	41.07	Pk	33.4	-31.1	0	43.37	-	-	74	-30.63	-	-	0-360	200	V
5	* 11.571	32.65	Pk	38.6	-22.1	0	49.15	-	-	74	-24.85	-	-	0-360	102	H
6	* 11.572	36.98	Pk	38.6	-22	0	53.58	-	-	74	-20.42	-	-	0-360	102	V
3	2.402	37.16	Pk	32.4	-33	0	36.56	-	-	-	-	68.2	-31.64	0-360	102	V
1	2.405	33.77	Pk	32.4	-33	0	33.17	-	-	-	-	68.2	-35.03	0-360	199	H



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Cable/Fit/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Unli Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.857	42.08	PK-U	33.4	-31.1	0	44.38	-	-	74	-29.62	-	-	277	120	H
* 3.857	34.31	ADR	33.4	-31.1	0	36.61	54	-17.39	-	-	-	-	277	120	H
* 3.857	45.13	PK-U	33.4	-31.1	0	47.43	-	-	74	-26.57	-	-	97	184	V
* 3.857	39.5	ADR	33.4	-31.1	0	41.9	54	-12.2	-	-	-	-	97	184	V
* 11.573	40.46	PK-U	38.6	-22	0	57.06	-	-	74	-16.94	-	-	65	114	H
* 11.572	28.83	ADR	38.6	-22	0	45.43	54	-8.57	-	-	-	-	65	114	H
* 11.573	43.81	PK-U	38.6	-22	0	60.41	-	-	74	-13.59	-	-	308	183	V
* 11.572	32.66	ADR	38.6	-22	0	49.26	54	-4.74	-	-	-	-	308	183	V
2.402	41.99	PK-U	32.4	-33	0	41.39	-	-	-	-	68.2	-26.81	272	242	V
2.403	41.68	PK-U	32.4	-33	0	41.08	-	-	-	-	68.2	-27.12	73	400	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK-U - U-NII: Maximum Peak
ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

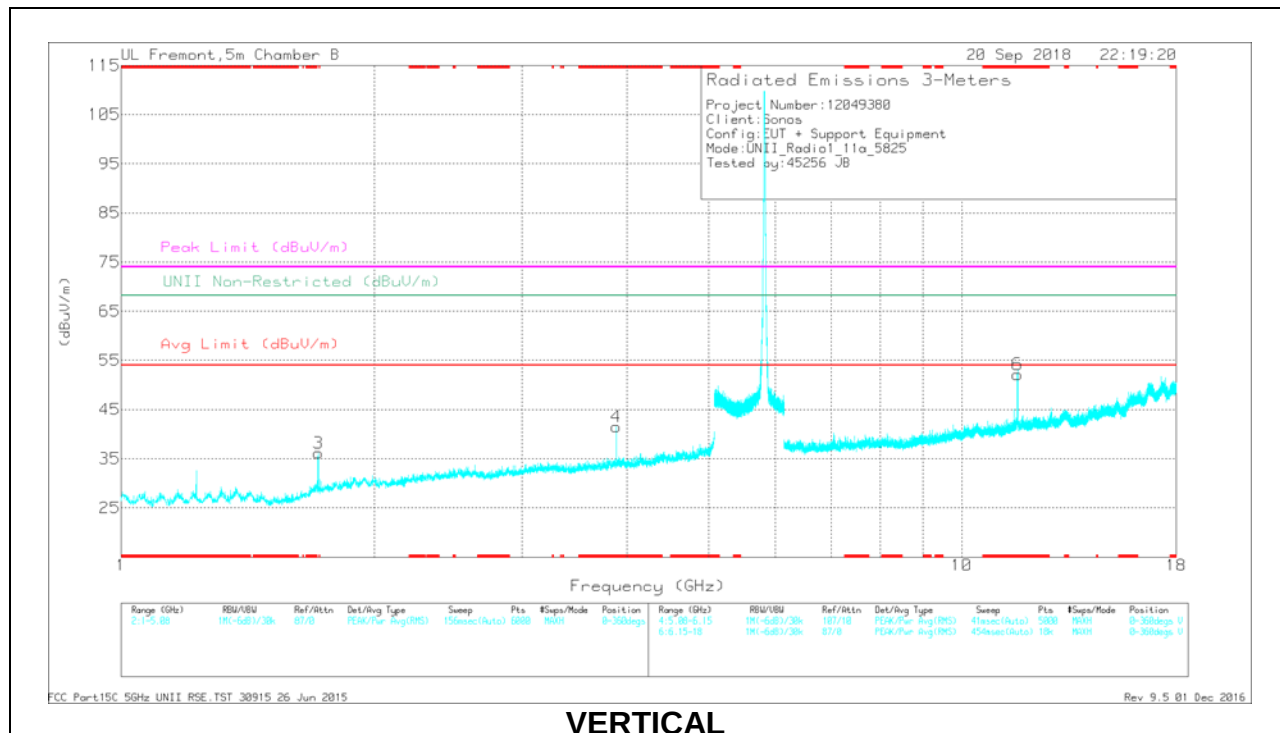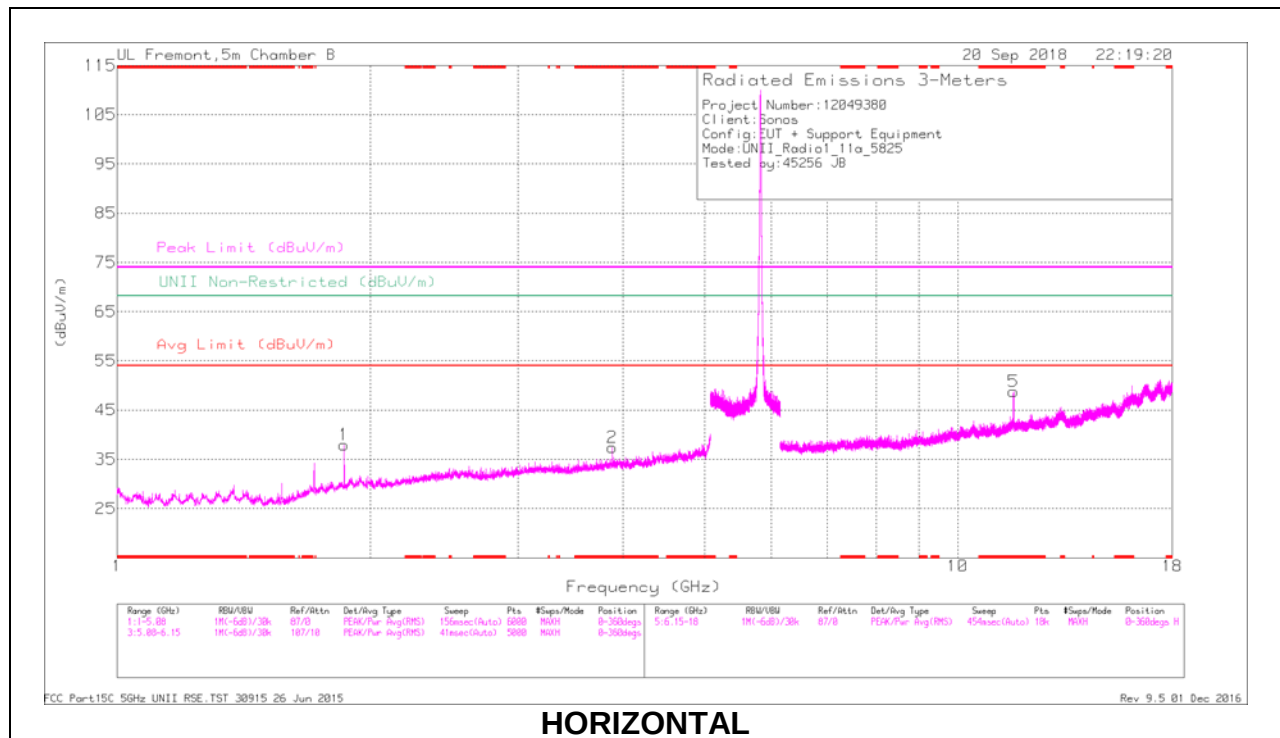

RADIATED EMISSIONS

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Ctrl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	U/NII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 3.884	34.9	Pk	33.4	-30.8	0	37.4	-	-	74	-36.6	-	-	0-360	102	H
4	* 3.883	38.92	Pk	33.4	-30.8	0	41.52	-	-	74	-32.48	-	-	0-360	199	V
5	* 11.653	31.97	Pk	38.8	-22	0	48.77	-	-	74	-25.23	-	-	0-360	102	H
6	* 11.653	35.36	Pk	38.8	-22	0	52.16	-	-	74	-21.84	-	-	0-360	200	V
3	1.716	39.31	Pk	29.8	-33	0	36.11	-	-	-	-	68.2	-32.09	0-360	199	V
1	1.863	40.55	Pk	30.9	-33.5	0	37.95	-	-	-	-	68.2	-30.25	0-360	199	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Ctrl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	U/NII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.883	41.45	PK-U	33.4	-30.8	0	44.05	-	-	74	-29.95	-	-	277	103	H
* 3.883	33.1	ADR	33.4	-30.8	0	35.7	54	-18.3	-	-	-	-	277	103	H
* 3.883	43.07	PK-U	33.4	-30.8	0	45.67	-	-	74	-28.33	-	-	97	168	V
* 3.883	37.45	ADR	33.4	-30.8	0	40.05	54	-13.95	-	-	-	-	97	168	V
* 11.653	39.68	PK-U	38.8	-22	0	56.48	-	-	74	-17.52	-	-	244	152	H
* 11.652	27.61	ADR	38.8	-22	0	44.41	54	-9.59	-	-	-	-	244	152	H
* 11.652	39.71	PK-U	38.8	-22	0	56.51	-	-	74	-17.49	-	-	344	120	V
* 11.652	28.89	ADR	38.8	-22	0	45.69	54	-8.31	-	-	-	-	344	120	V
1.717	39.84	PK-U	29.8	-33	0	36.64	-	-	-	-	68.2	-31.56	150	352	V
1.863	39.45	PK-U	30.9	-33.5	0	36.85	-	-	-	-	68.2	-31.35	316	263	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK-U - U-NII: Maximum Peak
ADR - U-NII AD primary method, RMS average

9.1.1.5. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.2 GHz BAND

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

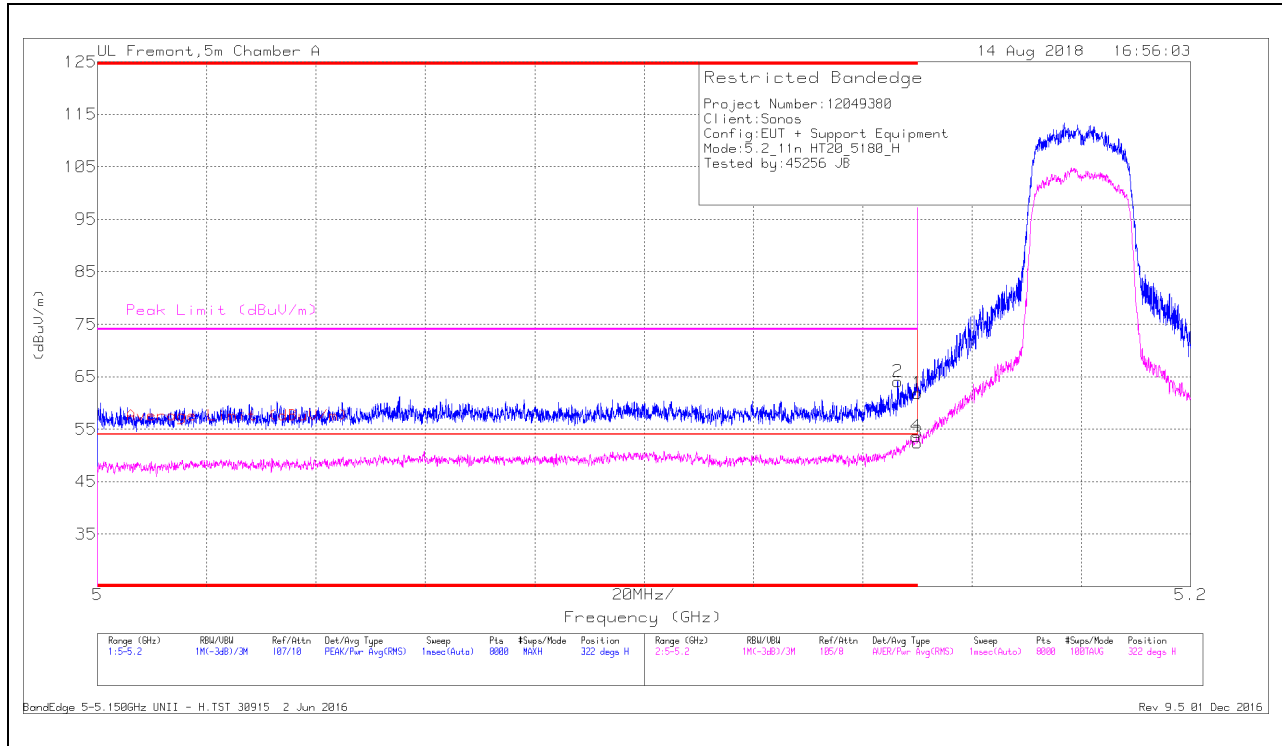

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/CbIF/Tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.146	47.26	Pk	34.4	-17.6	0	64.06	-	-	74	-9.94	322	102	H
1	* 5.15	45.11	Pk	34.4	-17.7	0	61.81	-	-	74	-12.19	322	102	H
3	* 5.15	35.3	RMS	34.4	-17.7	.46	52.46	54	-1.54	-	-	322	102	H
4	* 5.15	36.35	RMS	34.4	-17.6	.46	53.61	54	-.39	-	-	322	102	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

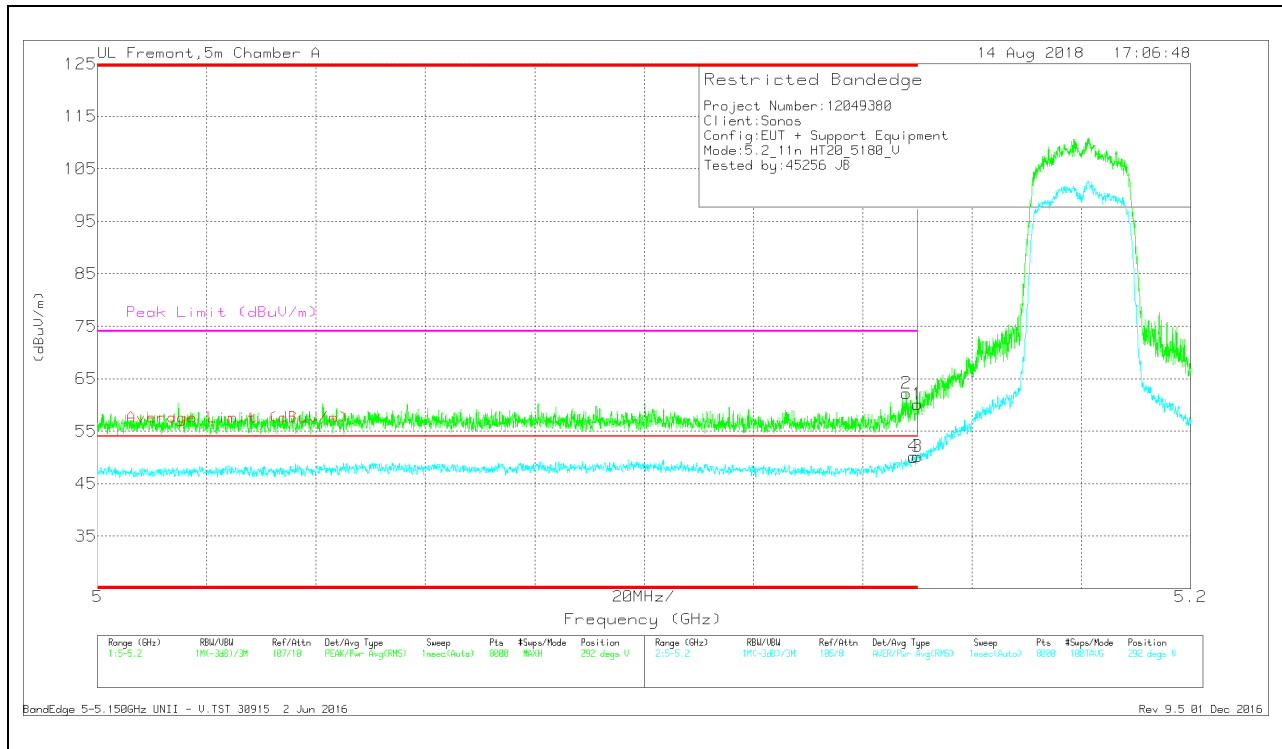

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/CbI/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.148	45.48	Pk	34.4	-17.7	0	62.18	-	-	74	-11.82	292	146	V
4	* 5.149	32.95	RMS	34.4	-17.7	.46	50.11	54	-3.89	-	-	292	146	V
1	* 5.15	43.42	Pk	34.4	-17.7	0	60.12	-	-	74	-13.88	292	146	V
3	* 5.15	33.06	RMS	34.4	-17.7	.46	50.22	54	-3.78	-	-	292	146	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

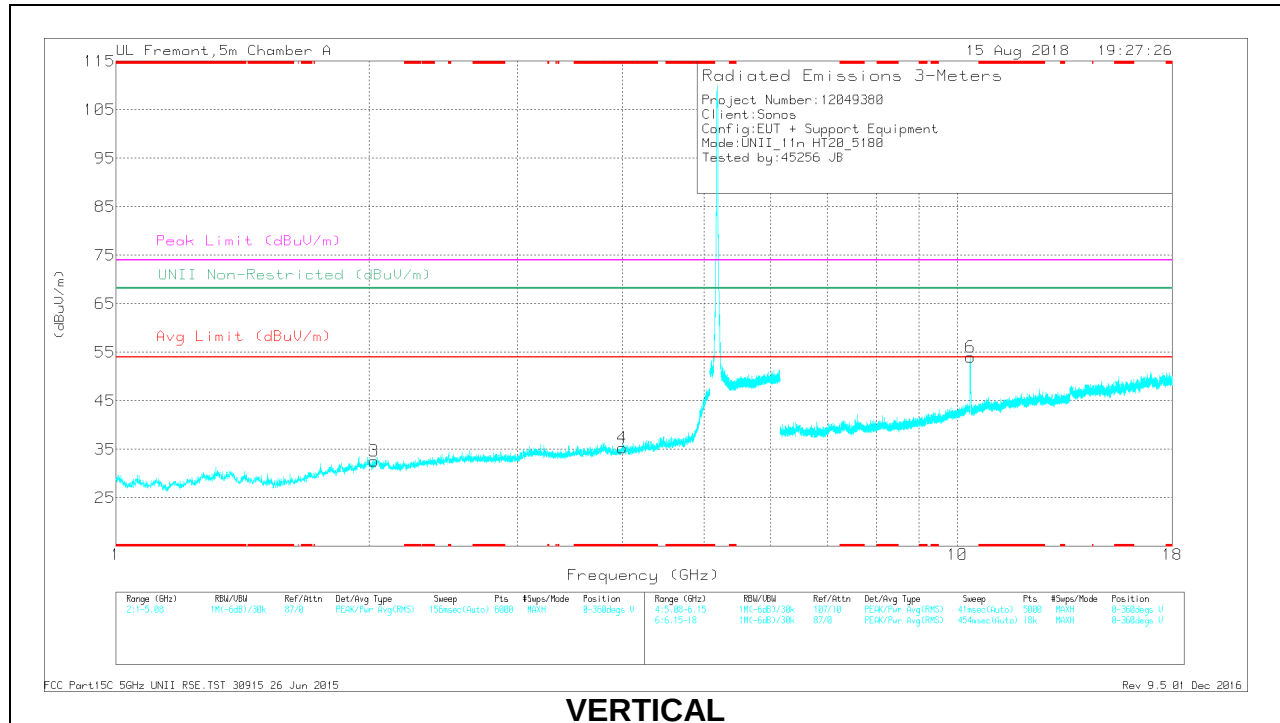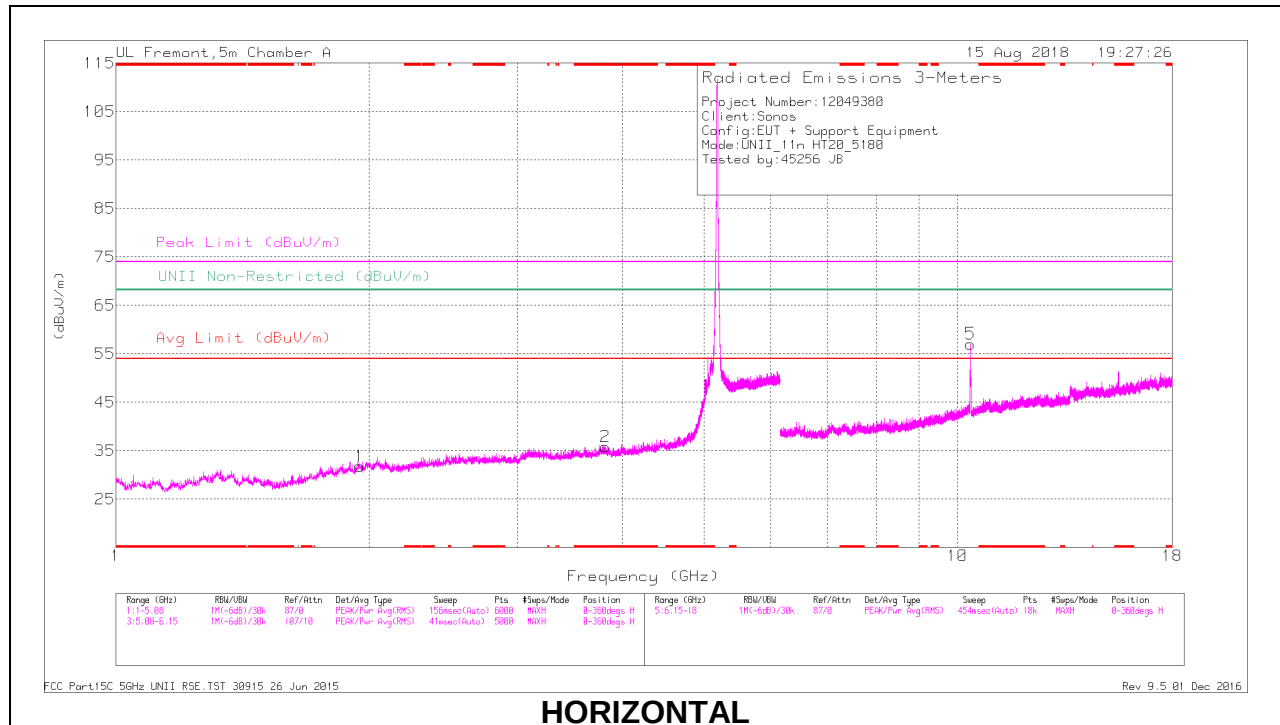

RADIATED EMISSIONS

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Ampl/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 3.816	30.54	PK	33.1	-27.8	35.84	-	-	74	-38.16	-	-	0-360	199	H
4	* 4	29.42	PK	33.4	-27.5	35.32	-	-	74	-38.68	-	-	0-360	101	V
1	1.948	31.54	PK	31.4	-31.1	31.84	-	-	-	-	68.2	-36.36	0-360	101	H
3	2.028	31.34	PK	31.4	-30.1	32.64	-	-	-	-	68.2	-35.56	0-360	101	V
6	10.359	35.98	PK	37.5	-19.5	53.98	-	-	-	-	68.2	-14.22	0-360	101	V
5	10.361	39.06	PK	37.5	-19.5	57.06	-	-	-	-	68.2	-11.14	0-360	199	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

Radiated Emissions



Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Ampl/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.817	38.04	PK-U	33.1	-27.8	43.34	-	-	74	-30.66	-	-	139	133	H
* 3.818	25.36	ADR	33.1	-27.8	30.66	54	-23.34	-	-	-	-	139	133	H
* 4	36.17	PK-U	33.4	-27.5	42.07	-	-	74	-31.93	-	-	217	231	V
* 4.001	24.68	ADR	33.4	-27.5	30.58	54	-23.42	-	-	-	-	217	231	V
1.947	39.25	PK-U	31.4	-31.1	39.55	-	-	-	-	68.2	-28.65	29	383	H
2.03	37.83	PK-U	31.4	-30.1	39.13	-	-	-	-	68.2	-29.07	265	211	V
10.358	42.11	PK-U	37.5	-19.5	60.11	-	-	-	-	68.2	-8.09	313	210	V
10.36	44.32	PK-U	37.5	-19.5	62.32	-	-	-	-	68.2	-5.88	263	135	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

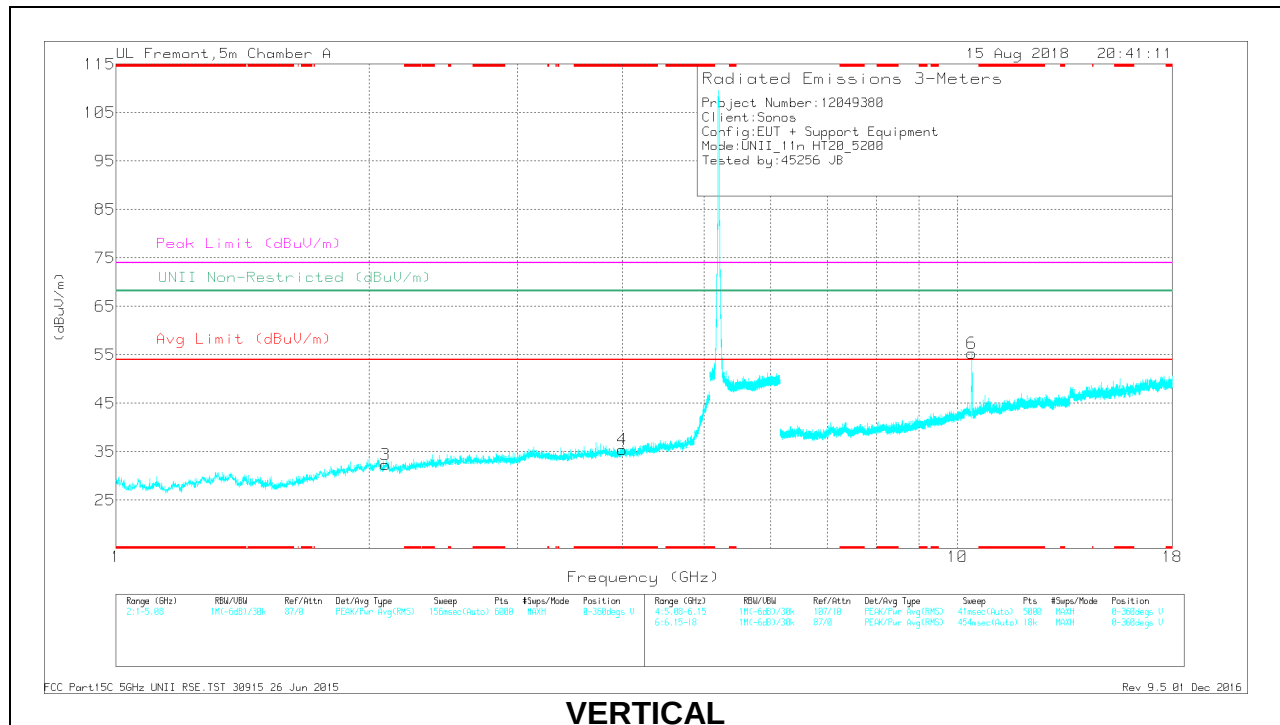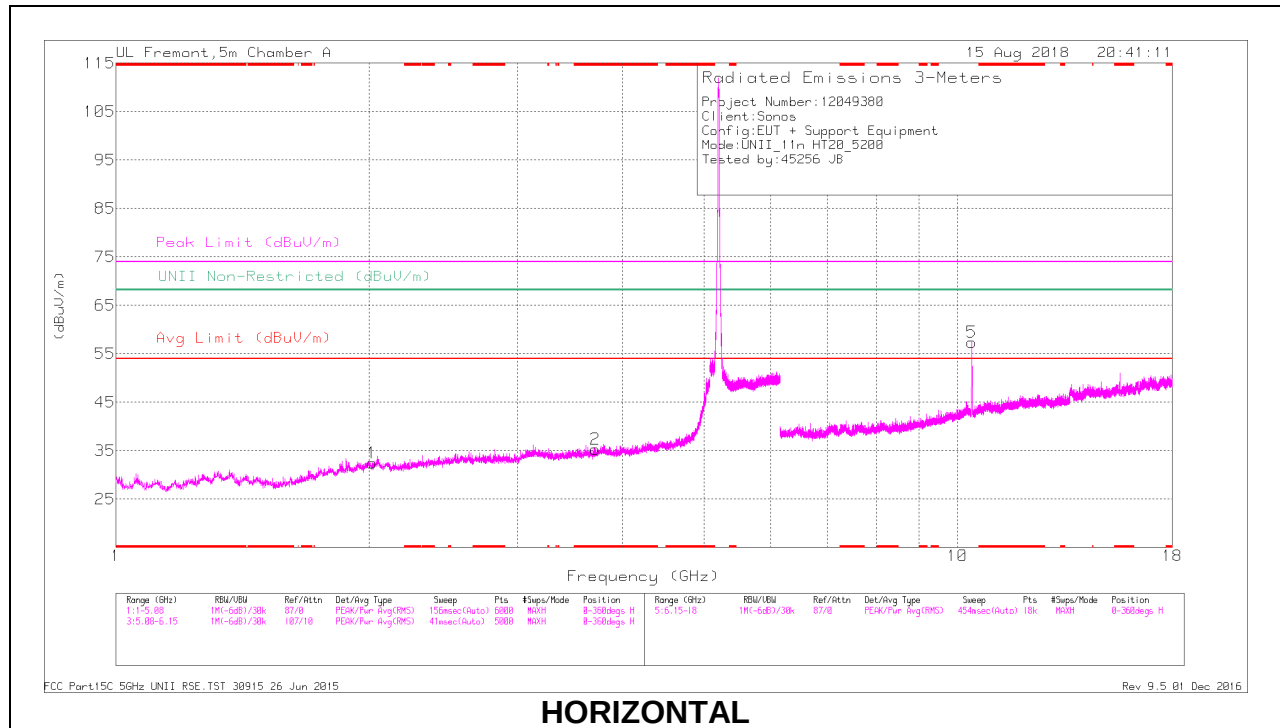

RADIATED EMISSIONS

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 3.713	30.86	PK	33.1	-28.7	0	35.26	-	-	74	-38.74	-	-	0-360	199	H
4	* 3.995	29.59	PK	33.4	-27.6	0	35.39	-	-	74	-38.61	-	-	0-360	200	V
1	2.015	31.41	PK	31.4	-30.4	0	32.41	-	-	-	-	68.2	-35.19	0-360	101	H
3	2.09	31.18	PK	31.2	-30	0	32.38	-	-	-	-	68.2	-35.82	0-360	101	V
5	10.4	39.44	PK	37.6	-19.7	0	57.34	-	-	-	-	68.2	-10.86	0-360	199	H
6	10.401	37.41	PK	37.6	-19.7	0	55.31	-	-	-	-	68.2	-12.89	0-360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

Radiated Emissions



Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.712	37.52	PK-U	33.1	-28.7	0	41.92	-	-	74	-32.08	-	-	326	119	H
* 3.713	25.67	ADR	33.1	-28.7	.46	30.53	54	-23.47	-	-	-	-	326	119	H
* 3.997	36.57	PK-U	33.4	-27.5	0	42.47	-	-	74	-31.53	-	-	358	159	V
* 3.997	24.91	ADR	33.4	-27.5	.46	31.27	54	-22.73	-	-	-	-	358	159	V
2.014	38.5	PK-U	31.4	-30.4	0	39.5	-	-	-	-	68.2	-28.7	208	188	H
2.089	38.07	PK-U	31.2	-30	0	39.27	-	-	-	-	68.2	-28.93	286	138	V
10.4	43.28	PK-U	37.6	-19.7	0	61.18	-	-	-	-	68.2	-7.02	263	138	H
10.4	41.34	PK-U	37.6	-19.7	0	59.24	-	-	-	-	68.2	-8.96	329	132	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

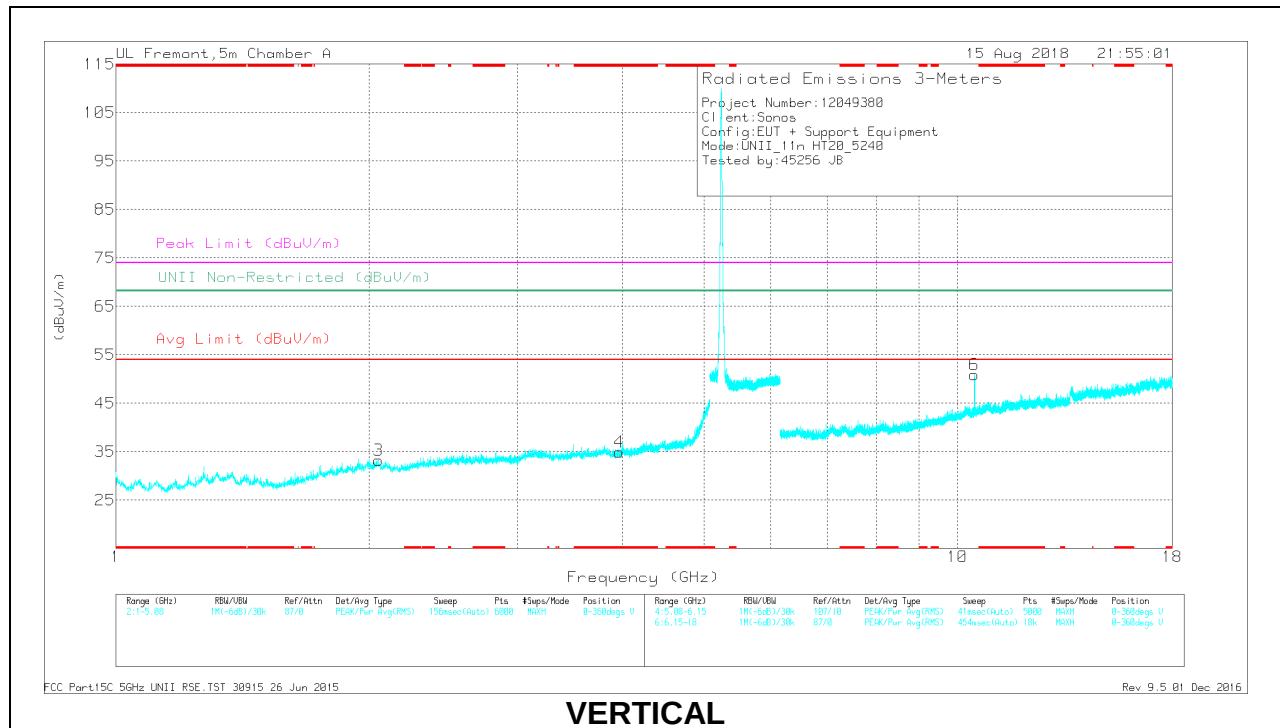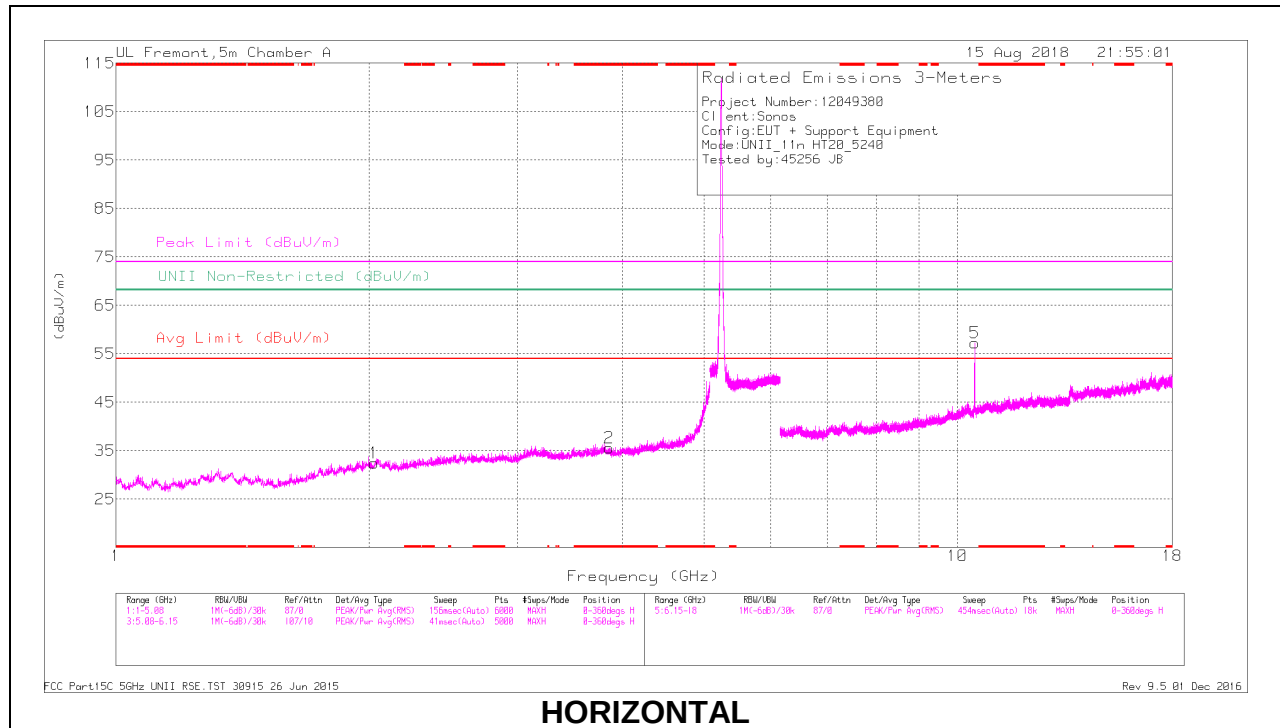

RADIATED EMISSIONS

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Unli Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 3.855	30.72	PK	33	-28.2	0	35.52	-	-	74	-38.48	-	-	0-360	199	H
4	* 3.963	29.79	PK	33.3	-28.2	0	34.89	-	-	74	-39.11	-	-	0-360	101	V
1	2.027	31.13	PK	31.4	-30.1	0	32.43	-	-	-	-	68.2	-36.77	0-360	101	H
3	2.051	31.87	PK	31.4	-30	0	33.27	-	-	-	-	68.2	-34.93	0-360	101	V
6	10.477	32.97	PK	37.6	-19.7	0	50.87	-	-	-	-	68.2	-17.33	0-360	101	V
5	10.479	39.31	PK	37.6	-19.6	0	57.31	-	-	-	-	68.2	-10.89	0-360	199	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Unli Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.856	38.13	PK-U	33	-28.2	0	42.93	-	-	74	-31.07	-	-	198	267	H
* 3.857	25.75	ADR	33	-28.2	.46	31.01	54	-22.99	-	-	-	-	198	267	H
* 3.964	36.74	PK-U	33.3	-28.2	0	41.84	-	-	74	-32.16	-	-	183	324	V
* 3.964	25.03	ADR	33.3	-28.2	.46	30.59	54	-23.41	-	-	-	-	183	324	V
2.028	38.08	PK-U	31.4	-30.1	0	39.38	-	-	-	-	68.2	-28.82	144	145	H
2.051	38.68	PK-U	31.4	-30	0	40.08	-	-	-	-	68.2	-28.12	74	302	V
10.479	40.32	PK-U	37.6	-19.6	0	58.32	-	-	-	-	68.2	-9.88	316	218	V
10.48	43.76	PK-U	37.6	-19.6	0	61.76	-	-	-	-	68.2	-6.44	262	192	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

9.1.1.6. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.3 GHz BAND

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

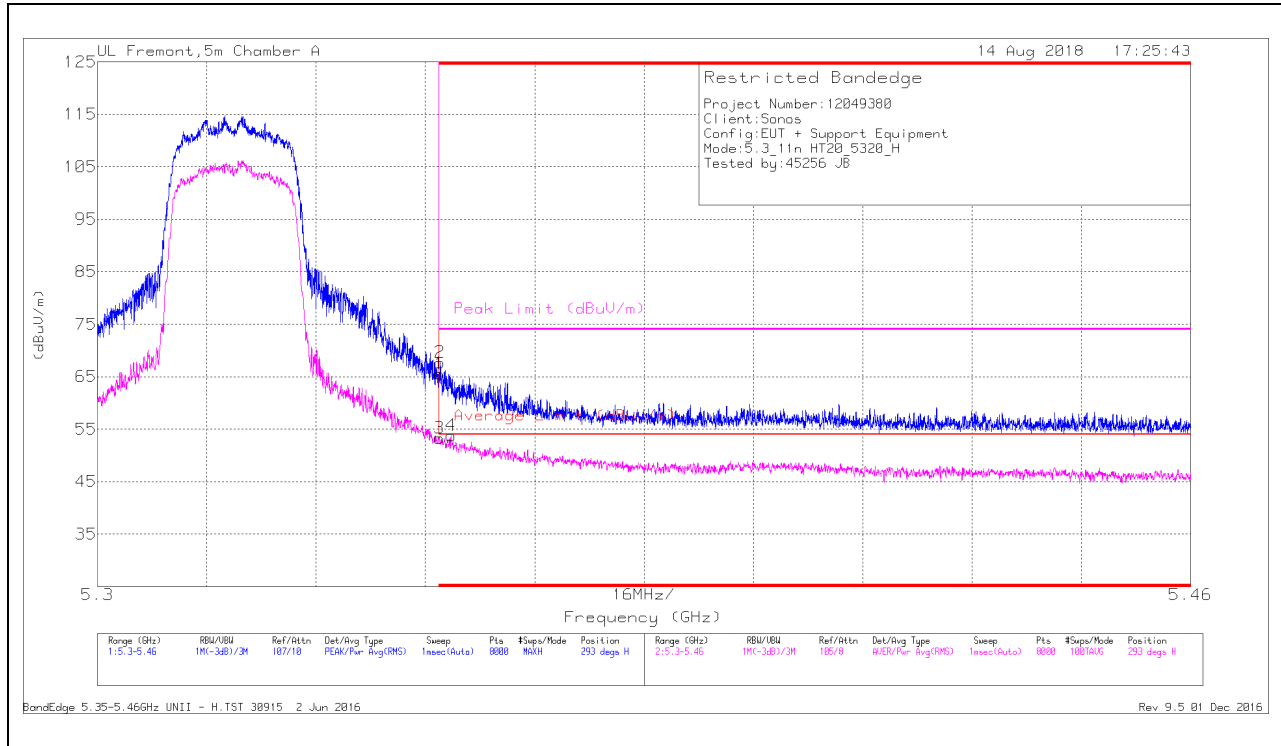

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/CbIFtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	48.9	Pk	34.6	-17.9	0	65.6	-	-	74	-8.4	293	183	H
2	* 5.35	51.01	Pk	34.6	-17.9	0	67.71	-	-	74	-6.29	293	183	H
3	* 5.35	36.12	RMS	34.6	-17.9	.46	53.28	54	-72	-	-	293	183	H
4	* 5.352	36.56	RMS	34.6	-17.9	.46	53.72	54	-28	-	-	293	183	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

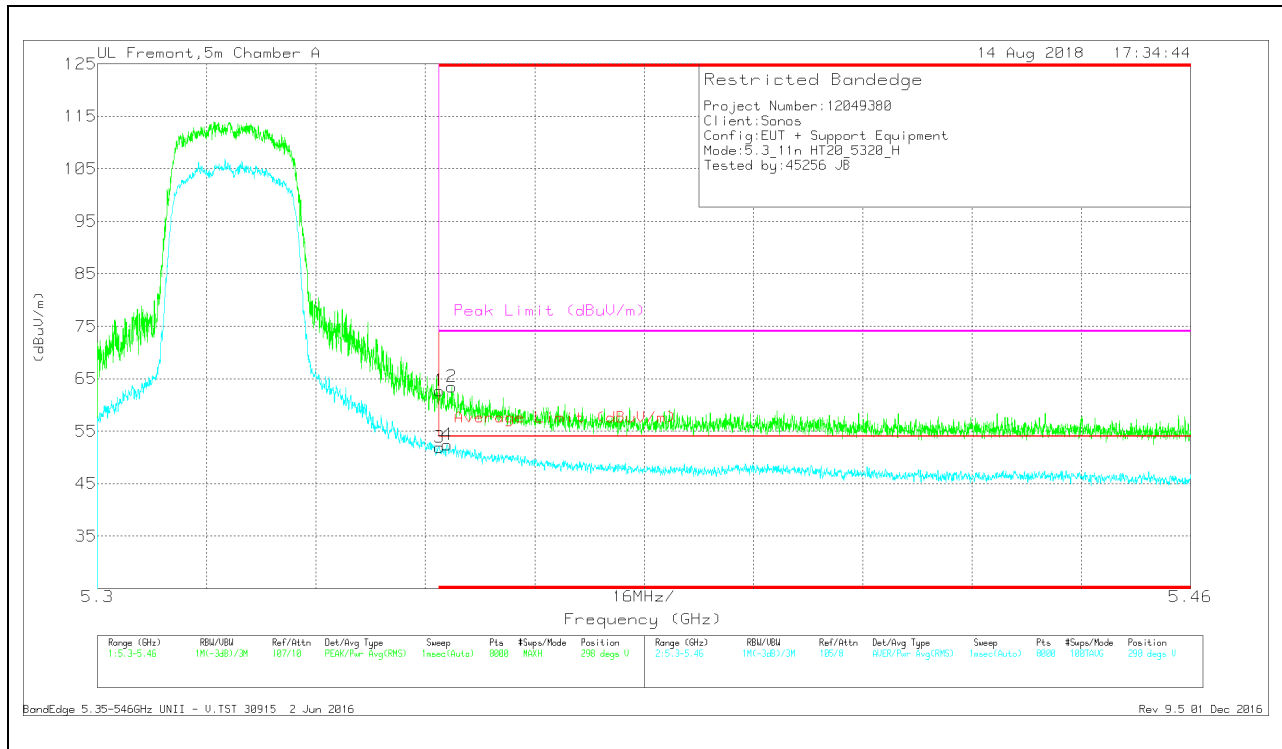

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/CbI/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	46.06	Pk	34.6	-17.9	0	62.76	-	-	74	-11.24	298	180	V
3	* 5.35	34.77	RMS	34.6	-17.9	.46	51.93	54	-2.07	-	-	298	180	V
4	* 5.351	35.27	RMS	34.6	-17.9	.46	52.43	54	-1.57	-	-	298	180	V
2	* 5.352	46.76	Pk	34.6	-17.9	0	63.46	-	-	74	-10.54	298	180	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

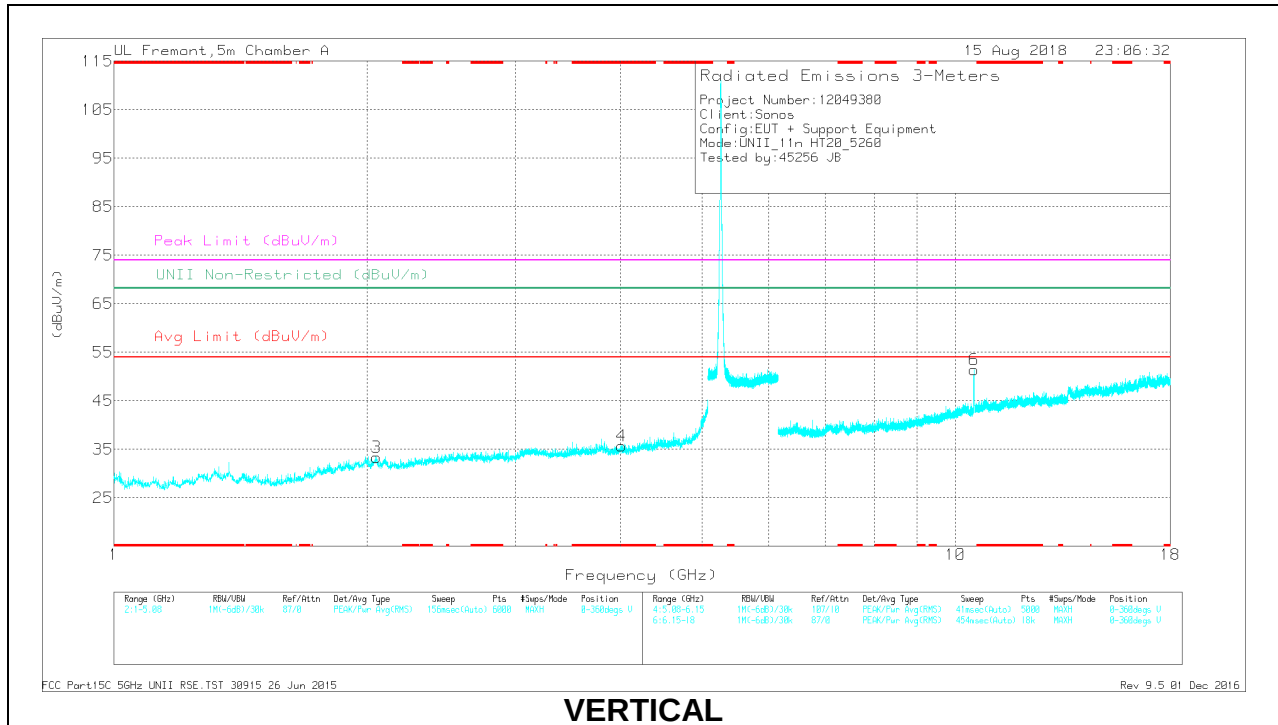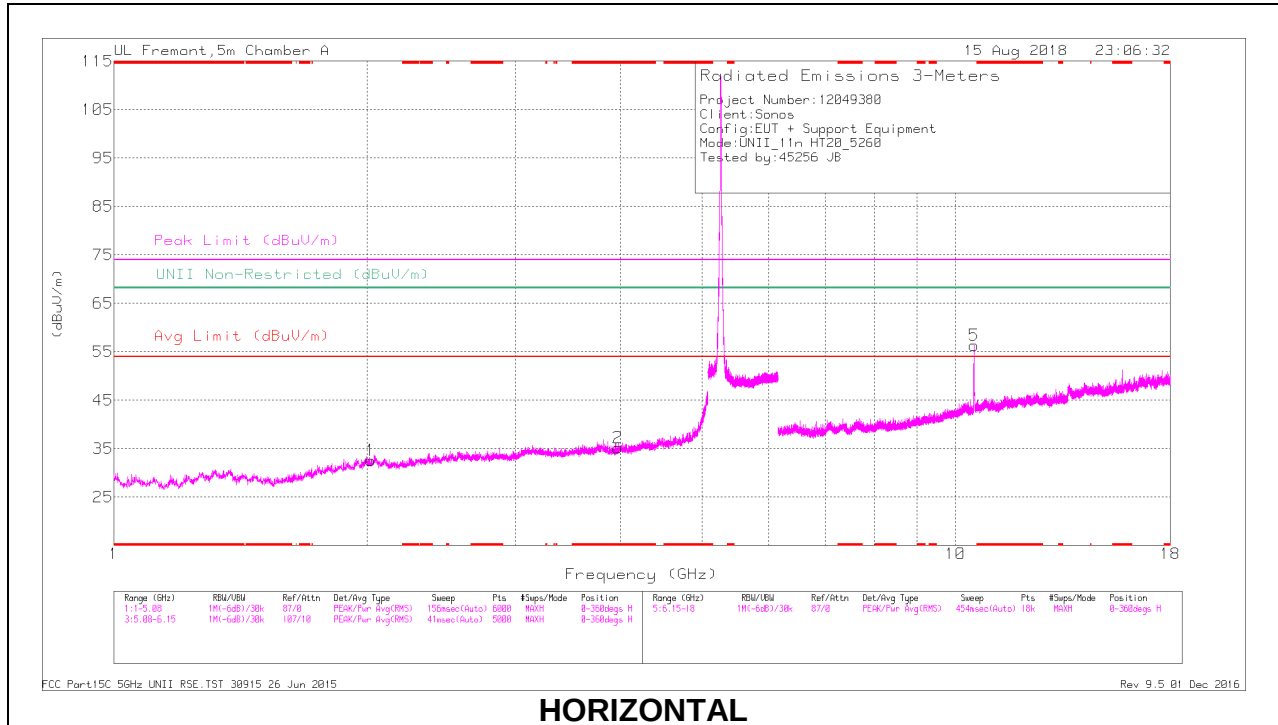

RADIATED EMISSIONS

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 3.973	30.04	PK	33.3	-28.1	0	35.24	-	-	74	-38.76	-	-	0-360	101	H
4	* 4.01	29.77	PK	33.4	-27.5	0	35.67	-	-	74	-38.33	-	-	0-360	101	V
1	2.019	31.5	PK	31.4	-30.3	0	32.6	-	-	-	-	68.2	-35.6	0-360	199	H
3	2.05	31.92	PK	31.4	-30	0	33.32	-	-	-	-	68.2	-34.88	0-360	101	V
6	10.519	33.38	PK	37.6	-19.6	0	51.38	-	-	-	-	68.2	-16.82	0-360	200	V
5	10.52	38.31	PK	37.6	-19.6	0	56.31	-	-	-	-	68.2	-11.89	0-360	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

Radiated Emissions



Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.972	36.92	PK-U	33.3	-28.1	0	42.12	-	-	74	-31.88	-	-	306	281	H
* 3.973	25.02	ADR	33.3	-28.1	.46	30.68	54	-23.32	-	-	-	-	306	281	H
* 4.009	35.71	PK-U	33.4	-27.5	0	41.61	-	-	74	-32.39	-	-	358	330	V
* 4.012	24.58	ADR	33.4	-27.5	.46	30.94	54	-23.06	-	-	-	-	358	330	V
2.019	38.62	PK-U	31.4	-30.3	0	39.72	-	-	-	-	68.2	-28.48	38	169	H
2.049	38.27	PK-U	31.4	-30	0	39.67	-	-	-	-	68.2	-28.53	329	266	V
10.518	41.27	PK-U	37.6	-19.6	0	59.27	-	-	-	-	68.2	-8.93	314	209	V
10.52	43.2	PK-U	37.6	-19.6	0	61.2	-	-	-	-	68.2	-7	352	103	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

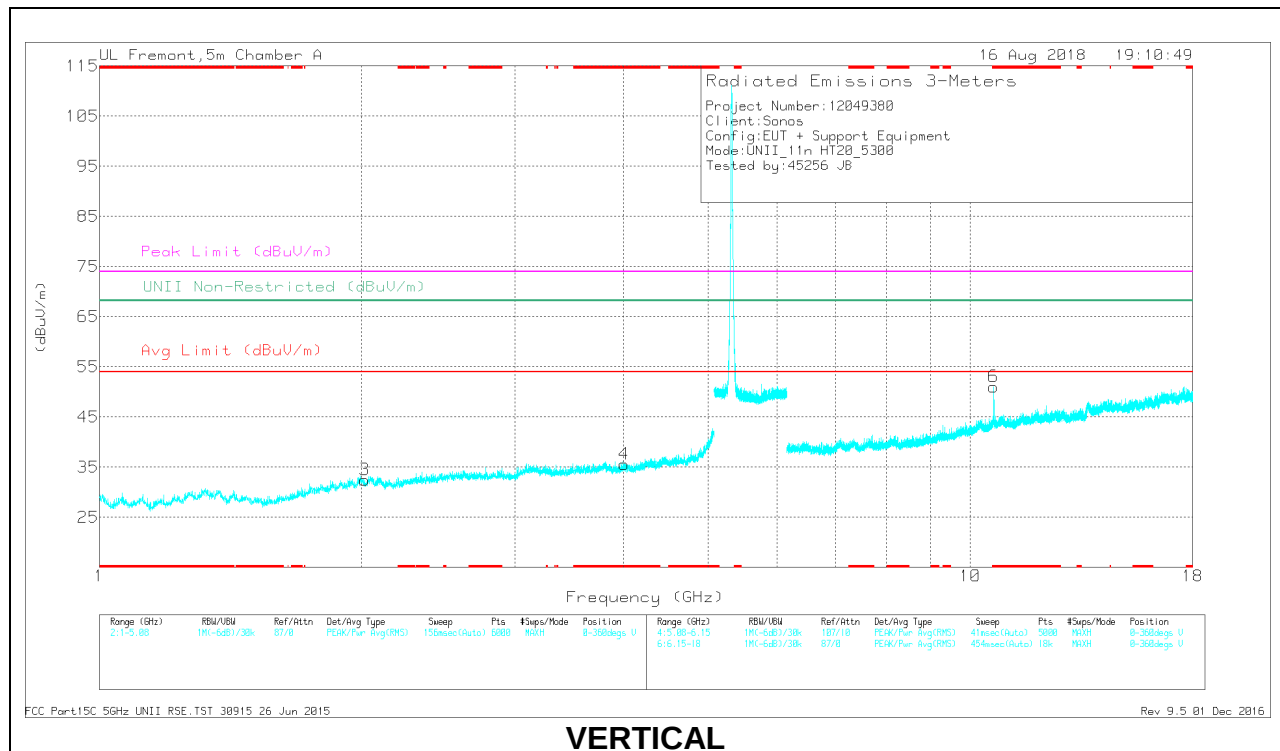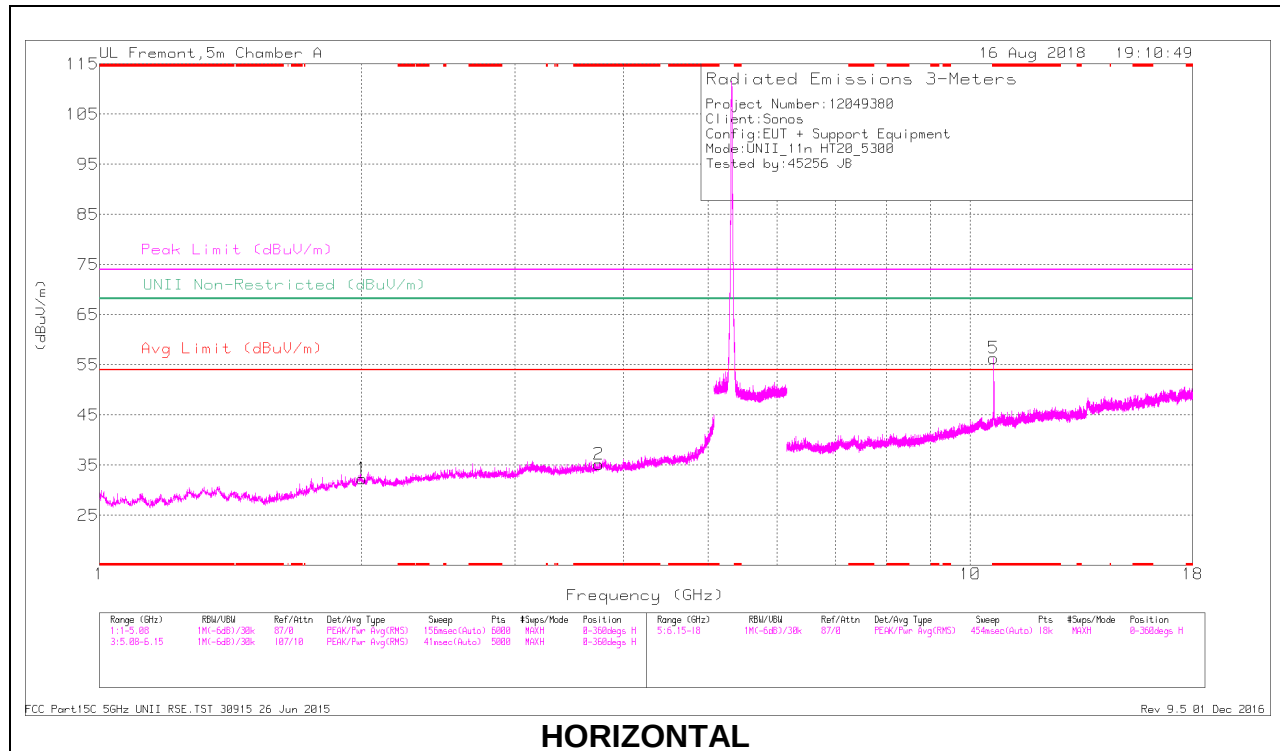

RADIATED EMISSIONS

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Unit Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 3.742	30.41	PK	33.1	-28.3	0	35.21	-	-	74	-38.79	-	-	0-360	101	H
4	* 4.007	29.61	PK	33.4	-27.4	0	35.61	-	-	74	-38.39	-	-	0-360	101	V
5	* 10.639	37.92	PK	37.7	-19.3	0	56.32	-	-	74	-17.68	-	-	0-360	101	H
6	* 10.641	32.67	PK	37.7	-19.3	0	51.07	-	-	74	-22.93	-	-	0-360	101	V
1	2.003	31.55	PK	31.4	-30.6	0	32.35	-	-	-	-	68.2	-35.85	0-360	199	H
3	2.015	31.4	PK	31.4	-30.4	0	32.4	-	-	-	-	68.2	-35.8	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

Radiated Emissions



Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Unit Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.74	37.18	PK-U	33.1	-28.3	0	41.98	-	-	74	-32.02	-	-	61	322	H
* 3.744	25.29	ADR	33.1	-28.3	.46	30.55	54	-23.45	-	-	-	-	61	322	H
* 4.008	36.07	PK-U	33.4	-27.4	0	42.07	-	-	74	-31.93	-	-	245	168	V
* 4.008	24.61	ADR	33.4	-27.4	.46	31.07	54	-22.93	-	-	-	-	245	168	V
* 10.64	45.1	PK-U	37.7	-19.3	0	63.5	-	-	74	-10.5	-	-	15	120	H
* 10.64	31.27	ADR	37.7	-19.3	.46	50.13	54	-3.87	-	-	-	-	15	120	H
* 10.64	38.94	PK-U	37.7	-19.3	0	57.34	-	-	74	-16.66	-	-	310	129	V
* 10.64	25.87	ADR	37.7	-19.3	.46	44.73	54	-9.27	-	-	-	-	310	129	V
2.003	38.82	PK-U	31.4	-30.6	0	39.62	-	-	-	-	68.2	-28.58	138	242	H
2.015	30.04	PK-U	31.4	-30.4	0	39.04	-	-	-	-	68.2	-29.16	173	161	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

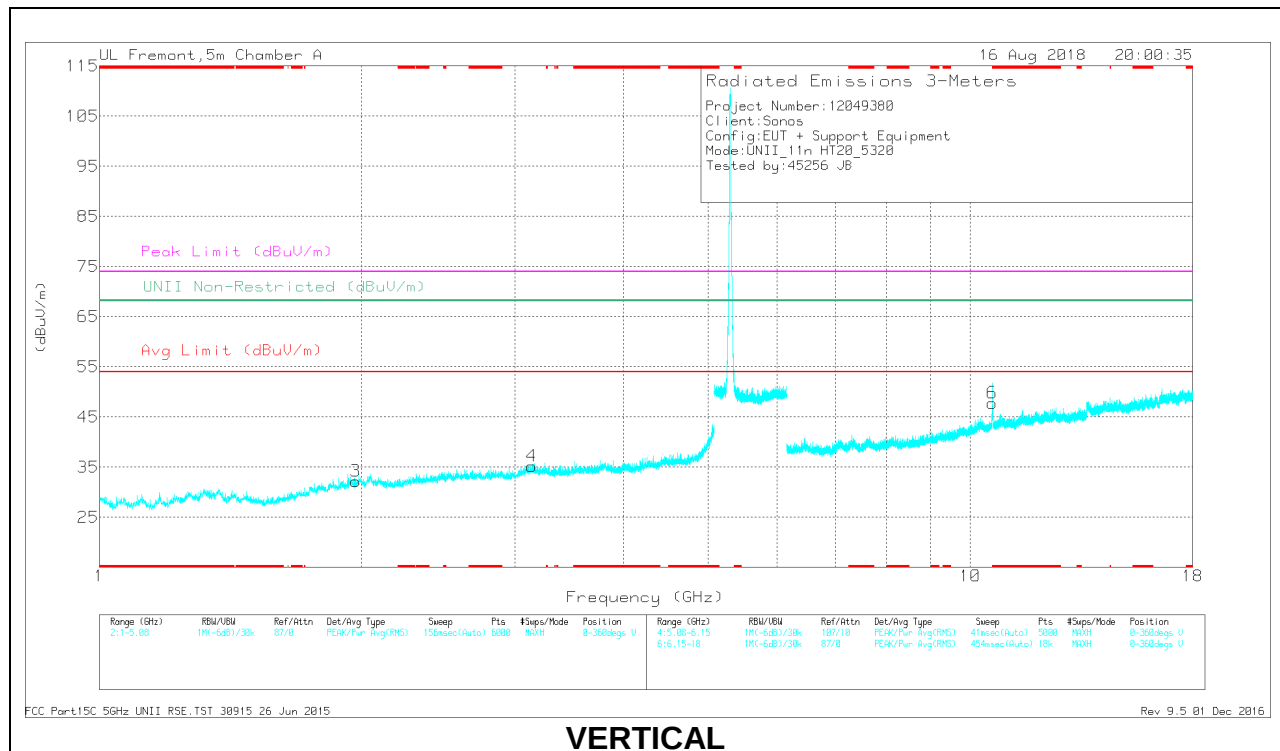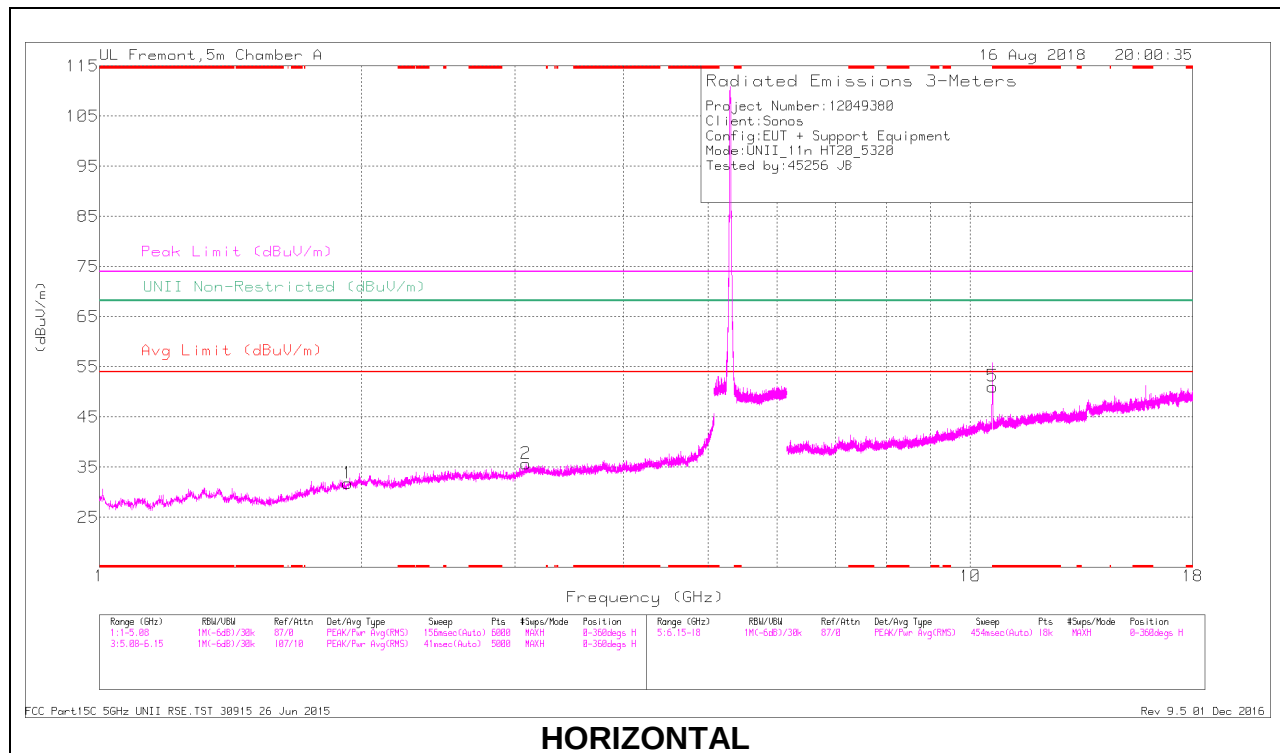

RADIATED EMISSIONS

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Cali/Rtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 10.606	32.59	PK	37.7	-19.2	0	51.09	-	-	74	-22.91	-	-	0-360	199	H
6	* 10.603	29.33	PK	37.7	-19.2	0	47.83	-	-	74	-26.17	-	-	0-360	101	V
1	1.928	31.63	PK	31.2	-31	0	31.63	-	-	-	-	68.2	-36.37	0-360	101	H
3	1.968	31.62	PK	31.4	-30.8	0	32.22	-	-	-	-	68.2	-35.98	0-360	200	V
2	3.088	31.49	PK	32.9	-28.7	0	35.69	-	-	-	-	68.2	-32.51	0-360	199	H
4	3.135	30.88	PK	32.8	-28.5	0	35.18	-	-	-	-	68.2	-33.02	0-360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Cali/Rtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 10.607	42.85	PK-U	37.7	-19.1	0	61.45	-	-	74	-12.55	-	-	8	143	H
* 10.604	29.13	ADR	37.7	-19.2	46	48.09	54	-5.91	-	-	-	-	8	143	H
* 10.601	37.4	PK-U	37.7	-19.1	0	56	-	-	74	-18	-	-	336	116	V
* 10.601	25.63	ADR	37.7	-19.1	46	44.69	54	-9.31	-	-	-	-	336	116	V
1.928	39.12	PK-U	31.2	-31	0	39.32	-	-	-	-	68.2	-28.88	282	258	H
1.967	38.1	PK-U	31.4	-30.9	0	38.6	-	-	-	-	68.2	-29.6	267	262	V
3.088	37.62	PK-U	32.9	-28.7	0	41.82	-	-	-	-	68.2	-26.38	182	190	H
3.133	37.69	PK-U	32.8	-28.5	0	41.99	-	-	-	-	68.2	-26.21	21	360	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

9.1.1.7. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.6 GHz BAND

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

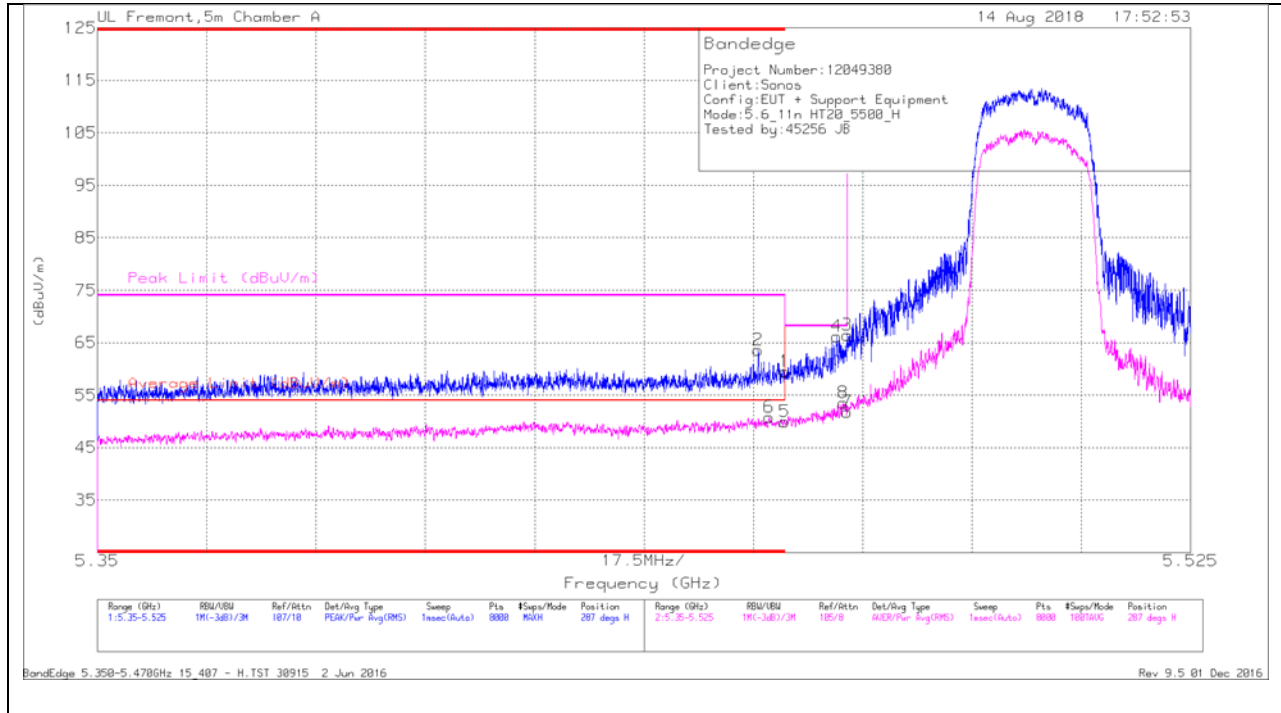

Trace Markers


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/CB/Filter/Pad (dB)	DC Corr (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.456	46.79	Pk	34.7	-17.9	0	63.59	-	-	74	-10.41	287	228	H
6	* 5.458	33.56	RMS	34.7	-17.9	.46	50.82	54	-3.18	-	-	287	228	H
1	* 5.46	42.66	Pk	34.7	-17.9	0	59.46	-	-	74	-14.54	287	228	H
5	* 5.46	32.71	RMS	34.7	-17.9	.46	49.97	54	-4.03	-	-	287	228	H
4	5.468	49.21	Pk	34.8	-17.8	0	66.21	-	-	68.2	-1.99	287	228	H
8	5.469	36.04	RMS	34.8	-17.8	.46	53.5	-	-	-	-	287	228	H
3	5.47	49.47	Pk	34.8	-17.8	0	66.47	-	-	68.2	-1.73	287	228	H
7	5.47	34.36	RMS	34.8	-17.8	.46	51.82	-	-	-	-	287	228	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

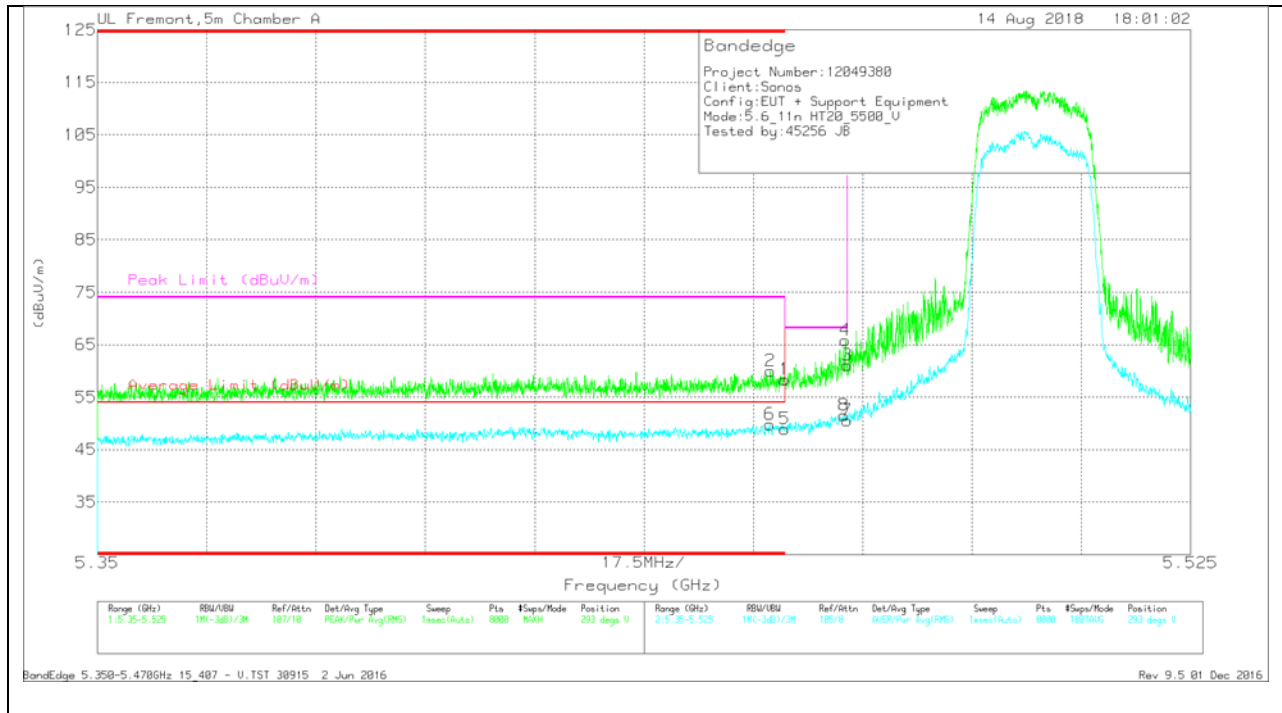

Trace Markers

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Cb/Filter/Pad (dB)	DC Corr (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.458	43.2	Pk	34.7	-17.9	0	60	-	-	74	-14	293	194	V
6	* 5.458	32.53	RMS	34.7	-17.9	.46	49.79	54	-4.21	-	-	293	194	V
1	* 5.46	41.61	Pk	34.7	-17.9	0	58.41	-	-	74	-15.59	293	194	V
5	* 5.46	31.7	RMS	34.7	-17.9	.46	48.96	54	-5.04	-	-	293	194	V
8	5.469	34.12	RMS	34.8	-17.8	.46	51.58	-	-	-	-	293	194	V
3	5.47	44.14	Pk	34.8	-17.8	0	61.14	-	-	68.2	-7.06	293	194	V
4	5.47	48.83	Pk	34.8	-17.8	0	65.83	-	-	68.2	-2.37	293	194	V
7	5.47	33.12	RMS	34.8	-17.8	.46	50.58	-	-	-	-	293	194	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

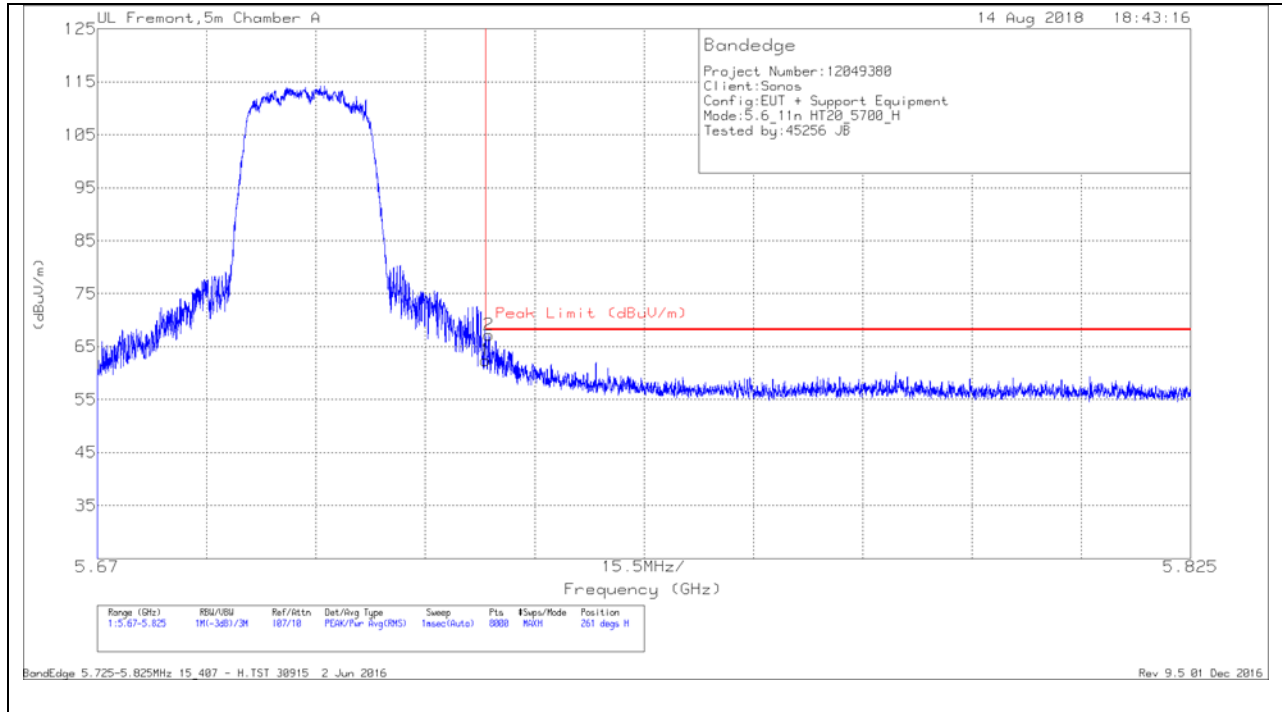


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Ampl/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	45.26	PK	35	-17.9	0	62.36	68.2	-5.84	261	191	H
2	5.726	50.14	PK	35	-17.9	0	67.24	68.2	-.96	261	191	H

Pk - Peak detector

VERTICAL RESULT

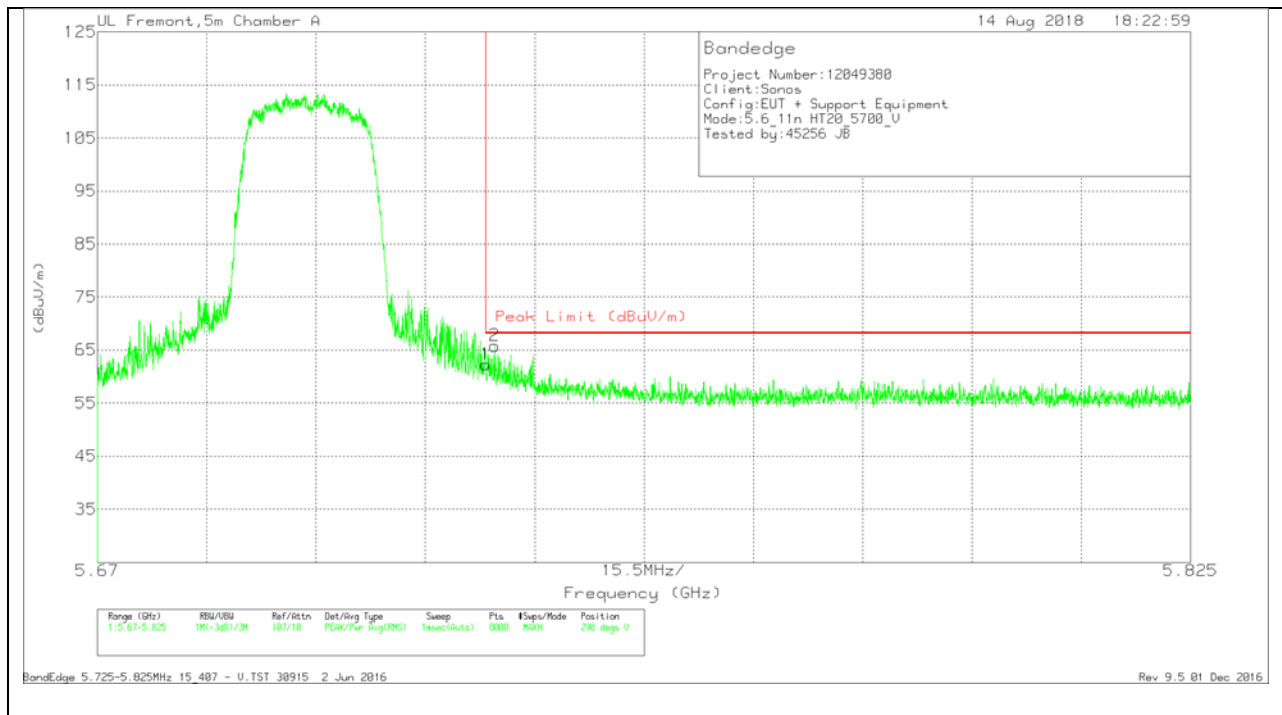



Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	45.21	Pk	35	-17.9	0	62.31	68.2	-5.89	298	207	V
2	5.726	48.68	Pk	35	-17.9	0	65.78	68.2	-2.42	298	207	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

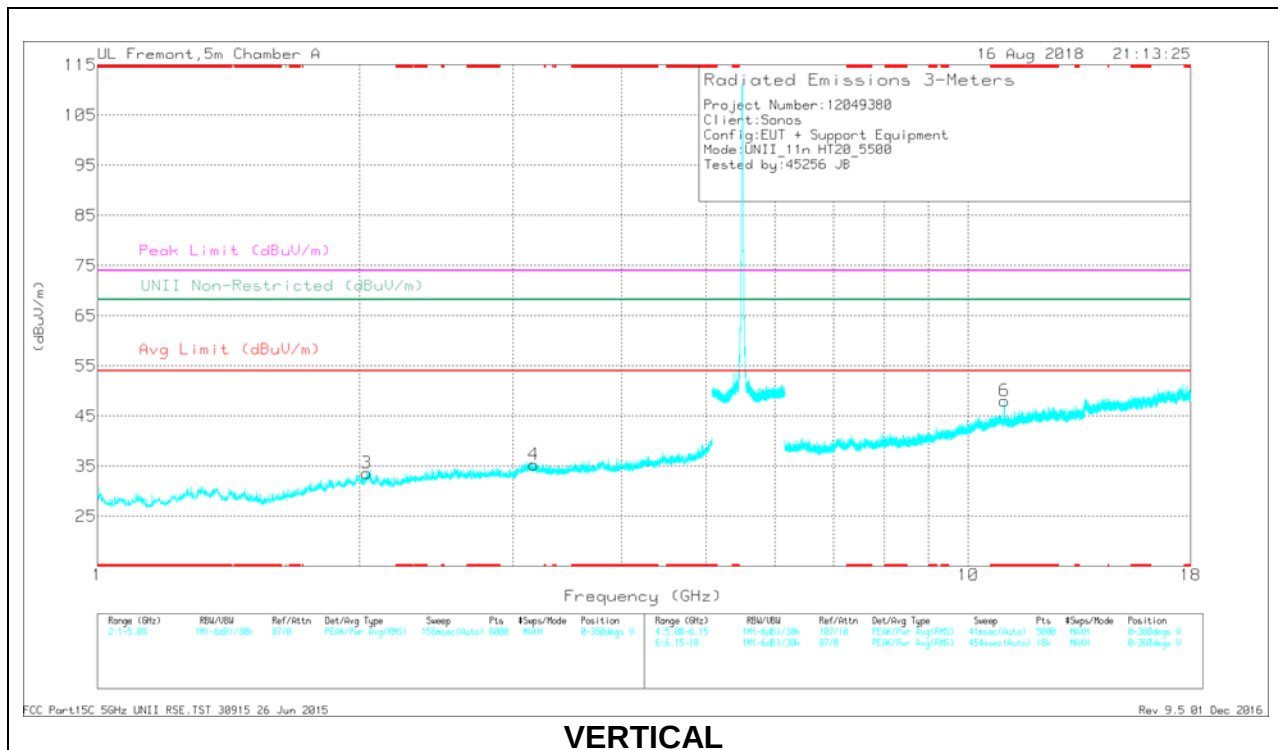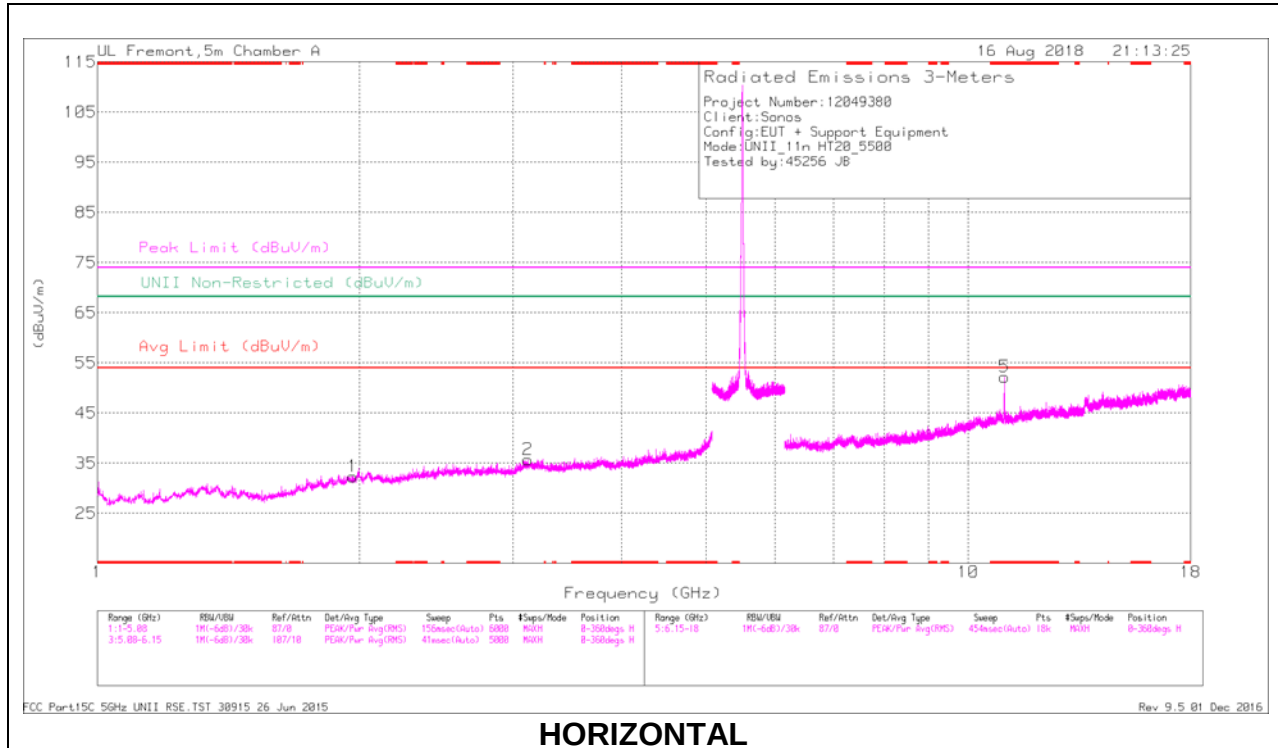

RADIATED EMISSIONS

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Altitude (ft)	Height (cm)	Polarity
5	* 11.001	33.37	PK	37.9	-19.1	0	52.17	-	-	74	-21.83	-	-	0-360	199	H
6	* 11.001	29.23	PK	37.9	-19.1	0	48.03	-	-	74	-25.97	-	-	0-360	101	V
1	1.966	31.77	PK	31.4	-30.9	0	32.27	-	-	-	-	68.2	-35.93	0-360	101	H
3	2.039	32.14	PK	31.4	-29.9	0	33.64	-	-	-	-	68.2	-34.56	0-360	200	V
2	3.119	31.13	PK	32.9	-28.3	0	35.73	-	-	-	-	68.2	-32.47	0-360	101	H
4	3.17	30.97	PK	32.9	-28.5	0	35.37	-	-	-	-	68.2	-32.83	0-360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band Radiated Emissions



Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Altitude (ft)	Height (cm)	Polarity
* 11	41.7	PK-U	37.9	-19.1	0	60.5	-	-	74	-13.5	-	-	7	138	H
* 11	29.28	ADR	37.9	-19.1	.46	48.54	54	-5.46	-	-	-	-	7	138	H
* 11	36.39	PK-U	37.9	-19.1	0	55.19	-	-	74	-18.81	-	-	23	203	V
* 11	23.45	ADR	37.9	-19.1	.46	42.71	54	-11.29	-	-	-	-	23	203	V
1.965	38.89	PK-U	31.4	-30.9	0	39.39	-	-	-	-	68.2	-28.81	259	122	H
2.037	38.52	PK-U	31.4	-29.9	0	40.02	-	-	-	-	68.2	-28.18	89	239	V
3.119	36.88	PK-U	32.9	-28.3	0	41.48	-	-	-	-	68.2	-26.72	254	381	H
3.172	37.45	PK-U	32.9	-28.5	0	41.85	-	-	-	-	68.2	-26.35	278	276	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

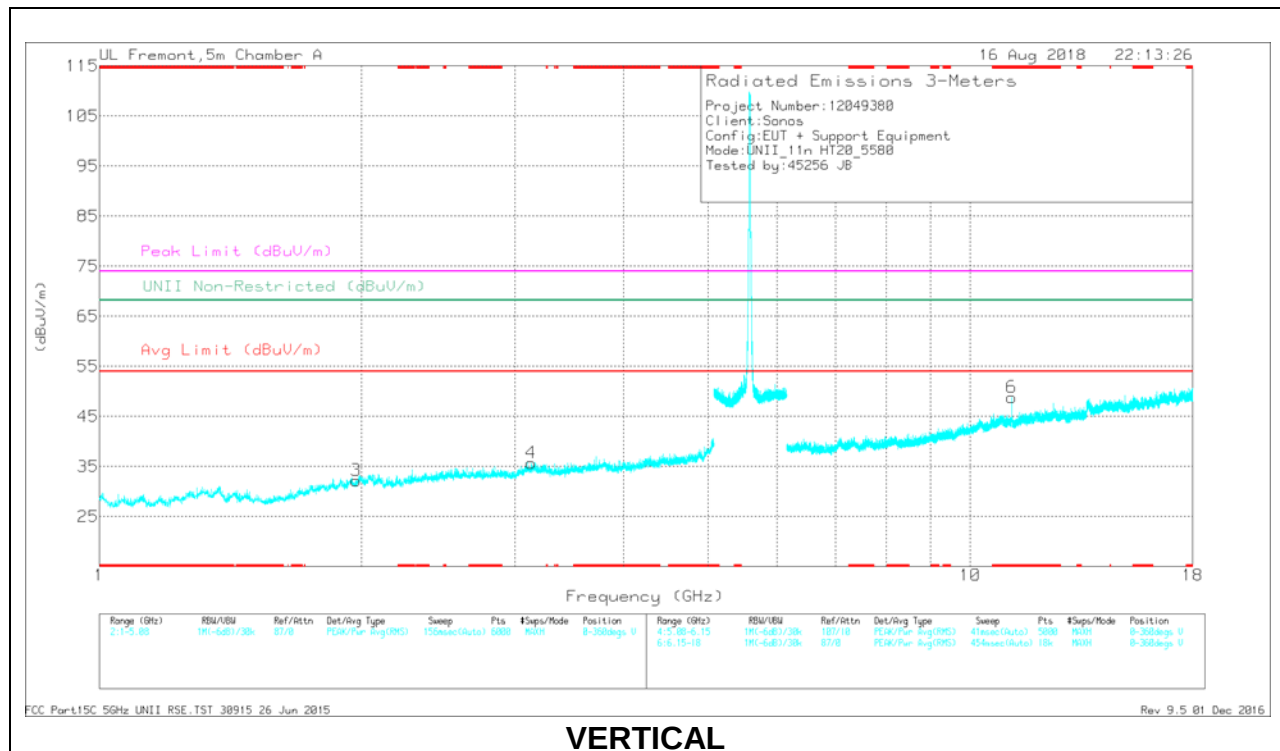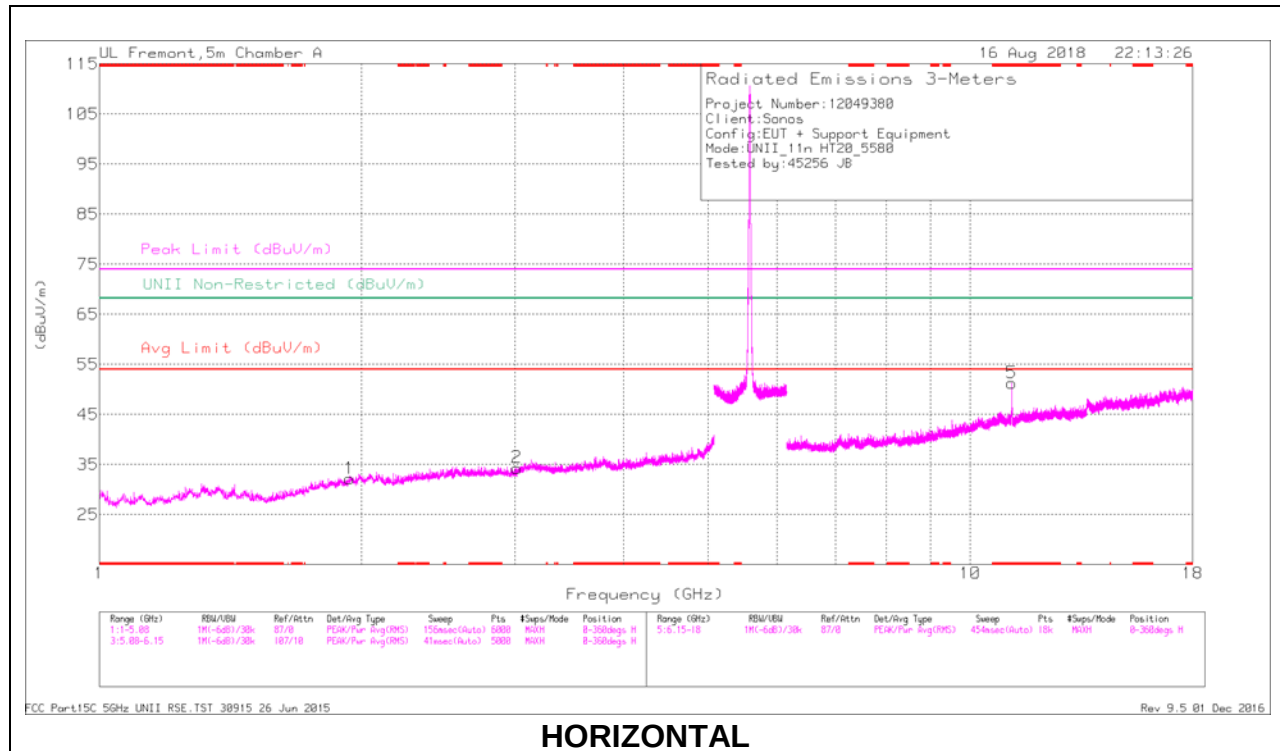

RADIATED EMISSIONS

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 11.158	32.3	Pk	37.9	-18.9	0	51.3	-	-	74	-22.7	-	-	0-360	199	H
6	* 11.158	29.84	Pk	37.9	-18.9	0	48.84	-	-	74	-25.16	-	-	0-360	200	V
1	1.938	32.03	Pk	31.3	-31.1	0	32.23	-	-	-	-	68.2	-35.97	0-360	101	H
3	1.971	31.61	Pk	31.4	-30.8	0	32.21	-	-	-	-	68.2	-35.99	0-360	101	V
2	3.014	31.64	Pk	32.4	-29.7	0	34.34	-	-	-	-	68.2	-33.86	0-360	199	H
4	3.129	31.27	Pk	32.8	-28.4	0	35.67	-	-	-	-	68.2	-32.53	0-360	200	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detecto

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 11.158	39.42	PK-U	37.9	-18.9	0	58.42	-	-	74	-15.58	-	-	8	147	H
* 11.159	27.37	ADR	37.9	-18.9	46	46.83	54	-7.17	-	-	-	-	8	147	H
* 11.159	35.45	PK-U	37.9	-18.9	0	54.45	-	-	74	-19.55	-	-	337	104	V
* 11.159	23.42	ADR	37.9	-18.9	46	42.88	54	-11.12	-	-	-	-	337	104	V
1.938	39.45	PK-U	31.3	-31.1	0	39.65	-	-	-	-	68.2	-28.55	135	155	H
1.97	38.39	PK-U	31.4	-30.8	0	38.99	-	-	-	-	68.2	-29.21	166	191	V
3.014	37.86	PK-U	32.4	-29.7	0	40.56	-	-	-	-	68.2	-27.64	228	124	H
3.128	37.25	PK-U	32.8	-28.5	0	41.55	-	-	-	-	68.2	-26.65	61	346	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK-U - U-NII: Maximum Peak
ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

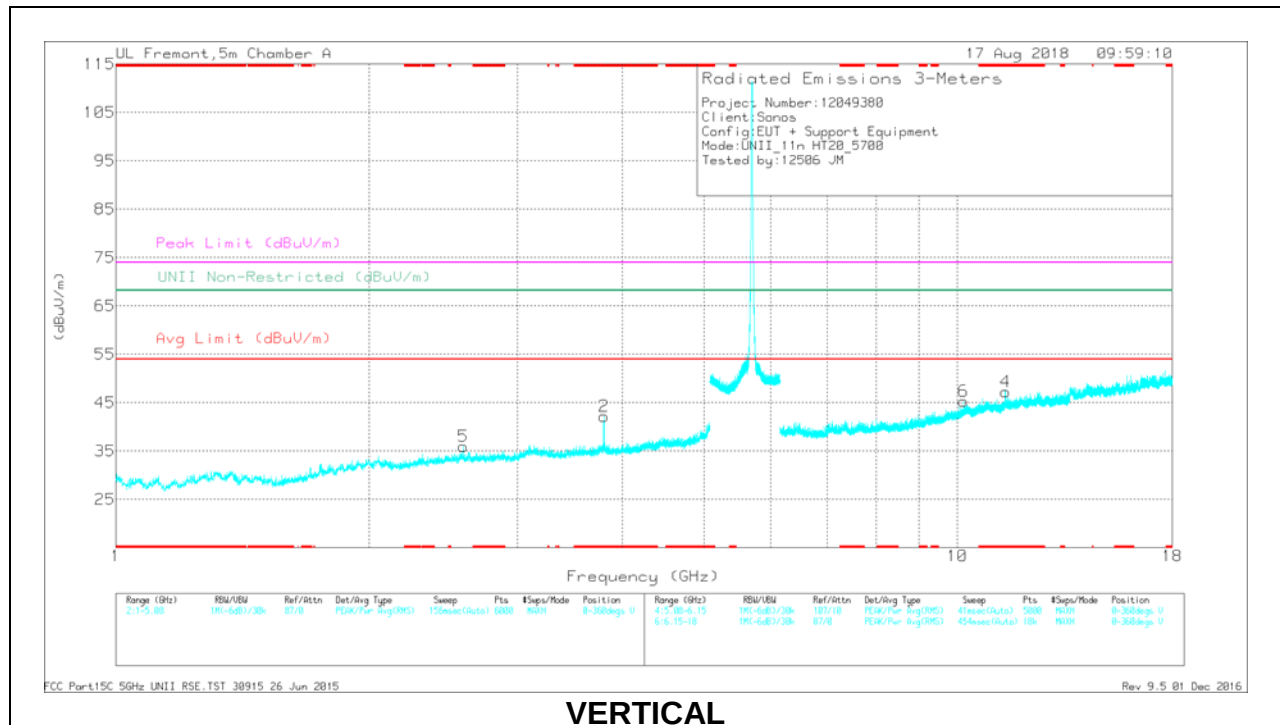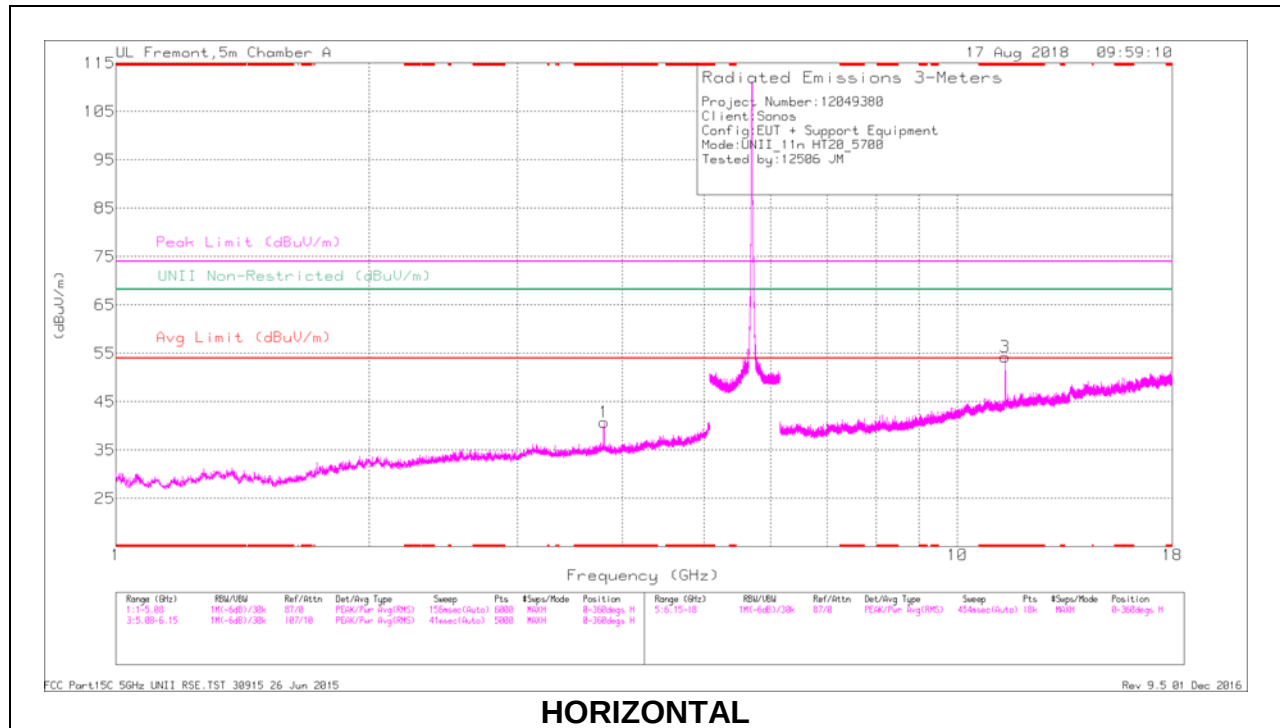

RADIATED EMISSIONS

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Ctrl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	U/NII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.8	35.16	Pk	33.2	-27.6	0	40.76	-	-	74	-33.24	-	-	0-360	101	H
2	* 3.8	36.58	Pk	33.2	-27.6	0	42.18	-	-	74	-31.82	-	-	0-360	101	V
3	* 11.397	34.8	Pk	38.2	-18.7	0	54.3	-	-	74	-19.7	-	-	0-360	101	H
4	* 11.402	27.61	Pk	38.2	-18.6	0	47.21	-	-	74	-26.79	-	-	0-360	101	V
5	2.588	33.31	Pk	32.4	-29.8	0	35.91	-	-	-	-	68.2	-32.29	0-360	101	V
6	10.161	27.91	Pk	37.4	-20	0	45.31	-	-	-	-	68.2	-22.89	0-360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Ctrl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	U/NII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.8	41.28	PK-U	33.2	-27.6	0	46.88	-	-	74	-27.12	-	-	254	101	H
* 3.8	33.73	ADR	33.2	-27.6	.46	39.79	54	-14.21	-	-	-	-	254	101	H
* 3.8	42.65	PK-U	33.2	-27.6	0	48.25	-	-	74	-25.75	-	-	317	140	V
* 3.8	36.93	ADR	33.2	-27.6	.46	42.99	54	-11.01	-	-	-	-	317	140	V
* 11.398	39.01	PK-U	38.2	-18.7	0	58.51	-	-	74	-15.49	-	-	360	102	H
* 11.399	27.12	ADR	38.2	-18.7	.46	47.08	54	-6.92	-	-	-	-	360	102	H
* 11.403	34.73	PK-U	38.2	-18.6	0	54.33	-	-	74	-19.67	-	-	334	126	V
* 11.401	22.77	ADR	38.2	-18.7	.46	42.73	54	-11.27	-	-	-	-	334	126	V
2.587	38.37	PK-U	32.4	-29.8	0	40.97	-	-	-	-	68.2	-27.23	124	102	V
10.161	33.05	PK-U	37.4	-20	0	50.45	-	-	-	-	68.2	-17.75	319	106	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK-U - U-NII: Maximum Peak
ADR - U-NII AD primary method, RMS average

9.1.1.8. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.8 GHz BAND

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

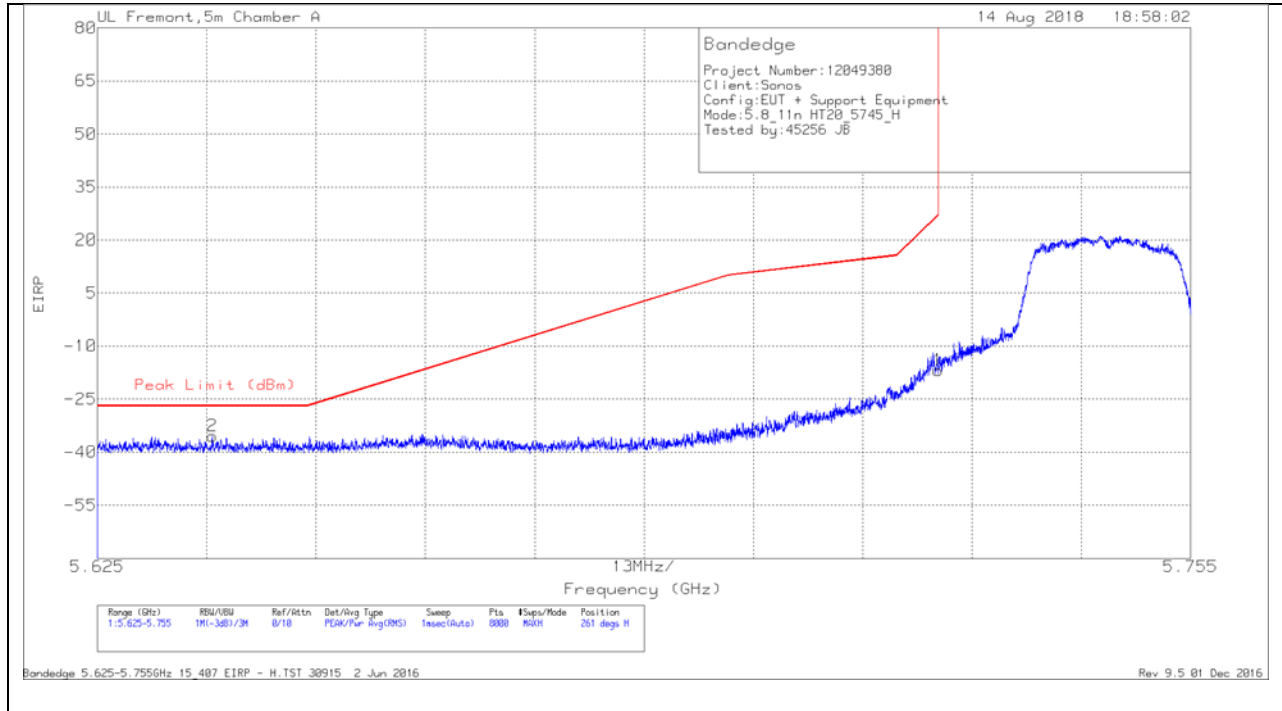


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T862 (dBm)	Amp/Cbll/Ftr/Pa d (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.639	-64.3	Pk	35.1	-18	11.8	0	-35.4	-27	-8.4	261	191	H
1	5.725	-45.69	Pk	35	-17.9	11.8	0	-16.79	27	-43.79	261	191	H

Pk - Peak detector

VERTICAL RESULT

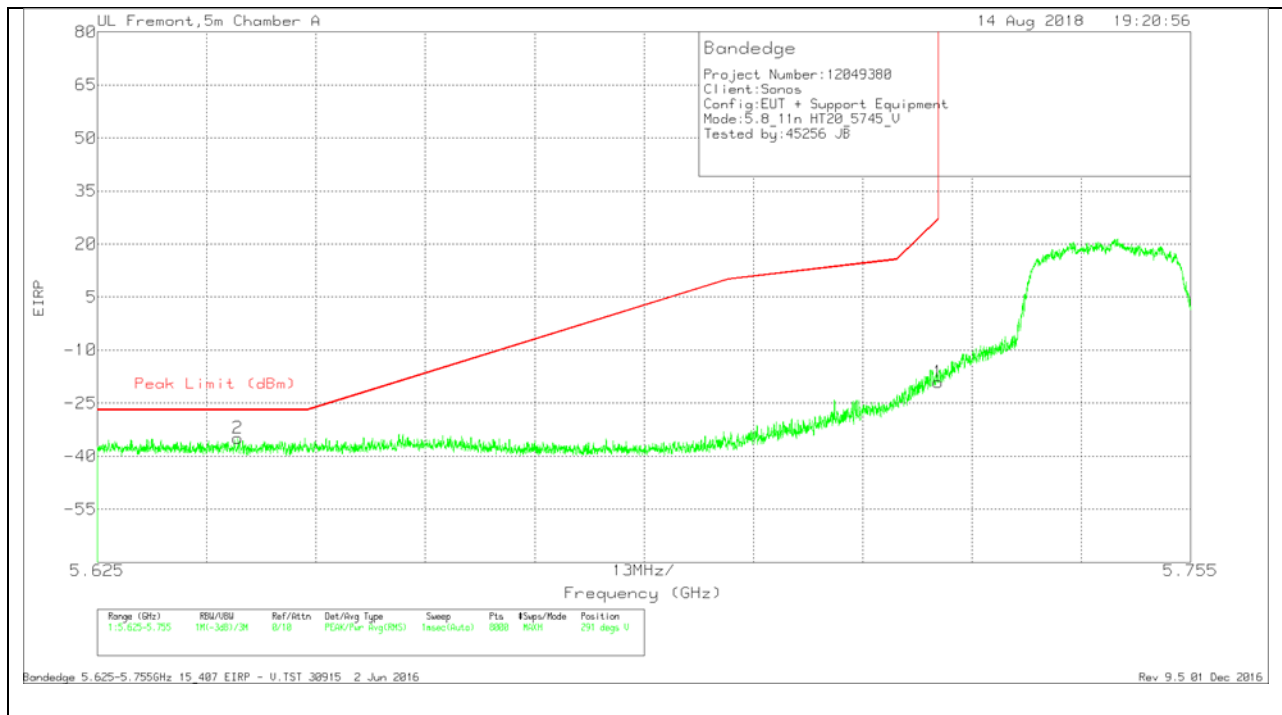


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T862 (dBm)	Amp/Cbl/Ftr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.642	-63.83	Pk	35.1	-18	11.8	0	-34.93	-27	-7.93	291	166	V
1	5.725	-48.04	Pk	35	-17.9	11.8	0	-19.14	27	-46.14	291	166	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

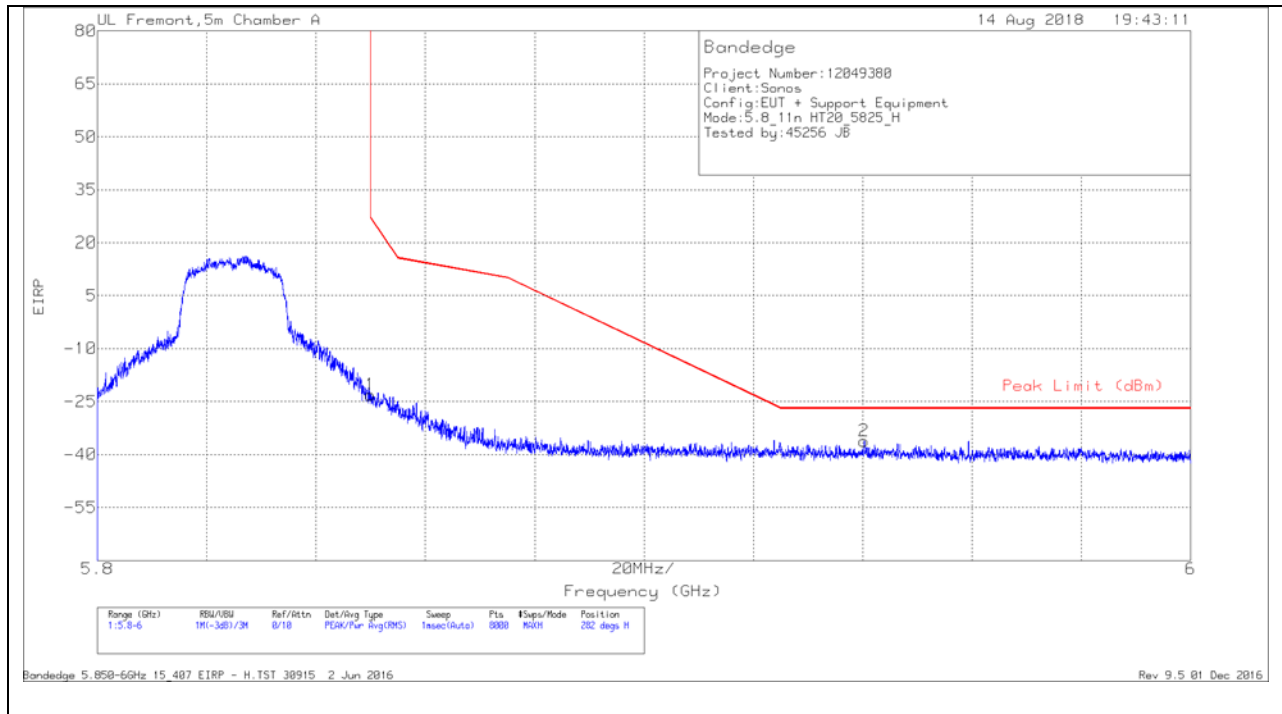


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T862 (dBm)	Ampl/Cbl/Filt/Pa d (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-52.16	Pk	35.1	-17.8	11.8	0	-23.06	26.99	-50.05	282	150	H
2	5.94	-65.72	Pk	35.3	-17.5	11.8	0	-36.12	-27	-9.12	282	150	H

Pk - Peak detector

VERTICAL RESULT

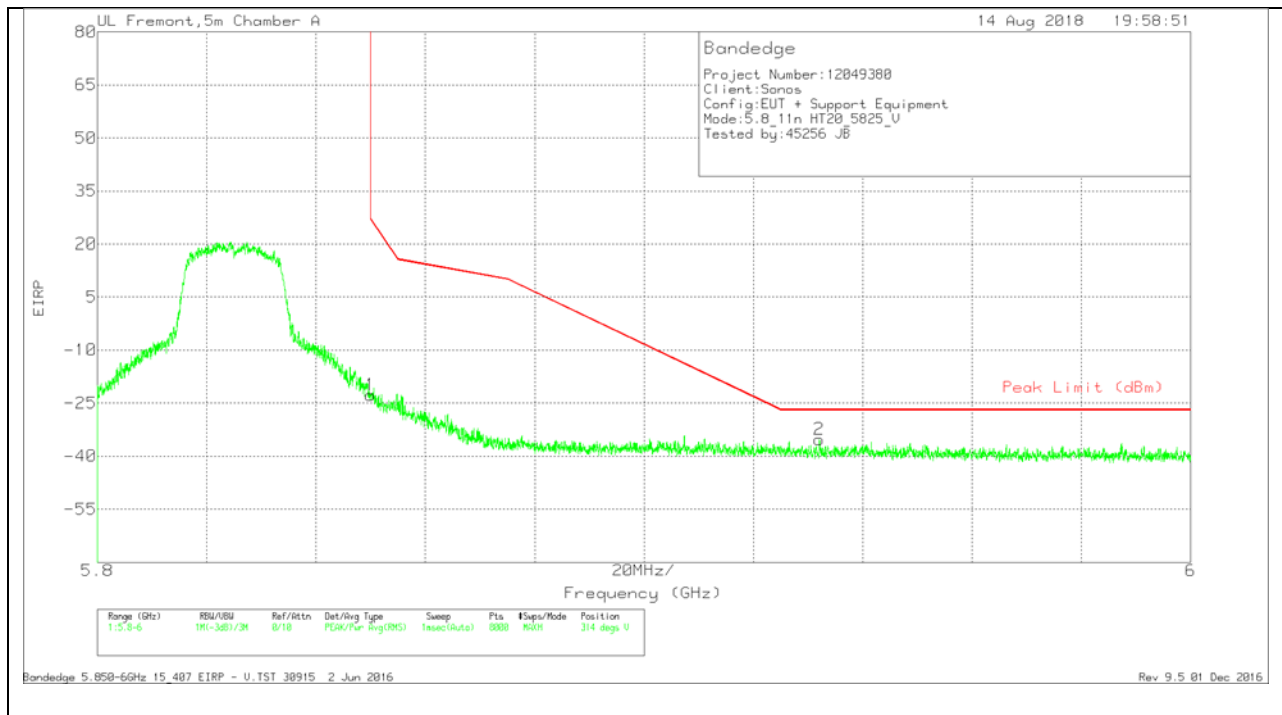



Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T862 (dBm)	Amp/Cbl/Filt/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-51.81	Pk	35.1	-17.8	11.8	0	-22.71	26.99	-49.7	314	141	V
2	5.932	-64.69	Pk	35.2	-17.5	11.8	0	-35.19	-27	-8.19	314	141	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

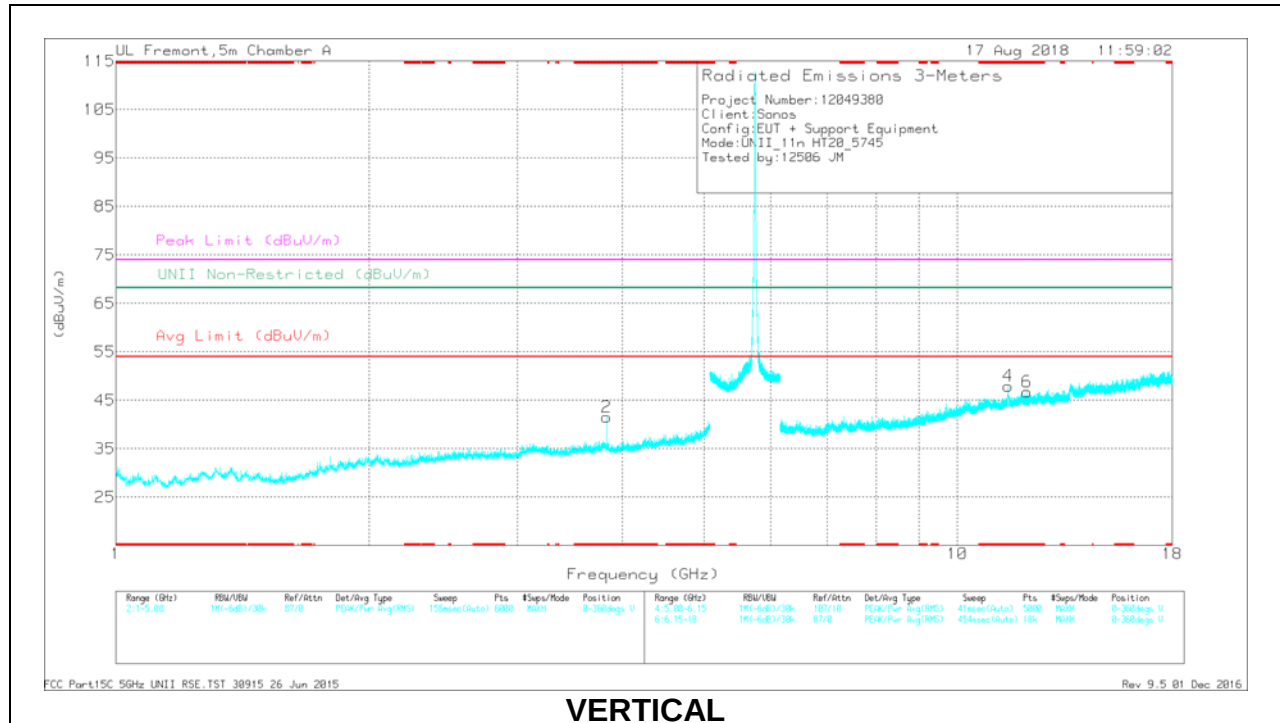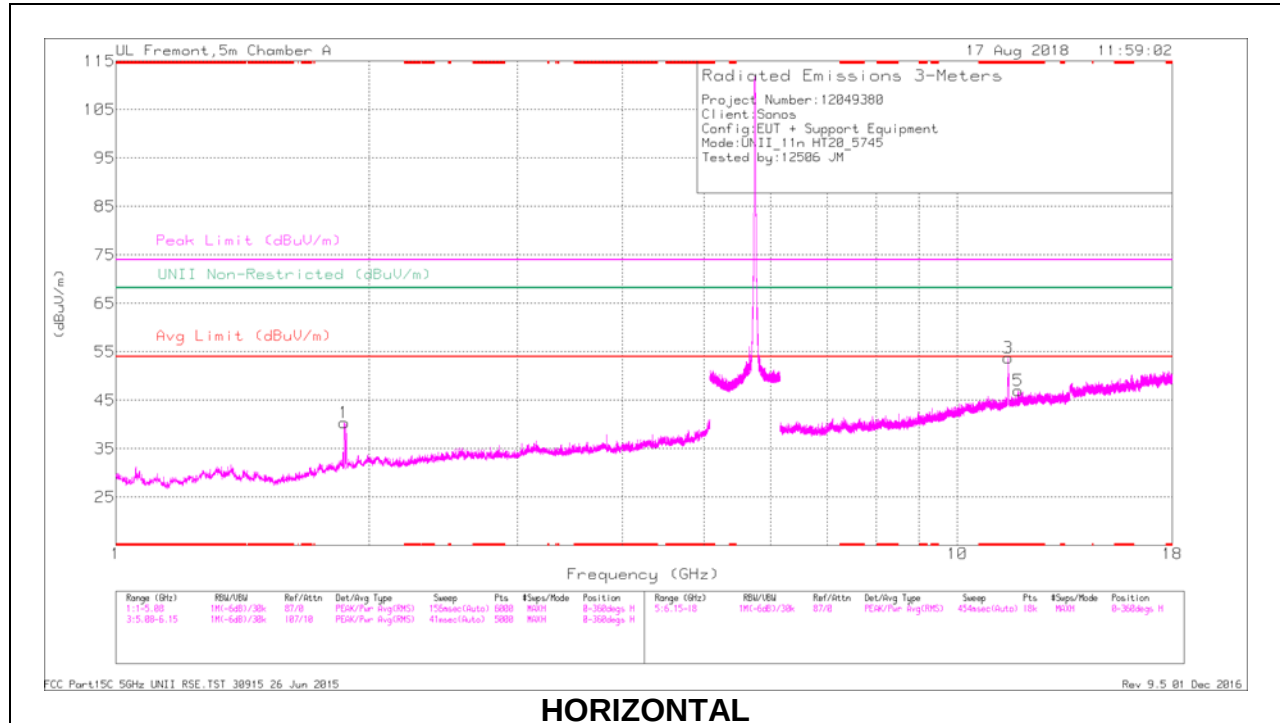

RADIATED EMISSIONS

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Ctrl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	U/NII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 3.83	36.4	Pk	33.1	-27.9	0	41.6	-	-	74	-32.4	-	-	0-360	101	V
3	* 11.488	33.91	Pk	38.3	-18.5	0	53.71	-	-	74	-20.29	-	-	0-360	199	H
5	* 11.817	26.99	Pk	38.8	-18.8	0	46.99	-	-	74	-27.01	-	-	0-360	101	H
4	* 11.489	28.17	Pk	38.3	-18.5	0	47.97	-	-	74	-26.03	-	-	0-360	200	V
6	* 12.097	26.49	Pk	38.9	-18.7	0	46.69	-	-	74	-27.31	-	-	0-360	101	V
1	1.868	40.91	Pk	31	-31.5	0	40.41	-	-	-	-	68.2	-27.79	0-360	100	H



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Ctrl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	U/NII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.83	41.26	PK-U	33.1	-27.9	0	46.46	-	-	74	-27.54	-	-	315	101	V
* 3.83	35.83	ADR	33.1	-27.9	.46	41.49	54	-12.51	-	-	-	-	315	101	V
* 11.488	38.96	PK-U	38.3	-18.5	0	58.76	-	-	74	-15.24	-	-	264	189	H
* 11.489	28.89	ADR	38.3	-18.5	.46	47.14	54	-6.86	-	-	-	-	264	189	H
* 11.815	31.74	PK-U	38.8	-18.9	0	51.64	-	-	74	-22.36	-	-	172	135	H
* 11.817	20.14	ADR	38.8	-18.9	.46	40.5	54	-13.5	-	-	-	-	172	135	H
* 11.489	34.52	PK-U	38.3	-18.5	0	54.32	-	-	74	-19.68	-	-	345	163	V
* 11.489	23.09	ADR	38.3	-18.5	.46	43.35	54	-10.65	-	-	-	-	345	163	V
* 12.097	32.09	PK-U	38.9	-18.7	0	52.29	-	-	74	-21.71	-	-	39	151	V
* 12.097	19.91	ADR	38.9	-18.7	.46	40.57	54	-13.43	-	-	-	-	39	151	V
1.87	39.03	PK-U	31	-31.5	0	38.53	-	-	-	-	68.2	-29.67	255	125	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK-U - U-NII: Maximum Peak
ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

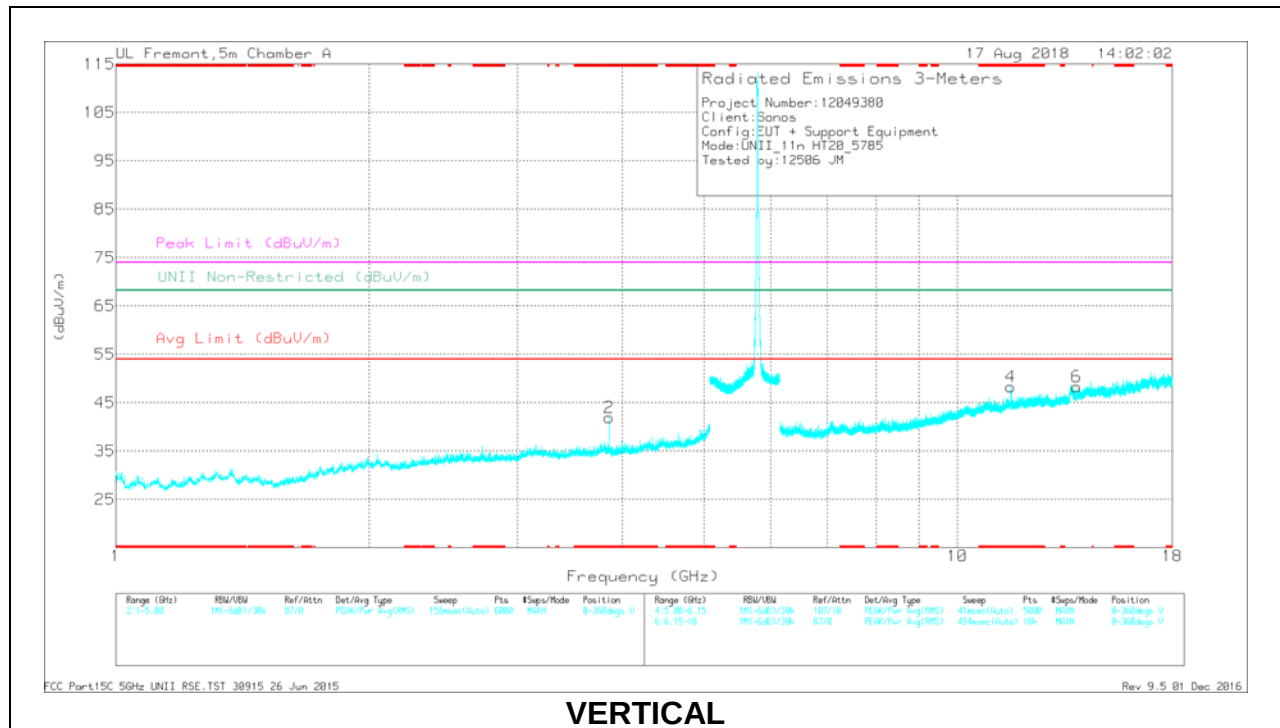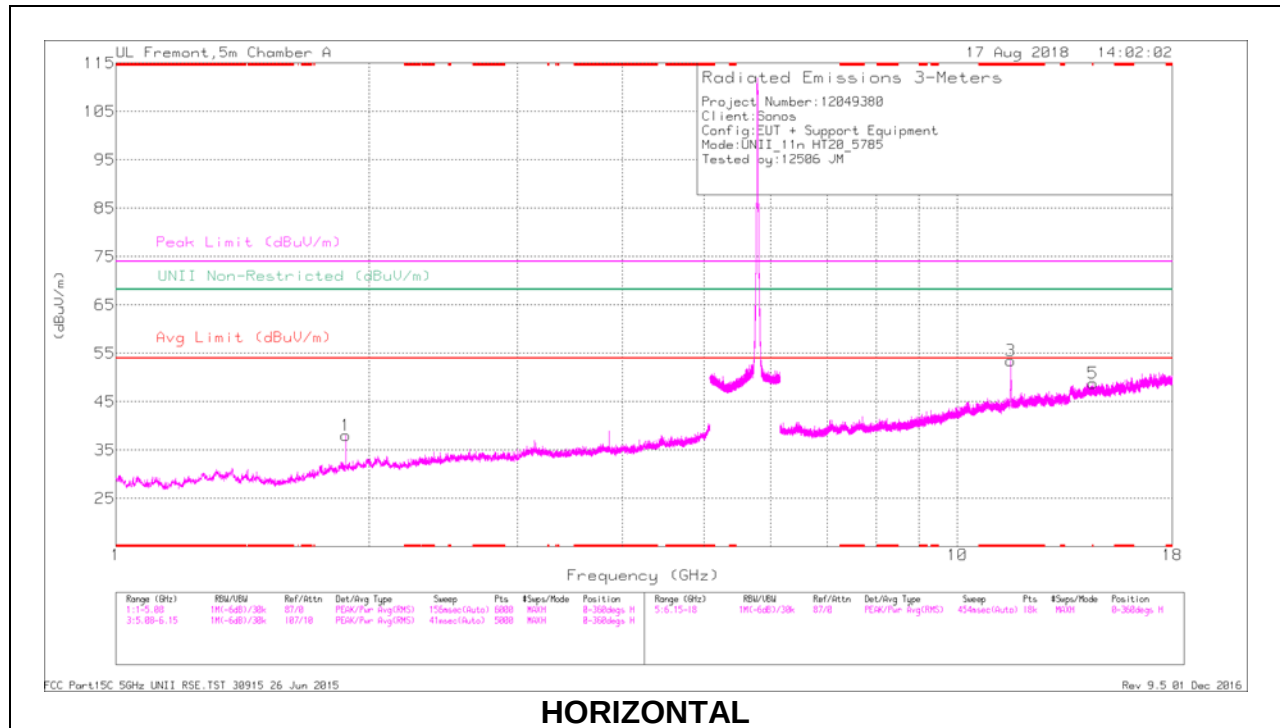

RADIATED EMISSIONS

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Ctrl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	U/NII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 3.857	37.19	Pk	33	-28.2	0	41.99	-	-	74	-32.02	-	-	0-360	101	V
3	* 11.57	34.13	Pk	38.4	-19	0	53.53	-	-	74	-20.47	-	-	0-360	199	H
5	* 14.482	27.36	Pk	39.8	-18.4	0	48.76	-	-	74	-25.24	-	-	0-360	199	H
4	* 11.569	28.88	Pk	38.4	-19	0	48.28	-	-	74	-25.72	-	-	0-360	101	V
1	1.876	38.56	Pk	31	-31.5	0	38.06	-	-	-	-	68.2	-30.14	0-360	199	H
6	13.864	27.56	Pk	39.4	-18.7	0	48.26	-	-	-	-	68.2	-19.94	0-360	101	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Ctrl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	U/NII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.857	42.36	PK-U	33	-28.2	0	47.16	-	-	74	-26.84	-	-	313	109	V
* 3.857	37.06	ADR	33	-28.2	.46	42.32	54	-11.68	-	-	-	-	313	109	V
* 11.568	38.95	PK-U	38.4	-19	0	58.35	-	-	74	-15.65	-	-	262	187	H
* 11.569	27.54	ADR	38.4	-19	.46	47.4	54	-6.6	-	-	-	-	262	187	H
* 14.481	32.05	PK-U	39.8	-18.3	0	53.55	-	-	74	-20.45	-	-	357	158	H
* 14.481	21.08	ADR	39.8	-18.3	.46	43.04	54	-10.96	-	-	-	-	357	158	H
* 11.569	36.65	PK-U	38.4	-19	0	56.05	-	-	74	-17.95	-	-	308	103	V
* 11.569	24.74	ADR	38.4	-19	.46	44.6	54	-9.4	-	-	-	-	308	103	V
1.876	39.31	PK-U	31	-31.5	0	38.81	-	-	-	-	68.2	-29.39	93	101	H
13.865	32.65	PK-U	39.4	-18.7	0	53.35	-	-	-	-	68.2	-14.85	98	167	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK-U - U-NII: Maximum Peak
ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

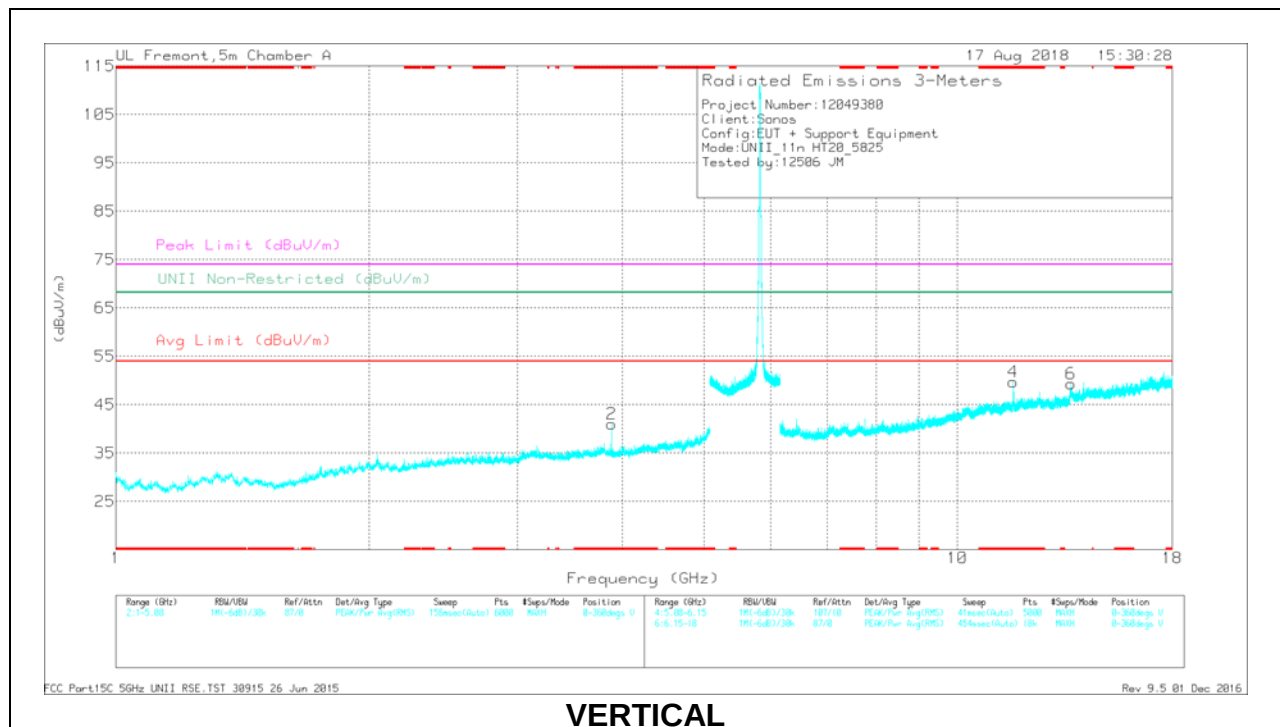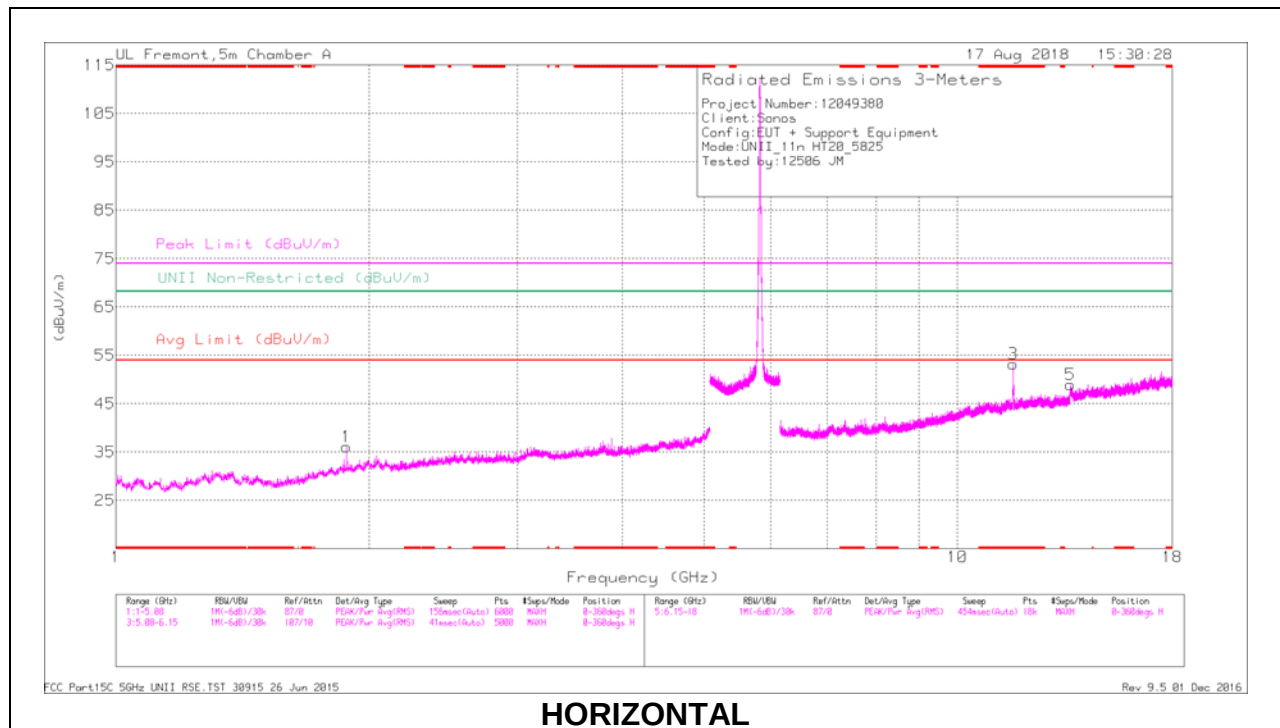

RADIATED EMISSIONS

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Ctrl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	U/NII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 3.883	36.4	Pk	33.1	-28.5	0	41	-	-	74	-33	-	-	0-360	101	V
3	* 11.647	33.29	Pk	38.5	-18.6	0	53.19	-	-	74	-20.81	-	-	0-360	101	H
4	* 11.649	29.81	Pk	38.5	-18.6	0	49.71	-	-	74	-24.29	-	-	0-360	200	V
1	1.879	36.57	Pk	31	-31.5	0	36.07	-	-	-	-	68.2	-32.13	0-360	199	H
5	13.63	27.59	Pk	39.3	-18	0	48.89	-	-	-	-	68.2	-19.31	0-360	101	H
6	13.641	27.93	Pk	39.3	-17.9	0	49.33	-	-	-	-	68.2	-18.87	0-360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Ctrl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	U/NII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.883	41.51	PK-U	33.1	-28.5	0	46.11	-	-	74	-27.89	-	-	312	108	V
* 3.883	35.77	ADR	33.1	-28.5	.46	40.83	54	-13.17	-	-	-	-	312	108	V
* 11.648	40.15	PK-U	38.5	-18.6	0	60.05	-	-	74	-13.95	-	-	5	146	H
* 11.649	28.29	ADR	38.5	-18.6	.46	48.65	54	-5.35	-	-	-	-	5	146	H
* 11.65	37.19	PK-U	38.5	-18.6	0	57.09	-	-	74	-16.91	-	-	341	123	V
* 11.65	24.37	ADR	38.5	-18.6	.46	44.73	54	-9.27	-	-	-	-	341	123	V
1.88	39.21	PK-U	31	-31.4	0	38.81	-	-	-	-	68.2	-29.39	90	145	H
13.628	32.62	PK-U	39.3	-18	0	53.92	-	-	-	-	68.2	-14.28	254	155	H
13.639	32.9	PK-U	39.3	-17.9	0	54.3	-	-	-	-	68.2	-13.9	352	150	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK-U - U-NII: Maximum Peak
ADR - U-NII AD primary method, RMS average

9.1.2 RADIO 1

9.1.2.1. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.2 GHz BAND

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

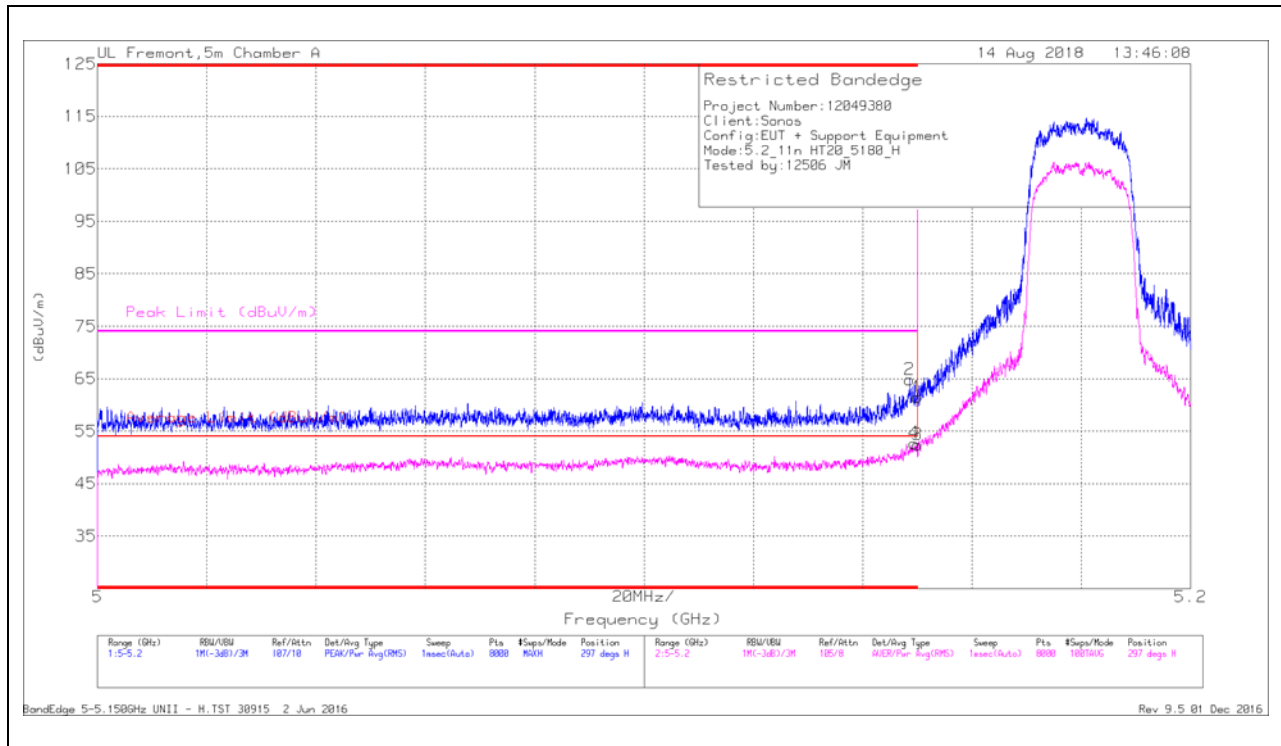

Trace Markers


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/CB/IFtr/Pad (dB)	DC Corr (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.149	48.09	Pk	34.4	-17.7	0	64.79	-	-	74	-9.21	297	185	H
4	* 5.149	35.45	RMS	34.4	-17.6	.46	52.71	54	-1.29	-	-	297	185	H
1	* 5.15	44.72	Pk	34.4	-17.7	0	61.42	-	-	74	-12.58	297	185	H
3	* 5.15	35.29	RMS	34.4	-17.7	.46	52.45	54	-1.55	-	-	297	185	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

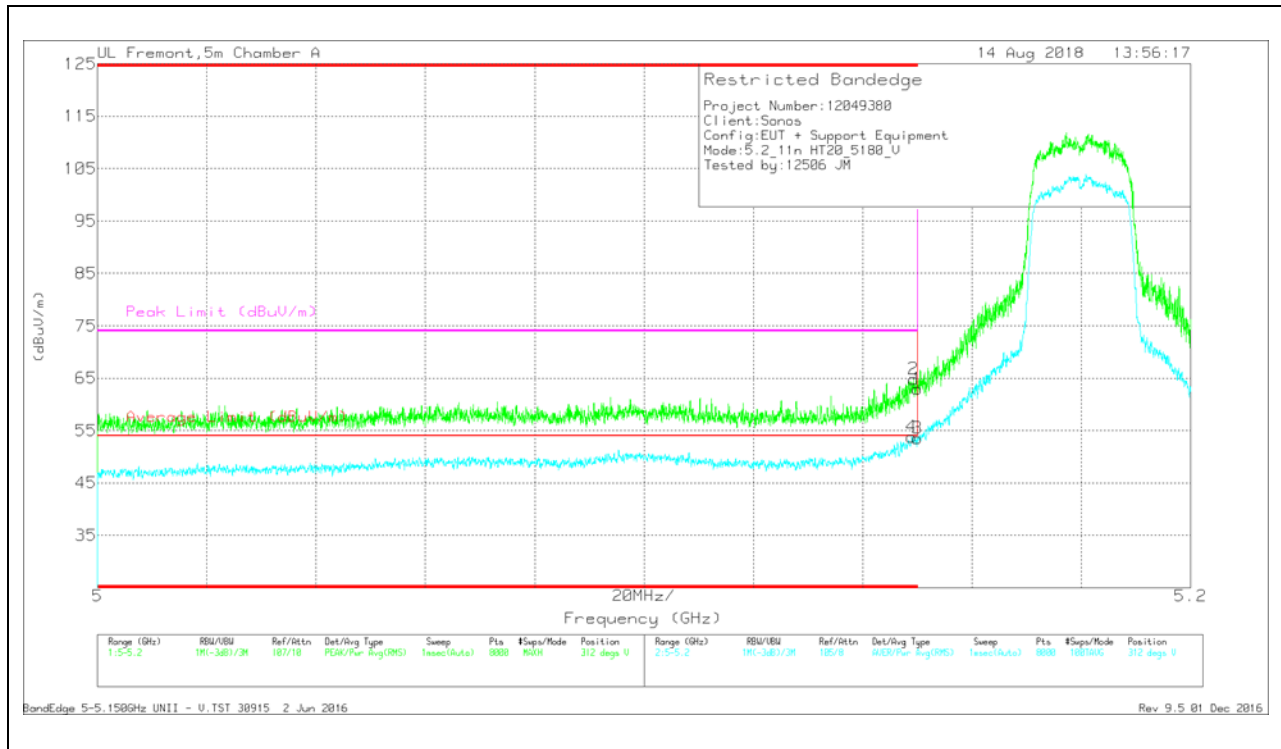

Trace Markers

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/CB/Fltr/Pad (dB)	DC Corr (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.149	48.02	Pk	34.4	-17.6	0	64.82	-	-	74	-9.18	312	201	V
4	* 5.149	36.66	RMS	34.4	-17.7	.46	53.82	54	-18	-	-	312	201	V
1	* 5.15	46.24	Pk	34.4	-17.7	0	62.94	-	-	74	-11.06	312	201	V
3	* 5.15	36.34	RMS	34.4	-17.7	.46	53.5	54	-5	-	-	312	201	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

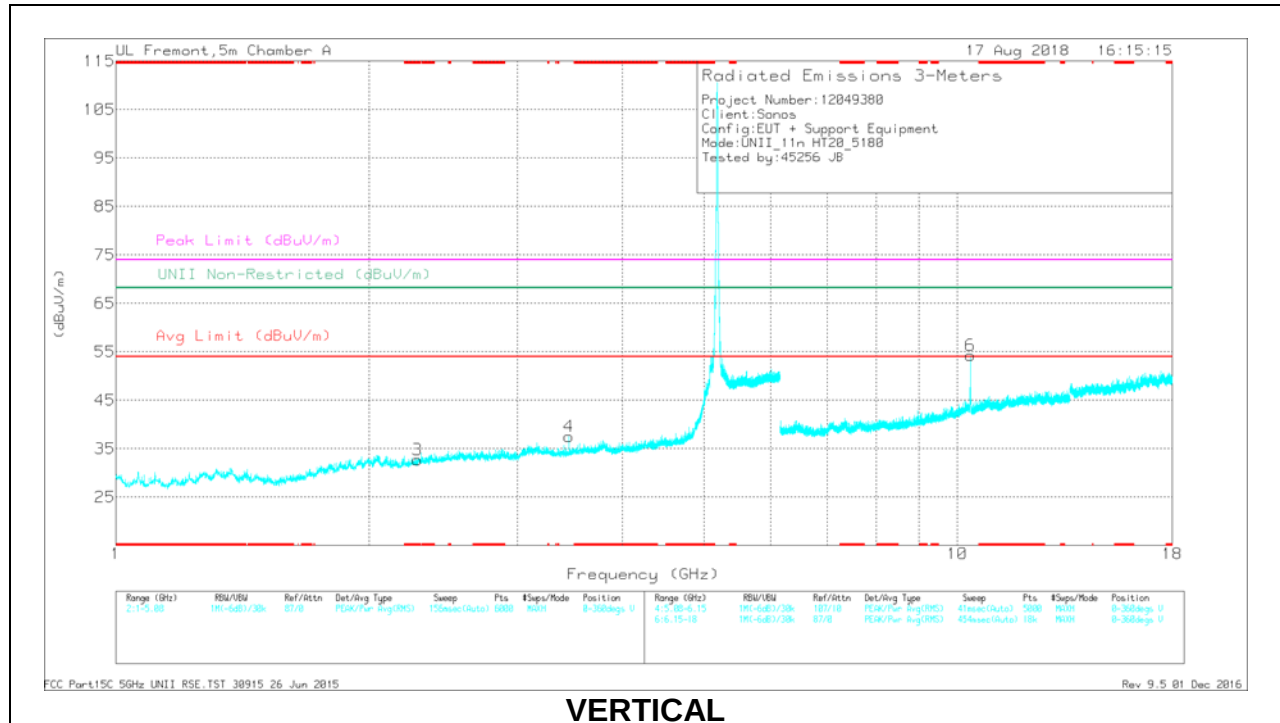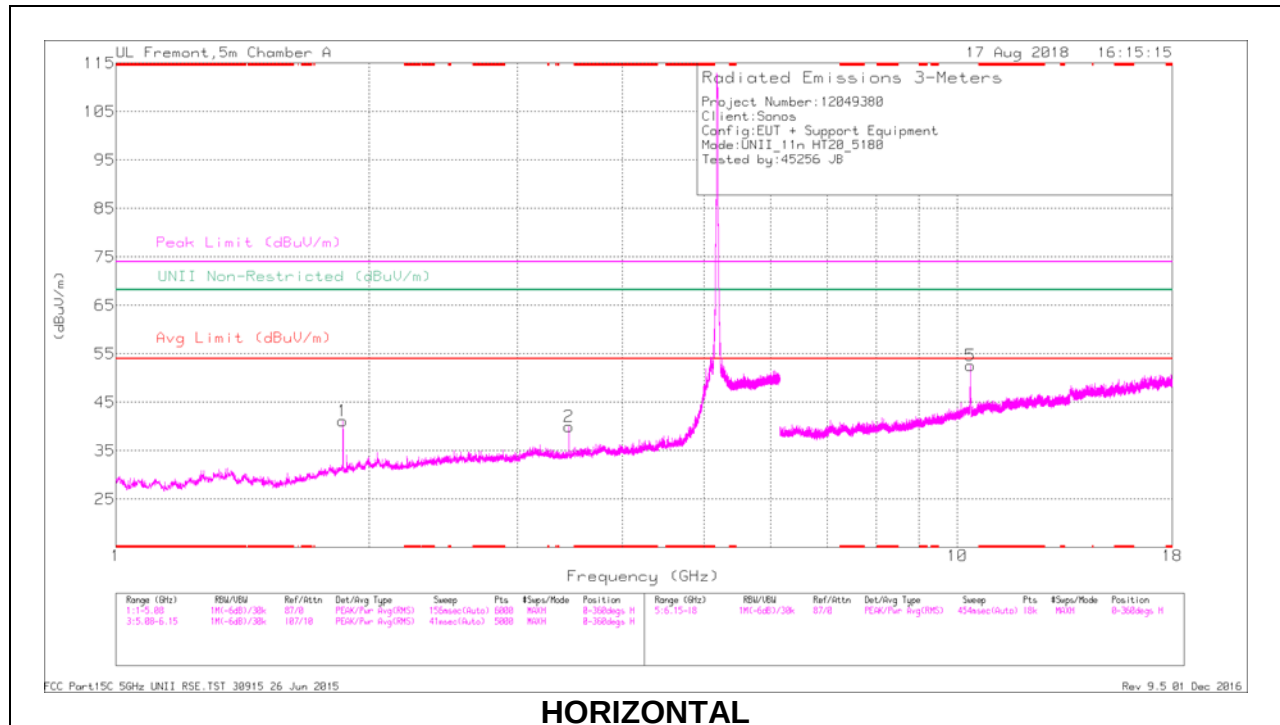

Trace Markers

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	AmplChlFtrrPad (dB)	DC Corr (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non- Restricted (dBuV/m)	PK Margin (dB)	Acimuth (Degs)	Height (cm)	Polarity
3	* 2.283	31.75	PK	31.5	-30.5	0	32.75	-	-	74	-41.25	-	-	0-360	101	V
1	1.861	41.77	PK	30.9	-31.5	0	41.17	-	-	-	-	68.2	-27.03	0-360	101	H
2	3.453	35.93	PK	32.7	-28.7	0	39.93	-	-	-	-	68.2	-28.27	0-360	199	H
4	3.453	33.58	PK	32.7	-28.7	0	37.58	-	-	-	-	68.2	-30.62	0-360	101	V
5	10.36	34.56	PK	37.5	-19.5	0	52.56	-	-	-	-	68.2	-15.64	0-360	101	H
6	10.36	36.28	PK	37.5	-19.5	0	54.28	-	-	-	-	68.2	-13.92	0-360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

Radiated Emissions



Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	AmplChlFtrrPad (dB)	DC Corr (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Acimuth (Degs)	Height (cm)	Polarity
* 2.283	38.7	PK-U	31.5	-30.5	0	39.7	-	-	74	-34.3	-	-	118	393	V
* 2.282	26.48	ADR	31.5	-30.5	.46	27.94	54	-26.06	-	-	-	-	118	393	V
1.861	39.96	PK-U	30.9	-31.5	0	39.36	-	-	-	-	68.2	-29.84	176	175	H
3.453	40.99	PK-U	32.7	-28.7	0	44.99	-	-	-	-	68.2	-23.21	30	238	H
3.453	41.16	PK-U	32.7	-28.7	0	45.16	-	-	-	-	68.2	-23.04	332	130	V
10.36	40.4	PK-U	37.5	-19.5	0	58.4	-	-	-	-	68.2	-9.8	37	111	H
10.36	42.41	PK-U	37.5	-19.5	0	60.41	-	-	-	-	68.2	-7.79	307	109	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

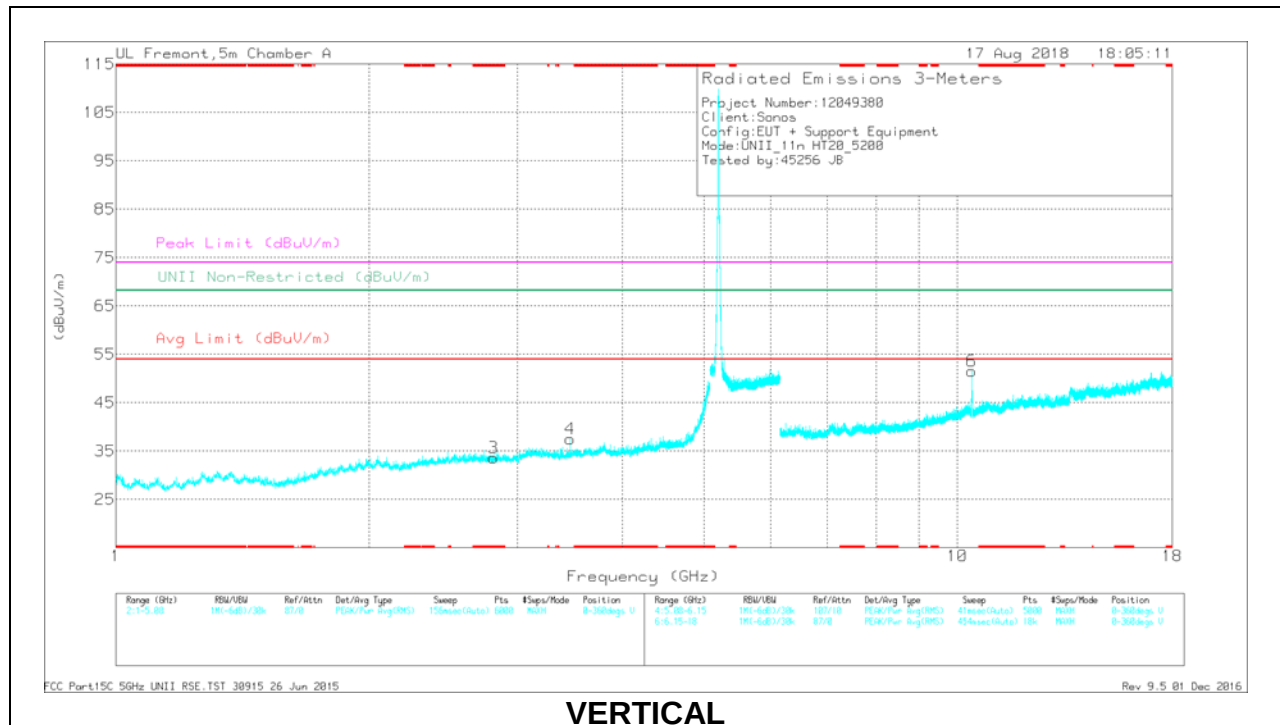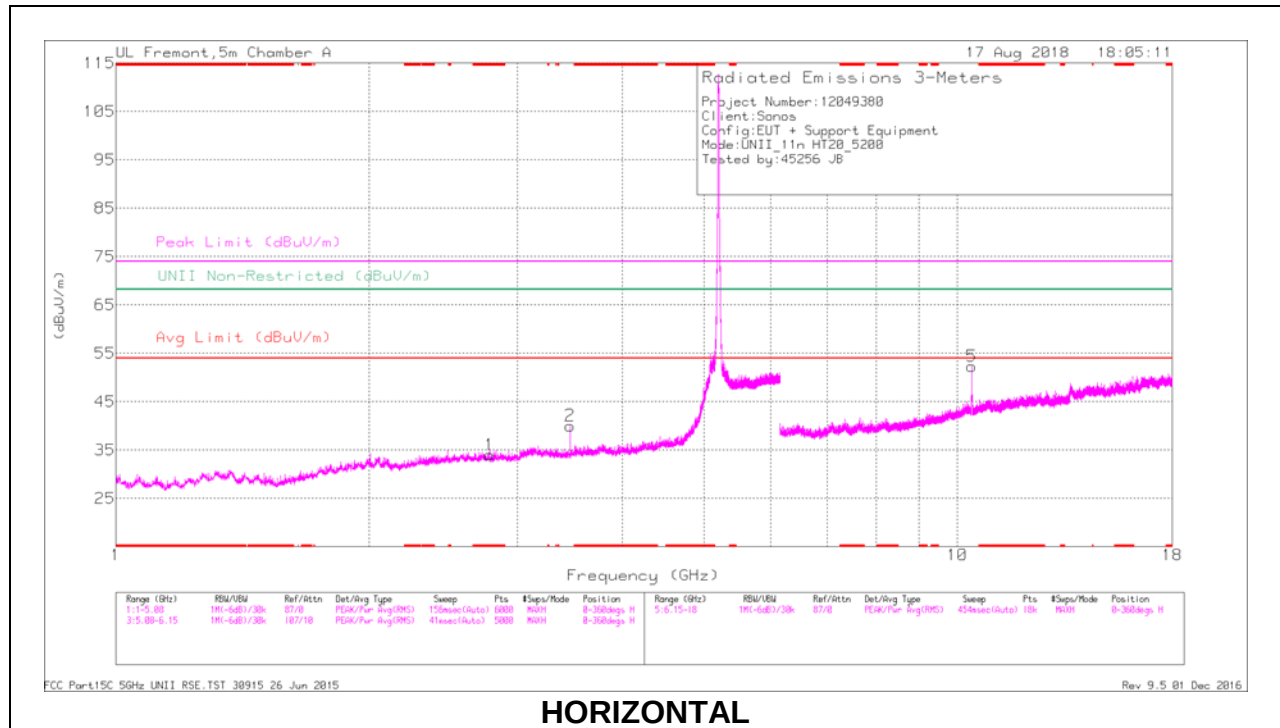

Trace Markers

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	AmplChlFtrrPad (dB)	DC Corr (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non- Restricted (dBuV/m)	PK Margin (dB)	Acimuth (Degs)	Height (cm)	Polarity
1	* 2.783	31.44	Pk	32.3	-29.7	0	34.04	-	-	74	-39.96	-	-	0-360	199	H
3	* 2.809	31.07	Pk	32.2	-29.6	0	33.67	-	-	74	-40.33	-	-	0-360	200	V
2	3.467	35.85	Pk	32.7	-28.5	0	40.05	-	-	-	-	68.2	-28.15	0-360	199	H
4	3.467	33.28	Pk	32.7	-28.5	0	37.48	-	-	-	-	68.2	-30.72	0-360	101	V
5	10.4	34.38	Pk	37.6	-19.7	0	52.28	-	-	-	-	68.2	-15.92	0-360	199	H
6	10.4	33.69	Pk	37.6	-19.7	0	51.59	-	-	-	-	68.2	-16.61	0-360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

Radiated Emissions



Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	AmplChlFtrrPad (dB)	DC Corr (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Acimuth (Degs)	Height (cm)	Polarity
* 2.784	38.51	PK-U	32.3	-29.7	0	41.11	-	-	74	-32.89	-	-	321	195	H
* 2.782	26.2	ADR	32.3	-29.7	.46	29.26	54	-24.74	-	-	-	-	321	195	H
* 2.809	37.8	PK-U	32.2	-29.6	0	40.4	-	-	74	-33.6	-	-	111	299	V
* 2.809	25.89	ADR	32.2	-29.6	.46	28.95	54	-25.05	-	-	-	-	111	298	V
3.467	41.01	PK-U	32.7	-28.5	0	45.21	-	-	-	-	68.2	-22.99	322	197	H
3.467	40.72	PK-U	32.7	-28.5	0	44.92	-	-	-	-	68.2	-23.28	331	137	V
10.4	42	PK-U	37.6	-19.7	0	59.9	-	-	-	-	68.2	-8.3	263	302	H
10.4	41.42	PK-U	37.6	-19.7	0	59.32	-	-	-	-	68.2	-8.88	306	310	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

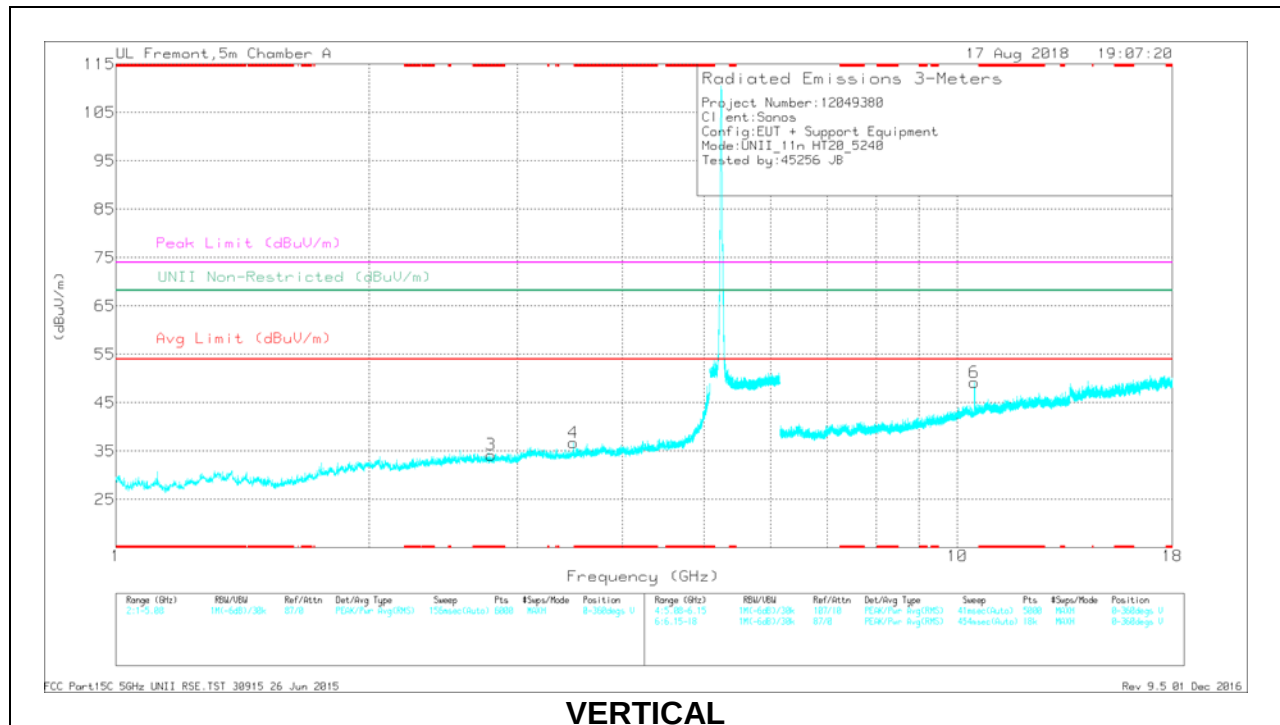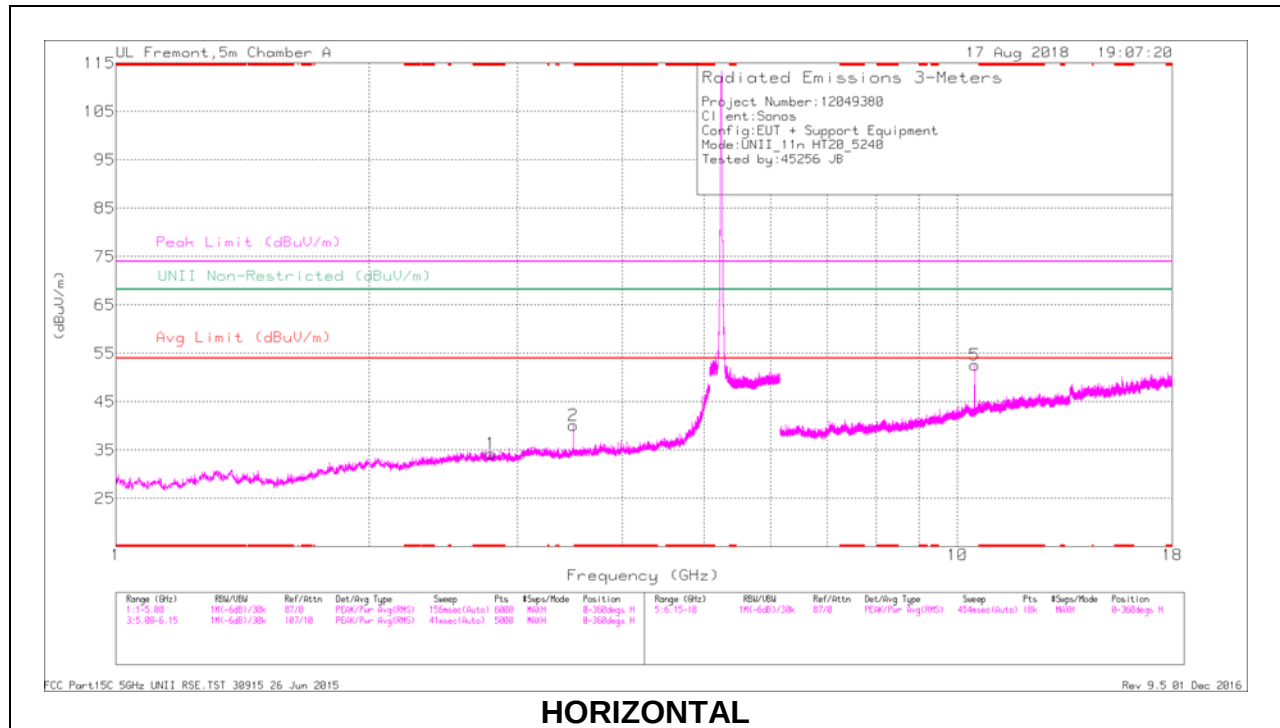

RADIATED EMISSIONS

Trace Markers

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	AmpCalFtrrPad (dB)	DC Corr (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Unli Non- Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.789	31.71	Pk	32.2	-29.6	0	34.31	-	-	74	-39.69	-	-	0-360	101	H
3	* 2.789	31.61	Pk	32.2	-29.6	0	34.21	-	-	74	-39.79	-	-	0-360	200	V
2	3.493	35.73	Pk	32.8	-28.4	0	40.13	-	-	-	-	68.2	-28.07	0-360	199	H
4	3.493	32.31	Pk	32.8	-28.4	0	36.71	-	-	-	-	68.2	-31.49	0-360	101	V
6	10.477	31.25	Pk	37.6	-19.7	0	49.15	-	-	-	-	68.2	-19.05	0-360	200	V
5	10.479	34.56	Pk	37.6	-19.6	0	52.56	-	-	-	-	68.2	-15.64	0-360	199	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector

Radiated Emissions

Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	AmpCalFtrrPad (dB)	DC Corr (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Unli Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.789	37.92	PK-U	32.2	-29.6	0	40.52	-	-	74	-33.48	-	-	72	398	H
* 2.787	25.84	ADR	32.2	-29.6	.46	28.9	54	-25.1	-	-	-	-	72	398	H
* 2.789	38.17	PK-U	32.2	-29.6	0	40.77	-	-	74	-33.23	-	-	249	301	V
* 2.789	25.89	ADR	32.2	-29.6	.46	28.95	54	-25.05	-	-	-	-	249	301	V
3.493	41.45	PK-U	32.8	-28.4	0	45.85	-	-	-	-	68.2	-22.35	320	180	H
3.493	40.46	PK-U	32.8	-28.4	0	44.86	-	-	-	-	68.2	-23.34	330	150	V
10.478	36.71	PK-U	37.6	-19.7	0	54.61	-	-	-	-	68.2	-13.59	355	243	V
10.48	40.11	PK-U	37.6	-19.6	0	56.11	-	-	-	-	68.2	-10.09	14	189	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK-U - U-NII: Maximum Peak
ADR - U-NII AD primary method, RMS average