



ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR SUPERREGENERATIVE RECEIVER

Test report file number : E048R-009

Applicant : SEOBY ELECTRONICS CO., LTD.

Address : 38-2 Anyang 2-Dong, Manan-Gu, Anayang City Gyeonggi-Do Korea

Manufacturer : SEOBY ELECTRONICS CO., LTD.

Address : 38-2 Anyang 2-Dong, Manan-Gu, Anayang City Gyeonggi-Do Korea

Type of Equipment : Remote Control Extender

FCC ID : SCBRCV01

Basic Model Name : UFO-1000

Multiple Model Name : RCV-1000

Serial number : N/A

Total page of Report : 11 pages (including this page)

Date of Incoming : June 09, 2004

Date of issuing : August 03, 2004

SUMMARY

The equipment complies with the regulation; **FCC PART 15 SUBPART B §15.101**


This test report contains only the result of a single test of the sample supplied for the examination.

It is not a general valid assessment of the features of the respective products of the mass-production.

Prepared by:


G. W. Lee/ Chief Engineer
EMC Div.
ONETECH Corp.

Reviewed by:


Y. K. Kwon/ Director
EMC Div.
ONETECH Corp.



CONTENTS

	Page
1. VERIFICATION OF COMPLIANCE	3
2. GENERAL INFORMATION.....	4
2.1 PRODUCT DESCRIPTION.....	4
2.2 RELATED SUBMITTAL(S) / GRANT(S)	4
2.3 TEST SYSTEM DETAILS	5
2.4 TEST METHODOLOGY	5
2.5 TEST FACILITY	5
3. SYSTEM TEST CONFIGURATION.....	5
3.1 JUSTIFICATION	5
3.2 EUT EXERCISE SOFTWARE.....	5
3.3 EQUIPMENT MODIFICATIONS	5
3.4 CONFIGURATION OF TEST SYSTEM	6
4. PRELIMINARY TEST	6
4.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	6
4.2 RADIATED EMISSIONS TESTS.....	6
5. FINAL RESULT OF MEASUREMENT	7
5.1 CONDUCTED EMISSION TEST	7
5.2 RADIATED EMISSION TEST	9
6. FIELD STRENGTH CALCULATION	10
7. LIST OF TEST EQUIPMENT.....	11

**1. VERIFICATION OF COMPLIANCE**

APPLICANT : SEOBY ELECTRONICS CO., LTD.
ADDRESS : 38-2 Anyang 2-Dong, Manan-Gu, Anayang City Gyeonggi-Do Korea
CONTACT PERSON : Gab-Ju Jung / General Manager
TELEPHONE NO : 82-31-474-8001
FCC ID : SCBRCV01
MODEL NO/NAME : UFO-1000
SERIAL NUMBER : N/A
DATE : August 03, 2004

DEVICE TYPE	UNINTENTIONAL RADIATOR
E.U.T. DESCRIPTION	Remote Control Extender -SUPERREGENERATIVE RECEIVER
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	ANSI C63.4/2001
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 §15.101
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	No
FINAL TEST WAS CONDUCTED ON	3 METER OPEN AREA TEST SITE

- This device has shown compliance with the conducted emissions limits in 15.107 adopted under FCC 02-107 (ET Docket 98-80). The device may be marketed after July 11, 2005 and is not affected by the 15.37(j) transition provisions.
- The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.



2. GENERAL INFORMATION

2.1 Product Description

The Seoby Electronics Co., Ltd., Model UFO-1000 (referred to as the EUT in this report) is a receiver that is built-in Telescopic antenna. The EUT catch RF signal from a RF remote controller and decode IR signal from RF signal and then transmit IR signal through LED to home appliance. The product specification described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	Plastic
RECEIVING FREQUENCY	433.92 MHz
SENSITIVITY	Min -107dBm
IR TRANSMITTING FREQUENCY	38kHz / 56kHz
REFERENCE DATA PROTOCOL	NEC
DATA RATES	2500 kbps (Max.)
LIST OF EACH OSC. OR CRY. FREQ.(FREQ.>=1MHz)	433.92 MHz Resonator
NUMBER OF LAYERS	2 LAYERS
EXTERNAL CONNECTOR	DC Input Jack
RATED SUPPLY VOLTAGE	DC 12V, 200mA

Model Differences:

-. No other model differences have been mentioned.

2.2 Related Submittal(s) / Grant(s)

Original submittal only.



2.3 Test System Details

The EUT was tested with the following all equipment used in the tested systems are:

Model	Manufacturer	FCC ID	Description	Connected to
UFO-1000	SEOBY ELECTRONICS CO., LTD.	SCBRCV01	RECEIVER	AC/DC Adapter
Thomas	ICX International	O5JUSE000001	Remote Controller	N/A
YU120020DI	YEE FU Electronic Enterprise	N/A	AC/DC Adapter	EUT
8657A	HP	N/A	Signal Generator	N/A

2.4 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4/2001. Radiated testing was performed at a distance of 3 meters from EUT to the antenna.

2.5 Test Facility

The open area test site and conducted measurement facilities are located on at 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Kun, Kyunggi-Do 464-080 Korea. Description details of test facilities were submitted to the Commission on October 02, 2002. (Registration Number: 529838)

3. SYSTEM TEST CONFIGURATION

3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
MAIN BOARD	SEOBY ELECTRONICS CO., LTD.	FR-4	N/A

3.2 EUT exercise Software

Set the signal generator to transmit at 433.92MHz and then the EUT receives the signal.

Used battery for the EUT was fully charged.

To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

3.3 Equipment Modifications

None



3.4 Configuration of Test System

Line Conducted Emission Test:

The EUT was connected to USB port of PC and the power line of PC was connected to LISN. All supporting equipments were connected to another LISN. Using the procedure in ANSI C63.4/1992 7.2.3 to determine the worse operating conditions performed preliminary Power line Conducted Emission test.

Radiated Emission Test:

Preliminary radiated emissions tests were conducted using the procedure in ANSI C63.4/2001, 8.3.1.1 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meters open area test site.

Coherent Test:

During Radiated Emission Tests, H.P. signal generator model no: 8657A was used to radiate an unmodulated CW signal to EUT at 433.92 MHz in order to cohere the individual components of the characteristic broadband emissions from EUT.

Antenna Power Conduction Test:

This equipment was only with a permanently attached antenna, so the radiated emission measurement was performed with the antenna attached.

4. PRELIMINARY TEST

4.1 AC Power line Conducted Emissions Tests

During Preliminary Tests, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
RX Mode	X

4.2 Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
RX mode	X



5. FINAL RESULT OF MEASUREMENT

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level.

5.1 Conducted Emission Test

Humidity Level : 45 %

Temperature: 23 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.107

Type of Test : CLASS B

Result : PASSED BY -17.50 dB at 0.38 MHz at Peak mode

EUT : USB Multi Card Reader

Date: July 17, 2004

Operating Condition : Data were continuously read and written from the EUT to a personal computer.

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)

Frequency (MHz)	Line	Quasi-Peak (dBuV)			Margin (dB)	Average (dBuV)		Margin (dB)
		Emission Level	Detector Mode	Limits		Emission level	Limits	
0.16	N	38.35	P	65.73	-27.38	-	-	-
0.22	N	37.66	P	62.82	-25.16	-	-	-
0.36	N	40.80	P	58.73	-17.93	-	-	-
0.38	N	40.78	P	58.28	-17.50	-	-	-
0.76	N	28.15	P	56.00	-27.85	-	-	-


Line Conducted Emission Tabulated Data

Remark : "H": Hot Line, "N": Neutral line, "P": Peak detector


Average data was not recorded, because Peak values were under the average limit.

기홍

Tested by: Gi-Hong, Nam / Test Engineer

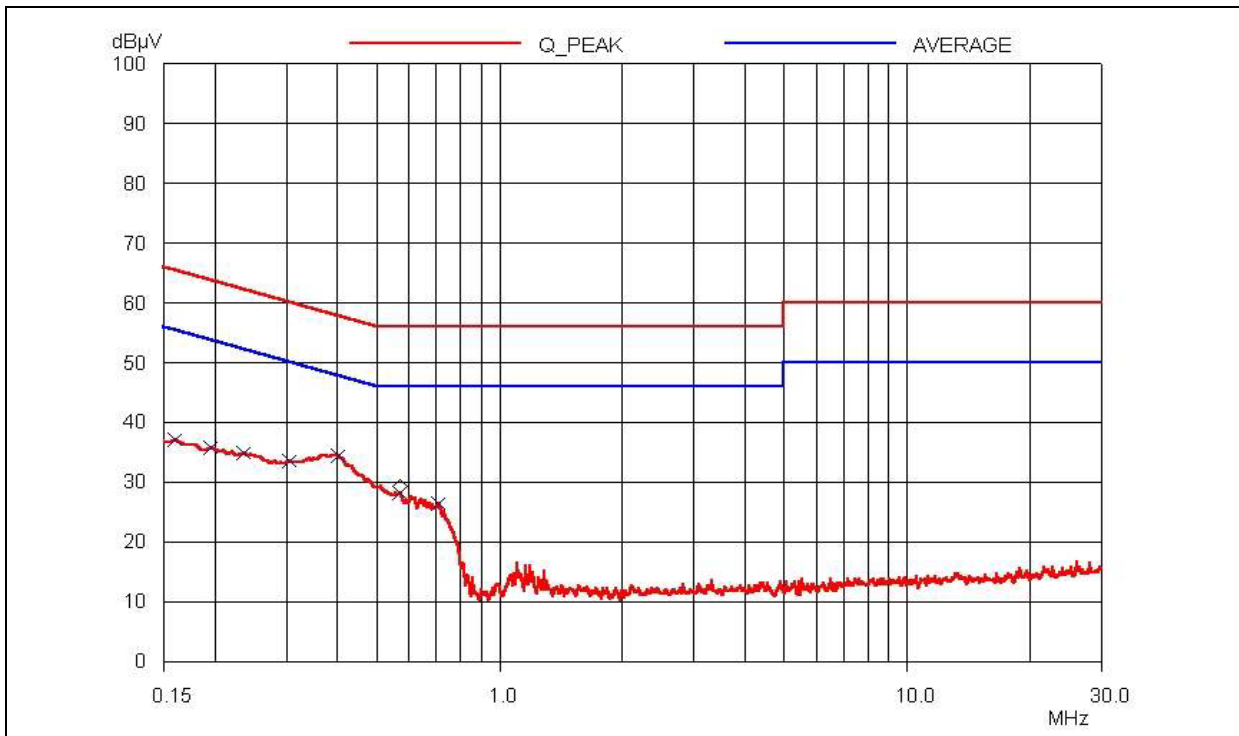

HOT LINE

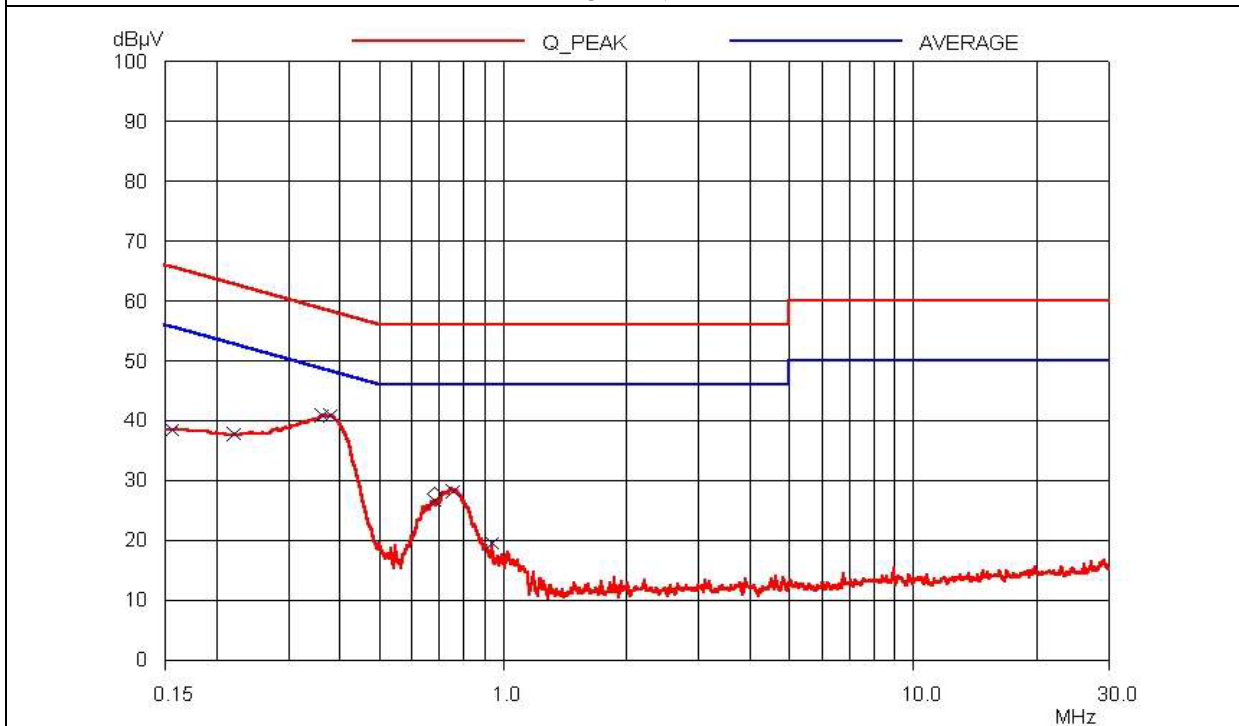

NEUTRAL LINE



5.2 Radiated Emission Test

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level : 41 % Temperature : 27 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.109
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)
 Type of Test : Unintentional Radiator
 Result : PASSED BY -11.90 dB at 233.50 MHz

EUT : Remote Control Extender Date: August 02, 2004
 Operating Condition : RX mode
 Distance : 3 Meter

Radiated Emission		Ant	Correction Factors		Total	FCC LIMIT	
Freq. (MHz)	Amp. (dBuV)	Pol.	Antenna (dB/m)	Cable Loss (dB)	Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
220.90	10.08	V	16.72	2.14	28.94	46.02	-17.08
233.50	14.90	H	16.99	2.23	34.12	46.02	-11.90
270.32	13.00	H	17.97	2.48	33.45	46.02	-12.57
348.81	14.60	H	14.13	2.67	31.40	46.02	-14.62
440.87	12.90	H	16.20	3.11	32.21	46.02	-13.81
501.92	10.91	H	17.20	3.33	31.44	46.02	-14.58
Other frequencies are more than 30dB below the limit up to 2GHz.							

Radiated Emission Tabulated Data

기홍

Tested by: Ki-Hong, Nam / Test Engineer



6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dBuV)

+ Cable Loss (dB)

+ Antenna Factor (Loss) (dB/meter)

= Corrected Reading (dBuV/meter)

- Specification Limit (dBuV/meter)

= dB Relative to Spec (+/- dB)

**7. LIST OF TEST EQUIPMENT**

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUE CAL	USE
1.	Test receiver	R/S	ESVS 10	827864/005	NOV/03	12MONTH	■
2.	Test receiver	R/S	ESHS10	834467/007	APR/04	12MONTH	
3.	Spectrum analyzer	HP	8567A	3021A00773	JUL/04	12MONTH	■
4.	RF preselector	HP	85685A	3107A01268	JUL/04	12MONTH	■
5.	Quasi-Peak Adapter	HP	85650A	3107A01550	JUL/04	12MONTH	■
6.	Biconical antenna	EMCO	3104C	9109-4441 9109-4443 9109-4444	JUL/04	12MONTH	■
7.	Log Periodic antenna	EMCO	3146	9109-3213 9109-3214 9109-3217	JUL/04	12MONTH	■
8.	Horn Antenna	SCHWARZBECK	BBHA9120D	BBHA9120D294	JUN/04	12MONTH	■
9.	LISN	EMCO	3825/2	9109-1867 9109-1869	AUG/03	12MONTH	
10.	RF Amplifier	HP	8347F	3307A01354	JUN/04	N/A	
11.	Spectrum Analyzer	HP	8564E	3650A00756	JUL/04	12MONTH	■
12.	Spectrum Analyzer	HP	8566B	3407A08547	AUG/03	12MONTH	
13.	Plotter	HP	7475A	30052 22986	N/A	N/A	
14.	Position Controller	HD	HD100	100/788	N/A	N/A	■
15.	Turn Table	HD	DS420S	N/A	N/A	N/A	■
16.	Antenna Master	HD	HD240	N/A	N/A	N/A	■
17.	Isolation Transformer	Digitek Power	DPT	DPF-22027	N/A	N/A	■
18.	Isolation Transformer	Digitek Power	DPT	DPF-22028	N/A	N/A	■
19.	Frequency Converter	Digitek Power	VFS/DEFC	N/A	N/A	N/A	■