

Project No.	24E11050-1a
Quotation	Q24-1904-2
Prepared For	Nordic ID Oy
Company Address	Joensuunkatu 7E Fi-24100 Salo, Finland
Contact	Rauno Nikkilä
Contact Email	rauno.nikkila@nordicid.com
Contact Phone	+358 (0)50 5689803
Prepared By	Compliance Engineering Ireland
Test Lab Address	Clonross Lane, Derrockstown, Dunshaughlin, Co. Meath, Ireland
Tested By	Joy Dalayap
Test Report By	Michael Kirby
FCC Test Firm Designation	IE0002
ISED Cab Identifier	IE0001
Date	19 th Jun 2024
EUT Description	RFID module
FCC ID	SCC NUR30W5
IC ID	5137A-NUR30W5
Authorised by	Paul Reilly
Authorised Signature:	

TEST SUMMARY

The equipment complies with the requirements according to the following standards.

15-247 Section	RSS-247 Section	TEST PARAMETERS	Test Result
15.247(a)	5.1(a)	20dB bandwidth of hopping Channel	Pass
15.247(a)	5.1(b)	Hopping Frequency Separation	Pass
1.247(a)	5.1(c)	Number of Hopping Channels	Pass
15.247(a)	5.1(c)	Average Time of Occupancy	Pass
15.247(b)	5.4	Output power	Pass
15.247(d)	5.5	Conducted Spurious Emissions	Pass
	RSS Gen 6.7	99% bandwidth	Pass
15.205 15.209	RSS Gen 8.9 and 8.10	Radiated Spurious Emissions for restricted bands	Pass

RSS 247 Issue 3 Aug 2023
RSS-Gen Issue 5 Apr 2018 + Amd1 Mar 2019 + Amd2 Feb 2021

This report shall not be reproduced except in full, without the written approval of
Compliance Engineering Ireland Ltd.

Contents

1	EUT DESCRIPTION	4
1.1	EUT OPERATION.....	5
1.2	MODIFICATIONS.....	5
1.3	DATE OF TEST.....	5
1.4	DESCRIPTION OF TEST MODES	5
1.5	DESCRIPTION OF TEST METHODS	5
2	EMISSIONS MEASUREMENTS	6
2.1	CONDUCTED EMISSIONS MEASUREMENTS	6
2.2	RADIATED EMISSIONS MEASUREMENTS	6
3	CONDUCTED MEASUREMENTS ON THE ANTENNA PORT.....	7
3.1	BANDWIDTH	7
3.1.1	<i>20dB bandwidth</i>	7
3.1.2	<i>99% bandwidth</i>	8
3.2	OUTPUT POWER CONDUCTED	10
3.3	FREQUENCY HOPPING CHARACTERISTICS	11
3.3.1	<i>Frequency hopping range number of hopping Channels</i>	11
3.3.2	<i>Frequency hopping channel separation</i>	12
3.3.3	<i>Frequency hopping average time of channel occupancy</i>	13
3.4	CONDUCTED SPURIOUS EMISSIONS	15
3.4.1	<i>Conducted Spurious Emissions (100KHz bandwidth)</i>	15
3.4.2	<i>Conducted Emissions Band Edge</i>	16
4	RADIATED EMISSIONS	17
4.1	RADIATED SPURIOUS EMISSIONS WITH EXTERNAL ANTENNA	17
4.1.1	<i>Radiated Spurious Emission for 902.75MHz</i>	17
4.1.2	<i>Radiated Spurious Emission for 914.75MHz</i>	18
4.1.3	<i>Radiated Spurious Emission for 927.25MHz</i>	19
4.2	OUTPUT POWER RADIATED.....	20
5	LIST OF TEST EQUIPMENT	21
6	MEASUREMENT UNCERTAINTIES	22
APPENDIX A: CONDUCTED MEASUREMENTS SPURIOUS EMISSIONS		23
APPENDIX B: CONDUCTED TESTS FOR BAND EDGES.....		27
APPENDIX C: RADIATED SPURIOUS EMISSIONS WITH EXTERNAL ANTENNA		30
APPENDIX D: BLOCK DIAGRAMS OF TEST SETUP		35
APPENDIX E: EUT ORIENTATION RADIATED EMISSIONS.....		36

1 EUT Description

Type:	RFID module
Type of radio:	Stand-alone
Transmitter Type:	RFID FHSS
Operating Frequency Range(s):	902.75-927.25 MHz
Number of Channels:	50
Channel Separation:	500KHz
PMN	NUR3-0W5
HVIN	NUR3-0W5
FVIN	v15.5
Antenna:	External antenna model 813-S0
External Antenna Gain Max:	4.0dBi
External Antenna Impedance	50ohms
External Antenna Description	Patch Antenna
Test Standards	15.247 RSS-247
Test Methodology:	Measurements performed according to the procedures in ANSI C63.10-2013

The EUT was an RFID module using frequency hopping in the 902-928MHz frequency band.

Software used to control the EUT

Test software (NUR RD tester version 2.0.5.2) from Nordic ID, running on a standard Windows laptop (Lenovo X250) was used control the EUT during test. This application is downloadable from Nordic ID for the purposes of testing the EUT radio interface.

1.1 EUT Operation

Operating Conditions during Test:

The EUT (RFID module) Sample 001 was fitted to a host pcb to allow powering and control of the module.

The same EUT was used for all tests.

The EUT was operated in test mode where the channel and modulation were set via USB connection to the control laptop.

The settings were 501mW for power level and continuous transmit modulated mode.

The host pcb was powered from a bench power supply Kenwood PR36-3 s/n 4100013 for all tests.

Conducted measurements were performed on the EUT with the analyser connected to the external antenna port.

Radiated measurements were also performed with an external antenna fitted Nordic ID Oy, part num NPG00001 SN K240905287 model 813-S0

Environmental conditions

	Temperature	Relative Humidity
Test	°C	%
Radiated Emissions <1GHz	20	43
Radiated Emissions >1GHz	22	48
Conducted Emissions	21	42

1.2 Modifications

No modifications were required in order to pass the test specifications.

1.3 Date of Test

The tests were carried out on 5th 6th 7th 13th Jun 2024.

1.4 Description of Test modes

Channel List

Channel	Freq MHz
Low Ch 0	902.75
Mid Ch 24	914.75
High Ch 49	927.25

1.5 Description of Test methods

Tests were performed manually, and no special test software was used.

Preliminary tests were carried out and this report contains the worst-case results.

2 Emissions Measurements

2.1 Conducted Emissions Measurements

Radio Conducted measurements were carried out on the EUT as per section 1.1 above.

All results were measured as conducted on the antenna port except radiated spurious emissions.

2.2 Radiated Emissions Measurements

The EUT was centred on a motorized turntable, which allows 360-degree rotation. Emissions below 1GHz were measured using an antenna positioned at a distance of 3 metres from the EUT (as measured from the closest point of the EUT). The radiated emissions were maximised by configuring the EUT, by rotating the EUT, and by raising and lowering the antenna from 1 to 4 metres. In this case the resolution bandwidth was 100kHz. A bi-conical antenna was used for frequencies below 300MHz, and a log periodic antenna was used for the 300MHz to 1GHz frequency range

Emissions in the 1GHz-3.6GHz range were measured using a horn antenna located at 3 metres distance from the EUT in a fully anechoic chamber. The radiated emissions were maximised by configuring the EUT and by rotating the EUT and by raising and lowering the antenna from 1 to 4 metres. In this case the resolution bandwidth was 1MHz and video bandwidth was 3MHz. for peak measurements. The Video bandwidth was changed to 10Hz for Average measurements (as per ANSI 63.10 2013 Section 4.1.4.2.3)

Emissions above 3.6GHz were measured using a horn antenna located at 3 metre distance from the EUT in a fully anechoic chamber. The radiated emissions were maximised by configuring the EUT and by rotating the EUT. In this case the resolution bandwidth was 1MHz and video bandwidth was 3MHz. for peak measurements. The Video bandwidth was changed to 10Hz for Average measurements (as per ANSI 63.10 2013 Section 4.1.4.2.3).

3 Conducted Measurements on the Antenna port

3.1 Bandwidth

3.1.1 20dB bandwidth

Requirement FCC 15.247(a) IC RSS-247 5.1a


The bandwidth of a frequency hopping channel is the 20 dB emission bandwidth, measured with the hopping stopped. The maximum 20 dB bandwidth of the hopping channel shall be 500 kHz.

As per Ansi63.10 Section 7.8.7

Test Method

A reference level is established by first using a resolution bandwidth that exceeds the signal bandwidth.

The resolution bandwidth is then reduced to 1% of the estimated emission bandwidth and the video bandwidth is set to 3 times the resolution bandwidth. The markers are now moved to the -20 dB points (from the previously established reference level) on either side of centre frequency

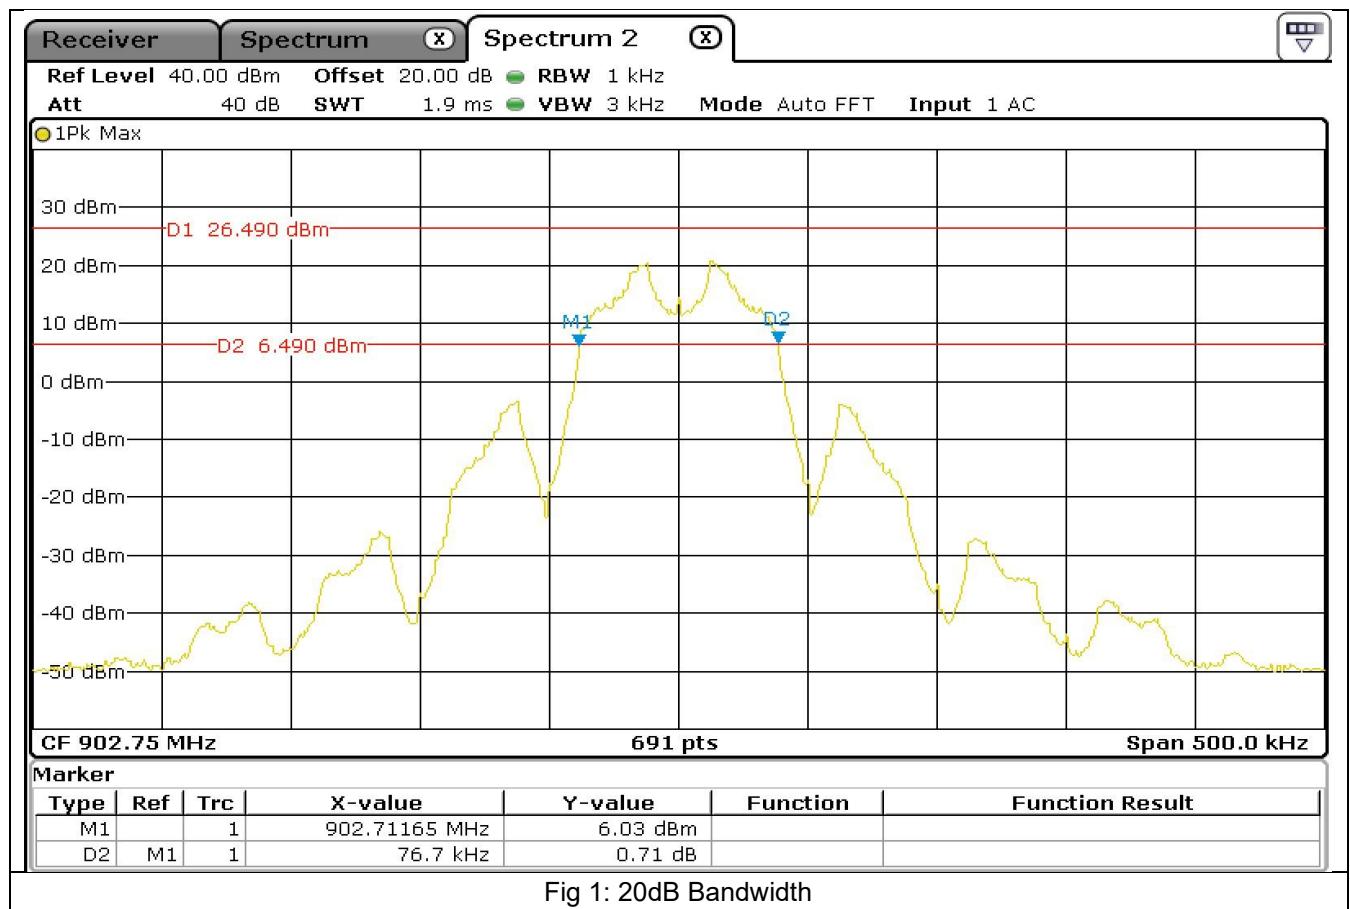

Channel	Frequency	20dB Bandwidth	20dB Bandwidth Limit
	MHz	KHz	KHz
Low	902.75	76.7	500
Mid	914.75	76.7	500
High	927.25	76.7	500

Test Result: Pass

3.1.2 99% bandwidth

Test Method

As per Ansi 63.10 Section 6.9.3

Ansi 63.10 Section 6.9.3 Occupied bandwidth—power bandwidth (99%) measurement procedure


The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

TEST PROCEDURE

The test was performed as a conducted measurement.

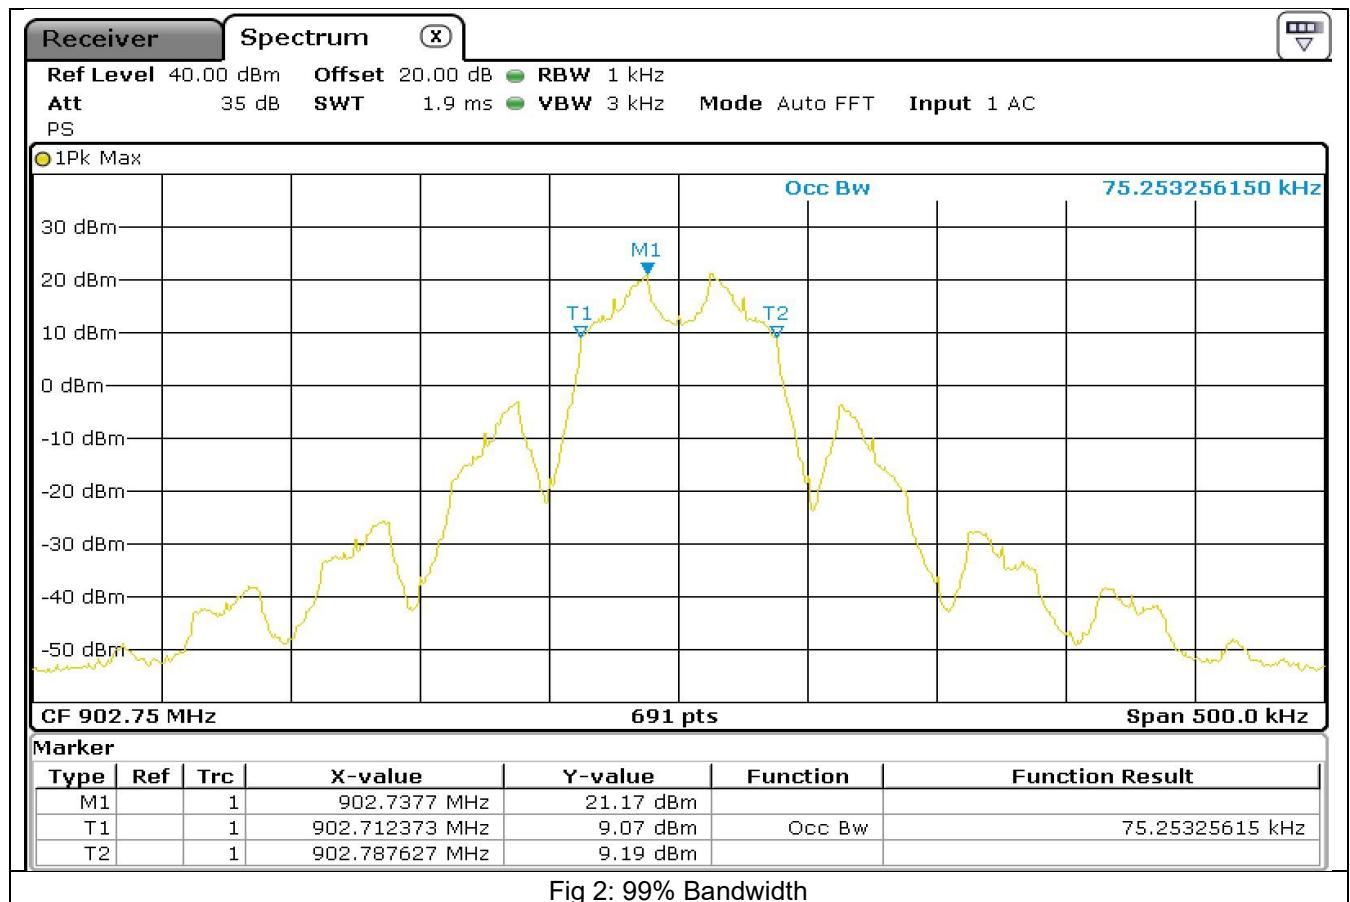


Bandwidth Result

Channel	Frequency	99%
		Bandwidth
	MHz	KHz
Low	902.75	75.253
Mid	914.75	75.253
High	927.25	75.253

Test Result: Pass

3.2 Output power Conducted

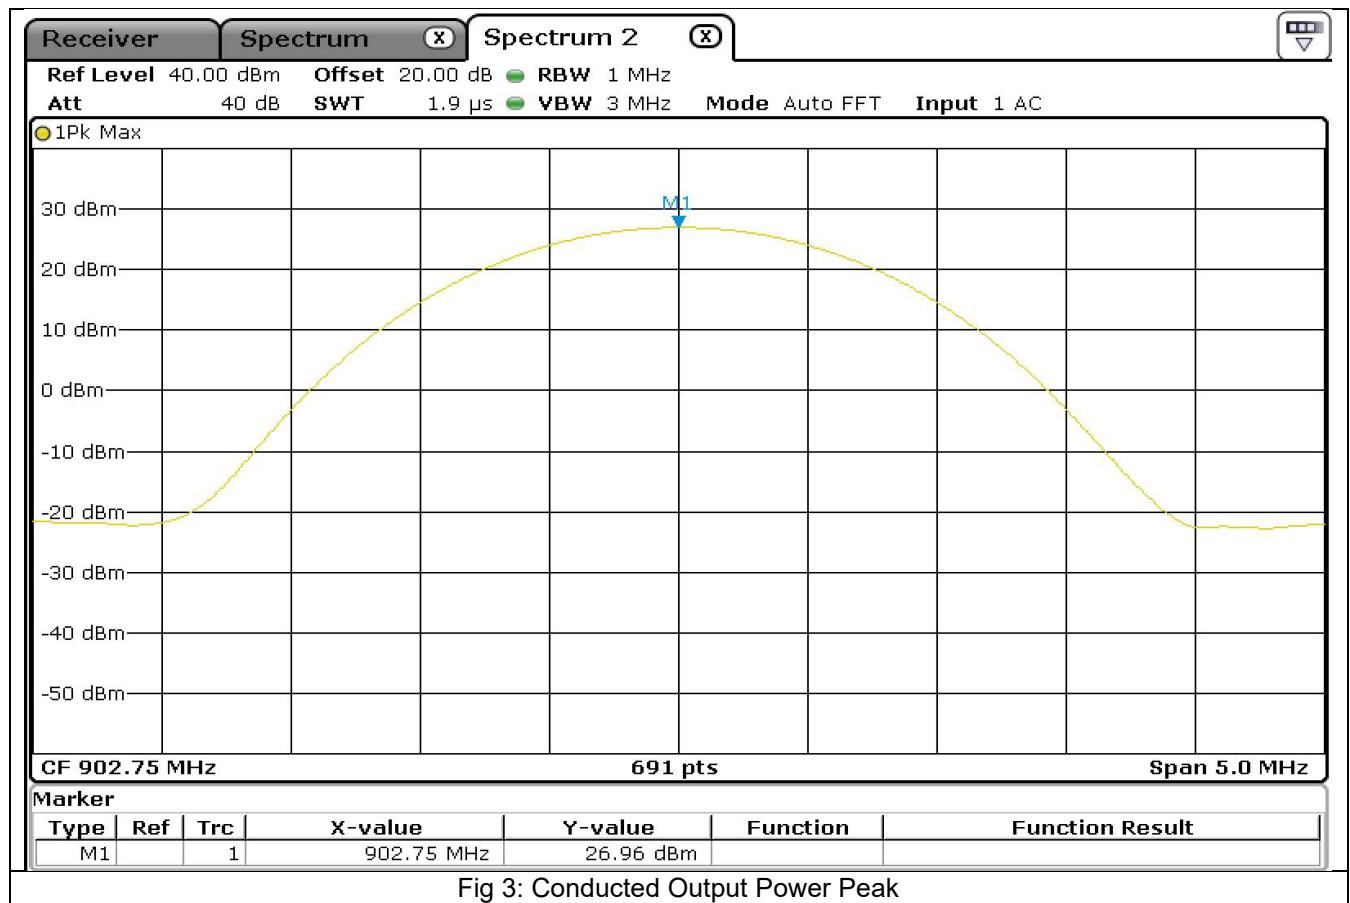

Frequency	Conducted Peak	Limit	Margin
MHz	dBm	dBm	dB
902.75	26.98	30	3.02
914.75	27.2	30	2.8
927.25	26.97	30	3.03

Limit

For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels


Test Result: Pass

3.3 Frequency Hopping Characteristics

Limit

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

3.3.1 Frequency hopping range number of hopping Channels

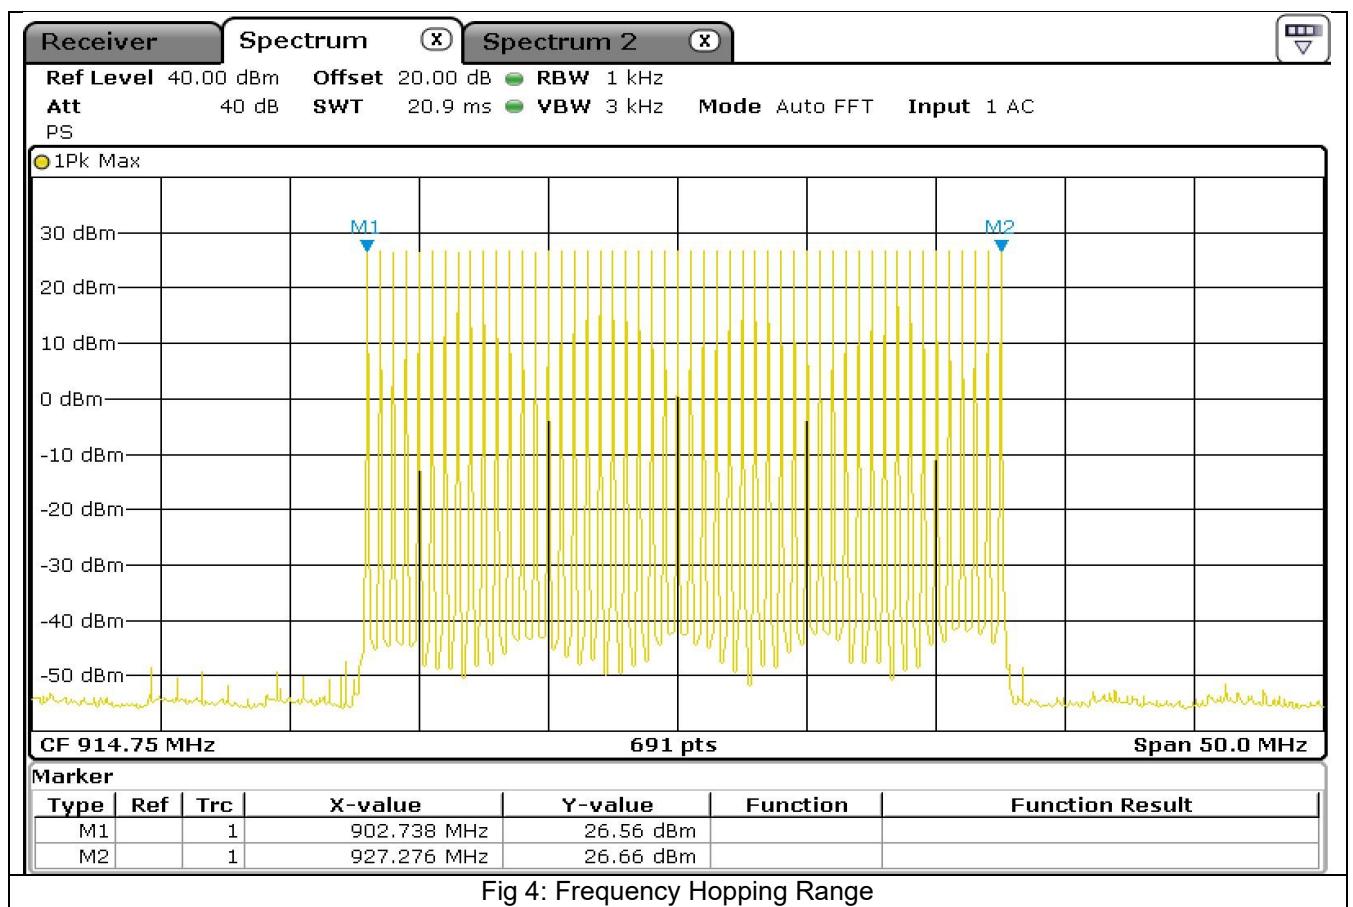


Lowest channel 902.75MHz
Highest channel 927.25MHz

Number of hopping channels = 50

Limit: Min 50 hopping channels if the bandwidth is less than 250KHz.

Test Result: Pass

3.3.2 Frequency hopping channel separation

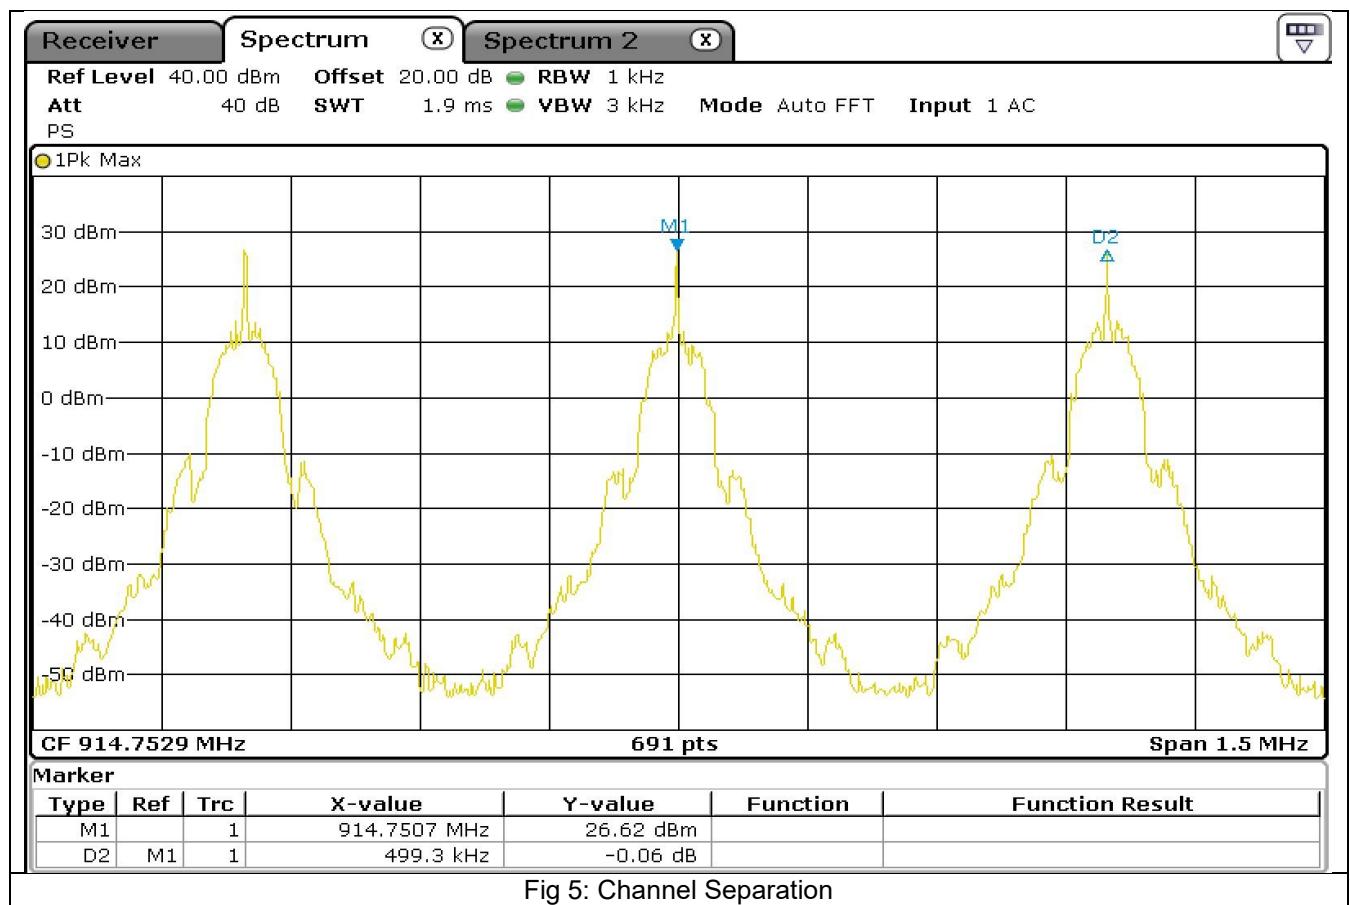

Channel separation = 499.3KHz

3.3.3 Frequency hopping average time of channel occupancy

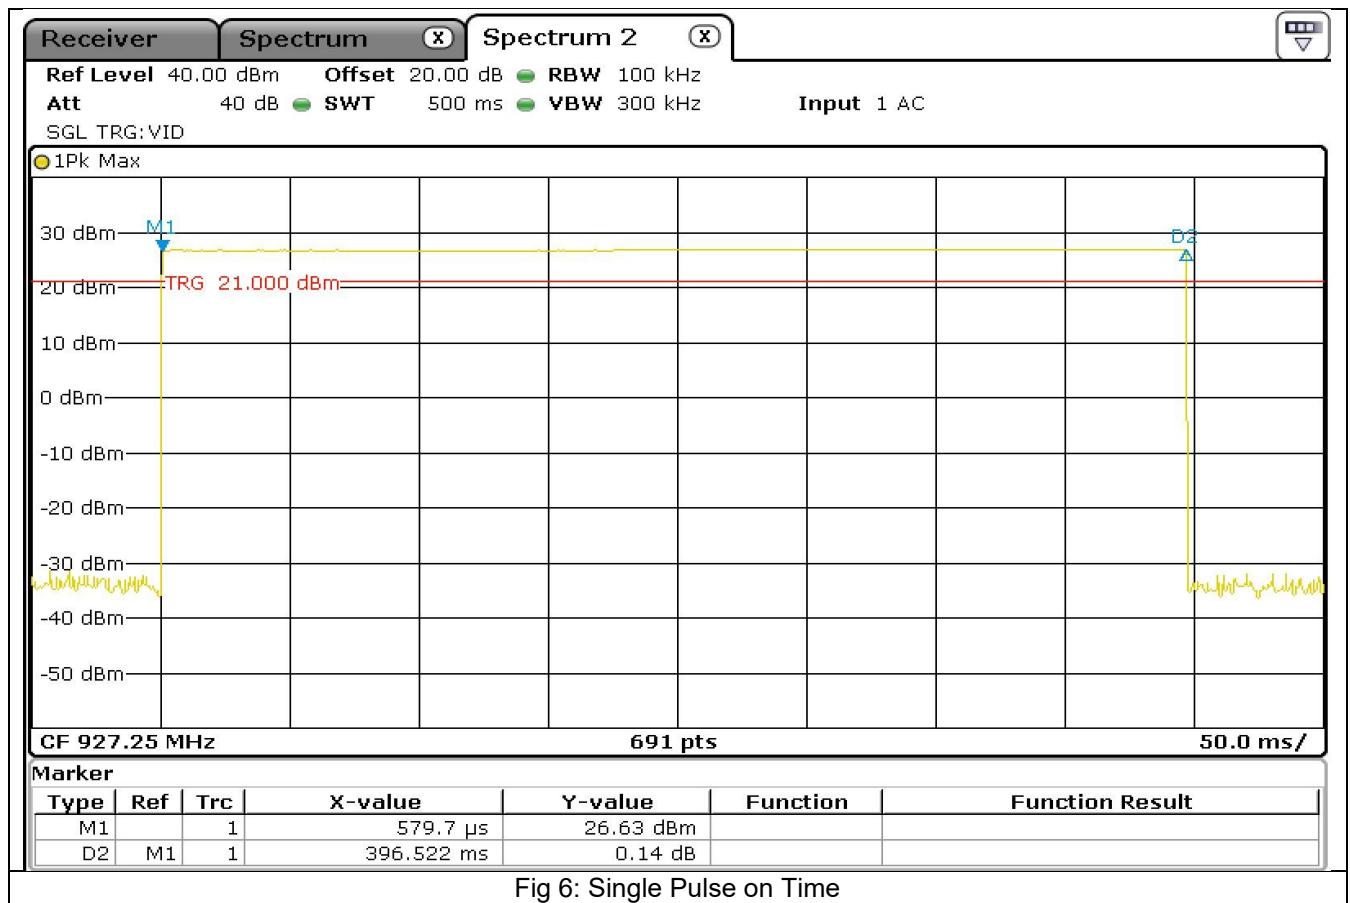


Fig 6: Single Pulse on Time

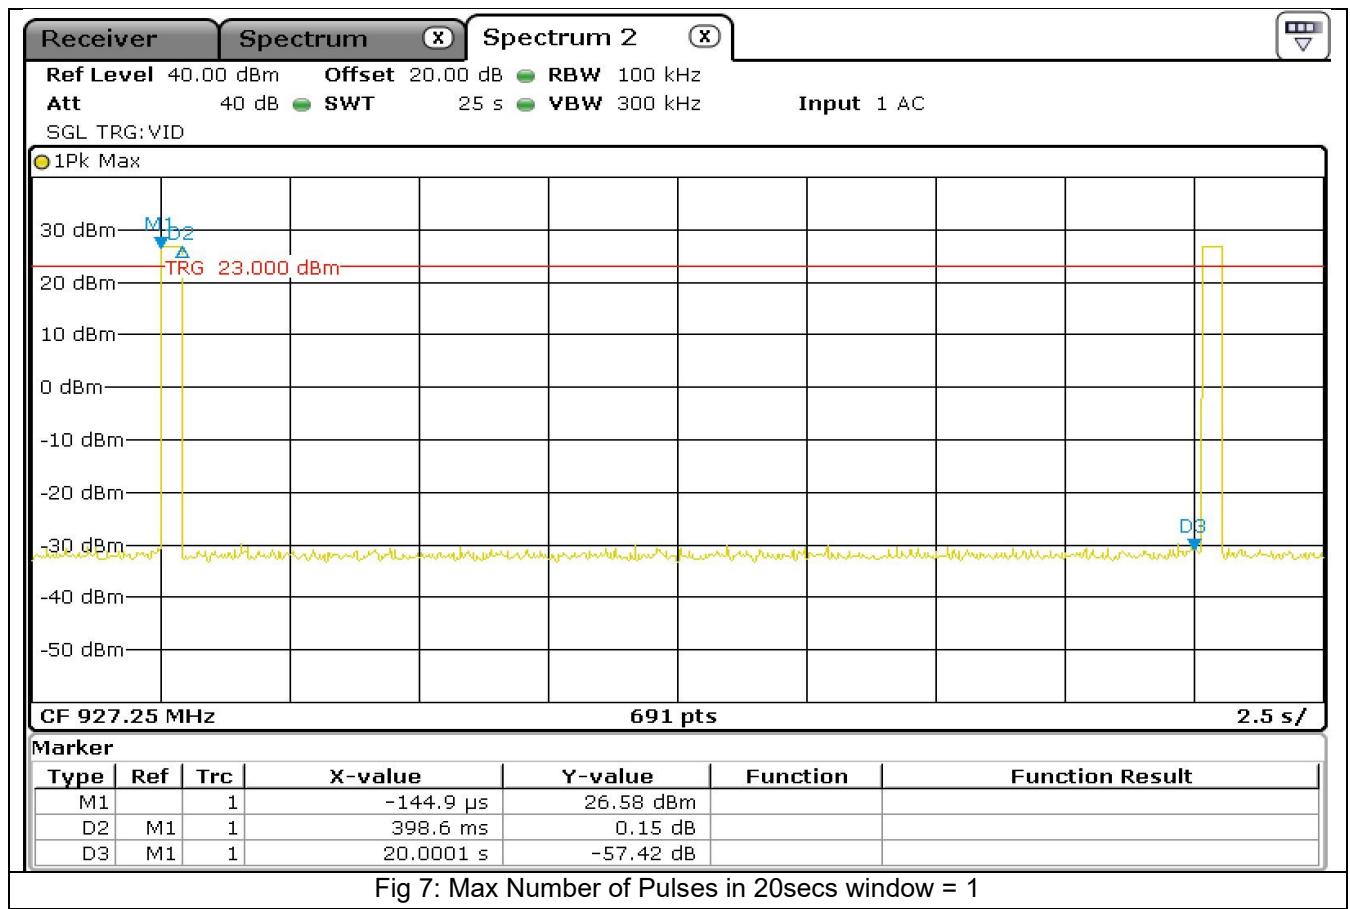


Fig 7: Max Number of Pulses in 20secs window = 1

Calculation

Single pulse on time = 396.522mS

Max Num of pulses in 20sec window = 1

Max on time in 20secs window = $1 * 0.396522$ secs < 0.4 secs limit

Test Result: Pass

3.4 Conducted Spurious Emissions

3.4.1 Conducted Spurious Emissions (100KHz bandwidth)

Frequency	100KHz RBW	dBc Limit Min	Margin	Result
MHz	dBm	dB	dB	P/F
902.75	26.82	20	-	-
1805.5	-39.1	20	45.92	Pass
2708.2	-56.6	20	63.42	Pass
3611	-49.86	20	56.68	Pass

Results for Conducted Emission for Low Channel (902.75MHz)

Frequency	100KHz RBW	dBc Limit Min	Margin	Result
MHz	dBm	dB	dB	P/F
914.75	27.5	20	-	-
1829.5	-38.5	20	46	Pass
2744.2	-57.6	20	65.1	Pass
3659	-47	20	54.5	Pass

Results for Conducted Emission for Middle Channel (914.75MHz)

Frequency	100KHz RBW	dBc Limit Min	Margin	Result
MHz	dBm	dB	dB	P/F
927.25	26.82	20	-	-
1854.5	-37	20	43.82	Pass
2781.7	-57.3	20	64.12	Pass
3709	-47.36	20	54.18	Pass

Results for Conducted Emission for Middle Channel (927.25MHz)

Refer to Appendix A for Scans

Test Result: Pass

3.4.2 Conducted Emissions Band Edge

Refer to Appendix B for Scans

Test Result: Pass

4 Radiated Emissions

4.1 Radiated Spurious Emissions with External Antenna

4.1.1 Radiated Spurious Emission for 902.75MHz

Frequency	Reading Peak	EUT Orientation	Antenna Polarity	Antenna Factor	Preamp Gain	Cable loss	Final Field Strength Peak	Average Limit	Margin for Peak v Average Limit +20dB	Result
GHz	dBuV/m		V/H	dB	dB	dB	dBuV/m	dBuV/m	dB	P/F
2.708	14.6	O1	Vertical	29.1	0	5.1	48.8	54.0	25.2	Pass
3.611	44.6	O1	Vertical	31.7	38.2	5.8	43.9	54.0	30.1	Pass
4.514	43.9	O1	Vertical	32.6	39.1	7.5	44.9	54.0	29.1	Pass
5.417	44.4	O1	Vertical	34.3	39.2	8.2	47.7	54.0	26.3	Pass
8.125	46.2	O1	Vertical	36.7	41.1	10.9	52.7	54.0	21.3	Pass
9.028	43.1	O1	Vertical	37.8	38.9	10.2	52.2	54.0	21.8	Pass
2.708	15.0	O1	Horizontal	29.1	0	5.1	49.2	54.0	24.8	Pass
3.611	44.7	O1	Horizontal	31.7	38.2	5.8	44.0	54.0	30.0	Pass
4.514	44.6	O1	Horizontal	32.6	39.1	7.5	45.6	54.0	28.4	Pass
5.417	44.5	O1	Horizontal	34.3	39.2	8.2	47.8	54.0	26.2	Pass
8.125	45.7	O1	Horizontal	36.7	41.1	10.9	52.2	54.0	21.8	Pass
9.028	43.0	O1	Horizontal	37.8	38.9	10.2	52.1	54.0	21.9	Pass

Final Field Strength Peak (dBuV/m) =Reading Peak (dBuV/m) + Antenna Factor (dB)- Pre-amp Gain (dB) +Cable Loss (dB)
Calculation Example 48.8 = 14.6 + 29.1 - 0 + 5.1

Test Result: Pass

4.1.2 Radiated Spurious Emission for 914.75MHz

Frequency	Reading Peak	EUT Orientation	Antenna Polarity	Antenna Factor	Preamp Gain	Cable loss	Final Field Strength Peak	Average Limit	Margin for Peak v Average Limit +20dB	Result
GHz	dBuV/m		V/H	dB	dB	dB	dBuV/m	dBuV/m	dB	P/F
2.744	15.3	O1	Vertical	29.1	0	5.1	49.5	54.0	24.5	Pass
3.659	44.8	O1	Vertical	31.8	38.3	6	44.3	54.0	29.7	Pass
4.574	43.5	O1	Vertical	32.7	39.7	8.1	44.6	54.0	29.4	Pass
7.318	45.7	O1	Vertical	36.4	40.6	10.1	51.6	54.0	22.4	Pass
8.233	46.3	O1	Vertical	36.8	40.9	11	53.2	54.0	20.8	Pass
9.148	44.7	O1	Vertical	37.8	38.8	10.1	53.8	54.0	20.2	Pass
2.744	15.5	O1	Horizontal	29.1	0	5.1	49.7	54.0	24.3	Pass
3.659	45.9	O1	Horizontal	31.8	38.3	6	45.4	54.0	28.6	Pass
4.574	44.2	O1	Horizontal	32.7	39.7	8.1	45.3	54.0	28.7	Pass
7.318	44.7	O1	Horizontal	36.4	40.6	10.1	50.6	54.0	23.4	Pass
8.233	46.3	O1	Horizontal	36.8	40.9	11	53.2	54.0	20.8	Pass
9.148	44.0	O1	Horizontal	37.8	38.8	10.1	53.1	54.0	20.9	Pass

Final Field Strength Peak (dBuV/m) =Reading Peak (dBuV/m) + Antenna Factor (dB)- Pre-amp Gain (dB) +Cable Loss (dB)
Calculation Example $44.7 = 45.2 + 31.8 - 38.3 + 6$

Test Result: Pass

4.1.3 Radiated Spurious Emission for 927.25MHz

Frequency	Reading Peak	EUT Orientation	Antenna Polarity	Antenna Factor	Preamp Gain	Cable loss	Final Field Strength Peak	Average Limit	Margin for Peak v Average Limit +20dB	Result
GHz	dBuV/m		V/H	dB	dB	dB	dBuV/m	dBuV/m	dB	P/F
2.782	14.6	O1	Vertical	29.3	0	5.3	49.2	54.0	24.8	Pass
3.709	46.2	O1	Vertical	32.1	38.3	6	46.0	54.0	28.0	Pass
4.636	44.2	O1	Vertical	32.6	39.7	8.1	45.2	54.0	28.8	Pass
7.418	45.2	O1	Vertical	36.6	40.8	10.4	51.4	54.0	22.6	Pass
8.345	47.5	O1	Vertical	37.2	40.7	10.9	54.9	54.0	19.1	Pass
2.782	15.3	O1	Vertical	29.3	0	5.3	49.9	54.0	24.1	Pass
3.709	46.6	O1	Horizontal	32.1	38.3	6	46.4	54.0	27.6	Pass
4.636	44.1	O1	Horizontal	32.6	39.7	8.1	45.1	54.0	28.9	Pass
7.418	44.1	O1	Horizontal	36.6	40.8	10.4	50.3	54.0	23.7	Pass
8.345	47.6	O1	Horizontal	37.2	40.7	10.9	55.0	54.0	19.0	Pass

Final Field Strength Peak (dBuV/m) =Reading Peak (dBuV/m) + Antenna Factor (dB)- Pre-amp Gain (dB) +Cable Loss (dB)
Calculation Example $49.2 = 14.6 + 29.3 - 0 + 5.3$

Frequency	Reading Average	EUT Orientation	Antenna Polarity	Antenna Factor	Preamp Gain	Cable loss	Final Field Strength Average	Average Limit	Margin	Result
GHz	dBuV/m		V/H	dB	dB	dB	dBuV/m	dBuV/m	dB	P/F
8.345	40.7	O1	Vertical	37.2	40.7	10.9	48.1	54.0	5.8	Pass
8.345	41.8	O1	Horizontal	37.2	40.7	10.9	49.2	54.0	4.8	Pass

Final Field Strength Average (dBuV/m) =Reading Average (dBuV/m) + Antenna Factor (dB)- Pre-amp Gain (dB) +Cable Loss (dB)
Calculation Example $48.1 = 40.7 + 37.2 - 40.7 + 10.9$

Refer to Appendix C for Scans

Test Result: Pass

4.2 Output Power Radiated

Frequency	Reading Peak	EUT Orientation	Antenna Polarity	Antenna Factor	Preamp Gain	Cable loss	Final Field Strength Peak	Transmitted Power	Limit	Margin	Result
MHz	dBuV/m		V/H	dB	dB	dB	dBuV/m	dBm	dBm	dB	P/F
902.750	99.2	O1	Vertical	23.5	0	5.3	128.0	32.8	36.0	3.2	Pass
902.750	100.5	O1	Horizontal	23.5	0	5.3	129.3	34.1	36.0	1.9	Pass
914.750	98.6	O1	Vertical	23.5	0	5.4	127.5	32.3	36.0	3.70	Pass
914.750	100.4	O1	Horizontal	23.5	0	5.4	129.3	34.1	36.0	1.90	Pass
927.250	95.9	O1	Vertical	23.7	0	5.5	125.1	29.9	36.0	6.10	Pass
927.250	98.7	O1	Horizontal	23.7	0	5.5	127.9	32.7	36.0	3.30	Pass

Final Field Strength Peak (dBuV/m) =Reading Peak (dBuV/m) + Antenna Factor (dB)- Pre-amp Gain (dB) +Cable Loss (dB)

Calculation Example $128 = 99.2 + 23.5 - 0 + 5.3$

Transmitted power (dBm) = Final Field Strength Peak (dBuV/m) -95.2 dB

Calculation Example $32.8 = 128 - 95.2$

Test Result: Pass

5 List of Test Equipment

Instrument	Manufacturer	Model	Serial Num	CEI Ref	Cal Date	Cal Interval Months
Microwave Preamplifier	Hewlett Packard	83017A	3123A00175	805	30-Sep-23	12
Spectrum Analyser 30Hz-40GHz	Rohde & Schwarz	FSP40	100053	850	11-Dec-21	36
Test Receiver 3.6GHz	Rohde & Schwarz	ESR	1316.3003k03-101625-s	869	24-May-23	36
Receiver N9038A EMI 3Hz - 8.4 GHz	Keysight	MXE N9038A	MX60320104	1204	28-Feb-23	36
Antenna Horn	EMCO	3115	2363	1100	22-Feb-23	36
Fully Anechoic Chamber	CEI	FAR 3M	906	906	24-Jul-22	36
Anechoic Chamber	CEI	SAR 10M	845	845	22-Nov-22	36
Antenna Biconical	Schwarzbeck	VHBB 9124	9124 667	871	07-Oct-21	36
Antenna Log Periodic	Chase	UPA6108	1072	609	10-Sep-21	36
Antenna Horn Standard Gain 18-26.5GHz	A-Info	LB-42-25-C-KF	J2021091103028	877	30-Jul-23	12
Cable 20m				1213	16-May-24	12
Cable purple Ktype 1.8m				917	30-Jul-23	12
Cable HF Ktype 1.5m				705	30-Jul-23	12

6 Measurement Uncertainties

Measurement	Uncertainty
Radio Frequency	+/- 5×10^{-7}
Maximum Frequency Deviation	+/- 1.7 %
Conducted Emissions	+/- 1 dB
Radiated Emission 30MHz-100MHz	+/- 5.3 dB
Radiated Emission 100MHz-300MHz	+/- 4.7 dB
Radiated Emission 300MHz-1GHz	+/- 3.9 dB
Radiated Emission 1GHz-40GHz	+/- 3.8 dB
Modulation bandwidth	+/- 5×10^{-7}
Duty Cycle	+/- 5 %
Power supply	± 0.1 VDC
Temperature	± 0.2 °C
Frequency	± 0.01 ppm

The measurement uncertainties stated were calculated with a k=2 for a confidence level of over 95% as per ETS TR100 028.

Appendix A: Conducted Measurements Spurious Emissions

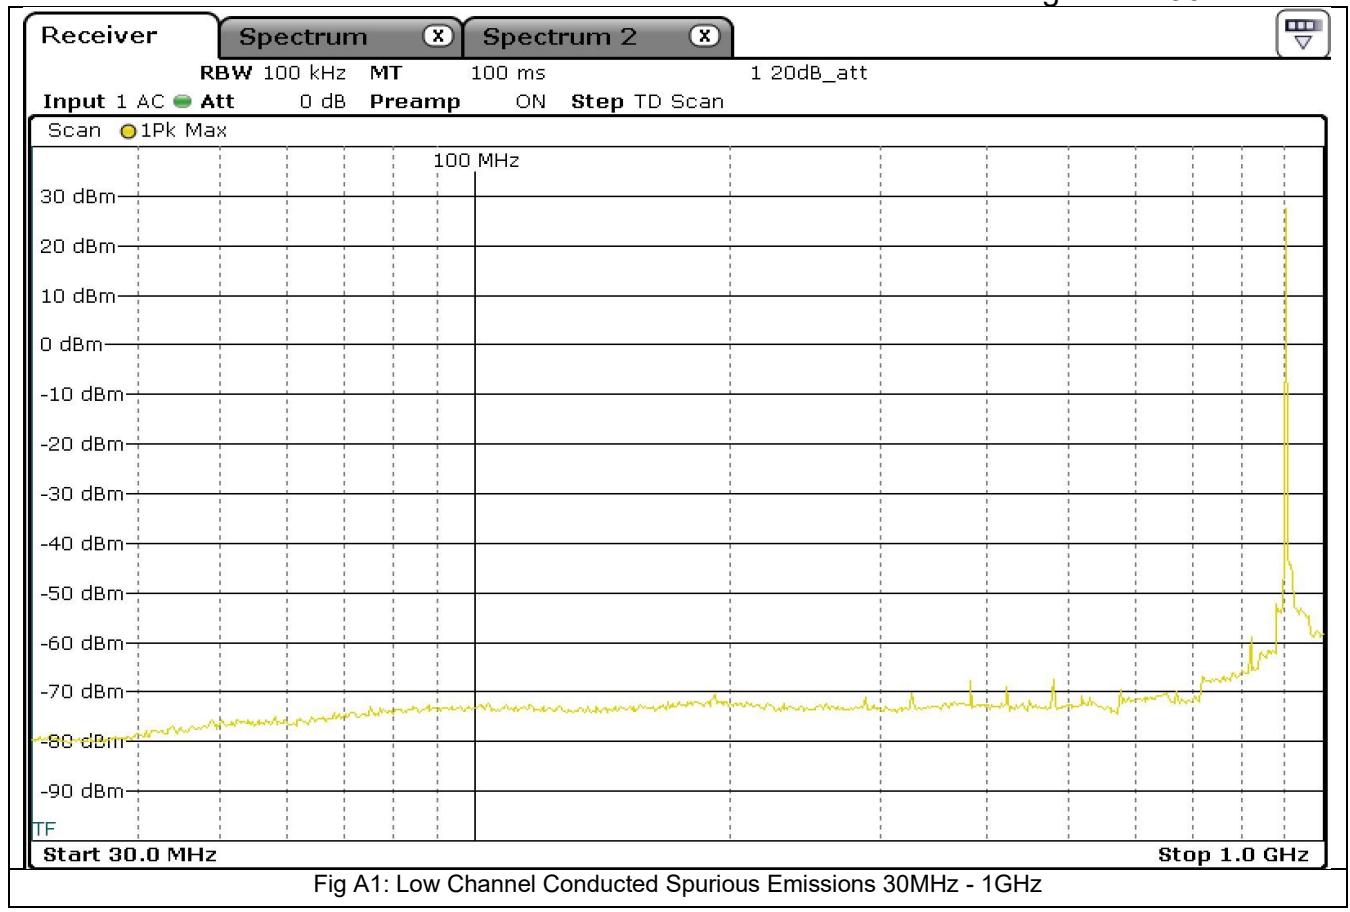


Fig A1: Low Channel Conducted Spurious Emissions 30MHz - 1GHz

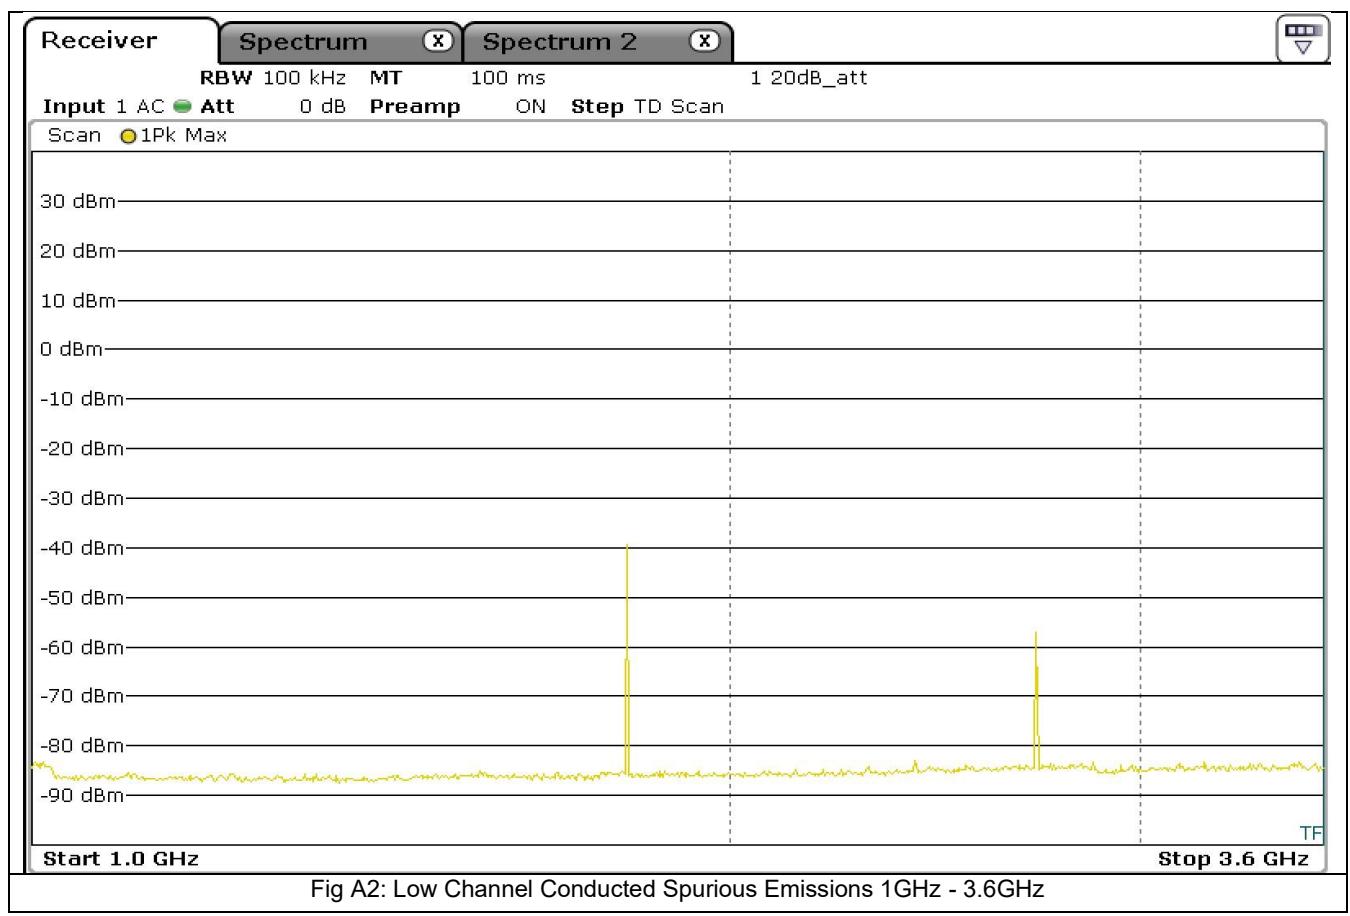


Fig A2: Low Channel Conducted Spurious Emissions 1GHz - 3.6GHz

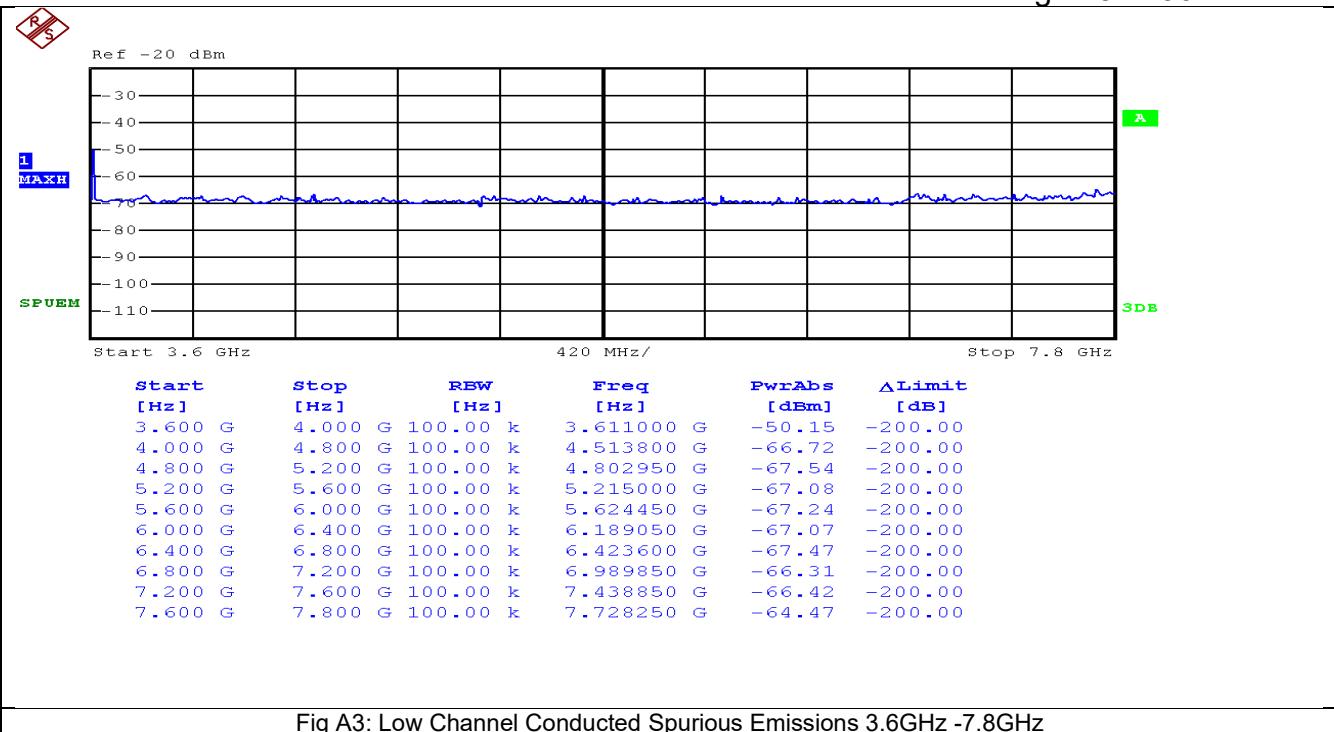


Fig A3: Low Channel Conducted Spurious Emissions 3.6GHz -7.8GHz






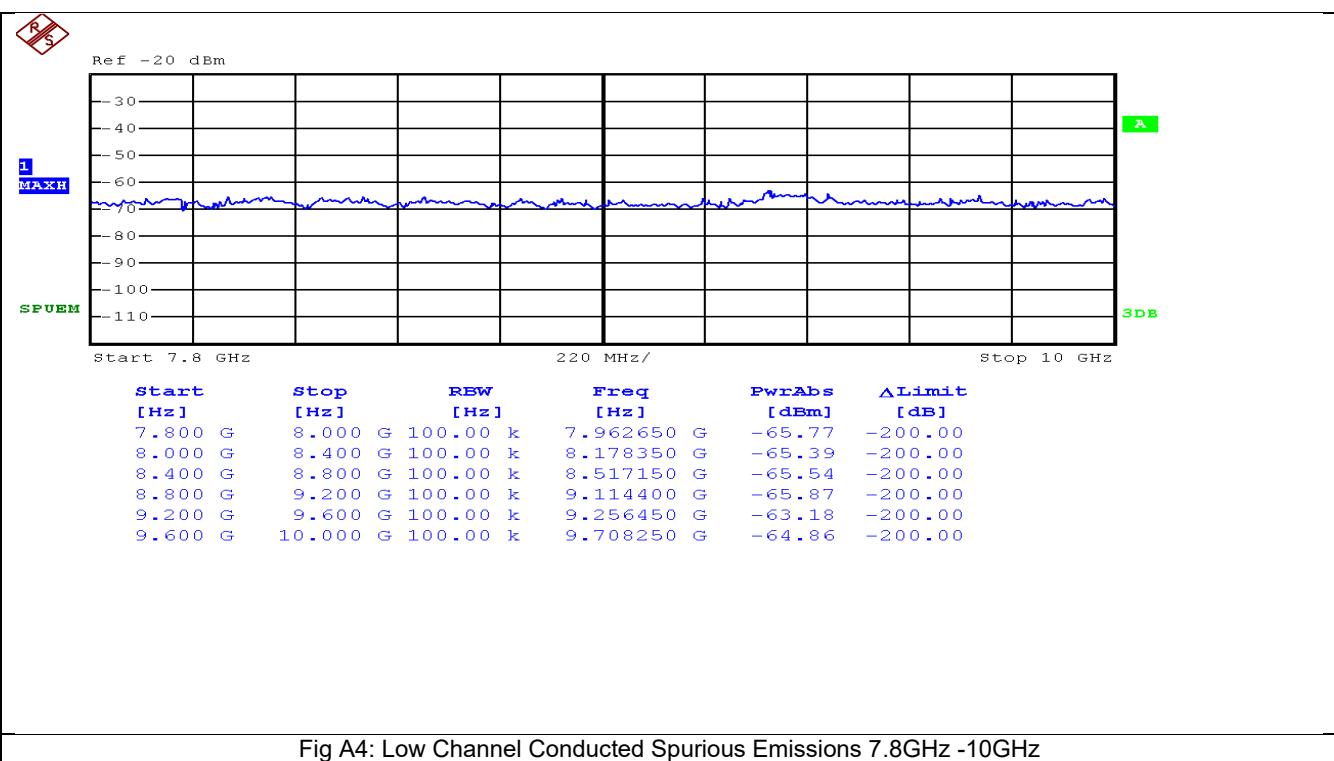


Fig A4: Low Channel Conducted Spurious Emissions 7.8GHz -10GHz

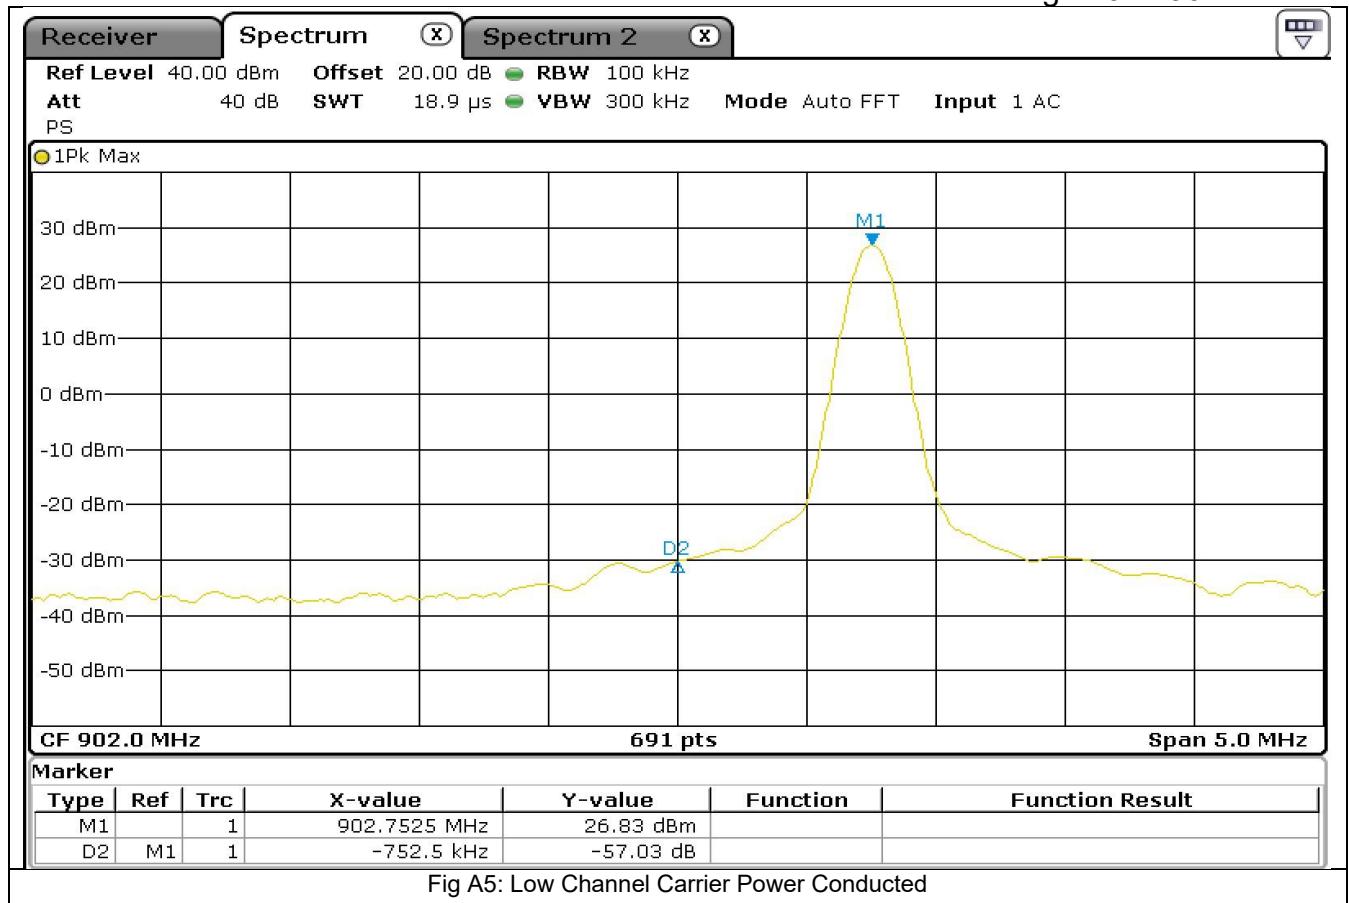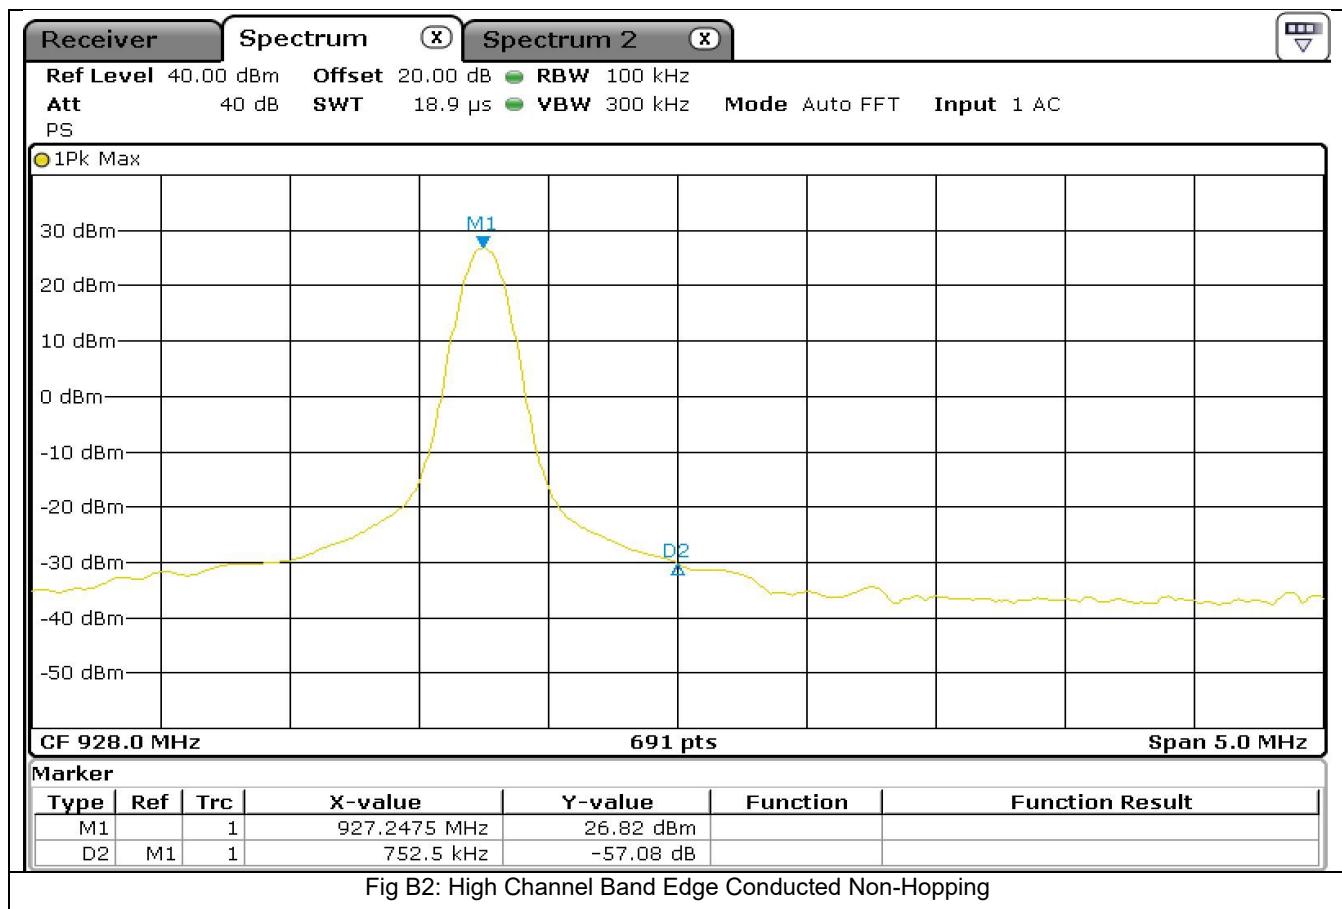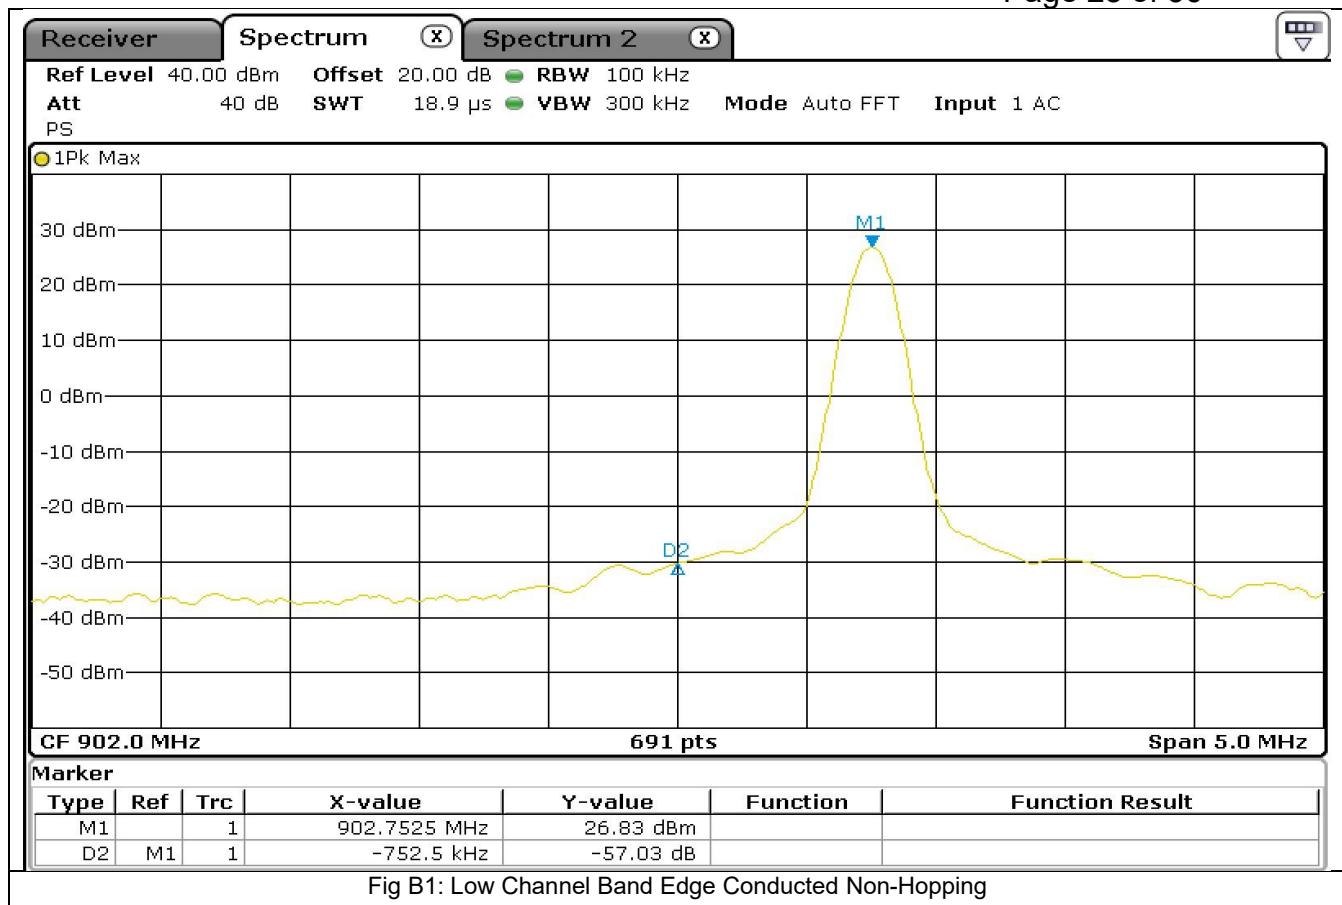

Appendix B: Conducted Tests for Band Edges

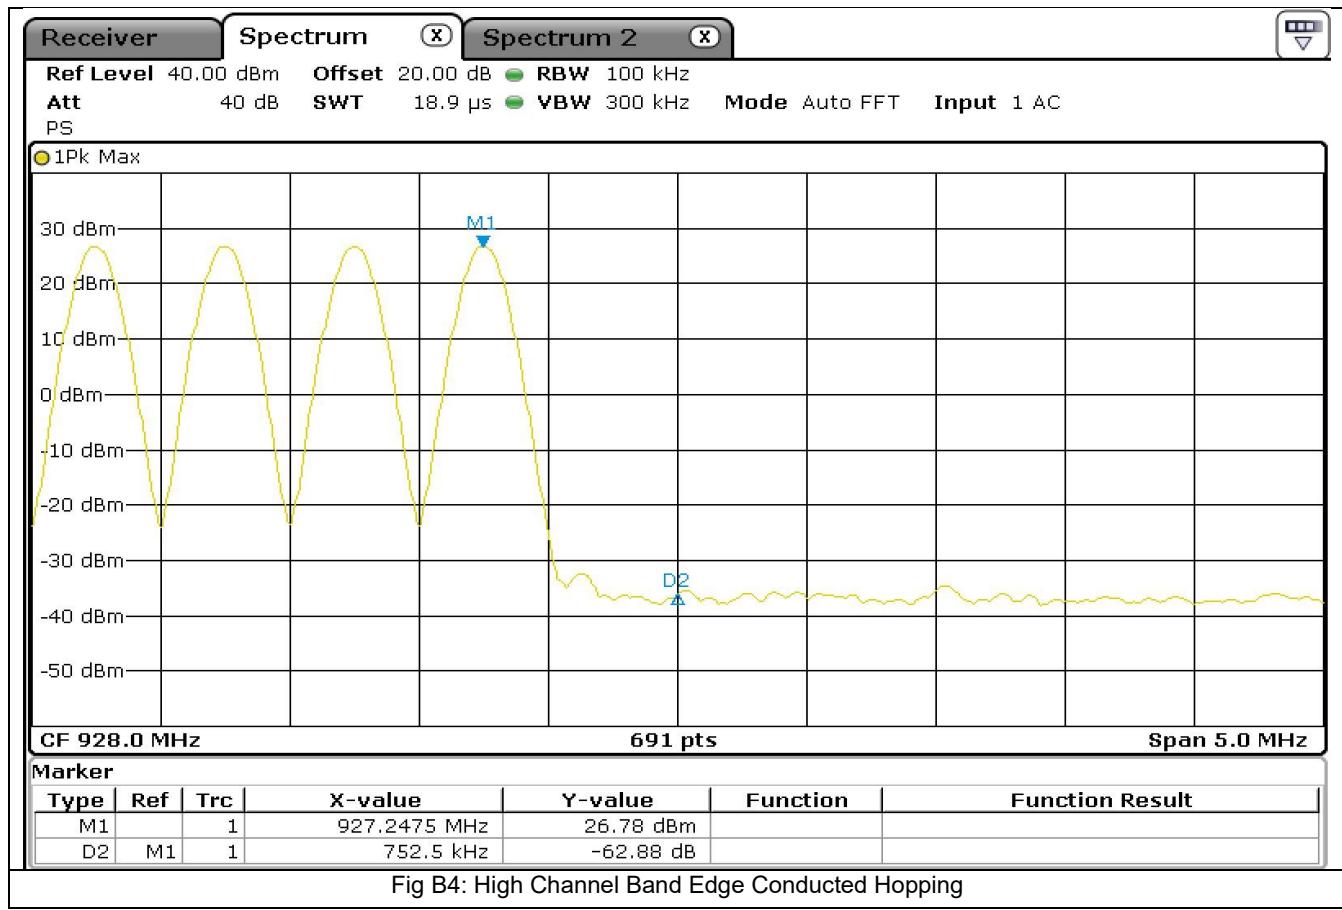

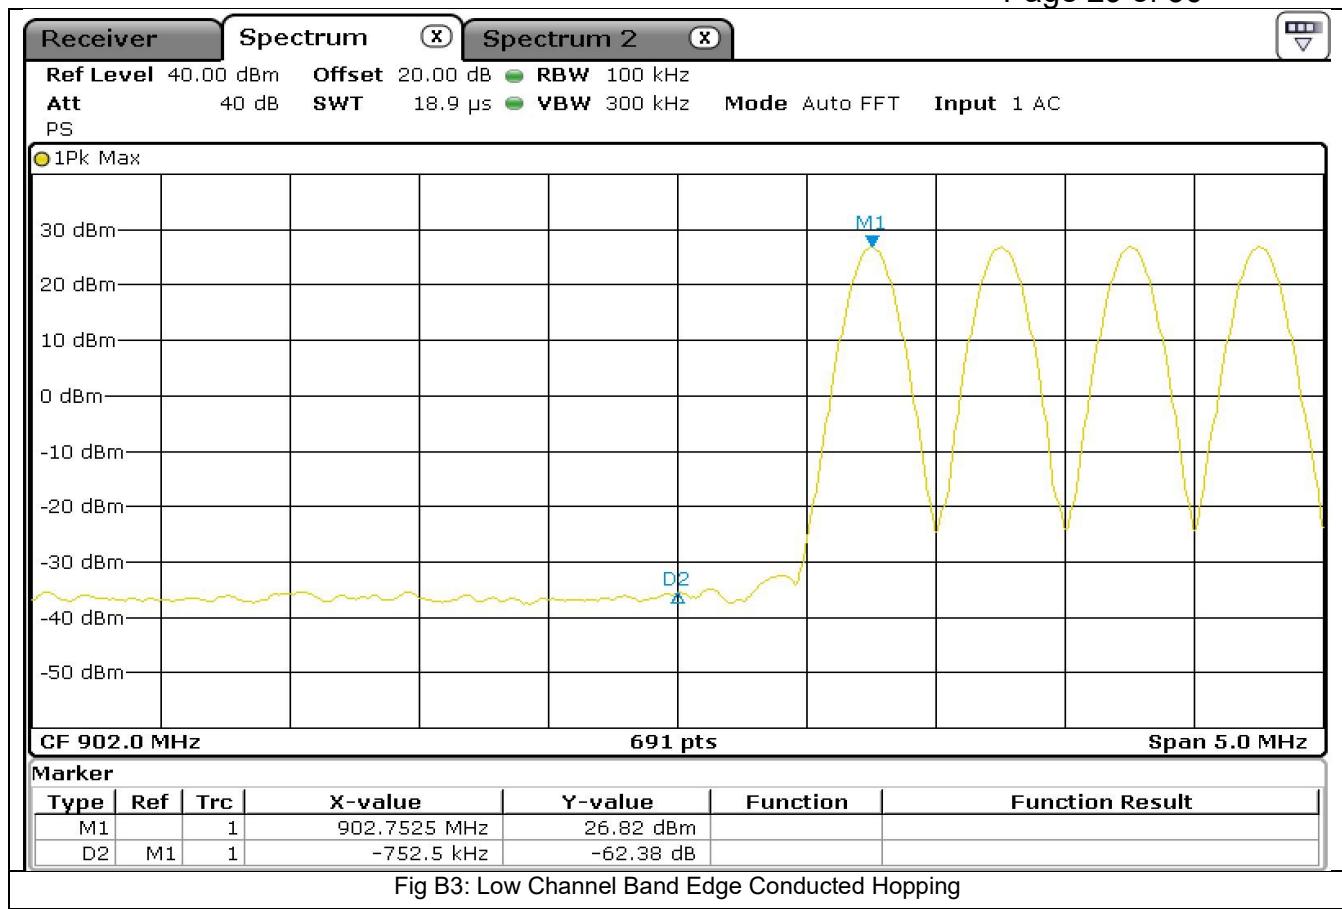

Appendix C: Radiated Spurious Emissions with External Antenna

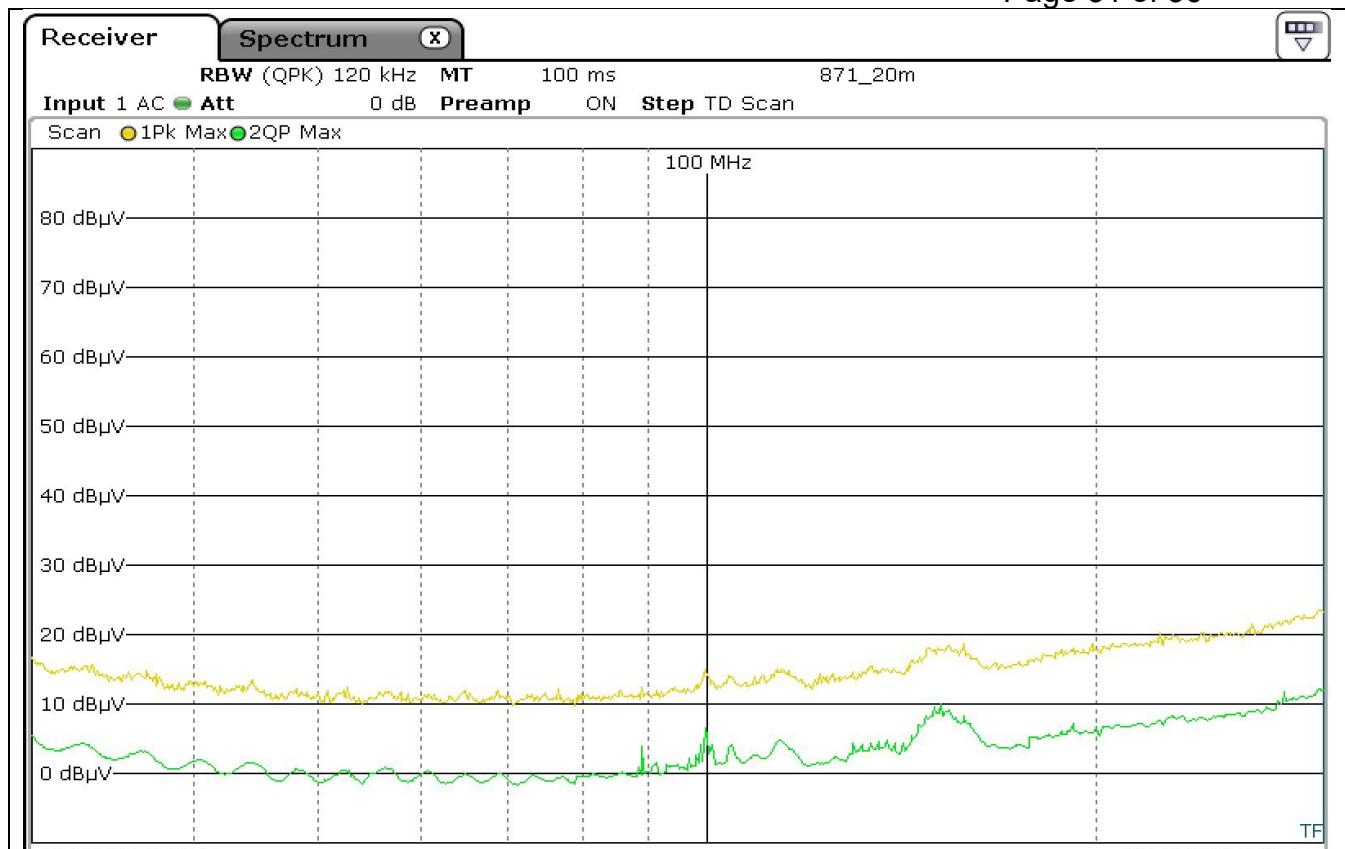


Fig C1: Low Channel Radiated Emissions 30MHz - 300MHz, Vertical, 3metres

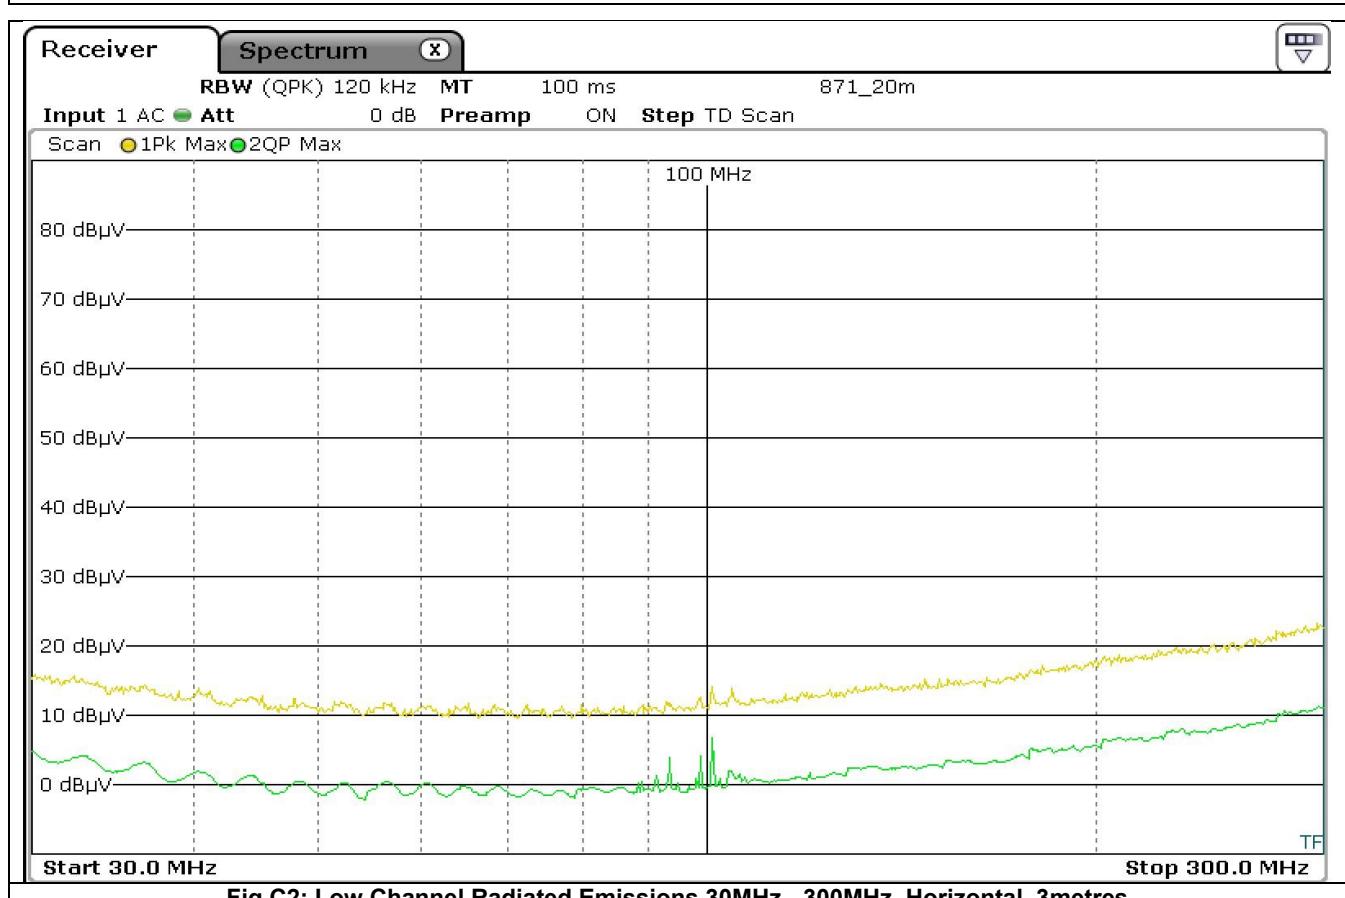
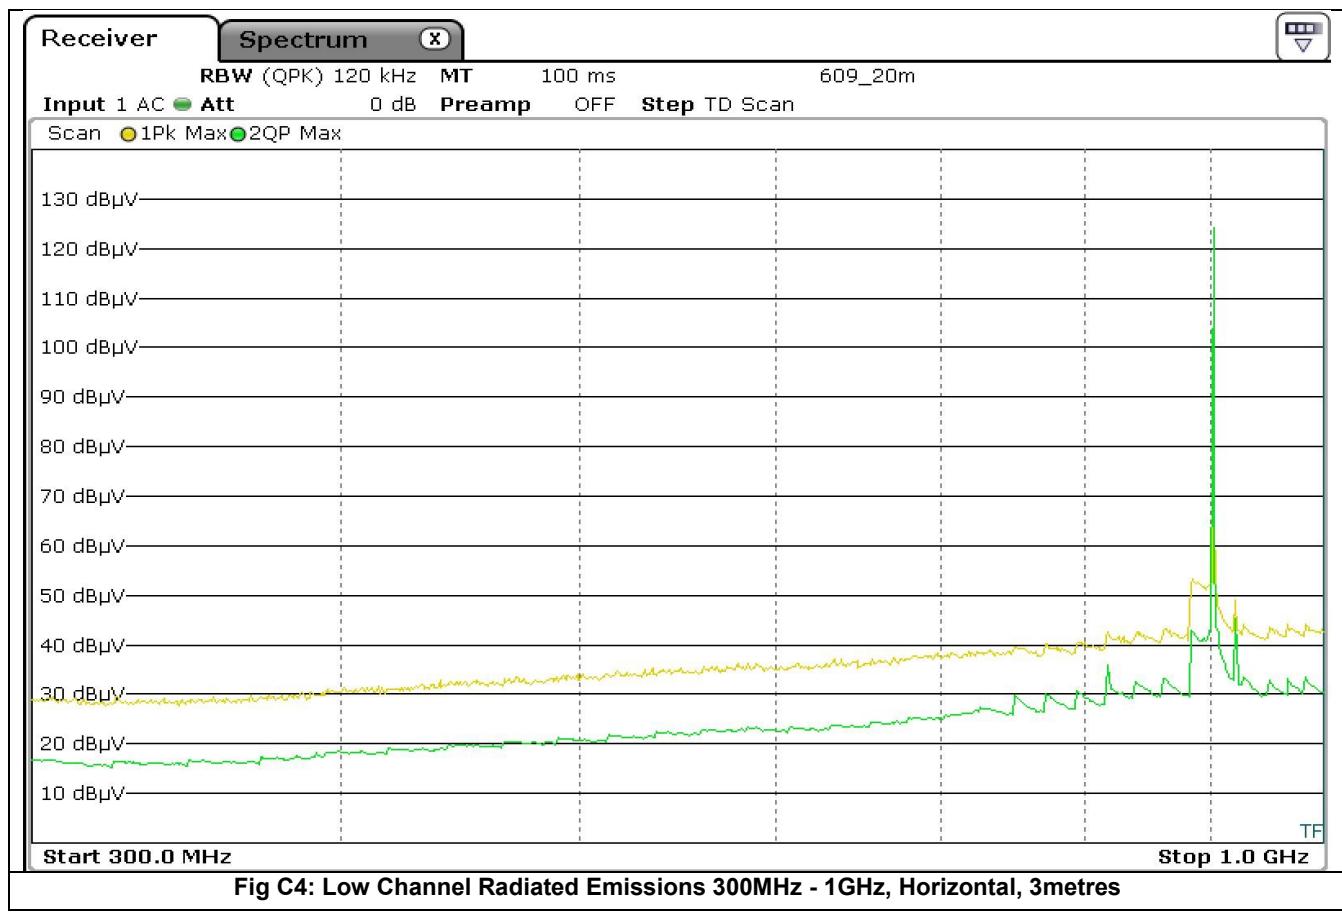
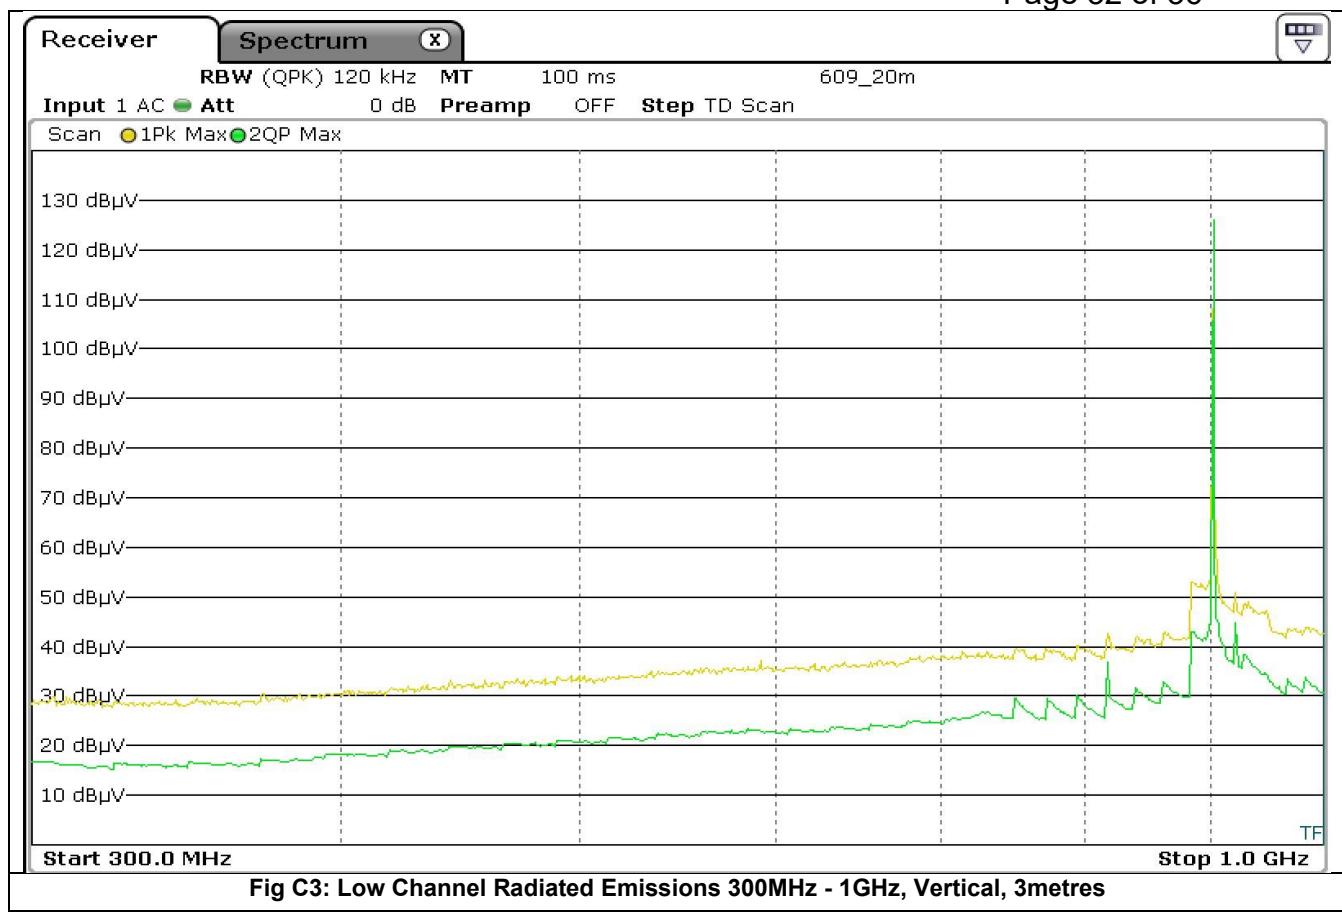


Fig C2: Low Channel Radiated Emissions 30MHz - 300MHz, Horizontal, 3metres



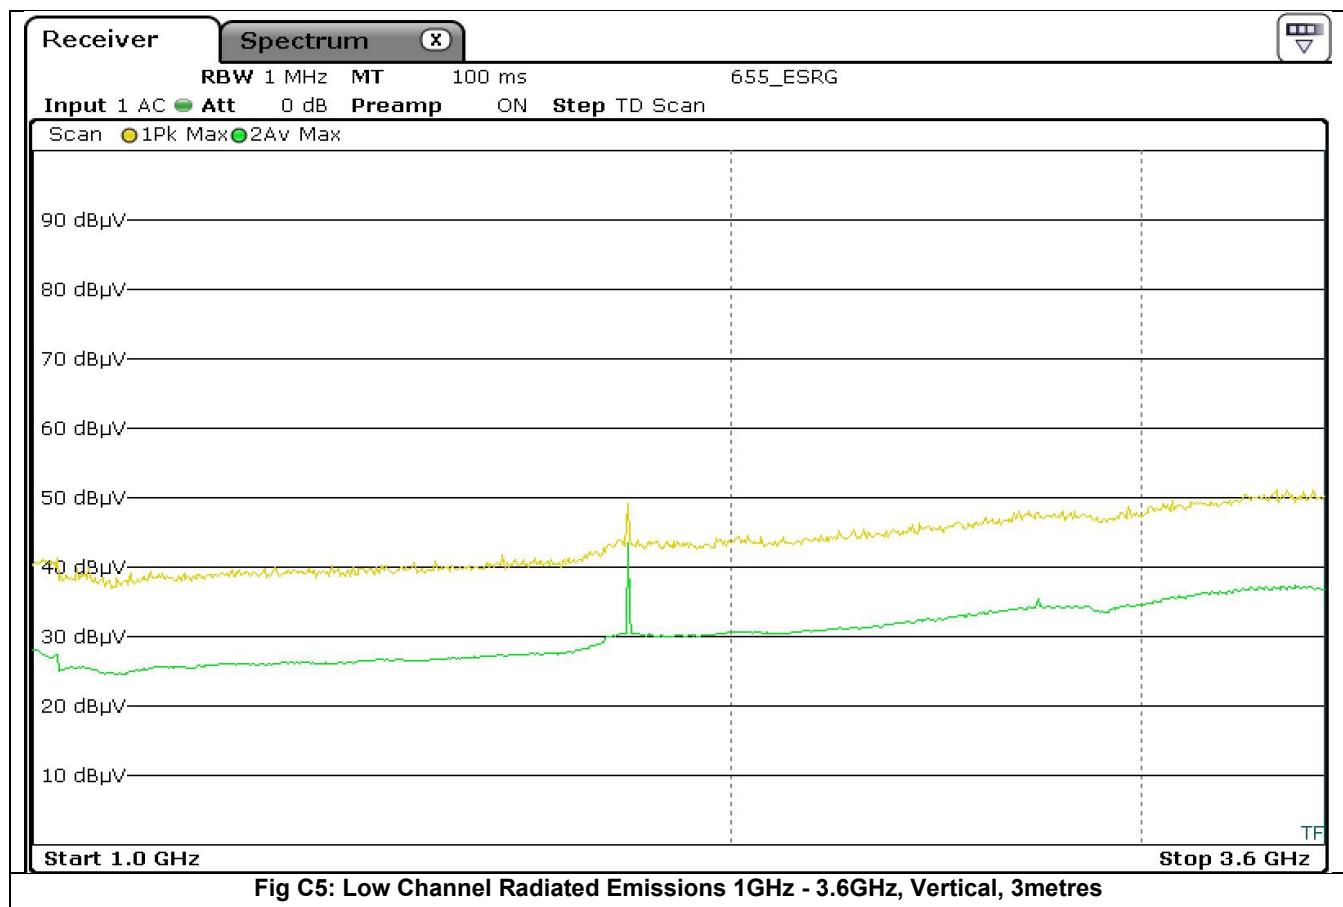


Fig C5: Low Channel Radiated Emissions 1GHz - 3.6GHz, Vertical, 3metres

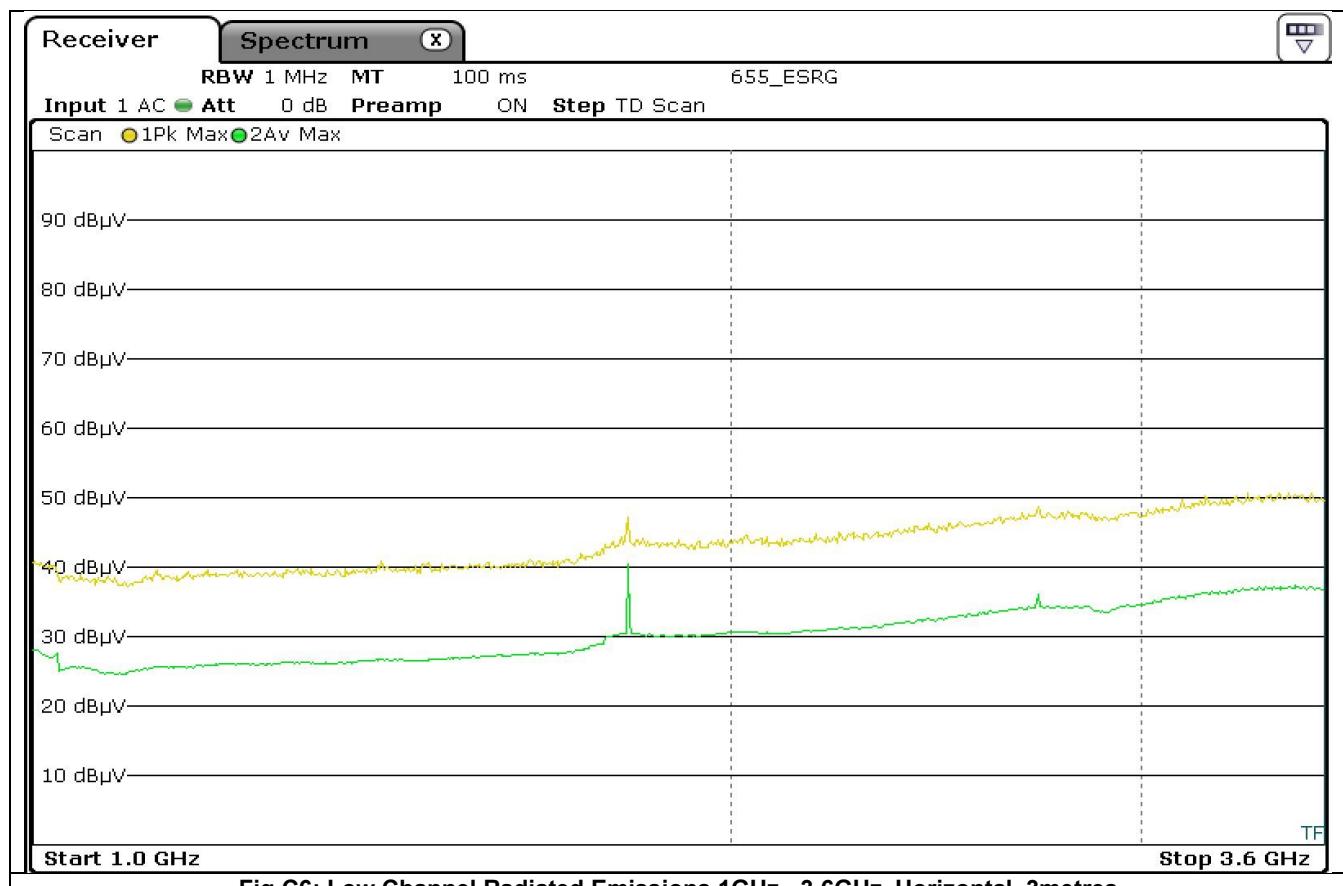


Fig C6: Low Channel Radiated Emissions 1GHz - 3.6GHz, Horizontal, 3metres

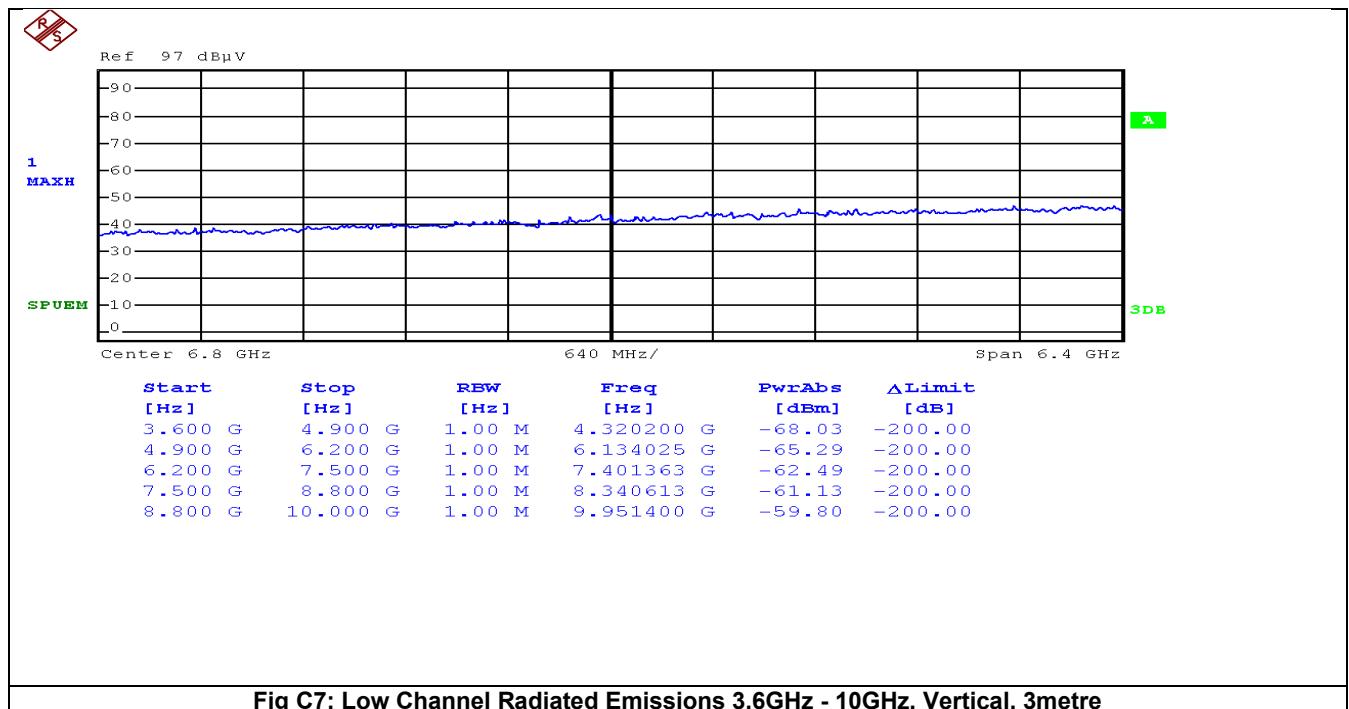


Fig C7: Low Channel Radiated Emissions 3.6GHz - 10GHz, Vertical, 3metre





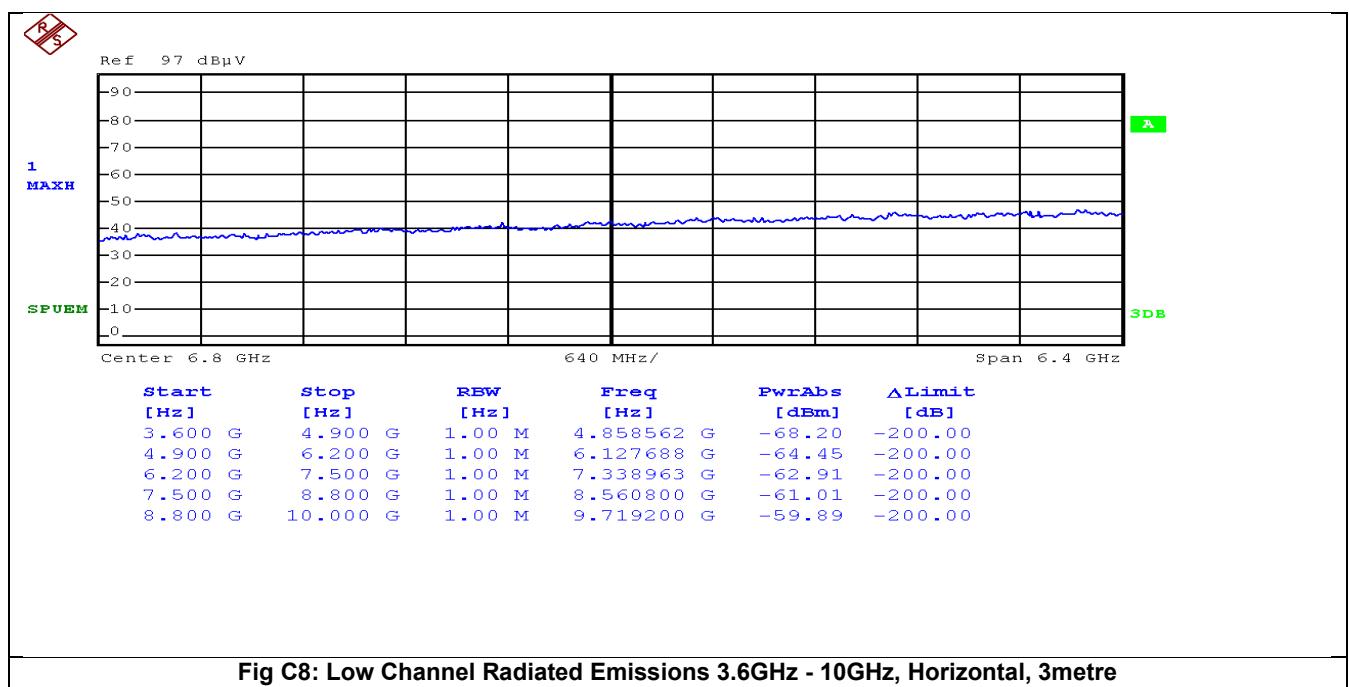


Fig C8: Low Channel Radiated Emissions 3.6GHz - 10GHz, Horizontal, 3metre

Appendix D: Block Diagrams of Test Setup

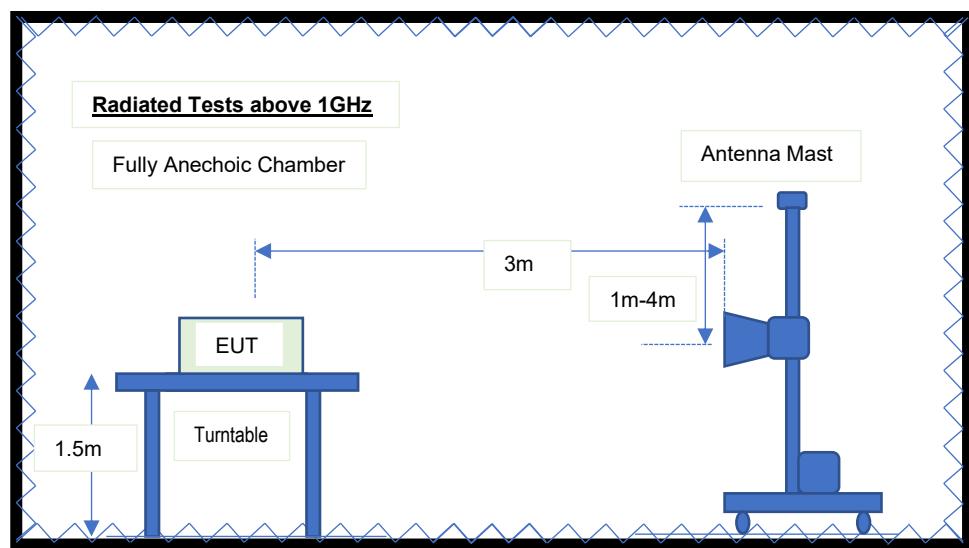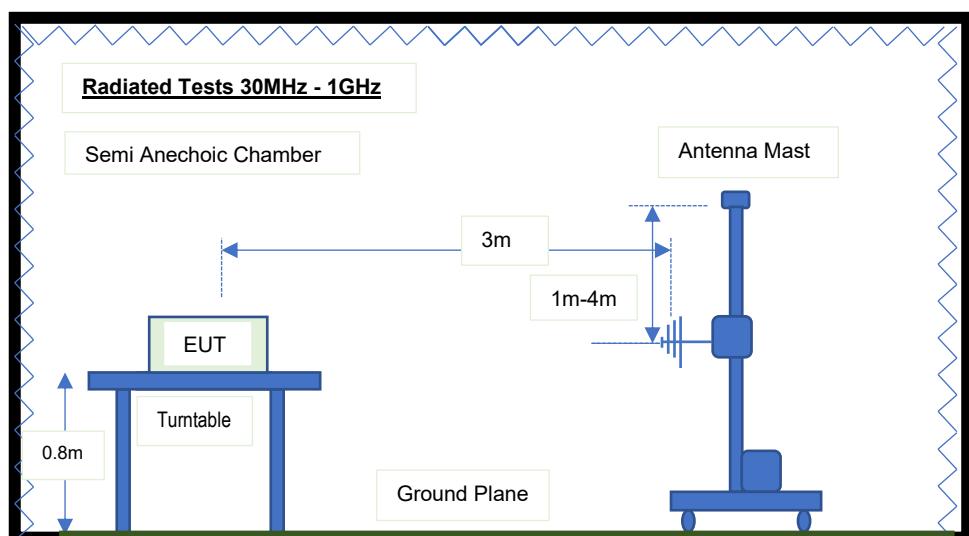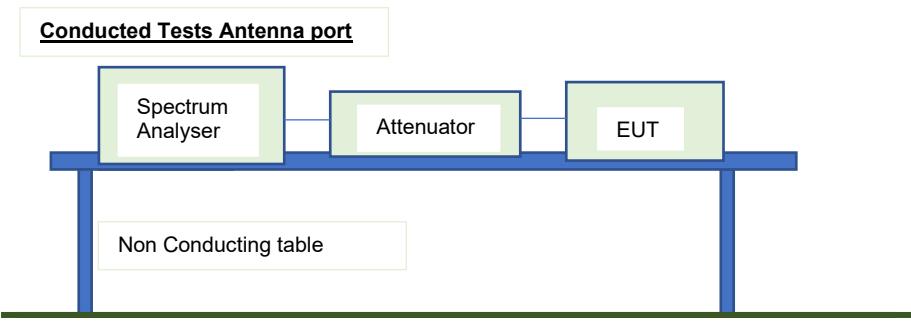

Appendix E: EUT Orientation Radiated Emissions

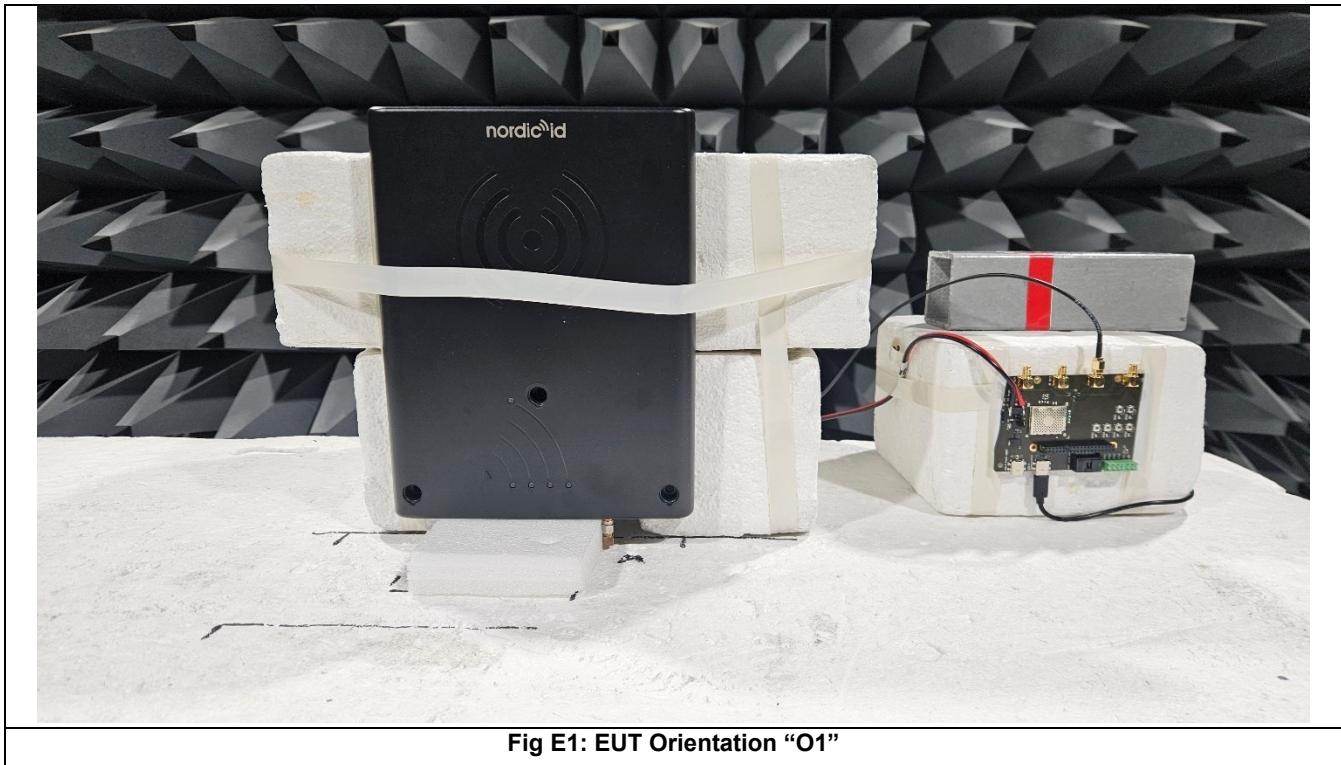

End of Report