




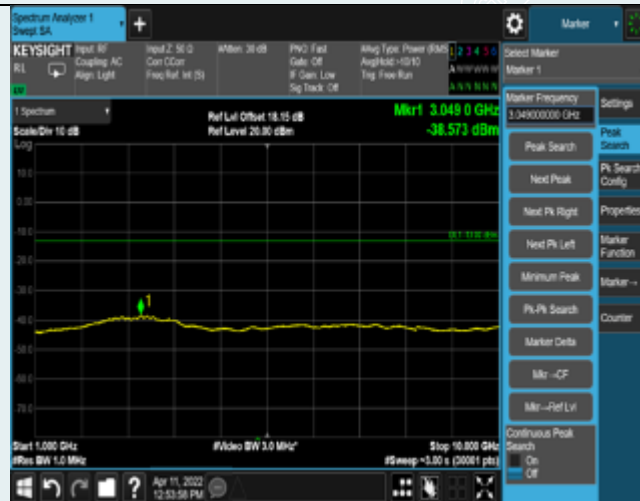

Band5-4182-1000~10000MHz

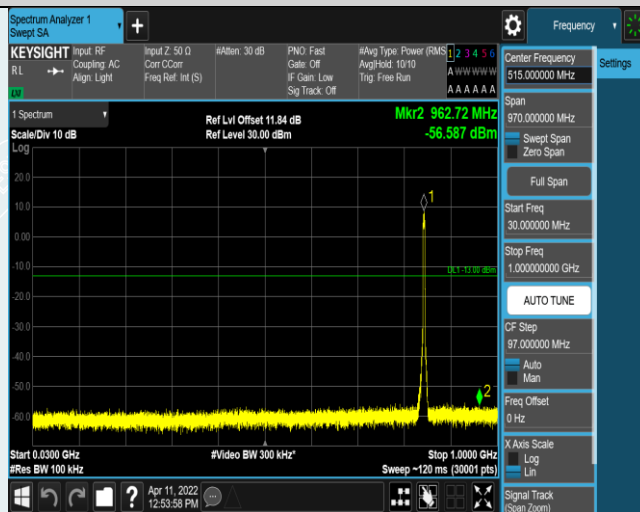

Band5-4233-30~1000MHz

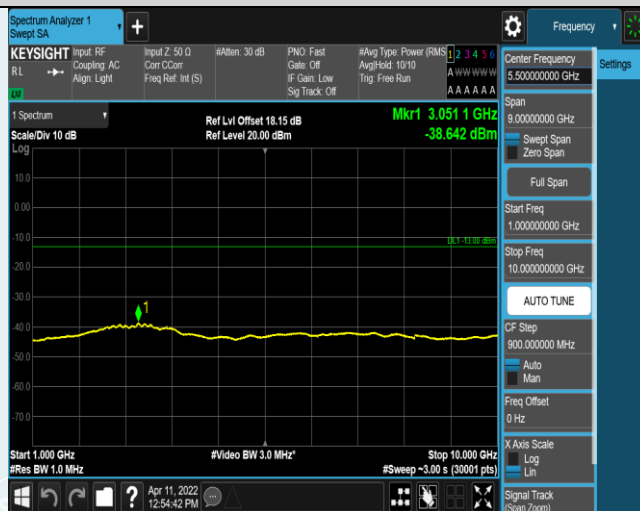

Band5-4233-1000~10000MHz

11. FREQUENCY STABILITY

11.1 LIMIT

According to FCC section 22.355, frequency stability of the transmission may not exceed $\pm 2.5\text{ppm}$.
According to FCC section 24.235, section 27.54, frequency stability no limit.

11.2 TEST PROCEDURES

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 9

Frequency stability over variations in temperature

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power off, temperature was decreased to $-30\text{ }^{\circ}\text{C}$ and EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power off, the temperature was risen in $-30\text{ }^{\circ}\text{C}$ step up to $50\text{ }^{\circ}\text{C}$. The EUT was stabilizes at each step for at least half an hour at. Power was applied the maximum frequency change was recorded within one minute.


Frequency stability when varying supply voltage

1. The EUT was placed in a temperature chamber at $20 \pm 5\text{ }^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment..
3. For hand carried battery powered equipment, reduce the primary AC or DC supply voltage to the battery operating end point, which shall be specified by the manufacturer.
4. In the worst case, frequency changes are measured.

Test Settings

N/A

11.3 TEST SETUP

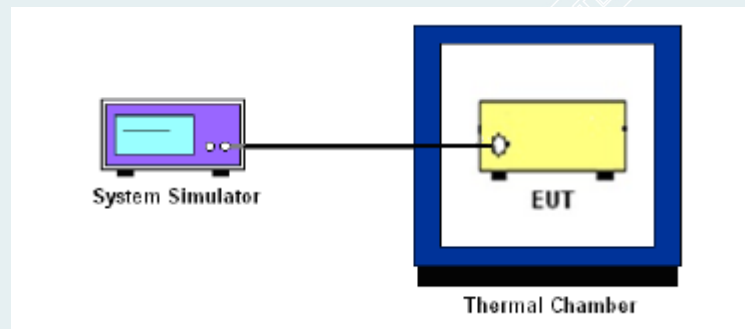

----- The following blanks -----

11.4 TEST RESULTS

GSM

EUT Name	DiLink	Model	DiLink 3.0F
Sample No.	E20211217696105-0006	Test Mode	GSM
Power supply	LV:DC 10.2V, NV:DC 12V, HV:DC 13.8V	Environmental Conditions	Temp:-30℃~+50℃; Humi:45%RH
Test Date	2022-04-08	Test Site	/
Tested By	Zhang Shuangshuang	Reviewed by	Zhao Zetian

Voltage							
Band	Channel	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
GSM850	190	VL	NT	-3.58	-0.004279	±2.5	PASS
GSM850	190	VN	NT	-11.43	-0.013662	±2.5	PASS
GSM850	190	VH	NT	-4.52	-0.005403	±2.5	PASS
GPRS850	190	VL	NT	10.33	0.012348	±2.5	PASS
GPRS850	190	VN	NT	16.27	0.019448	±2.5	PASS
GPRS850	190	VH	NT	7.14	0.008535	±2.5	PASS
EGPRS850	190	VL	NT	13.17	0.015742	±2.5	PASS
EGPRS850	190	VN	NT	13.5	0.016137	±2.5	PASS
EGPRS850	190	VH	NT	15.72	0.01879	±2.5	PASS
GSM1900	661	VL	NT	-11.27	-0.005995	±2.5	PASS
GSM1900	661	VN	NT	-14.98	-0.007968	±2.5	PASS
GSM1900	661	VH	NT	-10.82	-0.005755	±2.5	PASS
GPRS1900	661	VL	NT	-5.04	-0.002681	±2.5	PASS
GPRS1900	661	VN	NT	1.16	0.000617	±2.5	PASS
GPRS1900	661	VH	NT	-1.61	-0.000856	±2.5	PASS
EGPRS1900	661	VL	NT	2.49	0.001324	±2.5	PASS
EGPRS1900	661	VN	NT	9.69	0.005154	±2.5	PASS
EGPRS1900	661	VH	NT	0.81	0.000431	±2.5	PASS

Temperature							
Band	Channel	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
GSM850	190	NV	-30	-6.78	-0.008104	±2.5	PASS
GSM850	190	NV	-20	-7.04	-0.008415	±2.5	PASS
GSM850	190	NV	-10	-8.1	-0.009682	±2.5	PASS
GSM850	190	NV	0	-8.72	-0.010423	±2.5	PASS
GSM850	190	NV	10	-9.65	-0.011535	±2.5	PASS
GSM850	190	NV	20	-10.69	-0.012778	±2.5	PASS
GSM850	190	NV	30	-10.85	-0.012969	±2.5	PASS
GSM850	190	NV	40	-8.94	-0.010686	±2.5	PASS
GSM850	190	NV	50	-3.16	-0.003777	±2.5	PASS
GPRS850	190	NV	-30	14.24	0.017021	±2.5	PASS
GPRS850	190	NV	-20	13.14	0.015706	±2.5	PASS

GPRS850	190	NV	-10	11.49	0.013734	±2.5	PASS
GPRS850	190	NV	0	9.91	0.011846	±2.5	PASS
GPRS850	190	NV	10	8.75	0.010459	±2.5	PASS
GPRS850	190	NV	20	7.55	0.009025	±2.5	PASS
GPRS850	190	NV	30	6.3	0.00753	±2.5	PASS
GPRS850	190	NV	40	14.56	0.017404	±2.5	PASS
GPRS850	190	NV	50	13.88	0.016591	±2.5	PASS
EGPRS850	190	NV	-30	8.78	0.010495	±2.5	PASS
EGPRS850	190	NV	-20	13.11	0.015671	±2.5	PASS
EGPRS850	190	NV	-10	16.18	0.01934	±2.5	PASS
EGPRS850	190	NV	0	10.33	0.012348	±2.5	PASS
EGPRS850	190	NV	10	12.43	0.014858	±2.5	PASS
EGPRS850	190	NV	20	15.88	0.018982	±2.5	PASS
EGPRS850	190	NV	30	8.07	0.009646	±2.5	PASS
EGPRS850	190	NV	40	11.04	0.013196	±2.5	PASS
EGPRS850	190	NV	50	14.11	0.016866	±2.5	PASS
GSM1900	661	NV	-30	-5.33	-0.002835	±2.5	PASS
GSM1900	661	NV	-20	-15.92	-0.008468	±2.5	PASS
GSM1900	661	NV	-10	-8.07	-0.004293	±2.5	PASS
GSM1900	661	NV	0	-18.18	-0.00967	±2.5	PASS
GSM1900	661	NV	10	-10.2	-0.005426	±2.5	PASS
GSM1900	661	NV	20	-20.5	-0.010904	±2.5	PASS
GSM1900	661	NV	30	-9.94	-0.005287	±2.5	PASS
GSM1900	661	NV	40	-0.94	-0.0005	±2.5	PASS
GSM1900	661	NV	50	-8.72	-0.004638	±2.5	PASS
GPRS1900	661	NV	-30	-13.01	-0.00692	±2.5	PASS
GPRS1900	661	NV	-20	-5.84	-0.003106	±2.5	PASS
GPRS1900	661	NV	-10	1.36	0.000723	±2.5	PASS
GPRS1900	661	NV	0	-6.97	-0.003707	±2.5	PASS
GPRS1900	661	NV	10	-12.69	-0.00675	±2.5	PASS
GPRS1900	661	NV	20	-2.97	-0.00158	±2.5	PASS
GPRS1900	661	NV	30	-9.17	-0.004878	±2.5	PASS
GPRS1900	661	NV	40	2.71	0.001441	±2.5	PASS
GPRS1900	661	NV	50	-4.49	-0.002388	±2.5	PASS
EGPRS1900	661	NV	-30	0	0	±2.5	PASS
EGPRS1900	661	NV	-20	2.91	0.001548	±2.5	PASS
EGPRS1900	661	NV	-10	2.39	0.001271	±2.5	PASS
EGPRS1900	661	NV	0	1.78	0.000947	±2.5	PASS
EGPRS1900	661	NV	10	3.65	0.001941	±2.5	PASS
EGPRS1900	661	NV	20	3.78	0.002011	±2.5	PASS
EGPRS1900	661	NV	30	5.17	0.00275	±2.5	PASS
EGPRS1900	661	NV	40	-12.66	-0.006734	±2.5	PASS
EGPRS1900	661	NV	50	-9.04	-0.004809	±2.5	PASS

WCDMA

EUT Name	DiLink	Model	DiLink 3.0F
Sample No.	E20211217696105-0006	Test Mode	WCDMA
Power supply	LV:DC 10.2V, NV:DC 12V, HV:DC 13.8V	Environmental Conditions	Temp:-30℃~+50℃; Humi:42%RH
Test Date	2022-04-21	Test Site	/
Tested By	Zhang Shuangshuang	Reviewed by	Zhao Zetian

Voltage							
Band	Channel	Voltage (Vdc)	Temperature (℃)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
Band2	9400	VL	NT	11.74	0.006245	±2.5	PASS
Band2	9400	VN	NT	11.90	0.006330	±2.5	PASS
Band2	9400	VH	NT	11.59	0.006165	±2.5	PASS
Band4	1413	VL	NT	-13.40	-0.007734	±2.5	PASS
Band4	1413	VN	NT	-14.13	-0.008155	±2.5	PASS
Band4	1413	VH	NT	-13.07	-0.007544	±2.5	PASS
Band5	4182	VL	NT	-0.95	-0.001136	±2.5	PASS
Band5	4182	VN	NT	-1.15	-0.001375	±2.5	PASS
Band5	4182	VH	NT	-0.49	-0.000586	±2.5	PASS

Temperature							
Band	Channel	Voltage (Vdc)	Temperature (℃)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
Band2	9400	NV	-30	11.74	0.006245	±2.5	PASS
Band2	9400	NV	-20	11.72	0.006234	±2.5	PASS
Band2	9400	NV	-10	11.83	0.006293	±2.5	PASS
Band2	9400	NV	0	11.75	0.006250	±2.5	PASS
Band2	9400	NV	10	11.28	0.006000	±2.5	PASS
Band2	9400	NV	20	11.59	0.006165	±2.5	PASS
Band2	9400	NV	30	11.61	0.006176	±2.5	PASS
Band2	9400	NV	40	11.58	0.006160	±2.5	PASS
Band2	9400	NV	50	11.79	0.006271	±2.5	PASS
Band4	1413	NV	-30	-12.71	-0.007336	±2.5	PASS
Band4	1413	NV	-20	-12.67	-0.007313	±2.5	PASS
Band4	1413	NV	-10	-12.38	-0.007145	±2.5	PASS
Band4	1413	NV	0	-12.07	-0.006966	±2.5	PASS
Band4	1413	NV	10	-11.97	-0.006909	±2.5	PASS
Band4	1413	NV	20	-12.37	-0.007140	±2.5	PASS
Band4	1413	NV	30	-11.97	-0.006909	±2.5	PASS
Band4	1413	NV	40	-11.97	-0.006909	±2.5	PASS
Band4	1413	NV	50	-12.25	-0.007070	±2.5	PASS
Band5	4182	NV	-30	-0.49	-0.000586	±2.5	PASS
Band5	4182	NV	-20	-0.77	-0.000921	±2.5	PASS
Band5	4182	NV	-10	-1.65	-0.001973	±2.5	PASS
Band5	4182	NV	0	-1.89	-0.002260	±2.5	PASS
Band5	4182	NV	10	-1.54	-0.001841	±2.5	PASS
Band5	4182	NV	20	-0.92	-0.001100	±2.5	PASS
Band5	4182	NV	30	-0.45	-0.000538	±2.5	PASS
Band5	4182	NV	40	-0.38	-0.000454	±2.5	PASS
Band5	4182	NV	50	-0.68	-0.000813	±2.5	PASS

12. FIELD STRENGTH OF SPURIOUS RADIATION

12.1 LIMIT

According to FCC section 22.917(a), 24.238(a), 27.53(h)(1), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

12.2 TEST PROCEDURES

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 7

Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360 ° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.

- 4). The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter.
- 5). A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 2) is obtained for this set of conditions.
- 6). The output power into the substitution antenna was then measured.
- 7). Steps 5) and 6) were repeated with both antennas polarized.
- 8) Calculate power in dBm by the following formula:

$$ERP(dBm) = Pg(dBm) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$

Where:

P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g [dBm] - \text{cable loss [dB]}$. The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10\log_{10}(\text{Power [Watts]})$.

Above 1GHz test procedure as below:

1. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
2. Calculate power in dBm by the following formula:

$$EIRP(dBm) = Pg(dBm) - \text{cable loss (dB)} + \text{antenna gain (dBi)}$$

$$EIRP = ERP + 2.15dB$$

Where:
 P_g is the generator output power into the substitution antenna.
3. Test the EUT in the lowest channel, the middle channel the Highest channel
4. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
5. Repeat above procedures until all frequencies measured was complete

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to at least 10*the fundamental frequency (separated into at least two plots per channel)
2. RBW=100kHz for emission below 1GHz and 1MHz for emission above 1GHz.
3. Number of sweep point $\geq 2 * \text{span} / \text{RBW}$
4. Detector=RMS
5. Trace mode = trace average for continuous emissions, max hold for pulse emissions
6. The trace was allowed to stabilize

12.3 TEST SETUP

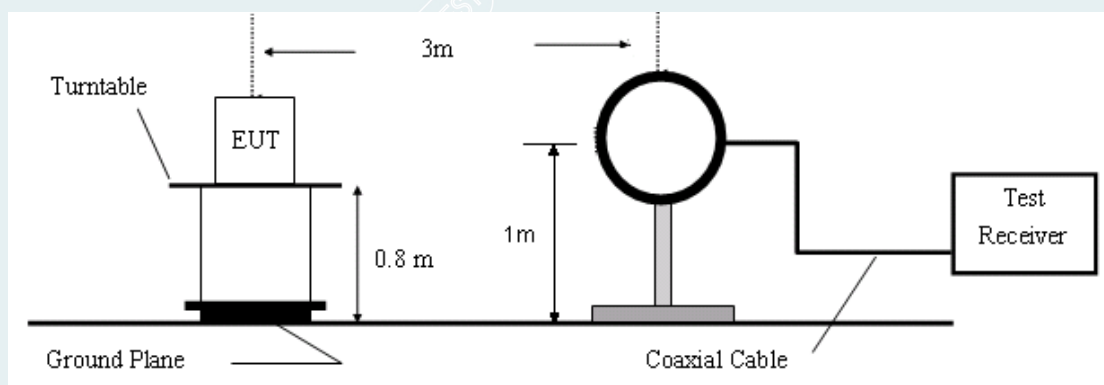


Figure 1. 9kHz to 30MHz radiated emissions test configuration

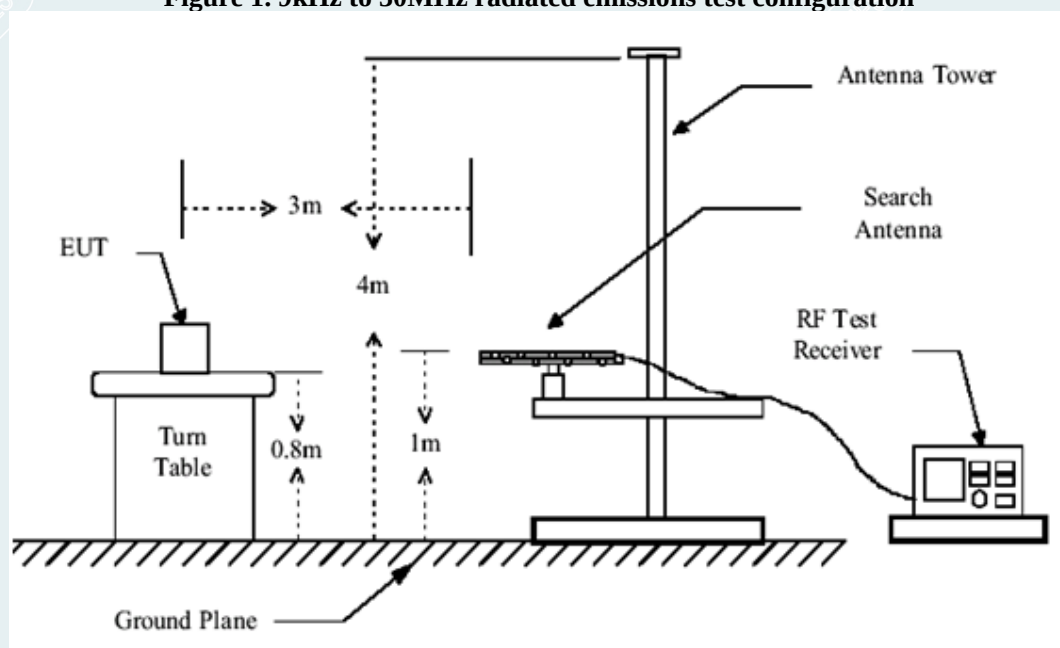


Figure 2. 30MHz to 1GHz radiated emissions test configuration

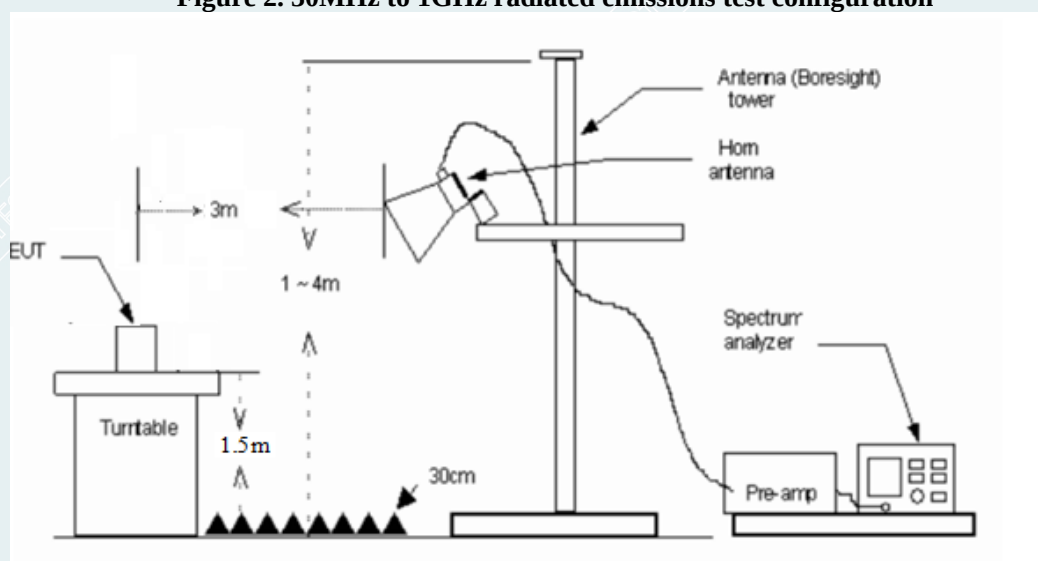


Figure 3. 1GHz-18GHz radiated emissions test configuration

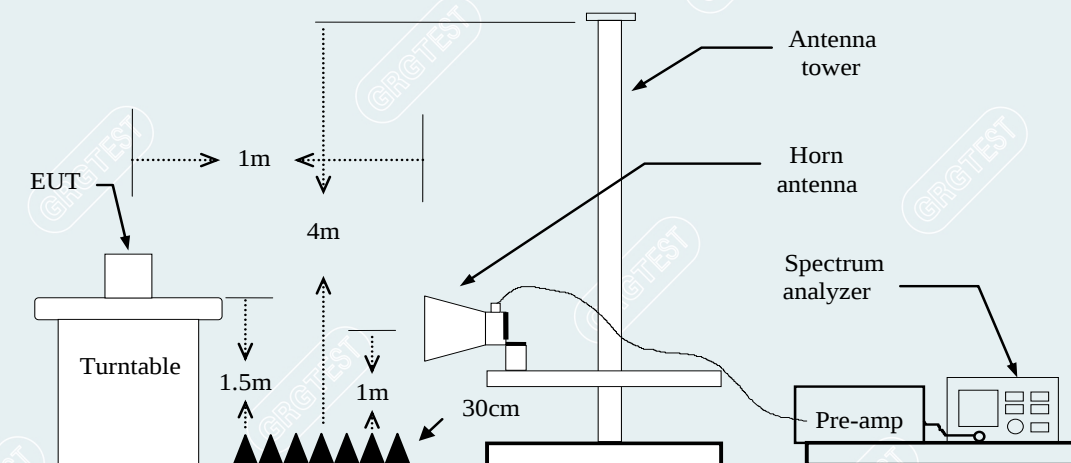


Figure 4. Above 18GHz radiated emissions test configuration

----- The following blanks -----

12.4 DATA SAMPLE

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
x	xxxx	-66.69	-77.73	-25.00	52.73	-11.04	RMS	Horizontal

Frequency (MHz) = Emission frequency in MHz

Ant.Pol. (H/V) = Antenna polarization

Reading (dBm) = Uncorrected Analyzer / Receiver reading

Result (dBm) = Reading (dBm) + Correction Factor (dBm)

Limit (dBm) = Limit stated in standard

Margin (dB) = Remark Result (dBm) – Limit (dBm)

Peak = Peak Reading

RMS = RMS Reading

AVG = Average Reading


----- The following blanks -----

12.5 TEST RESULTS

GSM

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	128	Band:	GSM850
Mode:	GSM	Voltage:	DC 12V
Environment:	Temp: 25°C; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-15 07:53:10		

Test Graph

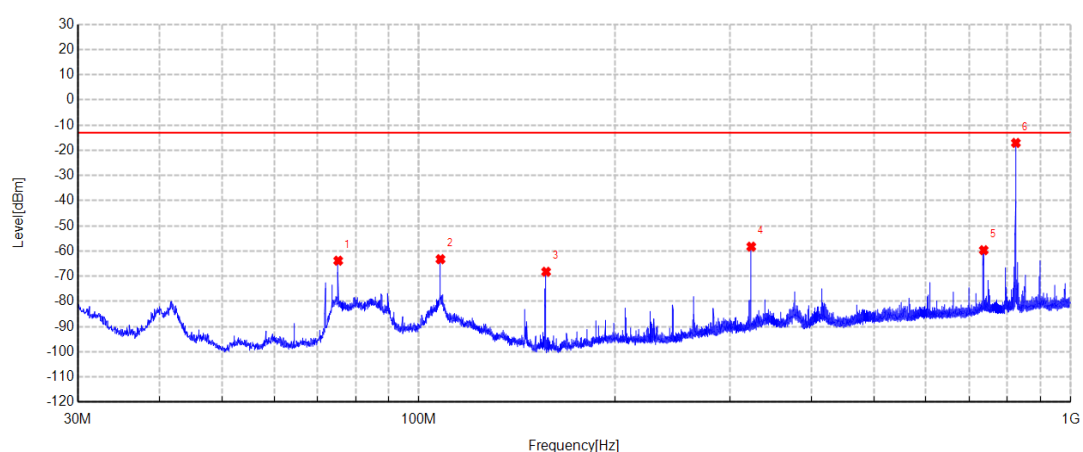

Suspected Data List


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	75.2505	-42.37	-63.83	-13.00	50.83	-21.46	RMS	Vertical
2	107.9880	-53.07	-63.23	-13.00	50.23	-10.16	RMS	Vertical
3	156.8275	-47.60	-68.22	-13.00	55.22	-20.62	RMS	Vertical
4	323.6675	-46.12	-58.25	-13.00	45.25	-12.13	RMS	Vertical
5	735.7720	-55.69	-59.66	-13.00	46.66	-3.97	RMS	Vertical
6	824.1875	-13.46	-17.08	-13.00	4.08	-3.62	RMS	Vertical

NOTE: NO.6 is the fundamental frequency signal.

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	128	Band:	GSM850
Mode:	GSM	Voltage:	DC 12V
Environment:	Temp: 25℃; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-15 07:54:46		

Test Graph

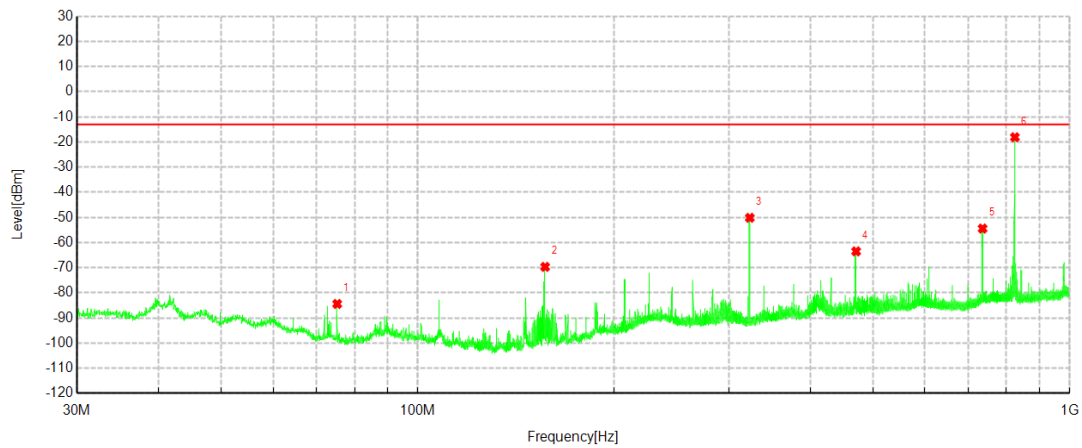

Suspected Data List


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	75.2505	-63.29	-84.41	-13.00	71.41	-21.12	RMS	Horizontal
2	156.8275	-47.35	-69.67	-13.00	56.67	-22.32	RMS	Horizontal
3	323.1825	-36.19	-50.15	-13.00	37.15	-13.96	RMS	Horizontal
4	470.4285	-53.41	-63.51	-13.00	50.51	-10.10	RMS	Horizontal
5	735.2870	-50.43	-54.44	-13.00	41.44	-4.01	RMS	Horizontal
6	824.2360	-14.38	-18.11	-13.00	5.11	-3.73	RMS	Horizontal

NOTE: NO.6 is the fundamental frequency signal.

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	190	Band:	GSM850
Mode:	GSM	Voltage:	DC 12V
Environment:	Temp: 25°C; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-15 07:57:29		

Test Graph

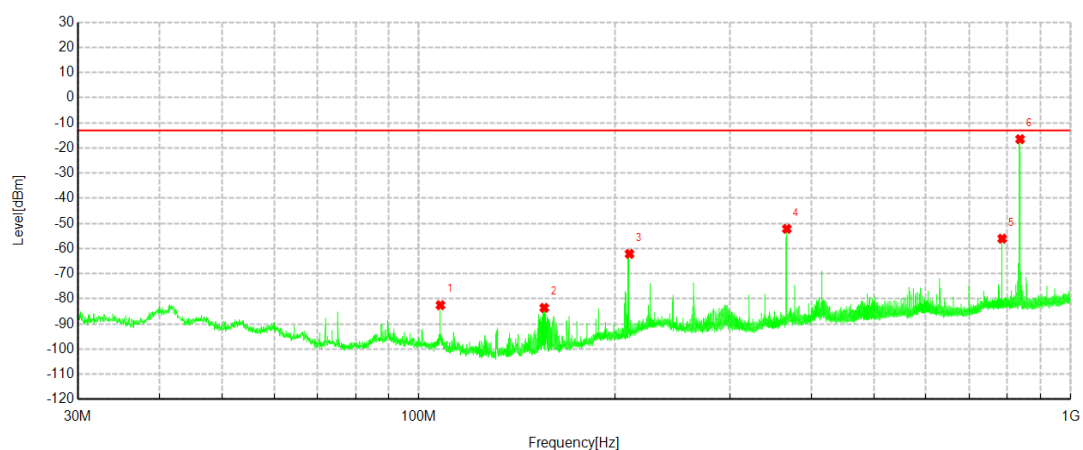

Suspected Data List


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	107.9880	-60.61	-82.52	-13.00	69.52	-21.91	RMS	Horizontal
2	155.8090	-61.21	-83.58	-13.00	70.58	-22.37	RMS	Horizontal
3	210.5655	-45.82	-62.13	-13.00	49.13	-16.31	RMS	Horizontal
4	367.0750	-40.60	-52.17	-13.00	39.17	-11.57	RMS	Horizontal
5	785.3875	-52.70	-56.07	-13.00	43.07	-3.37	RMS	Horizontal
6	836.6035	-12.76	-16.50	-13.00	3.50	-3.74	RMS	Horizontal

NOTE: NO.6 is the fundamental frequency signal.

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	190	Band:	GSM850
Mode:	GSM	Voltage:	DC 12V
Environment:	Temp: 25°C; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-15 07:58:43		

Test Graph

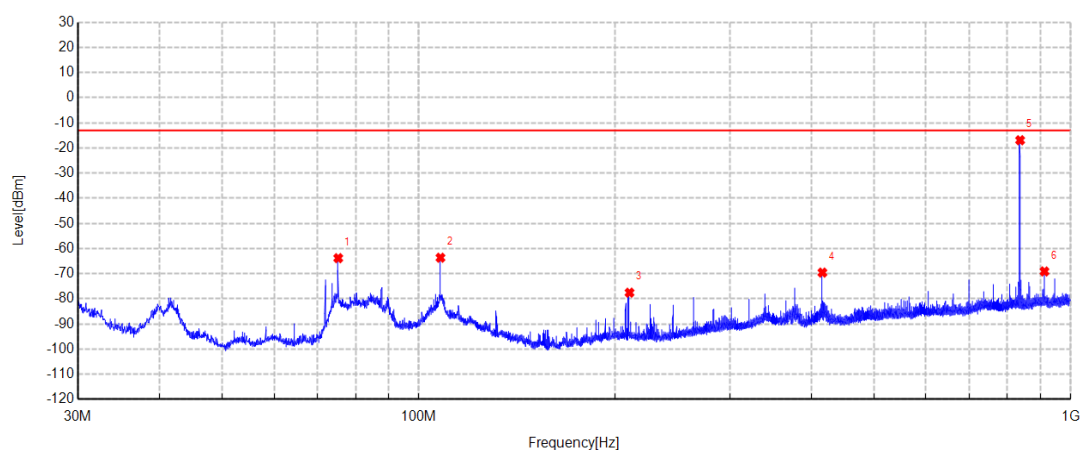

Suspected Data List


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	75.2505	-42.36	-63.82	-13.00	50.82	-21.46	RMS	Vertical
2	107.9880	-53.48	-63.64	-13.00	50.64	-10.16	RMS	Vertical
3	210.5655	-60.34	-77.54	-13.00	64.54	-17.20	RMS	Vertical
4	416.1570	-59.02	-69.56	-13.00	56.56	-10.54	RMS	Vertical
5	836.6035	-13.25	-16.92	-13.00	3.92	-3.67	RMS	Vertical
6	911.8270	-66.73	-69.10	-13.00	56.10	-2.37	RMS	Vertical

NOTE: NO.5 is the fundamental frequency signal.

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	251	Band:	GSM850
Mode:	GSM	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-15 08:03:12		

Test Graph

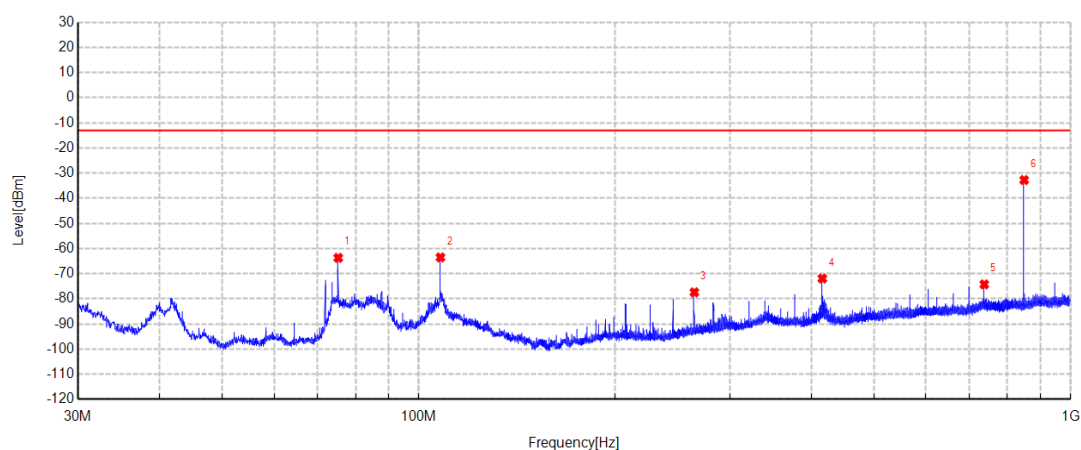

Suspected Data List


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	75.2505	-42.23	-63.69	-13.00	50.69	-21.46	RMS	Vertical
2	107.9880	-53.36	-63.52	-13.00	50.52	-10.16	RMS	Vertical
3	264.7400	-62.21	-77.40	-13.00	64.40	-15.19	RMS	Vertical
4	416.0600	-61.39	-71.93	-13.00	58.93	-10.54	RMS	Vertical
5	737.1300	-70.32	-74.24	-13.00	61.24	-3.92	RMS	Vertical
6	848.6315	-28.85	-32.74	-13.00	19.74	-3.89	RMS	Vertical

NOTE: NO.6 is the fundamental frequency signal.

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	251	Band:	GSM850
Mode:	GSM	Voltage:	DC 12V
Environment:	Temp: 25°C; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-15 08:09:44		

Test Graph

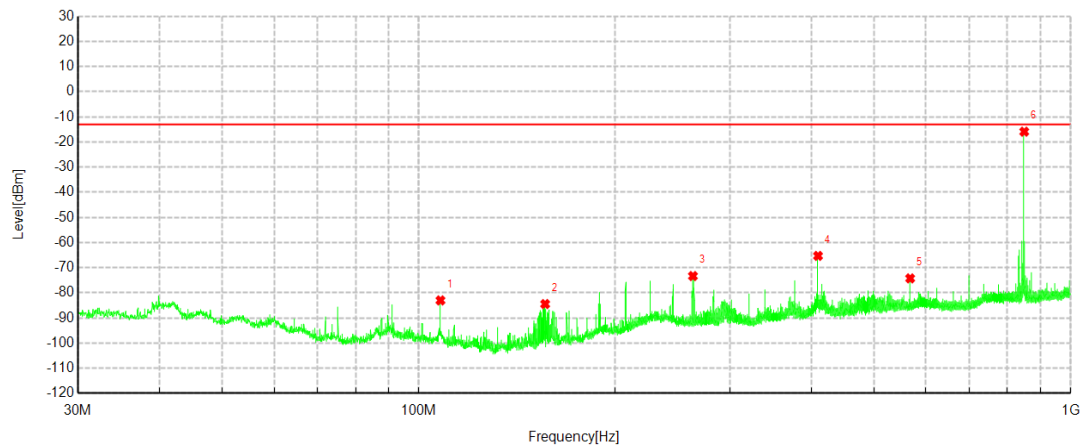

Suspected Data List


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	107.9880	-61.10	-83.01	-13.00	70.01	-21.91	RMS	Horizontal
2	156.2940	-62.10	-84.45	-13.00	71.45	-22.35	RMS	Horizontal
3	263.4305	-59.22	-73.32	-13.00	60.32	-14.10	RMS	Horizontal
4	409.7550	-55.41	-65.30	-13.00	52.30	-9.89	RMS	Horizontal
5	567.3800	-67.03	-74.25	-13.00	61.25	-7.22	RMS	Horizontal
6	848.8255	-12.46	-15.90	-13.00	2.90	-3.44	RMS	Horizontal

NOTE: NO.6 is the fundamental frequency signal.

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	512	Band:	GSM1900
Mode:	GSM	Voltage:	DC 12V
Environment:	Temp: 25°C; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-15 08:25:11		

Test Graph

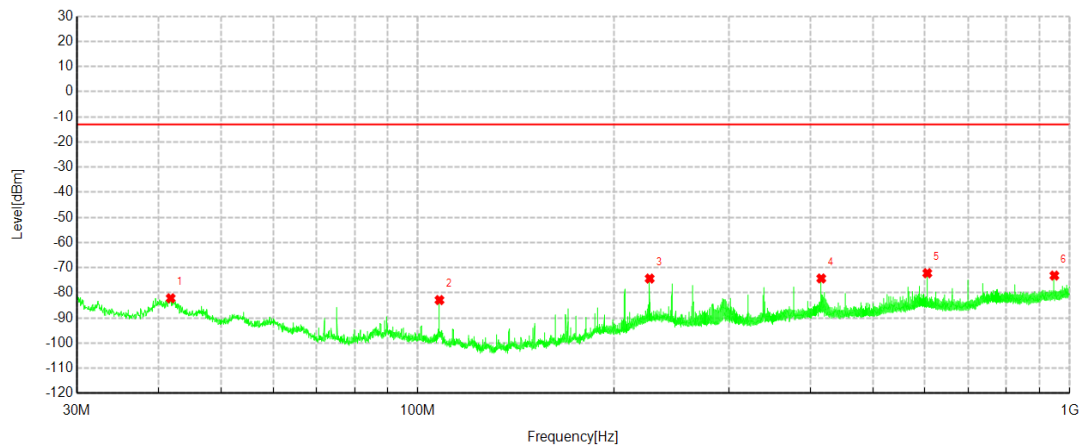


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	41.7855	-72.10	-82.16	-13.00	69.16	-10.06	RMS	Horizontal
2	107.9880	-60.96	-82.87	-13.00	69.87	-21.91	RMS	Horizontal
3	226.9100	-61.79	-74.32	-13.00	61.32	-12.53	RMS	Horizontal
4	415.9630	-64.35	-74.28	-13.00	61.28	-9.93	RMS	Horizontal
5	604.9675	-66.53	-72.19	-13.00	59.19	-5.66	RMS	Horizontal
6	947.6200	-71.05	-73.13	-13.00	60.13	-2.08	RMS	Horizontal

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	512	Band:	GSM1900
Mode:	GSM	Voltage:	DC 12V
Environment:	Temp: 25°C; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-15 08:26:25		

Test Graph

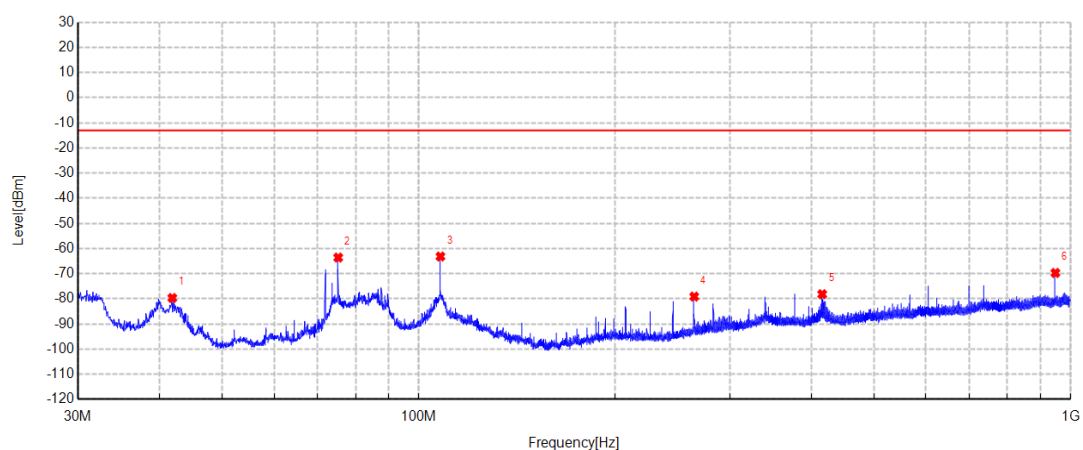


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	41.8825	-61.49	-79.66	-13.00	66.66	-18.17	RMS	Vertical
2	75.2505	-42.12	-63.58	-13.00	50.58	-21.46	RMS	Vertical
3	107.9880	-52.99	-63.15	-13.00	50.15	-10.16	RMS	Vertical
4	264.6430	-63.90	-79.10	-13.00	66.10	-15.20	RMS	Vertical
5	415.8660	-67.62	-78.16	-13.00	65.16	-10.54	RMS	Vertical
6	947.6200	-67.48	-69.69	-13.00	56.69	-2.21	RMS	Vertical

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	661	Band:	GSM1900
Mode:	GSM	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-15 08:31:01		

Test Graph

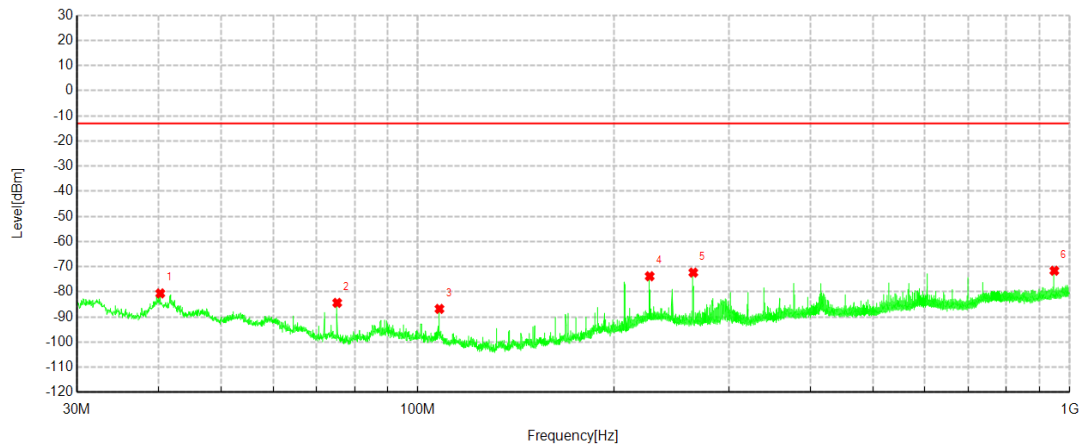


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	40.2820	-70.94	-80.62	-13.00	67.62	-9.68	RMS	Horizontal
2	75.2505	-63.26	-84.38	-13.00	71.38	-21.12	RMS	Horizontal
3	107.9880	-64.87	-86.78	-13.00	73.78	-21.91	RMS	Horizontal
4	226.9100	-61.28	-73.81	-13.00	60.81	-12.53	RMS	Horizontal
5	264.6915	-58.26	-72.34	-13.00	59.34	-14.08	RMS	Horizontal
6	947.5230	-69.53	-71.61	-13.00	58.61	-2.08	RMS	Horizontal

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	661	Band:	GSM1900
Mode:	GSM	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-15 08:32:15		

Test Graph

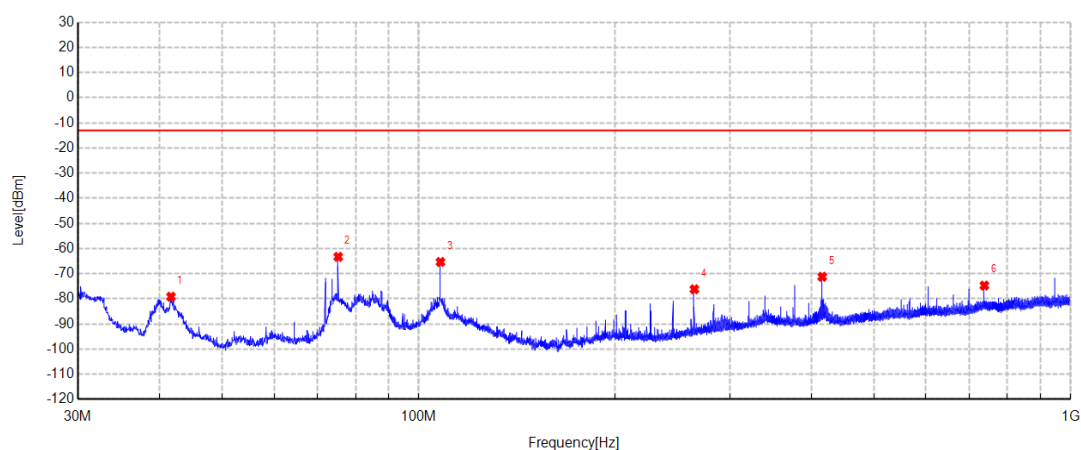


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	41.6885	-61.01	-79.14	-13.00	66.14	-18.13	RMS	Vertical
2	75.2505	-41.83	-63.29	-13.00	50.29	-21.46	RMS	Vertical
3	107.9880	-55.18	-65.34	-13.00	52.34	-10.16	RMS	Vertical
4	264.7885	-61.00	-76.19	-13.00	63.19	-15.19	RMS	Vertical
5	415.9145	-60.67	-71.21	-13.00	58.21	-10.54	RMS	Vertical
6	737.3725	-70.81	-74.72	-13.00	61.72	-3.91	RMS	Vertical

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	810	Band:	GSM1900
Mode:	GSM	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-15 08:35:30		

Test Graph

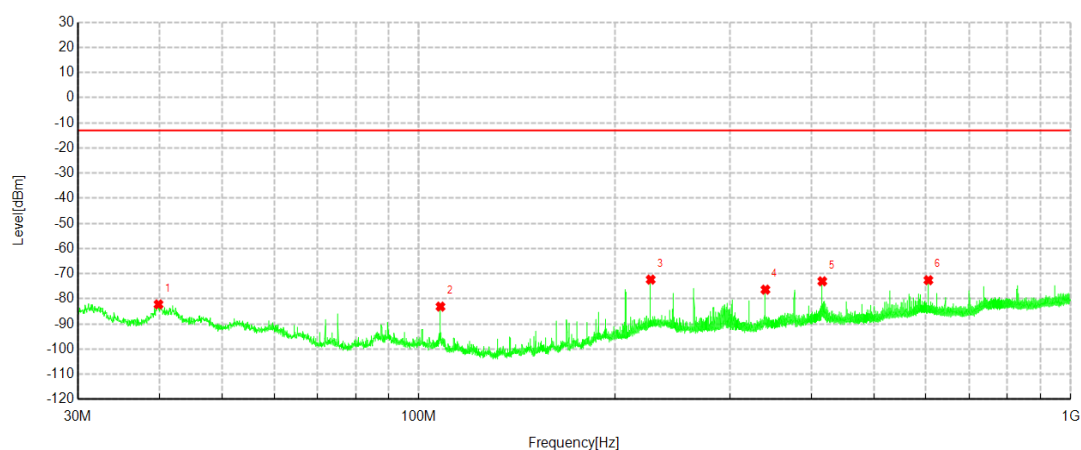


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	39.8940	-72.57	-82.21	-13.00	69.21	-9.64	RMS	Horizontal
2	107.9880	-61.18	-83.09	-13.00	70.09	-21.91	RMS	Horizontal
3	226.9100	-59.82	-72.35	-13.00	59.35	-12.53	RMS	Horizontal
4	340.3030	-63.56	-76.35	-13.00	63.35	-12.79	RMS	Horizontal
5	416.0600	-63.09	-73.02	-13.00	60.02	-9.93	RMS	Horizontal
6	605.1615	-66.91	-72.58	-13.00	59.58	-5.67	RMS	Horizontal

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	810	Band:	GSM1900
Mode:	GSM	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-15 08:36:44		

Test Graph

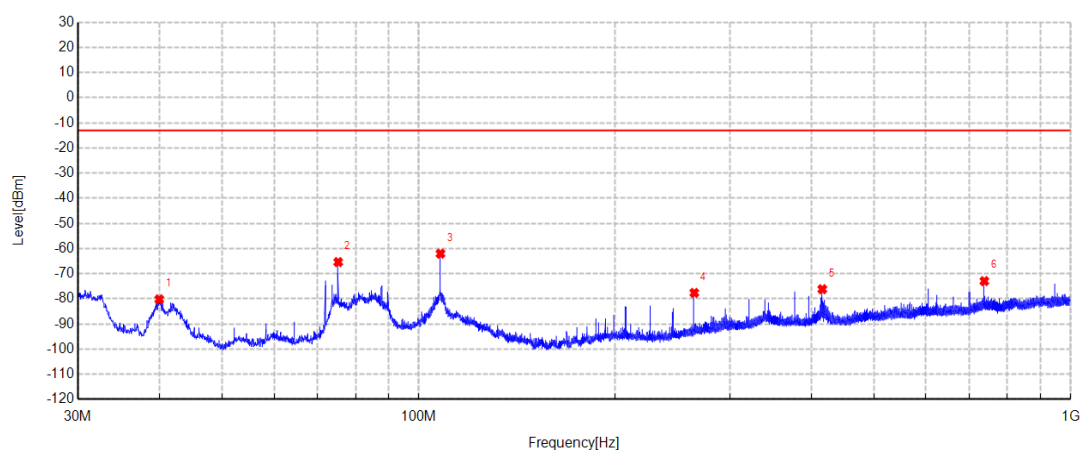


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	39.9910	-62.40	-80.19	-13.00	67.19	-17.79	RMS	Vertical
2	75.2505	-43.92	-65.38	-13.00	52.38	-21.46	RMS	Vertical
3	107.9880	-51.86	-62.02	-13.00	49.02	-10.16	RMS	Vertical
4	264.6915	-62.43	-77.62	-13.00	64.62	-15.19	RMS	Vertical
5	416.0115	-65.63	-76.17	-13.00	63.17	-10.54	RMS	Vertical
6	737.3725	-69.03	-72.94	-13.00	59.94	-3.91	RMS	Vertical

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	128	Band:	GSM850
Mode:	GSM	Voltage:	DC 12V
Environment:	Temp: 25°C; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-07 10:21:03		

Test Graph

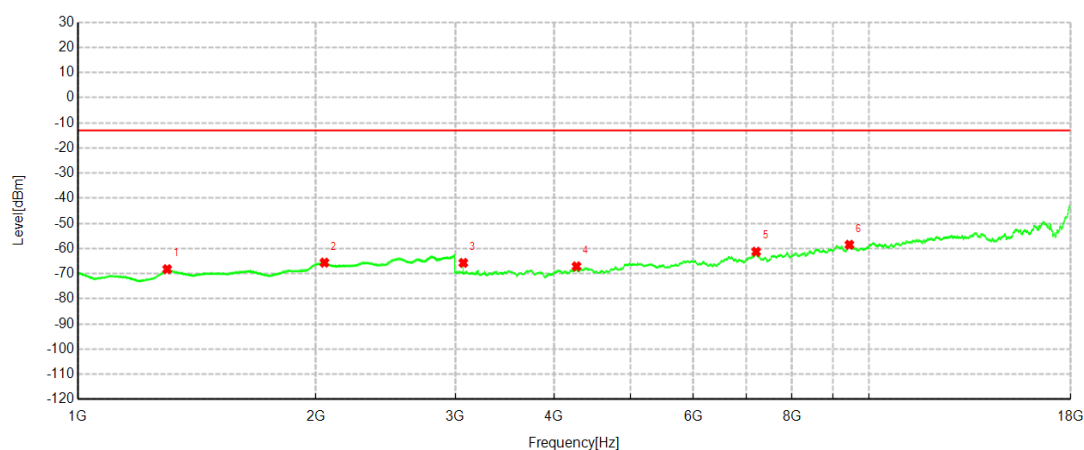


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1297.000	-72.28	-68.21	-13.00	55.21	4.07	RMS	Horizontal
2	2050.100	-71.29	-65.60	-13.00	52.60	5.69	RMS	Horizontal
3	3072.000	-59.22	-65.71	-13.00	52.71	-6.49	RMS	Horizontal
4	4270.500	-63.40	-67.09	-13.00	54.09	-3.69	RMS	Horizontal
5	7205.250	-67.43	-61.25	-13.00	48.25	6.18	RMS	Horizontal
6	9453.750	-69.56	-58.48	-13.00	45.48	11.08	RMS	Horizontal

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	128	Band:	GSM850
Mode:	GSM	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-07 10:23:26		

Test Graph

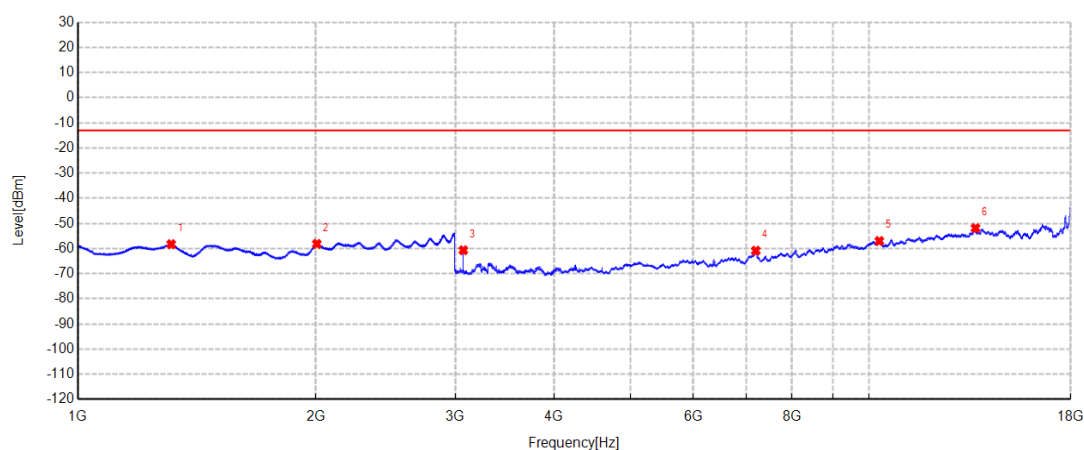


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1312.300	-62.21	-58.27	-13.00	45.27	3.94	RMS	Vertical
2	2005.300	-62.98	-58.15	-13.00	45.15	4.83	RMS	Vertical
3	3072.000	-53.88	-60.68	-13.00	47.68	-6.80	RMS	Vertical
4	7198.500	-67.67	-60.86	-13.00	47.86	6.81	RMS	Vertical
5	10314.00	-69.49	-57.00	-13.00	44.00	12.49	RMS	Vertical
6	13647.00	-68.92	-51.89	-13.00	38.89	17.03	RMS	Vertical

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	190	Band:	GSM850
Mode:	GSM	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-07 10:50:07		

Test Graph

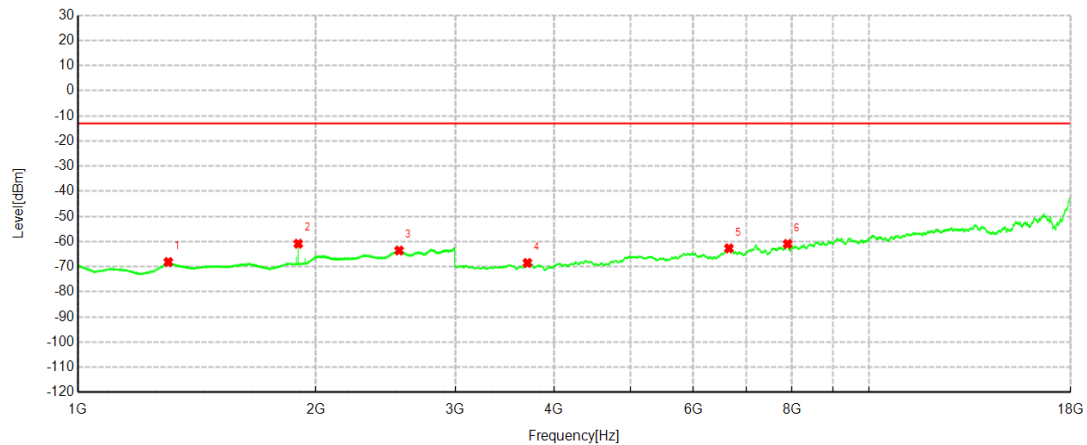


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1301.500	-72.35	-68.14	-13.00	55.14	4.21	RMS	Horizontal
2	1899.600	-64.27	-60.87	-13.00	47.87	3.40	RMS	Horizontal
3	2548.200	-69.97	-63.58	-13.00	50.58	6.39	RMS	Horizontal
4	3702.000	-63.13	-68.51	-13.00	55.51	-5.38	RMS	Horizontal
5	6656.250	-66.40	-62.72	-13.00	49.72	3.68	RMS	Horizontal
6	7896.000	-68.27	-60.96	-13.00	47.96	7.31	RMS	Horizontal

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	190	Band:	GSM850
Mode:	GSM	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-07 10:52:31		

Test Graph

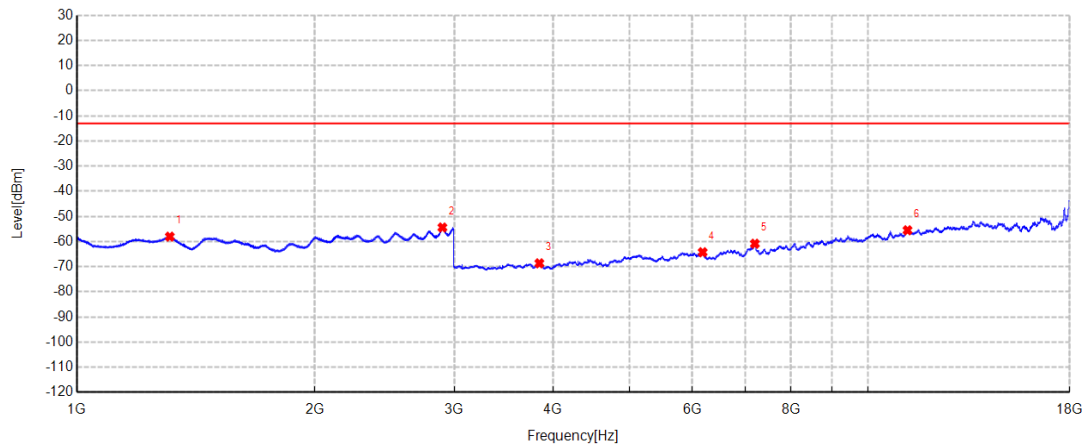


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1310.900	-62.04	-58.04	-13.00	45.04	4.00	RMS	Vertical
2	2898.900	-62.48	-54.41	-13.00	41.41	8.07	RMS	Vertical
3	3844.500	-64.09	-68.65	-13.00	55.65	-4.56	RMS	Vertical
4	6184.500	-65.57	-64.25	-13.00	51.25	1.32	RMS	Vertical
5	7200.000	-67.74	-60.86	-13.00	47.86	6.88	RMS	Vertical
6	11228.25	-70.29	-55.51	-13.00	42.51	14.78	RMS	Vertical

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	251	Band:	GSM850
Mode:	GSM	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-07 10:56:45		

Test Graph

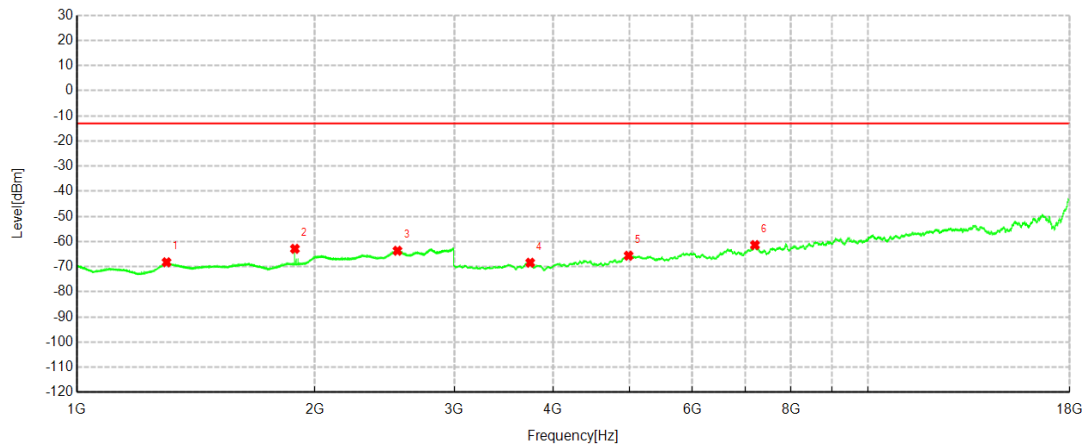


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1298.500	-72.39	-68.24	-13.00	55.24	4.15	RMS	Horizontal
2	1886.800	-66.40	-62.90	-13.00	49.90	3.50	RMS	Horizontal
3	2543.400	-70.04	-63.66	-13.00	50.66	6.38	RMS	Horizontal
4	3743.250	-62.94	-68.42	-13.00	55.42	-5.48	RMS	Horizontal
5	4984.500	-65.87	-65.62	-13.00	52.62	0.25	RMS	Horizontal
6	7201.500	-67.71	-61.39	-13.00	48.39	6.32	RMS	Horizontal

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	251	Band:	GSM850
Mode:	GSM	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-07 10:59:09		

Test Graph

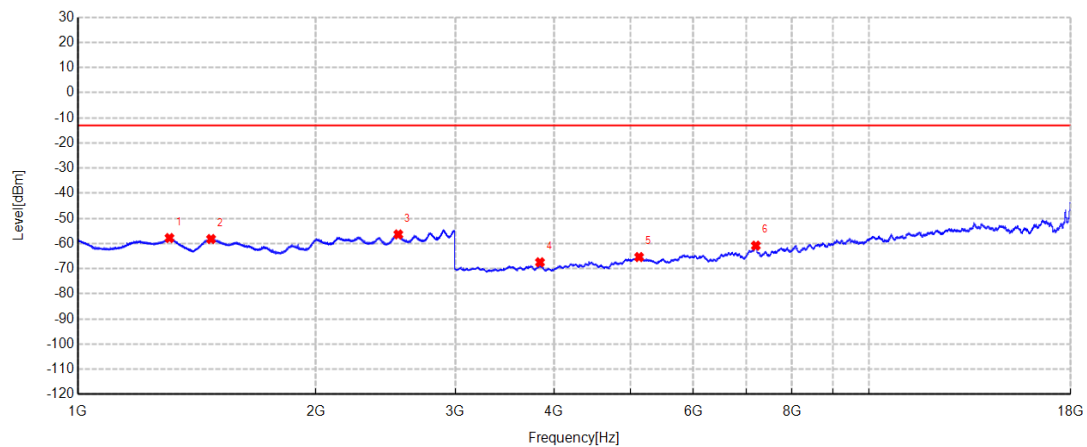


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1305.700	-62.00	-57.80	-13.00	44.80	4.20	RMS	Vertical
2	1473.800	-62.30	-58.21	-13.00	45.21	4.09	RMS	Vertical
3	2542.200	-62.46	-56.37	-13.00	43.37	6.09	RMS	Vertical
4	3840.000	-62.79	-67.45	-13.00	54.45	-4.66	RMS	Vertical
5	5124.750	-66.64	-65.38	-13.00	52.38	1.26	RMS	Vertical
6	7199.250	-67.67	-60.83	-13.00	47.83	6.84	RMS	Vertical

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	512	Band:	GSM1900
Mode:	GSM	Voltage:	DC 12V
Environment:	Temp: 25℃; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-07 11:50:22		

Test Graph

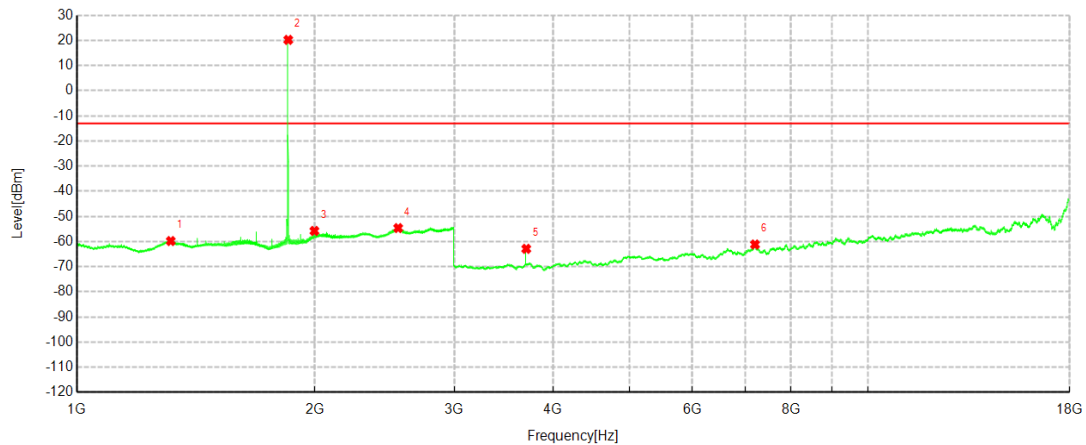

Suspected Data List


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1314.500	-70.45	-59.79	-13.00	46.79	10.66	RMS	Horizontal
2	1850.600	9.11	20.21	-13.00	-33.21	11.10	RMS	Horizontal
3	1997.000	-68.49	-55.78	-13.00	42.78	12.71	RMS	Horizontal
4	2548.500	-69.04	-54.64	-13.00	41.64	14.40	RMS	Horizontal
5	3700.500	-57.53	-62.90	-13.00	49.90	-5.37	RMS	Horizontal
6	7202.250	-67.47	-61.17	-13.00	48.17	6.30	RMS	Horizontal

NOTE: NO.2 is the fundamental frequency signal.

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	512	Band:	GSM1900
Mode:	GSM	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-07 11:52:48		

Test Graph

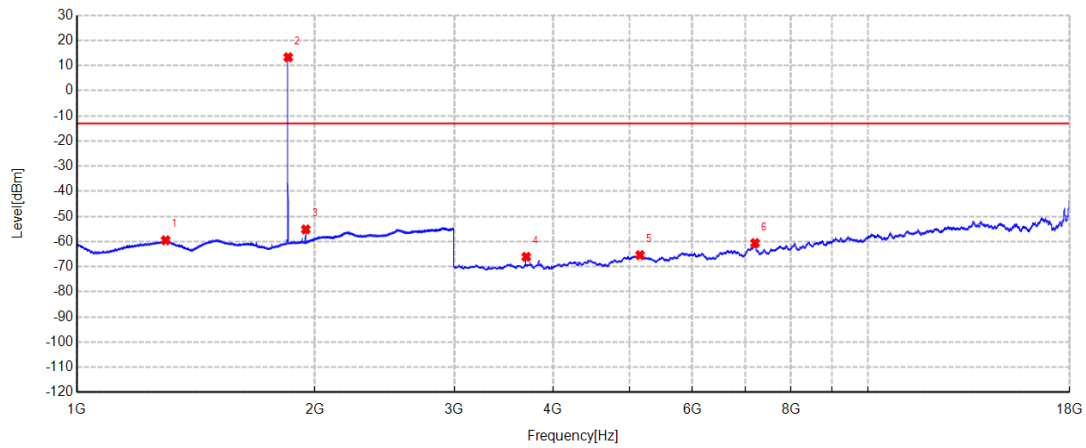

Suspected Data List


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1294.800	-70.41	-59.49	-13.00	46.49	10.92	RMS	Vertical
2	1850.300	2.16	13.29	-13.00	-26.29	11.13	RMS	Vertical
3	1947.700	-65.89	-55.17	-13.00	42.17	10.72	RMS	Vertical
4	3700.500	-60.23	-66.09	-13.00	53.09	-5.86	RMS	Vertical
5	5154.000	-66.96	-65.40	-13.00	52.40	1.56	RMS	Vertical
6	7203.750	-67.26	-60.60	-13.00	47.60	6.66	RMS	Vertical

NOTE: NO.2 is the fundamental frequency signal.

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	661	Band:	GSM1900
Mode:	GSM	Voltage:	DC 12V
Environment:	Temp: 25℃; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-07 11:43:50		

Test Graph

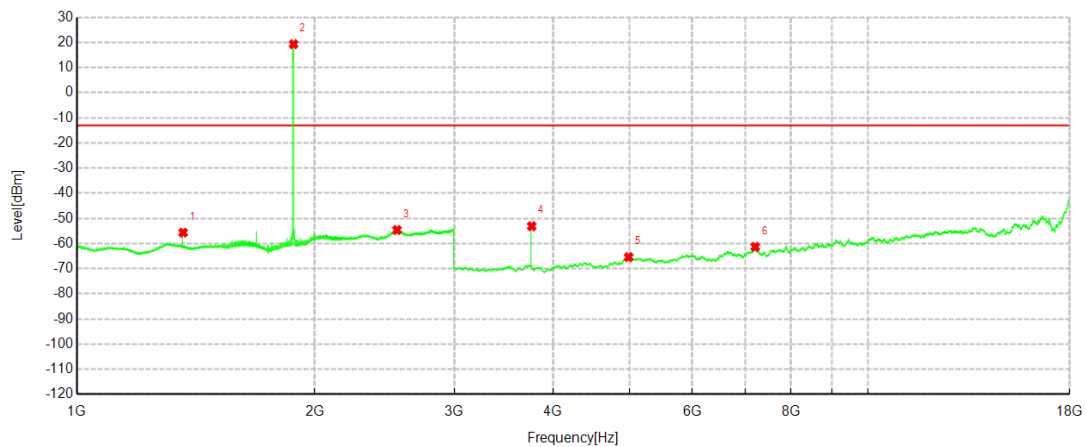

Suspected Data List


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1362.500	-65.69	-55.65	-13.00	42.65	10.04	RMS	Horizontal
2	1879.500	8.42	19.29	-13.00	-32.29	10.87	RMS	Horizontal
3	2539.900	-68.92	-54.61	-13.00	41.61	14.31	RMS	Horizontal
4	3759.750	-47.57	-53.10	-13.00	40.10	-5.53	RMS	Horizontal
5	4986.000	-65.67	-65.41	-13.00	52.41	0.26	RMS	Horizontal
6	7206.750	-67.43	-61.30	-13.00	48.30	6.13	RMS	Horizontal

NOTE: NO.2 is the fundamental frequency signal.

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	661	Band:	GSM1900
Mode:	GSM	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-07 11:46:16		

Test Graph

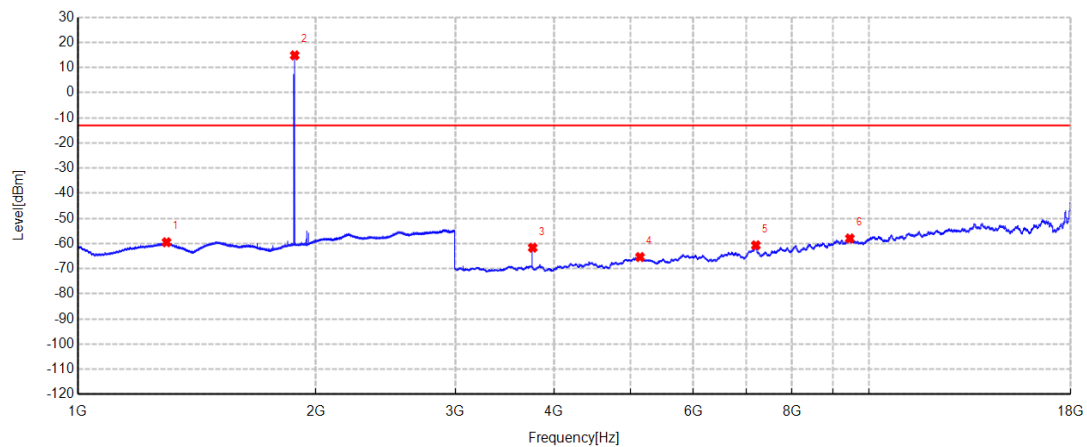

Suspected Data List


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1294.600	-70.40	-59.48	-13.00	46.48	10.92	RMS	Vertical
2	1880.100	3.74	14.85	-13.00	-27.85	11.11	RMS	Vertical
3	3759.750	-55.96	-61.65	-13.00	48.65	-5.69	RMS	Vertical
4	5138.250	-66.82	-65.37	-13.00	52.37	1.45	RMS	Vertical
5	7199.250	-67.54	-60.70	-13.00	47.70	6.84	RMS	Vertical
6	9465.000	-69.18	-57.97	-13.00	44.97	11.21	RMS	Vertical

NOTE: NO.2 is the fundamental frequency signal.

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	810	Band:	GSM1900
Mode:	GSM	Voltage:	DC 12V
Environment:	Temp: 25℃; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-07 11:37:38		

Test Graph

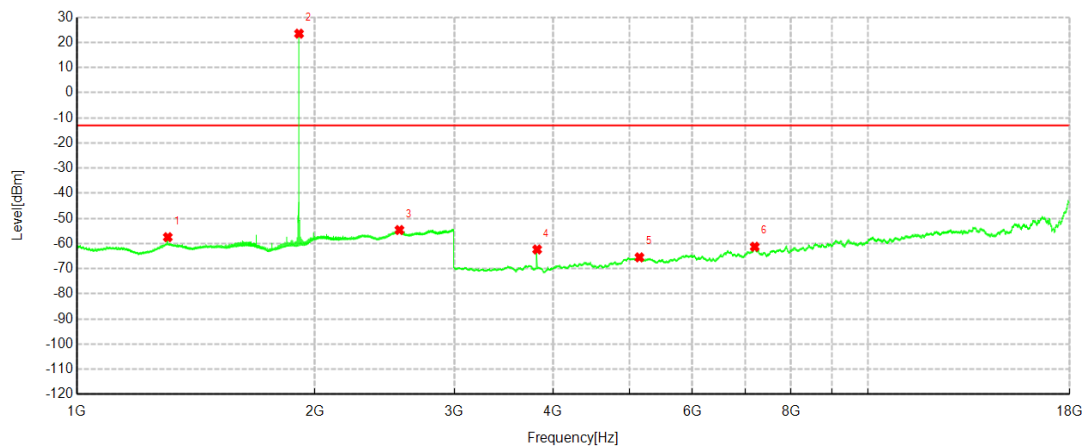

Suspected Data List


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1303.200	-68.25	-57.47	-13.00	44.47	10.78	RMS	Horizontal
2	1909.600	12.74	23.47	-13.00	-36.47	10.73	RMS	Horizontal
3	2558.000	-68.90	-54.62	-13.00	41.62	14.28	RMS	Horizontal
4	3819.750	-57.01	-62.36	-13.00	49.36	-5.35	RMS	Horizontal
5	5145.000	-66.65	-65.50	-13.00	52.50	1.15	RMS	Horizontal
6	7196.250	-67.48	-61.28	-13.00	48.28	6.20	RMS	Horizontal

NOTE: NO.2 is the fundamental frequency signal.

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	810	Band:	GSM1900
Mode:	GSM	Voltage:	DC 12V
Environment:	Temp: 25℃; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-07 11:40:04		

Test Graph

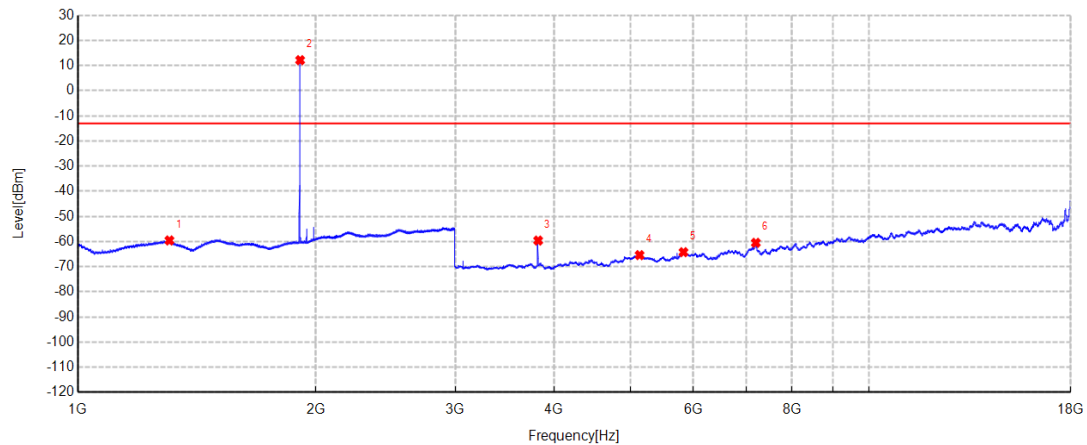

Suspected Data List


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1305.600	-70.39	-59.56	-13.00	46.56	10.83	RMS	Vertical
2	1910.100	1.13	12.14	-13.00	-25.14	11.01	RMS	Vertical
3	3819.750	-54.46	-59.60	-13.00	46.60	-5.14	RMS	Vertical
4	5132.250	-66.77	-65.40	-13.00	52.40	1.37	RMS	Vertical
5	5831.250	-65.64	-64.22	-13.00	51.22	1.42	RMS	Vertical
6	7199.250	-67.34	-60.50	-13.00	47.50	6.84	RMS	Vertical

NOTE: NO.2 is the fundamental frequency signal.

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	512	Band:	GSM1900
Mode:	GSM	Voltage:	DC 12V
Environment:	Temp: 25℃; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-18 15:00:11		

Test Graph

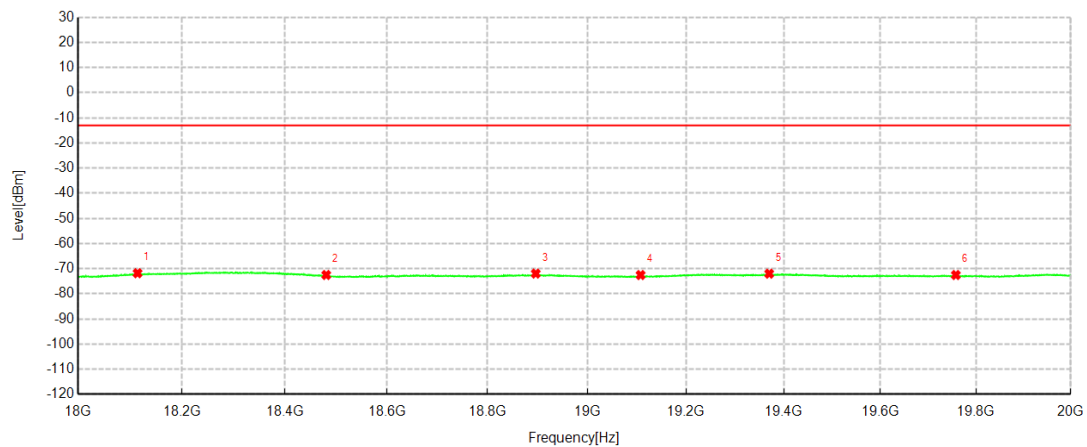


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	18114.40	-61.42	-71.79	-13.00	58.79	-10.37	RMS	Horizontal
2	18480.80	-61.03	-72.49	-13.00	59.49	-11.46	RMS	Horizontal
3	18896.30	-60.94	-71.94	-13.00	58.94	-11.00	RMS	Horizontal
4	19107.80	-61.49	-72.52	-13.00	59.52	-11.03	RMS	Horizontal
5	19370.40	-61.33	-71.98	-13.00	58.98	-10.65	RMS	Horizontal
6	19757.90	-62.72	-72.50	-13.00	59.50	-9.78	RMS	Horizontal

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	512	Band:	GSM1900
Mode:	GSM	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-18 15:01:24		

Test Graph

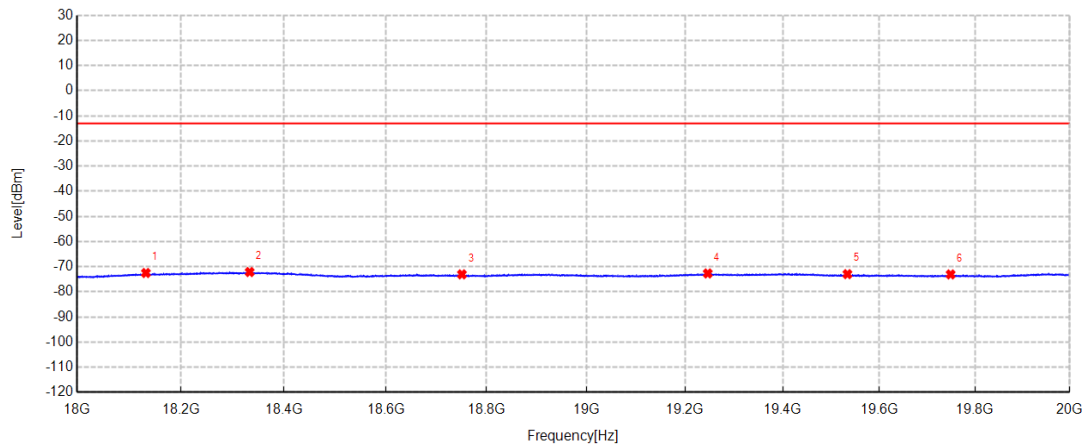


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	18132.40	-61.26	-72.50	-13.00	59.50	-11.24	RMS	Vertical
2	18333.20	-60.90	-72.12	-13.00	59.12	-11.22	RMS	Vertical
3	18750.80	-61.95	-73.03	-13.00	60.03	-11.08	RMS	Vertical
4	19246.50	-61.43	-72.68	-13.00	59.68	-11.25	RMS	Vertical
5	19533.90	-61.64	-72.95	-13.00	59.95	-11.31	RMS	Vertical
6	19749.00	-62.49	-73.06	-13.00	60.06	-10.57	RMS	Vertical

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	661	Band:	GSM1900
Mode:	GSM	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-18 15:03:26		

Test Graph

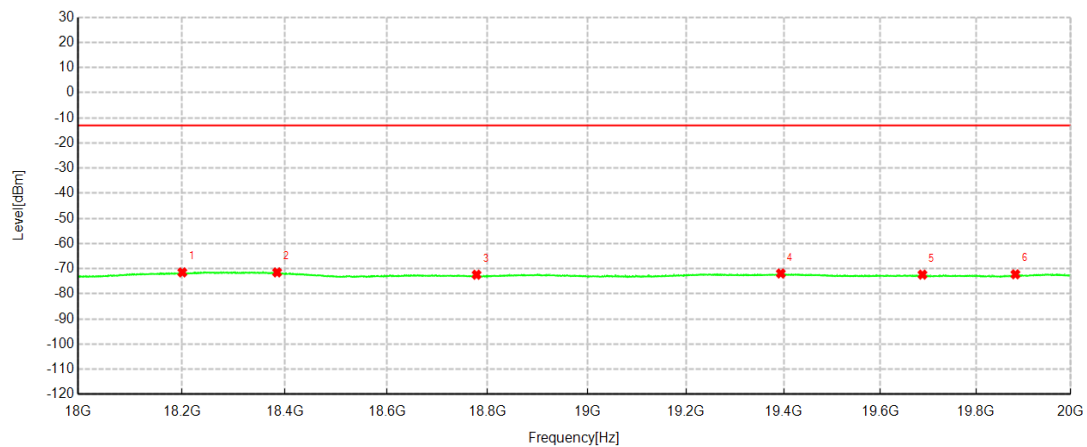


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	18200.70	-61.54	-71.47	-13.00	58.47	-9.93	RMS	Horizontal
2	18384.70	-60.73	-71.46	-13.00	58.46	-10.73	RMS	Horizontal
3	18778.00	-61.89	-72.39	-13.00	59.39	-10.50	RMS	Horizontal
4	19394.30	-61.22	-71.91	-13.00	58.91	-10.69	RMS	Horizontal
5	19688.00	-62.35	-72.36	-13.00	59.36	-10.01	RMS	Horizontal
6	19883.20	-62.14	-72.23	-13.00	59.23	-10.09	RMS	Horizontal

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	661	Band:	GSM1900
Mode:	GSM	Voltage:	DC 12V
Environment:	Temp: 25°C; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-18 15:04:38		

Test Graph

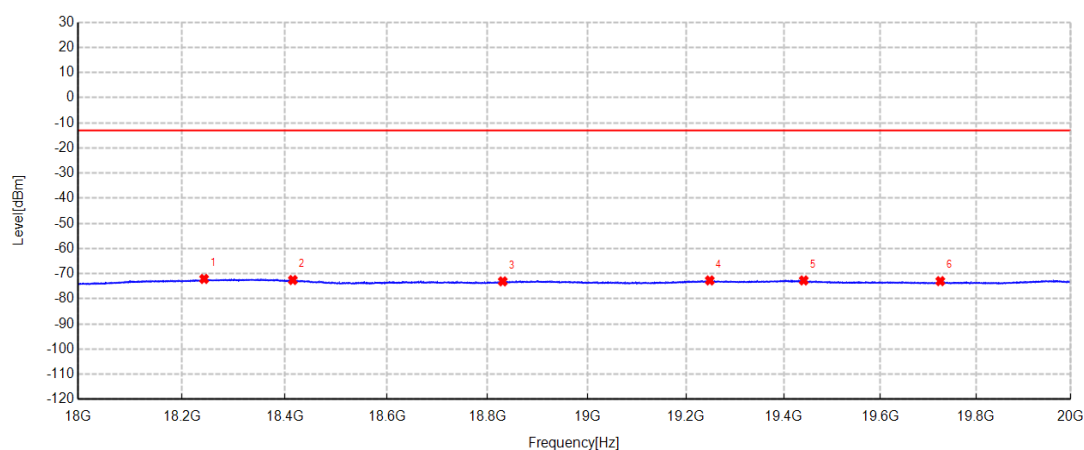


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	18242.80	-61.35	-72.08	-13.00	59.08	-10.73	RMS	Vertical
2	18415.40	-60.77	-72.51	-13.00	59.51	-11.74	RMS	Vertical
3	18830.30	-61.67	-73.05	-13.00	60.05	-11.38	RMS	Vertical
4	19248.60	-61.43	-72.67	-13.00	59.67	-11.24	RMS	Vertical
5	19441.50	-61.29	-72.68	-13.00	59.68	-11.39	RMS	Vertical
6	19725.30	-62.30	-72.95	-13.00	59.95	-10.65	RMS	Vertical

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	810	Band:	GSM1900
Mode:	GSM	Voltage:	DC 12V
Environment:	Temp: 25℃; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-18 15:06:58		

Test Graph

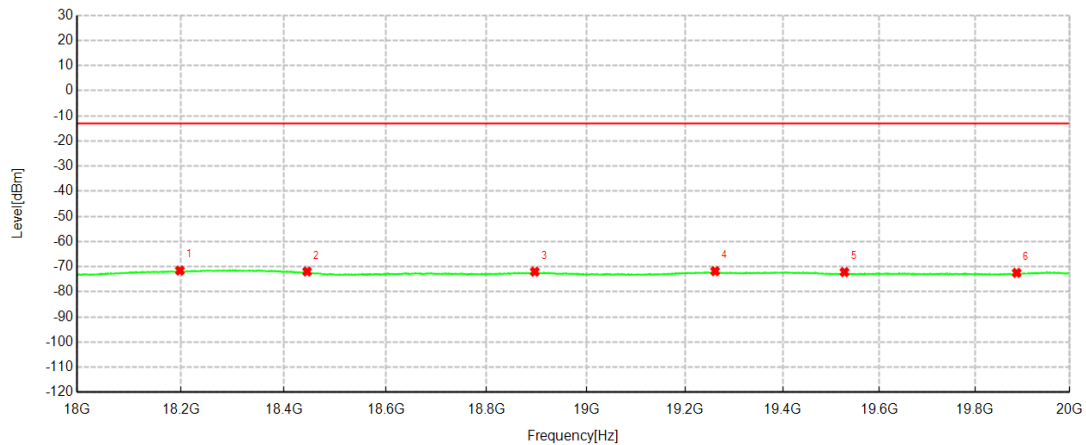


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	18197.90	-61.61	-71.55	-13.00	58.55	-9.94	RMS	Horizontal
2	18445.30	-60.71	-71.91	-13.00	58.91	-11.20	RMS	Horizontal
3	18896.30	-60.98	-71.98	-13.00	58.98	-11.00	RMS	Horizontal
4	19261.50	-61.29	-71.79	-13.00	58.79	-10.50	RMS	Horizontal
5	19527.80	-61.45	-72.15	-13.00	59.15	-10.70	RMS	Horizontal
6	19888.00	-62.35	-72.46	-13.00	59.46	-10.11	RMS	Horizontal

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	810	Band:	GSM1900
Mode:	GSM	Voltage:	DC 12V
Environment:	Temp: 25℃; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-18 15:08:11		

Test Graph

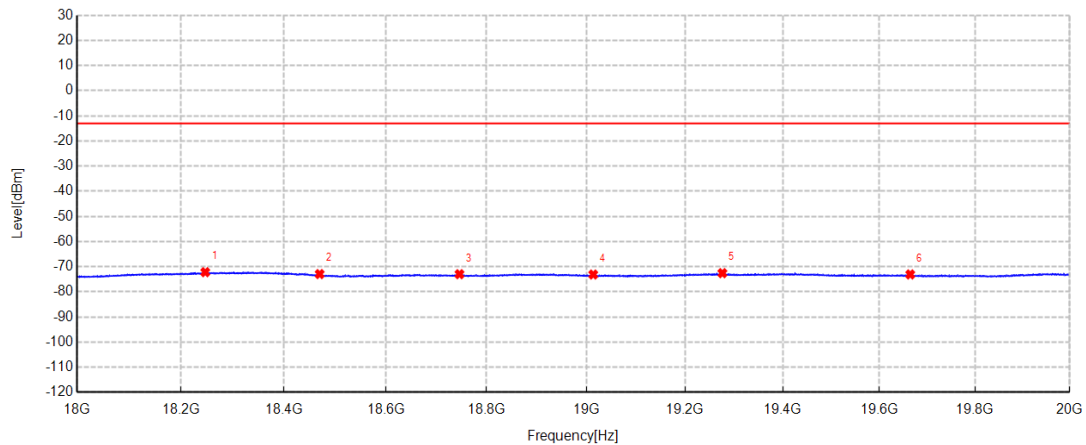


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	18247.00	-61.47	-72.18	-13.00	59.18	-10.71	RMS	Vertical
2	18469.90	-60.85	-72.93	-13.00	59.93	-12.08	RMS	Vertical
3	18746.00	-61.88	-72.97	-13.00	59.97	-11.09	RMS	Vertical
4	19014.00	-61.18	-73.11	-13.00	60.11	-11.93	RMS	Vertical
5	19276.40	-61.31	-72.57	-13.00	59.57	-11.26	RMS	Vertical
6	19664.60	-62.23	-73.08	-13.00	60.08	-10.85	RMS	Vertical

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	9263	Band:	BandII
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-16 02:18:33		

Test Graph

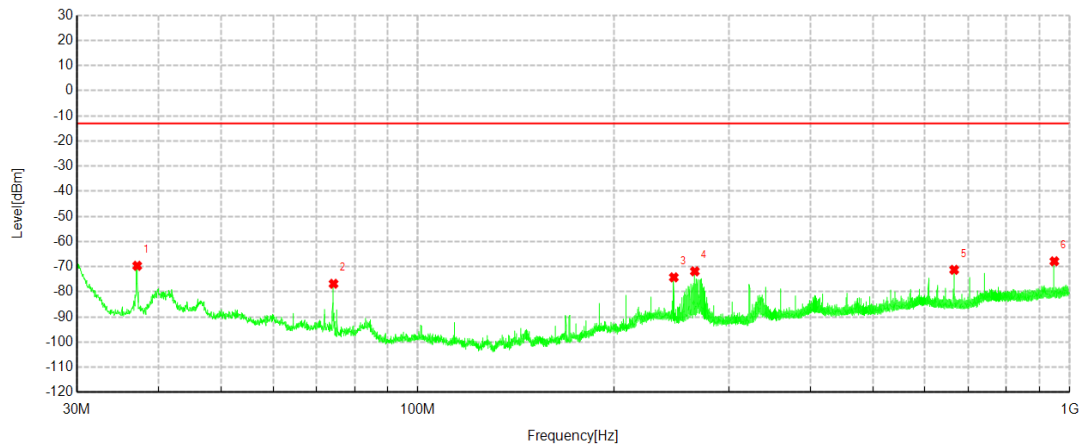


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	37.1295	-59.09	-69.65	-13.00	56.65	-10.56	RMS	Horizontal
2	74.2805	-55.99	-76.80	-13.00	63.80	-20.81	RMS	Horizontal
3	247.0860	-61.07	-74.24	-13.00	61.24	-13.17	RMS	Horizontal
4	266.1465	-57.80	-71.85	-13.00	58.85	-14.05	RMS	Horizontal
5	665.2045	-64.61	-71.25	-13.00	58.25	-6.64	RMS	Horizontal
6	947.5715	-65.77	-67.85	-13.00	54.85	-2.08	RMS	Horizontal

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	9263	Band:	BandII
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-16 02:19:47		

Test Graph

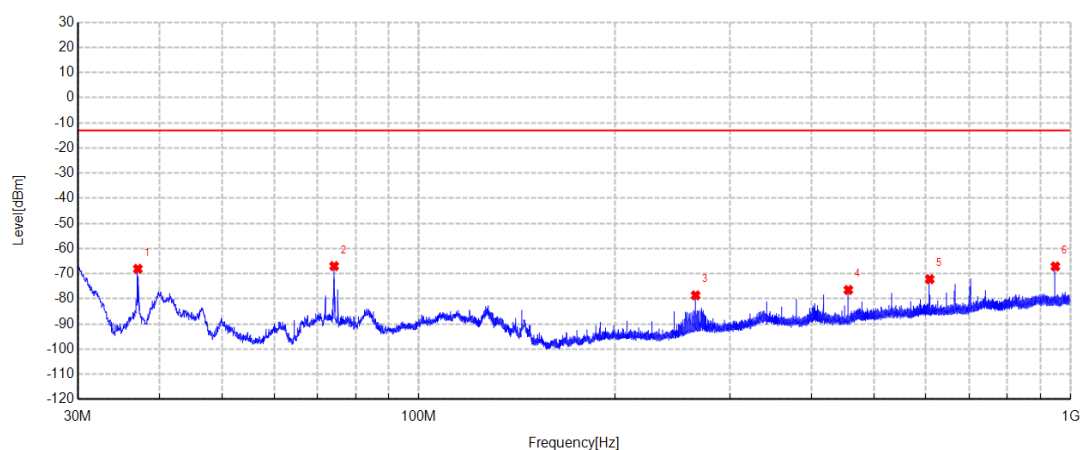


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	37.0810	-48.97	-68.07	-13.00	55.07	-19.10	RMS	Vertical
2	74.1835	-45.69	-66.98	-13.00	53.98	-21.29	RMS	Vertical
3	265.9525	-63.52	-78.62	-13.00	65.62	-15.10	RMS	Vertical
4	456.0725	-66.14	-76.46	-13.00	63.46	-10.32	RMS	Vertical
5	607.9745	-65.49	-72.19	-13.00	59.19	-6.70	RMS	Vertical
6	947.5715	-64.91	-67.12	-13.00	54.12	-2.21	RMS	Vertical

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	9400	Band:	BandII
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-16 02:23:17		

Test Graph

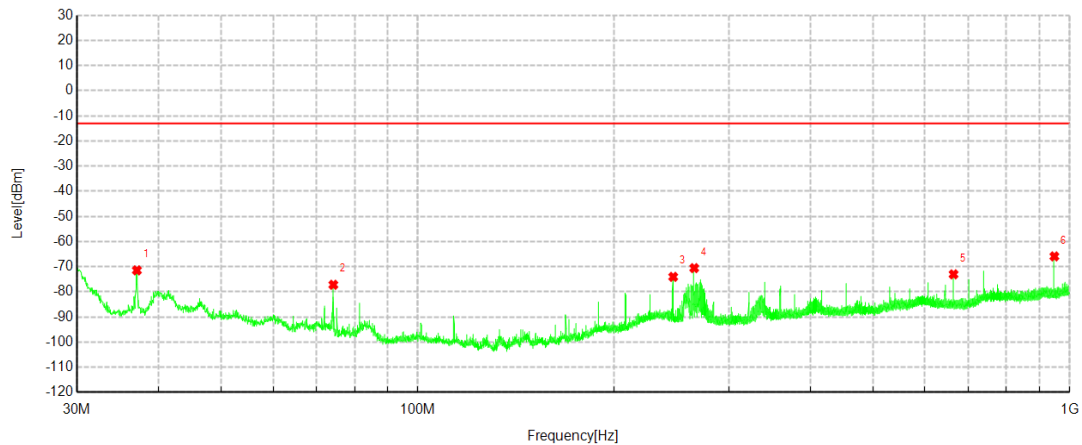


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	37.0810	-60.88	-71.45	-13.00	58.45	-10.57	RMS	Horizontal
2	74.2320	-56.39	-77.19	-13.00	64.19	-20.80	RMS	Horizontal
3	246.5525	-60.96	-74.03	-13.00	61.03	-13.07	RMS	Horizontal
4	265.5645	-56.51	-70.57	-13.00	57.57	-14.06	RMS	Horizontal
5	663.7010	-66.41	-73.03	-13.00	60.03	-6.62	RMS	Horizontal
6	947.6200	-63.82	-65.90	-13.00	52.90	-2.08	RMS	Horizontal

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	9400	Band:	BandII
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-16 02:24:31		

Test Graph

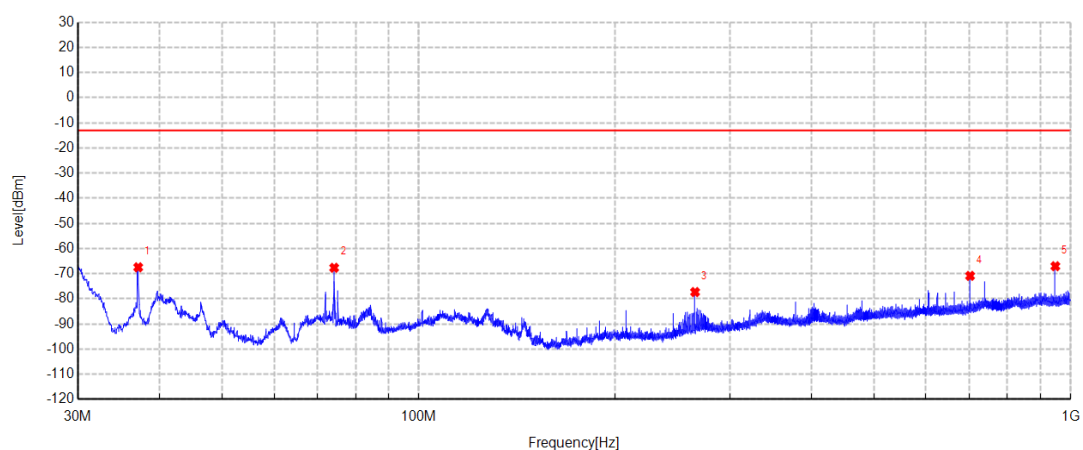


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	37.1295	-48.38	-67.46	-13.00	54.46	-19.08	RMS	Vertical
2	74.1835	-46.36	-67.65	-13.00	54.65	-21.29	RMS	Vertical
3	265.4190	-62.16	-77.30	-13.00	64.30	-15.14	RMS	Vertical
4	701.1915	-64.91	-70.86	-13.00	57.86	-5.95	RMS	Vertical
5	947.5715	-64.81	-67.02	-13.00	54.02	-2.21	RMS	Vertical

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	9537	Band:	BandII
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-16 02:27:04		

Test Graph

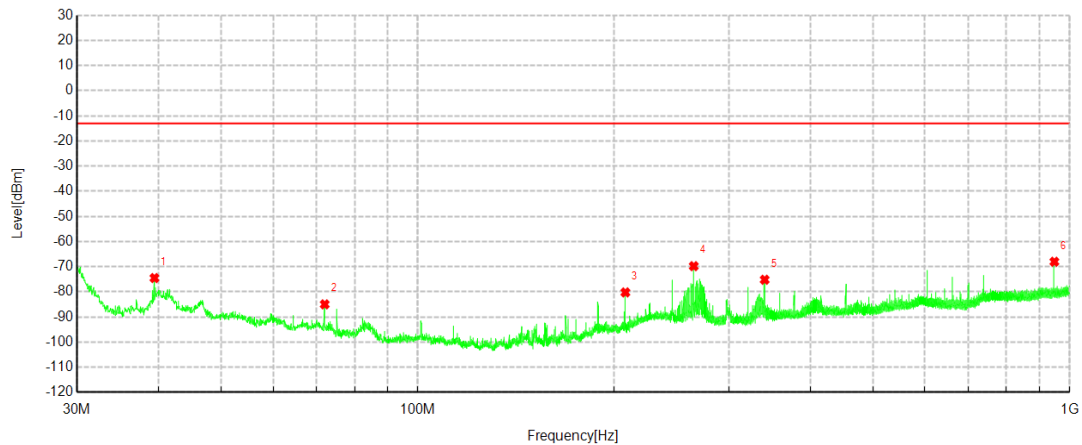


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	39.4575	-64.72	-74.51	-13.00	61.51	-9.79	RMS	Horizontal
2	72.0010	-64.88	-84.97	-13.00	71.97	-20.09	RMS	Horizontal
3	208.2375	-63.58	-80.22	-13.00	67.22	-16.64	RMS	Horizontal
4	265.1280	-55.71	-69.78	-13.00	56.78	-14.07	RMS	Horizontal
5	340.5940	-62.40	-75.18	-13.00	62.18	-12.78	RMS	Horizontal
6	947.6200	-65.94	-68.02	-13.00	55.02	-2.08	RMS	Horizontal

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	9537	Band:	BandII
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-16 02:28:18		

Test Graph

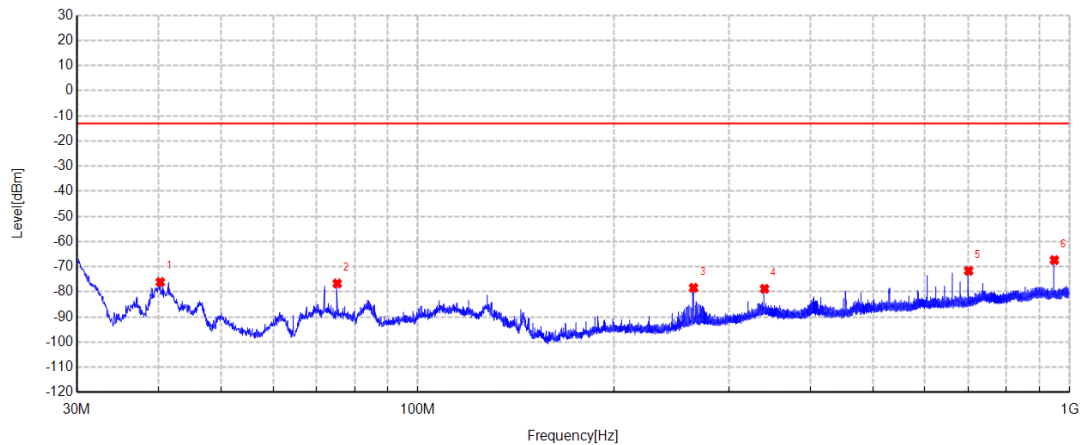


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	40.2820	-58.27	-76.12	-13.00	63.12	-17.85	RMS	Vertical
2	75.2505	-55.21	-76.67	-13.00	63.67	-21.46	RMS	Vertical
3	264.9340	-63.23	-78.40	-13.00	65.40	-15.17	RMS	Vertical
4	340.4485	-68.34	-78.79	-13.00	65.79	-10.45	RMS	Vertical
5	700.0275	-65.64	-71.65	-13.00	58.65	-6.01	RMS	Vertical
6	947.5715	-65.17	-67.38	-13.00	54.38	-2.21	RMS	Vertical

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	1313	Band:	BandIV
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-16 02:31:06		

Test Graph

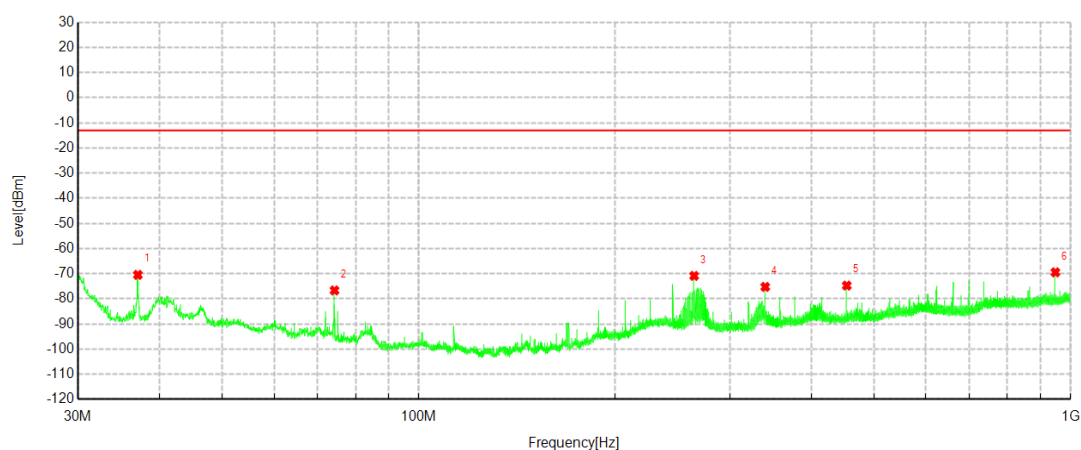


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	37.0810	-59.90	-70.47	-13.00	57.47	-10.57	RMS	Horizontal
2	74.2805	-55.84	-76.65	-13.00	63.65	-20.81	RMS	Horizontal
3	264.5460	-56.79	-70.87	-13.00	57.87	-14.08	RMS	Horizontal
4	340.0605	-62.45	-75.24	-13.00	62.24	-12.79	RMS	Horizontal
5	453.5505	-64.84	-74.73	-13.00	61.73	-9.89	RMS	Horizontal
6	947.6685	-67.37	-69.45	-13.00	56.45	-2.08	RMS	Horizontal

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	1313	Band:	BandIV
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-16 02:32:20		

Test Graph

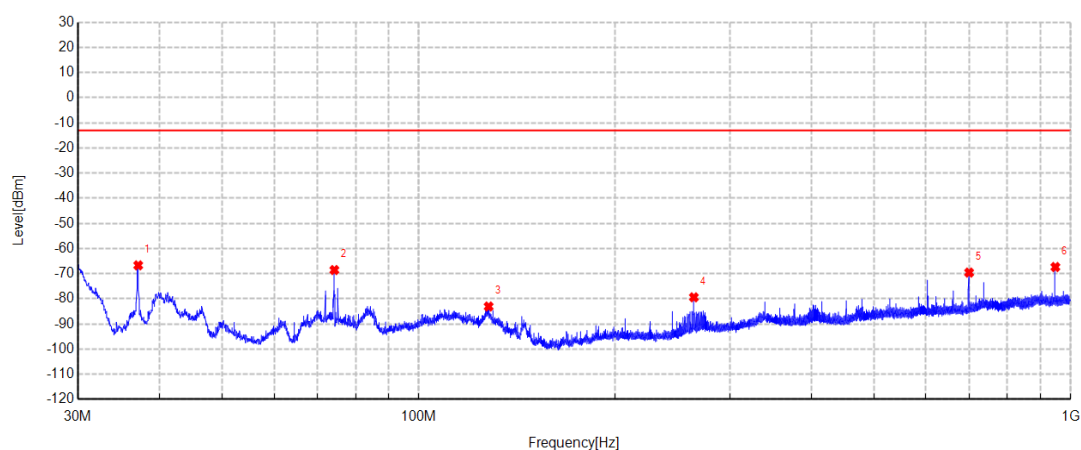


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	37.1295	-47.59	-66.67	-13.00	53.67	-19.08	RMS	Vertical
2	74.2320	-47.25	-68.55	-13.00	55.55	-21.30	RMS	Vertical
3	128.0185	-68.14	-83.05	-13.00	70.05	-14.91	RMS	Vertical
4	264.3035	-64.17	-79.39	-13.00	66.39	-15.22	RMS	Vertical
5	698.7180	-63.52	-69.56	-13.00	56.56	-6.04	RMS	Vertical
6	947.6200	-65.14	-67.35	-13.00	54.35	-2.21	RMS	Vertical

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	1450	Band:	BandIV
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-16 02:34:51		

Test Graph

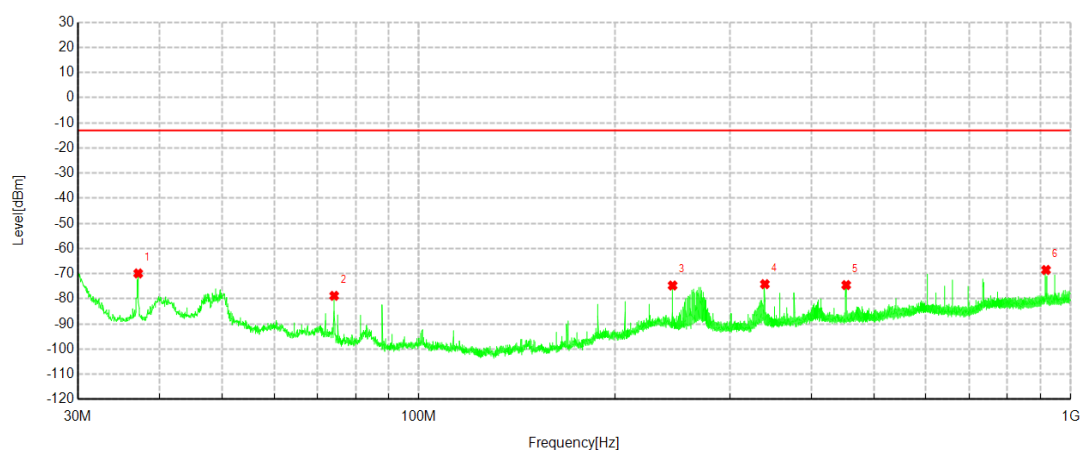


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	37.1295	-59.33	-69.89	-13.00	56.89	-10.56	RMS	Horizontal
2	74.1835	-58.02	-78.80	-13.00	65.80	-20.78	RMS	Horizontal
3	245.1460	-61.90	-74.70	-13.00	61.70	-12.80	RMS	Horizontal
4	339.6240	-61.34	-74.16	-13.00	61.16	-12.82	RMS	Horizontal
5	452.6290	-64.63	-74.52	-13.00	61.52	-9.89	RMS	Horizontal
6	916.8225	-66.07	-68.52	-13.00	55.52	-2.45	RMS	Horizontal

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	1450	Band:	BandIV
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-16 02:36:05		

Test Graph

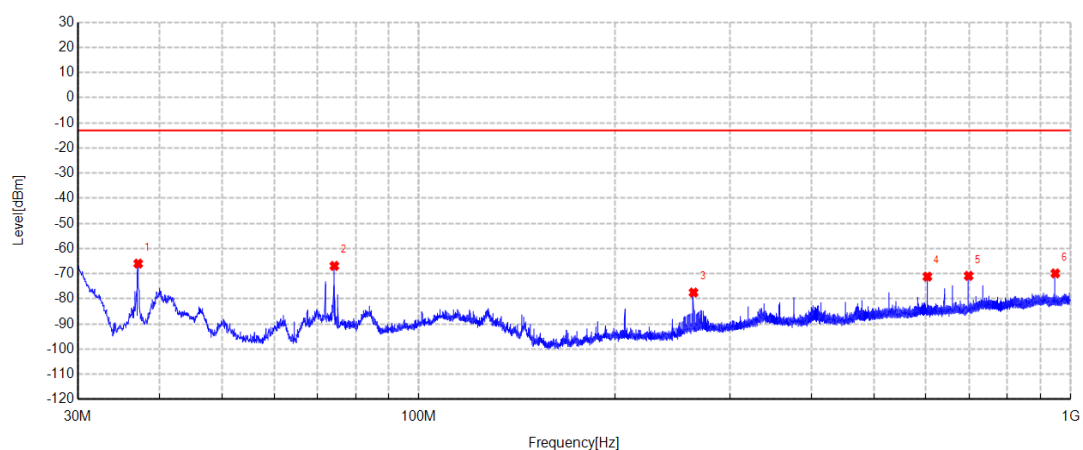


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	37.1295	-46.91	-65.99	-13.00	52.99	-19.08	RMS	Vertical
2	74.2320	-45.61	-66.91	-13.00	53.91	-21.30	RMS	Vertical
3	263.9640	-62.25	-77.49	-13.00	64.49	-15.24	RMS	Vertical
4	603.0275	-64.67	-71.16	-13.00	58.16	-6.49	RMS	Vertical
5	697.5540	-64.79	-70.85	-13.00	57.85	-6.06	RMS	Vertical
6	947.5230	-67.67	-69.88	-13.00	56.88	-2.21	RMS	Vertical

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	1512	Band:	BandIV
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-16 02:39:50		

Test Graph

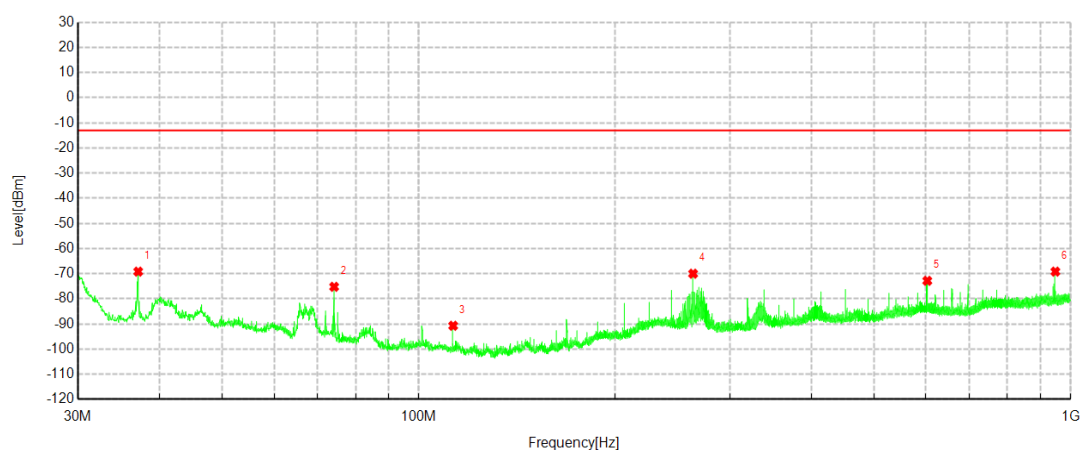


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	37.1295	-58.61	-69.17	-13.00	56.17	-10.56	RMS	Horizontal
2	74.1835	-54.43	-75.21	-13.00	62.21	-20.78	RMS	Horizontal
3	112.9350	-68.25	-90.71	-13.00	77.71	-22.46	RMS	Horizontal
4	263.5760	-55.90	-70.00	-13.00	57.00	-14.10	RMS	Horizontal
5	602.7850	-67.22	-72.83	-13.00	59.83	-5.61	RMS	Horizontal
6	947.6200	-67.09	-69.17	-13.00	56.17	-2.08	RMS	Horizontal

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	1512	Band:	BandIV
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-16 02:41:04		

Test Graph

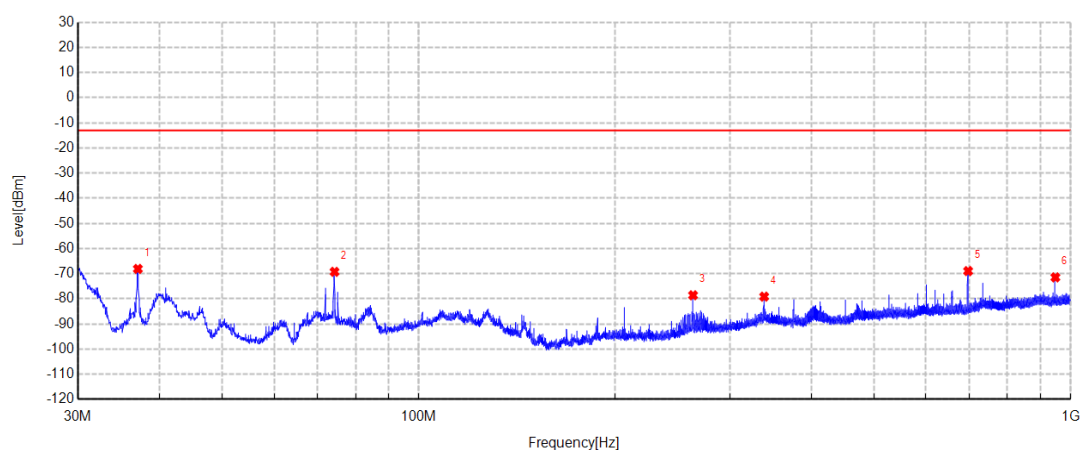


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	37.0810	-48.99	-68.09	-13.00	55.09	-19.10	RMS	Vertical
2	74.2805	-47.94	-69.25	-13.00	56.25	-21.31	RMS	Vertical
3	263.5275	-63.30	-78.58	-13.00	65.58	-15.28	RMS	Vertical
4	338.7510	-68.55	-79.12	-13.00	66.12	-10.57	RMS	Vertical
5	696.2445	-62.86	-68.95	-13.00	55.95	-6.09	RMS	Vertical
6	947.6200	-69.25	-71.46	-13.00	58.46	-2.21	RMS	Vertical

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	4133	Band:	BandV
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-16 02:43:46		

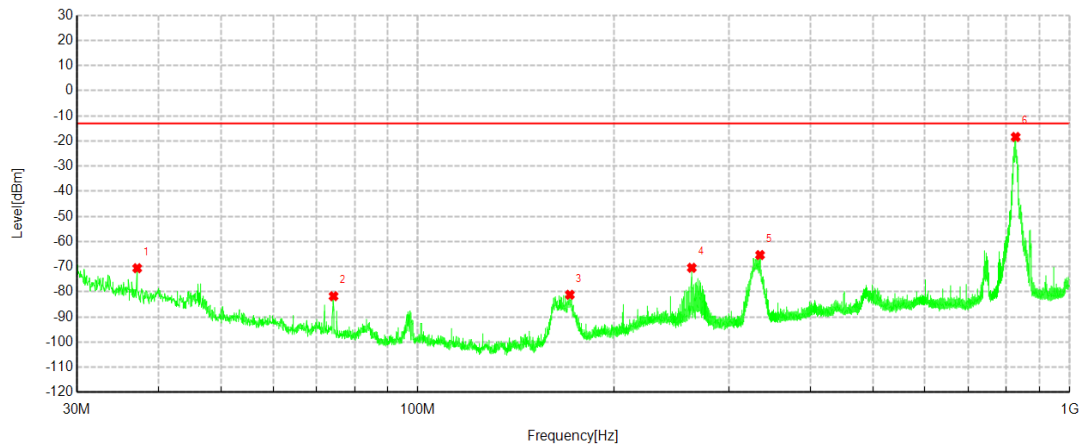Test Graph**Suspected Data List**


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	37.1295	-60.04	-70.60	-13.00	57.60	-10.56	RMS	Horizontal
2	74.2805	-60.94	-81.75	-13.00	68.75	-20.81	RMS	Horizontal
3	171.1350	-60.52	-81.16	-13.00	68.16	-20.64	RMS	Horizontal
4	263.2850	-56.34	-70.44	-13.00	57.44	-14.10	RMS	Horizontal
5	335.0650	-52.14	-65.36	-13.00	52.36	-13.22	RMS	Horizontal
6	826.5640	-14.66	-18.41	-13.00	5.41	-3.75	RMS	Horizontal

NOTE: NO.6 is the fundamental frequency signal.

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	4133	Band:	BandV
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-16 02:45:00		

Test Graph

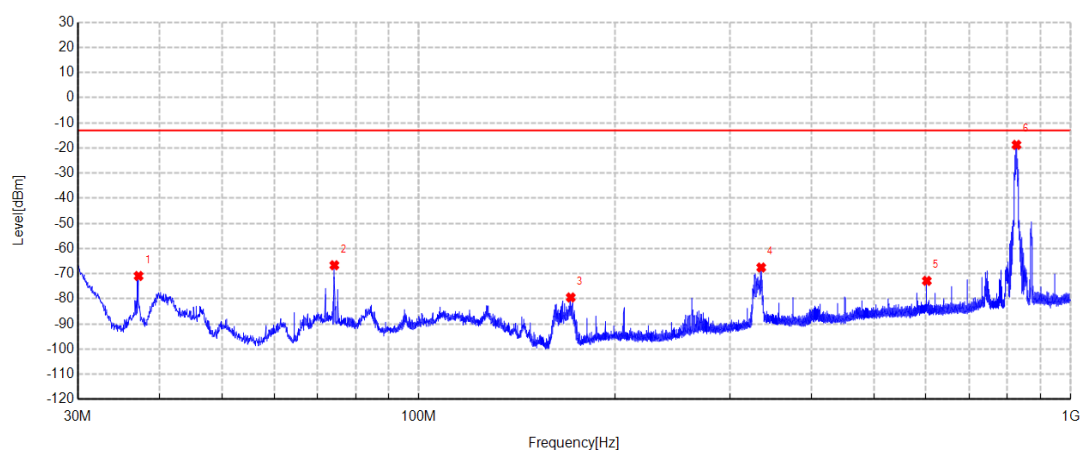

Suspected Data List


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	37.1780	-51.86	-70.91	-13.00	57.91	-19.05	RMS	Vertical
2	74.2320	-45.34	-66.64	-13.00	53.64	-21.30	RMS	Vertical
3	171.0865	-59.96	-79.45	-13.00	66.45	-19.49	RMS	Vertical
4	335.2590	-56.59	-67.53	-13.00	54.53	-10.94	RMS	Vertical
5	601.7665	-66.42	-72.85	-13.00	59.85	-6.43	RMS	Vertical
6	826.0790	-15.21	-18.77	-13.00	5.77	-3.56	RMS	Vertical

NOTE: NO.6 is the fundamental frequency signal.

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	4175	Band:	BandV
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-16 02:47:41		

Test Graph

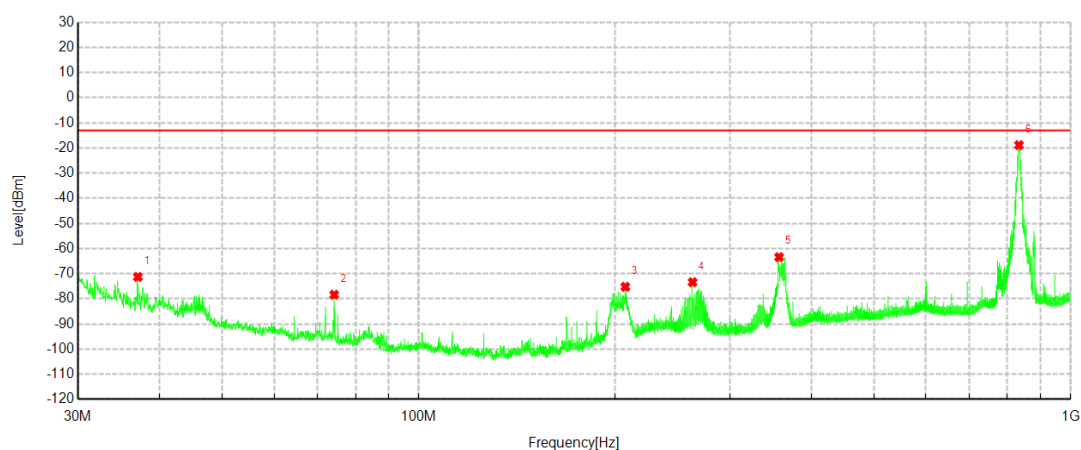

Suspected Data List


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	37.0810	-60.72	-71.29	-13.00	58.29	-10.57	RMS	Horizontal
2	74.1835	-57.60	-78.38	-13.00	65.38	-20.78	RMS	Horizontal
3	207.4615	-58.51	-75.22	-13.00	62.22	-16.71	RMS	Horizontal
4	263.0910	-59.29	-73.39	-13.00	60.39	-14.10	RMS	Horizontal
5	357.0840	-51.26	-63.41	-13.00	50.41	-12.15	RMS	Horizontal
6	833.3055	-15.12	-18.87	-13.00	5.87	-3.75	RMS	Horizontal

NOTE: NO.6 is the fundamental frequency signal.

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	4175	Band:	BandV
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-16 02:48:54		

Test Graph

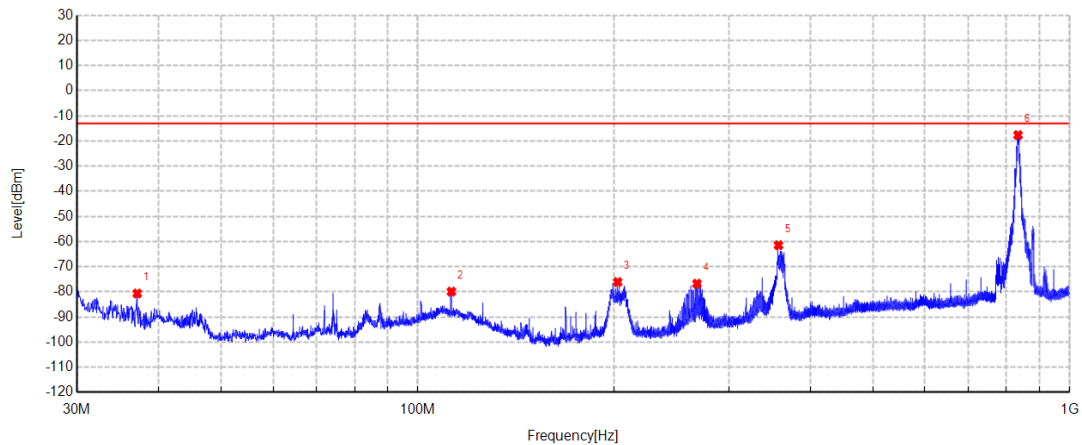

Suspected Data List


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	37.1295	-61.57	-80.65	-13.00	67.65	-19.08	RMS	Vertical
2	112.6440	-69.88	-79.90	-13.00	66.90	-10.02	RMS	Vertical
3	202.6600	-58.94	-76.11	-13.00	63.11	-17.17	RMS	Vertical
4	268.1350	-61.81	-76.75	-13.00	63.75	-14.94	RMS	Vertical
5	357.6660	-50.42	-61.46	-13.00	48.46	-11.04	RMS	Vertical
6	833.4995	-14.09	-17.65	-13.00	4.65	-3.56	RMS	Vertical

NOTE: NO.6 is the fundamental frequency signal.

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	4232	Band:	BandV
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-16 02:51:19		

Test Graph

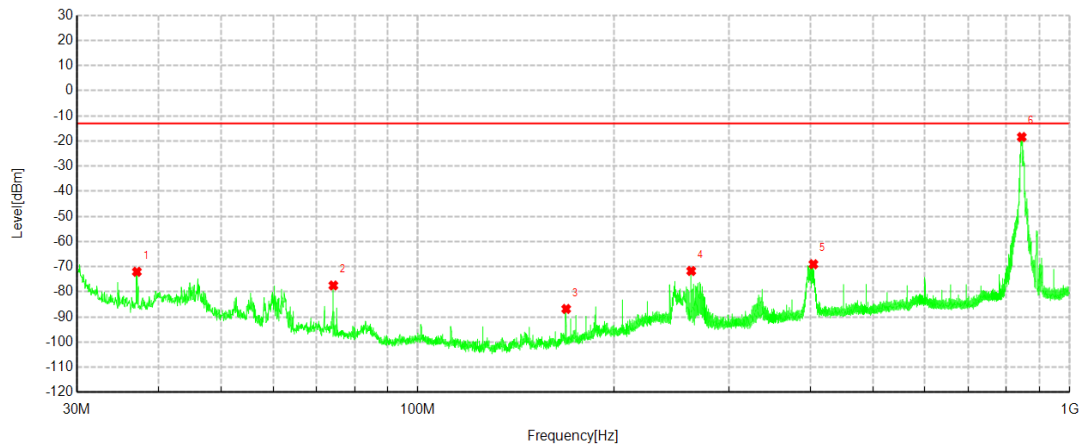

Suspected Data List


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	37.0810	-61.45	-72.02	-13.00	59.02	-10.57	RMS	Horizontal
2	74.2320	-56.67	-77.47	-13.00	64.47	-20.80	RMS	Horizontal
3	168.9525	-65.93	-86.81	-13.00	73.81	-20.88	RMS	Horizontal
4	262.7515	-57.60	-71.71	-13.00	58.71	-14.11	RMS	Horizontal
5	404.5655	-58.90	-69.03	-13.00	56.03	-10.13	RMS	Horizontal
6	844.5090	-14.86	-18.43	-13.00	5.43	-3.57	RMS	Horizontal

NOTE: NO.6 is the fundamental frequency signal.

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	4232	Band:	BandV
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-16 02:52:33		

Test Graph

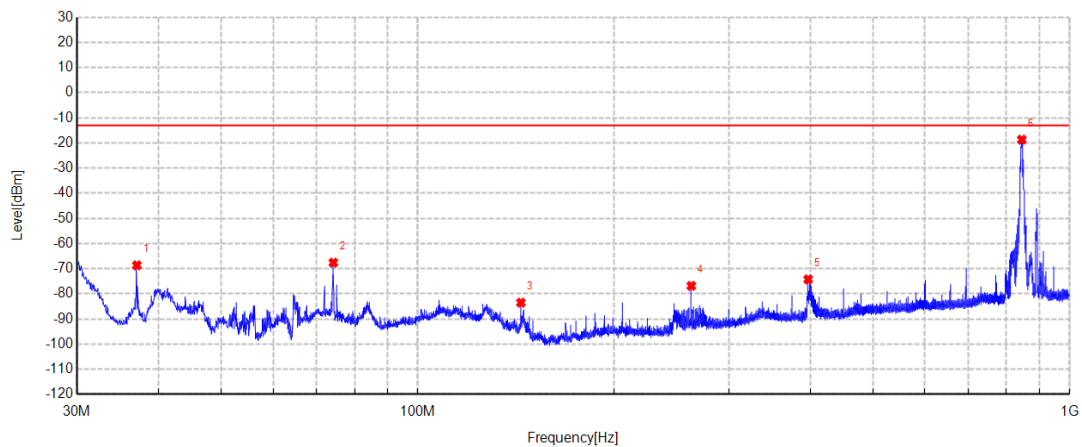

Suspected Data List


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	37.0810	-49.56	-68.66	-13.00	55.66	-19.10	RMS	Vertical
2	74.2320	-46.30	-67.60	-13.00	54.60	-21.30	RMS	Vertical
3	143.9750	-64.49	-83.51	-13.00	70.51	-19.02	RMS	Vertical
4	262.8485	-61.50	-76.82	-13.00	63.82	-15.32	RMS	Vertical
5	397.1450	-63.19	-74.25	-13.00	61.25	-11.06	RMS	Vertical
6	844.5575	-14.83	-18.67	-13.00	5.67	-3.84	RMS	Vertical

NOTE: NO.6 is the fundamental frequency signal.

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	9263	Band:	BandII
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-07 12:00:01		

Test Graph

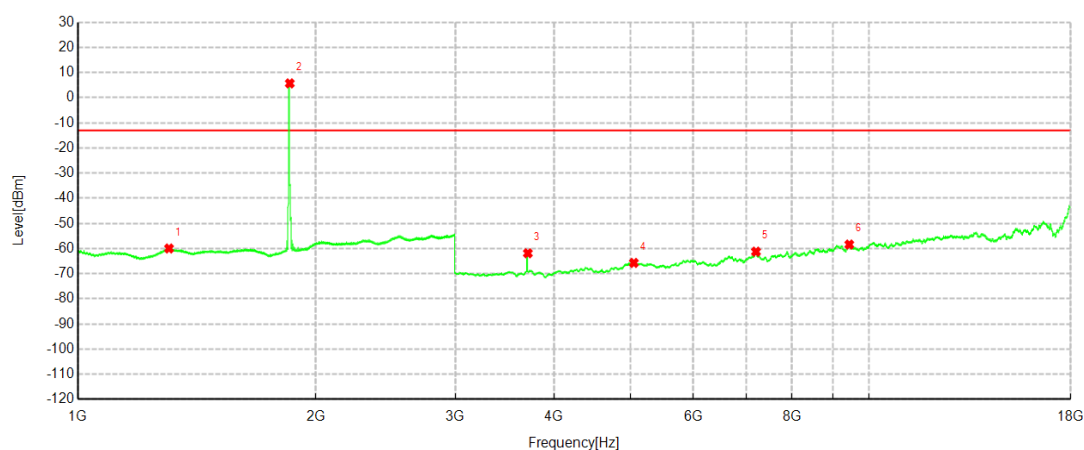

Suspected Data List


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1304.100	-70.74	-59.97	-13.00	46.97	10.77	RMS	Horizontal
2	1853.300	-5.38	5.69	-13.00	-18.69	11.07	RMS	Horizontal
3	3706.500	-56.48	-61.87	-13.00	48.87	-5.39	RMS	Horizontal
4	5046.750	-65.84	-65.71	-13.00	52.71	0.13	RMS	Horizontal
5	7202.250	-67.54	-61.24	-13.00	48.24	6.30	RMS	Horizontal
6	9450.750	-69.56	-58.40	-13.00	45.40	11.16	RMS	Horizontal

NOTE: NO.2 is the fundamental frequency signal.

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	9263	Band:	BandII
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-07 12:02:27		

Test Graph

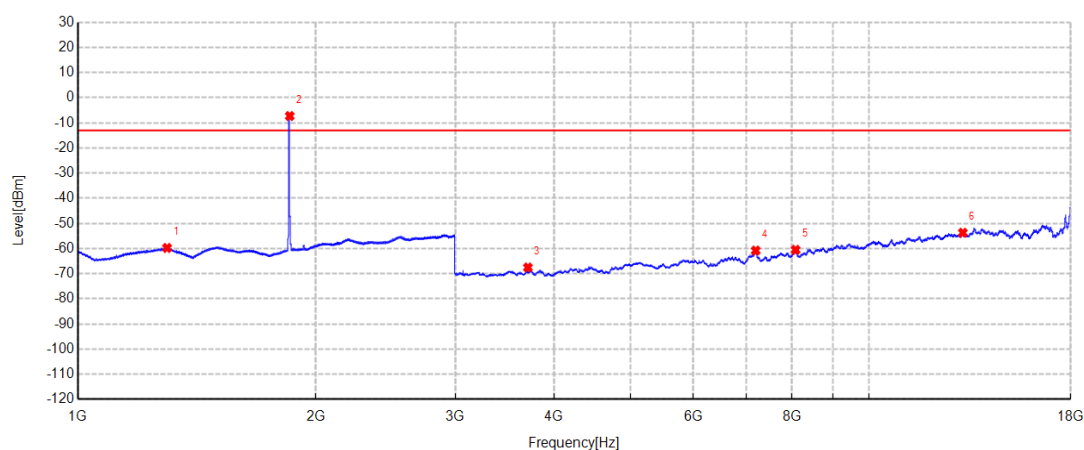

Suspected Data List


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1296.400	-70.70	-59.76	-13.00	46.76	10.94	RMS	Vertical
2	1853.200	-18.43	-7.30	-13.00	-5.70	11.13	RMS	Vertical
3	3707.250	-61.70	-67.54	-13.00	54.54	-5.84	RMS	Vertical
4	7197.000	-67.55	-60.81	-13.00	47.81	6.74	RMS	Vertical
5	8082.750	-68.29	-60.53	-13.00	47.53	7.76	RMS	Vertical
6	13152.75	-69.80	-53.71	-13.00	40.71	16.09	RMS	Vertical

NOTE: NO.2 is the fundamental frequency signal.

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	9400	Band:	BandII
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25℃; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-10 14:07:19		

Test Graph

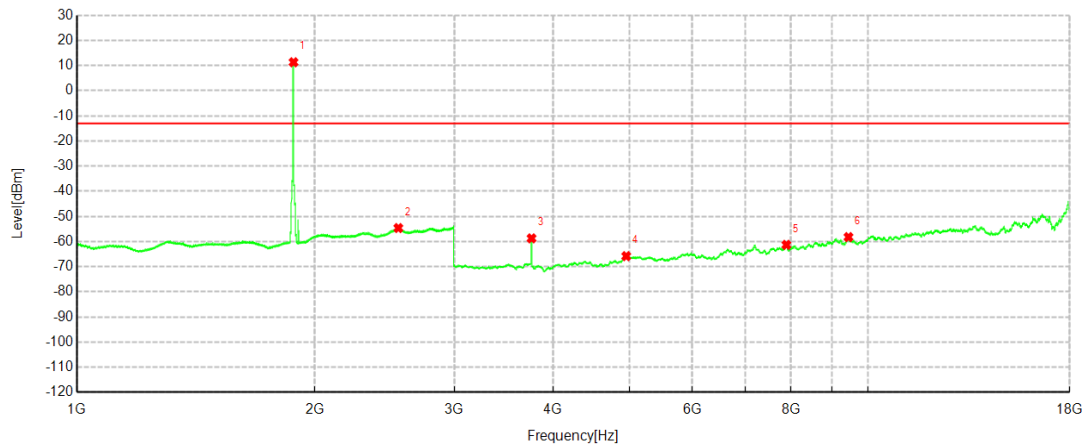

Suspected Data List


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1879.000	0.44	11.31	-13.00	-24.31	10.87	RMS	Horizontal
2	2549.900	-69.05	-54.63	-13.00	41.63	14.42	RMS	Horizontal
3	3758.250	-53.21	-58.73	-13.00	45.73	-5.52	RMS	Horizontal
4	4950.750	-65.95	-65.81	-13.00	52.81	0.14	RMS	Horizontal
5	7891.500	-68.50	-61.31	-13.00	48.31	7.19	RMS	Horizontal
6	9456.000	-69.25	-58.22	-13.00	45.22	11.03	RMS	Horizontal

NOTE: NO.1 is the fundamental frequency signal.

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	9400	Band:	BandII
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25℃; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-10 14:09:45		

Test Graph

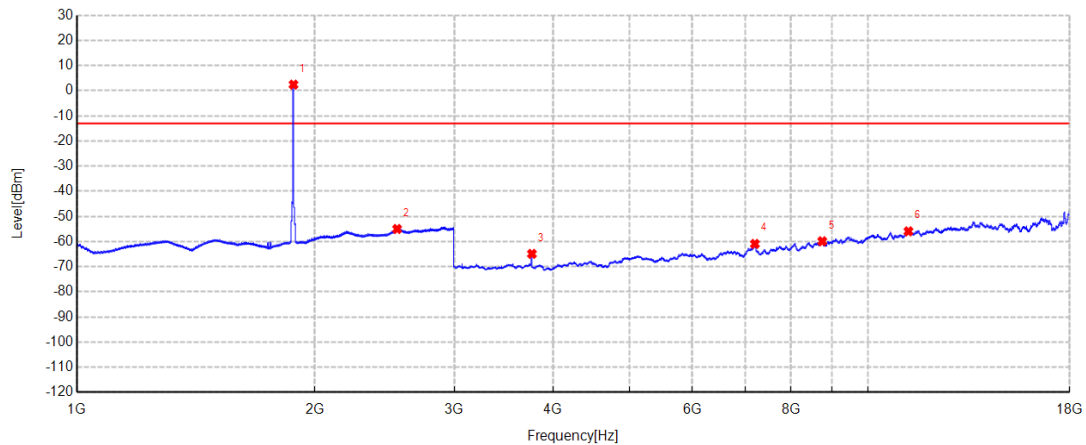

Suspected Data List


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1879.000	-8.69	2.42	-13.00	-15.42	11.11	RMS	Vertical
2	2540.600	-69.02	-55.00	-13.00	42.00	14.02	RMS	Vertical
3	3762.000	-59.21	-64.89	-13.00	51.89	-5.68	RMS	Vertical
4	7200.750	-67.77	-60.93	-13.00	47.93	6.84	RMS	Vertical
5	8760.750	-69.42	-59.89	-13.00	46.89	9.53	RMS	Vertical
6	11259.00	-70.72	-55.94	-13.00	42.94	14.78	RMS	Vertical

NOTE: NO.1 is the fundamental frequency signal.

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	9537	Band:	BandII
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-10 14:14:35		

Test Graph

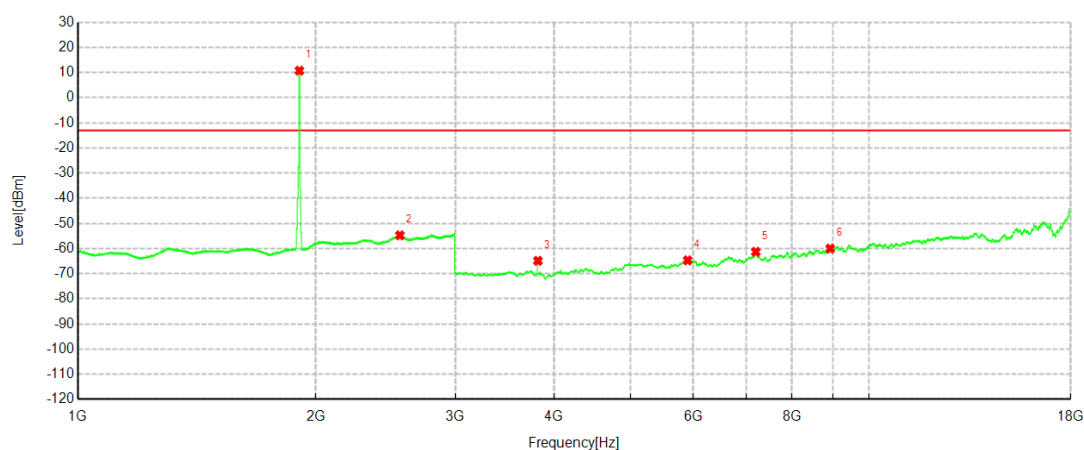

Suspected Data List


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1906.100	0.03	10.75	-13.00	-23.75	10.72	RMS	Horizontal
2	2554.100	-69.09	-54.74	-13.00	41.74	14.35	RMS	Horizontal
3	3816.750	-59.49	-64.88	-13.00	51.88	-5.39	RMS	Horizontal
4	5902.500	-65.89	-64.69	-13.00	51.69	1.20	RMS	Horizontal
5	7198.500	-67.61	-61.30	-13.00	48.30	6.31	RMS	Horizontal
6	8939.250	-68.85	-59.99	-13.00	46.99	8.86	RMS	Horizontal

NOTE: NO.1 is the fundamental frequency signal.

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	9537	Band:	BandII
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-10 14:17:02		

Test Graph

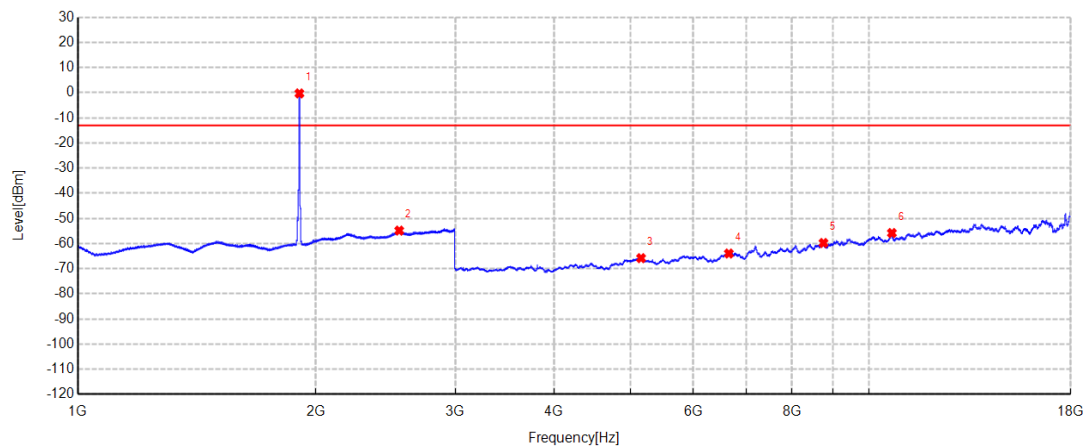

Suspected Data List


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1906.100	-11.34	-0.30	-13.00	-12.70	11.04	RMS	Vertical
2	2549.100	-69.01	-54.85	-13.00	41.85	14.16	RMS	Vertical
3	5154.000	-67.37	-65.81	-13.00	52.81	1.56	RMS	Vertical
4	6655.500	-67.03	-63.97	-13.00	50.97	3.06	RMS	Vertical
5	8766.000	-69.26	-59.78	-13.00	46.78	9.48	RMS	Vertical
6	10698.00	-70.00	-55.82	-13.00	42.82	14.18	RMS	Vertical

NOTE: NO.1 is the fundamental frequency signal.

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	9263	Band:	BandII
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-18 15:21:25		

Test Graph

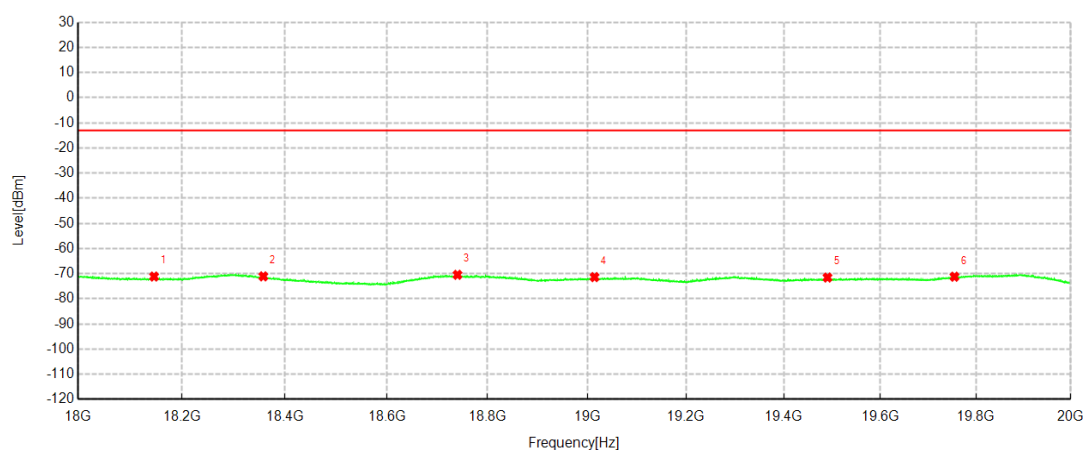


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	18146.20	-60.92	-71.13	-13.00	58.13	-10.21	RMS	Horizontal
2	18357.80	-60.54	-71.06	-13.00	58.06	-10.52	RMS	Horizontal
3	18740.00	-60.02	-70.44	-13.00	57.44	-10.42	RMS	Horizontal
4	19014.60	-59.97	-71.35	-13.00	58.35	-11.38	RMS	Horizontal
5	19490.60	-60.71	-71.53	-13.00	58.53	-10.82	RMS	Horizontal
6	19755.00	-61.43	-71.20	-13.00	58.20	-9.77	RMS	Horizontal

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	9263	Band:	BandII
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-18 15:22:36		

Test Graph

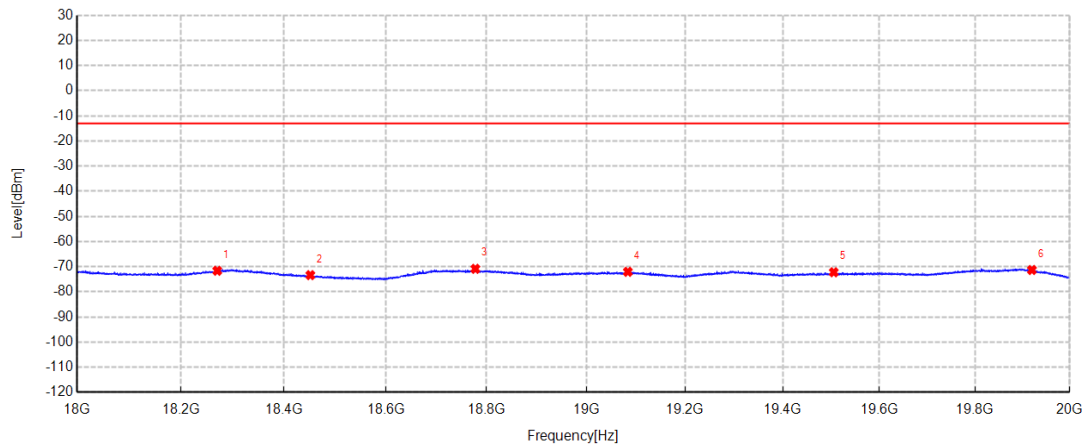


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	18270.20	-60.80	-71.62	-13.00	58.62	-10.82	RMS	Vertical
2	18451.60	-61.40	-73.36	-13.00	60.36	-11.96	RMS	Vertical
3	18777.60	-59.66	-70.84	-13.00	57.84	-11.18	RMS	Vertical
4	19084.00	-60.31	-72.04	-13.00	59.04	-11.73	RMS	Vertical
5	19505.60	-60.79	-72.21	-13.00	59.21	-11.42	RMS	Vertical
6	19920.20	-60.48	-71.31	-13.00	58.31	-10.83	RMS	Vertical

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	9400	Band:	BandII
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-18 15:24:49		

Test Graph

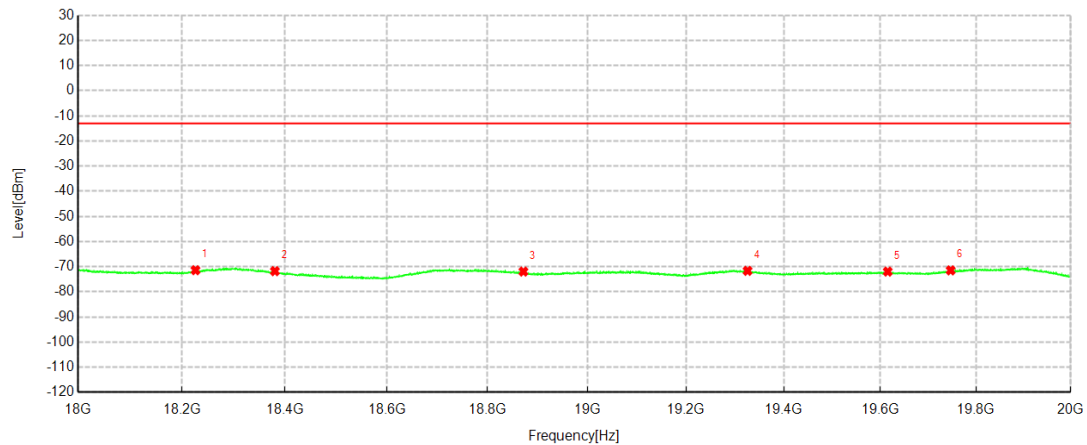


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	18226.20	-61.60	-71.40	-13.00	58.40	-9.80	RMS	Horizontal
2	18380.40	-61.07	-71.77	-13.00	58.77	-10.70	RMS	Horizontal
3	18871.60	-61.04	-71.94	-13.00	58.94	-10.90	RMS	Horizontal
4	19326.00	-61.06	-71.65	-13.00	58.65	-10.59	RMS	Horizontal
5	19615.60	-61.64	-71.95	-13.00	58.95	-10.31	RMS	Horizontal
6	19747.00	-61.69	-71.46	-13.00	58.46	-9.77	RMS	Horizontal

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	9400	Band:	BandII
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25℃; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-18 15:25:59		

Test Graph

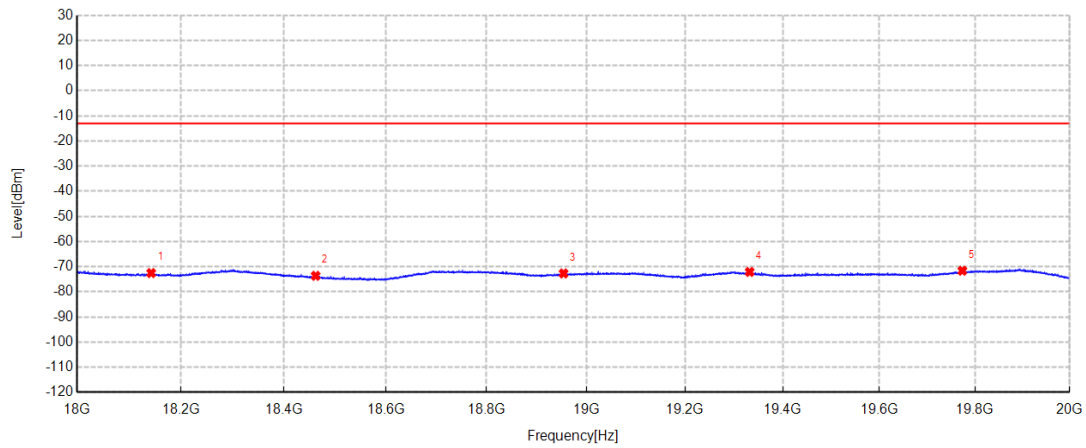


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	18142.60	-61.34	-72.53	-13.00	59.53	-11.19	RMS	Vertical
2	18462.00	-61.59	-73.62	-13.00	60.62	-12.03	RMS	Vertical
3	18954.20	-60.87	-72.68	-13.00	59.68	-11.81	RMS	Vertical
4	19332.40	-60.79	-72.09	-13.00	59.09	-11.30	RMS	Vertical
5	19773.60	-61.01	-71.61	-13.00	58.61	-10.60	RMS	Vertical

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	9537	Band:	BandII
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-18 15:27:55		

Test Graph

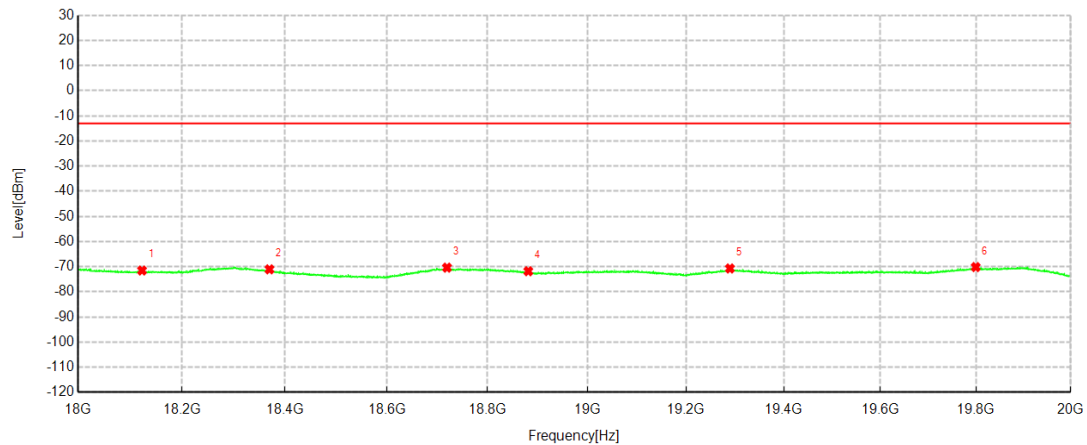


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	18123.00	-61.19	-71.52	-13.00	58.52	-10.33	RMS	Horizontal
2	18369.80	-60.44	-71.05	-13.00	58.05	-10.61	RMS	Horizontal
3	18719.20	-59.85	-70.38	-13.00	57.38	-10.53	RMS	Horizontal
4	18881.40	-60.87	-71.81	-13.00	58.81	-10.94	RMS	Horizontal
5	19289.80	-60.17	-70.71	-13.00	57.71	-10.54	RMS	Horizontal
6	19799.60	-60.27	-70.15	-13.00	57.15	-9.88	RMS	Horizontal

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	9537	Band:	BandII
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-18 15:29:05		

Test Graph

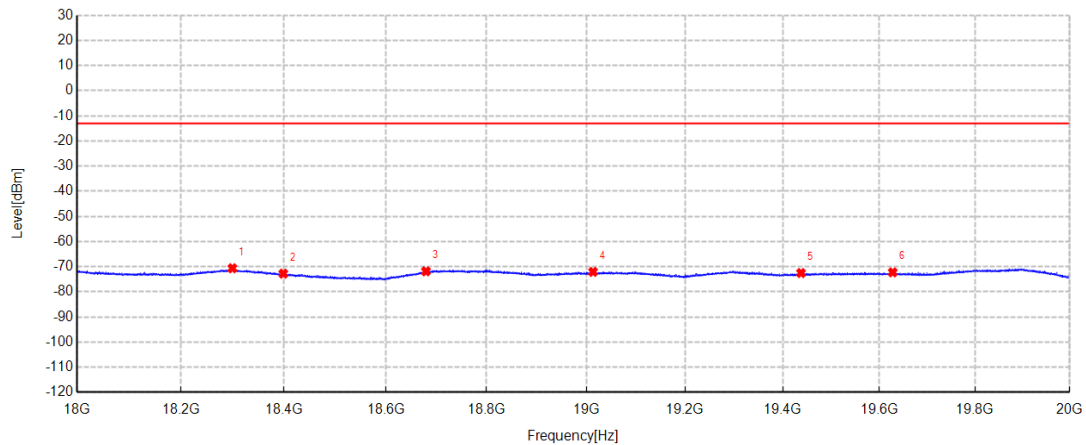


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	18299.60	-59.61	-70.62	-13.00	57.62	-11.01	RMS	Vertical
2	18398.80	-61.13	-72.77	-13.00	59.77	-11.64	RMS	Vertical
3	18679.40	-60.43	-71.84	-13.00	58.84	-11.41	RMS	Vertical
4	19013.60	-60.12	-72.06	-13.00	59.06	-11.94	RMS	Vertical
5	19438.00	-61.13	-72.52	-13.00	59.52	-11.39	RMS	Vertical
6	19628.00	-61.28	-72.25	-13.00	59.25	-10.97	RMS	Vertical

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	1313	Band:	BandIV
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25℃; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-10 14:27:51		

Test Graph

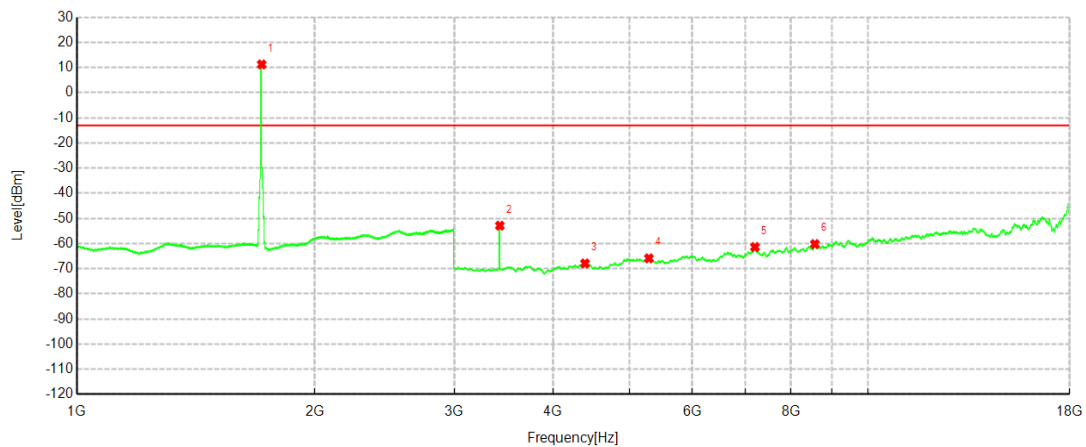

Suspected Data List


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1712.800	1.28	11.23	-13.00	-24.23	9.95	RMS	Horizontal
2	3426.750	-46.48	-52.89	-13.00	39.89	-6.41	RMS	Horizontal
3	4390.500	-65.01	-67.90	-13.00	54.90	-2.89	RMS	Horizontal
4	5288.250	-67.22	-65.89	-13.00	52.89	1.33	RMS	Horizontal
5	7201.500	-67.72	-61.40	-13.00	48.40	6.32	RMS	Horizontal
6	8574.000	-68.67	-60.21	-13.00	47.21	8.46	RMS	Horizontal

NOTE: NO.1 is the fundamental frequency signal.

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	1313	Band:	BandIV
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25℃; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-10 14:30:17		

Test Graph

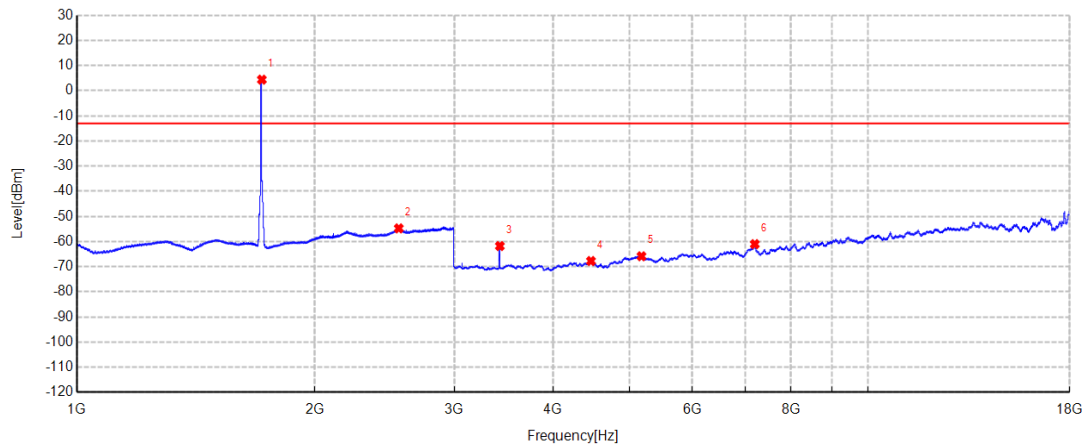

Suspected Data List


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1713.600	-5.19	4.39	-13.00	-17.39	9.58	RMS	Vertical
2	2553.200	-68.90	-54.76	-13.00	41.76	14.14	RMS	Vertical
3	3426.750	-55.05	-61.79	-13.00	48.79	-6.74	RMS	Vertical
4	4467.750	-64.77	-67.74	-13.00	54.74	-2.97	RMS	Vertical
5	5175.750	-67.08	-65.85	-13.00	52.85	1.23	RMS	Vertical
6	7197.750	-67.80	-61.03	-13.00	48.03	6.77	RMS	Vertical

NOTE: NO.1 is the fundamental frequency signal.

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	1450	Band:	BandIV
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25℃; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-10 14:35:47		

Test Graph

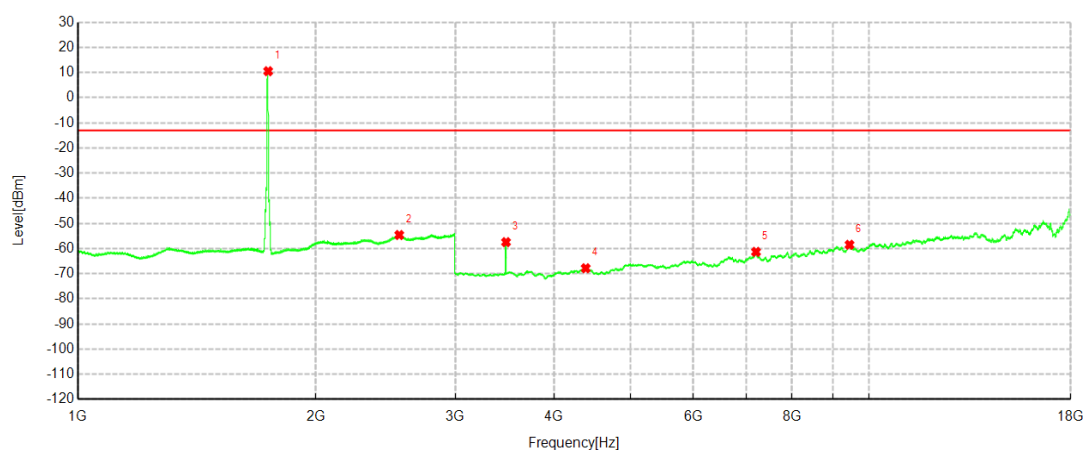

Suspected Data List


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1740.300	1.30	10.52	-13.00	-23.52	9.22	RMS	Horizontal
2	2549.400	-69.02	-54.61	-13.00	41.61	14.41	RMS	Horizontal
3	3478.500	-51.60	-57.45	-13.00	44.45	-5.85	RMS	Horizontal
4	4386.750	-64.88	-67.83	-13.00	54.83	-2.95	RMS	Horizontal
5	7203.000	-67.60	-61.33	-13.00	48.33	6.27	RMS	Horizontal
6	9456.000	-69.53	-58.50	-13.00	45.50	11.03	RMS	Horizontal

NOTE: NO.1 is the fundamental frequency signal.

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	1450	Band:	BandIV
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25℃; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-10 14:38:13		

Test Graph

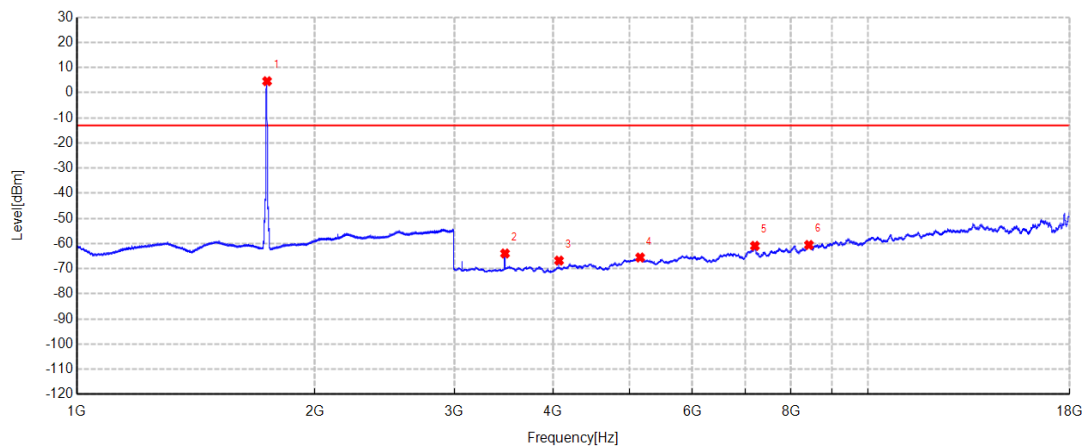

Suspected Data List


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1740.100	-4.63	4.56	-13.00	-17.56	9.19	RMS	Vertical
2	3478.500	-57.95	-63.95	-13.00	50.95	-6.00	RMS	Vertical
3	4071.000	-62.17	-66.78	-13.00	53.78	-4.61	RMS	Vertical
4	5154.750	-67.10	-65.55	-13.00	52.55	1.55	RMS	Vertical
5	7200.750	-67.77	-60.93	-13.00	47.93	6.84	RMS	Vertical
6	8427.750	-69.08	-60.56	-13.00	47.56	8.52	RMS	Vertical

NOTE: NO.1 is the fundamental frequency signal.

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	1512	Band:	BandIV
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-10 14:42:15		

Test Graph

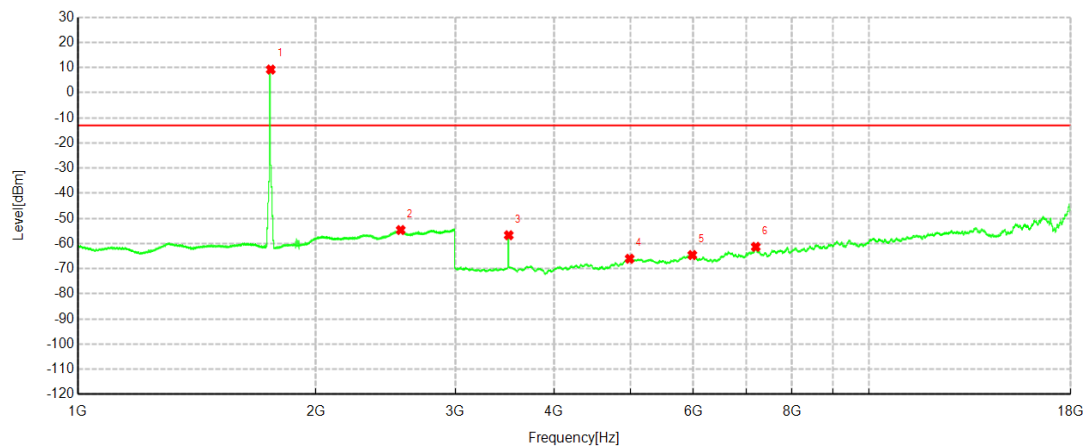

Suspected Data List


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1753.400	0.16	9.19	-13.00	-22.19	9.03	RMS	Horizontal
2	2559.900	-68.86	-54.62	-13.00	41.62	14.24	RMS	Horizontal
3	3506.250	-51.12	-56.69	-13.00	43.69	-5.57	RMS	Horizontal
4	4985.250	-66.30	-66.05	-13.00	53.05	0.25	RMS	Horizontal
5	5983.500	-65.33	-64.58	-13.00	51.58	0.75	RMS	Horizontal
6	7197.000	-67.56	-61.32	-13.00	48.32	6.24	RMS	Horizontal

NOTE: NO.1 is the fundamental frequency signal.

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	1512	Band:	BandIV
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-10 14:44:41		

Test Graph

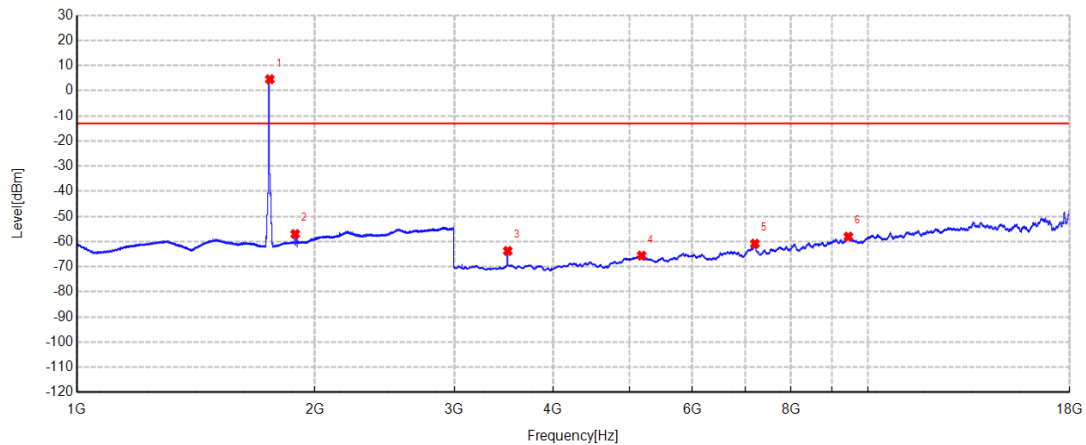

Suspected Data List


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1753.600	-4.58	4.54	-13.00	-17.54	9.12	RMS	Vertical
2	1888.300	-68.10	-57.00	-13.00	44.00	11.10	RMS	Vertical
3	3506.250	-58.15	-63.73	-13.00	50.73	-5.58	RMS	Vertical
4	5178.750	-66.78	-65.59	-13.00	52.59	1.19	RMS	Vertical
5	7200.750	-67.69	-60.85	-13.00	47.85	6.84	RMS	Vertical
6	9453.000	-69.54	-58.05	-13.00	45.05	11.49	RMS	Vertical

NOTE: NO.1 is the fundamental frequency signal.

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	4133	Band:	BandV
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-10 14:59:25		

Test Graph

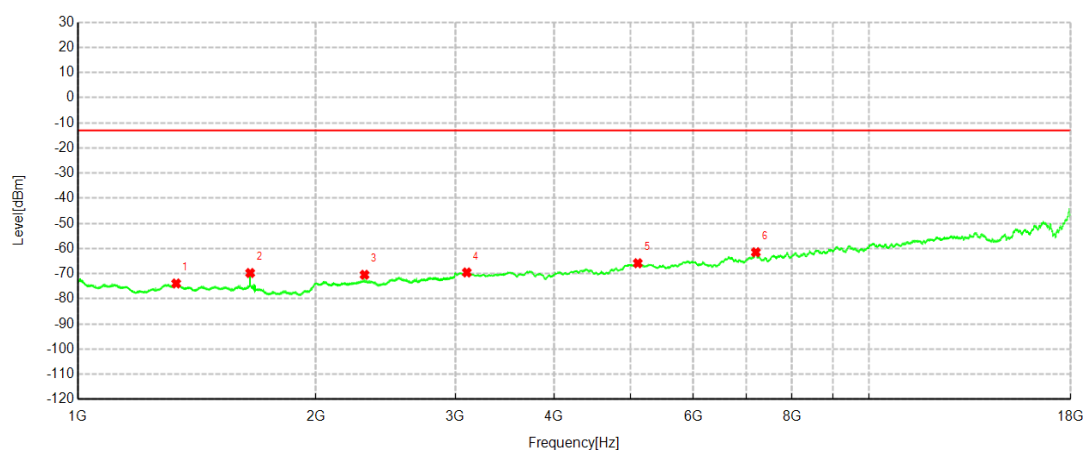


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1331.500	-60.86	-73.89	-13.00	60.89	-13.03	RMS	Horizontal
2	1651.500	-56.90	-69.73	-13.00	56.73	-12.83	RMS	Horizontal
3	2304.000	-60.10	-70.44	-13.00	57.44	-10.34	RMS	Horizontal
4	3103.500	-63.24	-69.51	-13.00	56.51	-6.27	RMS	Horizontal
5	5105.250	-66.51	-65.84	-13.00	52.84	0.67	RMS	Horizontal
6	7199.250	-67.83	-61.49	-13.00	48.49	6.34	RMS	Horizontal

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	4133	Band:	BandV
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-10 15:01:51		

Test Graph

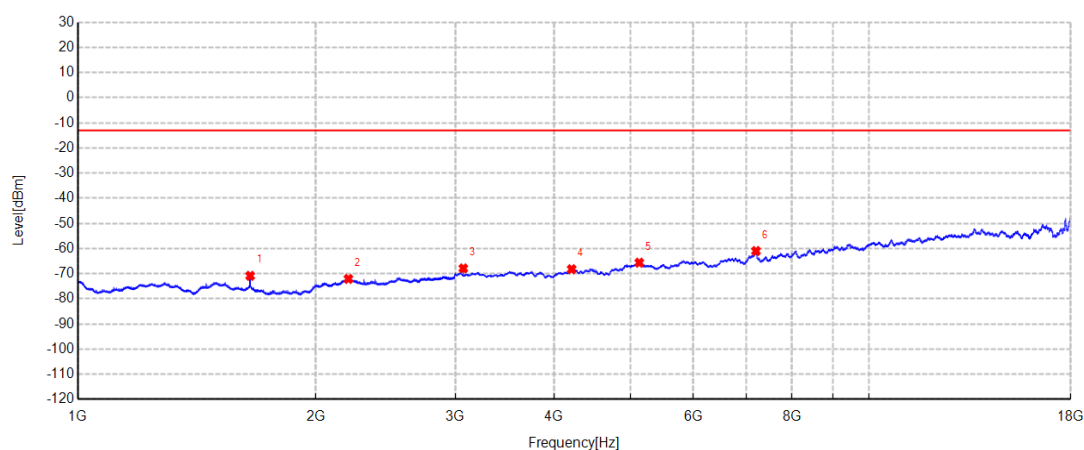


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1651.500	-57.70	-70.84	-13.00	57.84	-13.14	RMS	Vertical
2	2198.400	-62.52	-72.07	-13.00	59.07	-9.55	RMS	Vertical
3	3072.000	-61.09	-67.89	-13.00	54.89	-6.80	RMS	Vertical
4	4210.500	-64.82	-68.22	-13.00	55.22	-3.40	RMS	Vertical
5	5127.750	-66.92	-65.62	-13.00	52.62	1.30	RMS	Vertical
6	7202.250	-67.73	-60.98	-13.00	47.98	6.75	RMS	Vertical

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	4175	Band:	BandV
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-10 15:07:06		

Test Graph

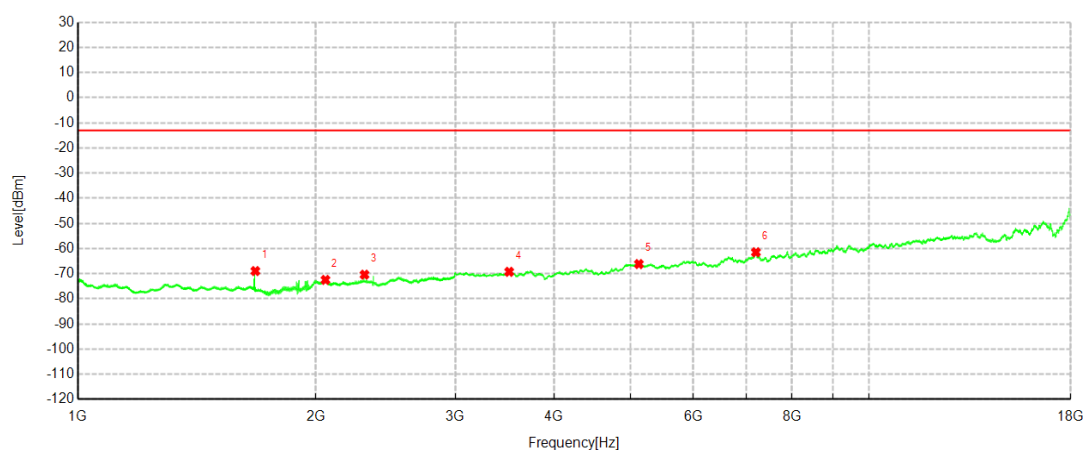


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1676.900	-55.74	-68.95	-13.00	55.95	-13.21	RMS	Horizontal
2	2056.100	-61.88	-72.47	-13.00	59.47	-10.59	RMS	Horizontal
3	2304.000	-60.05	-70.39	-13.00	57.39	-10.34	RMS	Horizontal
4	3510.750	-63.71	-69.25	-13.00	56.25	-5.54	RMS	Horizontal
5	5121.750	-67.04	-66.17	-13.00	53.17	0.87	RMS	Horizontal
6	7200.750	-67.83	-61.48	-13.00	48.48	6.35	RMS	Horizontal

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	4175	Band:	BandV
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25℃; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-10 15:09:32		

Test Graph

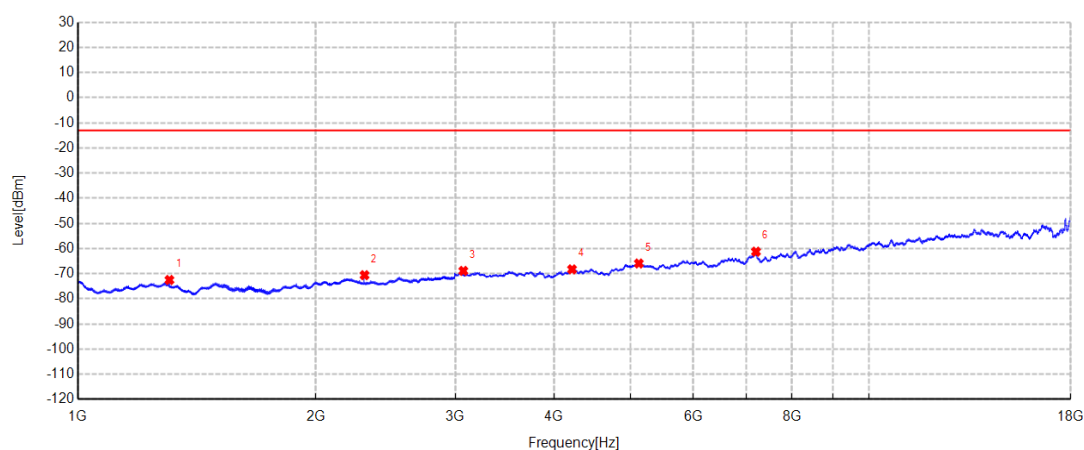


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1305.600	-59.77	-72.50	-13.00	59.50	-12.73	RMS	Vertical
2	2304.000	-59.22	-70.59	-13.00	57.59	-11.37	RMS	Vertical
3	3072.000	-62.09	-68.89	-13.00	55.89	-6.80	RMS	Vertical
4	4215.750	-64.91	-68.28	-13.00	55.28	-3.37	RMS	Vertical
5	5121.000	-67.15	-65.94	-13.00	52.94	1.21	RMS	Vertical
6	7202.250	-67.99	-61.24	-13.00	48.24	6.75	RMS	Vertical

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	4232	Band:	BandV
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-10 15:15:23		

Test Graph

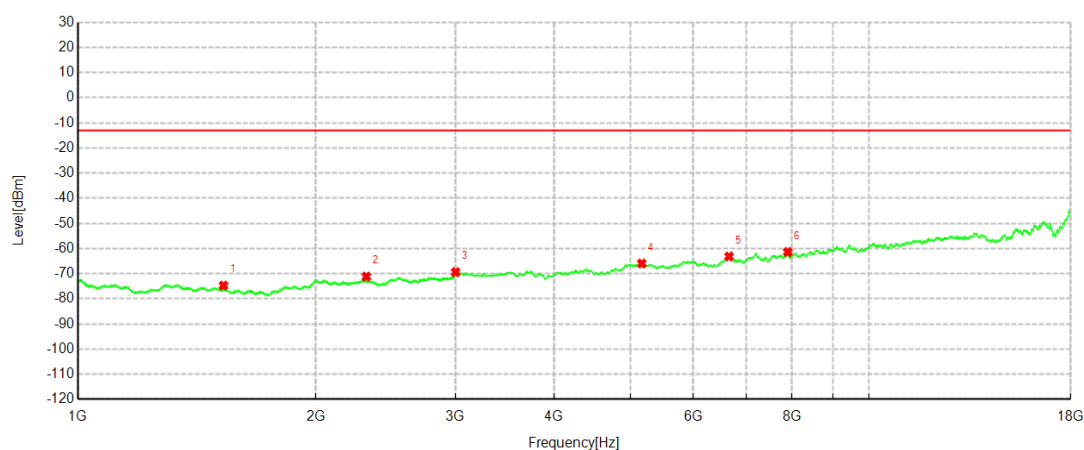


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1528.100	-60.96	-74.73	-13.00	61.73	-13.77	RMS	Horizontal
2	2316.200	-60.81	-71.16	-13.00	58.16	-10.35	RMS	Horizontal
3	3003.750	-62.38	-69.39	-13.00	56.39	-7.01	RMS	Horizontal
4	5164.500	-67.02	-65.94	-13.00	52.94	1.08	RMS	Horizontal
5	6658.500	-66.83	-63.16	-13.00	50.16	3.67	RMS	Horizontal
6	7899.750	-68.81	-61.39	-13.00	48.39	7.42	RMS	Horizontal

----- The following blanks -----

Project Information			
ProjectNo:	E20211217696105	EUT:	E20211217696105-0004
Channel	4232	Band:	BandV
Mode:	WCDMA	Voltage:	DC 12V
Environment:	Temp: 25°C ; Humi:60%RH	Engineer:	Lu Qiang
Date:	2022-04-10 15:17:49		

Test Graph

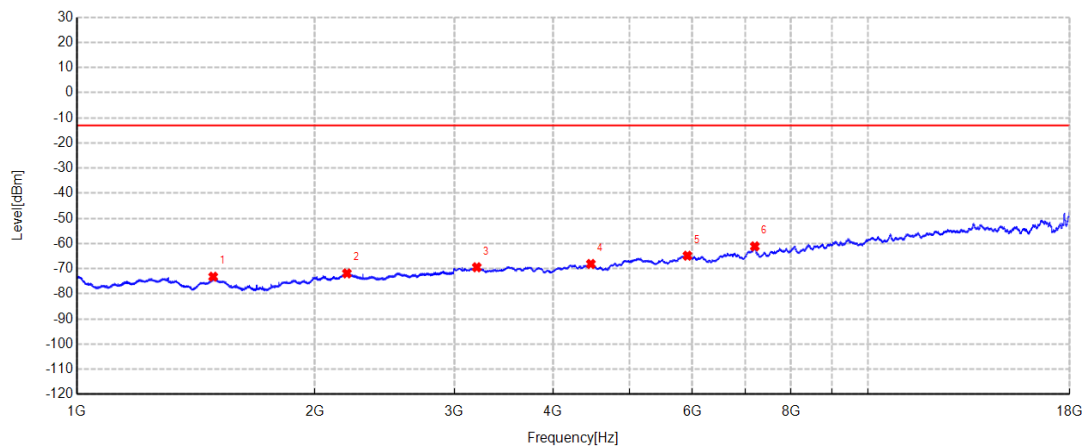

Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1487.200	-60.94	-73.18	-13.00	60.18	-12.24	RMS	Vertical
2	2195.300	-62.24	-71.87	-13.00	58.87	-9.63	RMS	Vertical
3	3204.000	-62.85	-69.43	-13.00	56.43	-6.58	RMS	Vertical
4	4466.250	-65.15	-68.11	-13.00	55.11	-2.96	RMS	Vertical
5	5916.000	-65.76	-64.83	-13.00	51.83	0.93	RMS	Vertical
6	7199.250	-67.96	-61.12	-13.00	48.12	6.84	RMS	Vertical

Remark:

The disturbance below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the worst case data had been displayed.

We have tested all modulation and all Bandwidth , but only the worst case data presented in this report.

----- The following blanks -----

13. TEST PHOTO

Please refer to the attached document E20211217696105-10 Test Photo.

----- The following blanks -----

14. PHOTOGRAPH OF THE EUT

Please refer to the attached document E20211217696105-11 EUT Photo.

----- End of Report -----