



FCC CERTIFICATION TEST REPORT

Applicant	:	BYD Auto Industry Company Limited
Address of Applicant	:	No.3001, 3007, HengPing Road, Pingshan, Shenzhen, Guangdong, P.R. China
Manufacturer	:	BYD Auto Industry Company Limited
Address of Manufacturer	:	No.3001, 3007, HengPing Road, Pingshan, Shenzhen, Guangdong, P.R. China
Equipment under Test	:	In-vehicle Multimedia Screen
Model No.	:	MTCJ20
FCC ID	:	SD4-MTCJ20
Test Standard(s)	:	FCC Rules and Regulations Part 15 Subpart E, ANSI C63.10:2020, 789033 D02 General U-NII Test Procedures New Rules v02r01, 662911 D01 Multiple Transmitter Output v02r01
Report No.	:	DDT-RE24122405-6E02
Issue Date	:	2025/03/12
Issue By	:	Guangdong Dongdian Testing Service Co., Ltd. Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

REPORT

Table of Contents

1.	Summary of Test Results	7
2.	General Test Information	8
2.1.	Description of EUT	8
2.2.	Accessories of EUT	9
2.3.	Block diagram of EUT configuration for test	9
2.4.	Decision of final test mode	10
2.5.	Deviations of test standard	12
2.6.	Test environment conditions	12
2.7.	Test laboratory	12
2.8.	Measurement uncertainty	13
3.	Equipment Used During Conductive Test	14
4.	26dB Bandwidth	15
4.1.	Block diagram of test setup	15
4.2.	Limits	15
4.3.	Test procedure	15
4.4.	Test result	16
4.5.	Test graphs	19
5.	6dB Bandwidth	41
5.1.	Block diagram of test setup	41
5.2.	Limits	41
5.3.	Test procedure	41
5.4.	Test result B4	42
5.5.	Test graphs B4	43
6.	99% Bandwidth	48
6.1.	Block diagram of test setup	48
6.2.	Limits	48
6.3.	Test procedure	48
6.4.	Test result	49
6.5.	Test graphs	52
7.	Duty Cycle	74
7.1.	Block diagram of test setup	74
7.2.	Limit	74
7.3.	Test procedure	74
7.4.	Test result	75
7.5.	Test graphs	78
8.	Maximum Output Power	100

8.1.	Block diagram of test setup	100
8.2.	Limits.....	100
8.3.	Test procedure.....	100
8.4.	Test result channel power	101
9.	Power Spectral Density	103
9.1.	Block diagram of test setup	103
9.2.	Limits.....	103
9.3.	Test procedure.....	103
9.4.	Test result	105
9.5.	Test graphs.....	108
10.	Frequency Stability Measurement.....	132
10.1.	Limit of Frequency Stability	132
10.2.	Measuring Instruments	132
10.3.	Test procedures.....	132
10.4.	Test setup	132
10.5.	Test result	133
11.	Dynamic Frequency Selection.....	146
11.1.	Applicability of DFS requirements	146
11.2.	Limit.....	147
11.3.	Parameters of radar test waveforms	147
11.4.	Calibration of radar waveform	148
11.5.	Channel closing transmission time, channel move time and non-occupancy period.....	150
11.6.	Test setup	151
11.7.	Test result	151
12.	Antenna Requirements	153
12.1.	Limit.....	153
12.2.	Result.....	153
13.	Radiated Emission.....	154
13.1.	Test equipment	154
13.2.	Block diagram of test setup	155
13.3.	Limits.....	156
13.4.	Assistant equipment used for test	158
13.5.	Test procedure.....	158
13.6.	Test result	159
13.7.	Test data	160
14.	Band Edge Compliance	178
14.1.	Test equipment	178
14.2.	Block diagram of test setup	179

14.3.	Limits.....	179
14.4.	Assistant equipment used for test	179
14.5.	Test procedure.....	180
14.6.	Test result	180
14.7.	Test data	181
15.	Power Line Conducted Emissions.....	257
15.1.	Test equipment.....	257
15.2.	Block diagram of test setup	257
15.3.	Limits.....	257
15.4.	Assistant equipment used for test	257
15.5.	Test procedure.....	258
15.6.	Test result	258
16.	Test Setup Photograph.....	259
17.	Photos of the EUT	262

Test Report Declare

Applicant	:	BYD Auto Industry Company Limited
Address of Applicant	:	No.3001, 3007, HengPing Road, Pingshan, Shenzhen, Guangdong, P.R. China
Equipment under Test	:	In-vehicle Multimedia Screen
Model No.	:	MTCJ20
Manufacturer	:	BYD Auto Industry Company Limited
Address of Manufacturer	:	No.3001, 3007, HengPing Road, Pingshan, Shenzhen, Guangdong, P.R. China

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart E,
ANSI C63.10:2020,
789033 D02 General U-NII Test Procedures New Rules v02r01,
662911 D01 Multiple Transmitter Output v02r01

We Declare:

The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

Report No.:	DDT-RE24122405-6E02		
Date of Receipt:	2025/01/03	Date of Test:	2025/01/03 - 2025/02/28

Created: Jacky Huang	Reviewed: Ella Gong	Approved: Damon Hu
		
2025/03/02	2025/03/12	2025/03/12

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	2025/03/12	

1. Summary of Test Results

No.	Test Parameter	Clause No.	Condition	Result
1	6/26db Bandwidth and 99% Bandwidth	FCC 15.407 (e)	/	Pass
2	Output Power	FCC 15.407 (a)	/	Pass
3	Power Spectral Density	FCC 15.407 (a)	/	Pass
4	Frequency Stability Measurement	FCC 15.407 (g)	/	Pass
5	Radiated Emission	FCC 15.407 (b)	/	Pass
6	Band Edge Compliance	FCC 15.407 (b)	/	Pass
7	Power Line Conducted Emissions	FCC Part 15: 15.207(a)	/	N/A
8	Antenna Requirement	FCC Part 15: 15.203	/	Pass
9	Dynamic Frequency Selection	FCC 15.407 (h)	/	Pass
Note: N/A is an abbreviation for Not Applicable, and means this item is not applicable for this device or no need to test according to standard.				

2. General Test Information

2.1. Description of EUT

EUT Name	: In-vehicle Multimedia Screen
Model Number	: MTCJ20
EUT Function Description	: Please reference user manual of this device
Power Supply	: DC 12V
Antenna Type	: FPCB
Max Antenna Gain (dBi)	: 5G WIFI band1: 5.42 5G WIFI band2: 5.05 5G WIFI band3: 5.72 5G WIFI band4: 4.76

Radio Technology	: IEEE 802.11a/n/ac
Operation frequency	: U-NII-1: 5180 MHz to 5240 MHz U-NII-2A: 5260 MHz to 5320 MHz U-NII-2C: 5500 MHz to 5720 MHz U-NII-3: 5745 MHz to 5825 MHz
Modulation	: IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)

Channel information					
IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20)		IEEE 802.11n (HT40) IEEE802.11ac (VHT40)		IEEE 802.11ac (VHT80)	
UNII-1					
CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230	/	/
44	5220	/	/	/	/
48	5240	/	/	/	/
UNII-2A					
52	5260	54	5270	58	5290
56	5280	62	5310	/	/
60	5300	/	/	/	/
64	5320	/	/	/	/
UNII-2C					
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590	138	5690 (Straddle)
112	5560	126	5630	/	/
116	5580	134	5670	/	/

120	5600	142	5710 (Straddle)	/	/
124	5620	/	/	/	/
128	5640	/	/	/	/
132	5660	/	/	/	/
136	5680	/	/	/	/
140	5700	/	/	/	/
144	5720 (Straddle)	/	/	/	/
UNII-3					
149	5745	151	5755	155	5775
153	5765	159	5795	/	/
157	5785	/	/	/	/
161	5805	/	/	/	/
165	5825	/	/	/	/
Note: Band 5600-5650MHz will be disabled when shipped to Canada.					

Note: The above EUT information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications or User's Manual. The above Antenna information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

2.2. Accessories of EUT

Accessories	Manufacturer	Model number	Description
Power cable	/	/	length: 2.00m, unshielded

2.3. Block diagram of EUT configuration for test



2.4. Decision of final test mode

According pre-test, the worst test modes were reported as below:

Test software: QRCT.exe

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

The pathloss of external cable: 2 dB (According to the manufacturer's claims)

Tested mode, Tx Power Setting, Data rate, Channel, and Frequency				
Tested mode	Tx Power Setting	Data rate (Mbps) (see Note)	Test Channel	Frequency (MHz)
	ANT1			
IEEE 802.11a	10	6	LCH: CH36	5180
		6	MCH: CH40	5200
		6	HCH: CH48	5240
		6	LCH: CH52	5260
		6	MCH: CH56	5280
		6	HCH: CH64	5320
		6	LCH: CH100	5500
		6	MCH: CH116	5580
		6	HCH: CH140	5700
		6	Straddle: CH144	5720
		6	LCH: CH149	5745
		6	MCH: CH157	5785
		6	HCH: CH165	5825
IEEE 802.11n HT20	10	MCS 0	LCH: CH36	5180
		MCS 0	MCH: CH40	5200
		MCS 0	HCH: CH48	5240
		MCS 0	LCH: CH52	5260
		MCS 0	MCH: CH56	5280
		MCS 0	HCH: CH64	5320
		MCS 0	LCH: CH100	5500
		MCS 0	MCH: CH116	5580
		MCS 0	HCH: CH140	5700
		MCS 0	Straddle: CH144	5720
		MCS 0	LCH: CH149	5745
		MCS 0	MCH: CH157	5785
		MCS 0	HCH: CH165	5825
IEEE 802.11n HT40	10	MCS 0	LCH: CH38	5190
		MCS 0	HCH: CH46	5230
		MCS 0	LCH: CH54	5270

		MCS 0	HCH: CH62	5310
		MCS 0	LCH: CH102	5510
		MCS 0	MCH: CH110	5550
		MCS 0	HCH: CH134	5670
		MCS 0	LCH: CH151	5755
		MCS 0	HCH: CH159	5795
IEEE 802.11ac VHT20	10	MCS 0	LCH: CH36	5180
		MCS 0	MCH: CH40	5200
		MCS 0	HCH: CH48	5240
		MCS 0	LCH: CH52	5260
		MCS 0	MCH: CH56	5280
		MCS 0	HCH: CH64	5320
		MCS 0	LCH: CH100	5500
		MCS 0	MCH: CH116	5580
		MCS 0	HCH: CH140	5700
		MCS 0	Straddle: CH144	5720
		MCS 0	LCH: CH149	5745
		MCS 0	MCH: CH157	5785
		MCS 0	HCH: CH165	5825
		MCS 0	LCH: CH38	5190
IEEE 802.11 ac VHT40	10	MCS 0	HCH: CH46	5230
		MCS 0	LCH: CH54	5270
		MCS 0	HCH: CH62	5310
		MCS 0	LCH: CH102	5510
		MCS 0	MCH: CH110	5550
		MCS 0	HCH: CH134	5670
		MCS 0	Straddle: CH151	5710
		MCS 0	LCH: CH159	5755
		MCS 0	HCH: CH36	5795
		MCS 0	CH42	5210
IEEE 802.11ac VHT80	10	MCS 0	CH58	5290
		MCS 0	LCH: CH106	5530
		MCS 0	HCH: CH122	5610
		MCS 0	Straddle: CH138	5690
		MCS 0	CH155	5775

Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	+15°C to +35 °C
Humidity range:	20% to 75%
Pressure range:	86 kPa to 106 kPa

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

2.7. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20240, G-20118

2.8. Measurement uncertainty


Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$);
	1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$);
	1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Frequencies Stability	6.7×10^{-8} (Antenna couple method)
	5.5×10^{-8} (Conducted method)
Conducted spurious emissions	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$);
	1.40 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
	1.66 dB ($8 \text{ GHz} \leq f < 26.5 \text{ GHz}$)
Uncertainty for radio frequency (RBW < 20 kHz)	3×10^{-8}
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V)
	4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz)
	4.40 dB (6 GHz - 18 GHz)
	3.54 dB (18 GHz - 26 GHz)
	4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.34dB (150KHz-30MHz)
	3.72dB (9KHz-150KHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment Used During Conductive Test

Equipment	Manufacturer	Model No.	Serial Number	Due Date	Cal. Interval
☑RF Connected Test (RF Measurement System 4#)					
Signal & Spectrum Analyzer	R&S	FSV3044	101173	2025/03/31	1 Year
Wideband Radio Communication Tester	R&S	CMW500	168801	2025/03/31	1 Year
MXG Vector Signal Generator	Agilent	N5182A	MY48180737	2025/03/31	1 Year
PSG Vector Signal Generator	Agilent	E8267D	US49060192	2025/08/25	1 Year
RF Control Unit	Tonsend	JS0806-2	21I8060485	2025/03/31	1 Year
TEMP&HUMI Programmable Chamber	ZHIXIANG	ZXGDJS-150L	ZX170110-A	2025/04/22	1 Year
Test Software	Tonscend	JS1120-3	Ver.3.2.22	N/A	N/A

4. 26dB Bandwidth

4.1. Block diagram of test setup

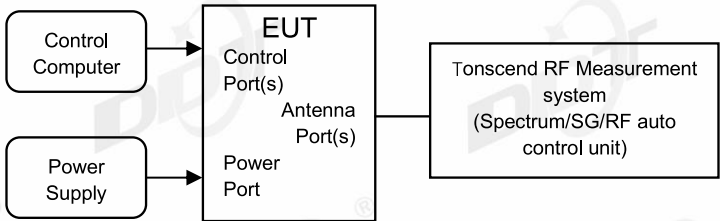

4.2. Limits

FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
26 dB Bandwidth	---	5150 - 5250
	---	5250 - 5350
	---	5470 - 5725

4.3. Test procedure

Connect EUT’s antenna output to spectrum analyzer by RF cable.

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	approximately 1% of the emission bandwidth.
VBW	> RBW
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.

4.4. Test result

Test Engineer:	Zoe Peng	Test Site:	RF Measurement System 4#
Ambient Condition:	22.9-23.2℃, 43.1-47.6%RH	Test Date:	2025.01.17-2025.02.19
Test Power Supply:	DC 12V	Sample Number:	S24122405-004

Test Mode	Antenna	Frequency [MHz]	26db EBW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
11A	Ant1	5180	21.28	5169.28	5190.56	---	---
		5200	21.28	5189.32	5210.60	---	---
		5240	21.28	5229.28	5250.56	---	---
		5260	21.32	5249.32	5270.64	---	---
		5280	21.40	5269.16	5290.56	---	---
		5320	21.24	5309.28	5330.52	---	---
		5500	21.12	5489.24	5510.36	---	---
		5580	21.60	5568.72	5590.32	---	---
		5700	21.52	5688.76	5710.28	---	---
		5720	21.92	5708.80	5730.72	---	---
		5720_UNII-2C	16.20	5708.80	5725.00	---	---
		5720_UNII-3	5.72	5725.00	5730.72	---	---
		5745	21.80	5733.76	5755.56	---	---
		5785	21.64	5773.80	5795.44	---	---
		5825	21.60	5813.76	5835.36	---	---
11N20SISO	Ant1	5180	22.12	5168.96	5191.08	---	---
		5200	21.76	5189.04	5210.80	---	---
		5240	22.48	5228.80	5251.28	---	---
		5260	21.88	5249.12	5271.00	---	---
		5280	21.92	5268.92	5290.84	---	---
		5320	21.92	5308.88	5330.80	---	---
		5500	22.16	5488.72	5510.88	---	---
		5580	22.52	5568.44	5590.96	---	---
		5700	22.48	5688.44	5710.92	---	---

		5720	22.76	5708.36	5731.12	---	---
		5720_UNII-2C	16.64	5708.36	5725.00	---	---
		5720_UNII-3	6.12	5725.00	5731.12	---	---
		5745	22.48	5733.44	5755.92	---	---
		5785	23.12	5772.88	5796.00	---	---
		5825	22.60	5813.32	5835.92	---	---
11N40SISO	Ant1	5190	43.04	5168.40	5211.44	---	---
		5230	42.72	5208.72	5251.44	---	---
		5270	42.64	5248.64	5291.28	---	---
		5310	43.20	5288.24	5331.44	---	---
		5510	46.80	5485.84	5532.64	---	---
		5550	46.88	5525.84	5572.72	---	---
		5670	50.32	5641.28	5691.60	---	---
		5710	50.56	5681.12	5731.68	---	---
		5710_UNII-2C	43.88	5681.12	5725.00	---	---
		5710_UNII-3	6.68	5725.00	5731.68	---	---
		5755	50.32	5726.28	5776.60	---	---
		5795	50.64	5766.04	5816.68	---	---
11AC20SISO	Ant1	5180	22.24	5168.84	5191.08	---	---
		5200	22.56	5188.72	5211.28	---	---
		5240	21.92	5229.00	5250.92	---	---
		5260	22.12	5249.04	5271.16	---	---
		5280	22.40	5268.56	5290.96	---	---
		5320	22.24	5308.72	5330.96	---	---
		5500	22.28	5488.72	5511.00	---	---
		5580	22.72	5568.44	5591.16	---	---
		5700	22.52	5688.36	5710.88	---	---
		5720	22.96	5708.28	5731.24	---	---
		5720_UNII-2C	16.72	5708.28	5725.00	---	---
		5720_UNII-3	6.24	5725.00	5731.24	---	---

		5745	22.92	5733.20	5756.12	---	---
		5785	23.28	5772.88	5796.16	---	---
		5825	23.36	5812.92	5836.28	---	---
11AC40SISO	Ant1	5190	42.88	5168.56	5211.44	---	---
		5230	43.36	5208.32	5251.68	---	---
		5270	42.96	5248.40	5291.36	---	---
		5310	48.48	5288.16	5336.64	---	---
		5510	45.36	5486.00	5531.36	---	---
		5550	49.68	5521.60	5571.28	---	---
		5670	50.40	5641.28	5691.68	---	---
		5710	50.32	5681.28	5731.60	---	---
		5710_UNII-2C	43.72	5681.28	5725.00	---	---
		5710_UNII-3	6.60	5725.00	5731.60	---	---
		5755	50.16	5726.36	5776.52	---	---
		5795	51.28	5765.56	5816.84	---	---
11AC80SISO	Ant1	5210	86.40	5167.12	5253.52	---	---
		5290	87.04	5246.80	5333.84	---	---
		5530	86.40	5486.64	5573.04	---	---
		5610	86.40	5566.48	5652.88	---	---
		5690	94.72	5638.80	5733.52	---	---
		5690_UNII-2C	86.20	5638.80	5725.00	---	---
		5690_UNII-3	8.52	5725.00	5733.52	---	---
		5775	98.24	5720.60	5818.84	---	---

4.5. Test graphs

