



Modular Approval Certification Test Report

FCC ID: SDBCL200

IC: 2220A-CL200

FCC Rule Part: CFR 47 Part 24 Subpart D, Part 90 Subpart I, and Part 101 Subpart C

ISED Canada's Radio Standards Specification: RSS-119, RSS-134

TÜV SÜD Report Number: RD72160198.401

Applicant: Sensus USA, Inc.

Model: CL200

Test Begin Date: June 2, 2020

Test End Date: July 13, 2020

Report Issue Date: August 20, 2020



A2LA Cert. No. 2955.18

FOR THE SCOPE OF ACCREDITATION UNDER LAB Code 2955.18

This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, ANSI, or any agency of the Federal Government.

Prepared by:

Chris Gormley
RF Wireless Engineer
TÜV SÜD America Inc.

Reviewed by:

Kirby Munroe
Technical Manager, US Wireless
TÜV SÜD America, Inc.

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of TÜV SÜD America Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

REVISION HISTORY Report Number: RD72160198.401 Manufacturer: Sensus USA, Inc. Model: CL200					
DATE	OLD REVISION	NEW REVISION	REASON	PAGES AFFECTED	APPROVED BY
July 27, 2020	---	.400	Initial Release	All	Kirby Munroe
August 20, 2020	.400	.401	Corrected frequency from 959.5 to 952.5	26	Kirby Munroe

Table of Contents

1.0 GENERAL	4
1.1 PURPOSE	4
1.2 PRODUCT DESCRIPTION	4
1.3 TEST METHODOLOGY	4
1.4 EMISSION DESIGNATORS	6
2.0 TEST FACILITIES	7
2.1 LOCATION	7
2.2 LABORATORY ACCREDITATIONS/RECOGNITIONS/CERTIFICATIONS	7
2.3 RADIATED & CONDUCTED EMISSIONS TEST SITE DESCRIPTION	8
4.0 LIST OF TEST EQUIPMENT	10
5.0 SUPPORT EQUIPMENT	11
6.0 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM	11
7.0 SUMMARY OF TESTS	12
7.1 RF POWER OUTPUT	12
7.2 OUT OF BAND UNWANTED EMISSIONS	13
7.3 99% BANDWIDTH	26
7.5 FIELD STRENGTH OF SPURIOUS EMISSIONS	46
7.6 FREQUENCY STABILITY	51
8.0 MEASUREMENT UNCERTAINTY	60
9.0 CONCLUSION	60

1.0 GENERAL

1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 2 Subpart J, Part 24 Subpart D, Part 90 Subpart I, and Part 101 Subpart C of the FCC's Code of Federal Regulations, and ISED Canada Radio Standards Specifications RSS-119 and RSS-134.

1.2 Product Description

The FlexNet® CommandLink is a wireless interface that allows utility personnel to access a complete suite of functional controls within a gas, water or electric SmartPoint. The Bluetooth-enabled CommandLink directs the SmartPoint's activation, programming, and diagnostic settings as well as performing on-demand interrogation of the device. The CommandLink is specifically designed to operate exclusively with Flexnet radios in the 901MHz to 960MHz band.

Antenna: PIFA, 2dB

Manufacturer Information:
Sensus USA, Inc.
639 Davis Drive
Morrisville, NC 27560

Test Sample Serial Numbers:

TX Radiated	RF Conducted/Frequency Stability
CL50300539	CL50300526

Test Sample Condition: The test samples were provided in good working order with no visible defects.

1.3 Test Methodology

1.3.1 Configurations and Justification

The FLEXNET 900MHz transmitter was evaluated for radiated and RF conducted measurements for all modulation types. Where applicable, data is provided for the unit and modulation having the worst-case emissions.

For radiated emissions, the EUT was evaluated in all 3 orthogonal orientations X, Y, and Z-planes. The results presented in this document represented the worse-case orientation, which was the Y-plane.

The EUT was tested standalone, and a power supply was used to keep the EUT charged.

The client provided a PC to configure the EUT.

The output power of the software was set to 23dBm which corresponds to a 20dBm output for the EUT.

1.3.2 In-Band Testing Methodology

The EUT is designed to operate in multiple bands under the requirements of CFR 47 Parts 24 and 101. The following is a list of the frequency bands of operation sorted based on the FCC rule parts in which the band is associated.

CFR Title 47 Rule Part	Frequency Band of Operation (MHz)
90	896.0125 – 901.0
24D	901.0 – 902.0
101	928.85 – 929.0
24D	930.0 – 931.0
101	932.0 -932.5
90	935.0 -940.0
24D	940.0 – 941.0
101	941.0 – 941.5
101	952.0 – 953.0
101	959.85 – 960.0

Based on the requirements set forth in accordance 47 CFR 2.1046-2.1057 as stated above, the methodology in selecting the places to test in the available bands of operation is outlined in the following table.

CFR Title 47 Rule Part	Frequency Band of Operation (MHz)	Location in the Range of Operation	Approx. Test Freq.
90	896.0 – 901.0	1 near top and 1 near bottom	896.0125 and 901.9875
24D	901.0 – 902.0		
101	928.85 – 929.0	Middle	928.925
24D	930.0 – 931.0	Middle	930.5
101	932.0 -932.5	Middle	932.25
90	935.0 -940.0	1 near top and 1 near bottom	935.0125 and 941.4875
24D	940.0 – 941.0		
101	941.0 – 941.5		
101	952.0 – 953.0	Middle	952.5
101	959.85 – 960.0	Middle	959.9250

1.4 Emission Designators

The CL200 transmitter produces four distinct modulation types. The emission designators for the modulation types used by the CL200 transmitter were calculated using the baud rate defined in the Theory of Operation are as follows:

EMISSIONS DESIGNATORS

Mode	Emission Designator	Modulation
MPass (5 kbps)	5K90F1D	2-GFSK
MPass (10 kbps)	11K8F1D	2-GFSK
MPass (12.5 kbps)	14K8F1D	2-GFSK
Amplitude Shift Keying (ASK)	10K3F2D	ASK

2.0 TEST FACILITIES

2.1 Location

The radiated and conducted emissions test sites are located at the following address:

TÜV SÜD America Inc.
2320 Presidential Drive, Suite 101
Durham, NC 27703
Phone: (919) 381-4235

2.2 Laboratory Accreditations/Recognitions/Certifications

TÜV SÜD America Inc. (Durham) is accredited to ISO/IEC 17025 by A2LA accreditation program, and has been issued certificate number 2955.18 in recognition of this accreditation. Unless otherwise specified, all tests methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

The Semi-Anechoic Chamber Test Site and Conducted Emissions Site have been fully described, submitted to, and accepted by the FCC and Innovation, Science and Economic Development (ISED) Canada.

FCC Designation Number: US1245
FCC Test Firm Registration Number: 238628
ISED Canada Company Number: 20446

2.3 Radiated & Conducted Emissions Test Site Description

2.3.1 Semi-Anechoic Chamber Test Site

The Semi-Anechoic Chamber Test Site consists of an 18' x 28' x 18' shielded enclosure. The chamber is lined with Samwha Electronics Co. LTD Ferrite Absorber, model number SFA300 (HSN-1). The ferrite tile is 10cm x 10 cm and weighs approximately 1.4lbs. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber. On top of the ferrite tiles is DMAS HT-45 (Dutch Microwave Absorber Solutions) hybrid absorber on all walls except the wall behind the antenna mast which has a shorter DMAS HT-25 absorber.

The turntable is 1.50m in diameter and is located 150cm from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using short #6 copper wire. The turntable is an aluminum, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the turntable. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane.

Behind the turntable is a 2' x 6' x 1.5' deep shielded pit used for support equipment if necessary. The pit is equipped with 2 - 4" PVC chase from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3.1-1 below:

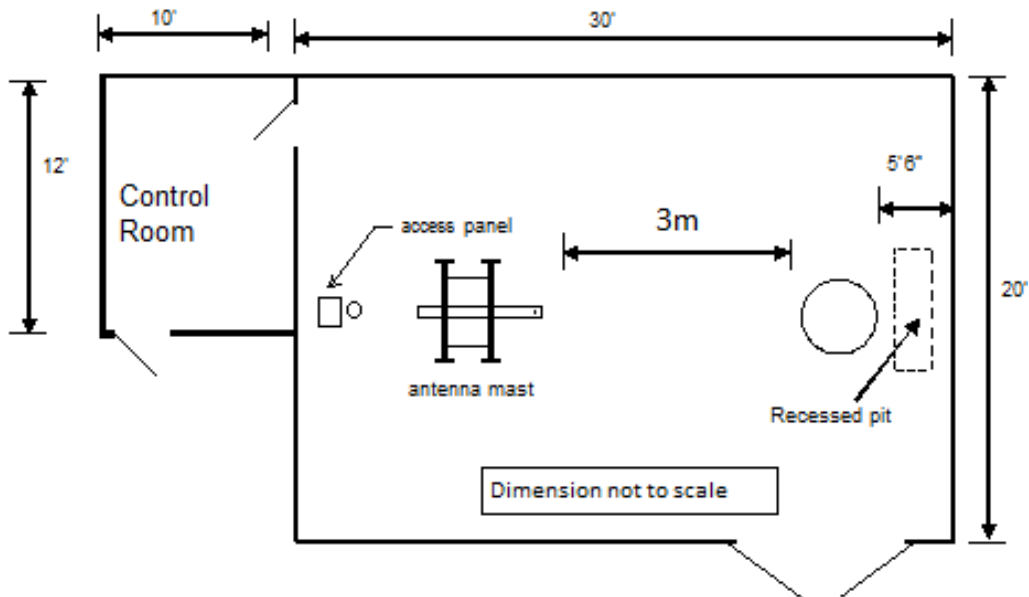


Figure 2.3.1-1: Semi-Anechoic Chamber Test Site

3.0 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ❖ ANSI C63.26-2015: Compliance Testing of Transmitters Used in Licensed Radio Services
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures - 2020
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 24, Subpart D: Personal Communications Services – 2020
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 90, Subpart I: General Technical Standards – 2020
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 101, Subpart C: Fixed Microwave Services -2020
- ❖ ISED Canada Radio Standards Specification: RSS-119 - Radio Transmitters and Receivers Operating in the Land Mobile and Fixed Services in the Frequency Range 27.41-960 MHz, Issue 12, May 2015
- ❖ ISED Canada Radio Standards Specification: RSS-134 - 900 MHz Narrow Band Personal Communication Service, Issue 2, February 2016
- ❖ ISED Canada Radio Standards Specification: RSS-GEN – General Requirements for Compliance of Radio Apparatus, Issue 5, Amendment 1, March 2019.

4.0 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

Table 4-1: Test Equipment Used

Asset ID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
DEMC0426	Thermotron	S-8 Mini Max	Environmental Chamber	25-2888-10	1/23/2020	1/23/2021
DEMC3002	Rohde & Schwarz	ESU40	Receiver	100346	1/22/2020	1/22/2021
DEMC3006	Rohde & Schwarz	TS-PR18	Amplifier	122006	1/23/2020	1/23/2021
DEMC3007	Rohde & Schwarz	TS-PR26	Amplifier	100051	1/23/2020	1/23/2021
DEMC3008	Rohde & Schwarz	NRP2	Meter	103131	2/11/2020	2/11/2021
DEMC3009	Rohde & Schwarz	NRP-Z81	Meter	102397	2/11/2020	2/11/2021
DEMC3012	Rohde & Schwarz	EMC32-EB	Software	100731	NCR	NCR
DEMC3014	EMCO	3115	Antenna	9901-5653	4/12/2019	4/12/2021
DEMC3016	Fei Teng Wireless Technology	HA-07M18G-NF	Antenna	2013120203	4/8/2020	4/8/2021
DEMC3020	Rohde & Schwarz	SMB100A	Signal Generator	175943	1/22/2020	1/22/2021
DEMC3027	Micro-Tronics	BRM50702	2.4GHz Notch Filter	175	1/27/2020	1/27/2021
DEMC3029	Micro-Tronics	HPM50108	900MHz HP Filter	134	1/27/2020	1/27/2021
DEMC3032	Hasco, Inc.	HLL142-S1-S1-192/WA	Cable	3075	1/23/2020	1/23/2021
DEMC3038	Florida RF Labs	NMSE-290AW-60.0-NMSE	Cable Set	1448	1/27/2020	1/27/2021
DEMC3039	Florida RF Labs	NMSE-290AW-396.0-NMSE	Cable Set	1447	1/27/2020	1/27/2021
DEMC3055	Rohde & Schwarz	3005	Cable	3055	1/23/2020	1/23/2021
DEMC3085	Rohde & Schwarz	FSW43	Spectrum Analyzer	103997	1/22/2020	1/22/2021
DEMC3161	TESEQ	CBL-6112D	Antenna	51323	2/18/2020	2/18/2021
DEMC3178	Micro-Tronics	BRC50722	Filter	G040	3/6/2020	3/6/2021

NCR = No Calibration Required

Asset DEMC3002: Firmware Version: ESU40 is 4.73 SP4

Asset DEMC3012: Software Version: EMC32-B is 10.50.00

Asset DEMC3020: Firmware Rev: 2.20.382.113

Asset DEMC3085: Instrument Firmware 2.90 SP1

5.0 SUPPORT EQUIPMENT

Table 5-1: EUT and Support Equipment Description

Item #	Type Device	Manufacturer	Model/Part #	Serial #
1	EUT	Sensus	CL200	See Section 1.2
2	Wall Wart	Wall Industries, Inc.	GPSU15U-1	EJ-0150794 B1823R

Table 5-2: Cable Description

Cable #	Cable Type	Length	Shield	Termination
A	DC Power Cable	1.5m	No	1 to 2

6.0 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

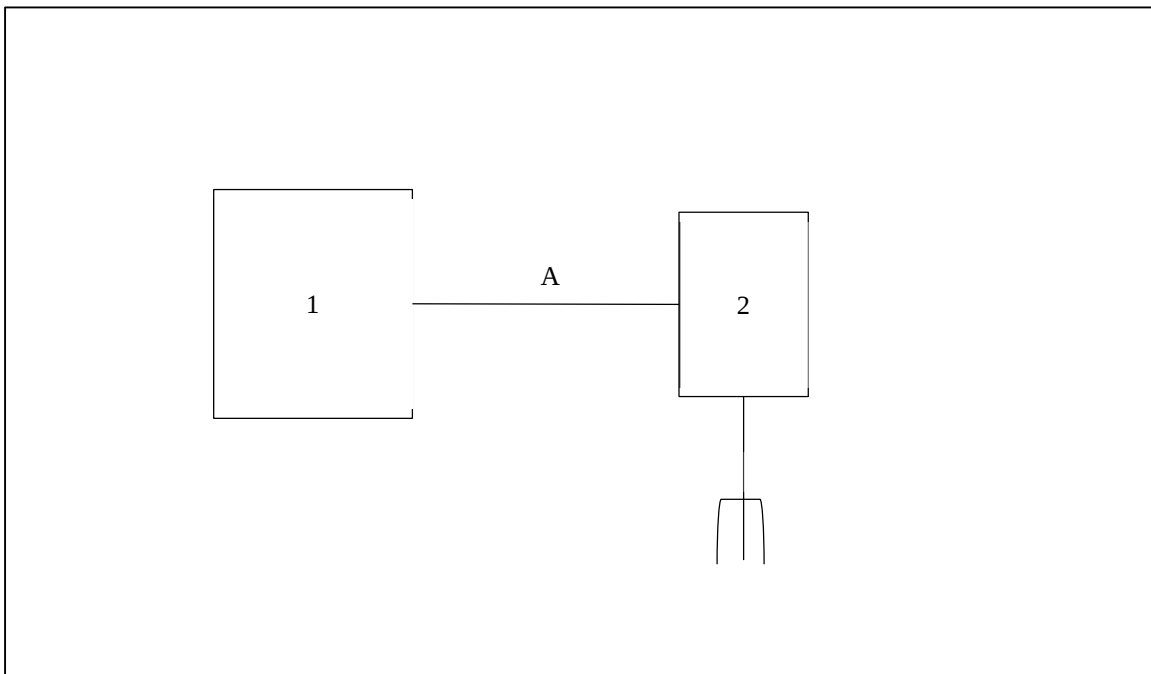


Figure 6-1: Test Setup Block Diagram

7.0 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

7.1 RF Power Output

7.1.1 Measurement Procedure (ANSI 63.26: 2015 Section 5.2.3.2)

The RF output of the equipment under test was directly connected to the input of a wide band RF power meter through 20.05dB of passive attenuation. The results are shown below.

Part 24.132, 90.204, 101.113 (a), and ISED Canada RSS-134 4.3(a), (b) and RSS-119 5.4 – Power Output

7.1.2 Measurement Results

Performed by: Chris Gormley

Table 7.1.2-1: Peak Output Power - FSK

FCC Rule Part	Frequency (MHz)	Output Power Peak (dBm)	Output Power Average (dBm)
90	896.0125	19.79	19.67
24D	901.9875	19.75	19.54
101	928.925	19.20	19.07
24D	930.5	19.67	19.53
101	932.25	19.63	19.52
90	935.0125	19.65	19.51
101	941.4875	19.66	19.51
101	952.5	19.53	19.56
101	959.925	19.64	19.57

Table 7.1.2-2: Peak Output Power - ASK

FCC Rule Part	Frequency (MHz)	Output Power Peak (dBm)	Output Power Average (dBm)
24D	901.9875	18.66	15.92
101	928.925	18.64	14.78
24D	930.5	18.29	15.60
101	932.25	18.32	15.03
101	941.4875	18.19	15.04
101	952.5	18.18	15.25
101	959.925	18.16	15.62

7.2 Out of Band Unwanted Emissions

7.2.1 Measurement Procedure (ANSI 63.26: 2015 Section 5.7.3)

The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer through 20.05dB of passive attenuation. The spectrum analyzer resolution and video bandwidths were set to 300 Hz and 1000 Hz respectively. The internal correction factors of the spectrum analyzer were employed to correct for any cable or attenuator losses. Results of the test are shown below for all modes of operation.

7.2.2 Measurement Results – Emission Masks

Performed by: Chris Gormley

Part 24.133 a(1), a(2), ISCED Canada RSS-134 4.4.1 (a), (b), 4.4.2 (a),(b) – Emission Limits

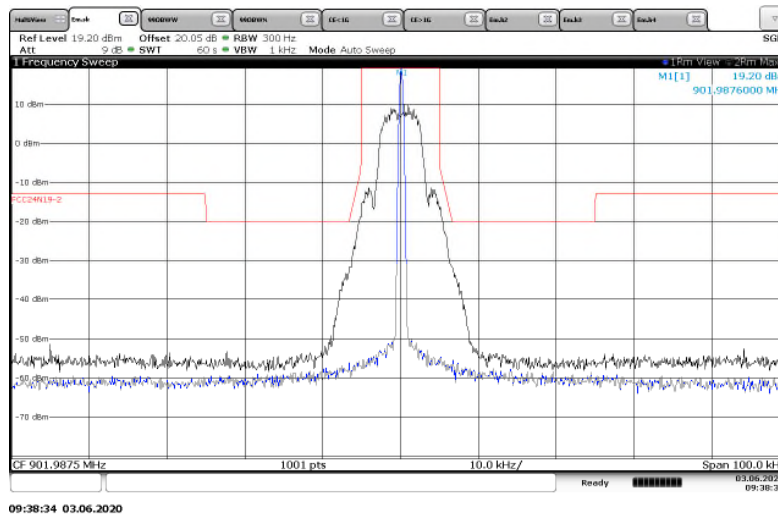


Figure 7.2.2-1: 901.9875 MHz – 12.5 kHz Channel Spacing – MPass 5k Mode

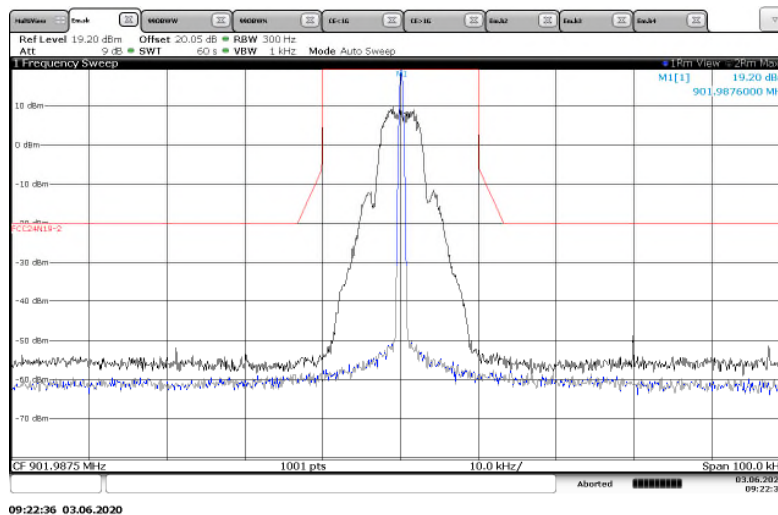


Figure 7.2.2-2: 901.9875 MHz – 25 kHz Channel Spacing – MPass 5k Mode

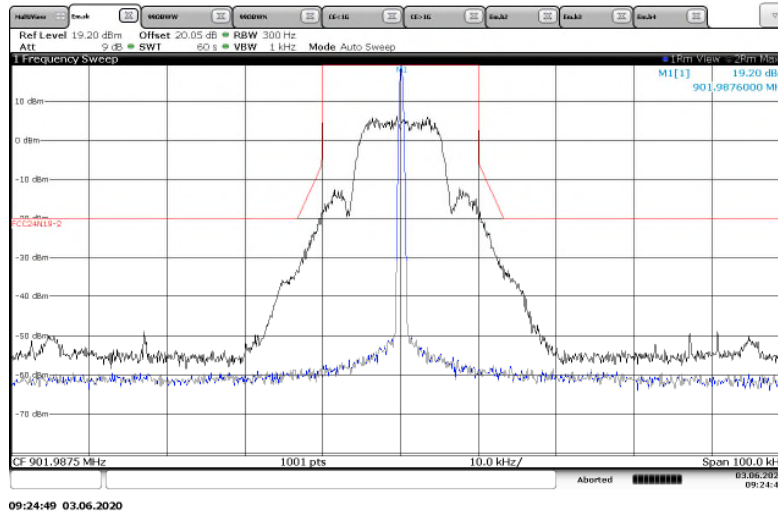


Figure 7.2.2-3: 901.9875 MHz – 25 kHz Channel Spacing – MPass 10k Mode

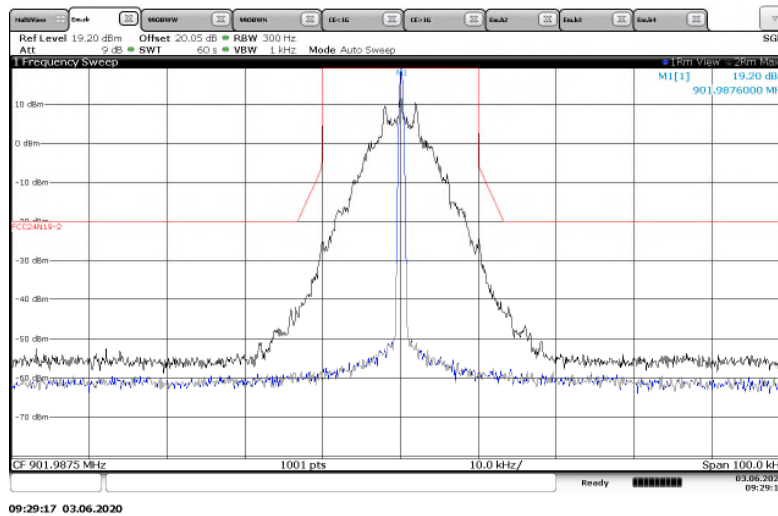


Figure 7.2.2-4: 901.9875 MHz – 25 kHz Channel Spacing – MPass 12.5k Mode

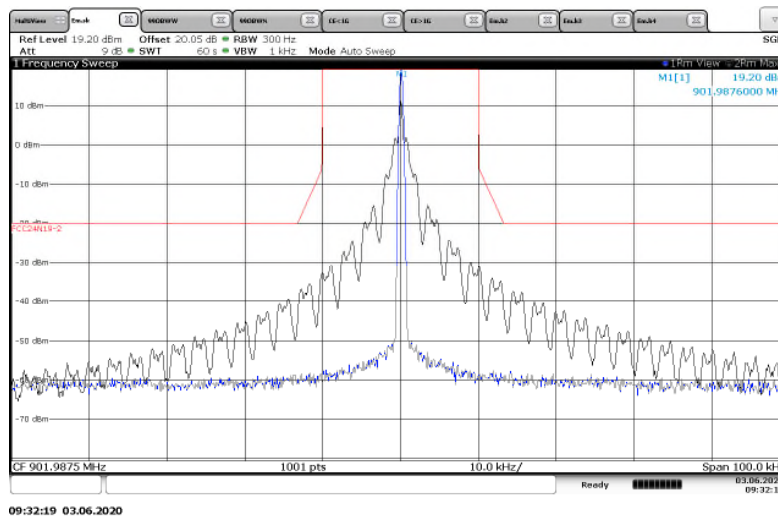


Figure 7.2.2-5: 901.9875 MHz – 25 kHz Channel Spacing – ASK Mode

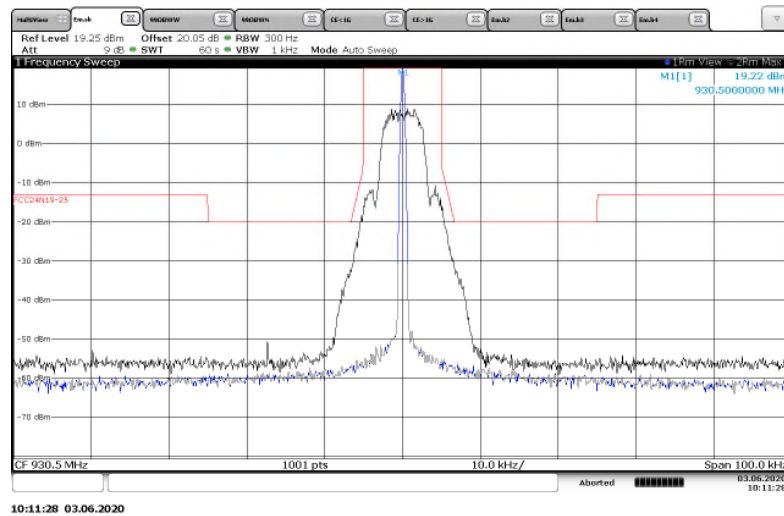


Figure 7.2.2-6: 930.5 MHz – 12.5 kHz Channel Spacing – mPass 5k Mode

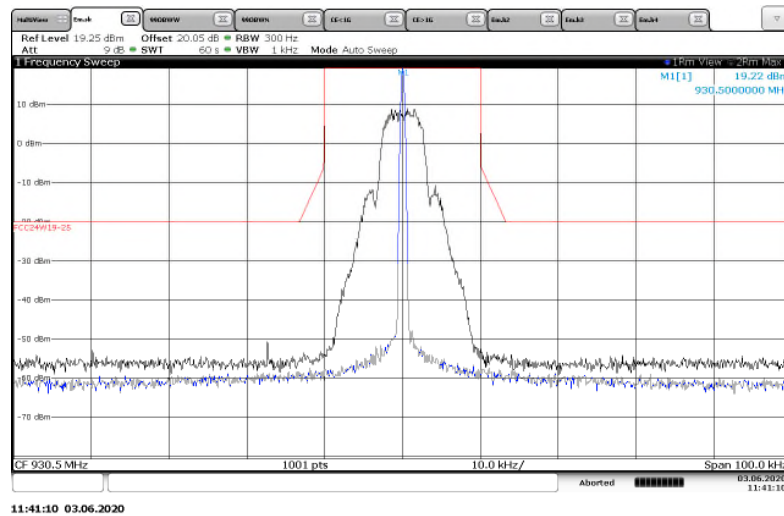


Figure 7.2.2-7: 930.5 MHz – 25 kHz Channel Spacing – mPass 5k Mode

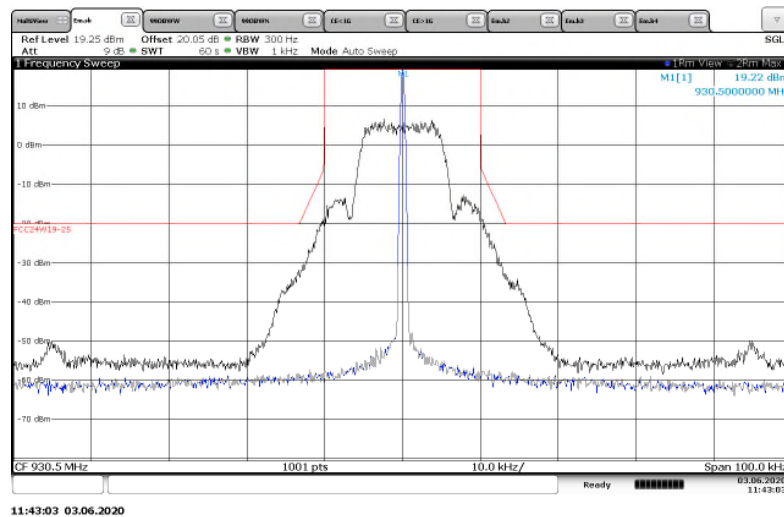


Figure 7.2.2-8: 930.5 MHz – 25 kHz Channel Spacing – mPass 10k Mode

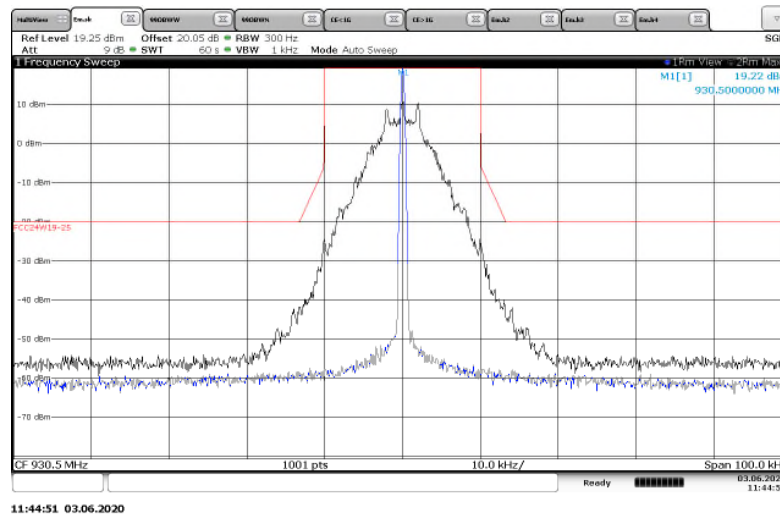


Figure 7.2.2-9: 930.5 MHz – 25 kHz Channel Spacing – mPass 12.5k Mode

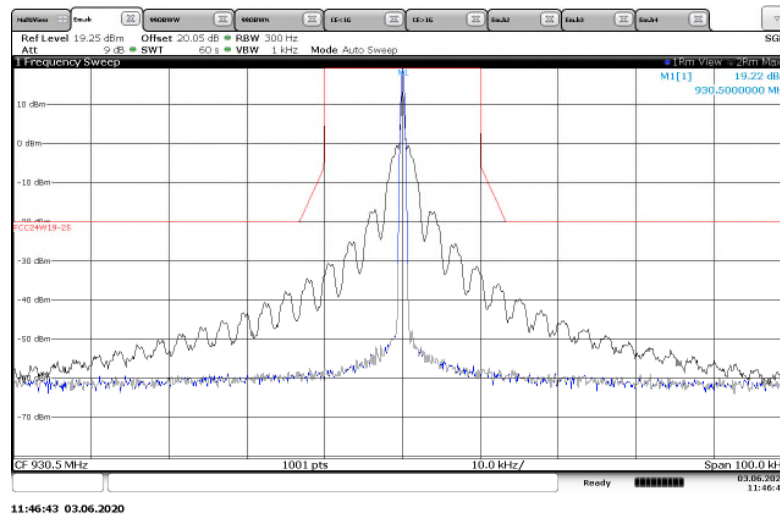
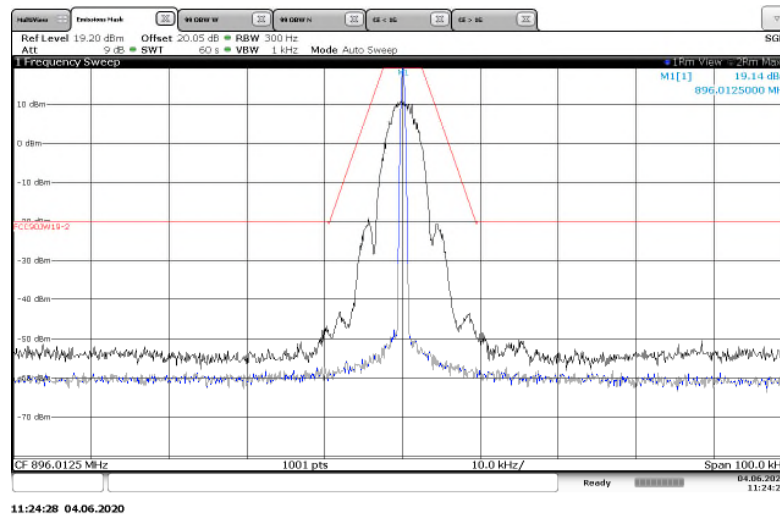
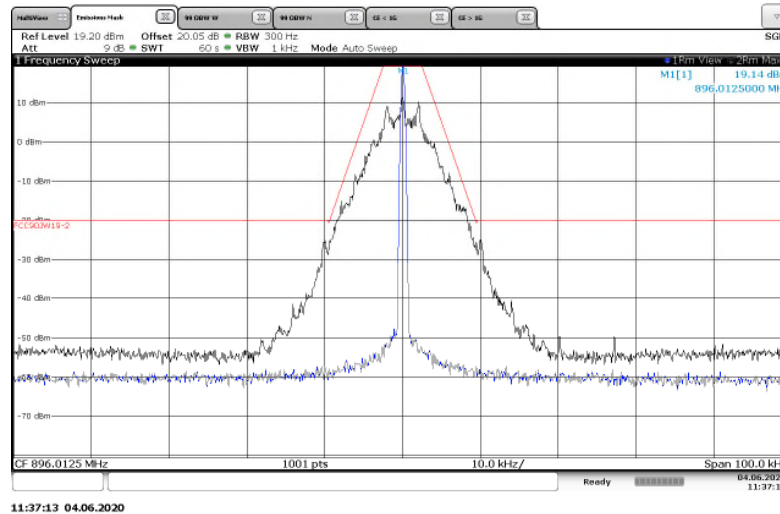
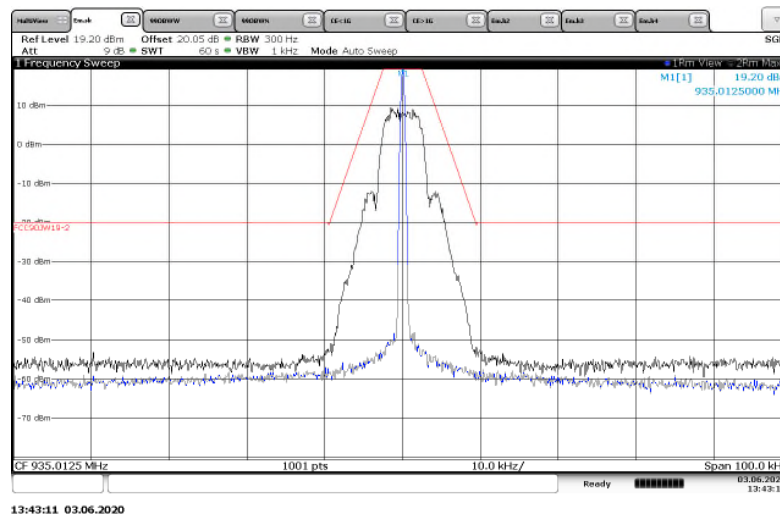


Figure 7.2.2-10: 930.5 MHz – 25 kHz Channel Spacing – ASK Mode

Part 90.210(i), ISD Canada RSS-119 5.8.8**Figure 7.2.2-11: 896.0125 MHz – 25 kHz Channel Spacing – MPass 5k Mode****Figure 7.2.2-12: 896.0125 MHz – 25 kHz Channel Spacing – MPass 12.5k Mode****Figure 7.2.2-13: 935.0125 MHz – 25 kHz Channel Spacing – MPass 5k Mode**

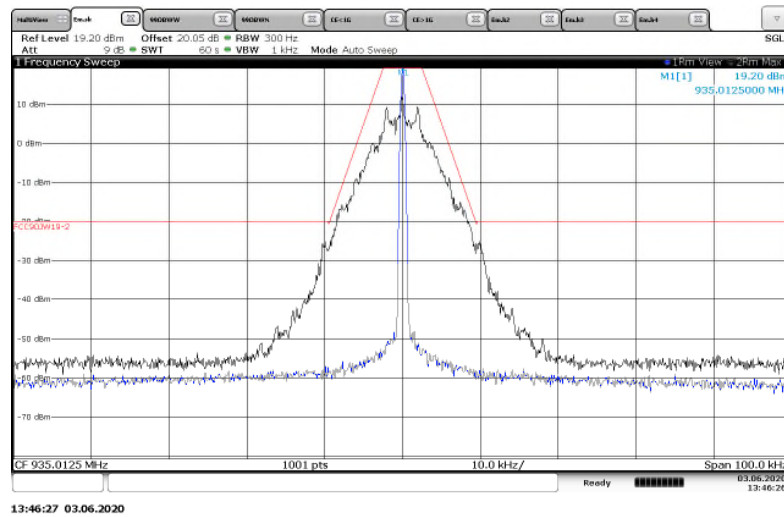
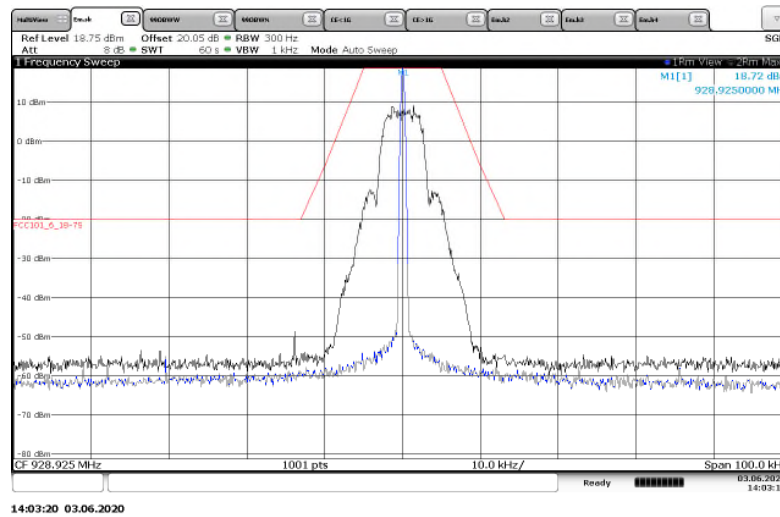
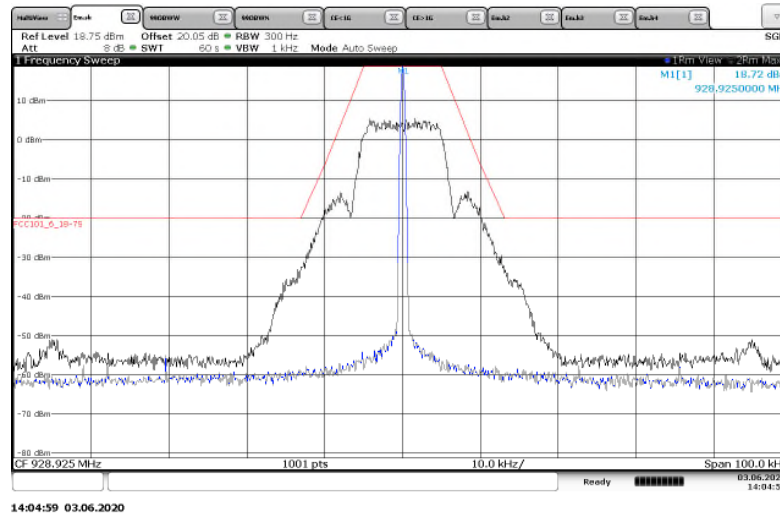
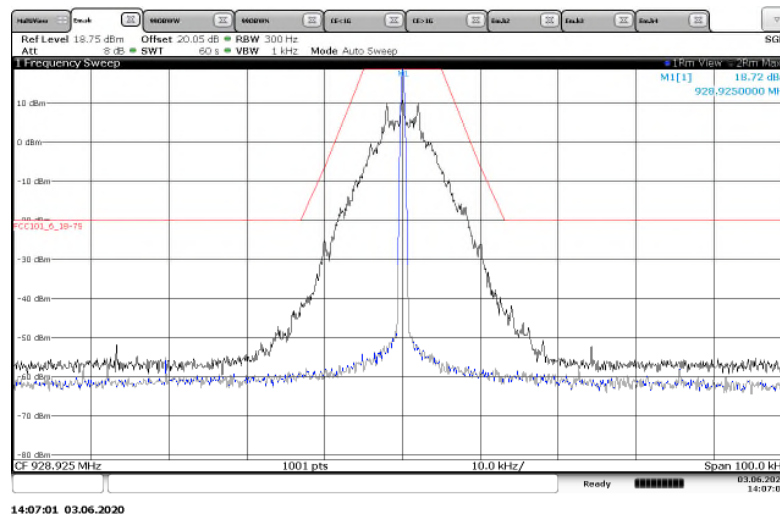


Figure 7.2.2-14: 935.0125 MHz – 25 kHz Channel Spacing – MPass 12.5k Mode

Part 101.111 a(5), a(6), RSS-119 5.8.6 (FCC Part 101.111 a(5) a(6) provides worst case)**Figure 7.2.2-15: 928.925 MHz – 25 kHz Channel Spacing – MPass 5k Mode****Figure 7.2.2-16: 928.925 MHz – 25 kHz Channel Spacing – MPass 10k Mode****Figure 7.2.2-17: 928.925 MHz – 25 kHz Channel Spacing – MPass 12.5k Mode**

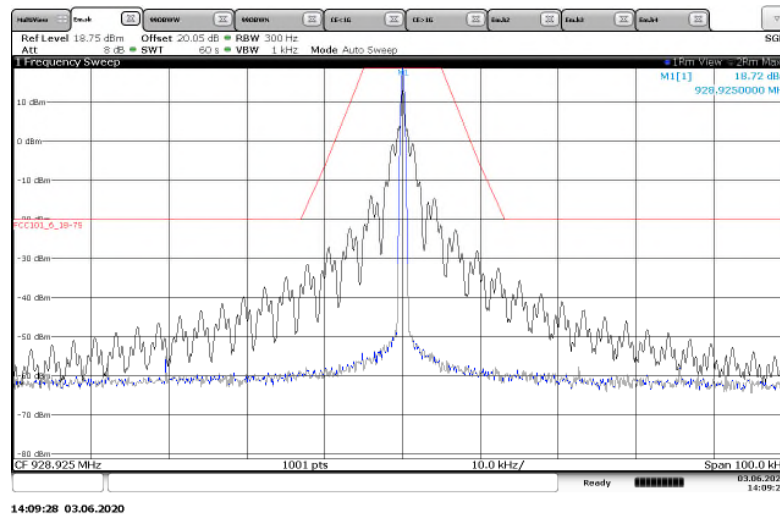


Figure 7.2.2-18: 928.925 MHz – 25 kHz Channel Spacing – ASK Mode

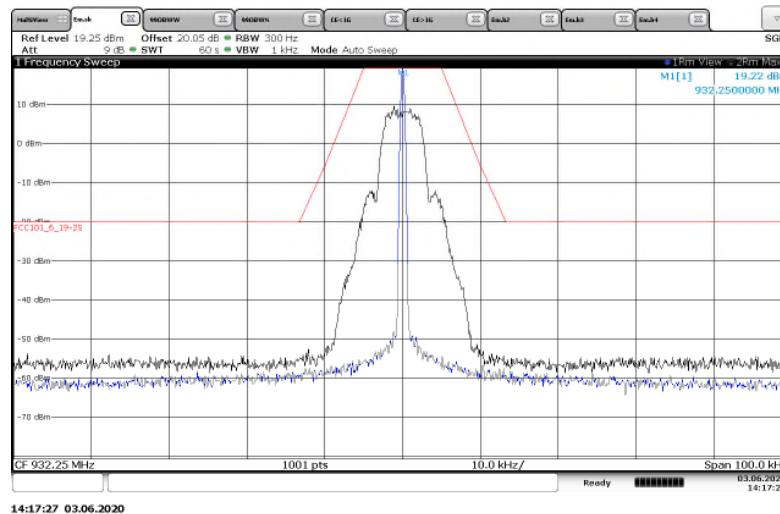


Figure 7.2.2-19: 932.25 MHz – 25 kHz Channel Spacing – MPass 5k Mode

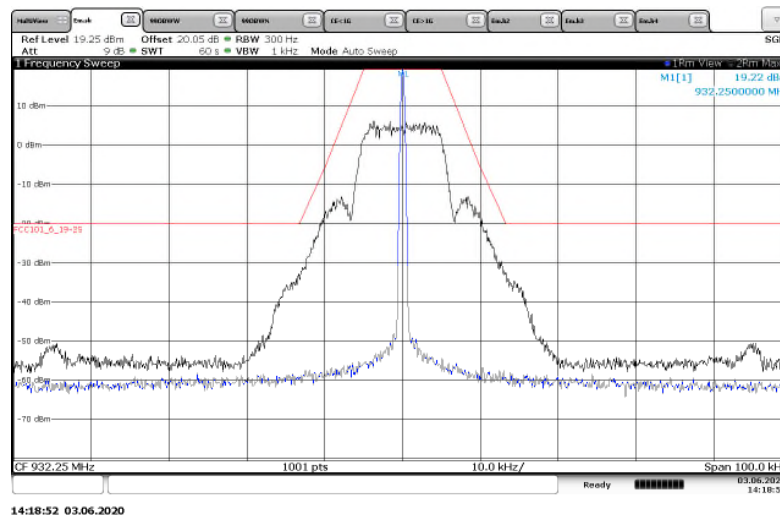


Figure 7.2.2-20: 932.25 MHz – 25 kHz Channel Spacing – MPass 10k Mode

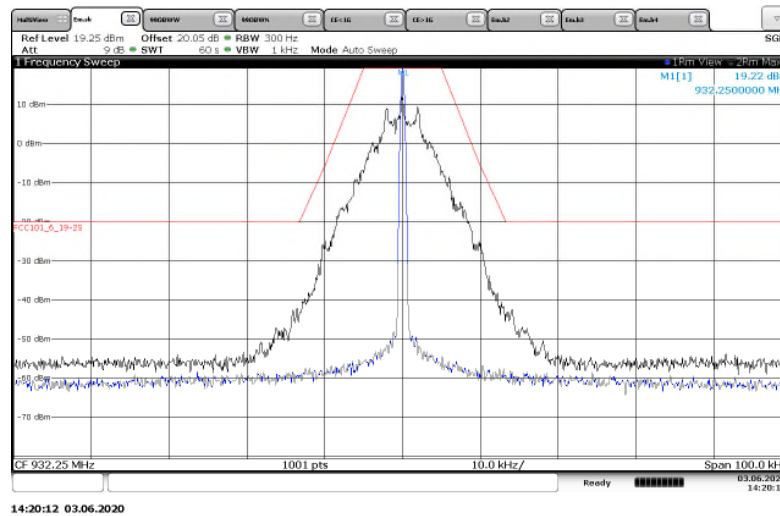


Figure 7.2.2-21: 932.25 MHz – 25 kHz Channel Spacing – MPass 12.5k Mode

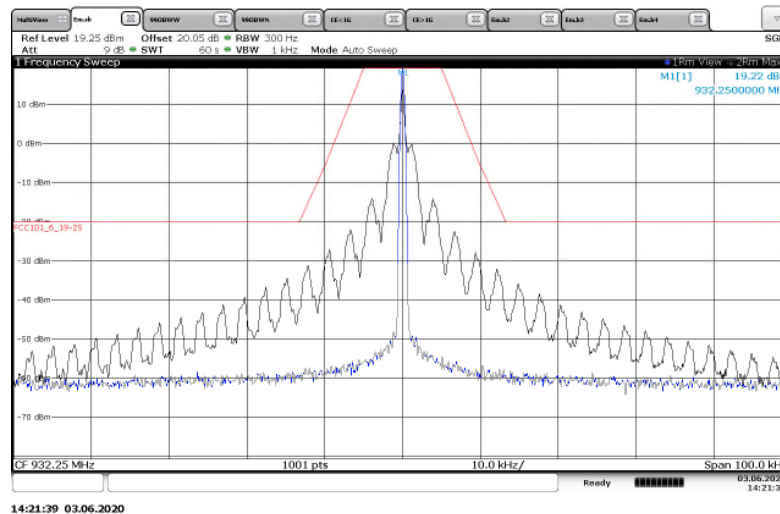


Figure 7.2.2-22: 932.25 MHz – 25 kHz Channel Spacing – ASK Mode

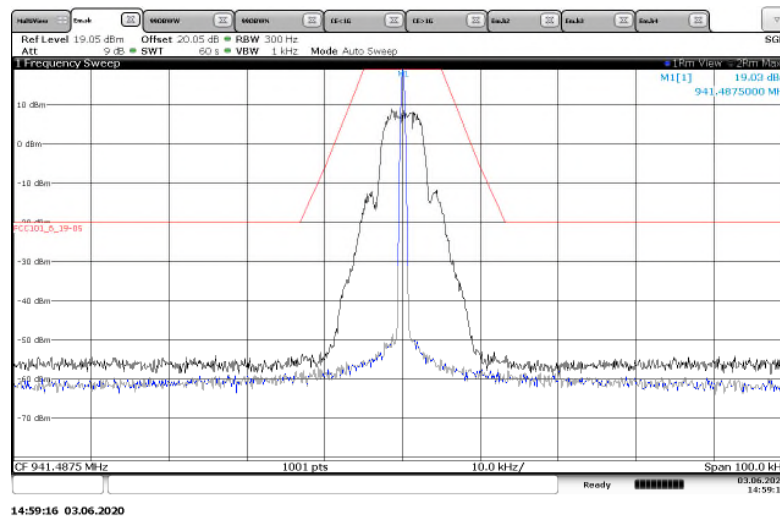


Figure 7.2.2-23: 941.4875 MHz – 25 kHz Channel Spacing – mPass 5k Mode

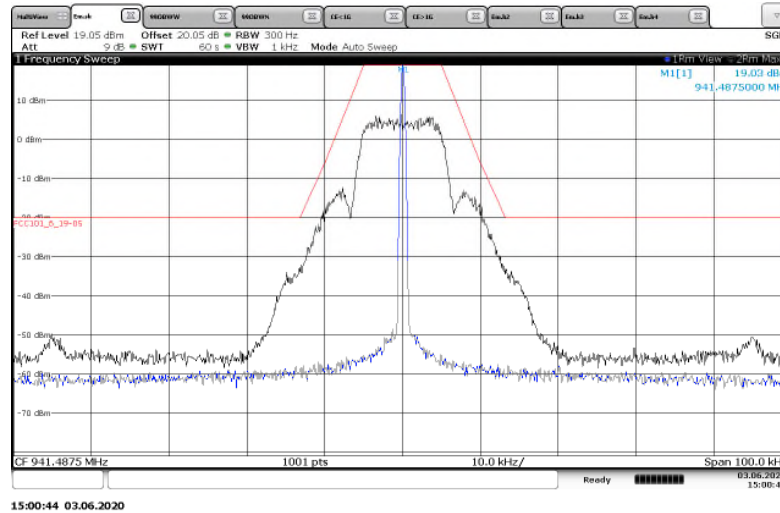


Figure 7.2.2-24: 941.4875 MHz – 25 kHz Channel Spacing – mPass 10k Mode

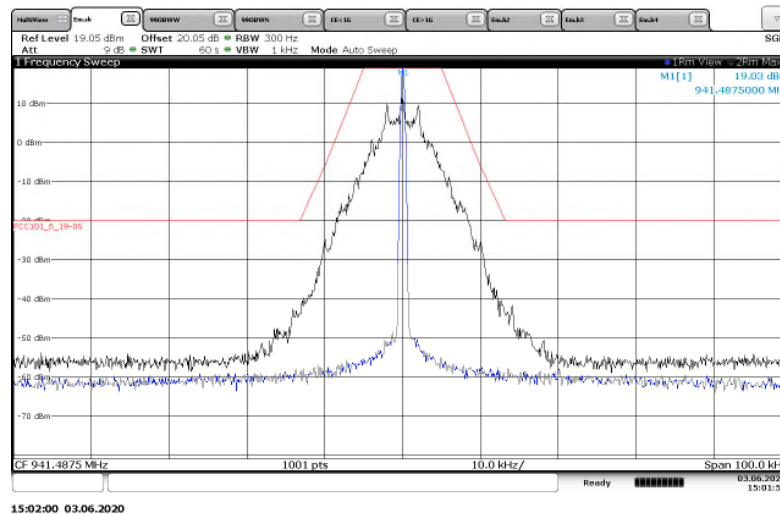


Figure 7.2.2-25: 941.4875 MHz – 25 kHz Channel Spacing – mPass 12.5k Mode

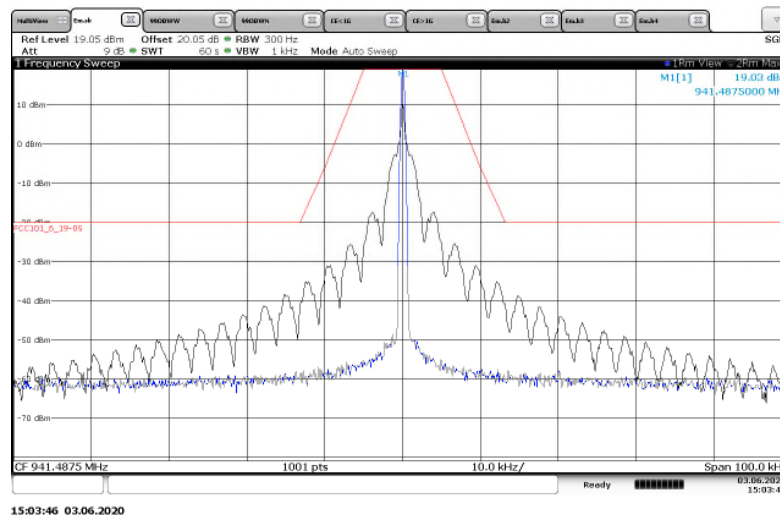


Figure 7.2.2-26: 941.4875 MHz – 25 kHz Channel Spacing – ASK Mode

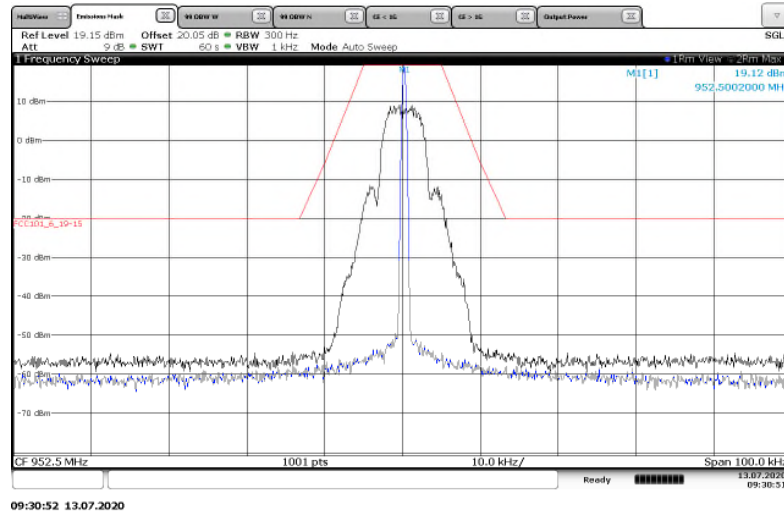


Figure 7.2.2-27: 952.5 MHz – 25 kHz Channel Spacing – mPass 5k Mode

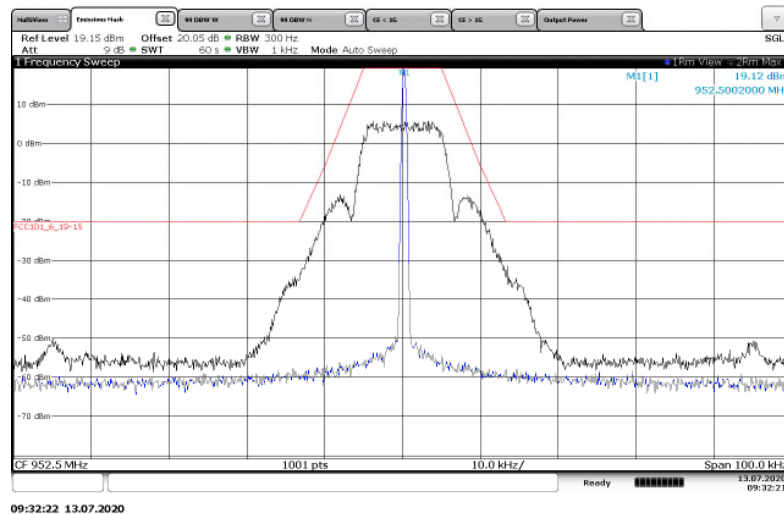


Figure 7.2.2-28: 952.5 MHz – 25 kHz Channel Spacing – mPass 10k Mode

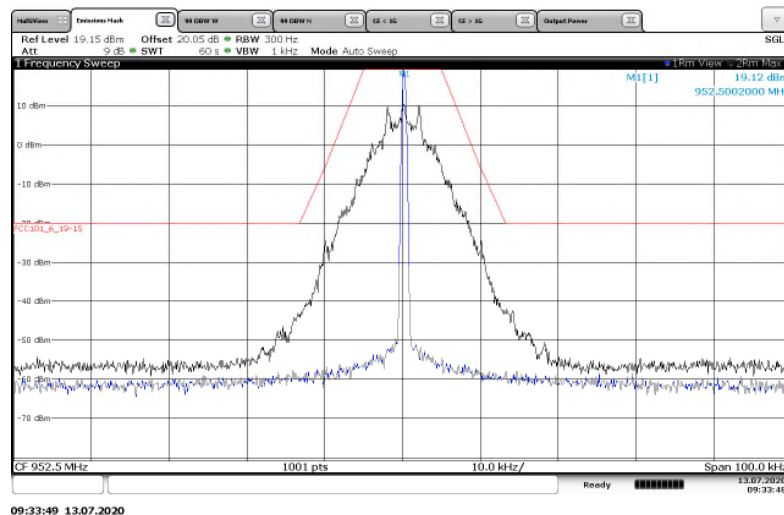


Figure 7.2.2-29: 952.5 MHz – 25 kHz Channel Spacing – mPass 12.5k Mode

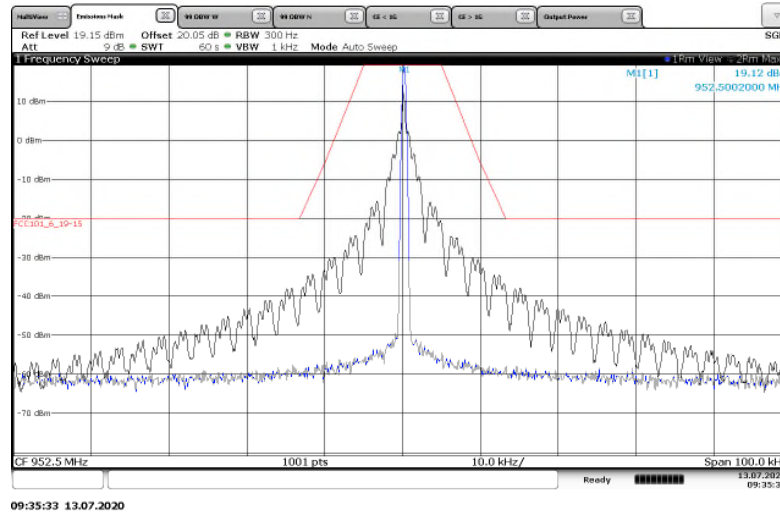


Figure 7.2.2-30: 952.5 MHz – 25 kHz Channel Spacing – ASK Mode

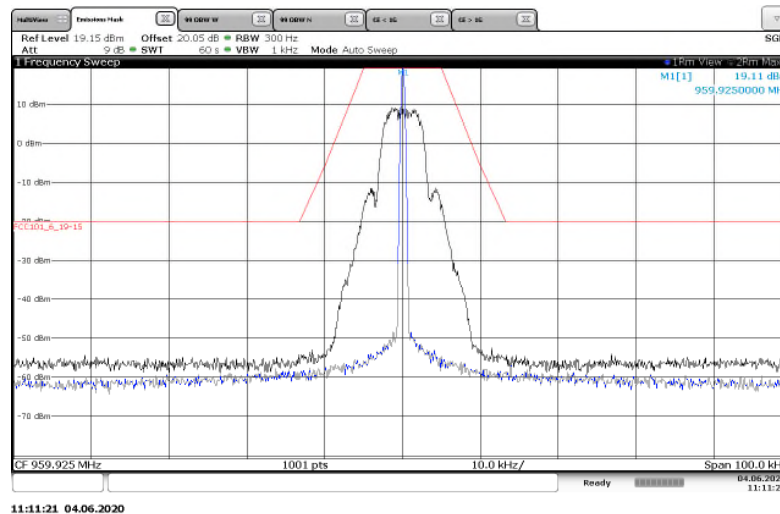


Figure 7.2.2-31: 959.925 MHz – 25 kHz Channel Spacing – mPass 5k Mode

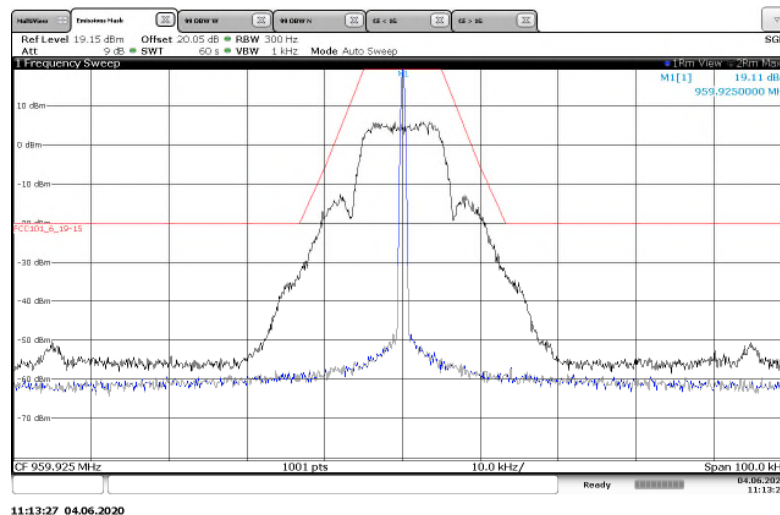


Figure 7.2.2-32: 959.925 MHz – 25 kHz Channel Spacing – mPass 10k Mode

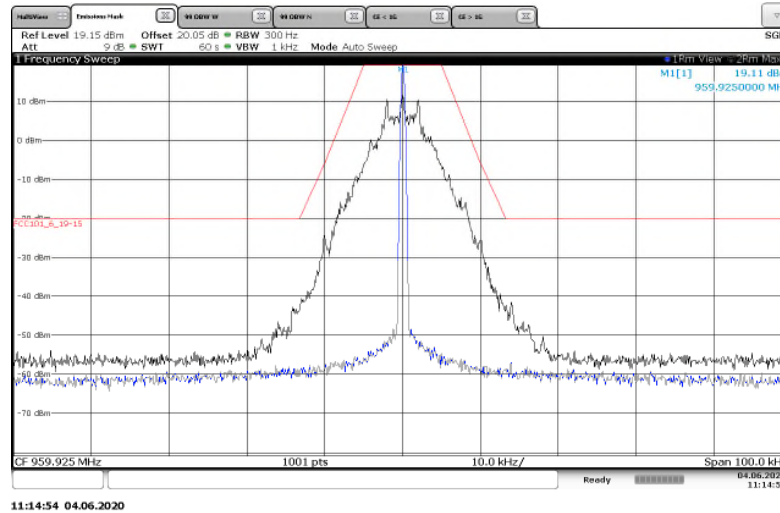


Figure 7.2.2-33: 959.925 MHz – 25 kHz Channel Spacing – mPass 12.5k Mode

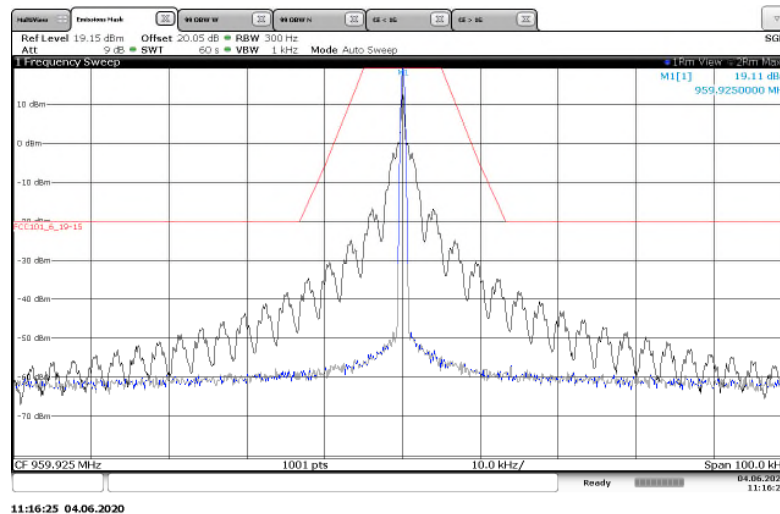


Figure 7.2.2-34: 959.925 MHz – 25 kHz Channel Spacing – ASK Mode

7.3 99% Bandwidth

7.3.1 Measurement Procedure (ANSI 63.26: 2015 Section 5.4.4)

The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer through 20.05dB of passive attenuation. The internal correction factors of the spectrum analyzer were employed to correct for any cable and attenuator losses.

The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts. The nominal IF filter 3 dB bandwidth (RBW) is in the range of 1% to 5% of the OBW, and the VBW was set $\geq 3 \times$ RBW. The reference level was set to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. The measurements were made using the spectrum analyzer's 99% BW function.

7.3.2 Measurement Results

Performed by: Chris Gormley

Frequency (MHz)	ISED Canada Rule Part	Mode of Operation	99% Bandwidth (kHz)
901.9875	RSS-134	MPass 5k	5.80
901.9875	RSS-134	MPass 10k	11.81
901.9875	RSS-134	MPass 12.5k	11.93
901.9875	RSS-134	ASK	4.54
930.5000	RSS-134	MPass 5k	5.78
930.5000	RSS-134	MPass 10k	11.83
930.5000	RSS-134	MPass 12.5k	11.83
930.5000	RSS-134	ASK	4.67
896.0125	RSS-119	MPass 5k	5.15
896.0125	RSS-119	MPass 12.5k	12.01
928.9250	RSS-119	MPass 5k	5.76
928.9250	RSS-119	MPass 10k	11.85
928.9250	RSS-119	MPass 12.5k	11.91
928.9250	RSS-119	ASK	4.43
932.2500	RSS-119	MPass 5k	5.79
932.2500	RSS-119	MPass 10k	11.84
932.2500	RSS-119	MPass 12.5k	11.80
932.2500	RSS-119	ASK	4.64
935.0125	RSS-119	MPass 5k	5.85
935.0125	RSS-119	MPass 12.5k	11.85
941.4875	RSS-119	MPass 5k	5.79
941.4875	RSS-119	MPass 10k	11.92
941.4875	RSS-119	MPass 12.5k	11.94
941.4875	RSS-119	ASK	4.48
952.5000	RSS-119	MPass 5k	5.89
952.5000	RSS-119	MPass 10k	11.93
952.5000	RSS-119	MPass 12.5k	11.78
952.5000	RSS-119	ASK	6.09

959.925	RSS-119	MPass 5k	5.78
959.925	RSS-119	MPass 10k	11.90
959.925	RSS-119	MPass 12.5k	12.09
959.925	RSS-119	ASK	7.15

ISED Canada RSS-GEN 6.6, ISED Canada RSS-134

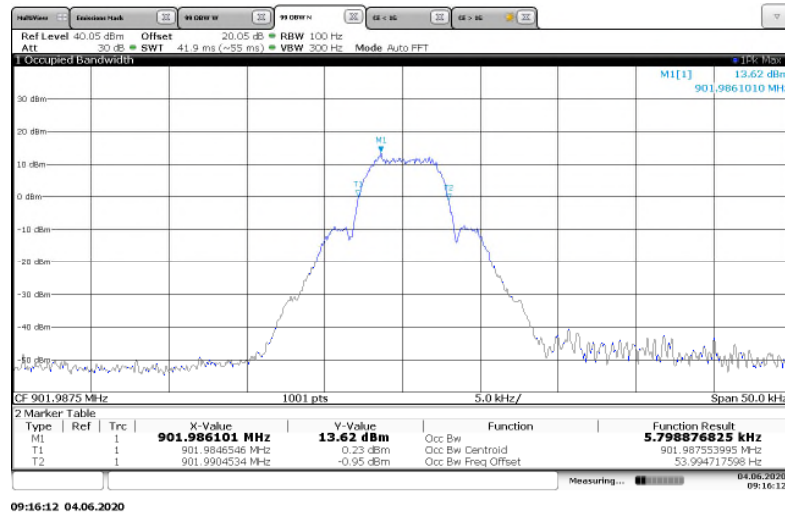


Figure 7.3.2-1: 901.9875 MHz – MPass 5k Mode

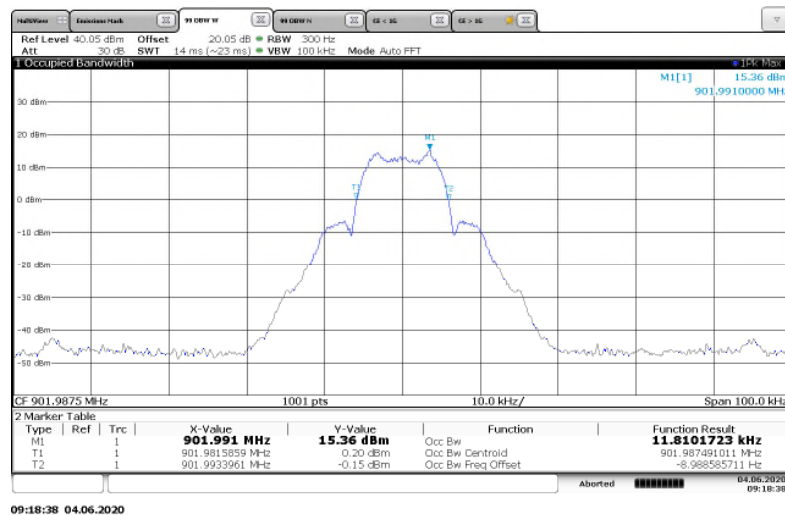


Figure 7.3.2-2: 901.9875 MHz – MPass 10k Mode

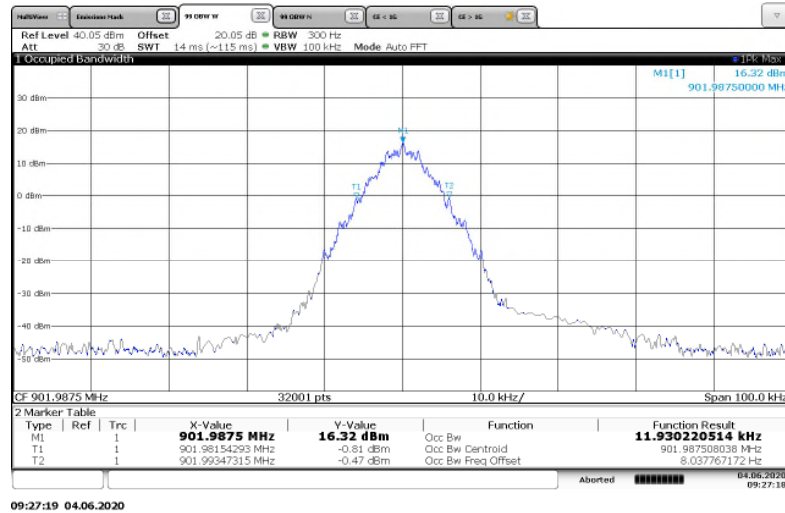


Figure 7.3.2-3: 901.9875 MHz – MPass 12.5k Mode

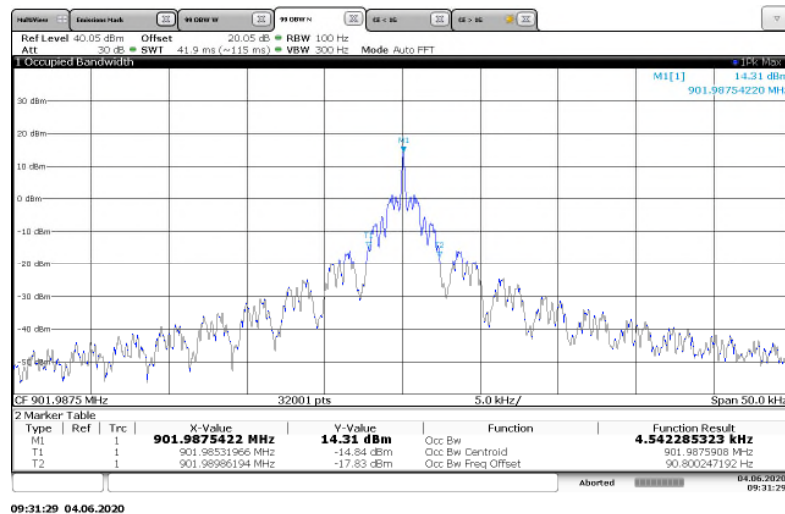


Figure 7.3.2-4: 901.9875 MHz – ASK Mode

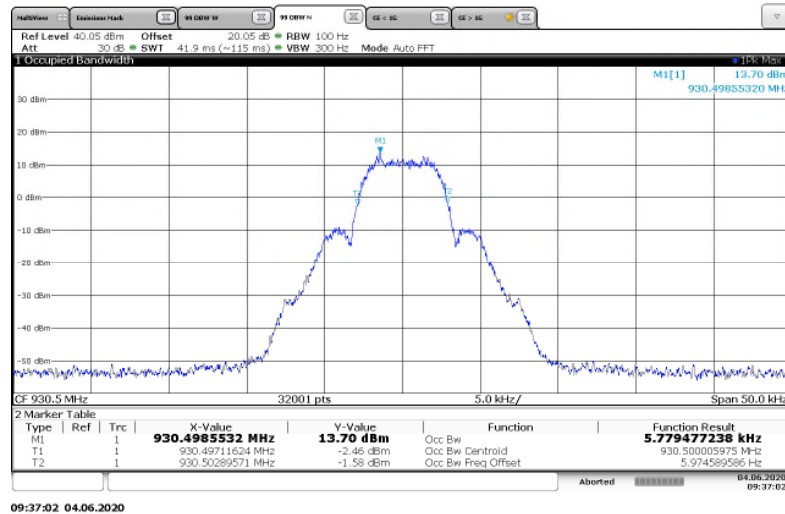


Figure 7.3.2-5: 930.5 MHz – MPass 5k Mode

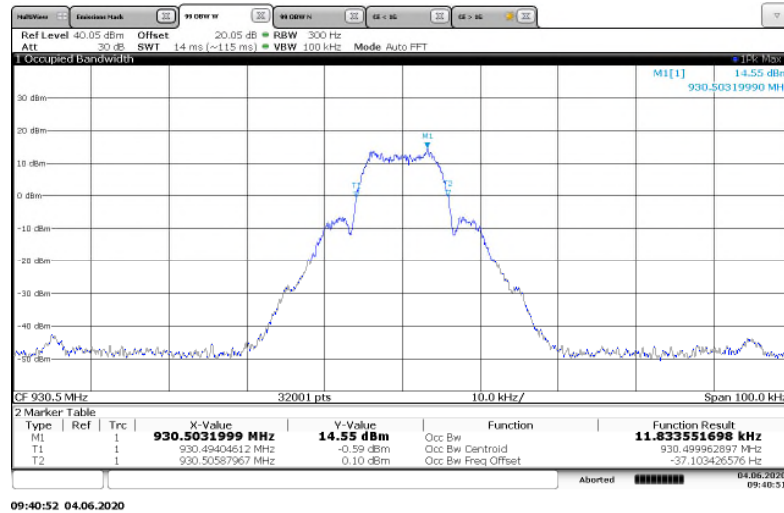


Figure 7.3.2-6: 930.5 MHz – MPass 10k Mode

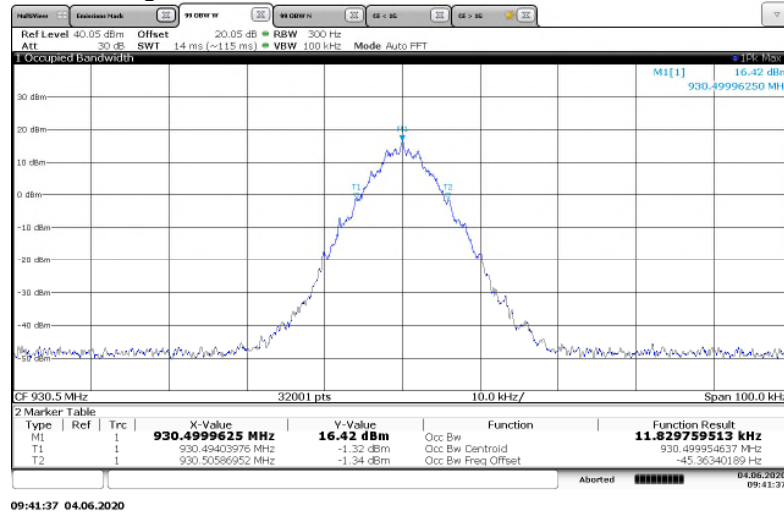


Figure 7.3.2-7: 930.5 MHz – MPass 12.5k Mode

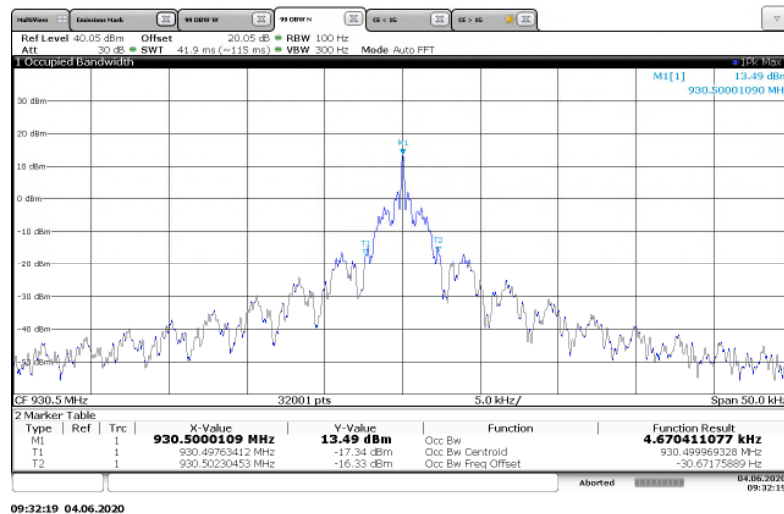
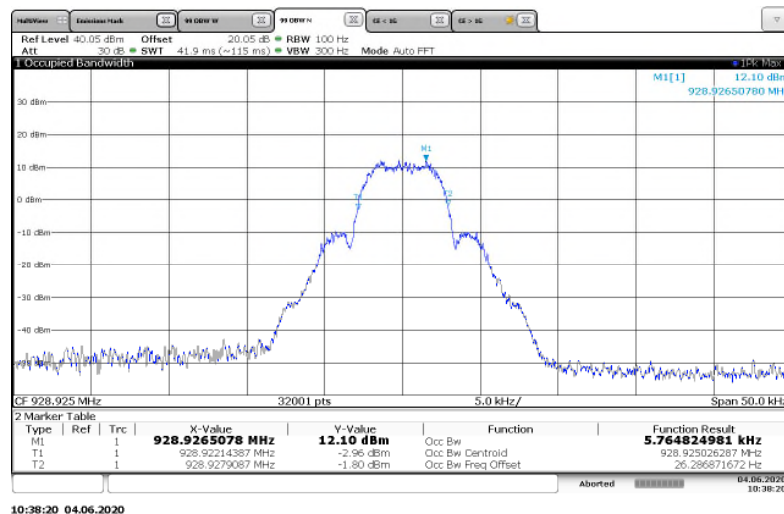
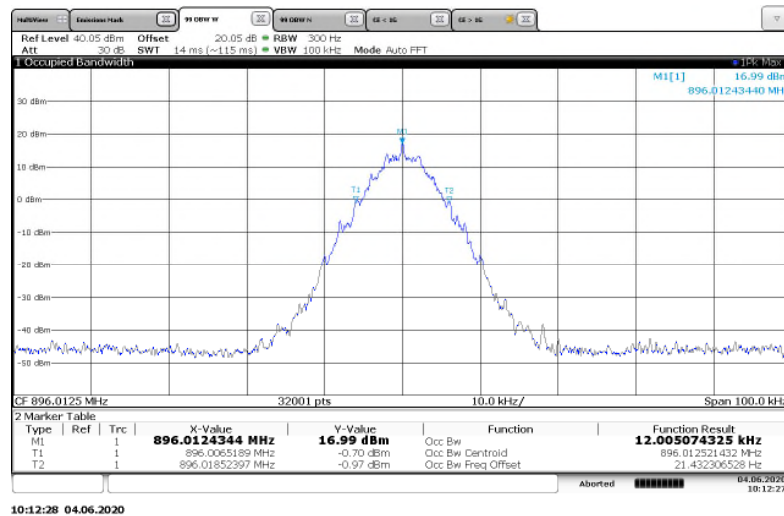
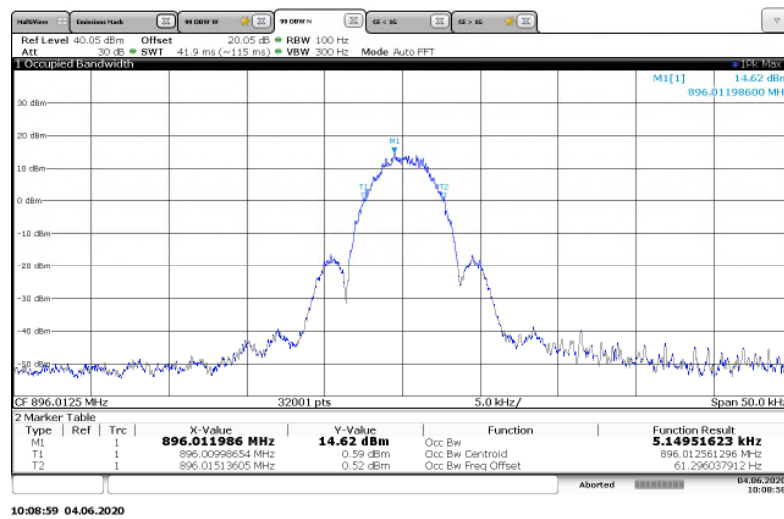


Figure 7.3.2-8: 930.5 MHz – ASK Mode

ISED Canada RSS-GEN 6.6, ISED Canada RSS-119

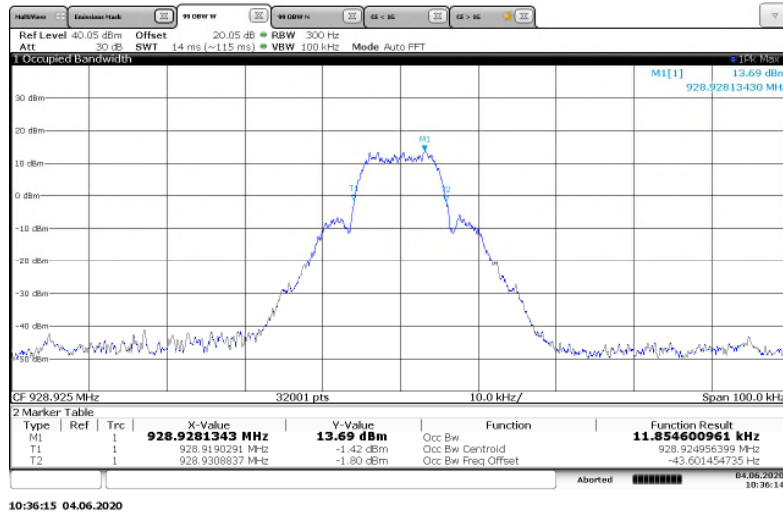


Figure 7.3.2-12: 928.925 MHz – MPass 10k Mode

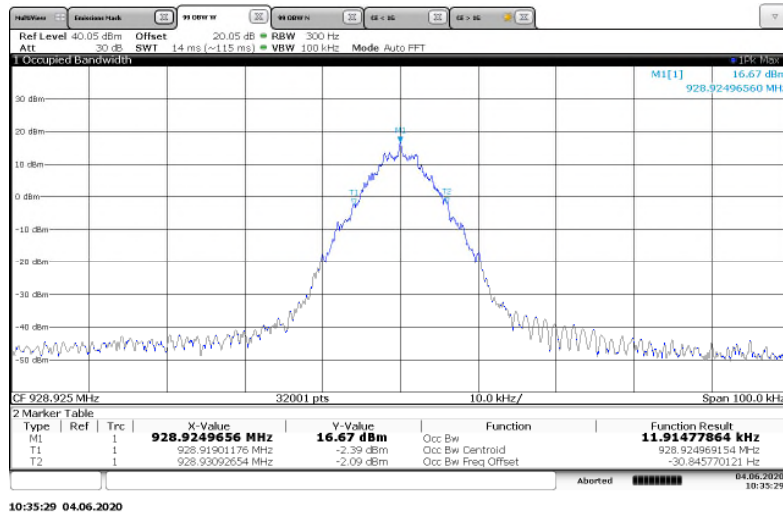


Figure 7.3.2-13: 928.925 MHz – MPass 12.5k Mode

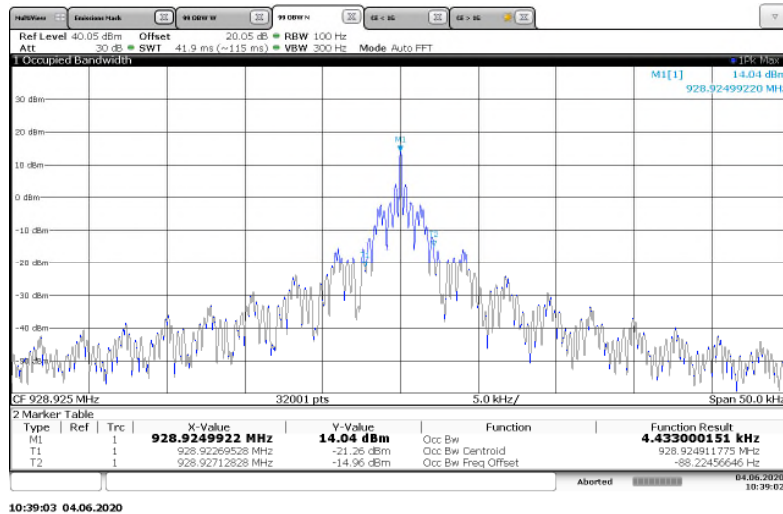


Figure 7.3.2-14: 928.925 MHz – ASK Mode

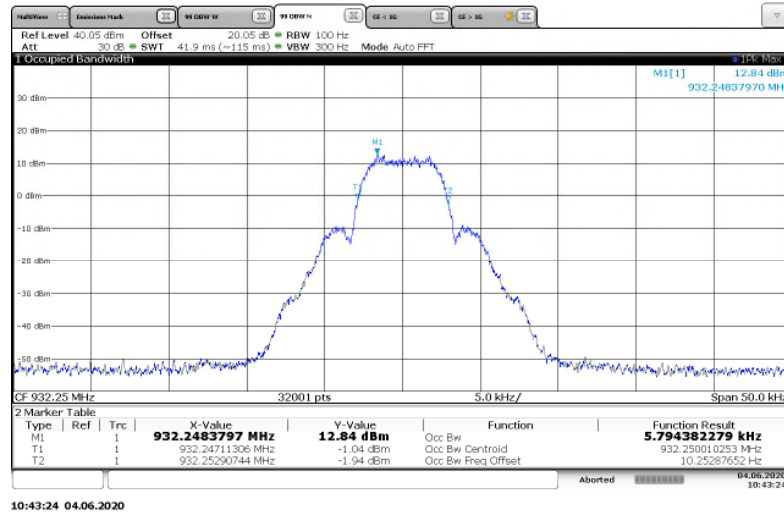


Figure 7.3.2-15: 932.25 MHz – MPass 5k Mode

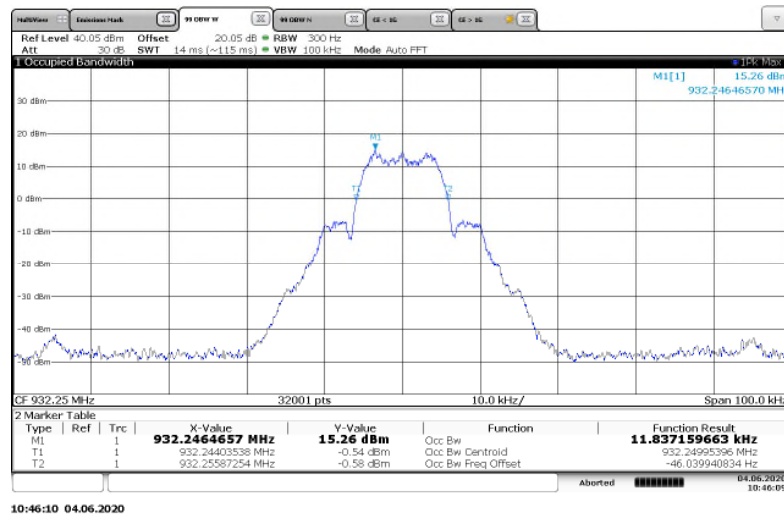


Figure 7.3.2-16: 932.25 MHz – MPass 10k Mode

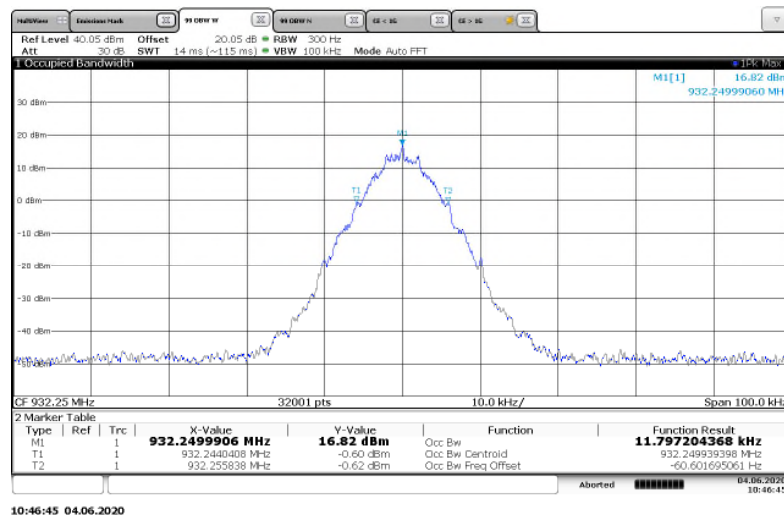


Figure 7.3.2-17: 932.25 MHz – MPass 12.5k Mode

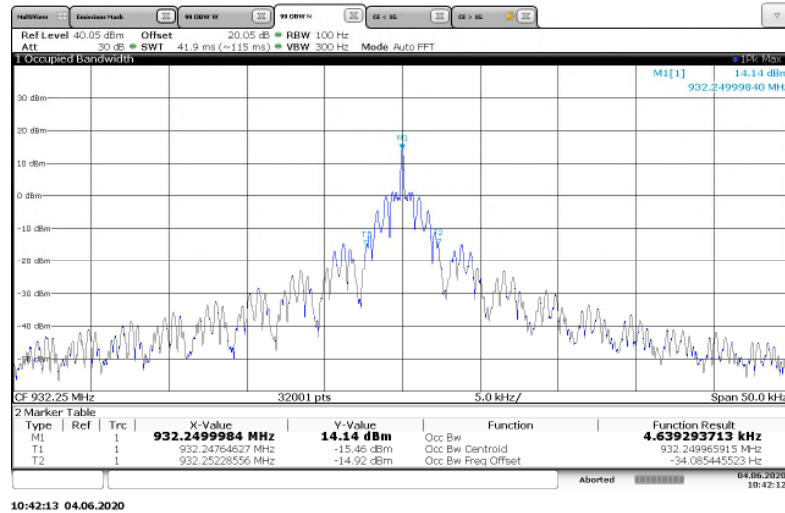


Figure 7.3.2-18: 932.25 MHz – ASK Mode

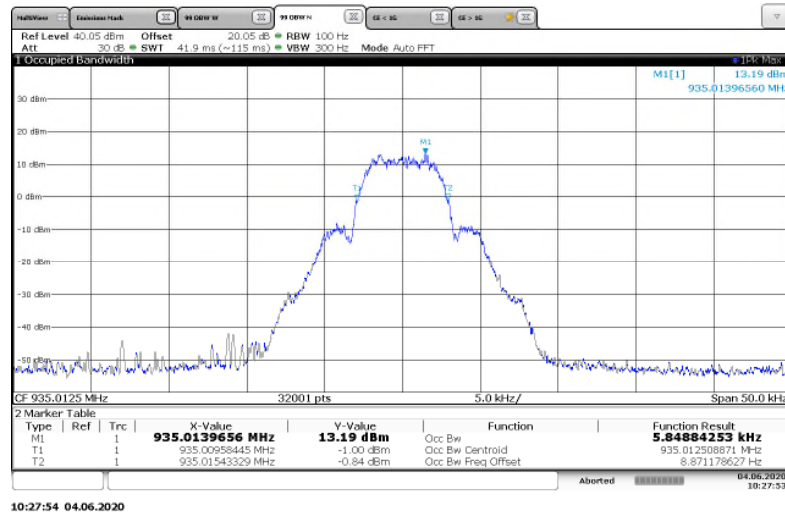


Figure 7.3.2-19: 935.0125 MHz – MPass 5k Mode

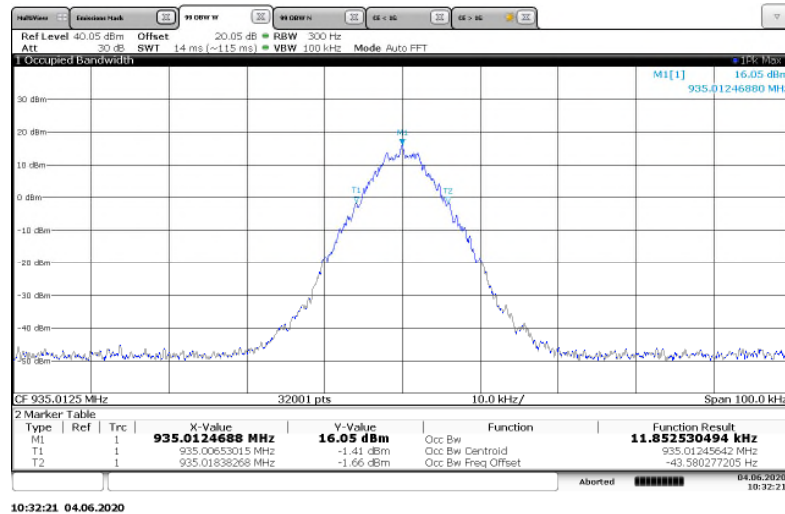


Figure 7.3.2-20: 935.0125 MHz – MPass 12.5k Mode

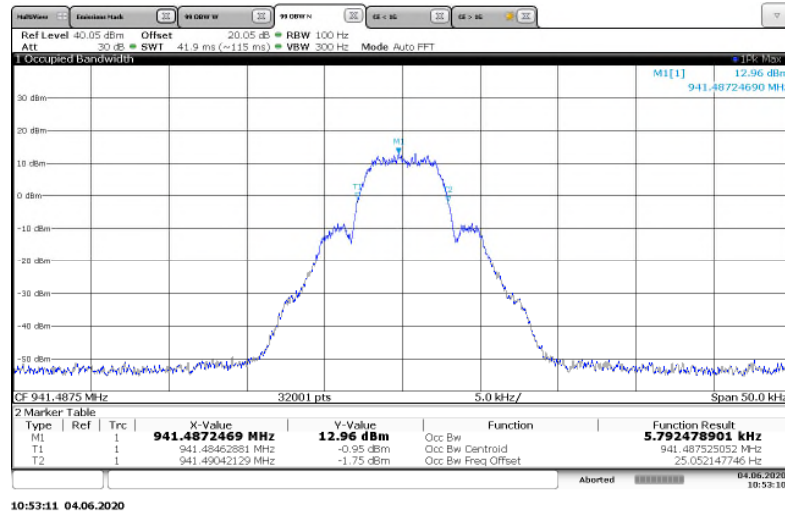


Figure 7.3.2-21: 941.4875 MHz – MPass 5k Mode

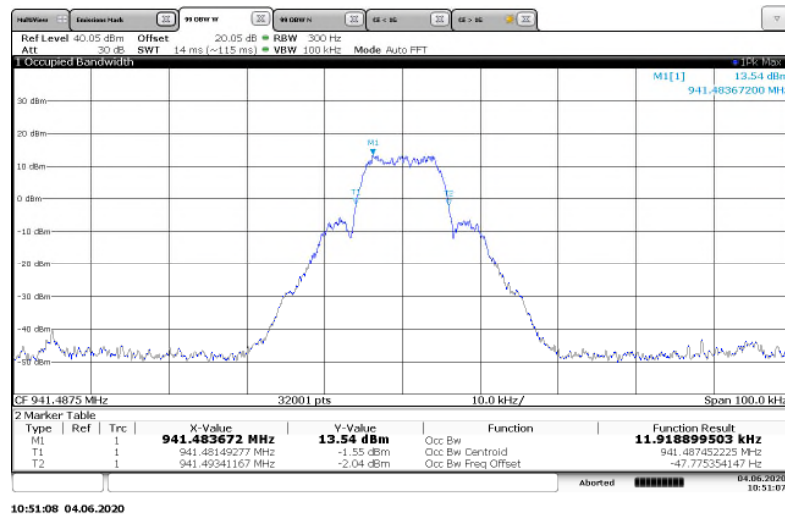


Figure 7.3.2-22: 941.4875 MHz – MPass 10k Mode

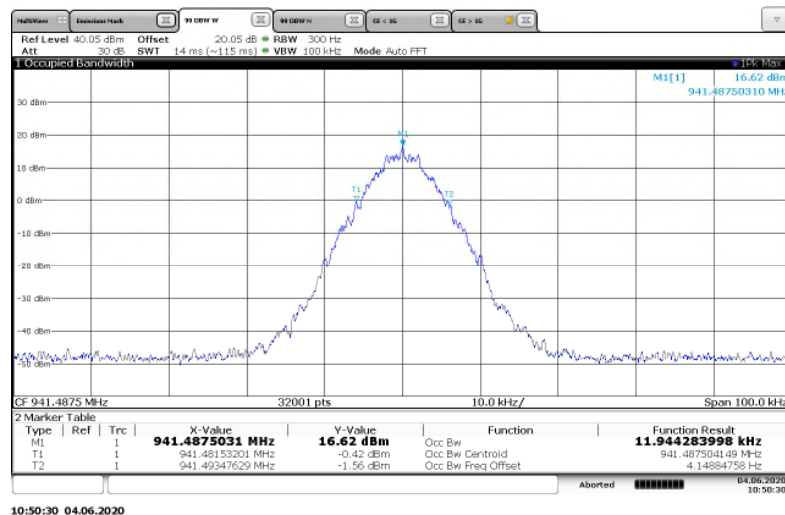


Figure 7.3.2-23: 941.4875 MHz – MPass 12.5k Mode

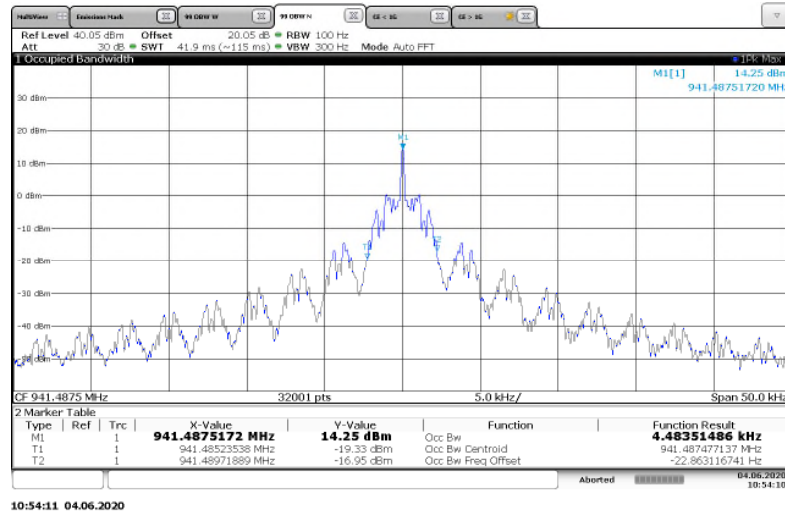


Figure 7.3.2-24: 941.4875 MHz – ASK Mode

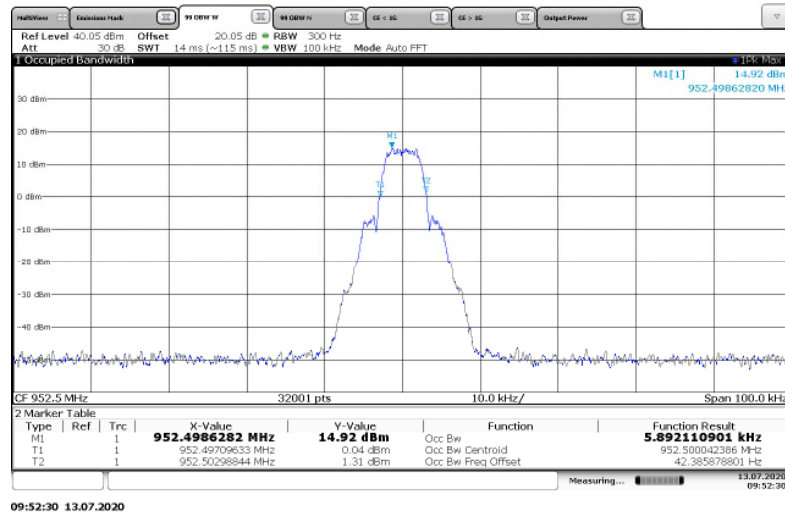


Figure 7.3.2-25: 952.5 MHz – MPass 5k Mode

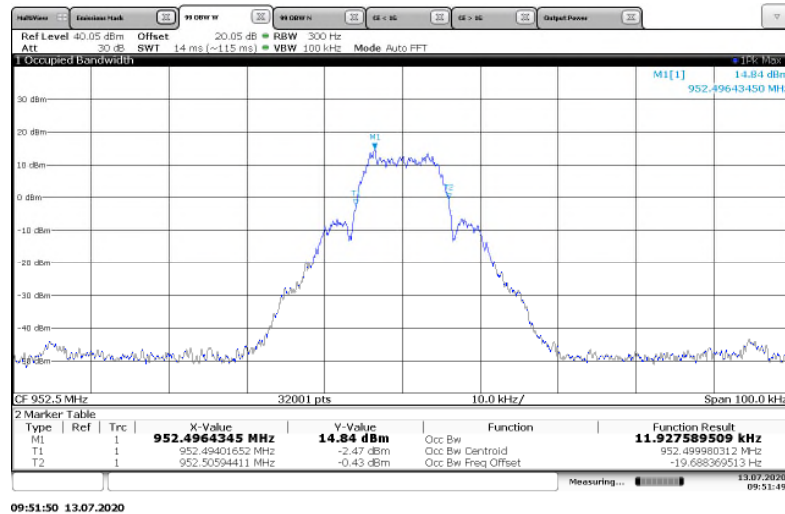


Figure 7.3.2-26: 952.5 MHz – MPass 10k Mode

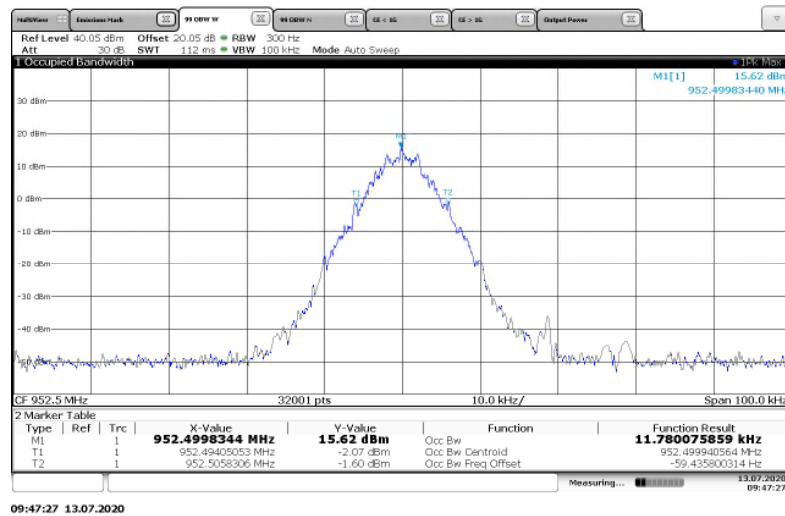


Figure 7.3.2-27: 952.5 MHz – MPass 12.5k Mode

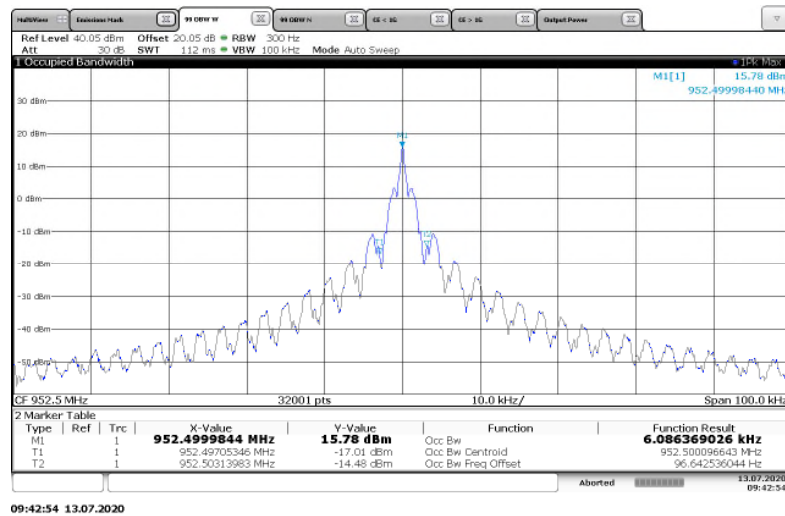


Figure 7.3.2-28: 952.5 MHz – ASK Mode

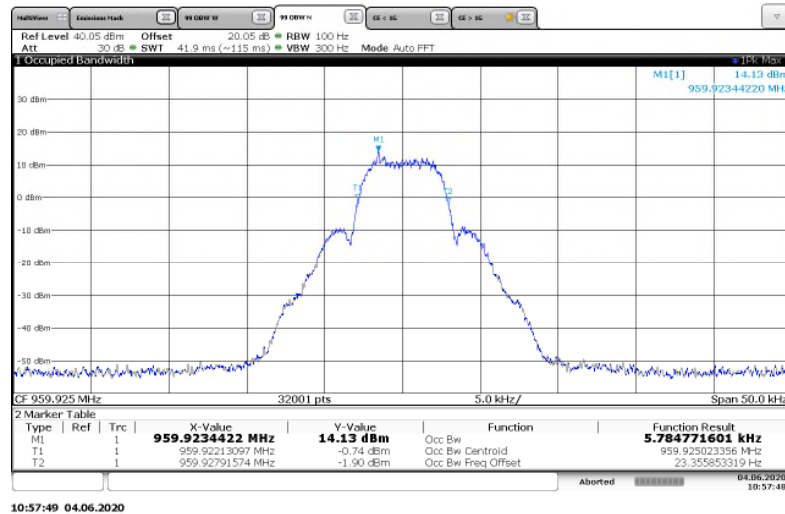


Figure 7.3.2-29: 959.925 MHz – MPass 5k Mode

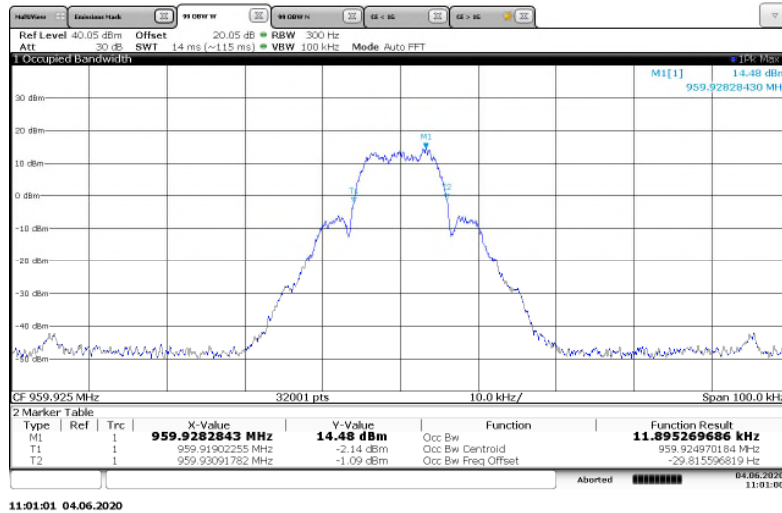


Figure 7.3.2-30: 959.925 MHz – MPass 10k Mode

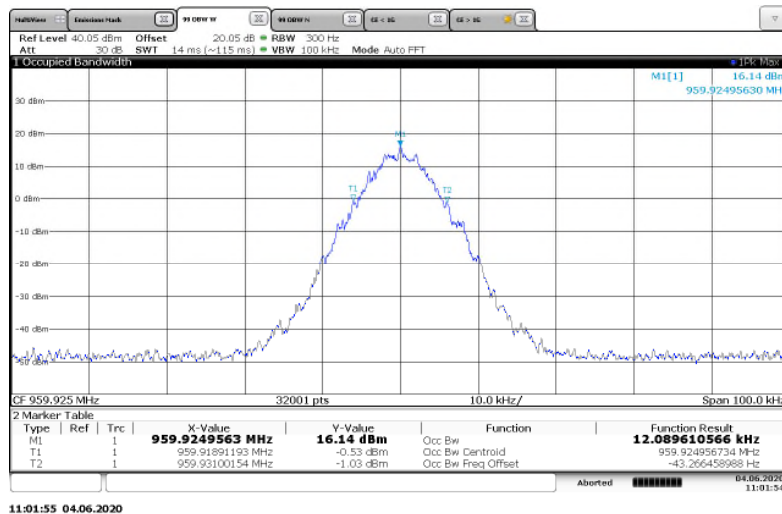


Figure 7.3.2-31: 959.925 MHz – MPass 12.5k Mode

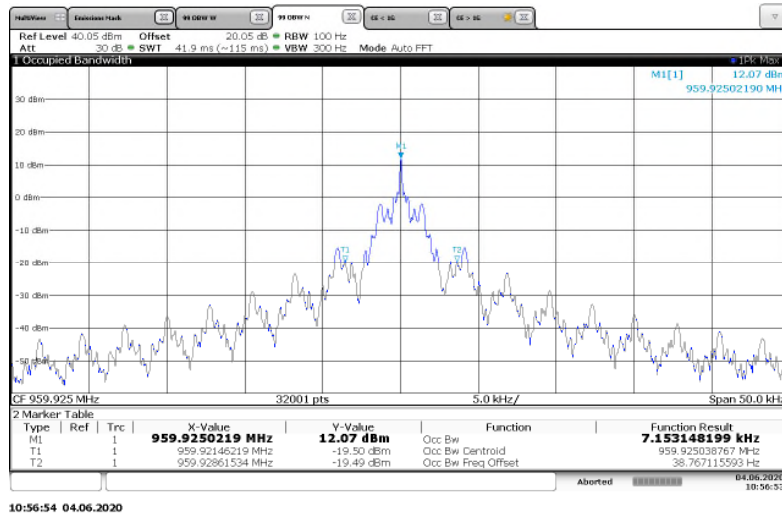


Figure 7.3.2-32: 959.925 MHz – ASK Mode

7.4 Spurious Emissions at Antenna Terminals

7.4.1 Measurement Procedure (ANSI 63.26: 2015 Section 5.7.4)

The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer through 20.05dB of passive attenuation. The spectrum analyzer resolution bandwidth was set to 100 kHz below 1000 MHz and 1 MHz above 1000 MHz. The internal correction factors of the spectrum analyzer were employed to correct for any cable, attenuator or filter losses. The spectrum was investigated in accordance to CFR 47 Part 2.1057. There were no significant emissions from 9 kHz or lowest frequency generated to 30 MHz. Results are shown below.

7.4.2 Measurement Results

Performed by: Chris Gormley

Part 24.133 a(1), a(2), ISCED Canada RSS-134 4.4.1 (a), (b), 4.4.2 (a), (b)

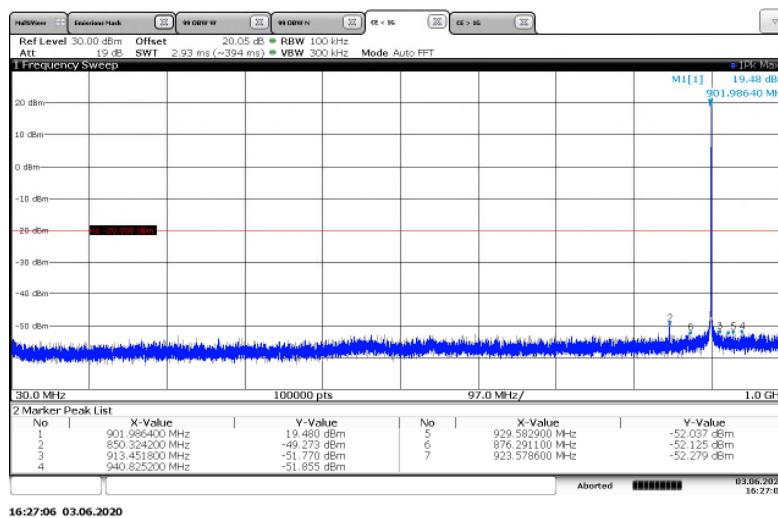


Figure 7.4.2-1: 901.9875 MHz – 30MHz to 1GHz – MPass 5k mode

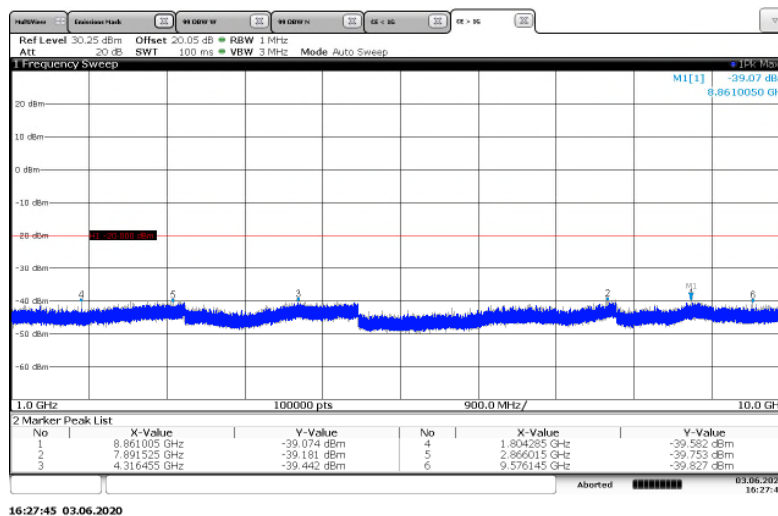


Figure 7.4.2-2: 901.9875 MHz – 1GHz to 10GHz – MPass 5k mode

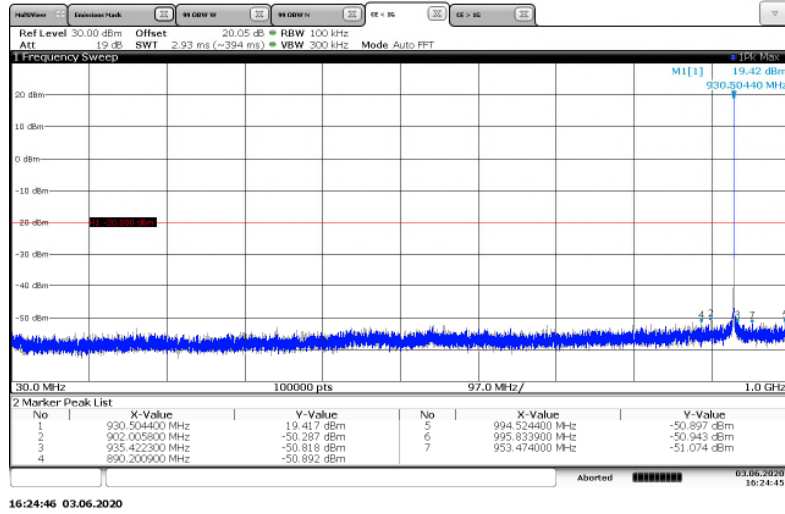


Figure 7.4.2-3: 930.5 MHz – 30MHz to 1GHz – MPass5k mode

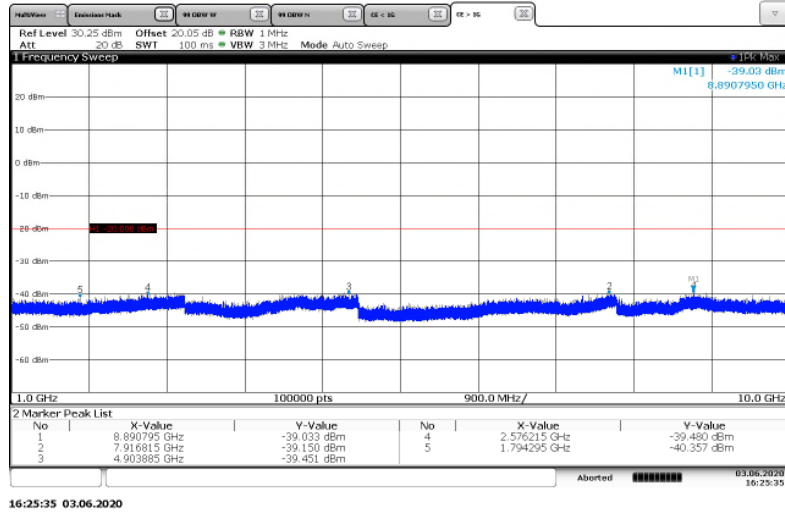
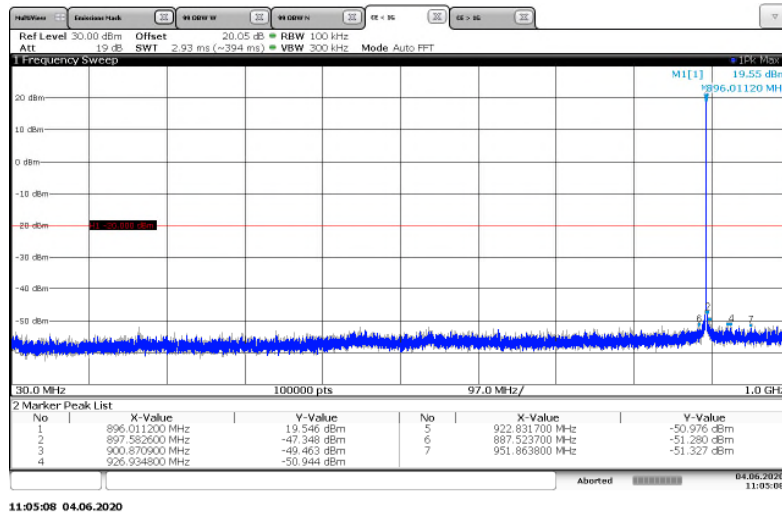
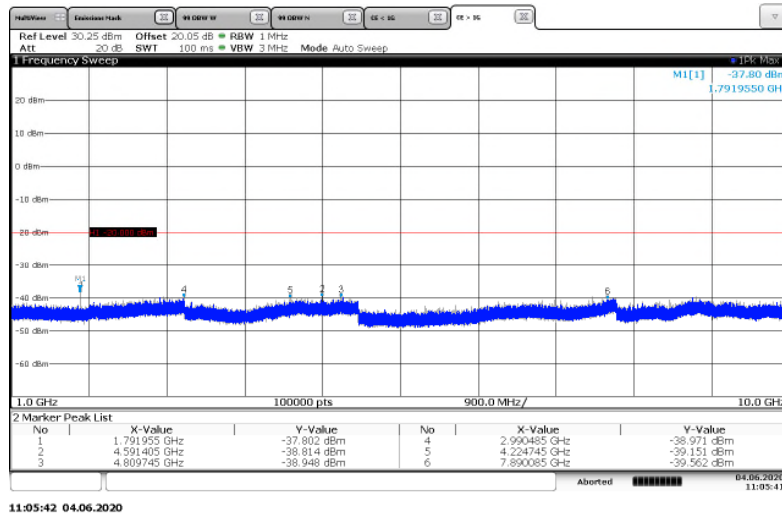


Figure 7.4.2-4: 930.5 MHz – 1GHz to 10GHz – MPass 5k mode

Part 90.210(i), RSS-119 5.8.8**Figure 7.4.2-5: 896.0125 MHz – 30MHz to 1GHz – MPass 5k mode****Figure 7.4.2-6: 896.0125 MHz – 1GHz to 10GHz – MPass 5k mode**

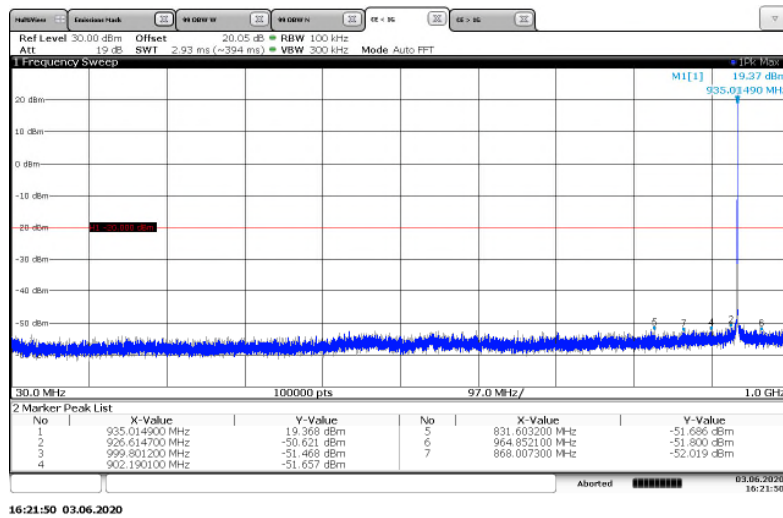


Figure 7.4.2-7: 935.0125 MHz – 30MHz to 1GHz – MPass 5k mode

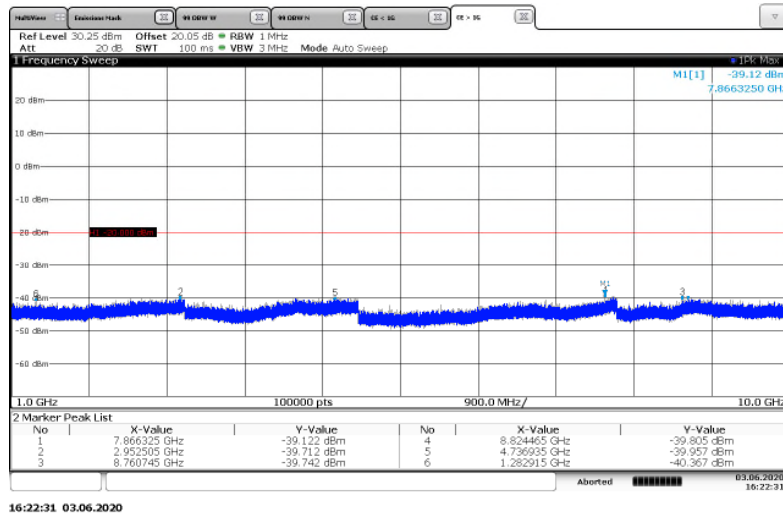
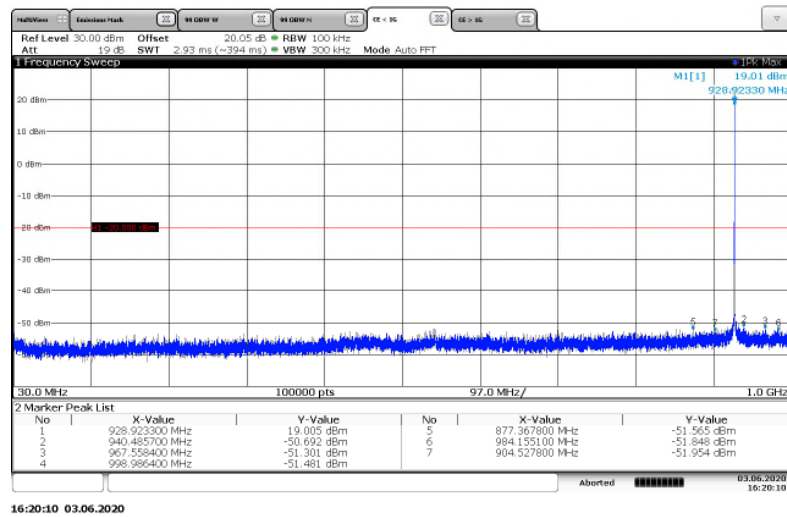
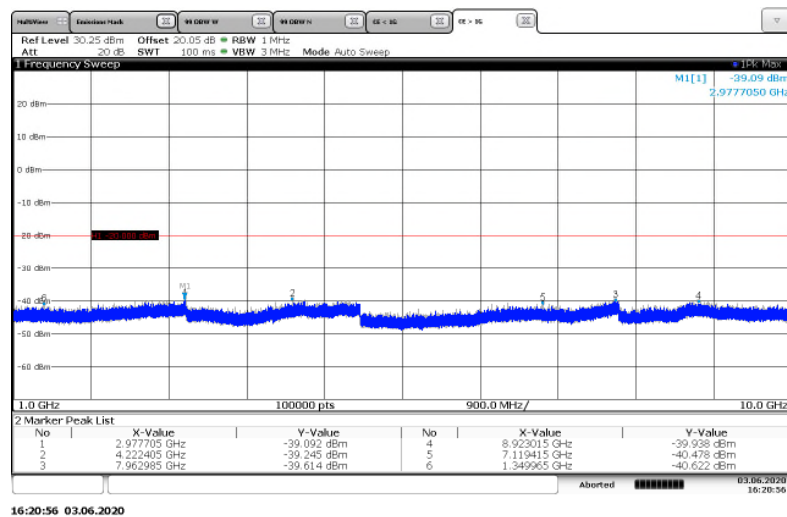


Figure 7.4.2-8: 935.0125 MHz – 1GHz to 10GHz – MPass 5k mode

Part 101.111 a(6), RSS-119 5.8.6**Figure 7.4.2-9: 928.925 MHz – 30MHz to 1GHz – MPass 5k mode****Figure 7.4.2-10: 928.925 MHz – 1GHz to 10GHz – MPass 5k mode**

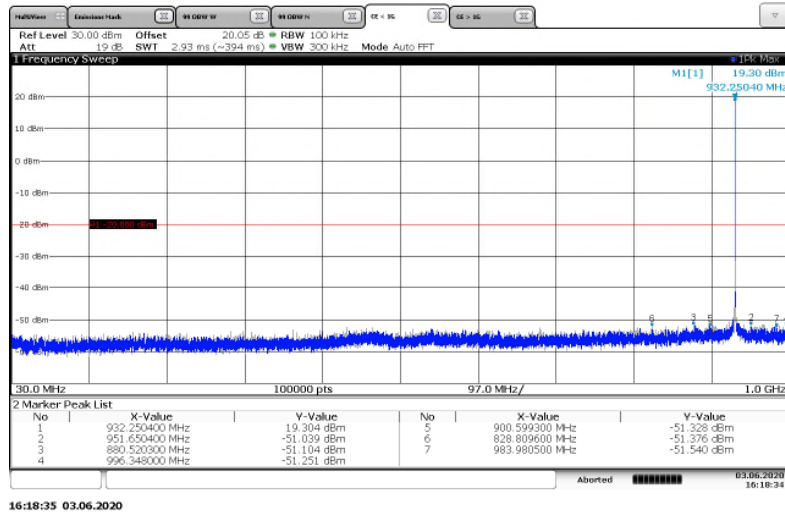


Figure 7.4.2-11: 932.25 MHz – 30MHz to 1GHz – Normal mode

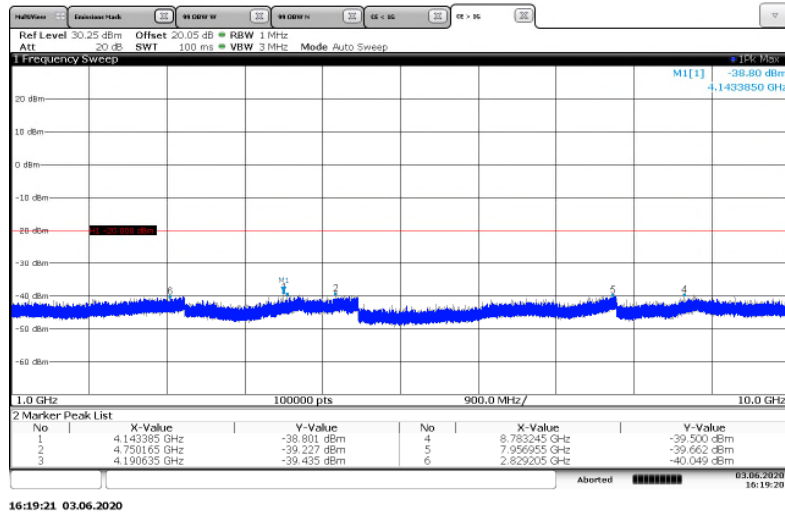


Figure 7.4.2-12: 932.25 MHz – 1GHz to 10GHz – Normal mode

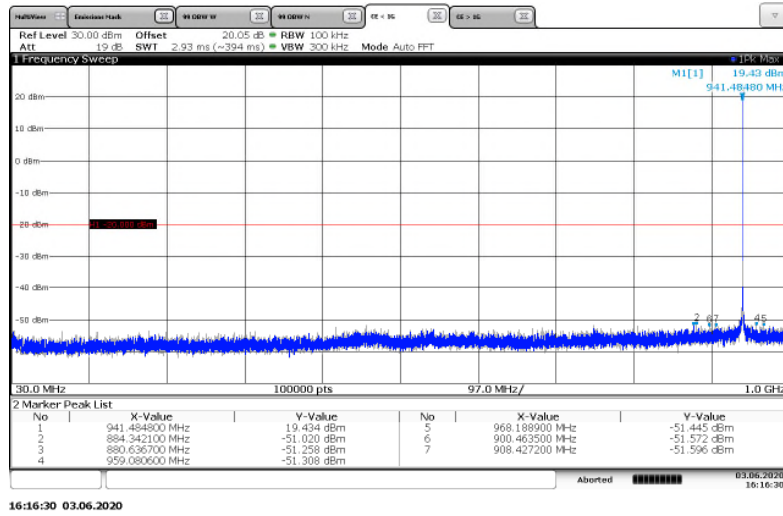


Figure 7.4.2-13: 941.4875 MHz – 30MHz to 1GHz – MPass 5k mode

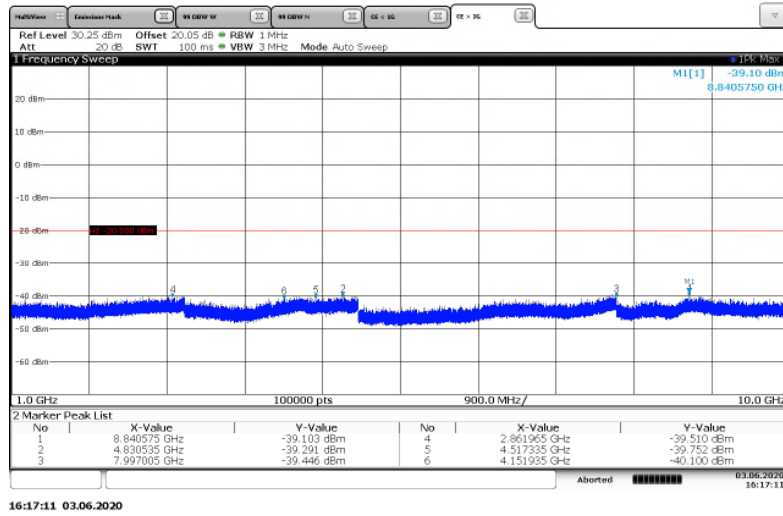


Figure 7.4.2-14: 941.4875 MHz – 1GHz to 10GHz – MPass 5k mode

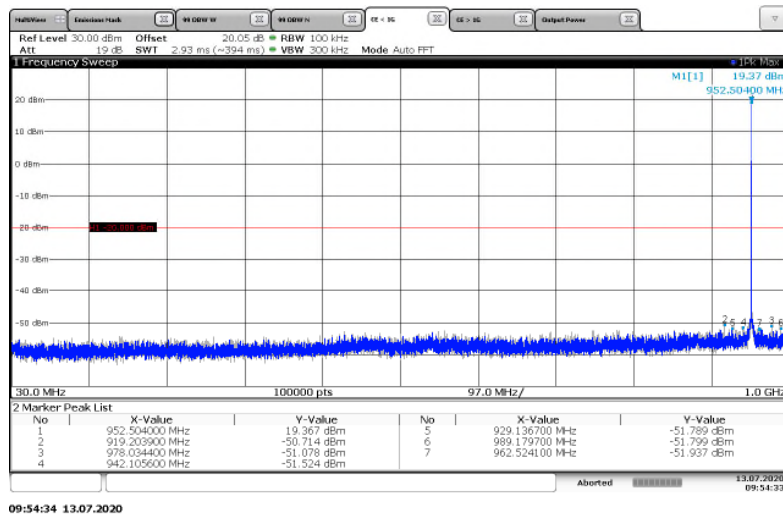


Figure 7.4.2-15: 952.5 MHz – 30MHz to 1GHz – MPass 5k mode

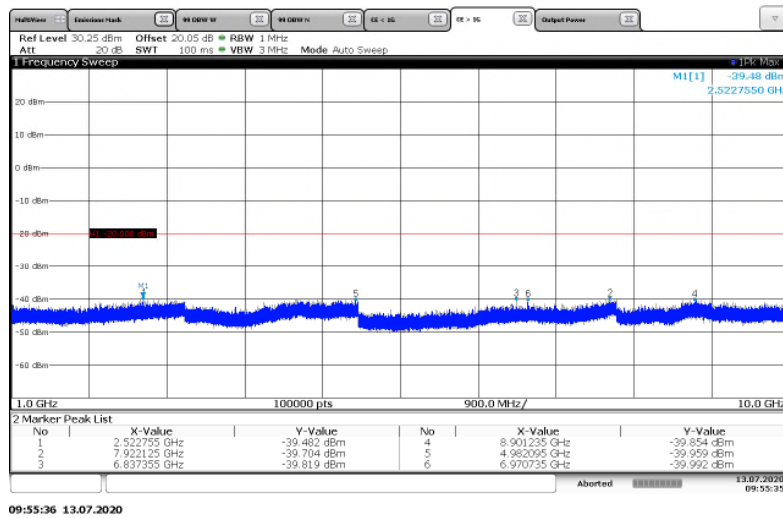


Figure 7.4.2-16: 952.5 MHz – 1GHz to 10GHz – MPass 5k mode

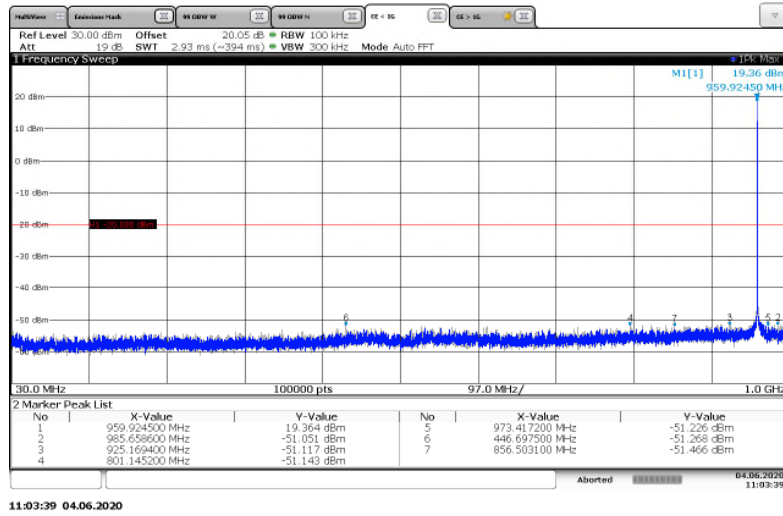


Figure 7.4.2-17: 959.925 MHz – 30MHz to 1GHz – MPass 5k mode

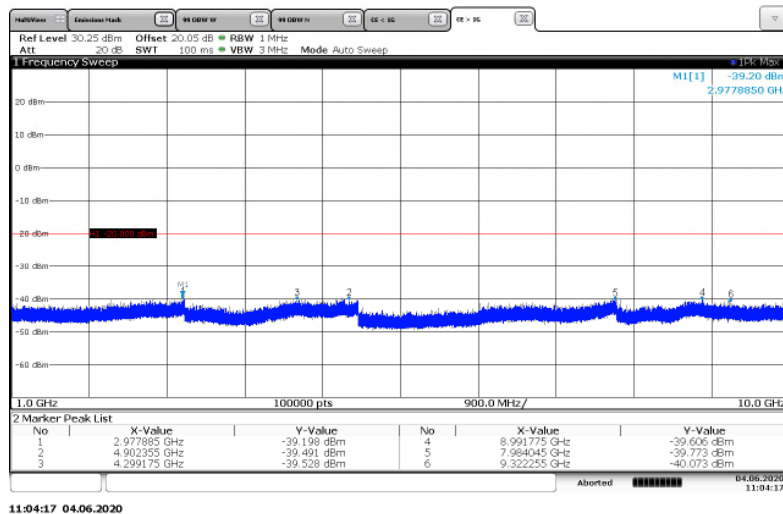


Figure 7.4.2-18: 959.925 MHz – 1GHz to 10GHz – MPass 5k mode

7.5 Field Strength of Spurious Emissions

7.5.1 Measurement Procedure (ANSI 63.26: 2015 Section 5.5.2.3.1)

The equipment under test is placed in the Semi-Anechoic Chamber (described in section 2.3.1) on a table at the turntable center. Below 1 GHz the table height was 80cm and above 1 GHz the table height was 1.5m. For each spurious emission, the antenna mast is raised and lowered from one (1) to four (4) meters and the turntable is rotated 360° and the maximum reading on the spectrum analyzer is recorded. This was repeated for both horizontal and vertical polarizations of the receive antenna.

The equipment under test is then replaced with a substitution antenna fed by a signal generator. The signal generator's frequency is set to that of the spurious emission recorded from the equipment under test. The antenna mast is raised and lowered from one (1) to four (4) meters to obtain a maximum reading on the spectrum analyzer. The output of the signal generator is then adjusted until the reading on the spectrum analyzer matches that obtained from the equipment under test. The signal generator level is recorded. The power in dBm of each spurious emission is calculated by correcting the signal generator level for the cable loss and gain of the substitution antenna referenced to a dipole. The spectrum was investigated in accordance to CFR 47 Part 2.1057.

The magnitude of all spurious emissions not reported were attenuated below the noise floor of the measurement system and therefore not specified in this report. Results are shown below.

7.5.2 Measurement Results

Performed by: Chris Gormley

Part 24.133 a(1), a(2), RSS-134 4.4.1 (a), (b), 4.4.2 (a), (b)

Table 7.5.2-1: Field Strength of Spurious Emissions – 901.9875 MHz – MPass 5k Mode

Frequency (MHz)	Spectrum Analyzer Level (dBμV)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1803.975	51.1	H	-50.89	-20.00	30.89
2705.9625	52.6	H	-46.38	-20.00	26.38
3607.95	44.8	H	-54.28	-20.00	34.28
4509.9375	44.5	H	-50.97	-20.00	30.97
5411.925	46.4	V	-48.14	-20.00	28.14
6313.9125	44.2	V	-50.10	-20.00	30.10
7215.9	42.6	V	-51.39	-20.00	31.39
8117.8875	40.3	H	-55.81	-20.00	35.81

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

Table 7.5.2-2: Field Strength of Spurious Emissions – 930.5 MHz – mPass 5k Mode

Frequency (MHz)	Spectrum Analyzer Level (dBμV)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1861	50.9	H	-51.93	-20.00	31.93
2791.5	49.7	H	-49.92	-20.00	29.92
3722	45.1	H	-52.35	-20.00	32.35
4652.5	43.3	V	-53.10	-20.00	33.10
5583	44.3	V	-51.89	-20.00	31.89
6513.5	43.3	V	-49.93	-20.00	29.93
7444	40.1	V	-57.54	-20.00	37.54

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

Part 90.210 (i), RSS-119 5.8.8**Table 7.5.2-3: Field Strength of Spurious Emissions – 896.0125 MHz – MPass 5k Mode**

Frequency (MHz)	Spectrum Analyzer Level (dBμV)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1792.025	55.1	H	-45.88	-20.00	25.88
2688.0375	51.8	H	-46.98	-20.00	26.98
3584.05	43.1	V	-57.38	-20.00	37.38
4480.0625	42.9	V	-55.78	-20.00	35.78
5376.075	45.7	V	-49.02	-20.00	29.02
6272.0875	45.5	V	-48.36	-20.00	28.36
7168.1	44.9	V	-48.54	-20.00	28.54
8064.1125	39.1	H	-58.90	-20.00	38.90

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

Table 7.5.2-4: Field Strength of Spurious Emissions – 896.0125 MHz – MPass 5k Mode

Frequency (MHz)	Spectrum Analyzer Level (dBμV)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1870.025	48.5	V	-52.44	-20.00	32.44
2805.0375	50	V	-49.63	-20.00	29.63
3740.05	45.2	H	-52.05	-20.00	32.05
4675.0625	43.4	V	-52.36	-20.00	32.36
5610.075	42.9	V	-53.45	-20.00	33.45
6545.0875	41.3	V	-53.27	-20.00	33.27
7480.1	38.1	H	-57.38	-20.00	37.38

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

Part 101.111a(6), RSS-119 5.8.6**Table 7.5.2-5: Field Strength of Spurious Emissions – 928.925 MHz – MPass 5k Mode**

Frequency (MHz)	Spectrum Analyzer Level (dBμV)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1857.85	47.8	H	-55.83	-20.00	35.83
2786.775	47.7	V	-53.12	-20.00	33.12
3715.7	45.4	H	-51.85	-20.00	31.85
4644.625	43	V	-53.49	-20.00	33.49
5573.55	44.9	V	-50.71	-20.00	30.71
6502.475	41.8	V	-52.22	-20.00	32.22
7431.4	40.7	V	-56.63	-20.00	36.63

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

Table 7.5.2-6: Field Strength of Spurious Emissions – 932.25 MHz – MPass 5k Mode

Frequency (MHz)	Spectrum Analyzer Level (dBμV)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1864.5	48.9	H	-54.13	-20.00	34.13
2796.75	47.8	H	-52.82	-20.00	32.82
3729	45.2	H	-52.05	-20.00	32.05
4661.25	43.6	V	-52.22	-20.00	32.22
5593.5	44.1	V	-51.98	-20.00	31.98
6525.75	43.1	V	-50.45	-20.00	30.45
7458	39.6	V	-58.96	-20.00	38.96

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

Table 7.5.2-7: Field Strength of Spurious Emissions – 941.4875 MHz – mPass 5k Mode

Frequency (MHz)	Spectrum Analyzer Level (dBμV)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1882.975	52.3	H	-49.64	-20.00	29.64
2824.4625	48.7	H	-51.24	-20.00	31.24
3765.95	45.9	H	-50.94	-20.00	30.94
4707.4375	42.9	V	-54.23	-20.00	34.23
5648.925	41.4	H	-55.30	-20.00	35.30
6590.4125	42.5	V	-52.33	-20.00	32.33
7531.9	38.2	V	-56.38	-20.00	36.38

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

Table 7.5.2-8: Field Strength of Spurious Emissions – 952.5 MHz – mPass 5k Mode

Frequency (MHz)	Spectrum Analyzer Level (dBμV)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1905	58	H	-42.86	-20.00	22.86
2857.5	51.4	H	-48.25	-20.00	28.25
3810	45.4	H	-52.63	-20.00	32.63
4762.5	44.2	H	-51.56	-20.00	31.56
5715	42.1	H	-55.80	-20.00	35.80
6667.5	42.9	V	-49.03	-20.00	29.03

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

Table 7.5.2-9: Field Strength of Spurious Emissions – 959.925 MHz – mPass 5k Mode

Frequency (MHz)	Spectrum Analyzer Level (dBμV)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
1919.85	54.2	H	-47.47	-20.00	27.47
2879.775	46.7	V	-54.16	-20.00	34.16
3839.7	51	H	-43.82	-20.00	23.82
4799.625	45.4	H	-48.85	-20.00	28.85
5759.55	42.3	V	-55.73	-20.00	35.73
6719.475	42.3	V	-53.59	-20.00	33.59
7679.4	40.1	V	-56.25	-20.00	36.25

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

7.6 Frequency Stability

7.6.1 Measurement Procedure (ANSI C63.26 Section 5.6.3)

The equipment under test is placed inside an environmental chamber. The RF output is directly coupled to the input of the measurement equipment and a power supply is attached to the primary supply voltage.

Frequency measurements were made at the extremes of the of temperature range -30° C to +50° C and at intervals of 10° C at normal supply voltage. A period of time sufficient to stabilize all components of the equipment was allowed at each frequency measurement. The equipment operates at 3.7VDC. Measurements were made to the equipment under test at a temperature of 20° C and at 85% and 115% variation of 3.7VDC. The maximum variation of frequency was recorded.

7.6.2 Measurement Results

Performed by: Chris Gormley

Part 24.135, RSS-134 (4.5)

Frequency Stability

Frequency (MHz): 901.9875

Deviation Limit (PPM): 1.0

Temperature C	Frequency MHz	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	901.988234	0.814	100%	3.70
-20 C	901.987607	0.119	100%	3.70
-10 C	901.987441	-0.065	100%	3.70
0 C	901.987484	-0.018	100%	3.70
10 C	901.987526	0.029	100%	3.70
20 C	901.987579	0.088	100%	3.70
30 C	901.987608	0.120	100%	3.70
40 C	901.987708	0.230	100%	3.70
50 C	901.987822	0.357	100%	3.70
20 C	901.987576	0.084	85%	3.15
20 C	901.987571	0.079	115%	4.26

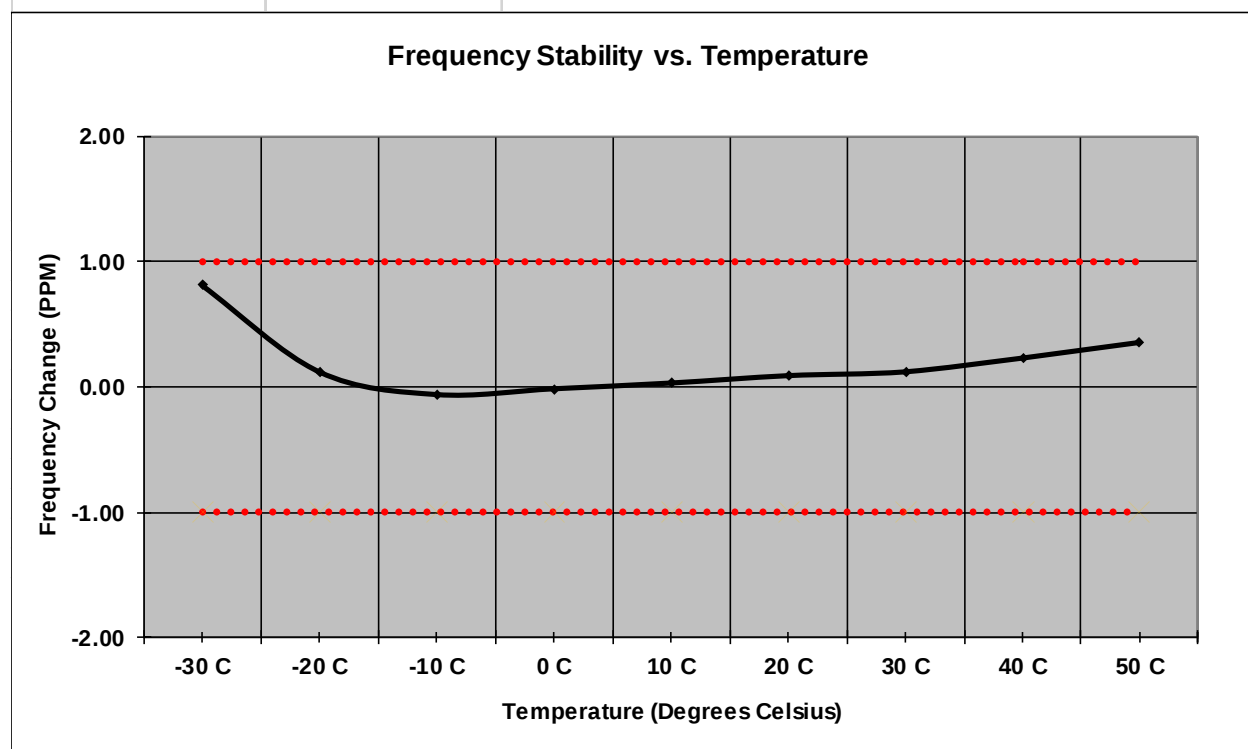


Figure 7.6.2-1: Frequency Stability – 901.9875 MHz

Frequency Stability

Frequency (MHz): 930.5

Deviation Limit (PPM): 1.0

Temperature	Frequency	Frequency Error	Voltage	Voltage
C	MHz	(PPM)	(%)	(VDC)
-30 C	930.500657	0.706	100%	3.70
-20 C	930.499994	-0.007	100%	3.70
-10 C	930.499916	-0.090	100%	3.70
0 C	930.499939	-0.066	100%	3.70
10 C	930.500021	0.022	100%	3.70
20 C	930.500037	0.040	100%	3.70
30 C	930.500110	0.119	100%	3.70
40 C	930.500223	0.240	100%	3.70
50 C	930.500296	0.318	100%	3.70
20 C	930.500052	0.056	85%	3.15
20 C	930.500054	0.058	115%	4.26

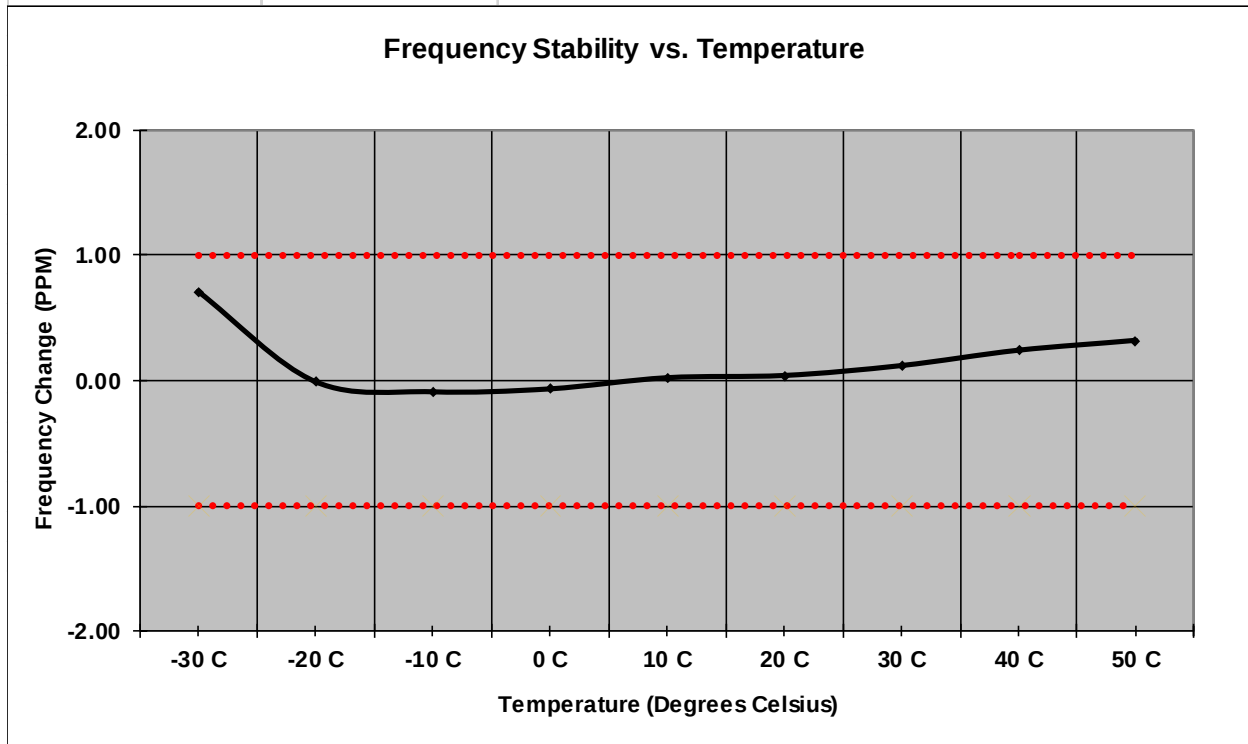


Figure 7.6.2-2: Frequency Stability – 930.5 MHz

Part 90.213, RSS-119 5.3

Frequency Stability

Frequency (MHz): 896.0125

Deviation Limit (PPM): 1.0

Temperature	Frequency	Frequency Error	Voltage	Voltage
C	MHz	(PPM)	(%)	(VDC)
-30 C	896.013284	0.874	100%	3.70
-20 C	896.012613	0.126	100%	3.70
-10 C	896.012453	-0.053	100%	3.70
0 C	896.012499	-0.001	100%	3.70
10 C	896.012490	-0.011	100%	3.70
20 C	896.012592	0.103	100%	3.70
30 C	896.012614	0.127	100%	3.70
40 C	896.012752	0.281	100%	3.70
50 C	896.012831	0.369	100%	3.70
20 C	896.012588	0.098	85%	3.15
20 C	896.012584	0.094	115%	4.26

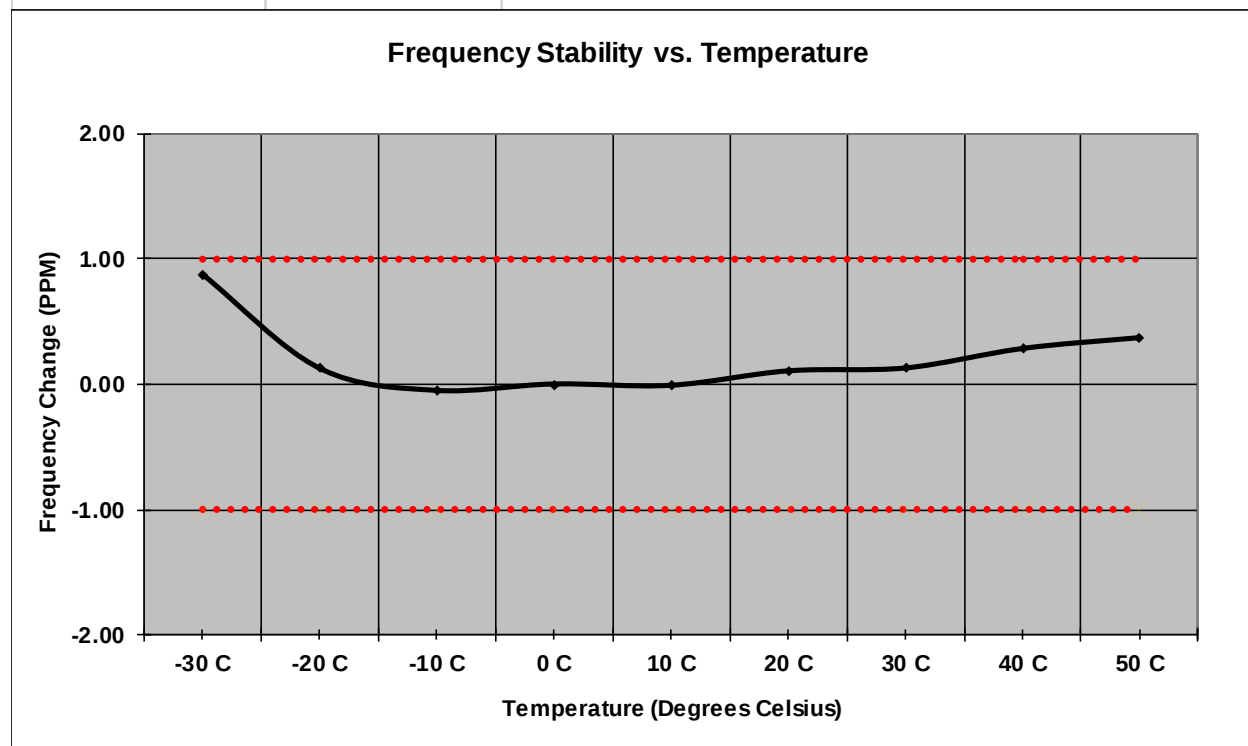


Figure 7.6.2-3: Frequency Stability – 896.0125 MHz

Frequency Stability

Frequency (MHz): 935.0125

Deviation Limit (PPM): 1.0

Temperature	Frequency	Frequency Error	Voltage	Voltage
C	MHz	(PPM)	(%)	(VDC)
-30 C	935.013077	0.617	100%	3.70
-20 C	935.012457	-0.046	100%	3.70
-10 C	935.012382	-0.127	100%	3.70
0 C	935.012443	-0.061	100%	3.70
10 C	935.012499	-0.001	100%	3.70
20 C	935.012527	0.029	100%	3.70
30 C	935.012597	0.103	100%	3.70
40 C	935.012734	0.250	100%	3.70
50 C	935.012802	0.323	100%	3.70
20 C	935.012538	0.040	85%	3.15
20 C	935.012537	0.039	115%	4.26

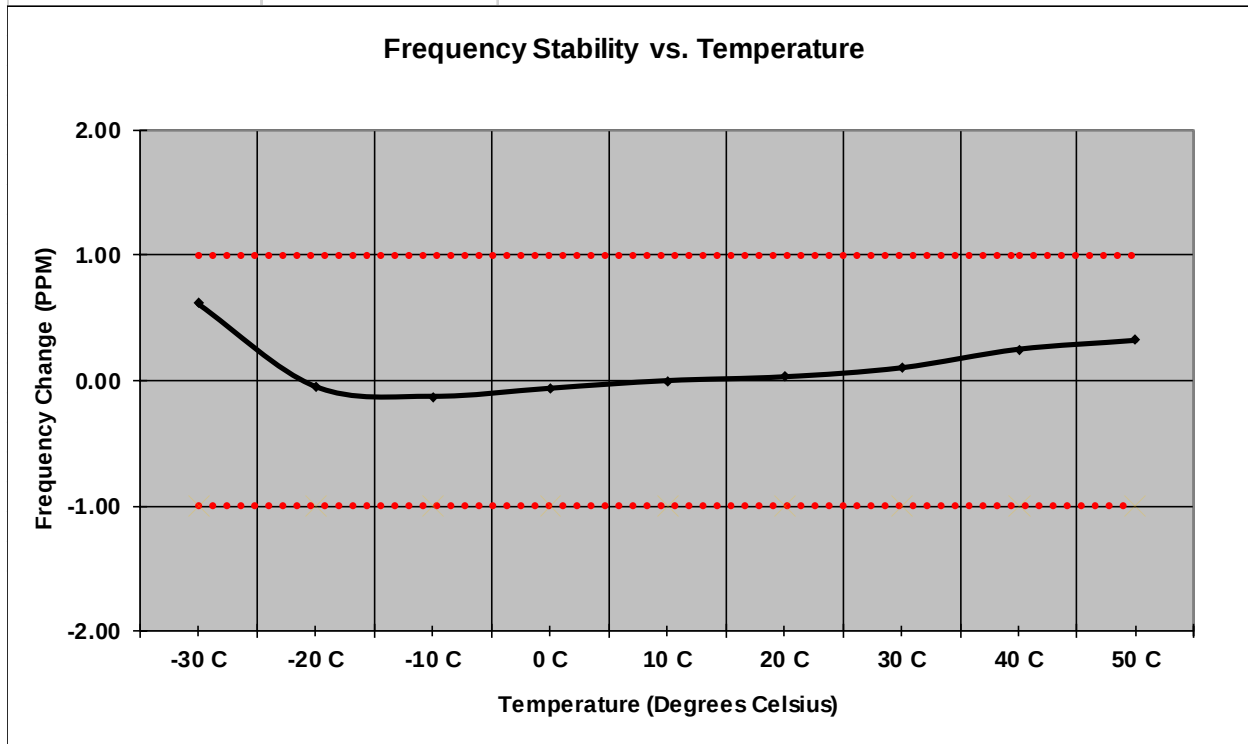


Figure 7.6.2-4: Frequency Stability – 935.0125 MHz

Part 101.107, RSS-119 5.3

Frequency Stability

Frequency (MHz): 928.925

Deviation Limit (PPM): 1.0

Temperature	Frequency	Frequency Error	Voltage	Voltage
C	MHz	(PPM)	(%)	(VDC)
-30 C	928.925571	0.615	100%	3.70
-20 C	928.924974	-0.028	100%	3.70
-10 C	928.924908	-0.099	100%	3.70
0 C	928.924940	-0.065	100%	3.70
10 C	928.925035	0.037	100%	3.70
20 C	928.925055	0.059	100%	3.70
30 C	928.925102	0.110	100%	3.70
40 C	928.925218	0.235	100%	3.70
50 C	928.925311	0.335	100%	3.70
20 C	928.925058	0.062	85%	3.15
20 C	928.925063	0.068	115%	4.26

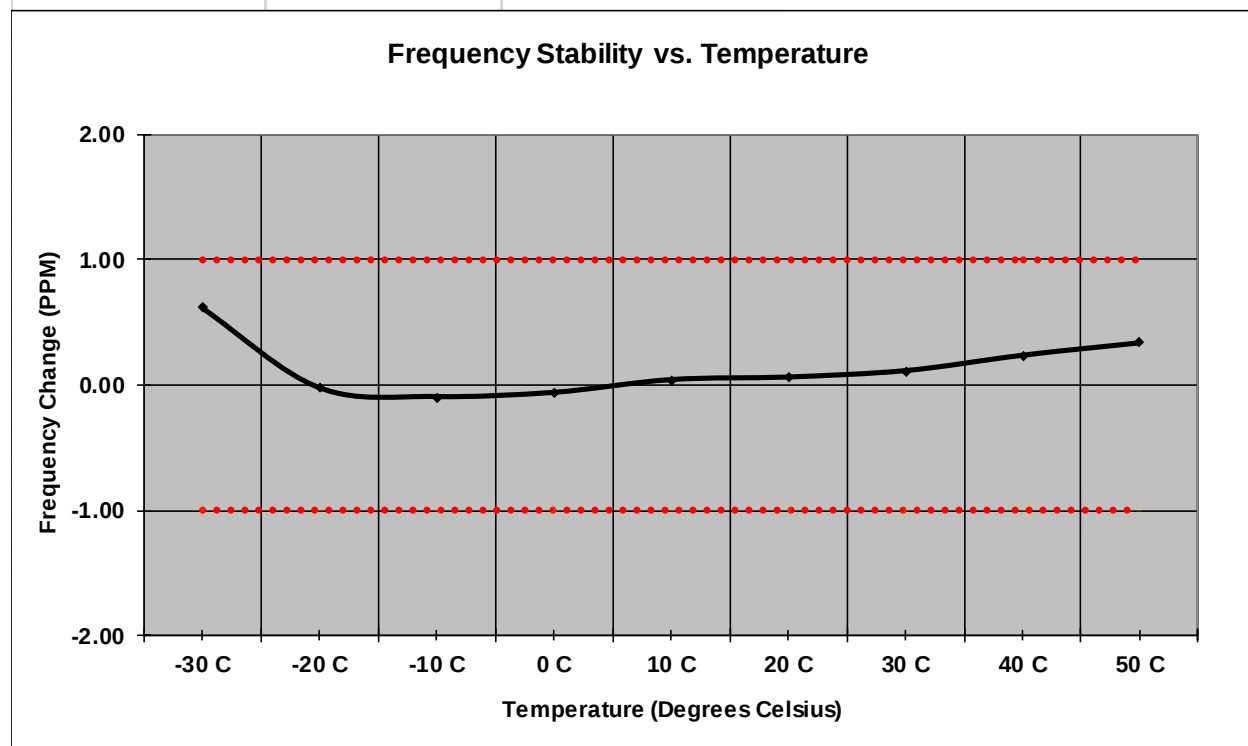


Figure 7.6.2-5: Frequency Stability – 928.925 MHz

Frequency Stability

Frequency (MHz): 932.25

Deviation Limit (PPM): 1.0

Temperature	Frequency	Frequency Error	Voltage	Voltage
C	MHz	(PPM)	(%)	(VDC)
-30 C	932.250526	0.565	100%	3.70
-20 C	932.249956	-0.047	100%	3.70
-10 C	932.249897	-0.111	100%	3.70
0 C	932.249944	-0.060	100%	3.70
10 C	932.250026	0.027	100%	3.70
20 C	932.250044	0.047	100%	3.70
30 C	932.250089	0.095	100%	3.70
40 C	932.250236	0.253	100%	3.70
50 C	932.250276	0.296	100%	3.70
20 C	932.250042	0.046	85%	3.15
20 C	932.250042	0.045	115%	4.26

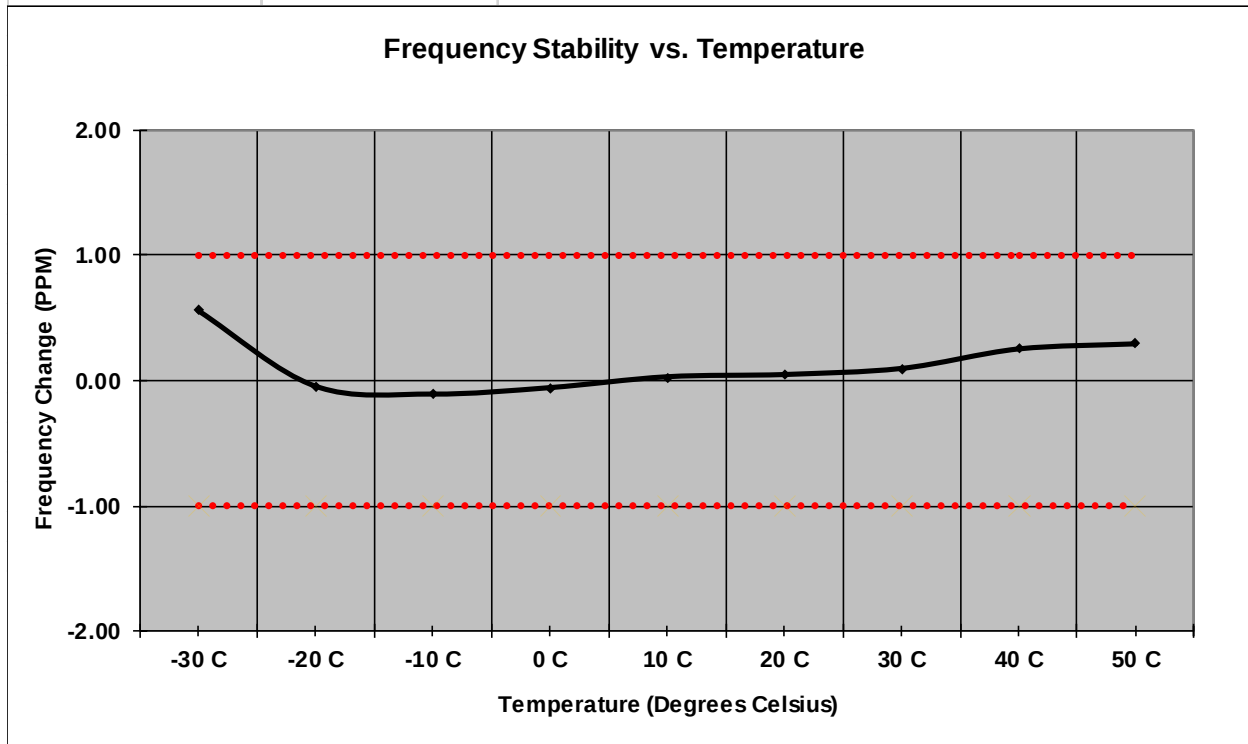


Figure 7.6.2-6: Frequency Stability – 932.25 MHz

Frequency Stability

Frequency (MHz): 941.4875

Deviation Limit (PPM): 1.0

Temperature	Frequency	Frequency Error	Voltage	Voltage
C	MHz	(PPM)	(%)	(VDC)
-30 C	941.488058	0.593	100%	3.70
-20 C	941.487478	-0.023	100%	3.70
-10 C	941.487423	-0.082	100%	3.70
0 C	941.487475	-0.026	100%	3.70
10 C	941.487547	0.050	100%	3.70
20 C	941.487565	0.069	100%	3.70
30 C	941.487623	0.130	100%	3.70
40 C	941.487750	0.265	100%	3.70
50 C	941.487812	0.332	100%	3.70
20 C	941.487573	0.078	85%	3.15
20 C	941.487574	0.078	115%	4.26

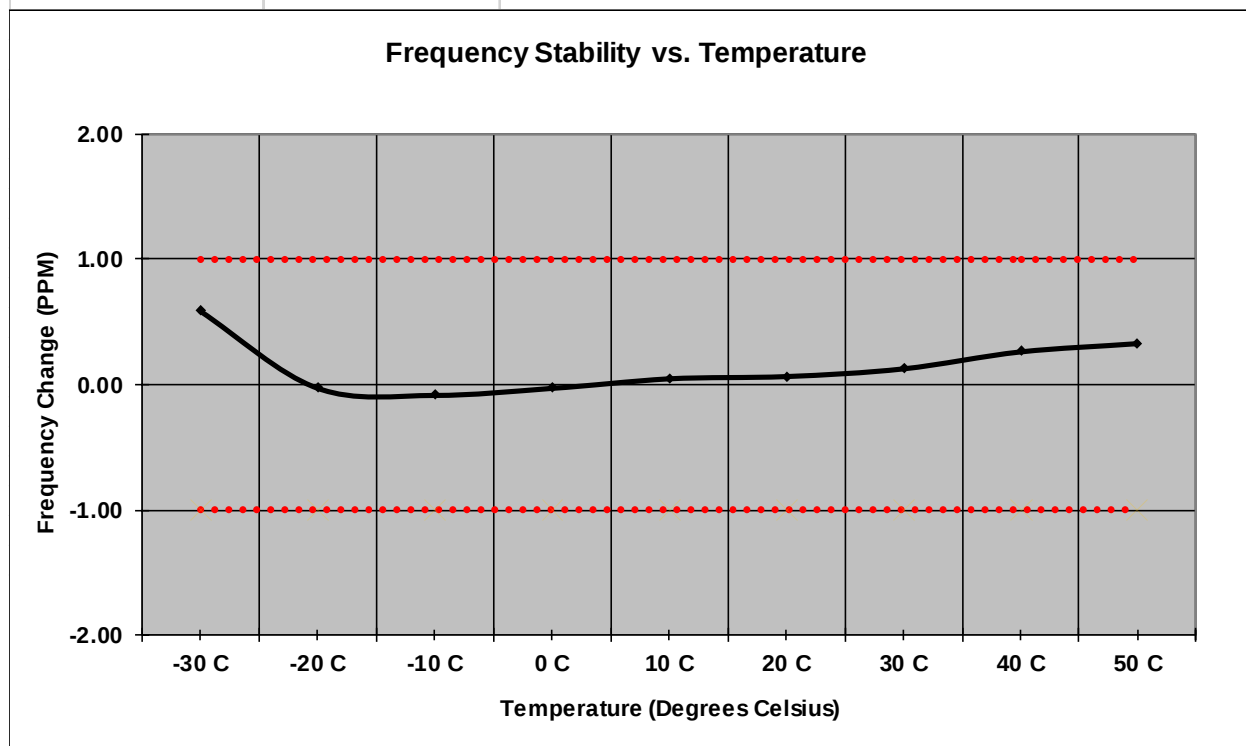


Figure 7.6.2-7: Frequency Stability – 941.4875 MHz

Frequency Stability

Frequency (MHz): 959.925

Deviation Limit (PPM): 1.0

Temperature	Frequency	Frequency Error	Voltage	Voltage
C	MHz	(PPM)	(%)	(VDC)
-30 C	959.925773	0.805	100%	3.70
-20 C	959.925234	0.244	100%	3.70
-10 C	959.924942	-0.060	100%	3.70
0 C	959.924979	-0.022	100%	3.70
10 C	959.925007	0.007	100%	3.70
20 C	959.925057	0.059	100%	3.70
30 C	959.925105	0.110	100%	3.70
40 C	959.925209	0.218	100%	3.70
50 C	959.925364	0.379	100%	3.70
20 C	959.925096	0.100	85%	3.15
20 C	959.925101	0.106	115%	4.26

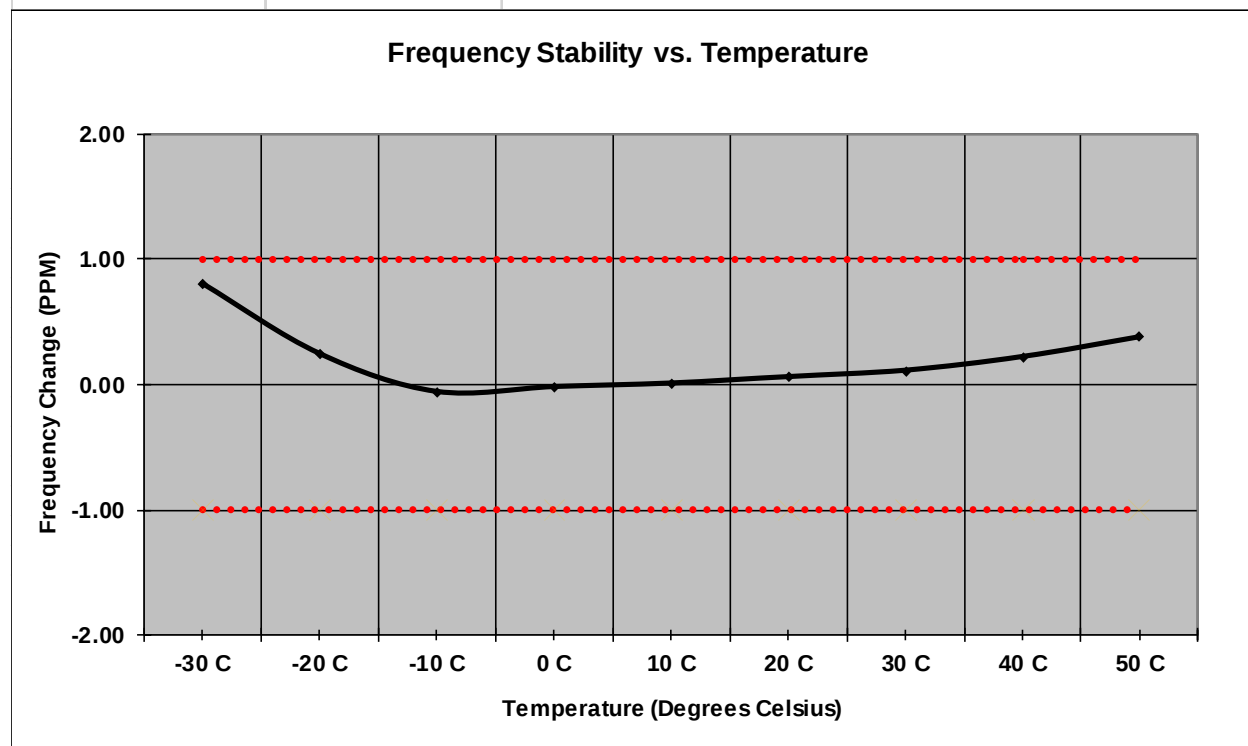


Figure 7.6.2-8: Frequency Stability – 959.925 MHz

8.0 MEASUREMENT UNCERTAINTY

The expanded laboratory measurement uncertainty figures (U_{Lab}) provided below correspond to an expansion factor (coverage factor) $k = 1.96$ which provide confidence levels of 95%.

Parameter	U_{lab}
Occupied Channel Bandwidth	$\pm 0.004\%$
RF Conducted Output Power	$\pm 0.689 \text{ dB}$
Power Spectral Density	$\pm 0.5 \text{ dB}$
Antenna Port Conducted Emissions	$\pm 2.717 \text{ dB}$
Radiated Emissions	$\pm 5.877 \text{ dB}$
Temperature	$\pm 0.860 \text{ }^{\circ}\text{C}$
Radio Frequency	$\pm 2.832 \times 10^{-8}$
AC Power Line Conducted Emissions	± 2.85

9.0 CONCLUSION

In the opinion of TÜV SÜD America Inc. the model CL200, manufactured by Sensus USA, Inc., meets all the requirements of FCC Part 24D, Part 90, and Part 101 as well as ISED Canada RSS-119 and RSS-134 where applicable.

End Report