

Test of Sensus FLXA2D
To: FCC 47 CFR Part(s) 24, 90, 101
Test Report Serial No.: SNUS10-U1 Rev C





Test of Sensus FLXA2D

To FCC 47 CFR Part(s) 24, 90, 101
RSS-134 & RSS-119

Test Report Serial No.: SNUS10-U1 Rev C

This report supersedes: SNUS10-U1 Rev B

Manufacturer: Sensus Metering Systems
8609 Six Forks Road, 3rd Floor
Raleigh, North Carolina 27615
USA

Product Function: Integrated AMR FlexNet Solution

Copy No: pdf **Issue Date:** 7th October 2013

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.
440 Boulder Court, Suite 200
Pleasanton, CA 94566 USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



TESTING CERTIFICATE #2381.01

MiCOM Labs is an ISO 17025 Accredited Testing Laboratory



Title: Sensus FLXA2D
To: FCC 47 CFR Part(s) 24, 90, 101
Serial #: SNUS10-U1 Rev C
Issue Date: 7th October 2013
Page: 3 of 82

This page has been left intentionally blank

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

TABLE OF CONTENTS

ACCREDITATION, LISTINGS & RECOGNITION	5
TESTING ACCREDITATION	5
RECOGNITION	6
PRODUCT CERTIFICATION	7
1. TEST RESULT CERTIFICATE	9
2. REFERENCES AND MEASUREMENT UNCERTAINTY	10
2.1. Normative References	10
2.2. Test and Uncertainty Procedures	10
3. PRODUCT DETAILS AND TEST CONFIGURATIONS	11
3.1. Technical Details	11
3.2. Scope of Test Program	12
3.3. Equipment Model(s) and Serial Number(s)	12
3.4. Antenna Details	12
3.5. Cabling and I/O Ports	13
3.6. Test Configurations	13
3.7. Equipment Modifications	15
3.8. Deviations from the Test Standard	15
3.9. Subcontracted Testing or Third Party Data	15
4. TEST SUMMARY	16
5. TEST RESULTS	18
5.1. Device Characteristics	18
5.1.1. Output Power	18
5.1.2. Occupied Bandwidth and Spectrum Mask	21
5.1.3. Frequency Stability; Temperature Variations, and Voltage Variations ..	42
5.1.4. Spurious Emissions from Antenna Terminals	47
5.1.5. Maximum Permissible Exposure	60
5.1.6. Radiated Spurious Emissions	61
5.1.7. AC Wireline Conducted Emissions (0.15 – 30 MHz)	75
6. TEST SET-UP PHOTOGRAPHS	77
6.1. General Measurement Test Set-Up	77
6.2. General Measurement – Environmental Chamber	78
6.3. Radiated Emissions below 1 GHz	79
6.4. Radiated Digital Emissions above 1 GHz	80
7. TEST EQUIPMENT DETAILS	81

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

ACCREDITATION, LISTINGS & RECOGNITION

TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard EN ISO/IEC 17025. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



Accredited Laboratory

A2LA has accredited

MICOM LABS

Pleasanton, CA
for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 *General Requirements for the Competence of Testing and Calibration Laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Presented this 27th day of March 2012.



President & CEO
For the Accreditation Council
Certificate Number 2381.01
Valid to November 30, 2013



For the tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Sensus FLXA2D
To: FCC 47 CFR Part(s) 24, 90, 101
Serial #: SNUS10-U1 Rev C
Issue Date: 7th October 2013
Page: 6 of 82

RECOGNITION

MiCOM Labs, Inc has widely recognized Electrical testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA** countries. Our test reports are widely accepted for global type approvals.

Country	Recognition Body	Status	Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Listing #: 102167
Canada	Industry Canada (IC)	FCB	APEC MRA 2	US0159 Listing #: 4143A-2 4143A-3
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	APEC MRA 2	RCB 210
	VCCI	--	--	A-0012
Europe	European Commission	NB	EU MRA	NB 2280
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	CAB	APEC MRA 1	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	CAB	APEC MRA 1	
Singapore	Infocomm Development Authority (IDA)	CAB	APEC MRA 1	
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)	CAB	APEC MRA 1	
Vietnam	Ministry of Communication (MIC)	CAB	APEC MRA 1	

**APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

N/A – Not Applicable

**EU MRA – European Union Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the EU member countries.

**NB – Notified Body

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Sensus FLXA2D
To: FCC 47 CFR Part(s) 24, 90, 101
Serial #: SNUS10-U1 Rev C
Issue Date: 7th October 2013
Page: 7 of 82

PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard EN ISO/IEC Guide 65. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



The American Association for Laboratory Accreditation

"World Class Accreditation"

Accredited Product Certification Body

A2LA has accredited

MICOM LABS

Pleasanton, CA

for technical competence as a

Product Certification Body

This product certification body is accredited in accordance with the recognized International Standard ISO/IEC Guide 65:1996 *General requirements for bodies operating product certification systems*. This accreditation demonstrates technical competence for a defined scope and the operation of a quality management system.

Presented this 27th day of March 2012.



President & CEO
For the Accreditation Council
Certificate Number 2381.02
Valid to November 30, 2013

For the product certification schemes to which this accreditation applies, please refer to the organization's Product Certification Scope of Accreditation

United States of America – Telecommunication Certification Body (TCB)

TCB Identifier – US0159

Industry Canada – Certification Body

CAB Identifier – US0159

Europe – Notified Body

Notified Body Identifier - 2280

Japan – Recognized Certification Body (RCB)

RCB Identifier - 210

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Sensus FLXA2D
To: FCC 47 CFR Part(s) 24, 90, 101
Serial #: SNUS10-U1 Rev C
Issue Date: 7th October 2013
Page: 8 of 82

DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft		
A	10 th October 2011	Initial Release
B	10 th October 2012	Revise MPE calculation to show power density (mW/cm) at 20cm.
C	7 th October 2013	Report revised to reflect rebranding by Sensus of FLEXELS model name to FLXA2D.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Sensus FLXA2D
To: FCC 47 CFR Part(s) 24, 90, 101
Serial #: SNUS10-U1 Rev C
Issue Date: 7th October 2013
Page: 9 of 82

1. TEST RESULT CERTIFICATE

Manufacturer:	Sensus Metering Systems 8609 Six Forks Road, 3rd Floor Raleigh, North Carolina 27615 USA	Tested By:	MiCOM Labs, Inc. 440 Boulder Court Suite 200 Pleasanton California, 94566, USA
EUT:	900 MHz Remote Telemetry Module	Telephone:	+1 925 462 0304
Model:	FLXA2D	Fax:	+1 925 462 0306
S/N:	Engineering Samples		
Test Date(s):	30th Oct to 13th Nov 2010	Website:	www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC 47 CFR Part(s) 24, 90, 101	EQUIPMENT COMPLIES


MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:


Graeme Grieve
Quality Manager MiCOM Labs,

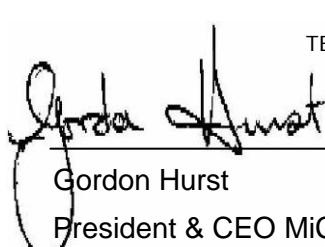
Gordon Hurst
President & CEO MiCOM Labs, Inc.



TESTING CERTIFICATE #2381.01

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

2. REFERENCES AND MEASUREMENT UNCERTAINTY

2.1. Normative References

Ref.	Publication	Year	Title
(i)	FCC 47 CFR Part 24	2011	Code of Federal Regulations
(ii)	FCC 47 CFR Part 90	2011	Code of Federal Regulations
(iii)	FCC 47 CFR Part 101	2011	Code of Federal Regulations
(iv)	ANSI C63.4	2009	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
(v)	CISPR 22/ EN 55022	2008 1998	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
(vi)	M 3003	Edition 2. Jan 2007	Expression of Uncertainty and Confidence in Measurements
(vii)	LAB34	Edition 1 Aug 2002	The expression of uncertainty in EMC Testing
(viii)	ETSI TR 100 028	2001	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
(xv)	A2LA	July 2012	Reference to A2LA Accreditation Status – A2LA Advertising Policy
(x)	FCC (OET)	15 th April 2010	Compliance Management Guidance for Wireless Broadband Services Operating in the 3650-3700 MHz Band

2.2. Test and Uncertainty Procedures

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Sensus FLXA2D
To: FCC 47 CFR Part(s) 24, 90, 101
Serial #: SNUS10-U1 Rev C
Issue Date: 7th October 2013
Page: 11 of 82

3. PRODUCT DETAILS AND TEST CONFIGURATIONS

3.1. Technical Details

Details	Description
Purpose:	Test of the Sensus FLXA2D to FCC 47 CFR Part(s) 24, 90, 101 regulations.
Applicant:	Sensus Metering Systems 8609 Six Forks Road, 3rd Floor Raleigh, North Carolina 27615 USA
Manufacturer:	As Applicant
Laboratory performing the tests:	MiCOM Labs, Inc. 440 Boulder Court, Suite 200 Pleasanton, California 94566 USA
Test report reference number:	SNUS10-U1 Rev C
Date EUT received:	1 st October 2010
Dates of test (from - to):	30th Oct to 13th Nov 2010
Standard(s) applied:	FCC 47 CFR Part(s) 24, 90, 101
No of Units Tested:	1
Type of Equipment:	Remote Telemetry Module
Model:	FlexELS
Location for use:	Outdoor use only
Equipment Classification:	Land Mobile Applications
Declared Frequency Range(s):	Transmit: 896.0375 – 959.9250 MHz Receiver: 896.0375 – 959.9250 MHz
Type of Modulation:	C & I, DD Extend, mPass, Normal, FSK, GMSK
Operational Bandwidth:	12.5 kHz, 20 kHz; 25 kHz
Declared Maximum Output Power:	+30 dBm
Transmit/Receive Operation:	Time Division Duplex (TDD)
Software Revision:	2.1.2-x
Hardware Release:	PCB Revision B
Antenna Type:	0 dBi Dipole Nominal
ITU Emission Designator:	C & I: 4K80F2D DD Extended: 9K60F2D mPass: 5K90F1D Normal: 9K60F2D
Rated Input Voltage and Current:	Input: +13.5 Vdc, 26 Vdc
Operating Temperature Range:	-33°C to +55°C
Equipment Dimensions:	4.00" x 5.00"
Weight:	2.3 ozs
Primary function of equipment:	Remote Telemetry Module

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

3.2. Scope of Test Program

The scope of the test program was to test the Sensus FLXA2D for compliance against the following standards:-

FCC 47 CFR Part 24, Subpart D requirements

FCC 47 CFR Part 90, Subpart I requirements.

FCC 47 CFR Part 101, Subpart C requirements.

Modular Approval

The test program addressed the Sensus FLXA2D product for modular approval.

Applicable Variants

This report contains data with respect to a four modulations;

- C & I
- DD Extend
- mPass
- Normal

3.3. Equipment Model(s) and Serial Number(s)

EUT/Support	Manufacturer	Equipment Description (Including Brand Name)	Model No.	Serial No.
EUT	Sensus	900 MHz FlexELS Transceiver	N/A	N/A
Support	Dell Laptop	Computer		

3.4. Antenna Details

Antenna Type	Gain (dBi)	Manufacturer	Model No.	Serial No.
Integral PCB Dipole	0.0	N/A	N/A	N/A

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

3.5. Cabling and I/O Ports

Number and type of I/O ports

Type of I/O Port	Description	Screened	Length
USB	Local Maintenance Terminal	y	< 1 Meter
+26 Vdc Power Input		n	2'
+13.5 Vdc Power Input		n	2'

3.6. Test Configurations

Test Matrix V's Variants

Parameter	Operational Mode	Test Conditions	Bandwidths (KHz)
Output power	Modulated - C & I, DD Extend, mPass, Normal	Ambient, +26 Vdc, +13.5 Vdc	12.5, 25.0
Occupied BW			
Spectrum Mask			
Frequency Stability	Single Tone (CW)	-33°C to +55°C + voltage variation	N/A
Conducted Spurious Emissions	Single Tone (CW)	Ambient, +26 Vdc, +13.5 Vdc	N/A
Radiated Spurious Emissions	Single Tone (CW)	Ambient, +26 Vdc, +13.5 Vdc	N/A
AC Wireline Emissions	Modulated	Not Tested – EUT is dc power	N/A

Test Frequencies

For testing in accordance with 47 CFR 2.1046-2, 1057, FCC OET recommends the following is used to select test frequencies for licensed devices;

Frequency Range of Device	Number of Selected Frequencies	Location in Range of Operation
1 MHz or less	1	Middle
1 to 10 MHz	2	1 near top and 1 near bottom
10 to 100 MHz	3	1 near top, 1 near middle, 1 near bottom

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Frequency Selection

The following is the list of frequency bands associated by rule part.


Rule Part	Frequency Range (MHz)
24D	901.0-902.0
24D	930.0-931.0
24D	940.0-941.0
90	896.0375 – 901.0
90	935.0-940.0
101	928.85-929.0
101	932.0-932.5
101	941.0-941.5
101	959.85-960.0

Rule Part	Frequency Range (MHz)	Selected Test Frequency (MHz)
90	896.0375 – 901.0	896.0375
24D	901.0-902.0	901.9875
101	928.85-929.0	925.9250
24D	930.0-931.0	930.5000
101	932.0-932.5	932.2500
90	935.0-940.0	935.0125
101	941.0-941.5	941.4875
101	959.85-960.0	959.9250

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Set-Up

Test software was available to exercise the Access Point and the equipment was tested using the following test configuration.

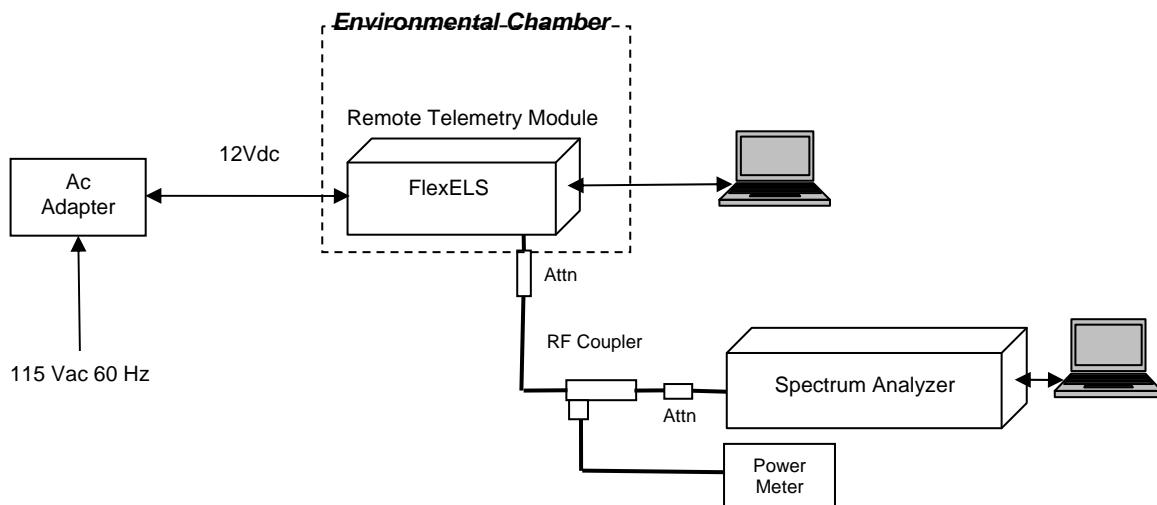

General Test Set-Up

3.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. NONE

3.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE

3.9. Subcontracted Testing or Third Party Data

1. NONE

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

4. TEST SUMMARY

List of Measurements

The following table represents the list of measurements required under the **FCC CFR47 Part 24, 90, and 101**.

IC RSS-134, RSS-119 & RSS Gen

Section(s)	Test Items	Description	Condition	Result	Test Report Section
2.1046	Output Power	Modulated Output Power	Conducted	Complies	5.1.1
24.133 a(1),a(2) 90.210 (j) 101.111 a(6) RSS-134 6.3 (i), (ii) RSS-119 5.8.8	Occupied Bandwidth & Spectrum Mask	Bandwidth and spectrum mask	Conducted	Complies	5.1.2
2.1055, 24.135, 90.213, 101.107 RSS-134 (7), RSS-119 (5.3)	Frequency Stability	Includes temperature and voltage variations	Conducted	Complies	5.1.3
24.133 a(1),a(2) 90.210 (j) 101.111 a(6) RSS-134 6.3 (i), (ii) RSS-119 5.8.8	Conducted Spurious Emissions	Emissions from Antenna Port	Conducted	Complies	5.1.4
1.1310 5.5	Maximum Permissible Exposure	Exposure to radio frequency energy levels	Calculated	Complies	5.1.5
24.133 a(1),a(2) 90.210 (j) 101.111 a(6) ANSI/TIA-603 RSS-134 6.3 (i), (ii) RSS-119 5.8.8	Radiated Spurious Emissions	Spurious emissions	Radiated	Complies	5.1.6
15.207 7.2.2	AC Wireline Conducted	Emissions 150 kHz–30 MHz	Not Tested	EUT is dc powered	5.1.7

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Sensus FLXA2D
To: FCC 47 CFR Part(s) 24, 90, 101
Serial #: SNUS10-U1 Rev C
Issue Date: 7th October 2013
Page: 17 of 82

Note 1: Test results reported in this document relate only to the items tested

Note 2: The required tests demonstrated compliance as per client declaration of test configuration, monitoring methodology and associated pass/fail criteria

Note 3: Section 3.7 'Equipment Modifications' highlight the equipment modifications that were required to bring the product into compliance with the above matrix

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5. TEST RESULTS

5.1. Device Characteristics

5.1.1. Output Power

FCC 47 CFR Part 24 Subpart 24.133 a(1), a(2)

FCC 47 CFR Part 90 Subpart 90.210 (j)

FCC 47 CFR Part 101 Subpart 101.111 a(6)

Test Procedure

The transmitter output was connected to an average power meter and the Output Power was measured on a modulated carrier under all operational modes.

Output Power was measured under ambient conditions, nominal voltage for all modulations and rule parts for the applicable frequency channels.

Test Set-up is shown in Section 3.6 Test Configuration

Ambient conditions.

Temperature: **17 to 23 °C** Relative humidity: **31 to 57 %** Pressure: **999 to 1012 mbar**

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Sensus FLXA2D
To: FCC 47 CFR Part(s) 24, 90, 101
Serial #: SNUS10-U1 Rev C
Issue Date: 7th October 2013
Page: 19 of 82

Part 24 Measurement Results

Output Power (dBm)				
Center Frequency (MHz)	C & I	DD Extend	mPass	Normal
901.9875	+29.76	+29.75	+29.75	+29.74
930.5000	+29.93	+29.91	+29.93	+29.91

Part 90 Measurement Results

Output Power (dBm)				
Center Frequency (MHz)	C & I	DD Extend	mPass	Normal
896.0375	+29.81	+29.83	+29.85	+29.81
935.0125	+29.98	+29.96	+29.96	+29.01

Part 101 Measurement Results

Output Power (dBm)				
Center Frequency (MHz)	C & I	DD Extend	mPass	Normal
928.9250	+29.88	+29.88	+29.89	+29.87
932.2500	+29.95	+29.95	+29.94	+29.94
941.4875	+29.98	+29.98	+29.96	+29.99
959.9250	+29.99	+29.98	+29.98	+29.97

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Sensus FLXA2D
To: FCC 47 CFR Part(s) 24, 90, 101
Serial #: SNUS10-U1 Rev C
Issue Date: 7th October 2013
Page: 20 of 82

Laboratory Measurement Uncertainty for Power Measurement

Measurement uncertainty	±1.33 dB
-------------------------	----------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of RF Output Power'	0070, 0116, 0158, 0193, 0252, 0313, 0314.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.2. Occupied Bandwidth and Spectrum Mask

FCC 47 CFR Part 24 Subpart 24.133 a(1), a(2)

FCC 47 CFR Part 90 Subpart 90.210 (j)

FCC 47 CFR Part 101 Subpart 101.111 a(6)

RSS-134 6.3 (i), (ii)

RSS-119 5.8.8

Test Procedure

The transmitter output was connected to a spectrum analyzer and the Occupied Bandwidth was measured with a modulated carrier.

Occupied Bandwidth was measured under ambient conditions, nominal voltage for all modulations and rule parts on low, mid and high channels. The spectrum analyzer RBW and VBW was set for 300 Hz which was based on the bandwidth of the output spectrum.

To position the mask relative to the output spectrum the EUT was initially set to transmit a CW (single) tone at the frequency of interest. The mask was then lined up with the peak of the CW tone. The EUT then was then set to modulate each modulation of interest and measurements reported.

Spectrum mask parameters were generated using the attenuation characteristics which were found in each rule part as highlighted for 12.5 kHz. The spectrum analyzer pass/fail criteria was used to determine compliance which is clearly marked on each plot provided. The automatic bandwidth function within the analyzer was used to determine 99% bandwidth.

Test Set-up is shown in Section 3.6 Test Configuration

Ambient conditions.

Temperature: **17 to 23 °C** Relative humidity: **31 to 57 %** Pressure: **999 to 1012 mbar**



Title: Sensus FLXA2D
To: FCC 47 CFR Part(s) 24, 90, 101
Serial #: SNUS10-U1 Rev C
Issue Date: 7th October 2013
Page: 22 of 82

PART 24 RESULTS


Part 24.133 Measurement Results – Occupied Bandwidth + Plots

99% Bandwidth (kHz)				
Center Frequency (MHz)	C & I	DD Extend	mPass	Normal
901.9875	5.711	12.625	5.711	11.122
930.5000	5.711	12.325	5.711	11.122


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Part 24.133 Measurement Results

Channel 901.9875 MHz C&I Modulation – Spectrum Mask, 99% Occupied Bandwidth

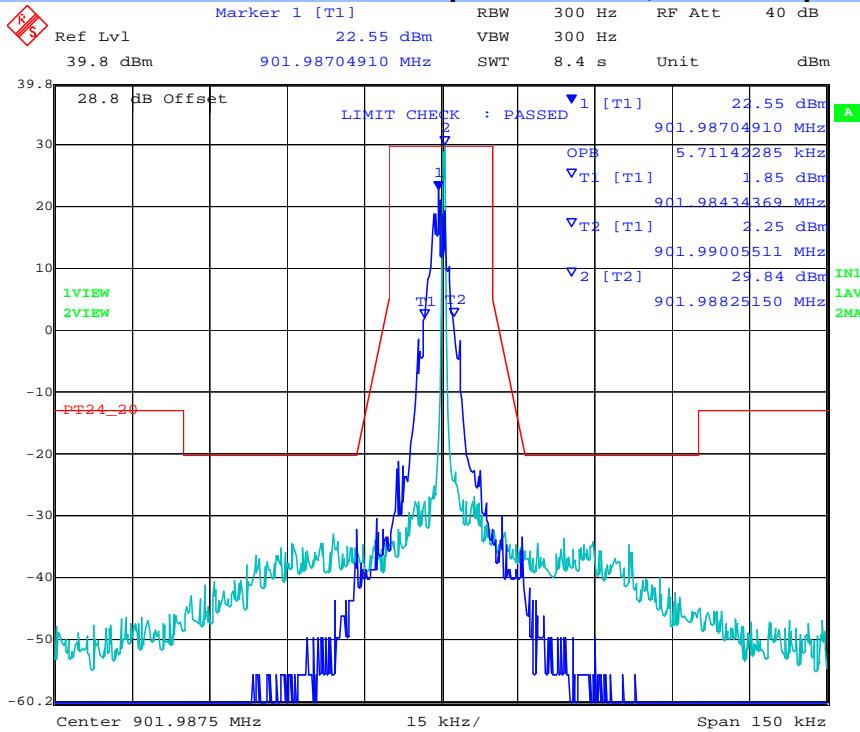


Channel 901.9875 MHz DD Extend – Spectrum Mask, 99% Occupied Bandwidth

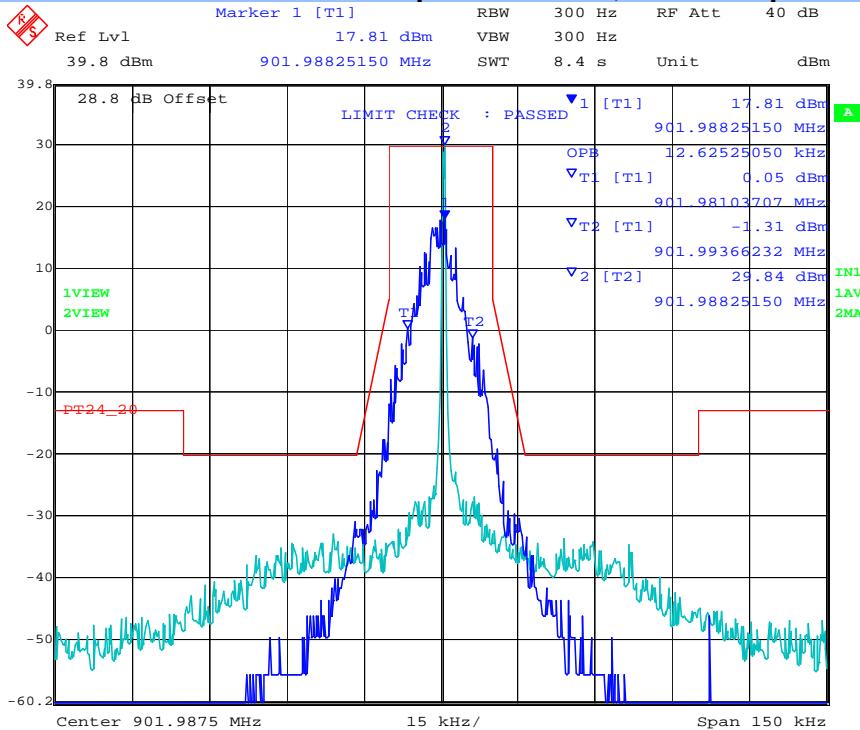


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Channel 901.9875 MHz mPass – Spectrum Mask & 99% Occupied Bandwidth

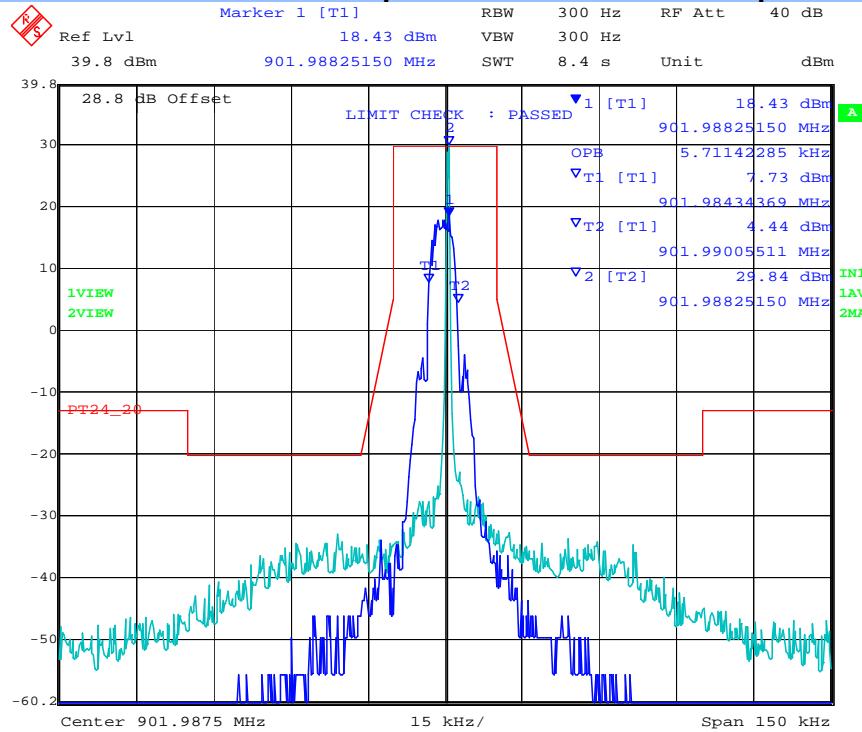


Channel 901.9875 MHz Normal – Spectrum Mask & 99% Occupied Bandwidth

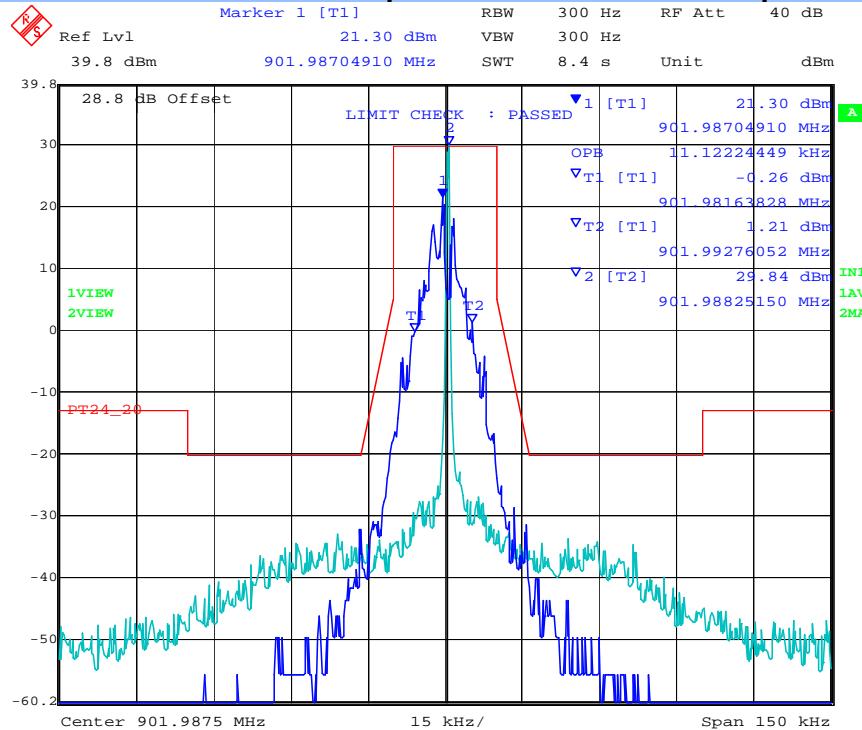


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Channel 930.5 MHz C&I Modulation – Spectrum Mask, 99% Occupied Bandwidth

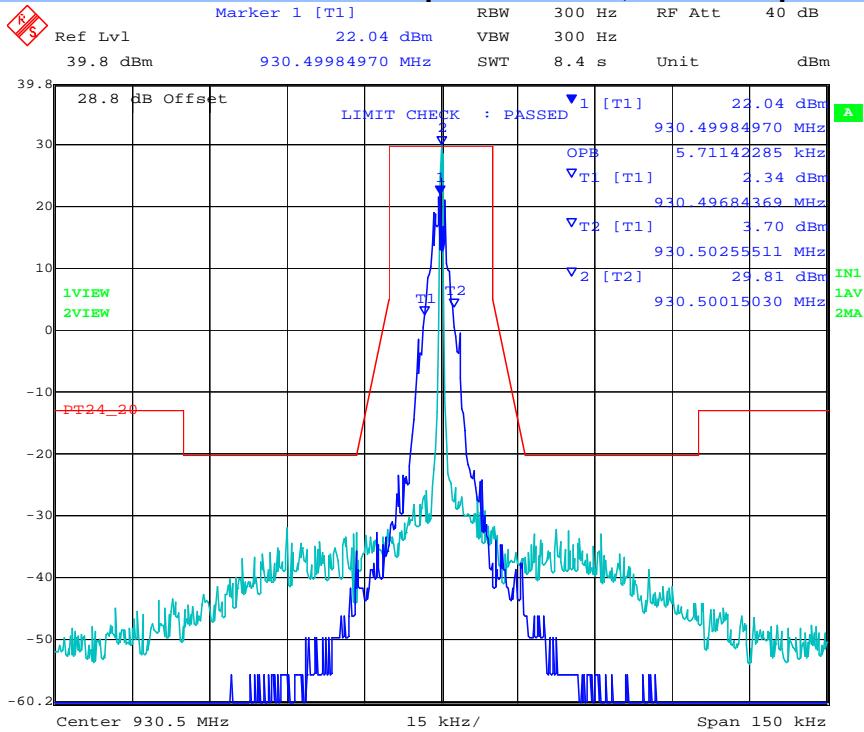


Channel 930.5 MHz DD Extend – Spectrum Mask, 99% Occupied Bandwidth

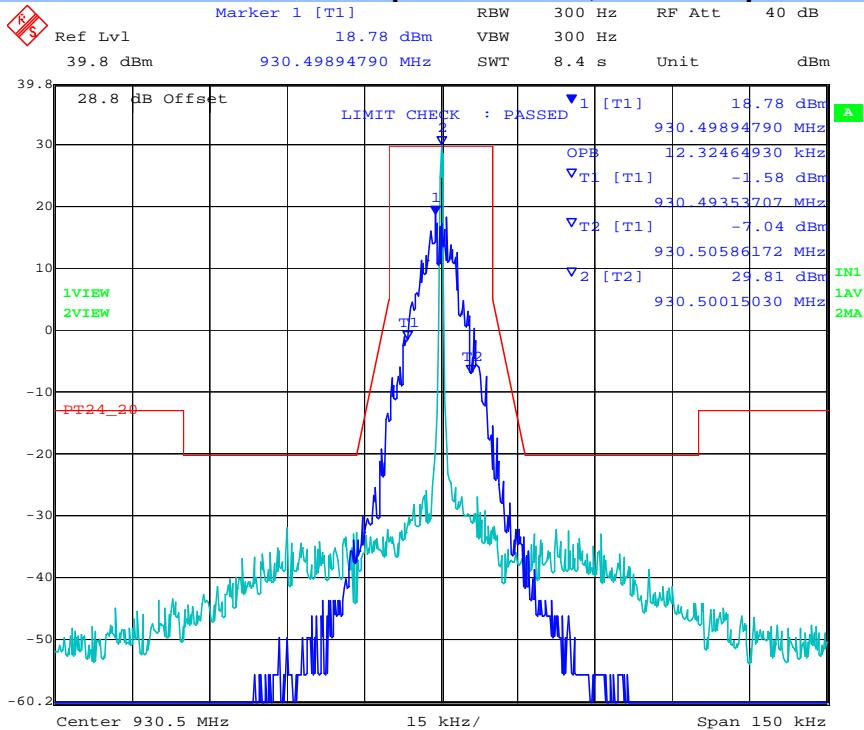


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Channel 930.5 MHz mPass – Spectrum Mask & 99% Occupied Bandwidth

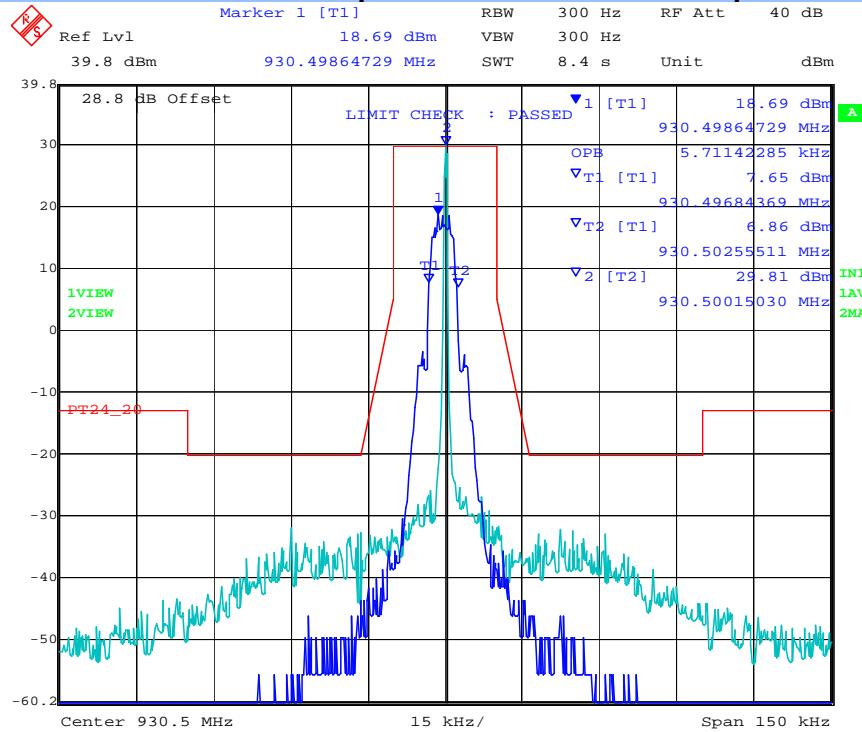

Channel 930.5 MHz Normal – Spectrum Mask & 99% Occupied Bandwidth

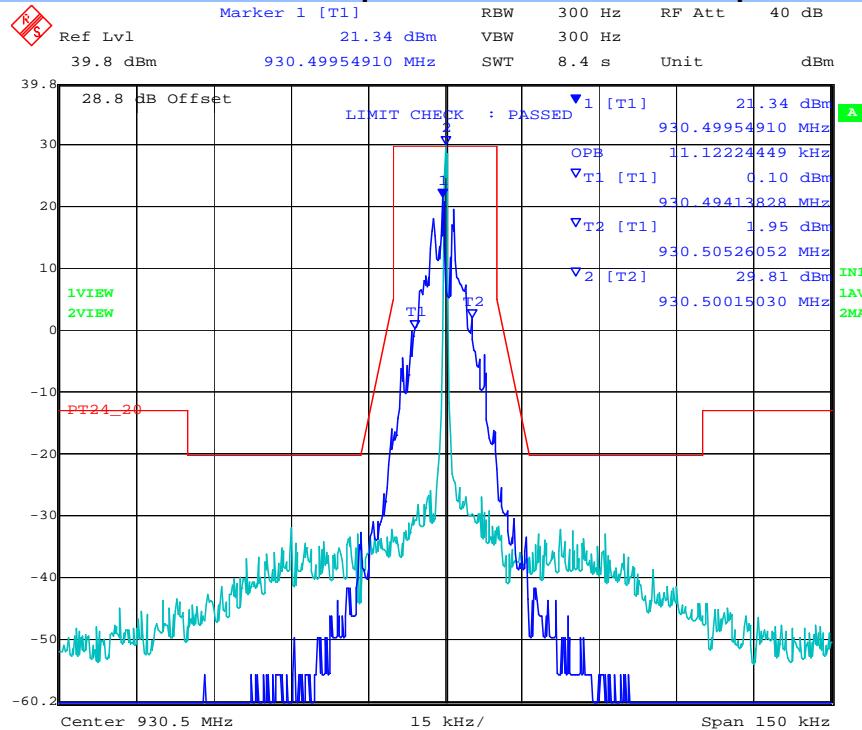

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Sensus FLXA2D
To: FCC 47 CFR Part(s) 24, 90, 101
Serial #: SNUS10-U1 Rev C
Issue Date: 7th October 2013
Page: 27 of 82

PART 90 RESULTS


Part 90.210 j Measurement Results – Occupied Bandwidth + Plots

99% Bandwidth (kHz)				
Center Frequency (MHz)	C & I	DD Extend	mPass	Normal
896.0375	5.812	11.222	5.812	11.022
935.0125	5.812	11.222	5.812	11.022


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Part 90.210 j Measurement Results

Channel 896.0375 MHz C&I Modulation – Spectrum Mask, 99% Occupied Bandwidth

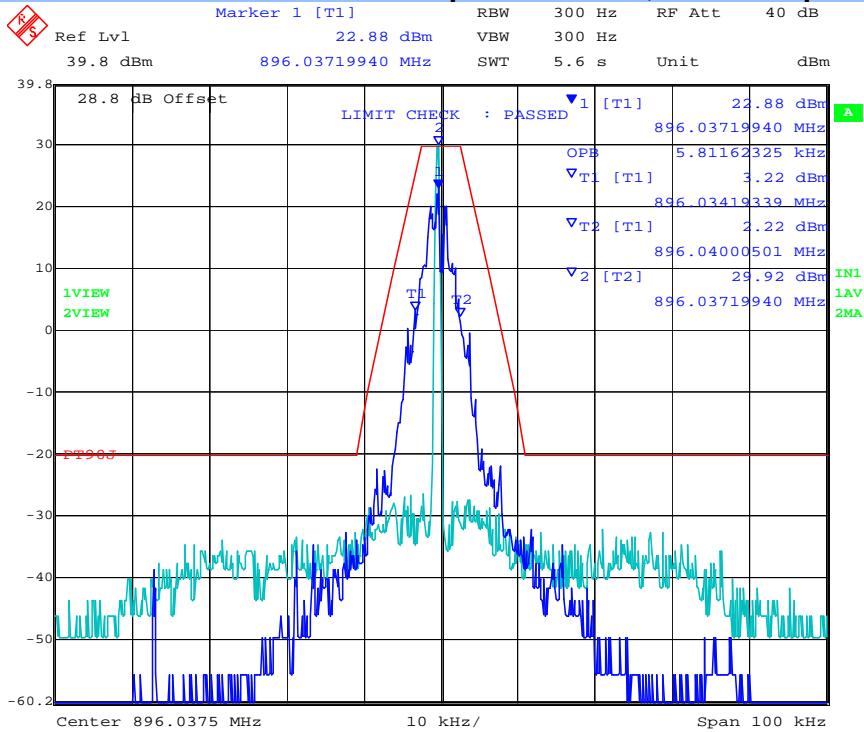


Channel 896.0375 MHz DD Extend – Spectrum Mask, 99% Occupied Bandwidth

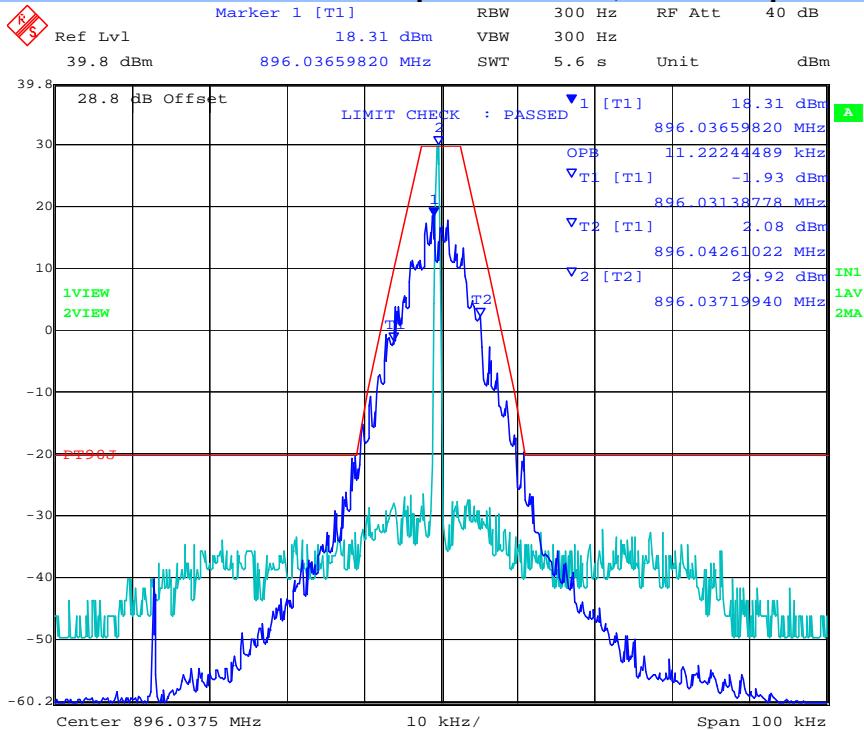


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Channel 896.0375 MHz mPass – Spectrum Mask & 99% Occupied Bandwidth

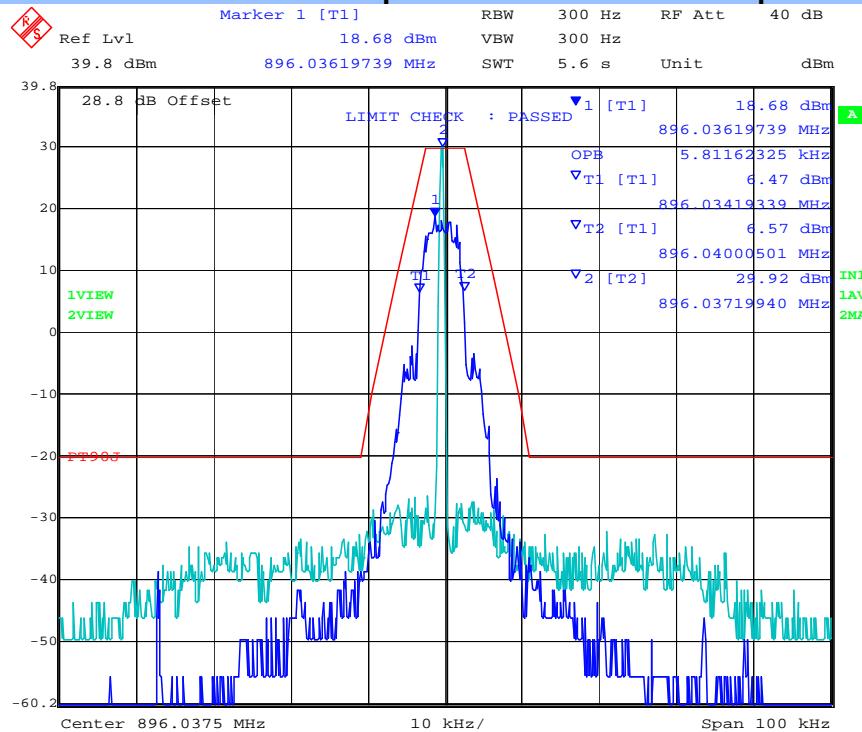


Channel 896.0375 MHz Normal – Spectrum Mask & 99% Occupied Bandwidth

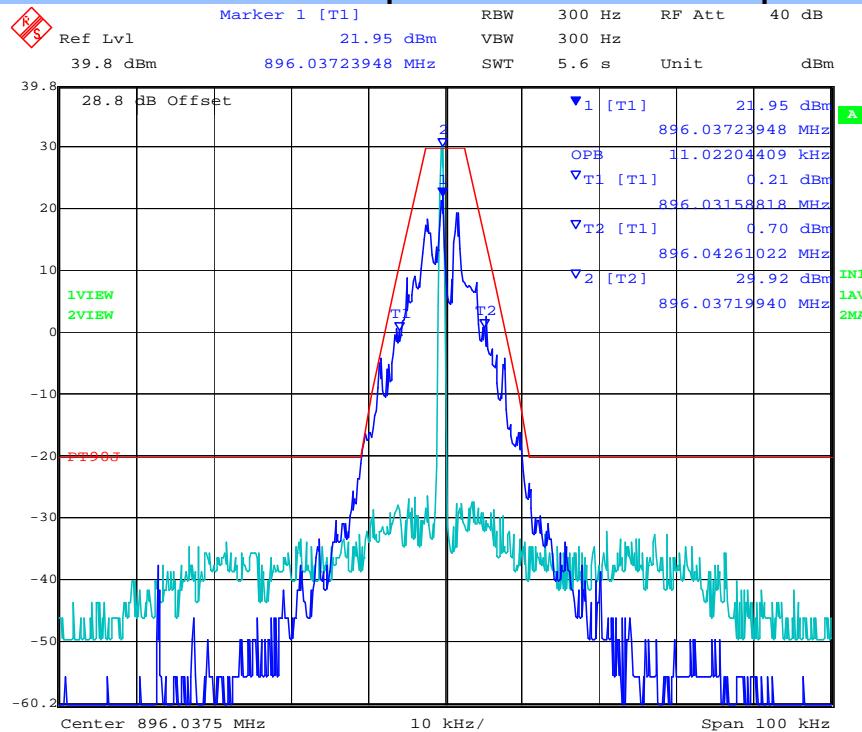


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Channel 935.0125 MHz C&I Modulation – Spectrum Mask, 99% Occupied Bandwidth

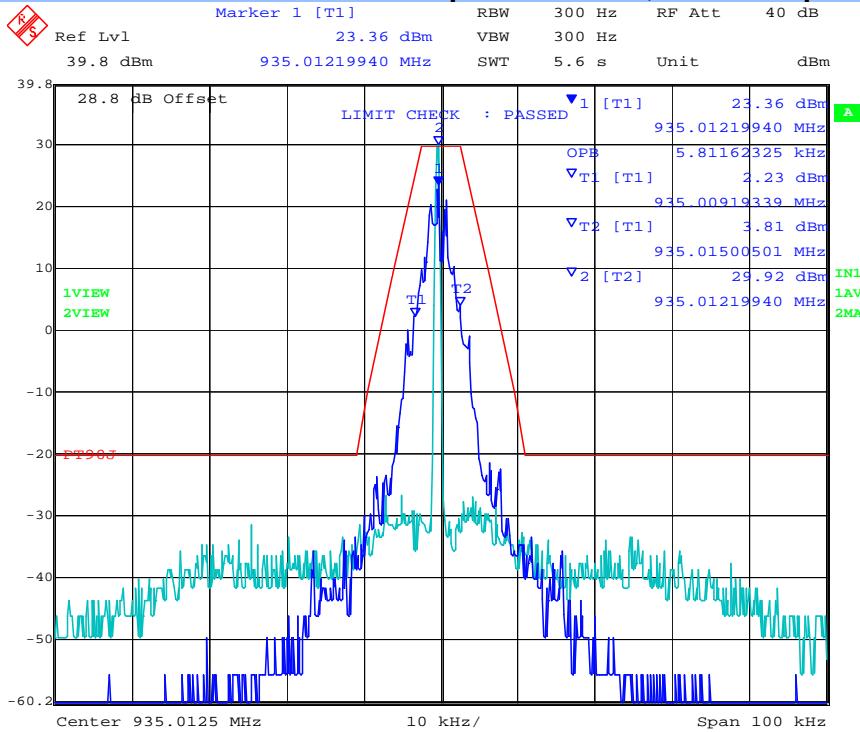


Channel 935.0125 MHz DD Extend – Spectrum Mask, 99% Occupied Bandwidth

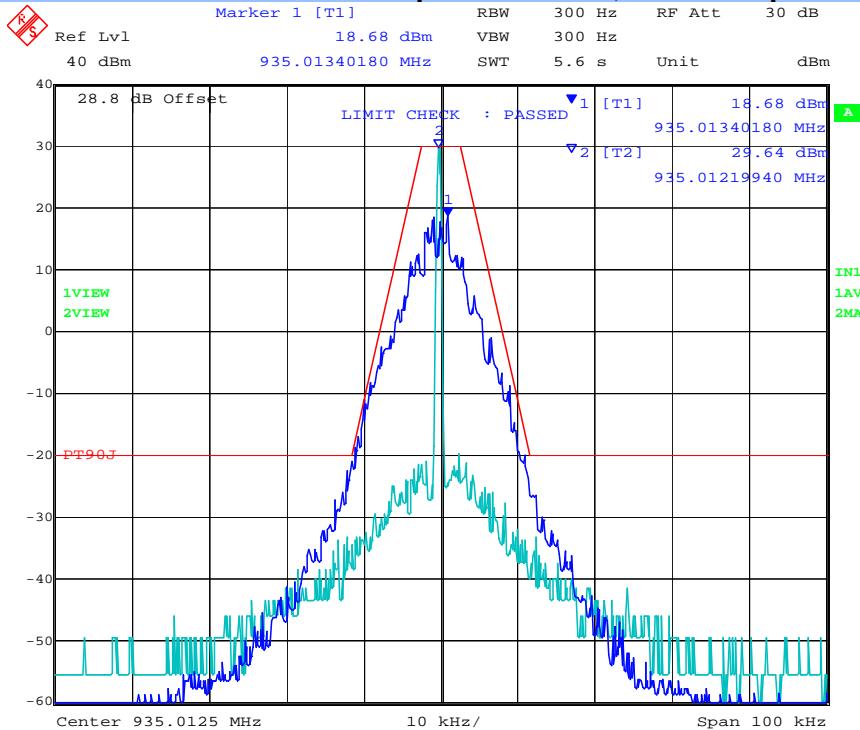


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Channel 935.0125 MHz mPass – Spectrum Mask & 99% Occupied Bandwidth

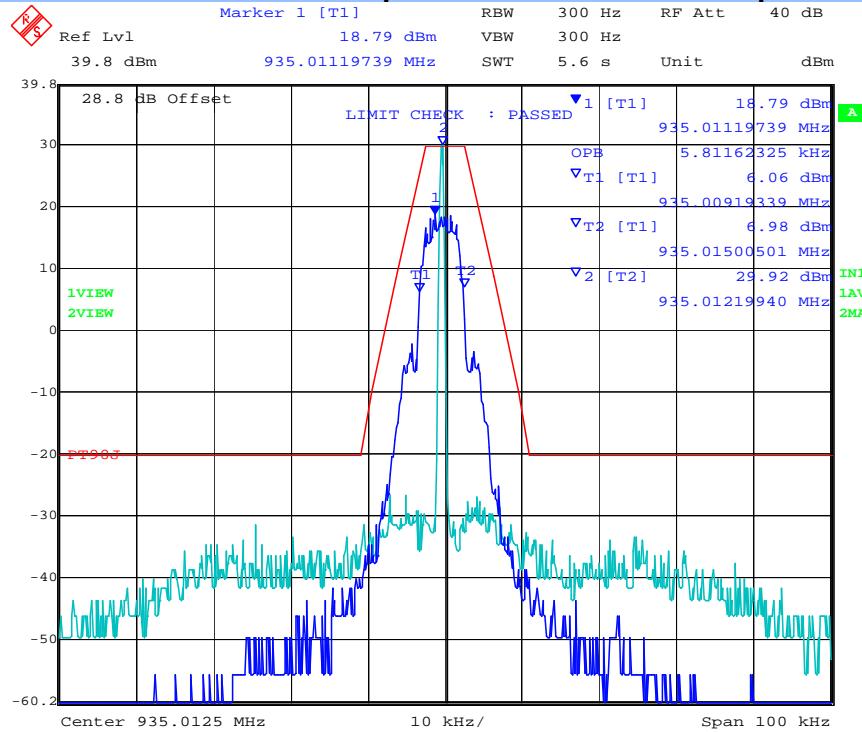

Channel 935.0125 MHz Normal – Spectrum Mask & 99% Occupied Bandwidth

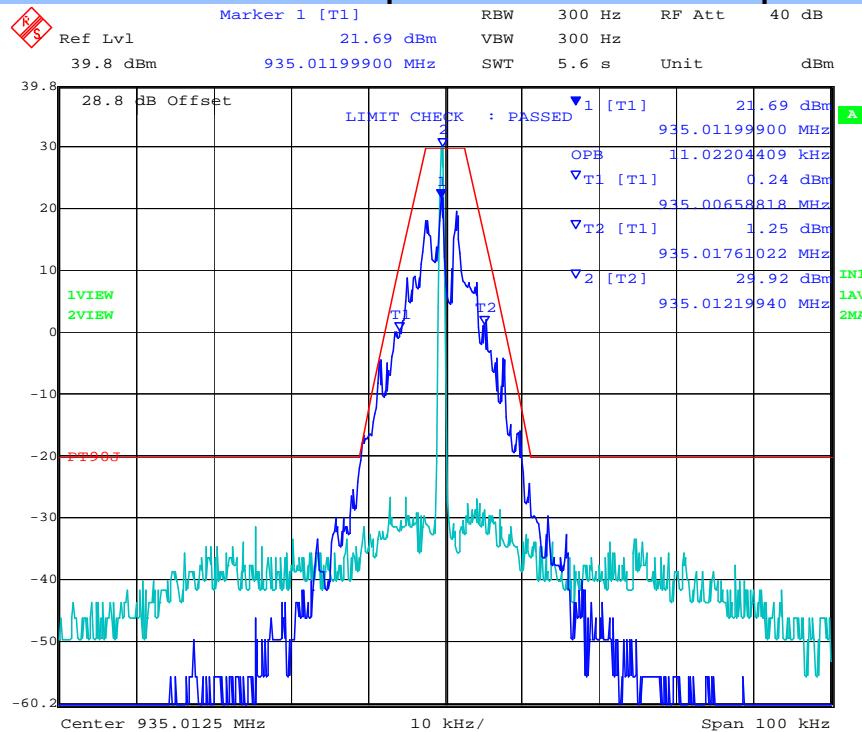

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Sensus FLXA2D
To: FCC 47 CFR Part(s) 24, 90, 101
Serial #: SNUS10-U1 Rev C
Issue Date: 7th October 2013
Page: 32 of 82

PART 101 RESULTS


Part 101.111 a(6) Measurement Results – Occupied Bandwidth + Plots

Center Frequency (MHz)	99% Bandwidth (kHz)			
	C & I	DD Extend	mPass	Normal
928.9250	5.711	12.625	5.711	11,122
932.2500	5.711	12.325	5.711	11.122
941.4875	5.711	12.024	5.711	11.122
959.9250	5.711	12.024	5.711	11.122


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Part 101.111 a(6) Measurement Results

Channel 928.925 MHz C&I Modulation – Spectrum Mask, 99% Occupied Bandwidth

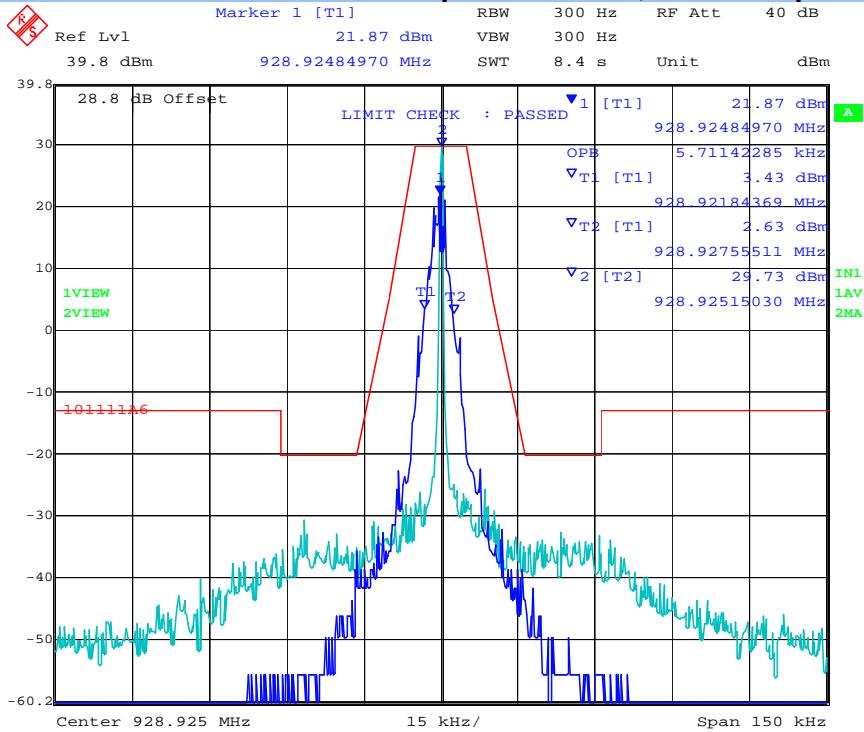


Channel 928.925 MHz DD Extend – Spectrum Mask, 99% Occupied Bandwidth

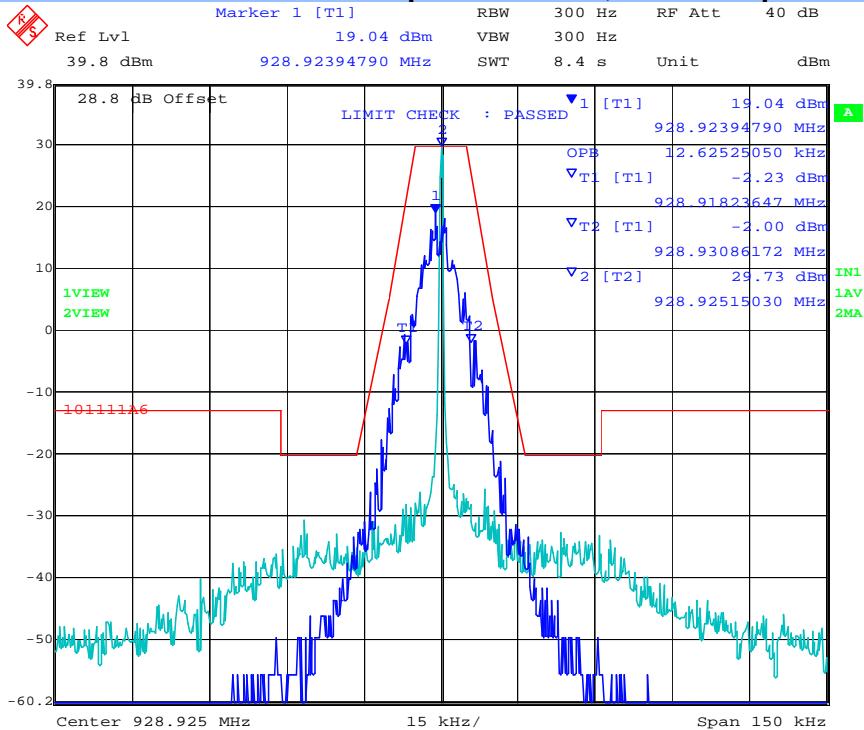


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Channel 928.925 MHz mPass – Spectrum Mask & 99% Occupied Bandwidth

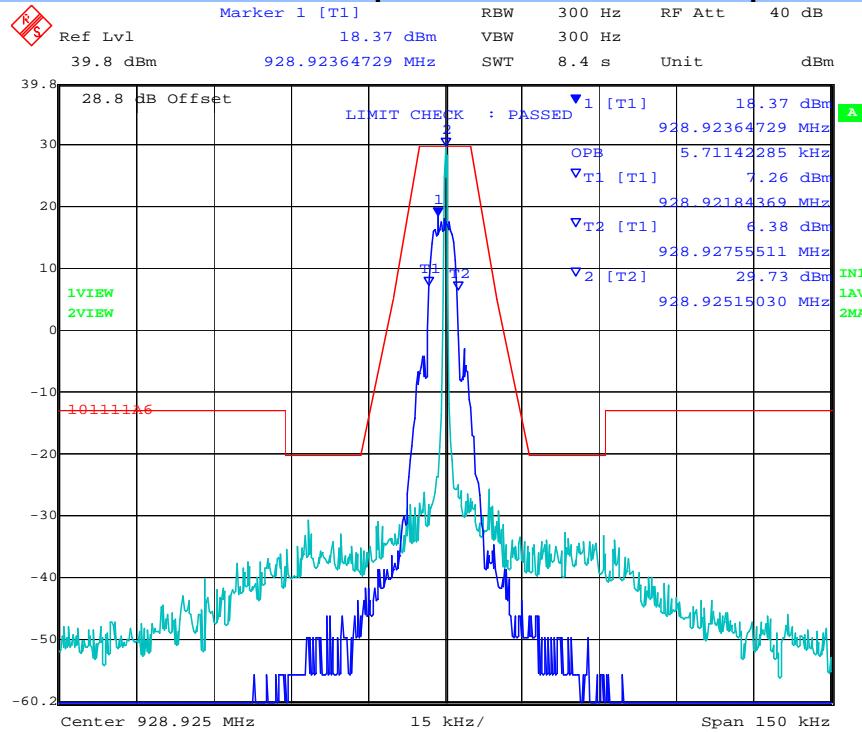


Channel 928.925 MHz Normal – Spectrum Mask & 99% Occupied Bandwidth

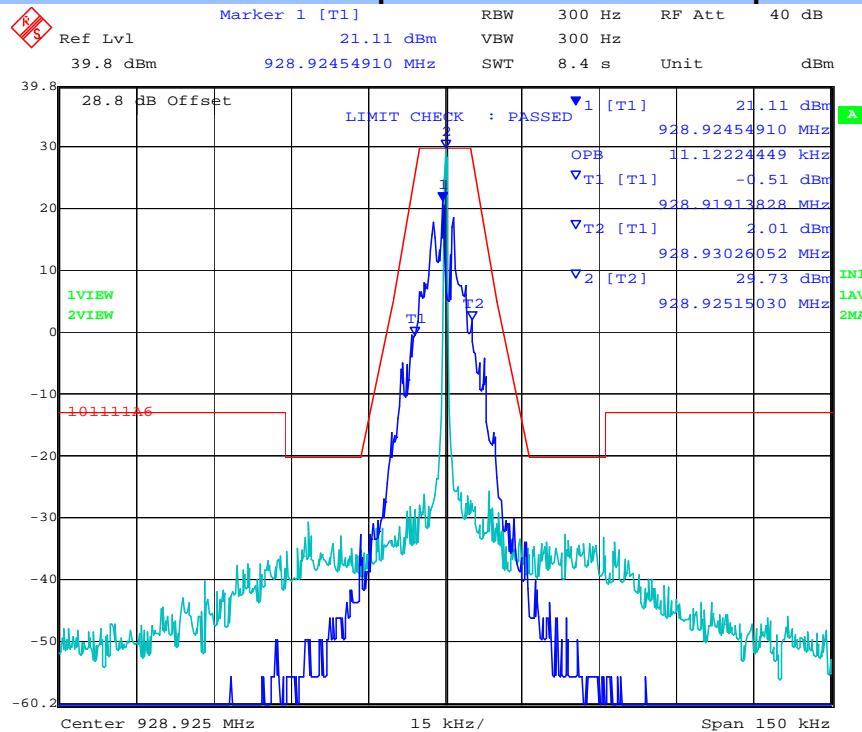


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Channel 932.25 MHz C&I Modulation – Spectrum Mask, 99% Occupied Bandwidth

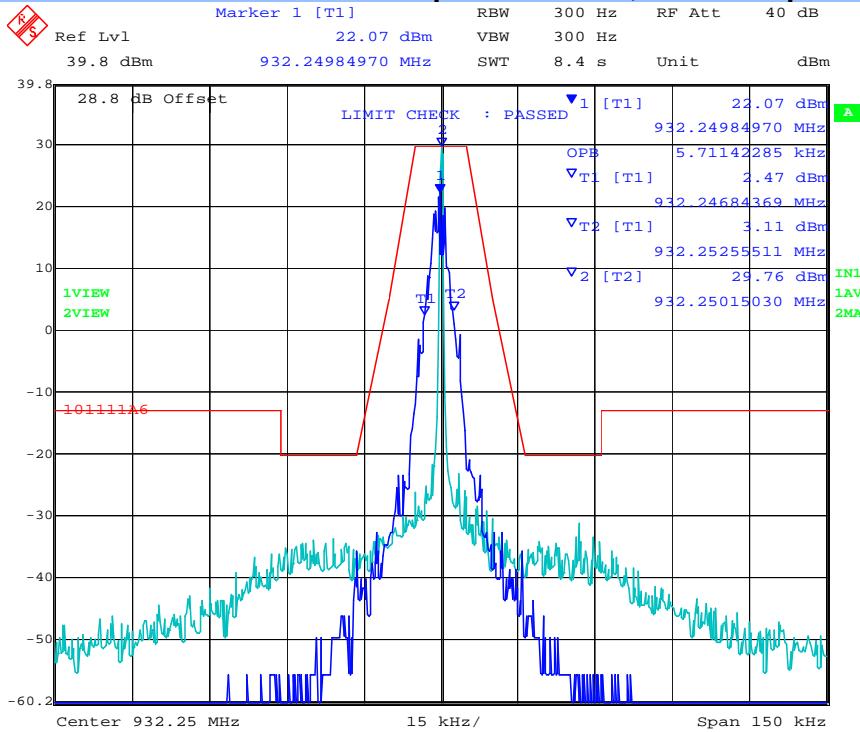


Channel 932.25 MHz DD Extend – Spectrum Mask, 99% Occupied Bandwidth

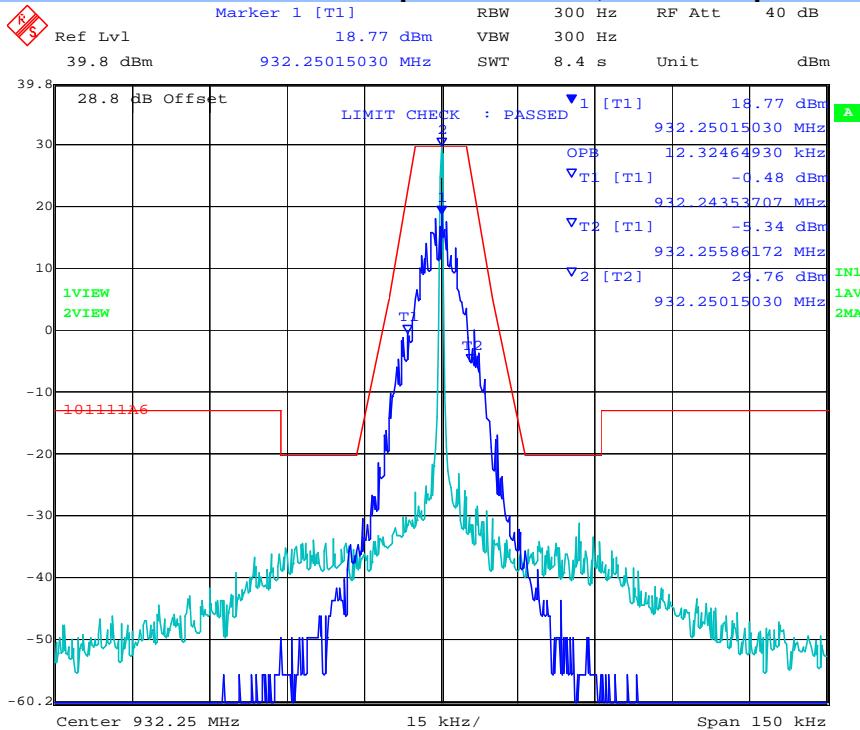


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Channel 932.25 MHz mPass – Spectrum Mask & 99% Occupied Bandwidth

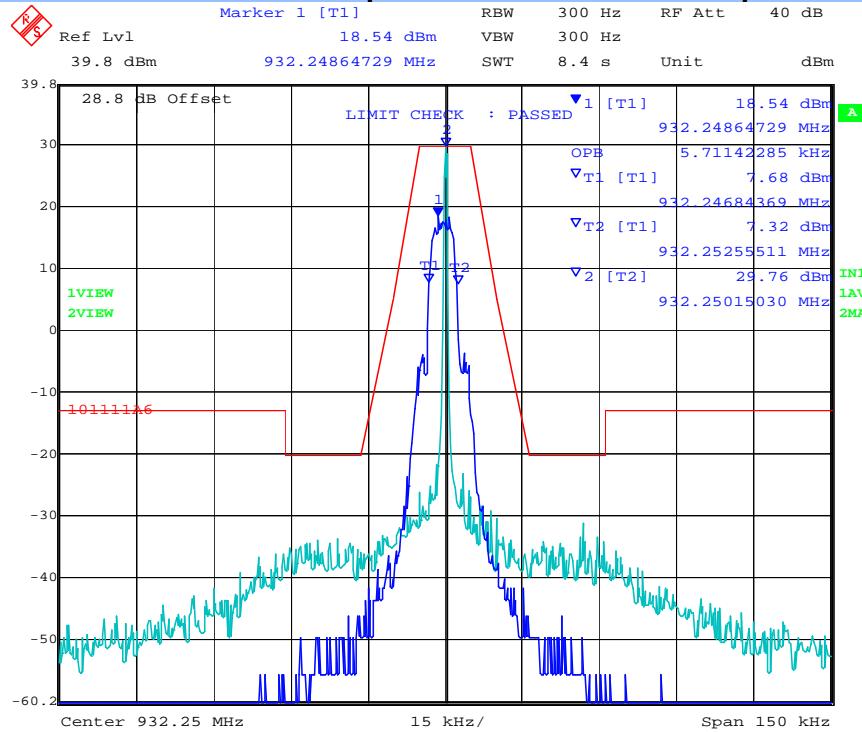


Channel 932.25 MHz Normal – Spectrum Mask & 99% Occupied Bandwidth

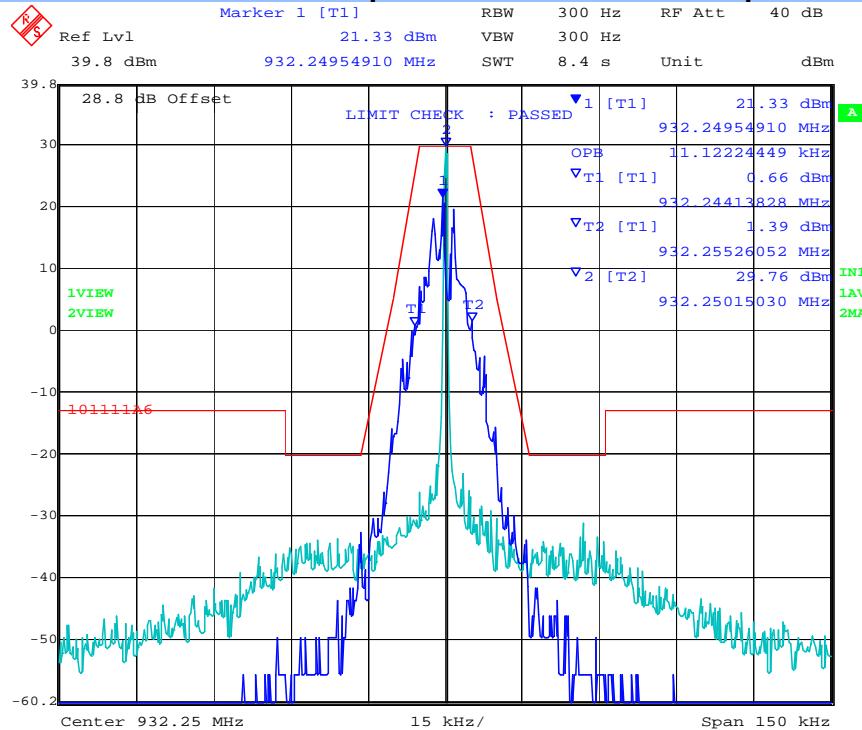


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Channel 941.4875 MHz C&I Modulation – Spectrum Mask, 99% Occupied Bandwidth

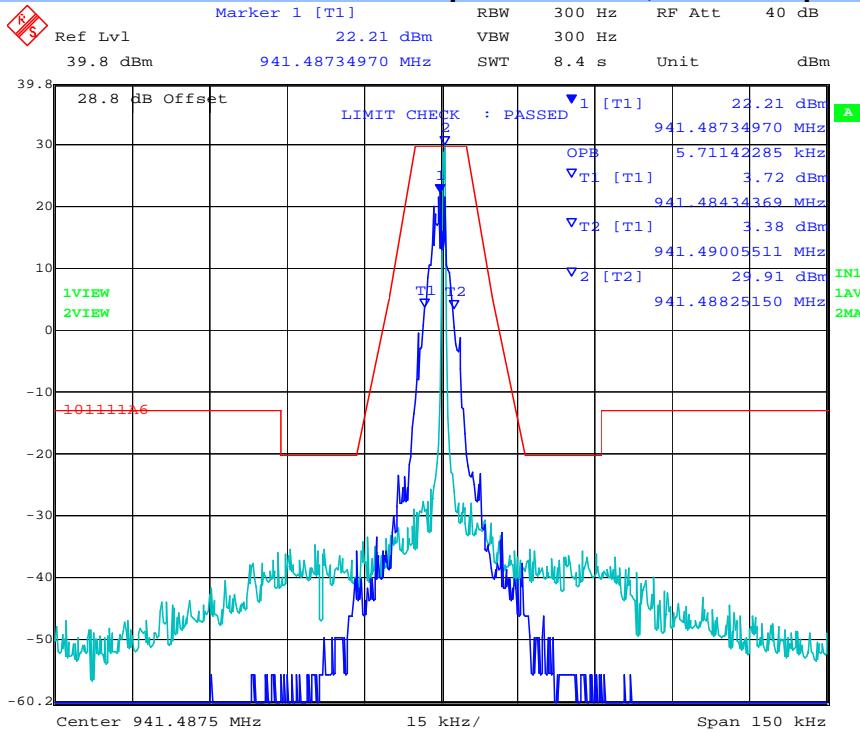


Channel 941.4875 MHz DD Extend – Spectrum Mask, 99% Occupied Bandwidth

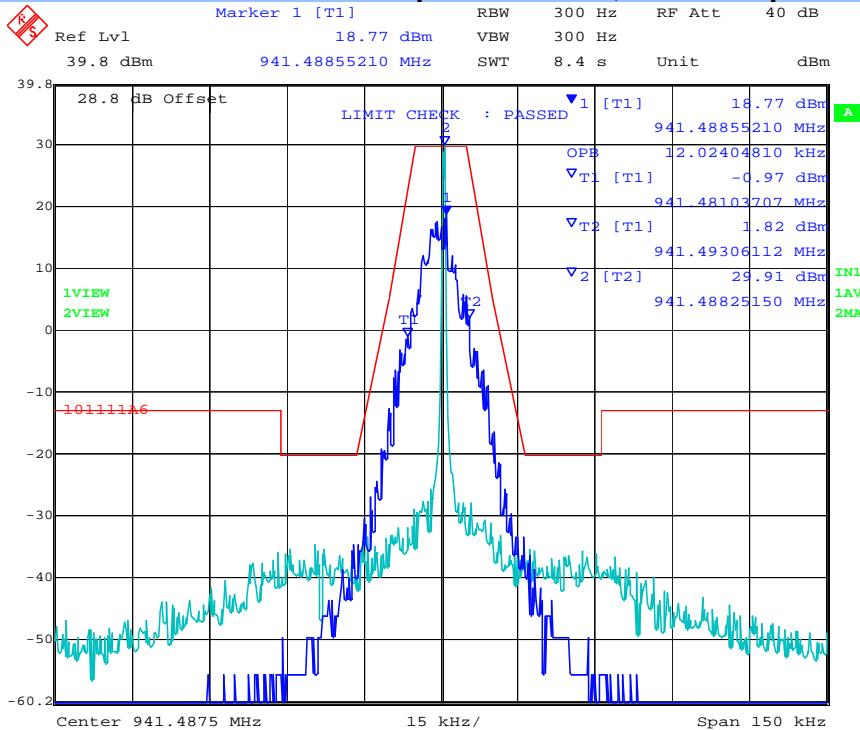


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Channel 941.4875 MHz mPass – Spectrum Mask & 99% Occupied Bandwidth

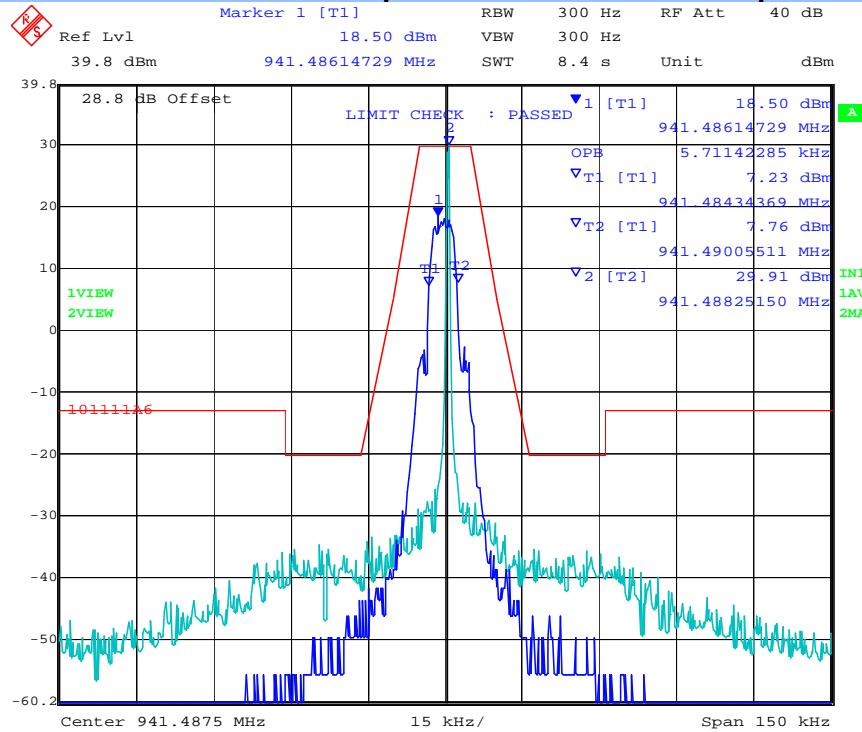


Channel 941.4875 MHz Normal – Spectrum Mask & 99% Occupied Bandwidth

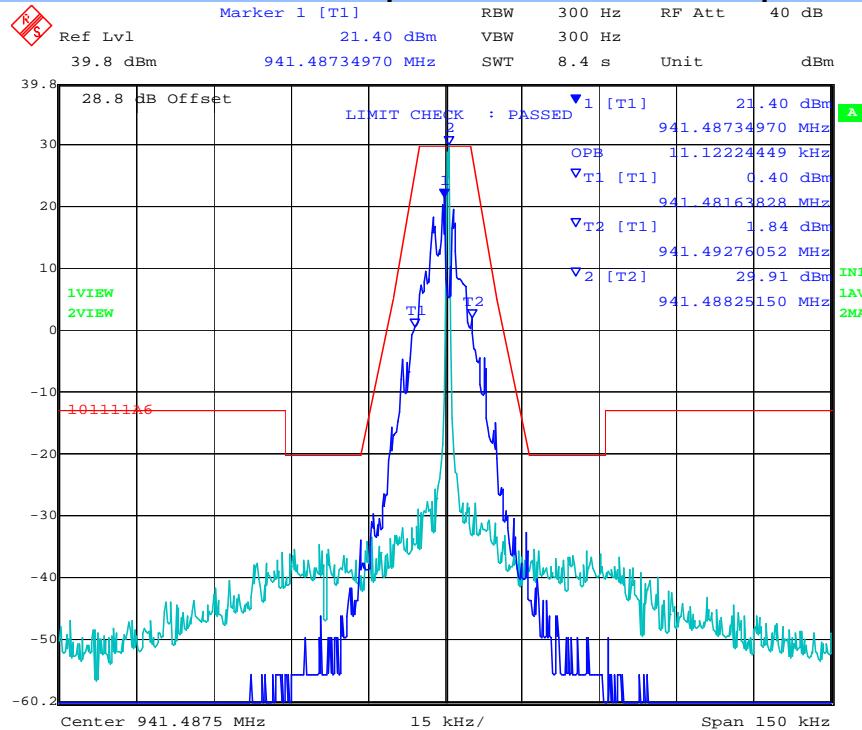


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Channel 959.925 MHz C&I Modulation – Spectrum Mask, 99% Occupied Bandwidth

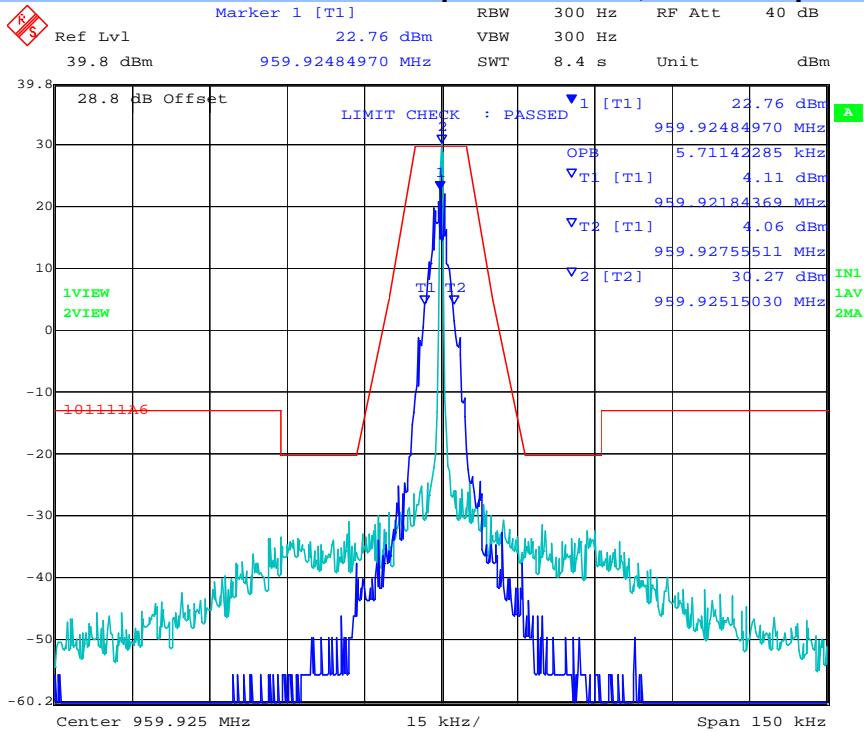


Channel 959.925 MHz DD Extend – Spectrum Mask, 99% Occupied Bandwidth

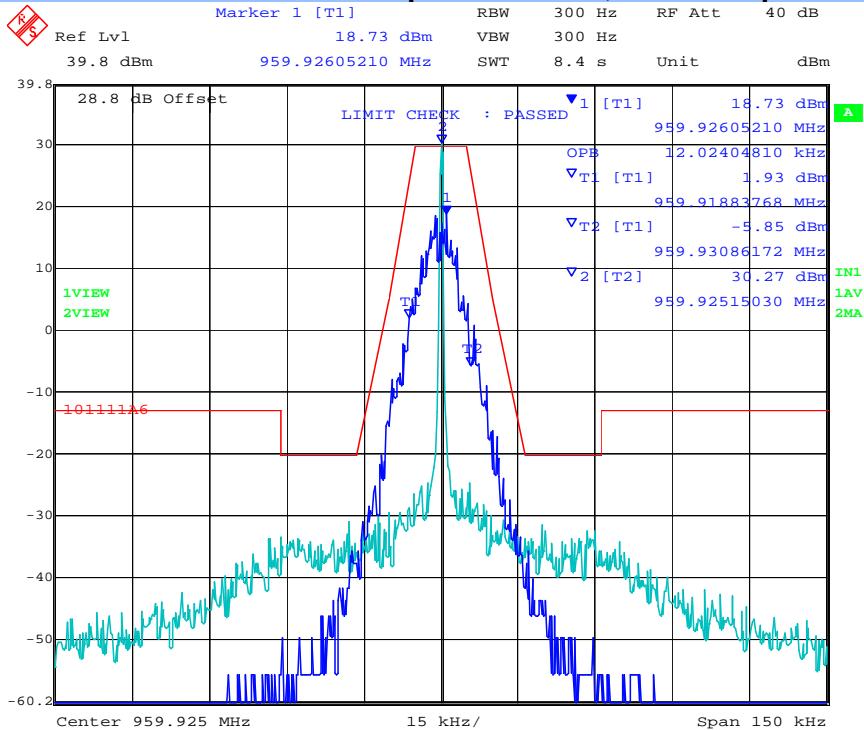


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Channel 959.925 MHz mPass – Spectrum Mask & 99% Occupied Bandwidth

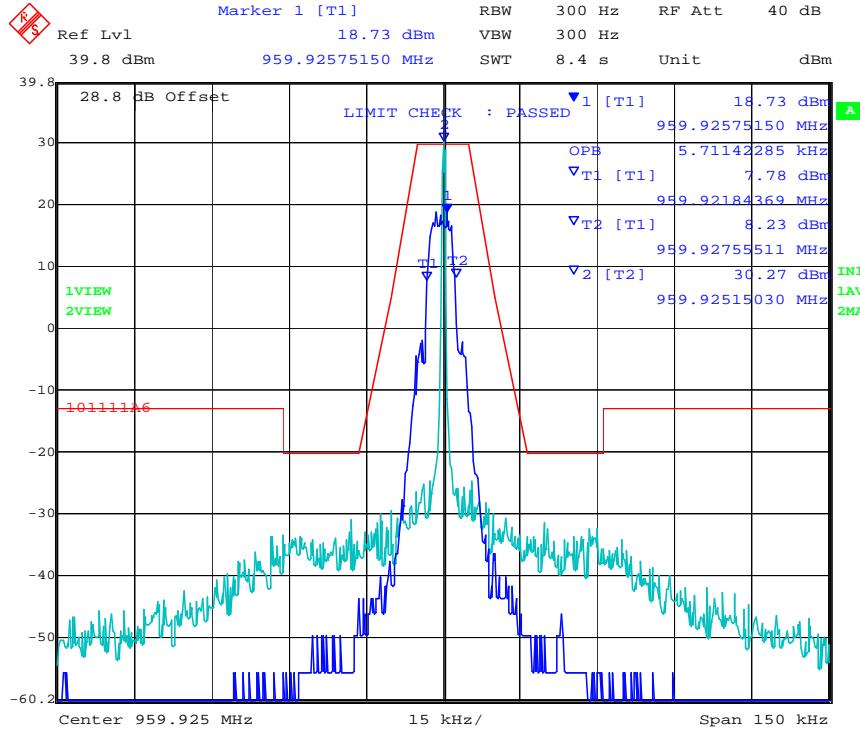

Channel 959.925 MHz Normal – Spectrum Mask & 99% Occupied Bandwidth

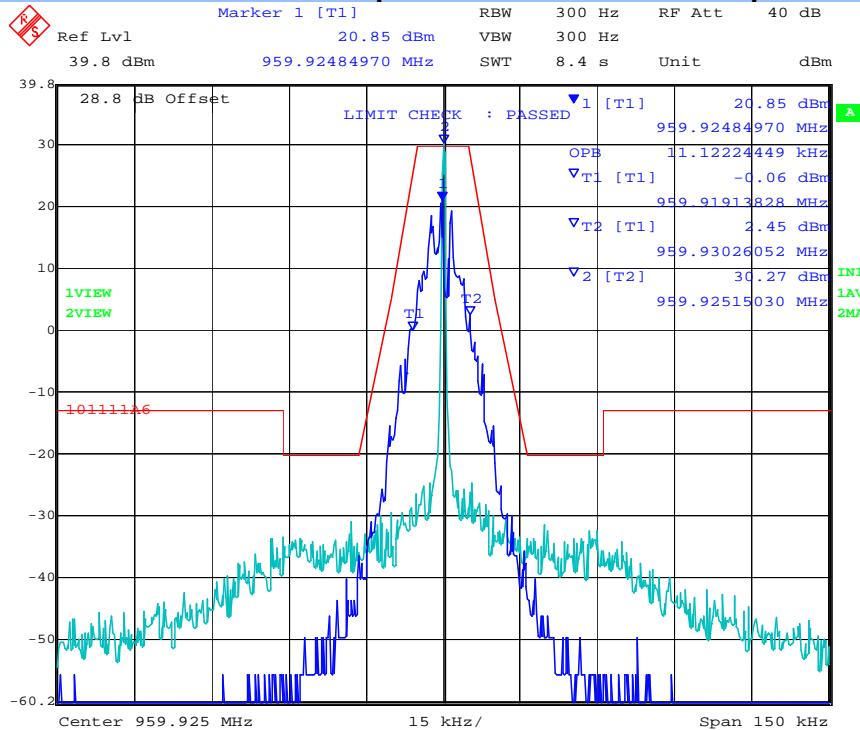

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Sensus FLXA2D
To: FCC 47 CFR Part(s) 24, 90, 101
Serial #: SNUS10-U1 Rev C
Issue Date: 7th October 2013
Page: 41 of 82

Laboratory Measurement Uncertainty for Power Measurements

Measurement uncertainty	±1.33 dB
-------------------------	----------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of RF Spectrum Mask'	0070, 0116, 0158, 0193, 0252, 0313, 0314.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.3. Frequency Stability; Temperature Variations, and Voltage Variations

FCC 47 CFR Sections 2.1055, 24.135, 90.213, 101.107

IC RSS-134 (7), RSS-119 (5.3)

Test Procedure

The EUT was placed inside an environmental chamber. The transmitter output was connected to a spectrum analyzer and the frequency stability was measured using a unmodulated (CW) single tone. A thermocouple was used to monitor chamber temperature. The EUT was attached to a variable power supply providing the primary supply voltage.

Frequency stability was measured through the extremes of temperature and voltage on the mid channel of each frequency band. Before measurements were taken at each temperature the equipment waited until thermal balance was obtained.

At +20°C the primary voltage was varied $\pm 15\%$ and measurements were taken at each voltage level.

Test Set-up is shown in Section 3.6 Test Configuration

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

TABLE OF RESULTS Frequency Stability – Channel Measured 896.0125 MHz

EUT Classification: Mobile Applications

Voltage	Temperature (°C)	Center Frequency (MHz)	Delta (Hz)	ppm
+13.5 Vdc	-33	896.0122339	-266.12	-0.297
	-30	896.0123038	-196.23	-0.219
	-20	896.0124943	-5.65	-0.006
	-10	896.0123471	-152.87	-0.171
	+0	896.0123695	-130.47	-0.146
	+10	896.0124066	-93.39	-0.104
	+20	896.0123474	-152.59	-0.170
11.48 Vdc	+20	896.0123398	-160.17	-0.179
15.53 Vdc	+20	896.012336	-164.03	-0.183
13.5 Vdc	+30	896.0121837	-316.27	-0.353
	+40	896.0120967	-403.32	-0.450
	+50	896.0120893	-410.72	-0.458
Maximum Frequency Drift with respect to the nominal frequency		-410.72 Hz to -5.65 Hz -0.458 ppm / -0.006 ppm		

Limits

§ 90.213 (a) Frequency stability

(a) Unless noted elsewhere, transmitters used in the services governed by this part must have a minimum frequency stability as specified in the following table.

MINIMUM FREQUENCY STABILITY [Parts per million (ppm)]

Frequency Range (MHz)	Fixed and Base Stations (ppm)	Mobile Stations (ppm)	
		Over 2 watts output power	2 watts or less output power
896 - 901	±0.1	±1.5	±1.5
935 - 940	±0.1	±1.5	±1.5

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

TABLE OF RESULTS Frequency Stability – Channel Measured 930.5 MHz

Voltage	Temperature (°C)	Center Frequency (MHz)	Delta (Hz)	ppm
+13.5 Vdc	-33	930.49972445	-275.55	-0.296
	-30	930.49979760	-202.40	-0.218
	-20	930.49999599	-4.01	-0.004
	-10	930.49984669	-153.31	-0.165
	+0	930.49986172	-138.28	-0.149
	+10	930.49990581	-94.19	-0.101
	+20	930.49983968	-160.32	-0.172
11.48 Vdc	+20	930.49983367	-166.33	-0.179
15.53 Vdc	+20	930.49982966	-170.34	-0.183
13.5 Vdc	+30	930.49967435	-325.65	-0.350
	+40	930.49958116	-418.84	-0.450
	+50	930.49957515	-424.85	-0.457
Maximum Frequency Drift with respect to the nominal frequency		424.85 Hz to -4.01 Hz -0.457 ppm to -0.004 ppm		

Limits

§ 24.135 Frequency stability

- (a) The frequency stability of the transmitter shall be maintained within \pm 0.0001 percent (± 1 ppm) of the center frequency over a temperature variation of '30° Celsius to +50° Celsius at normal supply voltage, and over a variation in the primary supply voltage of 85 percent to 115 percent of the rated supply voltage at a temperature of 20° Celsius.
- (b) For battery operated equipment, the equipment tests shall be performed using a new battery without any further requirement to vary supply voltage.
- (c) It is acceptable for a transmitter to meet this frequency stability requirement over a narrower temperature range provided the transmitter ceases to function before it exceeds these frequency stability limits.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Sensus FLXA2D
To: FCC 47 CFR Part(s) 24, 90, 101
Serial #: SNUS10-U1 Rev C
Issue Date: 7th October 2013
Page: 45 of 82

TABLE OF RESULTS Frequency Stability – Channel Measured 959.93125 MHz

Voltage	Temperature (°C)	Center Frequency (MHz)	Delta (Hz)	ppm	%
+13.5 Vdc	-33	959.9309639	-286.1	-0.298	-0.000030
	-30	959.9310379	-212.1	-0.221	-0.000022
	-20	959.931243	-7.0	-0.007	-0.000001
	-10	959.9310795	-170.5	-0.178	-0.000018
	+0	959.9311169	-133.1	-0.139	-0.000014
	+10	959.9311432	-106.8	-0.111	-0.000011
	+20	959.9310856	-164.4	-0.171	-0.000017
11.48 Vdc	+20	959.9310813	-168.7	-0.176	-0.000018
15.53 Vdc	+20	959.9310743	-175.7	-0.183	-0.000018
13.5 Vdc	+30	959.9309121	-337.9	-0.352	-0.000035
	+40	959.930817	-433.0	-0.451	-0.000045
	+50	959.9308098	-440.2	-0.459	-0.000046
Maximum Frequency Drift with respect to the nominal frequency		-440.92 Hz to -7.00 Hz -0.459 ppm / -0.007 ppm			

§ 101.107 Frequency tolerance.

(a) The carrier frequency of each transmitter authorized in these services must be maintained within the following percentage of the reference frequency except as otherwise provided in paragraph (b) of this section or in the applicable subpart of this part (unless otherwise specified in the instrument of station authorization the reference frequency will be deemed to be the assigned frequency):

Frequency Tolerance (percent)

Frequency Range (MHz)	Frequency Tolerance (%)
928 - 929.5	0.0005
932 - 932.5	0.00015
932.5 - 935	0.00025
941 - 941.5	0.00015
941.5 TO 944	0.00025

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Sensus FLXA2D
To: FCC 47 CFR Part(s) 24, 90, 101
Serial #: SNUS10-U1 Rev C
Issue Date: 7th October 2013
Page: 46 of 82

Laboratory Uncertainty for Frequency Measurements

Measurement uncertainty (dB)	±0.86ppm
------------------------------	----------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-02 'Frequency Measurement'	0075, 0156, 0193, 0252, 0313, 0314

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.4. Spurious Emissions from Antenna Terminals

FCC 47 CFR Part 24 Subpart 24.133 a(1), a(2)

FCC 47 CFR Part 90 Subpart 90.210 (j)

FCC 47 CFR Part 101 Subpart 101.111 a(6)

IC RSS-134 6.3 (i), (ii)

IC RSS-119 5.8.6

Test Procedure

The transmitter output was connected to a spectrum analyzer and the Spurious Emissions were measured using an un-modulated carrier.

Spurious Emissions were measured under ambient conditions, nominal voltage for all rule parts on low and high channels for the particular frequency band.

The limit line was calculated from the attenuation characteristics found within each rule part.

Test Set-up is shown in Section 3.6 Test Configuration

Ambient conditions.

Temperature: **17 to 23 °C** Relative humidity: **31 to 57 %** Pressure: **999 to 1012 mbar**

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Sensus FLXA2D
To: FCC 47 CFR Part(s) 24, 90, 101
Serial #: SNUS10-U1 Rev C
Issue Date: 7th October 2013
Page: 48 of 82


PART 24 RESULTS

Part 24.133 Measurement Results

Channel Centre Frequency (MHz)	Start Frequency (MHz)	Stop Frequency (MHz)	Maximum Emission Observed (dBm)	Limit (dBm)	Margin (dB)
901.9875	30	1,000	-40.74	-13.0	-27.74
	1,000	10,000	-22.62		-9.62
930.5000	30	1,000	-42.14	-13.0	-29.14
	1,000	10,000	-24.14		-11.14

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Channel 901.9875 MHz-Conducted Spurious Emissions from Antenna Port 0.03–1 GHz

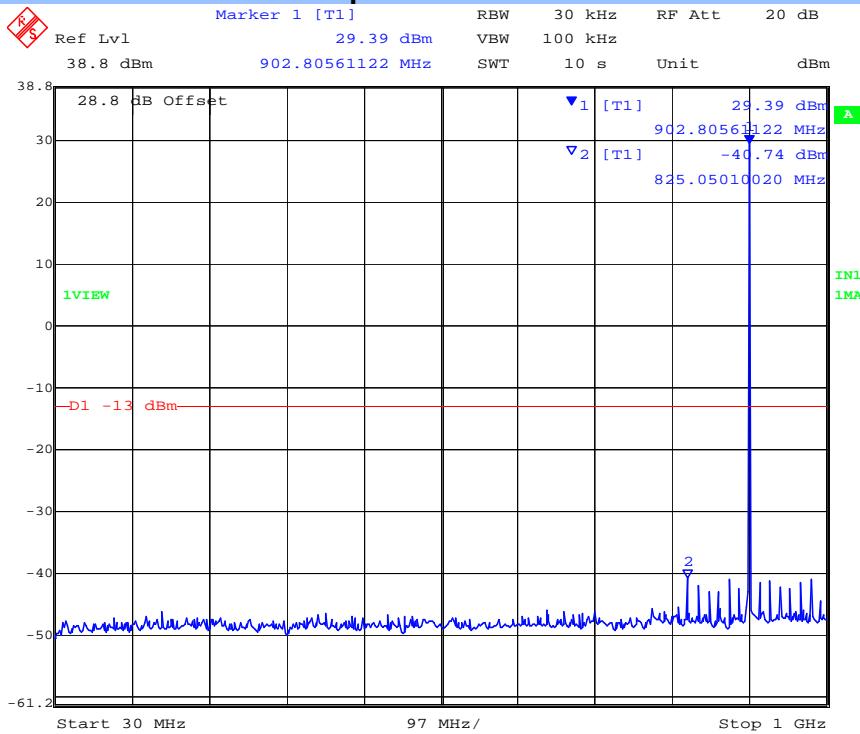


Channel 901.9875 MHz-Conducted Spurious Emissions from Antenna Port 1–10 GHz




This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Channel 930.5 MHz-Conducted Spurious Emissions from Antenna Port 0.03–1 GHz

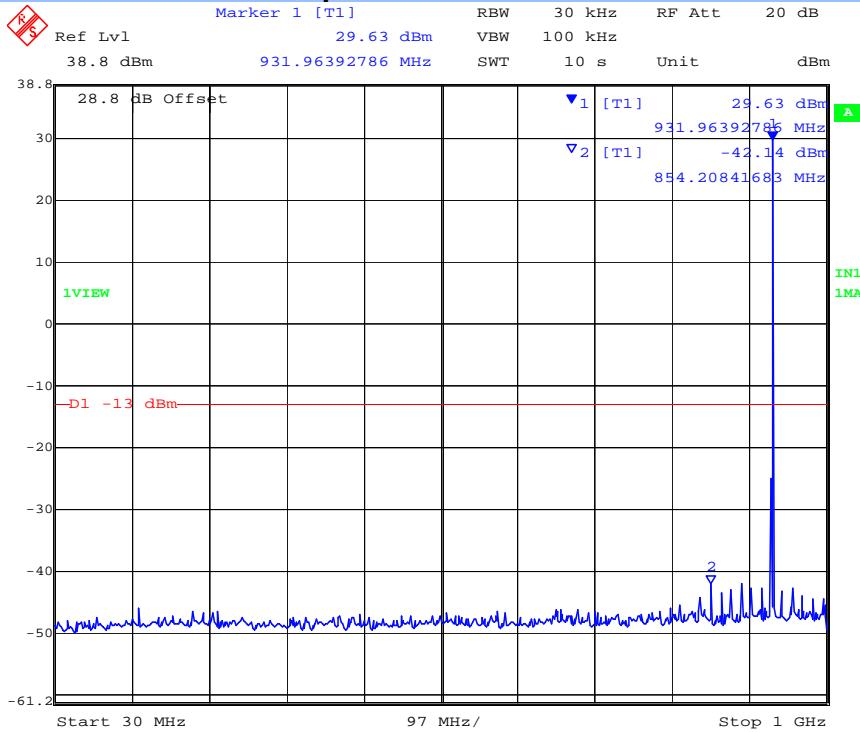

Channel 930.5 MHz-Conducted Spurious Emissions from Antenna Port 1-10 GHz

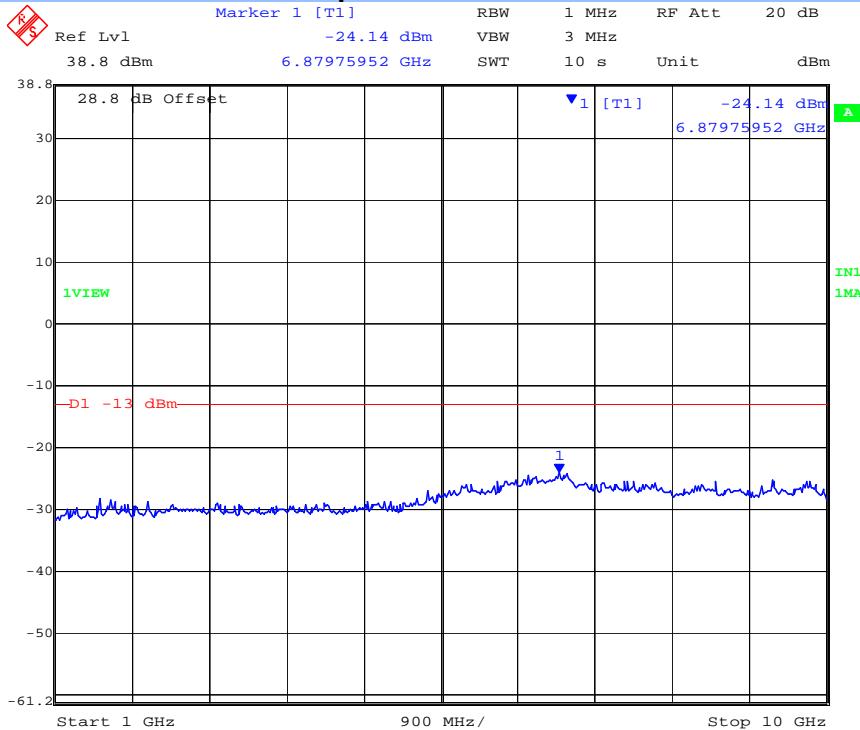

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Sensus FLXA2D
To: FCC 47 CFR Part(s) 24, 90, 101
Serial #: SNUS10-U1 Rev C
Issue Date: 7th October 2013
Page: 51 of 82


PART 90 RESULTS

Part 90.210 j Measurement Results – Conducted Spurious Emissions


Channel Centre Frequency (MHz)	Start Frequency (MHz)	Stop Frequency (MHz)	Maximum Emission Observed (dBm)	Limit (dBm)	Margin (dB)
896.0375	30	1,000	-41.82	-20	-21.82
	1,000	10,000	-34.14		-14.14
935.0125	30	1,000	-41.53	-20	-21.53
	1,000	10,000	-31.55		-11.55

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Channel 896.0375 MHz-Conducted Spurious Emissions from Antenna Port 0.03–1 GHz

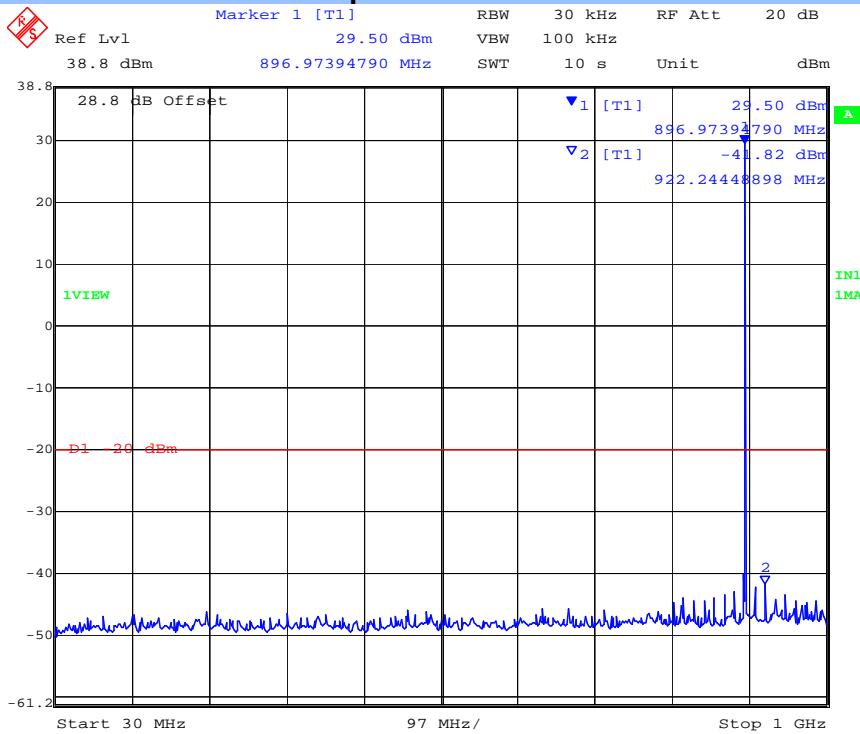


Channel 896.0375 MHz-Conducted Spurious Emissions from Antenna Port 1–10 GHz

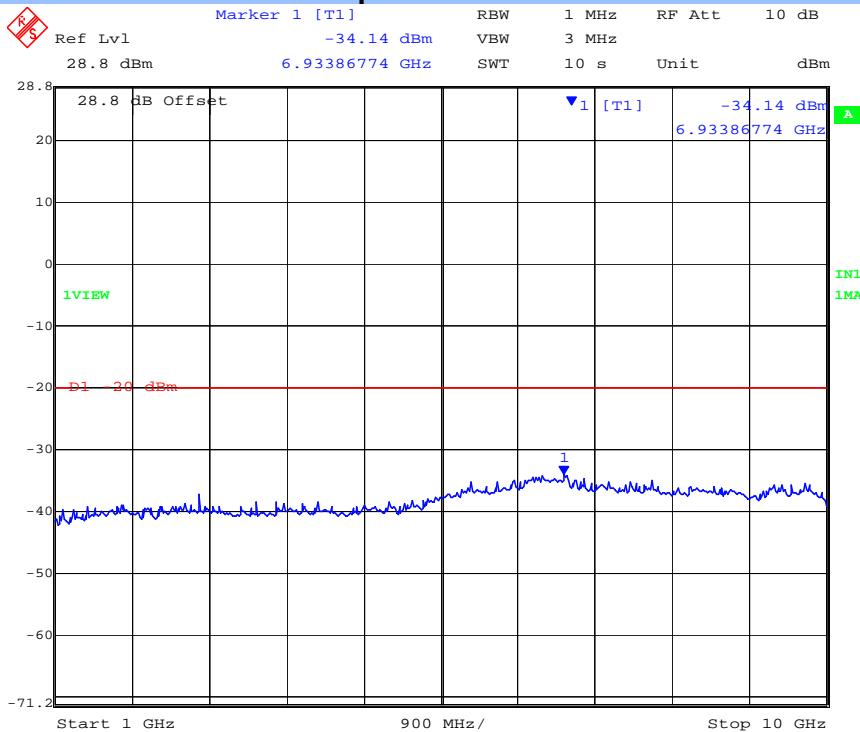


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Channel 935.0125 MHz-Conducted Spurious Emissions from Antenna Port 0.03–1 GHz

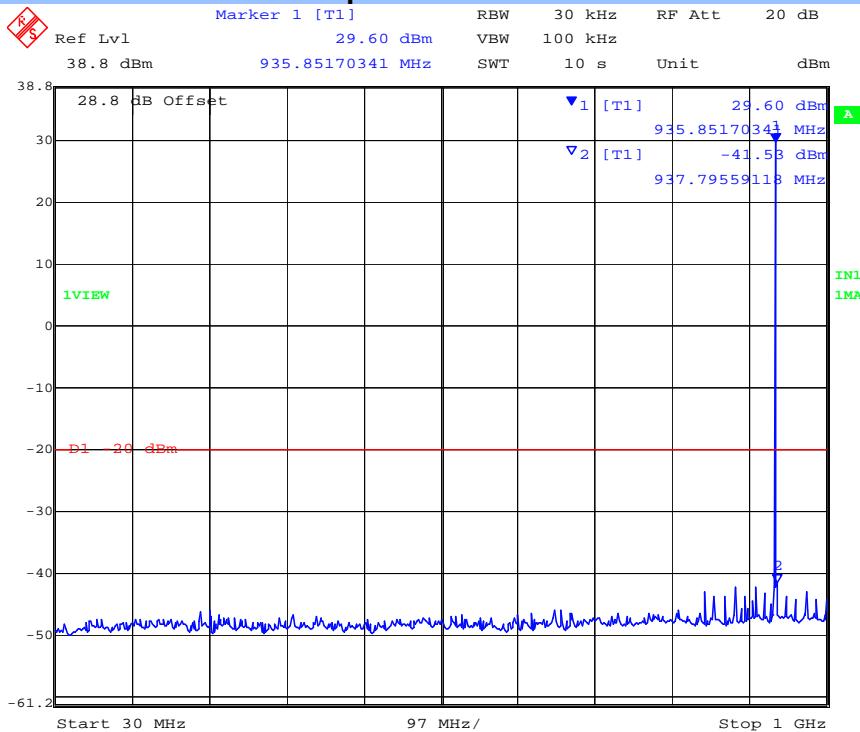

Channel 935.0125 MHz-Conducted Spurious Emissions from Antenna Port 1-10 GHz

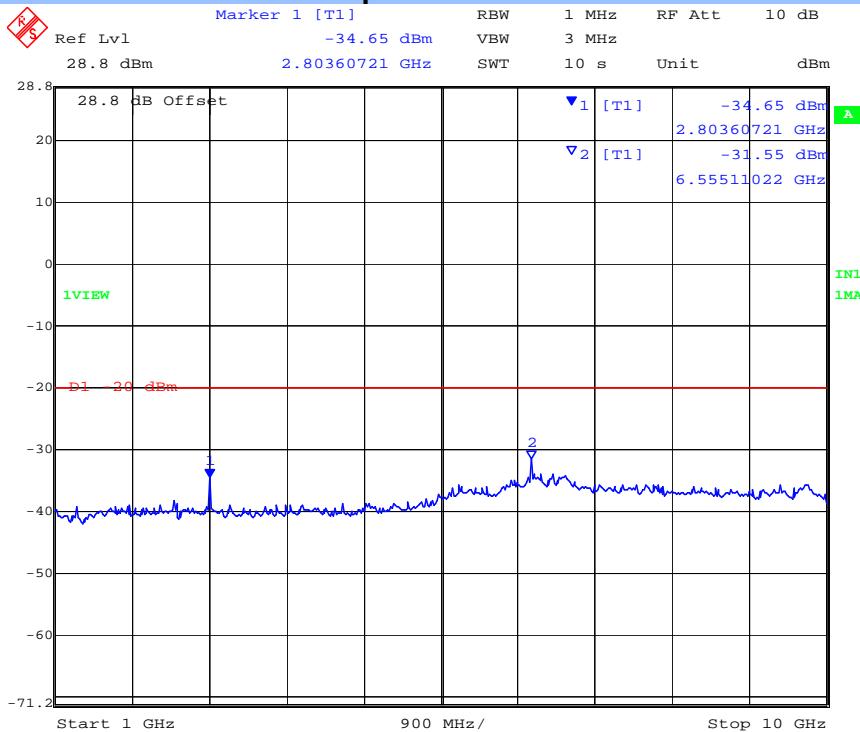

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Sensus FLXA2D
To: FCC 47 CFR Part(s) 24, 90, 101
Serial #: SNUS10-U1 Rev C
Issue Date: 7th October 2013
Page: 54 of 82


PART 101 RESULTS

Part 101.111 a(6) Measurement Results – Conducted Spurious Emissions


Channel Centre Frequency (MHz)	Start Frequency (MHz)	Stop Frequency (MHz)	Maximum Emission Observed (dBm)	Limit (dBm)	Margin (dB)
928.9250	30	1,000	-41.57	-13.0	-28.57
	1,000	10,000	-22.92		-9.92
932.2500	30	1,000	-42.31	-13.0	-29.31
	1,000	10,000	-24.28		-11.28
941.4875	30	1,000	-43.42	-13.0	-30.42
	1,000	10,000	-23.13		-10.13
959.9250	30	1,000	-43.78	-13.0	-30.78
	1,000	10,000	-30.71		-17.71

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Channel 928.925 MHz—Conducted Spurious Emissions from Antenna Port 0.03–1 GHz

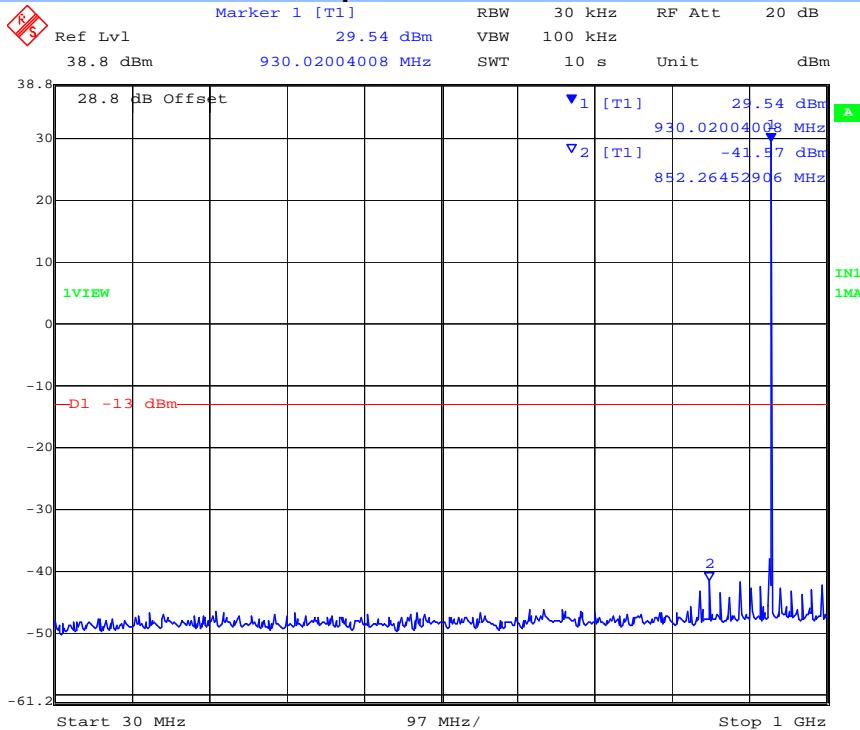


Channel 928.925 MHz—Conducted Spurious Emissions from Antenna Port 1–10 GHz

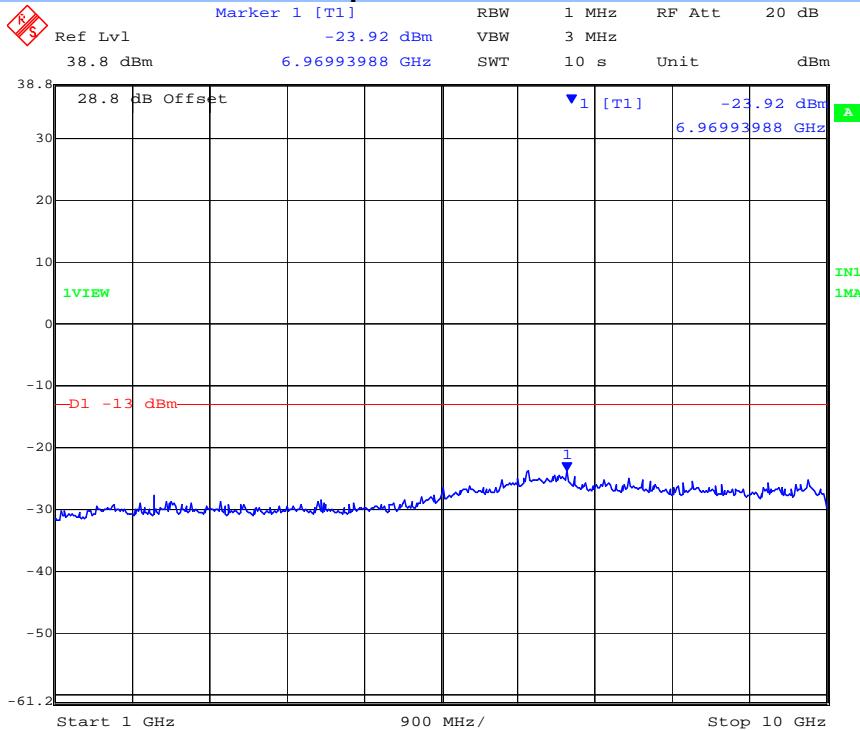


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Channel 932.25 MHz-Conducted Spurious Emissions from Antenna Port 0.03-1 GHz

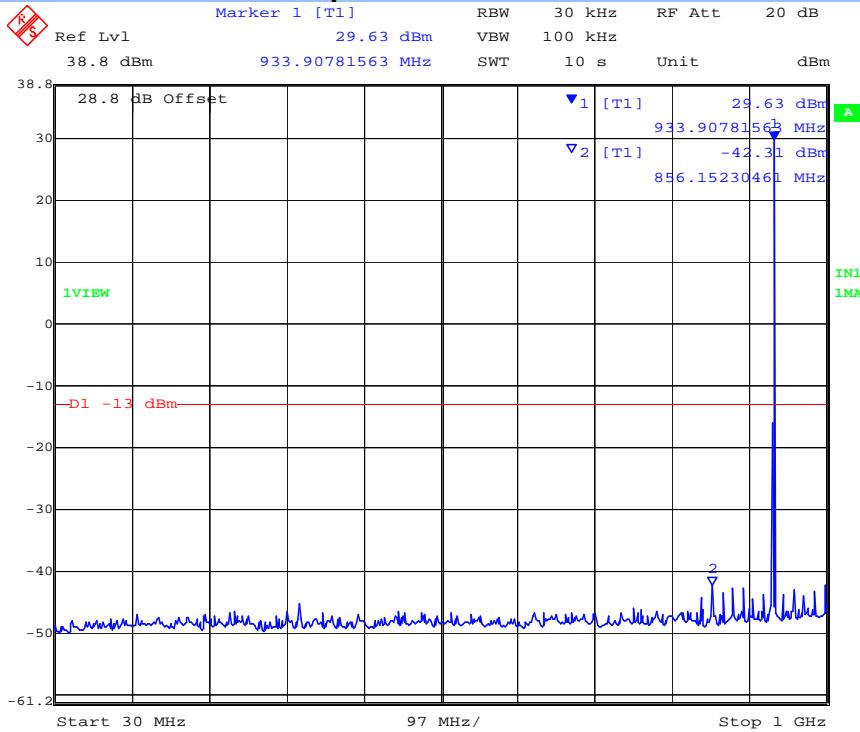


Channel 932.25 MHz-Conducted Spurious Emissions from Antenna Port 1-10 GHz

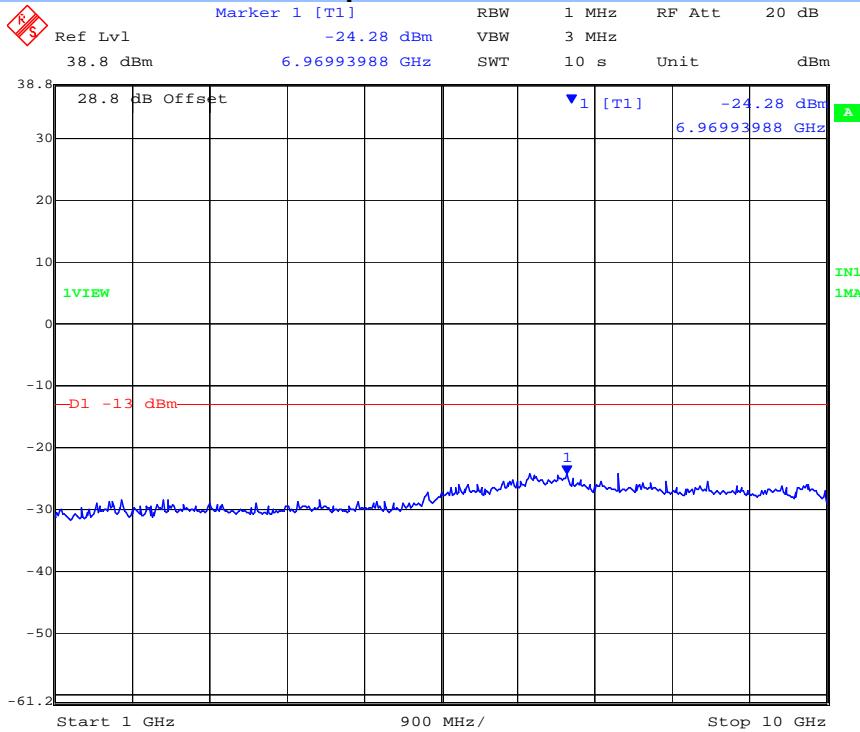


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Channel 941.4875 MHz-Conducted Spurious Emissions from Antenna Port 0.03–1 GHz

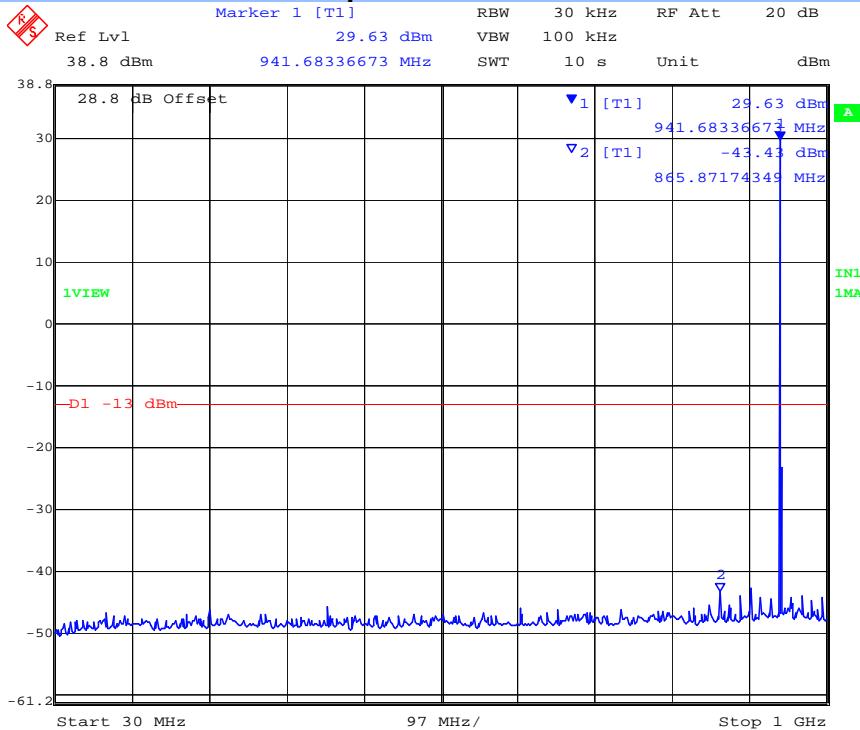


Channel 941.4875 MHz-Conducted Spurious Emissions from Antenna Port 1-10 GHz

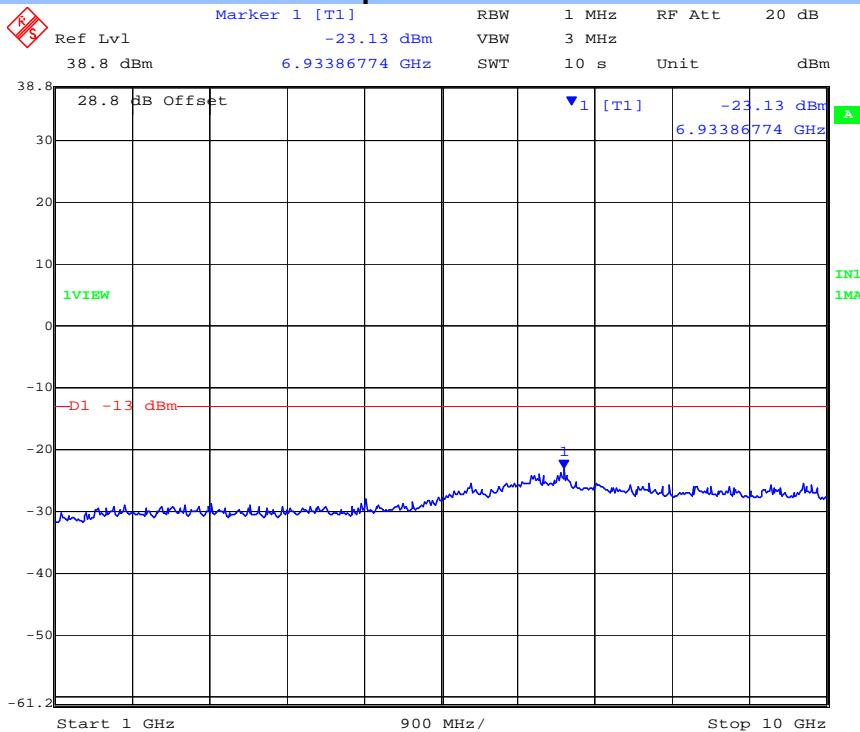


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Channel 959.925 MHz-Conducted Spurious Emissions from Antenna Port 0.03–1 GHz

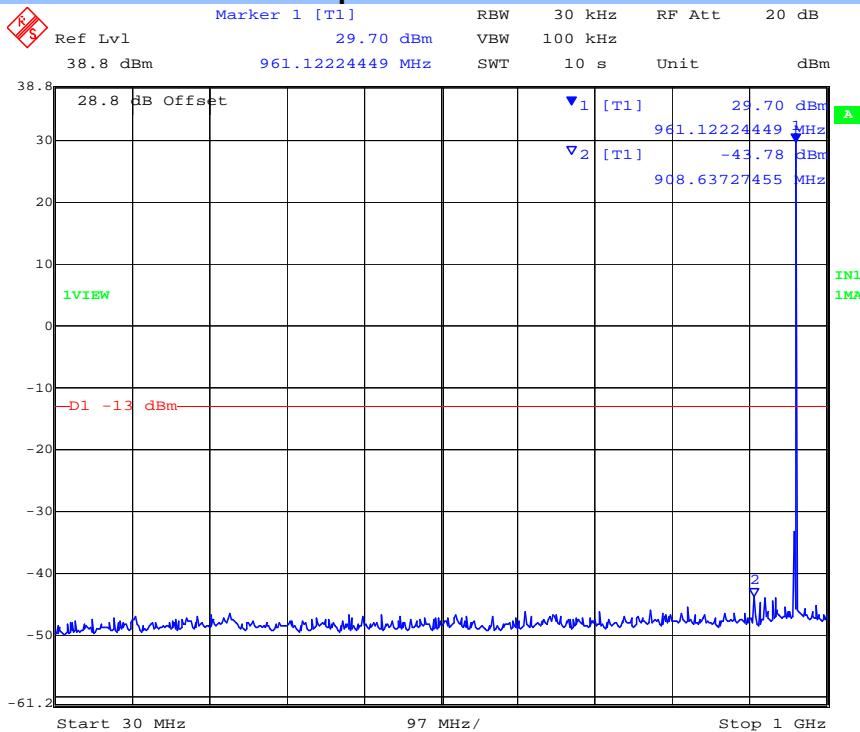

Channel 959.925 MHz-Conducted Spurious Emissions from Antenna Port 1-10 GHz

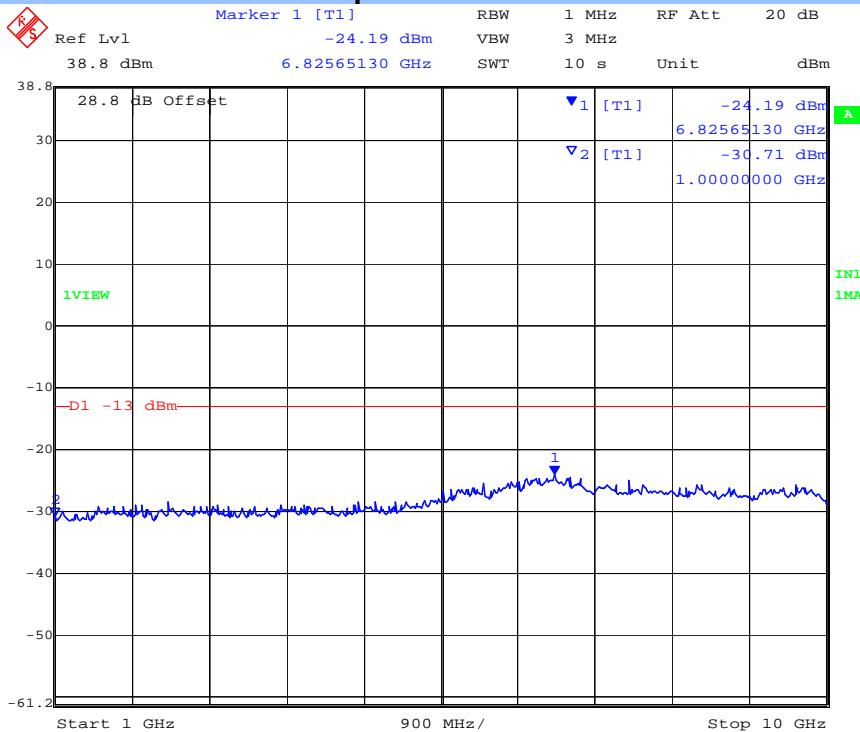

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Sensus FLXA2D
To: FCC 47 CFR Part(s) 24, 90, 101
Serial #: SNUS10-U1 Rev C
Issue Date: 7th October 2013
Page: 59 of 82

Laboratory Measurement Uncertainty for Power Measurement

Measurement uncertainty	±1.33 dB
-------------------------	----------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of RF Output Power'	0070, 0116, 0158, 0193, 0252, 0313, 0314.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.5. Maximum Permissible Exposure

FCC, Part 1 Subpart §1.1310

IC RSS-Gen 5.5

Calculations for Maximum Permissible Exposure Levels

$$\text{Power Density} = P_d \text{ (mW/cm}^2\text{)} = \text{EIRP}/(4\pi d^2)$$

$$\text{EIRP} = P * G$$

P = Peak output power (mW)

G = Antenna numeric gain (numeric)

d = Separation distance (cm)

$$\text{Numeric Gain} = 10 ^ {(G \text{ (dB)} / 10)}$$

The calculated power density at 20cm is:-

Because the EUT belongs to the General Population/Uncontrolled Exposure the limit of power density is f/1500 (where f = 896 MHz) = 0.6 mW/cm²

Freq. Band (GHz)	Antenna Gain (dBi)	Numeric Gain (numeric)	Max Peak Output Power (dBm)	Peak Output Power (mW)	Calculated Power Density (mW/cm ²)@ 20 cm	Power Density Limit (mW/cm ²)
900	0.0	1.0	+29.99	997.7	0.198	0.6

*Note: for mobile or fixed location transmitters the minimum separation distance is 20cm, even if the calculations indicate the MPE distance to be lower.

Specification

Maximum Permissible Exposure Limits

§1.1310 Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency levels in excess of the Commission's guidelines. See §1.1307 (b)(1) of this chapter.

Limit = 0.6 mW / cm² from 1.310 Table 1

Note: for mobile or fixed location transmitters the minimum separation distance is 20cm, even if calculations indicate the MPE distance to be less.

Laboratory Measurement Uncertainty for Power Measurements

Measurement uncertainty	±1.33dB
-------------------------	---------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.6. Radiated Spurious Emissions

5.1.6.1. Transmitter Radiated Emissions above 1 GHz

FCC 47 CFR Part 24 Subpart 24.133 a(1), a(2)

FCC 47 CFR Part 90 Subpart 90.210 (j)

FCC 47 CFR Part 101 Subpart 101.111 a(6)

ANSI/TIA-603

IC RSS-134 6.3 (i), (ii)

IC RSS-119 5.8.6

Test Procedure

Test was performed on a CW (continuous) carrier at the maximum allowed output power at the appropriate center frequency. Substitution was performed on any emissions observed within 6 dB of the limit.


The measurement equipment was set to measure in peak hold mode. The emissions were measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode.

The highest emissions relative to the limit are listed for each frequency band measured.

Limit

The worst case limit for all applicable CFR Parts were applied during radiated testing.


Test Measurement Set up

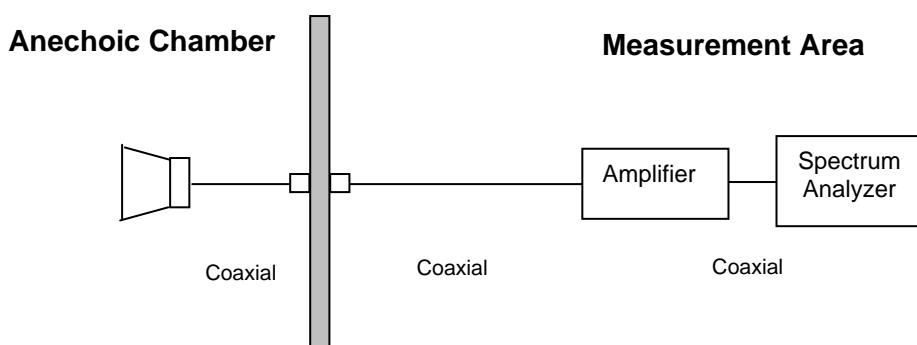

Measurement set up for Radiated Emission Test

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	901.9875 MHz	Engineer	GMH
Variant	Part 24	Temp (°C)	23
Freq. Range	1 - 10 GHz	Rel. Hum. (%)	32
Power Setting	Maximum	Press. (mBars)	1009
Antenna	Antenna Port terminated in 50 Ω	Duty Cycle (%)	100
Test Notes 1	EUT set for CW (single tone) Operation		
Test Notes 2			

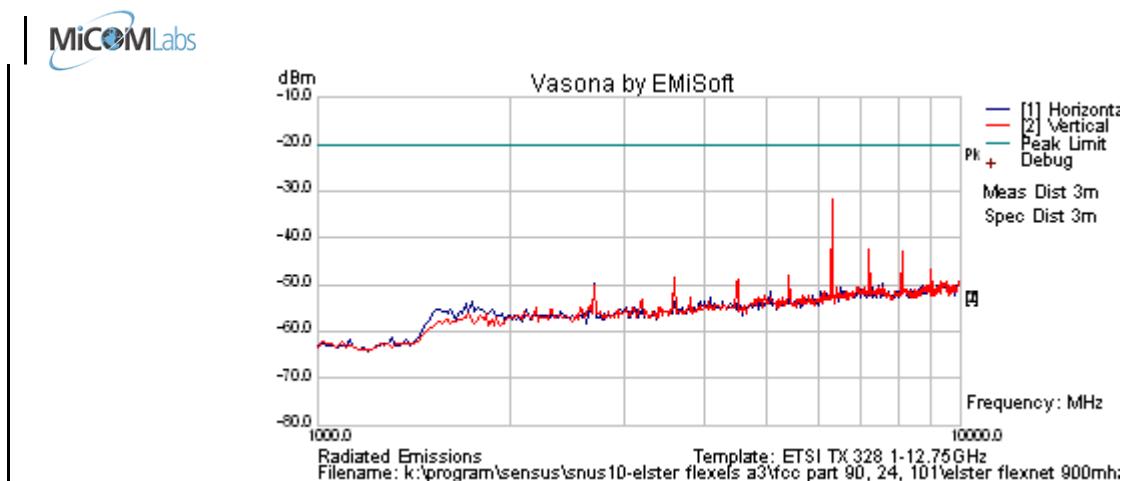


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
Legend:												
TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission NRB = Non-Restricted Band. RB = Restricted Band.												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	930.5 MHz	Engineer	GMH
Variant	Part 24	Temp (°C)	23
Freq. Range	1 - 10 GHz	Rel. Hum.(%)	32
Power Setting	Maximum	Press. (mBars)	1009
Antenna	Antenna Port terminated in 50 Ω	Duty Cycle (%)	100
Test Notes 1	EUT set for CW (single tone) Operation		
Test Notes 2			

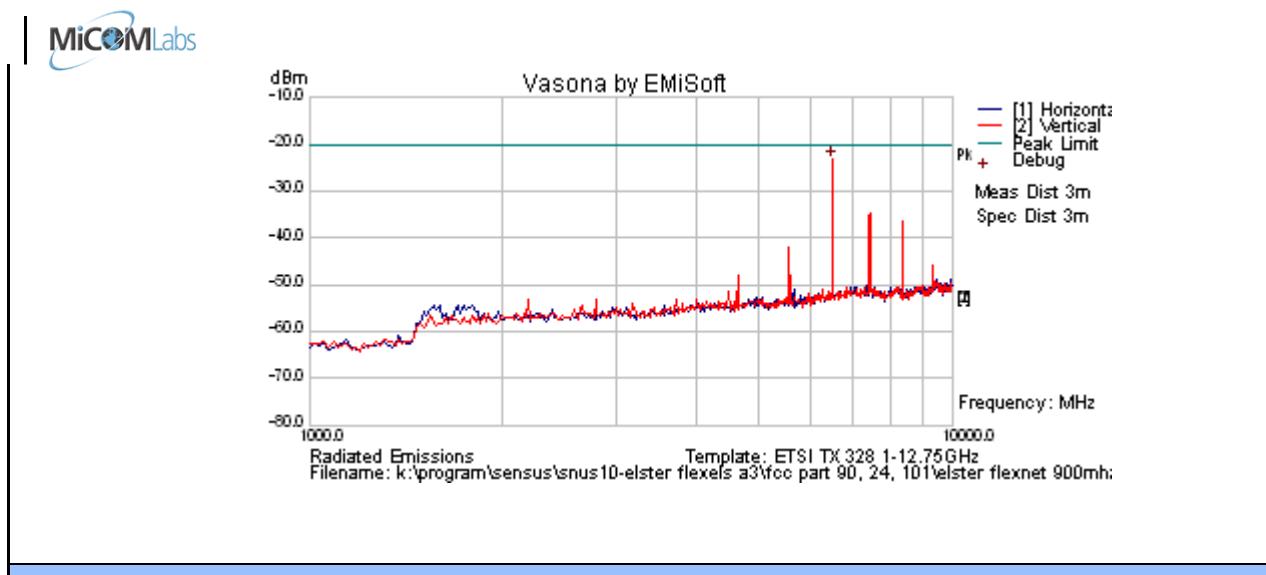


Formally measured emission peaks

Frequency MHz	Raw dBm	Cable Loss	AF dB	Level dBm	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBm	Margin dB	Pass /Fail	Comments
6519.038	-34.6	5.1	6.3	-23.2	Peak [Scan]	V	150	0	-13.0	-10.2	Pass	
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission NRB = Non-Restricted Band. RB = Restricted Band.												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	896.0375 MHz	Engineer	GMH
Variant	Part 90	Temp (°C)	23
Freq. Range	1 - 10 GHz	Rel. Hum.(%)	32
Power Setting	Maximum	Press. (mBars)	1009
Antenna	Antenna Port terminated in 50 Ω	Duty Cycle (%)	100
Test Notes 1	EUT set for CW (single tone) Operation		
Test Notes 2			

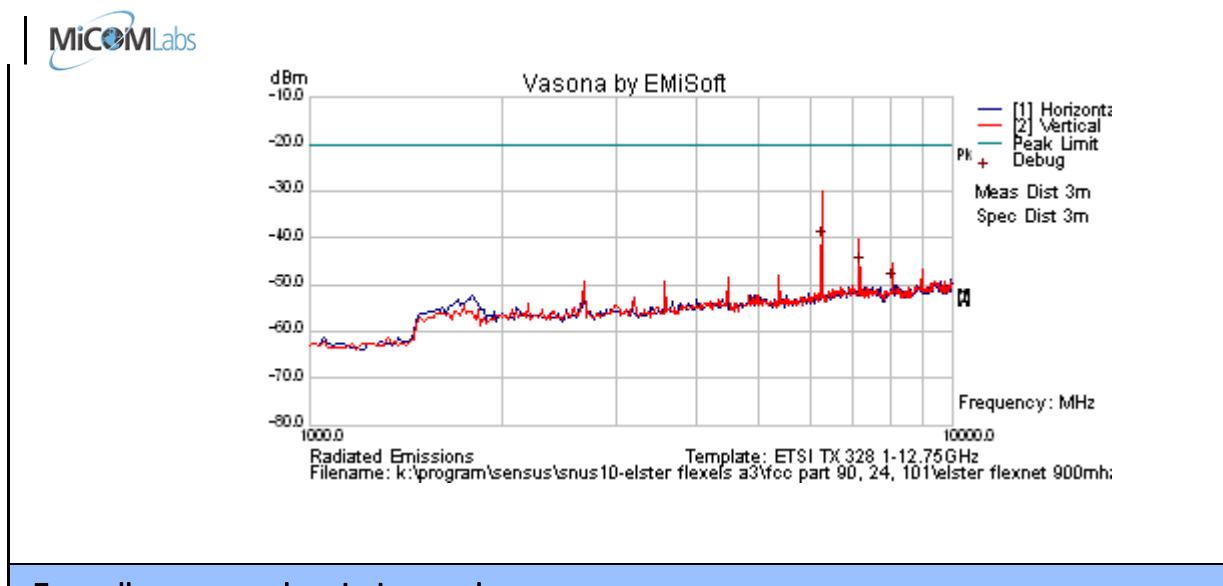


Formally measured emission peaks

Frequency MHz	Raw dBm	Cable Loss	AF dB	Level dBm	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBm	Margin dB	Pass /Fail	Comments
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission NRB = Non-Restricted Band. RB = Restricted Band.												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	935.0125 MHz	Engineer	GMH
Variant	Part 90	Temp (°C)	23
Freq. Range	1 - 10 GHz	Rel. Hum.(%)	32
Power Setting	Maximum	Press. (mBars)	1009
Antenna	Antenna Port terminated in 50 Ω	Duty Cycle (%)	100
Test Notes 1	EUT set for CW (single tone) Operation		
Test Notes 2			

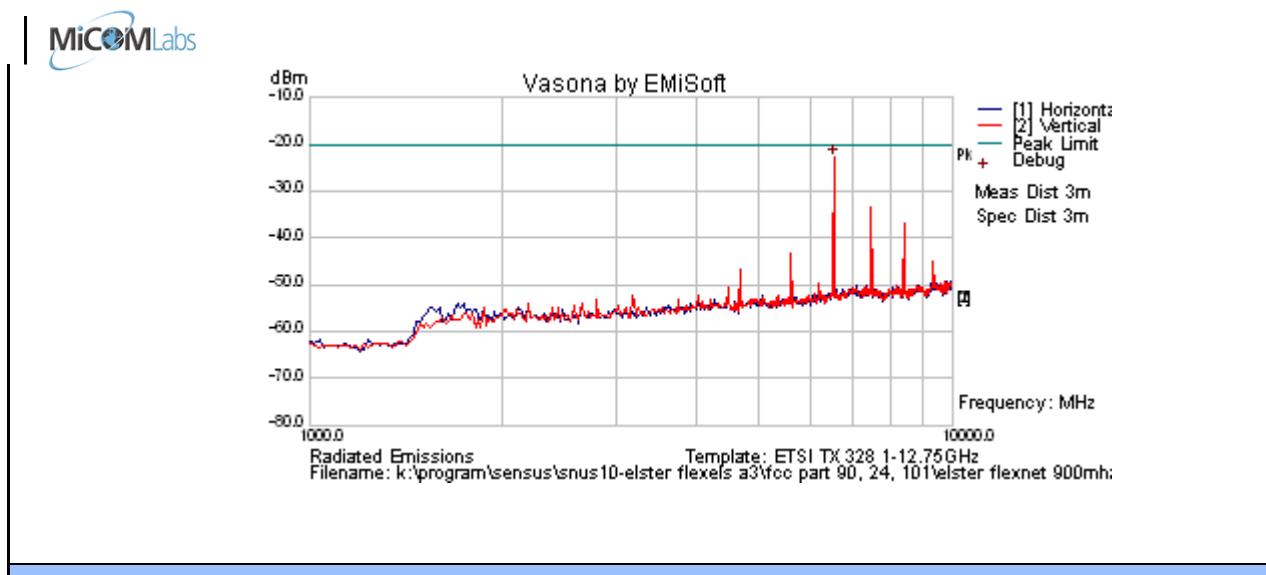


Formally measured emission peaks

Frequency MHz	Raw dBm	Cable Loss	AF dB	Level dBm	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBm	Margin dB	Pass /Fail	Comments
6555.110	-34.2	5.2	6.3	-22.8	Peak [Scan]	V	150	0	-20.0	-2.8	Pass	
Legend:		TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission										
NRB = Non-Restricted Band. RB = Restricted Band.												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	925.925 MHz	Engineer	GMH
Variant	Part 101	Temp (°C)	23
Freq. Range	1 - 10 GHz	Rel. Hum.(%)	32
Power Setting	Maximum	Press. (mBars)	1009
Antenna	Antenna Port terminated in 50 Ω	Duty Cycle (%)	100
Test Notes 1	EUT set for CW (single tone) Operation		
Test Notes 2			

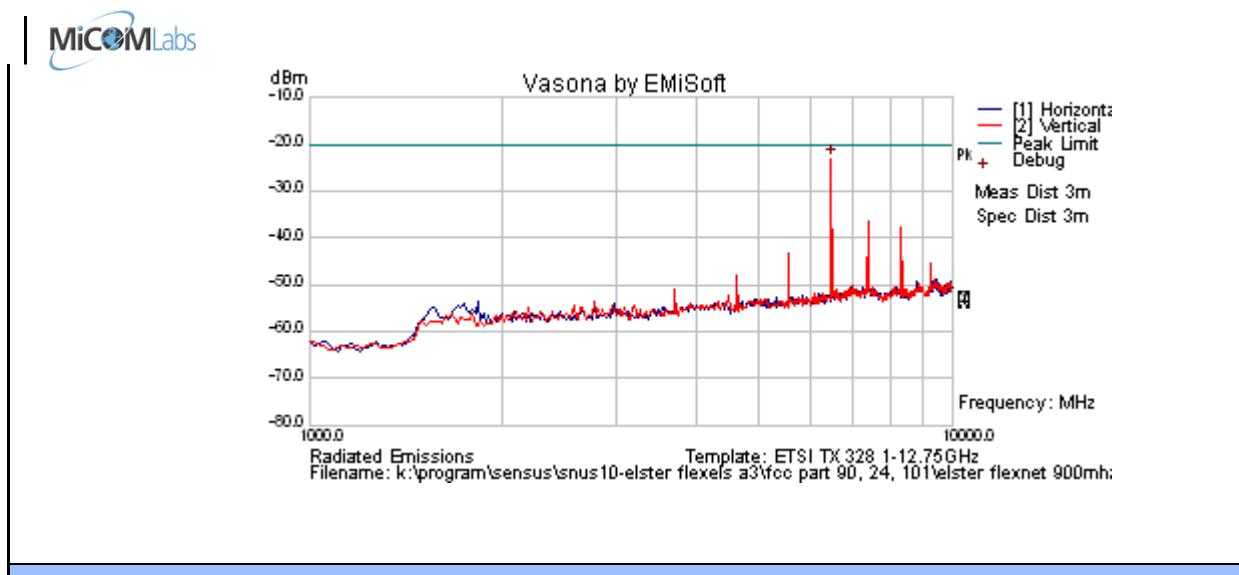


Formally measured emission peaks

Frequency MHz	Raw dBm	Cable Loss	AF dB	Level dBm	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBm	Margin dB	Pass /Fail	Comments
6482.966	-34.6	5.1	6.4	-23.0	Peak [Scan]	V	150	0	-13.0	-10.0	Pass	
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission NRB = Non-Restricted Band. RB = Restricted Band.												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	932.25 MHz	Engineer	GMH
Variant	Part 101	Temp (°C)	23
Freq. Range	1 - 10 GHz	Rel. Hum.(%)	32
Power Setting	Maximum	Press. (mBars)	1009
Antenna	Antenna Port terminated in 50 Ω	Duty Cycle (%)	100
Test Notes 1	EUT set for CW (single tone) Operation		
Test Notes 2			

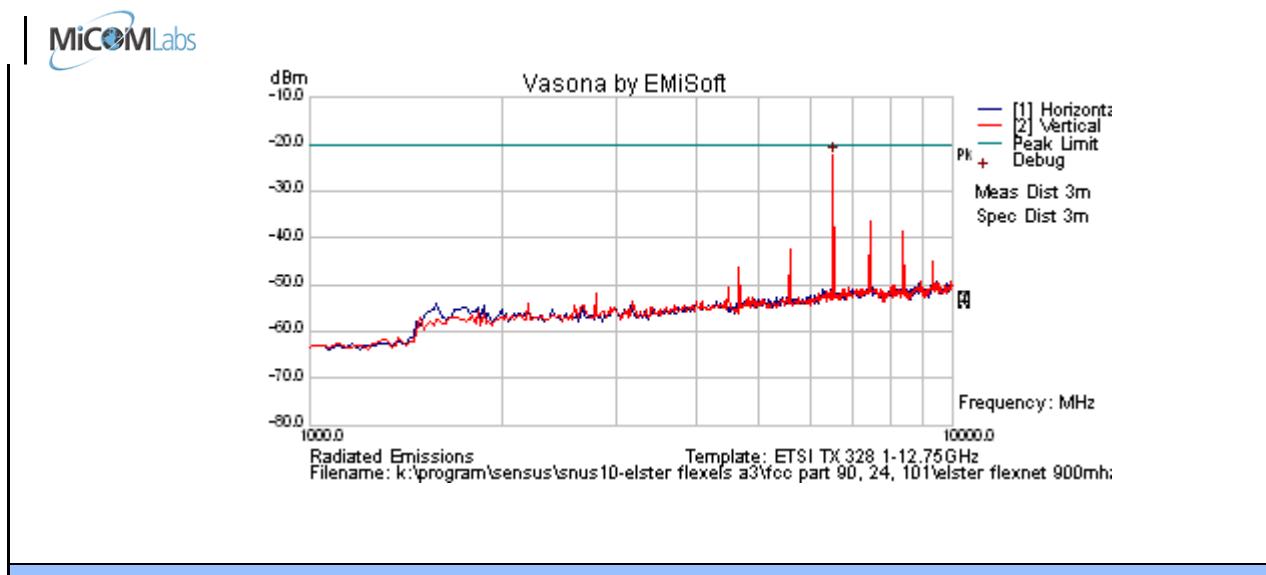


Formally measured emission peaks

Frequency MHz	Raw dBm	Cable Loss	AF dB	Level dBm	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBm	Margin dB	Pass /Fail	Comments
6537.074	-34.0	5.2	6.4	-22.5	Peak [Scan]	V	150	0	-13.0	-9.5	Pass	
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission NRB = Non-Restricted Band. RB = Restricted Band.												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	941.4875 MHz	Engineer	GMH
Variant	Part 101	Temp (°C)	23
Freq. Range	1 - 10 GHz	Rel. Hum.(%)	32
Power Setting	Maximum	Press. (mBars)	1009
Antenna	Antenna Port terminated in 50 Ω	Duty Cycle (%)	100
Test Notes 1	EUT set for CW (single tone) Operation		
Test Notes 2			

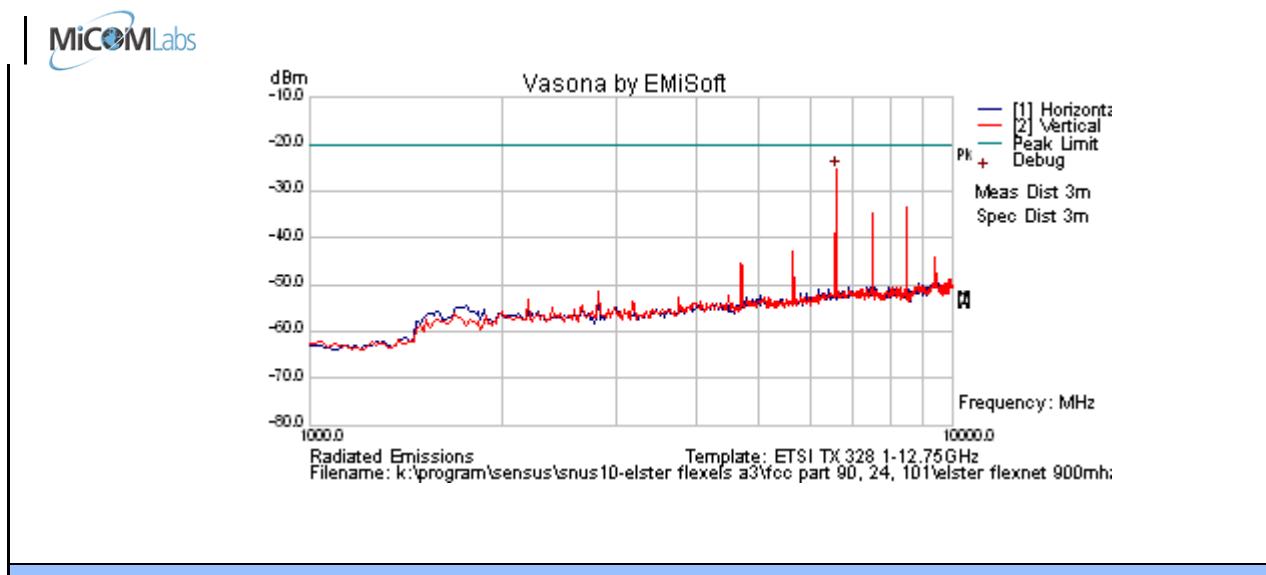


Formally measured emission peaks

Frequency MHz	Raw dBm	Cable Loss	AF dB	Level dBm	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBm	Margin dB	Pass /Fail	Comments
6591.182	-37.0	5.2	6.3	-25.5	Peak [Scan]	V	150	0	-13.0	-12.5	Pass	
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission NRB = Non-Restricted Band. RB = Restricted Band.												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	959.925 MHz	Engineer	GMH
Variant	Part 101	Temp (°C)	23
Freq. Range	1 - 10 GHz	Rel. Hum. (%)	32
Power Setting	Maximum	Press. (mBars)	1009
Antenna	Antenna Port terminated in 50 Ω	Duty Cycle (%)	100
Test Notes 1	EUT set for CW (single tone) Operation		
Test Notes 2			

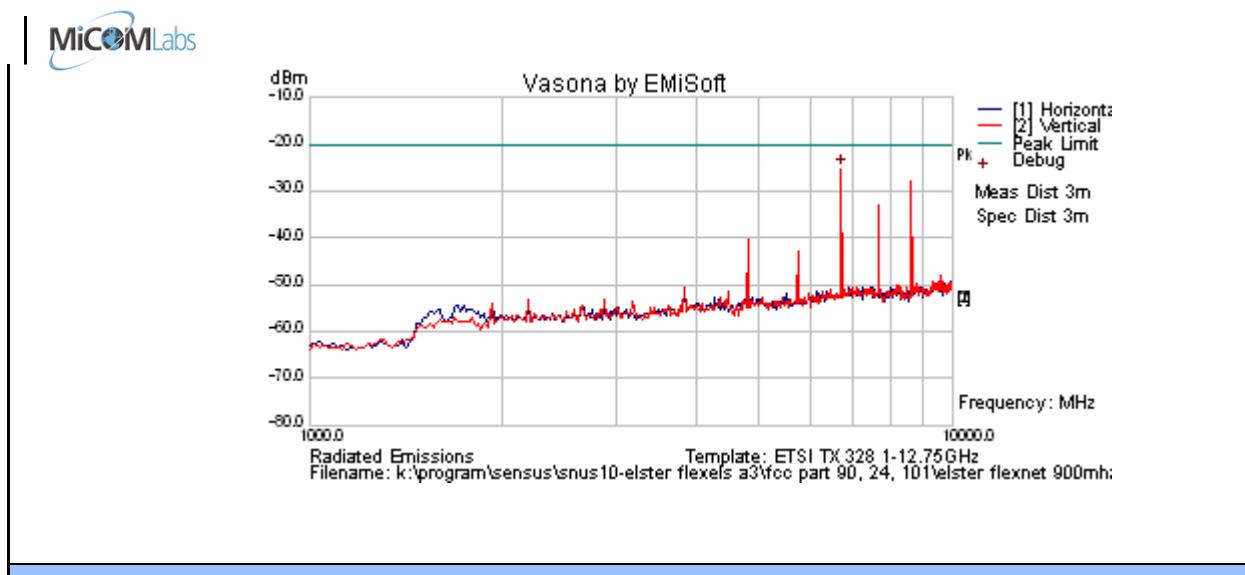

Formally measured emission peaks

Frequency MHz	Raw dBm	Cable Loss	AF dB	Level dBm	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBm	Margin dB	Pass /Fail	Comments
6717.435	-37.3	5.2	6.9	-25.1	Peak [Scan]	V	150	0	-13.0	-12.1	Pass	
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission NRB = Non-Restricted Band. RB = Restricted Band.												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Sensus FLXA2D
To: FCC 47 CFR Part(s) 24, 90, 101
Serial #: SNUS10-U1 Rev C
Issue Date: 7th October 2013
Page: 70 of 82

Laboratory Measurement Uncertainty for Radiated Emissions

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions'	0088, 0104, 0158, 0134, 0310, 0312, Dipole.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.6.2. Transmitter Radiated Spurious Emissions (30M-1 GHz)


FCC, Part 15 Subpart C §15.205/ §15.209
Industry Canada RSS-111 §4.4

RSS Gen 6

Test Procedure

Preliminary radiated emissions were measured in the anechoic chamber at a 10-meter distance on every azimuth in both horizontal and vertical polarity. The emissions are recorded with a spectrum analyzer in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed. The anechoic chamber test set-up is identified in Section 6 Test Set-Up Photographs.

Test Measurement Set up

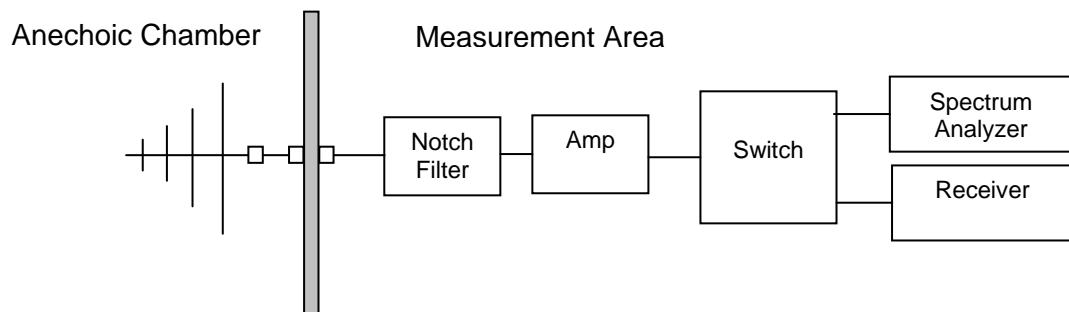

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength

R = Measured Receiver Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL - AG + NFL

CL = Cable Loss

AG = Amplifier Gain



Title: Sensus FLXA2D
To: FCC 47 CFR Part(s) 24, 90, 101
Serial #: SNUS10-U1 Rev C
Issue Date: 7th October 2013
Page: 72 of 82

For example:

Given a Receiver input reading of 51.5dB μ V; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\text{dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log} (\text{level (\mu V/m)})$$

$$40 \text{ dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250\mu\text{V/m}$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Measurement Results for Spurious Emissions (30 MHz – 1 GHz)

Test Freq.	932.25 MHz	Engineer	GMH
Variant	Digital Emissions	Temp (°C)	23
Freq. Range	30 MHz - 1000 MHz	Rel. Hum. (%)	32
Power Setting	Maximum	Press. (mBars)	1009
Antenna	Antenna Port terminated in 50 Ohms		
Test Notes 1	13.5Vdc power supply. + 26 Vdc provided by "The Beast"		
Test Notes 2			



Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
30.207	33.7	3.4	-9.4	27.8	Quasi Max	V	99	291	40	-12.3	Pass	
61.795	59.3	3.8	-	23.6	39.5	Quasi Max	V	98	270	40	-0.5	Pass
87.182	58.8	4.0	-	23.5	39.3	Quasi Max	V	98	269	40	-0.7	Pass
145.535	56.1	4.5	-	18.3	42.3	Quasi Max	V	98	110	43.5	-1.3	Pass
162.709	46.1	4.6	-	18.5	32.2	Quasi Max	H	175	146	43.5	-11.3	Pass
193.610	52.9	4.7	-	18.8	38.8	Quasi Max	H	135	310	43.5	-4.7	Pass
256.070	56.1	5.0	-	18.7	42.4	Quasi Max	H	112	153	46	-3.6	Pass
289.749	52.5	5.2	-	17.1	40.5	Quasi Max	H	98	180	46	-5.5	Pass
Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Specification

Limits

§15.205 (a) Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

§15.205 (a) Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

§15.209 (a) Limit Matrix

Frequency(MHz)	Field Strength (μ V/m)	Field Strength (dB μ V/m)	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Laboratory Measurement Uncertainty for Radiated Emissions

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions'	0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.7. AC Wireline Conducted Emissions (0.15 – 30 MHz)


FCC, Part 15 Subpart C §15.207
Industry Canada RSS-Gen §7.2.2

EUT was dc powered, no test requirement

Test Procedure

The EUT is configured in accordance with ANSI C63.4. The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

Test Measurement Set up

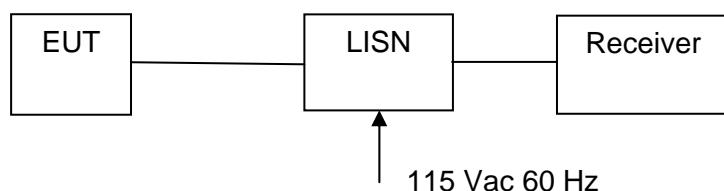

Measurement set up for AC Wireline Conducted Emissions Test

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Specification

Limit

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu\Omega$ line impedance stabilization network (LISN), see §15.207 (a) matrix below. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

§15.207 (a) Limit Matrix

The lower limit applies at the boundary between frequency ranges

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency

Laboratory Measurement Uncertainty for Conducted Emissions

Measurement uncertainty	± 2.64 dB
-------------------------	---------------


Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-EMC-01 'Measurement of Conducted Emissions'	0158, 0184, 0193, 0190, 0293, 0307

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6. TEST SET-UP PHOTOGRAPHS

6.1. General Measurement Test Set-Up

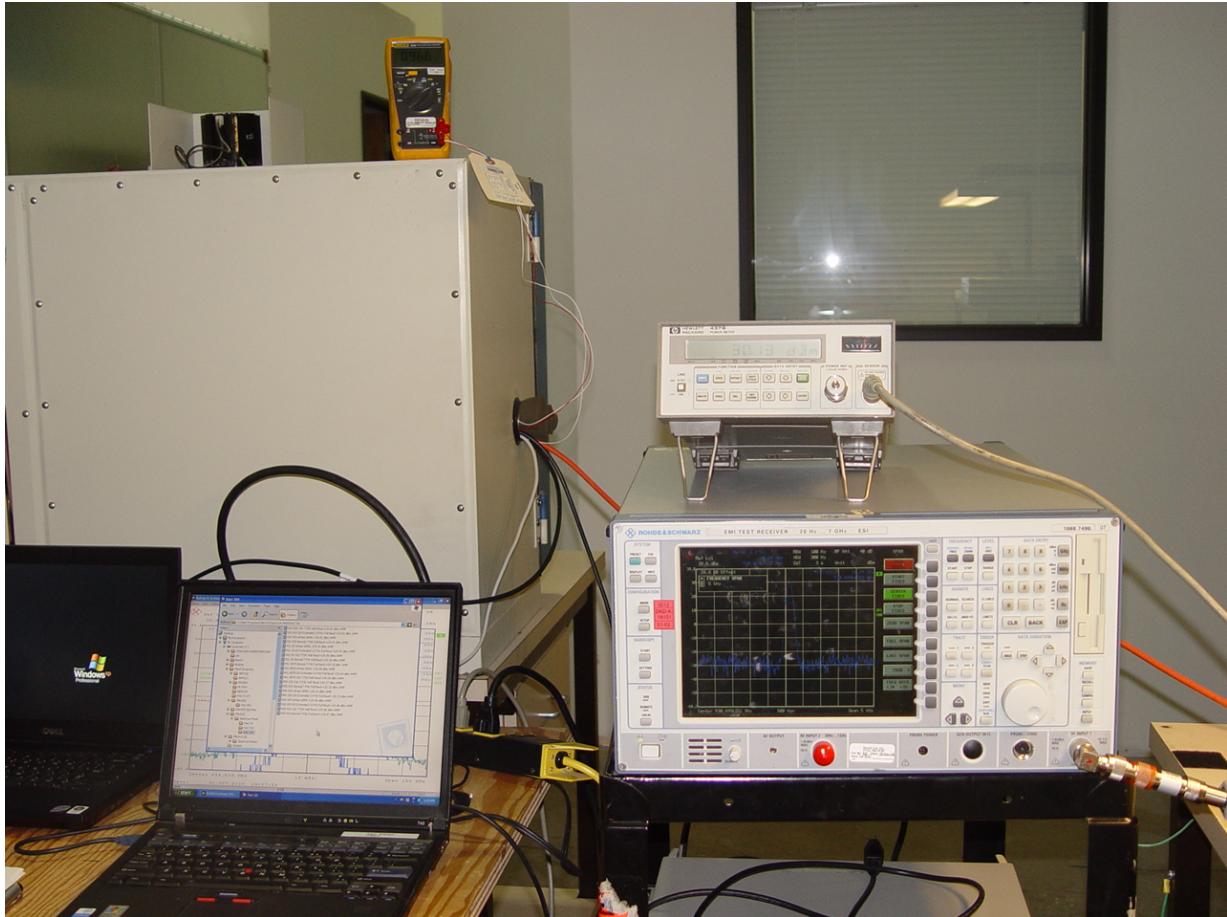


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6.2. General Measurement – Environmental Chamber




This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6.3. Radiated Emissions below 1 GHz

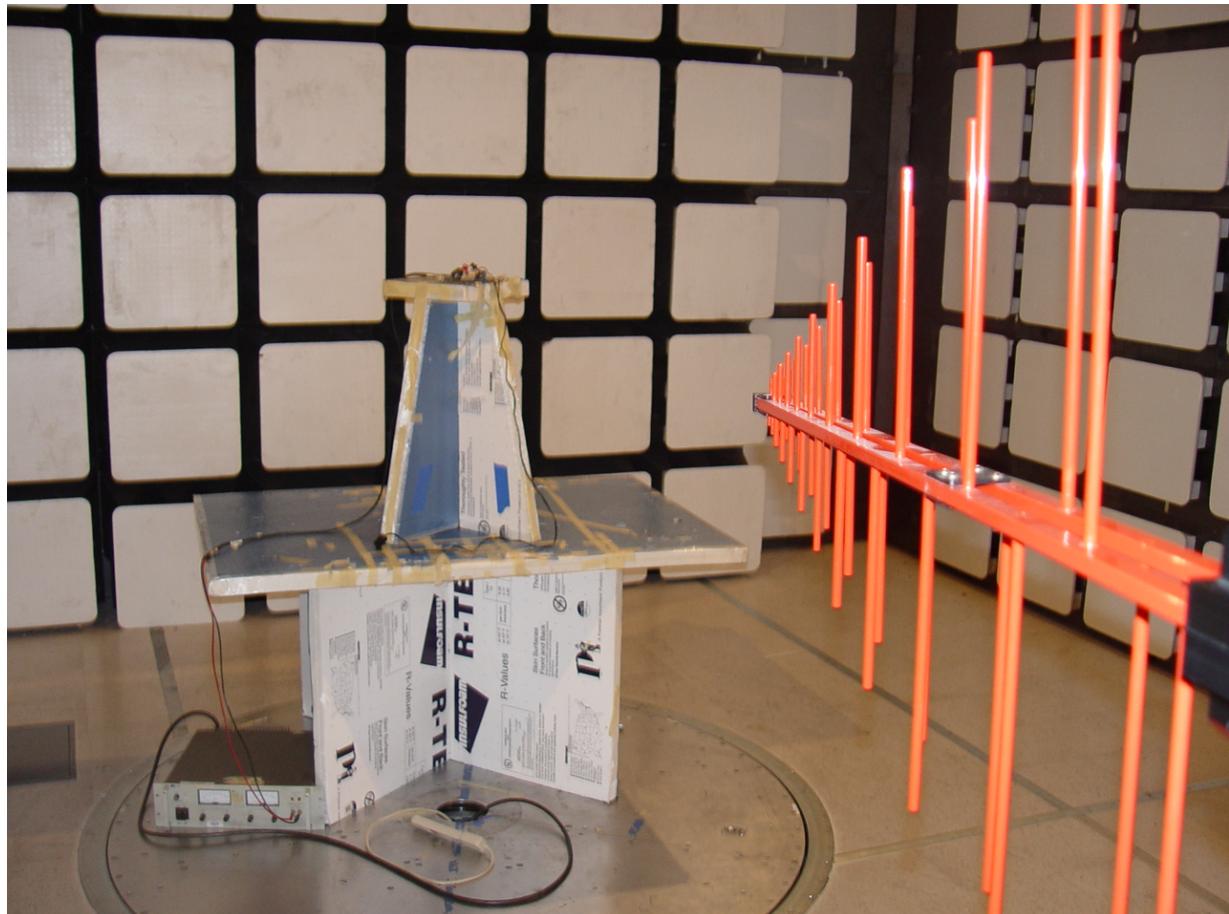

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6.4. Radiated Digital Emissions above 1 GHz

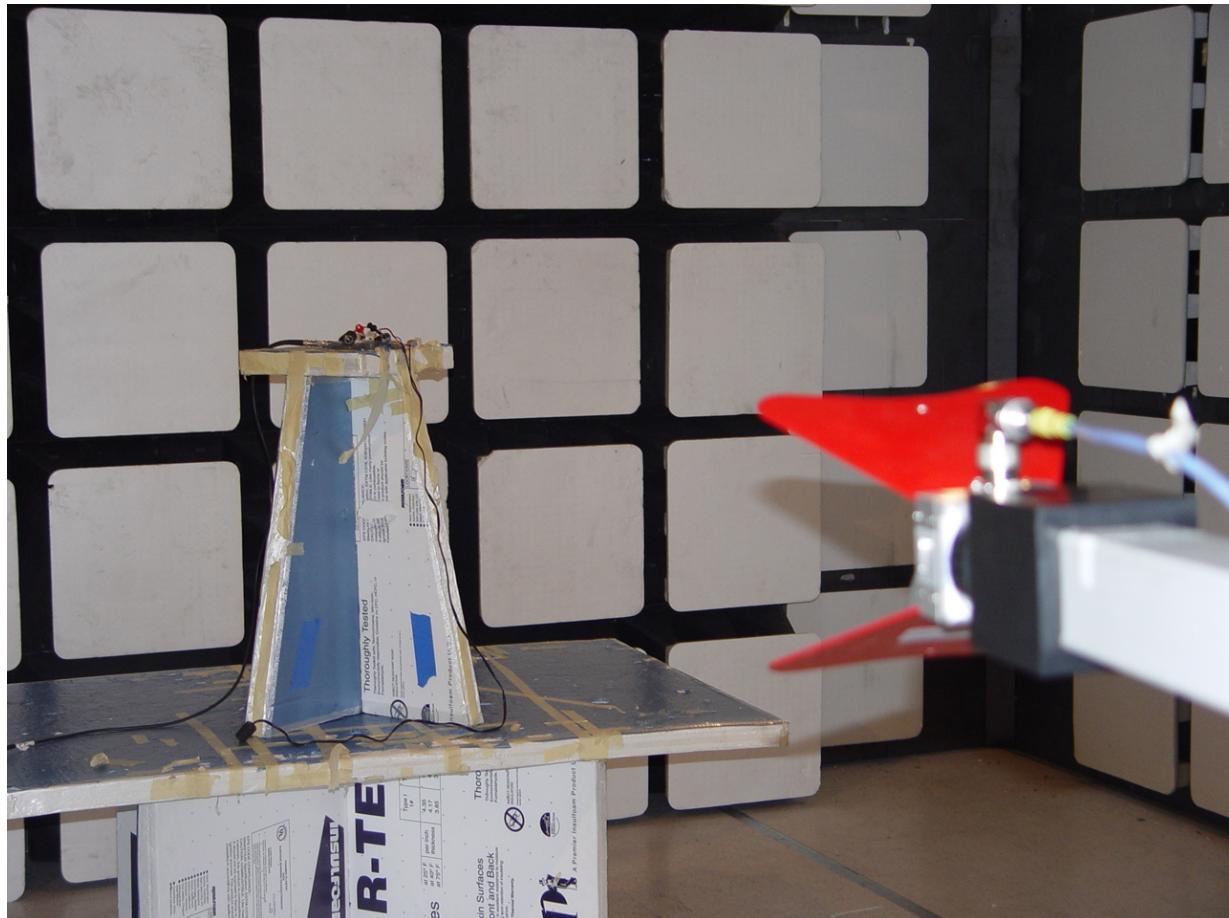

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Sensus FLXA2D
To: FCC 47 CFR Part(s) 24, 90, 101
Serial #: SNUS10-U1 Rev C
Issue Date: 7th October 2013
Page: 81 of 82

7. TEST EQUIPMENT DETAILS

Asset #	Instrument	Manufacturer	Part #	Serial #	Calibration Due Date
0070	Power Meter	Hewlett Packard	437B	3125U11552	28 th Nov 13
0117	Power Sensor	Hewlett Packard	8487D	3318A00371	15 th Nov 13
0223	Power Meter	Hewlett Packard	EPM-442A	US37480256	15 th Nov 13
0374	Power Sensor	Hewlett Packard	8485A	3318A19694	29 th Nov 13
0158	Barometer /Thermometer	Control Co.	4196	E2846	6 th Jan 14
0193	EMI Receiver	Rhode & Schwartz	ESI 7	838496/007	2 nd Dec 13
0193	EMI Receiver	Rhode & Schwartz	ESIB40	100201	16 th Nov 13
0338	30 - 3000 MHz Antenna	Sunol	JB3	A052907	8 th Nov 13
0335	1-18 GHz Horn Antenna	EMCO	3117	00066580	7 th Nov 13
0252	SMA Cable	Megaphase	Sucoflex 104	None	N/A
0293	BNC Cable	Megaphase	1689 1GVT4	15F50B001	N/A
0307	BNC Cable	Megaphase	1689 1GVT4	15F50B002	N/A
0310	2m SMA Cable	Micro-Coax	UFA210A-0-0787-3G03G0	209089-001	N/A
0312	3m SMA Cable	Micro-Coax	UFA210A-1-1181-3G0300	209092-001	N/A
0314	30dB N-Type Attenuator	ARRA	N9444-30	1623	N/A

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



440 Boulder Court, Suite 200
Pleasanton, CA 94566, USA
Tel: 1.925.462.0304
Fax: 1.925.462.0306
www.micomlabs.com