



## C2PC Test Report

**FCC ID: SDBFXZIG210  
IC: 2220A-FXZIG210**

**FCC Rule Part: CFR 47 Part 24 Subpart D, Part 101 Subpart C  
ISED Canada's Radio Standards Specification: RSS-119, RSS-134**

**TÜV SÜD Report Number: RD72144961.100**

**Applicant: Sensus Metering Systems, Inc.  
Model: FXZIG210**

**Test Begin Date: December 27, 2018  
Test End Date: January 9, 2019**

**Report Issue Date: February 4, 2019**



FOR THE SCOPE OF ACCREDITATION UNDER LAB Code AT-1921

This report must not be used by the client to claim product certification, approval, or endorsement by ANAB, ANSI, or any agency of the Federal Government.

**Prepared by:**

A handwritten signature in black ink that appears to read "Benjamin Ford".

**Benjamin Ford  
EMC Technician  
TÜV SÜD America, Inc.**

**Reviewed by:**

A handwritten signature in black ink that appears to read "Randle Sherian".

**Randle Sherian  
EMC Manager  
TÜV SÜD America, Inc.**

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of TÜV SÜD America Inc.. The results contained in this report are representative of the sample(s) submitted for evaluation.

**This report contains 58 pages**

# Table of Content

---

<b>1.0 GENERAL -----</b>	<b>3</b>
<b>1.1 PURPOSE -----</b>	<b>3</b>
<b>1.2 PRODUCT DESCRIPTION-----</b>	<b>3</b>
<b>1.3 TEST METHODOLOGY-----</b>	<b>3</b>
<b>1.4 EMISSION DESIGNATORS-----</b>	<b>5</b>
<b>2.0 TEST FACILITIES -----</b>	<b>6</b>
<b>2.1 LOCATION-----</b>	<b>6</b>
<b>2.2 LABORATORY ACCREDITATIONS/RECOGNITIONS/CERTIFICATIONS-----</b>	<b>6</b>
<b>2.3 RADIATED &amp; CONDUCTED EMISSIONS TEST SITE DESCRIPTION -----</b>	<b>7</b>
<b>3.0 APPLICABLE STANDARD REFERENCES -----</b>	<b>9</b>
<b>4.0 LIST OF TEST EQUIPMENT-----</b>	<b>10</b>
<b>5.0 SUPPORT EQUIPMENT -----</b>	<b>11</b>
<b>6.0 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM -----</b>	<b>11</b>
<b>7.0 SUMMARY OF TESTS -----</b>	<b>12</b>
<b>7.1 RF POWER OUTPUT -----</b>	<b>12</b>
<b>7.2 OUT OF BAND UNWANTED EMISSIONS-----</b>	<b>13</b>
<b>7.3 99% BANDWIDTH-----</b>	<b>23</b>
<b>7.4 SPURIOUS EMISSIONS AT ANTENNA TERMINALS-----</b>	<b>34</b>
<b>7.5 FIELD STRENGTH OF SPURIOUS EMISSIONS -----</b>	<b>42</b>
<b>8.0 MEASUREMENT UNCERTAINTY-----</b>	<b>46</b>
<b>9.0 CONCLUSION -----</b>	<b>46</b>

## 1.0 GENERAL

### 1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 24 Subpart D and Part 101 Subpart C of the FCC's Code of Federal Regulations, and ISED Canada Radio Standards Specifications RSS-119 and RSS-134 due to the changes identified in section 1.3.1.

### 1.2 Product Description

The FXZIG210 is a transceiver module that incorporates a Sensus FLEXNET 900MHz transceiver and a Zigbee 2.4GHz transceiver.

The FXZIG210 is meant as an endpoint state-of-the-art supporting communications WAN and HAN communication. The electronics package is designed to be installed in the Aclara I210+c meter. The Aclara I210+c meter is Aclara's flagship residential meter product supporting Demand, TOU, LP as well as a service switch.

The FXZIG210 is manufactured using any one of three TCXOs (KDS/CBA, KDS/MEA, or Taiten) for the FLEXNET 900MHz transceiver.

Antenna: 1/4 wave printed monopole, 2.77 dBi

Manufacturer Information:  
Sensus Metering Systems, Inc.  
639 Davis Drive  
Morrisville, NC 27560

Test Sample Serial Numbers:

TCXO Manufacturer	TX Radiated	RF Power and Out of Band Unwanted Emissions	Spurious Emissions at the Antenna Terminal and 99% Bandwidth
KDS/CBA	700210207	7000380	700185207

Test Sample Condition: The test samples were provided in good working order with no visible defects.

### 1.3 Test Methodology

#### 1.3.1 Configurations and Justification

The firmware was updated to enable Flexnet V2 modulations. Based on the change, radiated emissions evaluation and RF conducted measurements were performed on the new modulations.

The FLEXNET 900MHz transmitter was evaluated for radiated and RF conducted measurements for the seven modulations listed in the Emissions designators table.

For RSE, the EUT was evaluated in 3 orthogonal planes and the X orientation (upright) being the worst case. The worst-case modulation was reported in the report.

The EUT was tested standalone, and a power supply was used to power the EUT.  
The client provided software to exercise the EUT.

### 1.3.2 In-Band Testing Methodology

The EUT is designed to operate in multiple bands under the requirements of CFR 47 Parts 24 and 101. The following is a list of the frequency bands of operation sorted based on the FCC rule parts in which the band is associated.

CFR Title 47 Rule Part	Frequency Band of Operation (MHz)
24D	901.0 - 902.0
24D	930.0 - 931.0
24D	940.0 - 941.0
101	928.85 - 929.0
101	932.0 - 932.5
101	941.0 - 941.5
101	952.0 - 953.0
101	959.85 - 960.0

Based on the requirements set forth in accordance 47 CFR 2.1046-2.1057 as stated above, the methodology in selecting the places to test in the available bands of operation is outlined in the following table.

CFR Title 47 Rule Part	Frequency Band of Operation (MHz)	Location in the Range of Operation	Approx. Test Freq.
24D	901.0 - 902.0	Middle	901.5000
101	928.85 - 929.0	Middle	928.9250
24D	930.0 - 931.0	Middle	930.5000
101	932.0 - 932.5	Middle	932.2500
24D	940.0 - 941.0	1 near top and 1 near bottom	940.0125
101	941.0 - 941.5		941.4875
101	952.0 - 953.0	Middle	952.5000
101	959.85 - 960.0	Middle	959.9250

#### 1.4 Emission Designators

This report documents the 8 distinct modulation types that were added to the FXZIG210. The emission designators for the modulation types used by the FXZIG210 transmitter calculated using the baud rate defined in the Theory of Operation are as follows:

**EMISSIONS DESIGNATORS**

Mode	Emission Designator	Modulation
2SFSK (Half Baud)	5K00F1D	2-SFSK
4SFSK (Half Baud)	5K60F1D	4-SFSK
8SFSK (Half Baud)	5K90F1D	8-SFSK
2SFSK	10K0F1D	2-SFSK
4SFSK	11K3F1D	4-SFSK
8SFSK	11K9F1D	8-SFSK
m4Pass (10k)	4K70F1D	4-GFSK
m4Pass (20k)	9K30F1D	4-FGSK

## **2.0 TEST FACILITIES**

### **2.1 Location**

The radiated and conducted emissions test sites are located at the following address:

TÜV SÜD America Inc.  
2320 Presidential Drive, Suite 101  
Durham, NC 27703  
Phone: (919) 381-4235

FCC Registered Test Site Number: 637011  
ISED Canada Test Site Registration Number: 4175A

### **2.2 Laboratory Accreditations/Recognitions/Certifications**

TÜV SÜD America Inc. (Durham) is accredited to ISO/IEC 17025 by ANSI-ASQ National Accreditation Board/ANAB accreditation program, and has been issued certificate number AT-1921 in recognition of this accreditation. Unless otherwise specified, all tests methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

## 2.3 Radiated & Conducted Emissions Test Site Description

### 2.3.1 Semi-Anechoic Chamber Test Site

The Semi-Anechoic Chamber Test Site consists of an 18' x 28' x 18' shielded enclosure. The chamber is lined with Samwha Electronics Co. LTD Ferrite Absorber, model number SFA300 (HSN-1). The ferrite tile is 10cm x 10 cm and weighs approximately 1.4lbs. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber. On top of the ferrite tiles is DMAS HT-45 (Dutch Microwave Absorber Solutions) hybrid absorber on all walls except the wall behind the antenna mast which has a shorter DMAS HT-25 absorber.

The turntable is 1.50m in diameter and is located 150cm from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using short #6 copper wire. The turntable is an aluminum, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the turntable. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane.

Behind the turntable is a 2' x 6' x 1.5' deep shielded pit used for support equipment if necessary. The pit is equipped with 2 - 4" PVC chase from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3.1-1 below:

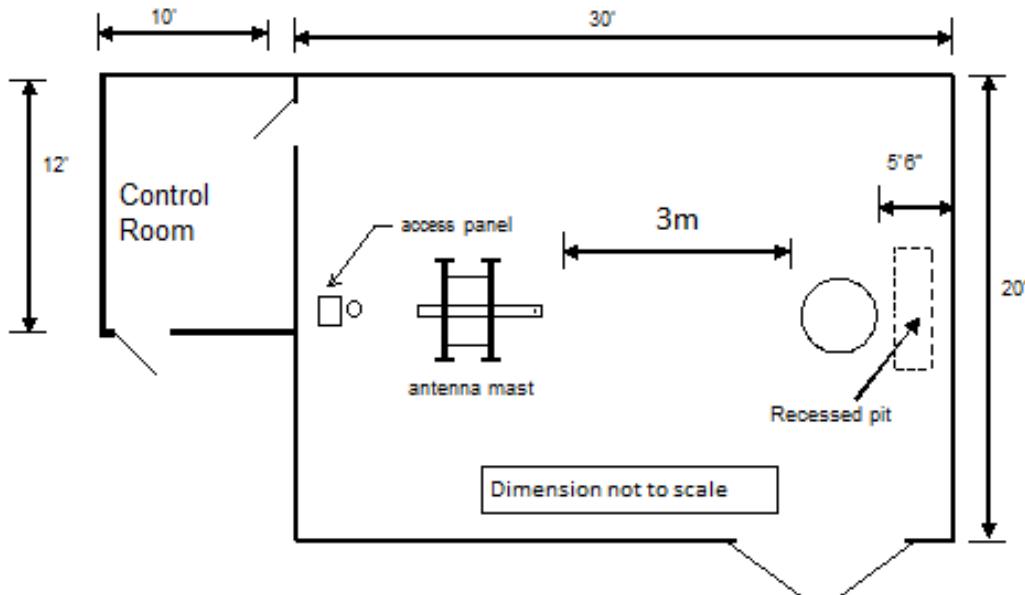


Figure 2.3.1-1: Semi-Anechoic Chamber Test Site

### 2.3.2 Conducted Emissions Test Site Description

The AC mains conducted EMI site is located in the main EMC lab. It consists of an 8' x 10' sheet galvanized steel horizontal ground reference plane (GRP) bonded every 6" to an 8' X 8' aluminum vertical ground plane.

A diagram of the room is shown below in figure 2.3.2-1:

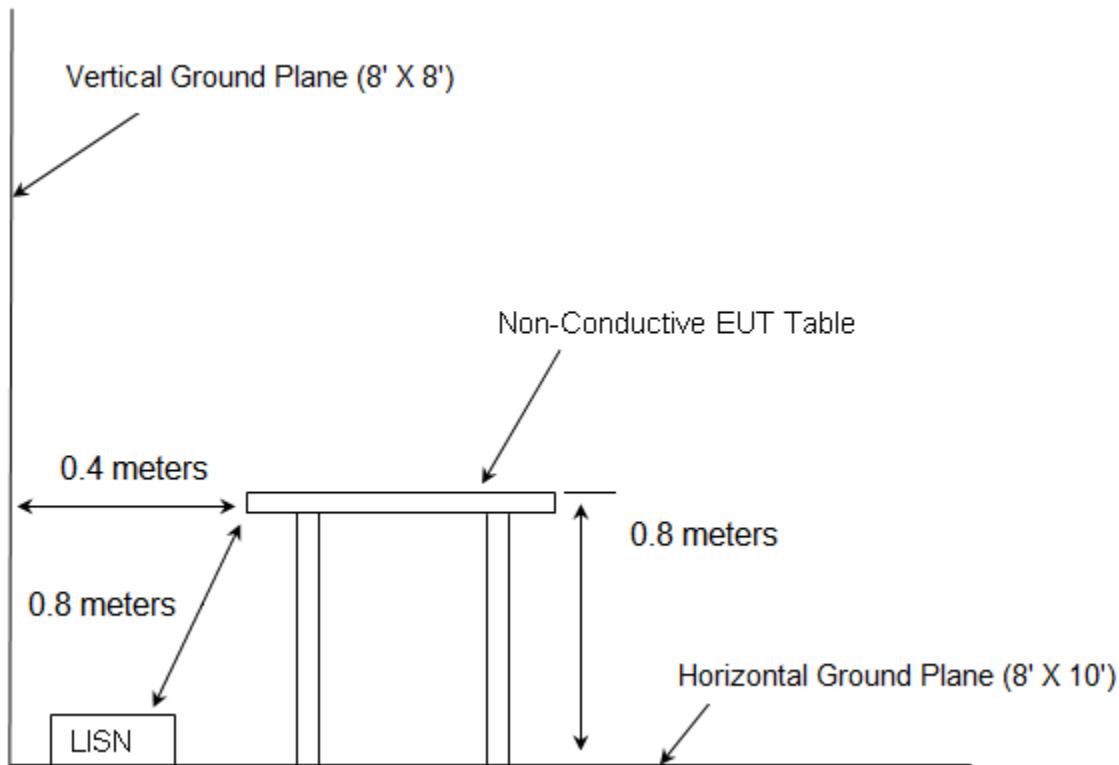


Figure 2.3.2-1: AC Mains Conducted EMI Site

### **3.0 APPLICABLE STANDARD REFERENCES**

The following standards were used:

- ❖ ANSI C63.4-2014: Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the 9 kHz to 40GHz
- ❖ ANSI C63.26-2015: Compliance Testing of Transmitters Used in Licensed Radio Services
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures - 2017
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 24, Subpart D: Personal Communications Services – 2017
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 101, Subpart C: Technical Standards -2018
- ❖ ISED Canada Radio Standards Specification: RSS-119 - Radio Transmitters and Receivers Operating in the Land Mobile and Fixed Services in the Frequency Range 27.41-960 MHz, Issue 12, May 2015
- ❖ ISED Canada Radio Standards Specification: RSS-134 - 900 MHz Narrow Band Personal Communication Service, Issue 2, February 2016
- ❖ ISED Canada Radio Standards Specification: RSS-GEN – General Requirements for Compliance of Radio Apparatus, Issue5, April 2018.

#### 4.0 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

**Table 4-1: Test Equipment Radiated Emissions**

Asset ID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
DEMC0499	EMCO	3146	Antennas	1108	5/3/2017	5/3/2019
DEMC3002	Rohde & Schwarz	ESU40	Receiver	100346	10/31/2018	10/31/2019
DEMC3006	Rohde & Schwarz	TS-PR18	Amplifiers	122006	1/10/2018	1/10/2019
DEMC3008	Rohde & Schwarz	NRP2	Meter	103131	2/15/2018	2/15/2019
DEMC3009	Rohde & Schwarz	NRP-Z81	Meter	102397	2/15/2018	2/15/2019
DEMC3012	Rohde & Schwarz	EMC32-EB	Software	100731	NCR	NCR
DEMC3014	EMCO	3115	Antennas	9901-5653	3/3/2017	3/3/2019
DEMC3016	Fei Teng Wireless Technology	HA-07M18G-NF	Antennas	2013120203	2/7/2018	2/7/2020
DEMC3020	Rohde & Schwarz	SMB100A	Signal Generators	175943	1/11/2019	1/11/2019
DEMC3029	Micro-Tronics	HPM50108	Filter	134	1/7/2018	1/7/2019
DEMC3035	Hasco, Inc.	HLL142-S1-S1-12	Cables	3077	1/5/2018	1/5/2019
DEMC3037	Hasco, Inc.	HLL142-S1-S1-18	Cables	6367	1/9/2018	1/9/2019
DEMC3038	Florida RF Labs	NMSE-290AW-60.0-NMSE	Cable Set	1448	1/5/2018	1/5/2019
DEMC3039	Florida RF Labs	NMSE-290AW-396.0-NMSE	Cable Set	1447	1/5/2018	1/5/2019
DEMC3041	Aeroflex Inmet	18N10W-30	Attenuator	1447	1/15/2018	1/15/2019
DEMC3042	Aeroflex Inmet	18N10W-10	Attenuator	1444	1/8/2018	1/8/2019
DEMC3045	Aeroflex Inmet	18N10W-20	Attenuator	1437	1/8/2018	1/8/2019
DEMC3053	Fluke	115	Digital Multimeter	28840861	1/9/2018	1/9/2019
DEMC3055	Rohde & Schwarz	3005	Cables	3055	1/8/2018	1/8/2019
DEMC3064	Times	LMR195	Cables	3064	8/27/2018	8/27/2019
DEMC3085	Rohde & Schwarz	FSW43	Spectrum Analyzer	103997	3/15/2018	3/15/2019

NCR = No Calibration Required

DMAS MT-25 RF absorber material was used on the floor for all final measurements above 1 GHz.

Asset DEMC3002: Firmware Version: ESU40 is 4.73 SP4

Asset DEMC3012: Software Version: EMC32-B is 9.15

Asset DEMC3020: Firmware Rev: 2.20.382.113

Asset DEMC3085: Instrument Firmware 2.90 SP1

All assets were used during their calibration period

## 5.0 SUPPORT EQUIPMENT

Table 5-1: EUT and Support Equipment

Item #	Type Device	Manufacturer	Model/Part #	Serial #
1	EUT	Sensus	FXZIG210	700185207
2	Power Supply	Sorenson	QRD20-4	2716

Table 5-2: Cable Description

Cable #	Cable Type	Length	Shield	Termination
A	Power	140cm	No	1 to 2

## 6.0 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM




Figure 6-1: EUT Test Setup

## 7.0 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

### 7.1 RF Power Output

#### 7.1.1 Measurement Procedure (ANSI 63.26: 2015 Section 5.2.3.2)

The RF output of the equipment under test was directly connected to the input of a wide band RF power meter through 29.9dB of passive attenuation. The results are shown below.

#### Part 24.132, 101.113 (a), and ISED Canada RSS-134 4.3(a), (b) and RSS-119 5.4 – Power Output

#### 7.1.2 Measurement Results

Performed by: Ben Ford

KDS/CBA

Table 7.1.2-1: Peak Output Power

FCC Rule Part	Frequency (MHz)	Output Power High (dBm)	Output Power High (Watts)
24D	901.5000	31.52	1.42
24D	930.5000	31.24	1.33
24D	940.0125	31.01	1.26
101	928.9250	31.25	1.33
101	932.2500	30.77	1.19
101	941.4875	31.03	1.27
101	952.5000	30.67	1.17
101	959.9250	30.39	1.09

## 7.2 Out of Band Unwanted Emissions

### 7.2.1 Measurement Procedure (ANSI 63.26: 2015 Section 5.7.3)

The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer through 29.9dB of passive attenuation. The spectrum analyzer resolution and video bandwidths were set to 300 Hz and 3000 Hz respectively. The internal correction factors of the spectrum analyzer were employed to correct for any cable or attenuator losses. Results of the test are shown below for all modes of operation.

### 7.2.2 Measurement Results – Emission Masks

Performed by: Ben Ford

#### Part 24.133 a(1), a(2), ISED Canada RSS-134 4.4.1 (a), (b), 4.4.2 (a),(b) – Emission Limits KDS/CBA

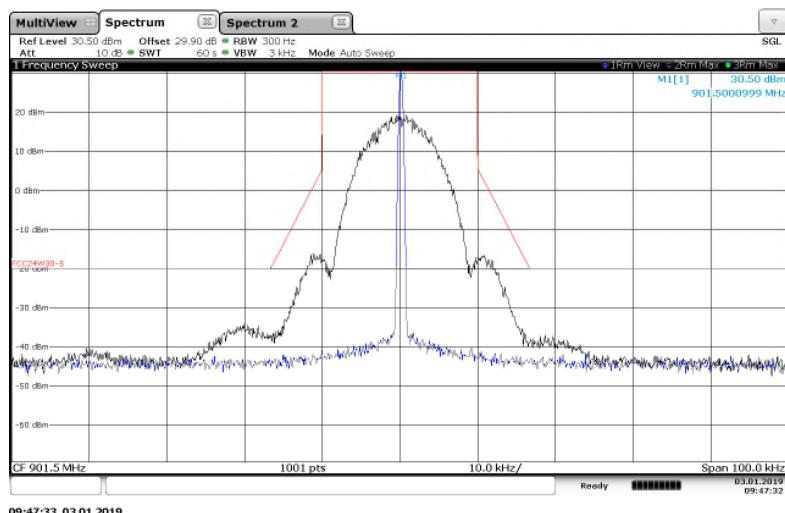


Figure 7.2.2-1: 901.5 MHz – 25 kHz Channel Spacing – 2SFSK Mode

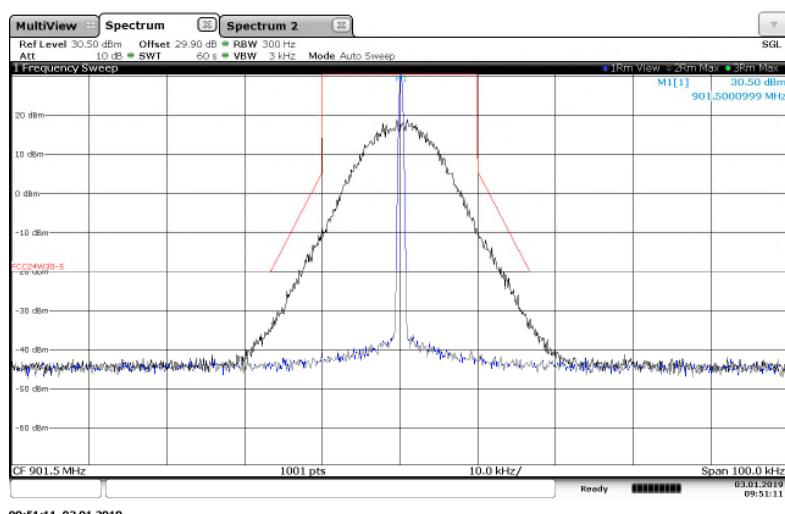


Figure 7.2.2-2: 901.5 MHz – 25 kHz Channel Spacing – 4SFSK Mode

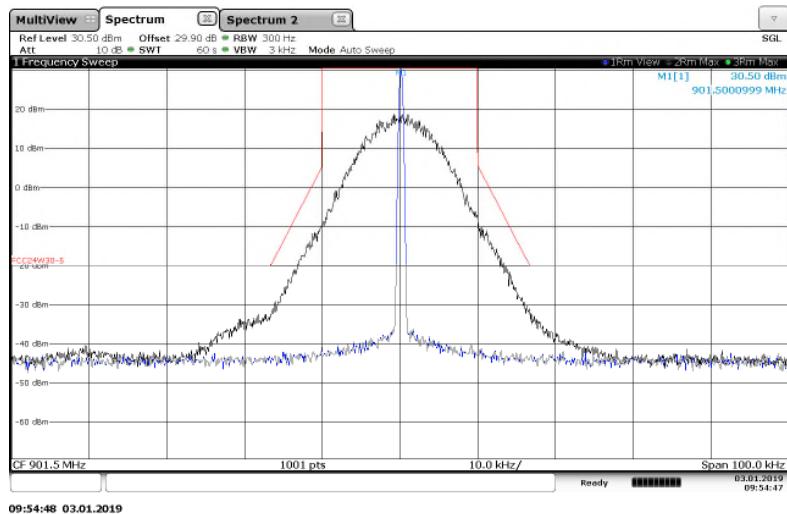


Figure 7.2.2-3: 901.5 MHz – 25 kHz Channel Spacing – 8SFSK Mode

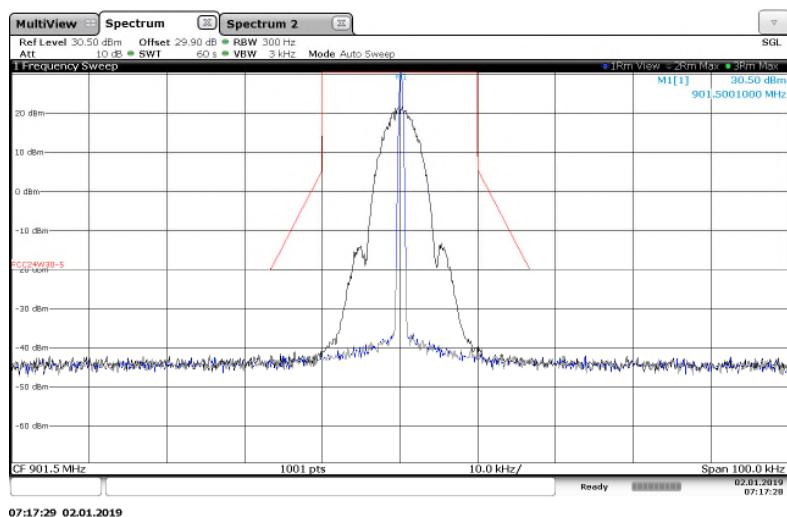


Figure 7.2.2-4: 901.5 MHz – 25 kHz Channel Spacing – 2SFSK (Half Baud) Mode


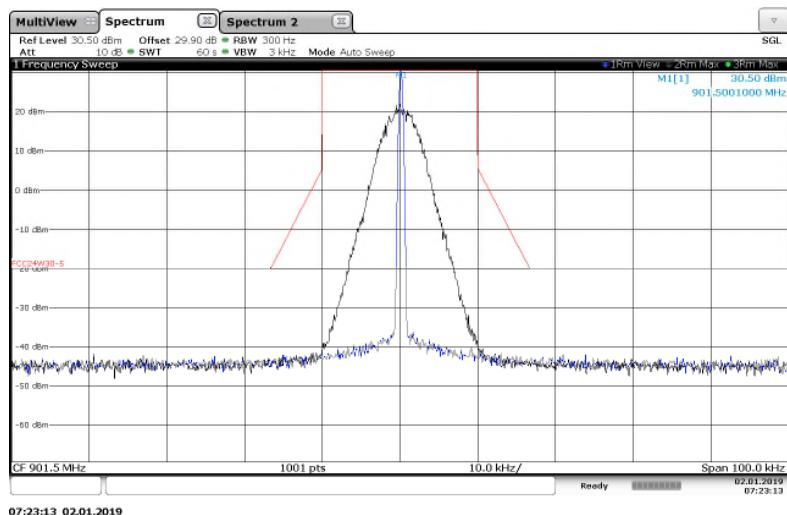


Figure 7.2.2-5: 901.5 MHz – 25 kHz Channel Spacing – 4SFSK (Half Baud) Mode

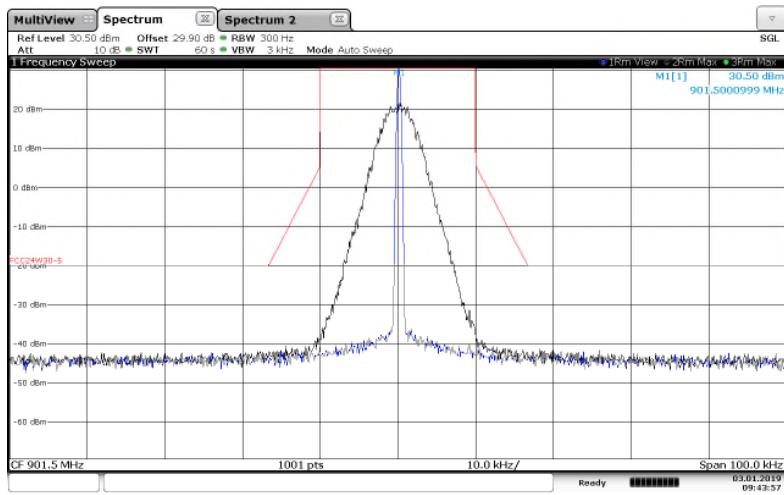

.2

Figure 7.2.2-6: 901.5 MHz – 25 kHz Channel Spacing – 8SFSK (Half Baud) Mode

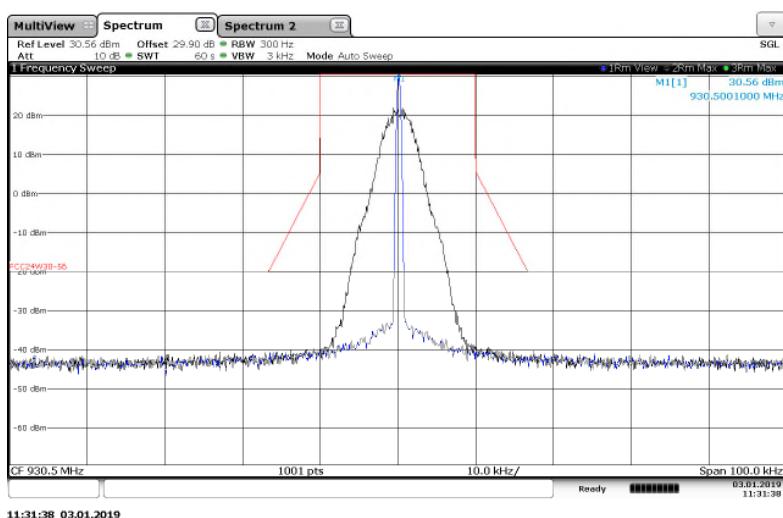


Figure 7.2.2-7: 930.5 MHz – 25 kHz Channel Spacing – m4Pass10k Mode

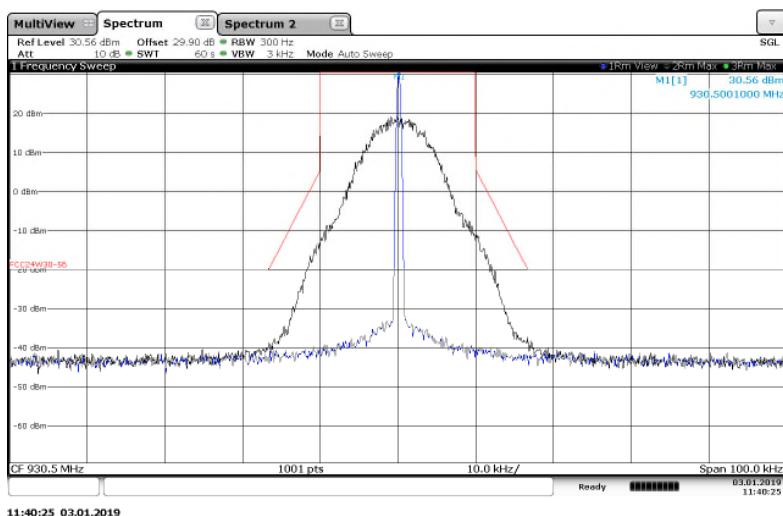


Figure 7.2.2-8: 930.5 MHz – 25 kHz Channel Spacing – m4Pass20k Mode

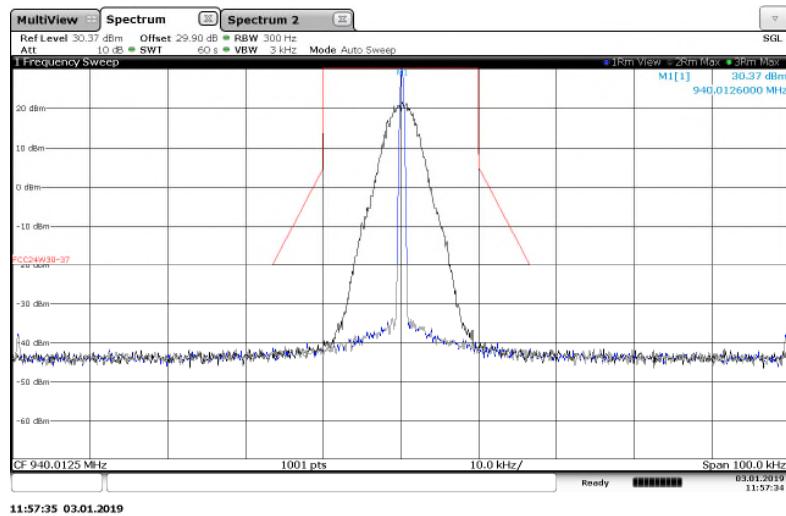


Figure 7.2.2-9: 940.0125 MHz – 25 kHz Channel Spacing – m4Pass10k Mode

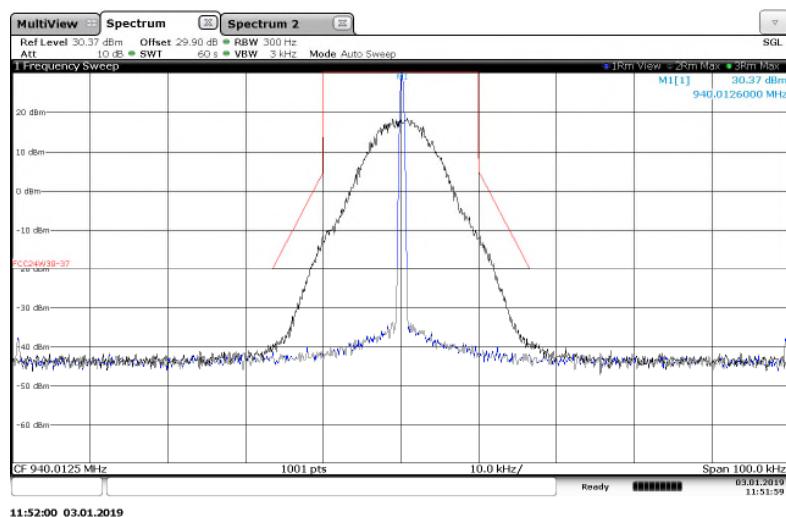


Figure 7.2.2-10: 940.0125 MHz – 25 kHz Channel Spacing – m4Pass20k Mode

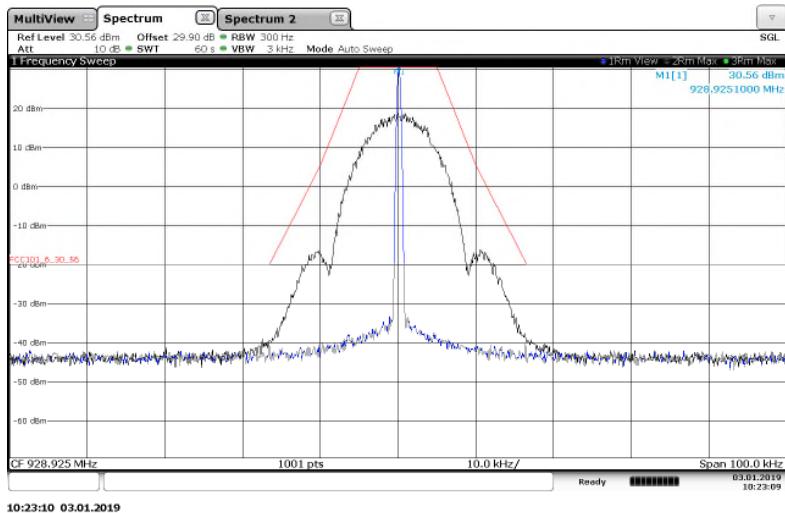
**Part 101.111 a(5), a(6), RSS-119 5.8.6 (FCC Part 101.11 a(5) a(6) provides worst case)**

Figure 7.2.2-11: 928.925 MHz – 25 kHz Channel Spacing – 2SFSK Mode

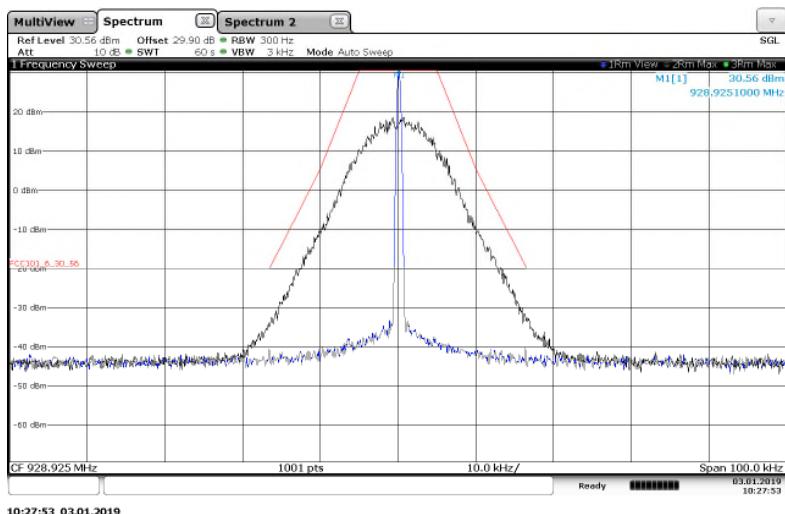


Figure 7.2.2-12: 928.925 MHz – 25 kHz Channel Spacing – 4SFSK Mode

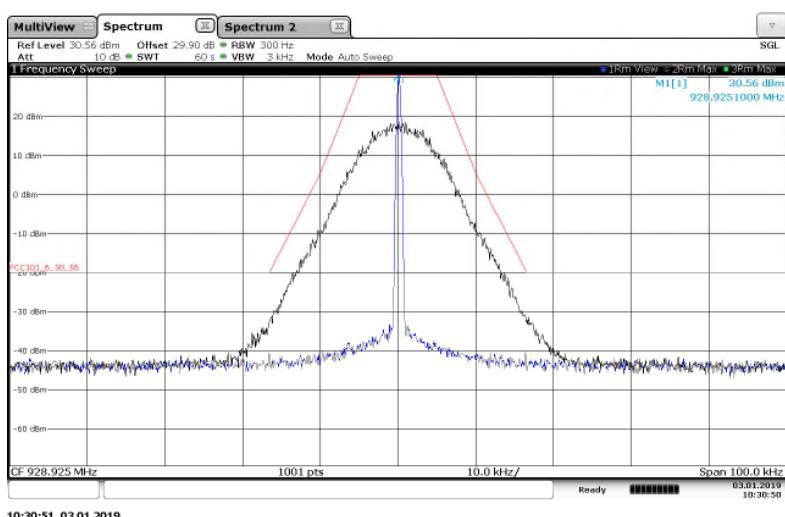


Figure 7.2.2-13: 928.925 MHz – 25 kHz Channel Spacing – 8SFSK Mode

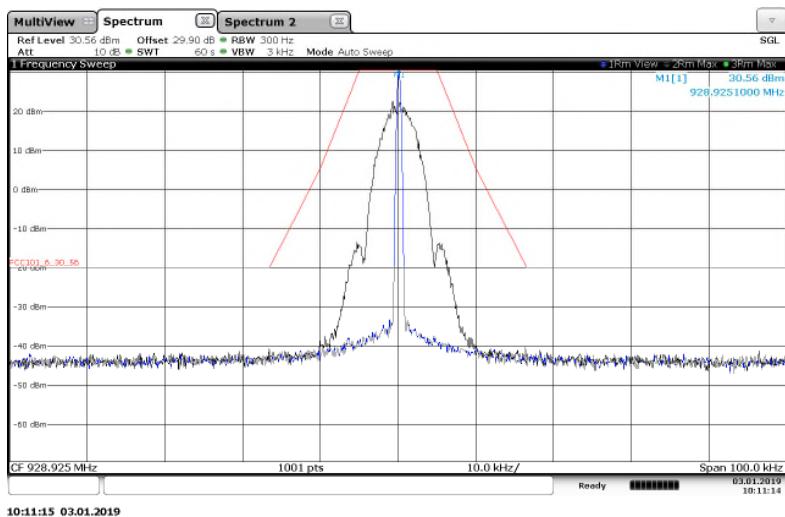


Figure 7.2.2-14: 928.925 MHz — 25 kHz Channel Spacing – 2SFSK (Half Baud) Mode

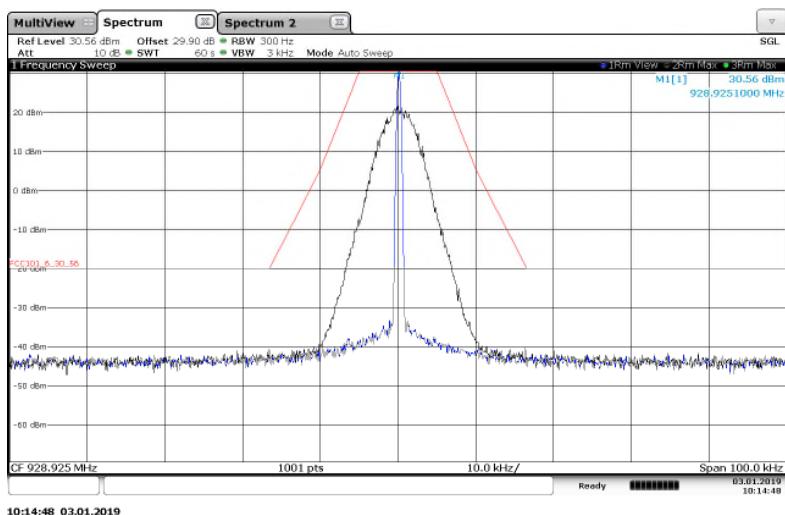


Figure 7.2.2-15: 928.925 MHz — 25 kHz Channel Spacing – 4SFSK (Half Baud) Mode

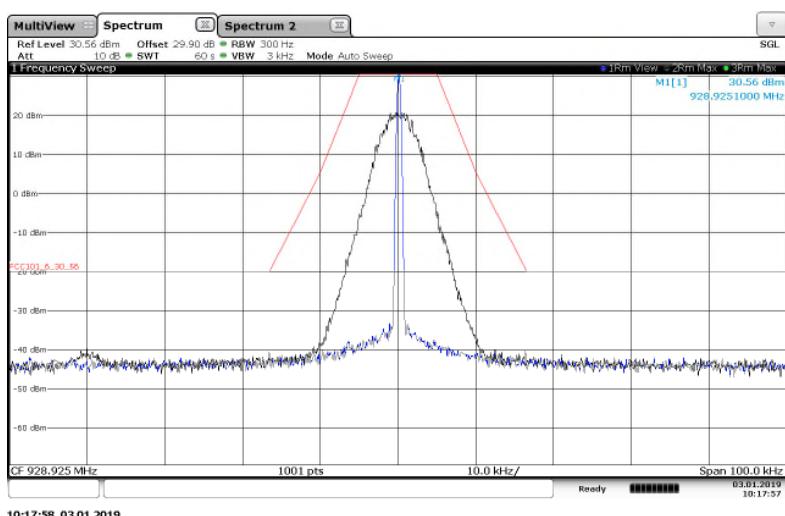


Figure 7.2.2-16: 928.925 MHz — 25 kHz Channel Spacing – 8SFSK (Half Baud) Mode

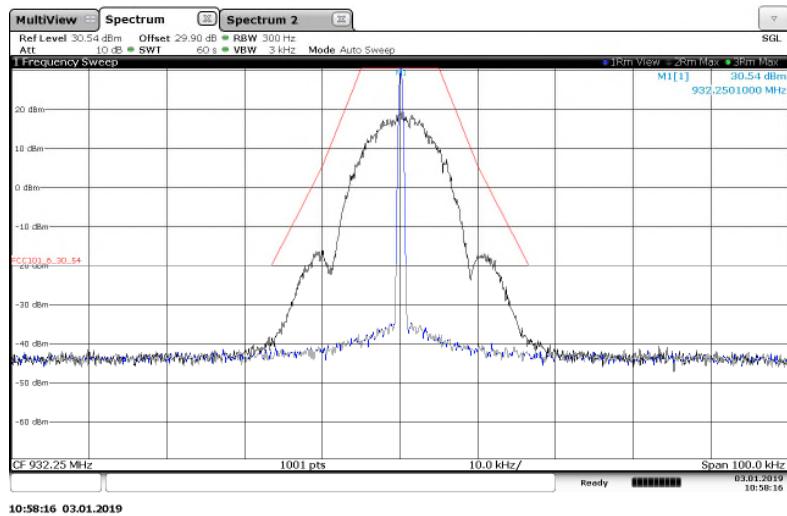


Figure 7.2.2-17: 932.25 MHz – 25 kHz Channel Spacing - 2SFSK Mode

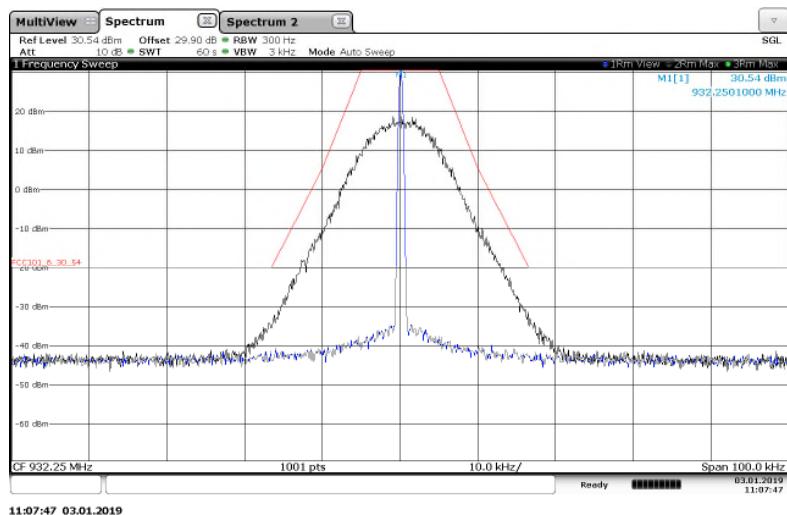


Figure 7.2.2-18: 932.25 MHz – 25 kHz Channel Spacing – 4SFSK Mode

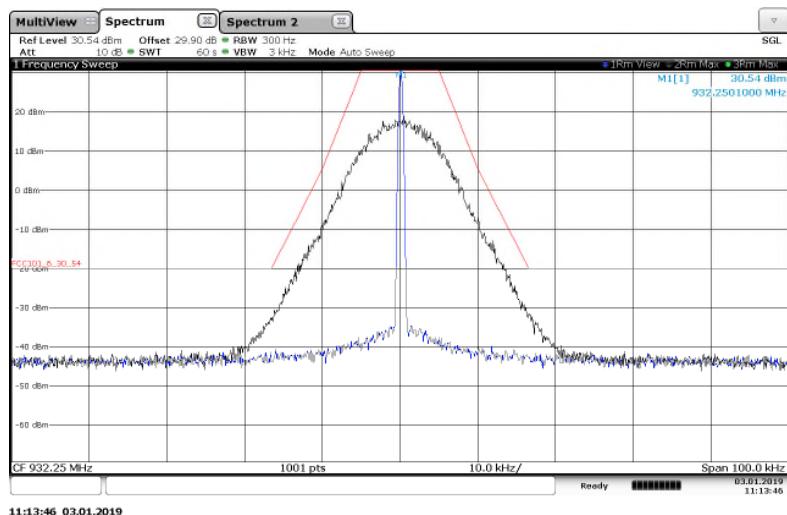


Figure 7.2.2-19: 932.25 MHz – 25 kHz Channel Spacing – 8SFSK Mode

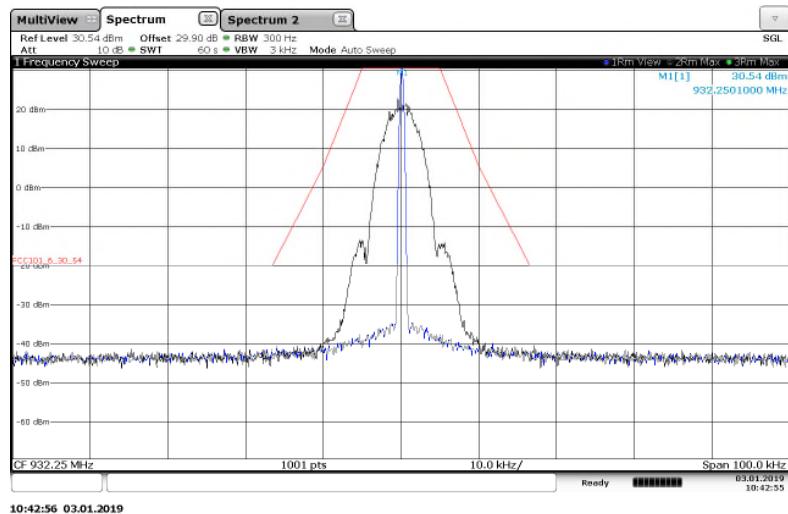


Figure 7.2.2-20: 932.25 MHz — 25 kHz Channel Spacing – 2SFSK (Half Baud) Mode

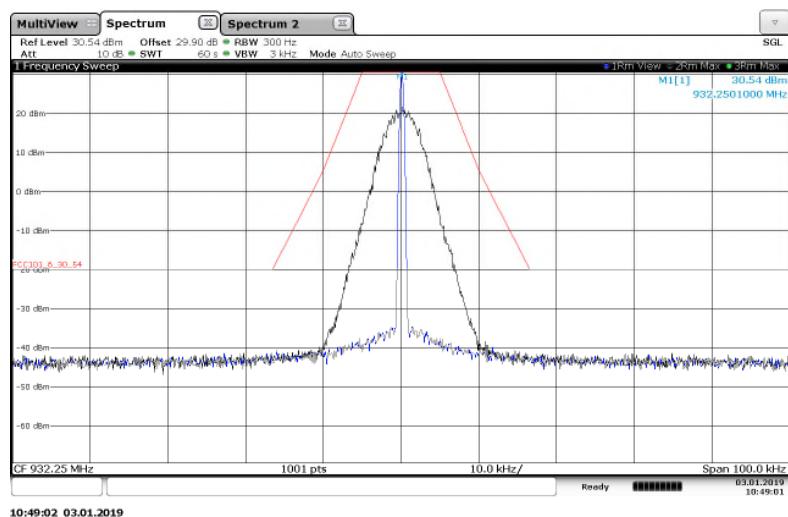


Figure 7.2.2-21: 932.25 MHz — 25 kHz Channel Spacing – 4SFSK (Half Baud) Mode

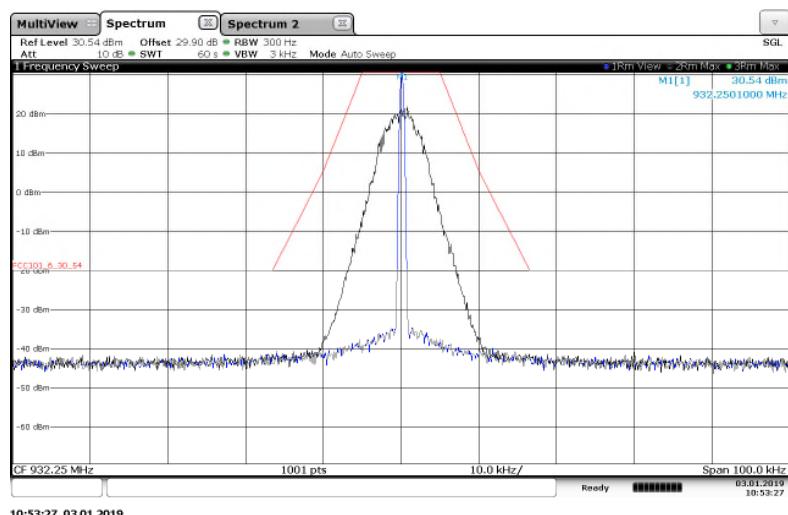


Figure 7.2.2-22: 932.25 MHz — 25 kHz Channel Spacing – 8SFSK (Half Baud) Mode

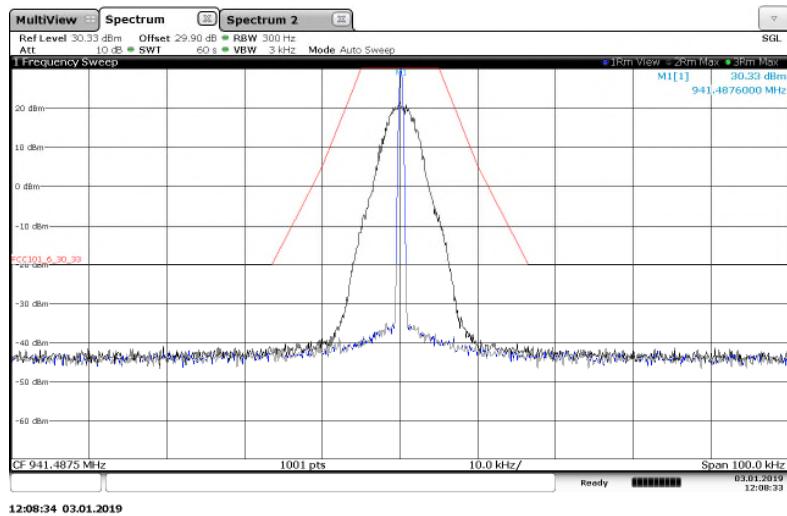


Figure 7.2.2-23: 941.4875 MHz - 25 kHz Channel Spacing – m4Pass 10k Mode

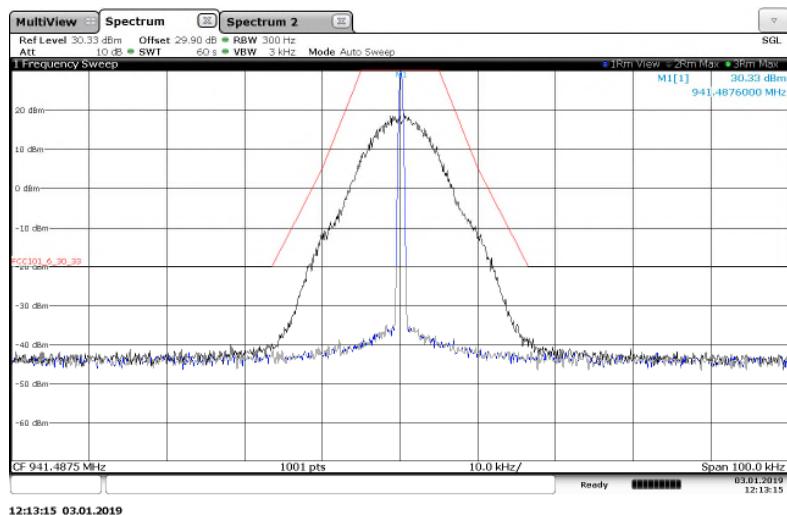


Figure 7.2.2-24: 941.4875 MHz – 25 kHz Channel Spacing – m4Pass 20k Mode

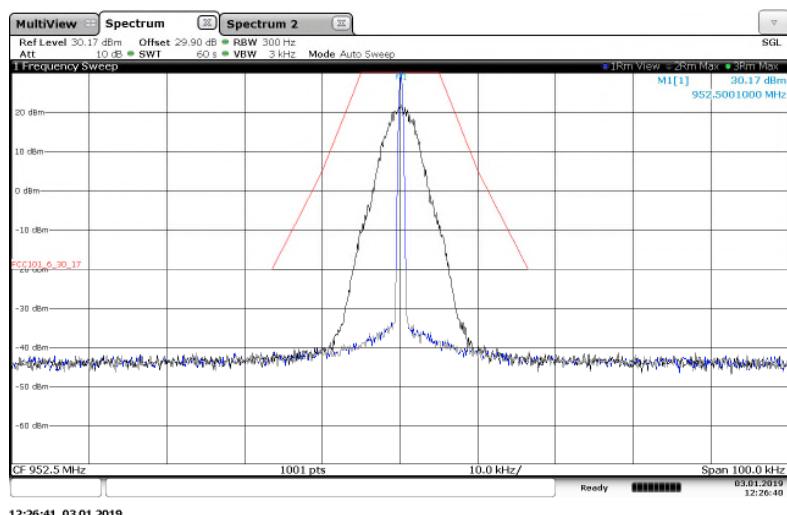


Figure 7.2.2-25: 952.5 MHz - 25 kHz Channel Spacing – m4Pass 10k Mode

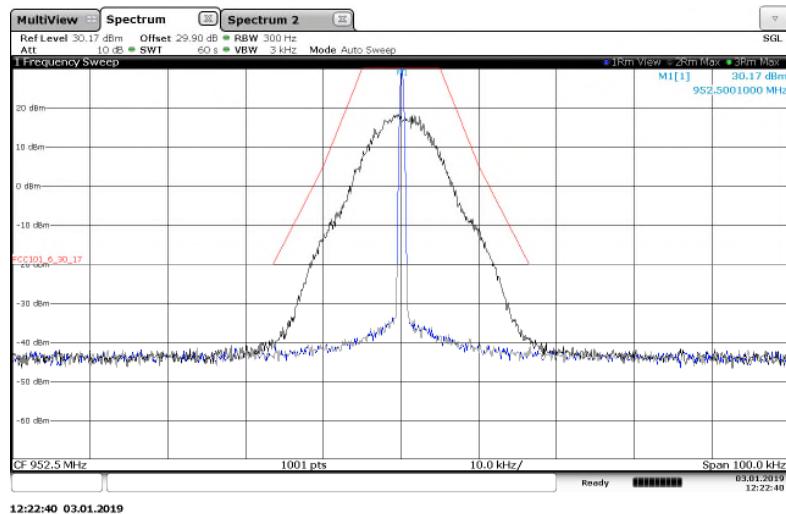


Figure 7.2.2-26: 952.5 MHz – 25 kHz Channel Spacing – m4Pass 20k Mode

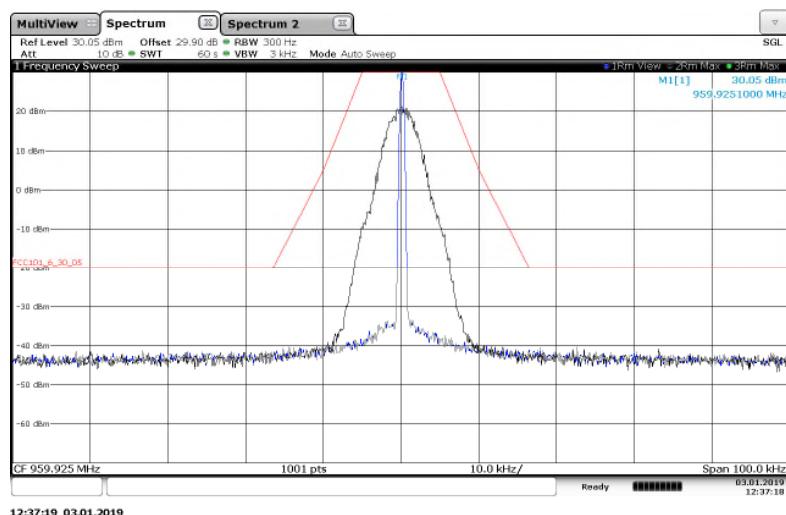


Figure 7.2.2-27: 959.925 MHz - 25 kHz Channel Spacing – m4Pass 10k Mode

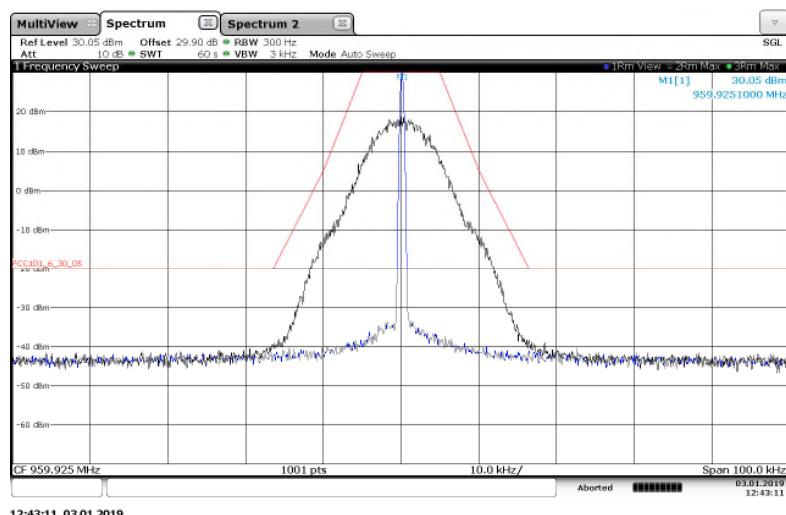


Figure 7.2.2-28: 959.925 MHz – 25 kHz Channel Spacing – m4Pass 20k Mode

### 7.3 99% Bandwidth

#### 7.3.1 Measurement Procedure (ANSI 63.26: 2015 Section 5.4.4)

The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer through 29.9dB of passive attenuation. The internal correction factors of the spectrum analyzer were employed to correct for any cable and attenuator losses.

The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts. The nominal IF filter 3 dB bandwidth (RBW) is in the range of 1% to 5% of the OBW, and the VBW was set  $\geq 3 \times$  RBW. The reference level was set to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. The measurements were made using the spectrum analyzer's 99% BW function.

#### 7.3.2 Measurement Results

Performed by: Ben Ford

Frequency (MHz)	ISED Canada Rule Part	Mode of Operation	99% Bandwidth (kHz)
901.5000	RSS-134	2SFSK	11.93
901.5000	RSS-134	4SFSK	14.05
901.5000	RSS-134	8SFSK	14.79
901.5000	RSS-134	2SFSK (Half-Baud)	5.95
901.5000	RSS-134	4SFSK (Half-Baud)	6.92
901.5000	RSS-134	8SFSK (Half-Baud)	7.24
930.5000	RSS-134	m4Pass10k	6.04
930.5000	RSS-134	m4Pass20k	12.08
940.0125	RSS-134	m4Pass10k	5.98
940.0125	RSS-134	m4Pass20k	12.20
928.9250	RSS-119	2SFSK	11.94
928.9250	RSS-119	4SFSK	13.87
928.9250	RSS-119	8SFSK	14.84
928.9250	RSS-119	2SFSK (Half-Baud)	5.95
928.9250	RSS-119	4SFSK (Half-Baud)	6.97
928.9250	RSS-119	8SFSK (Half-Baud)	7.29
932.2500	RSS-119	2SFSK	11.91
932.2500	RSS-119	4SFSK	13.95
932.2500	RSS-119	8SFSK	14.85
932.2500	RSS-119	2SFSK (Half-Baud)	5.92
932.2500	RSS-119	4SFSK (Half-Baud)	6.95
932.2500	RSS-119	8SFSK (Half-Baud)	7.27
941.4875	RSS-119	m4Pass10k	6.12
941.4875	RSS-119	m4Pass20k	12.17
952.5000	RSS-119	m4Pass10k	6.13
952.5000	RSS-119	m4Pass20k	12.17
959.9250	RSS-119	m4Pass10k	6.05
959.9250	RSS-119	m4Pass20k	12.21

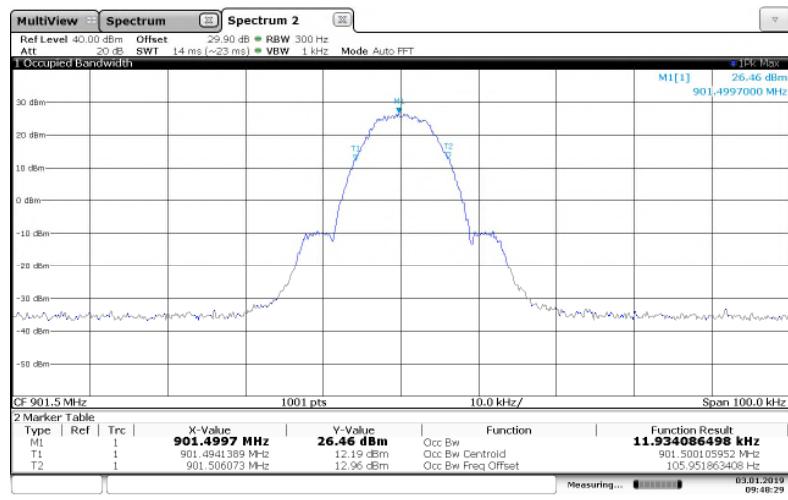
ISED Canada RSS-GEN 6.6, ISED Canada RSS-134

Figure 7.3.2-1: 901.5 MHz – 2SFSK Mode

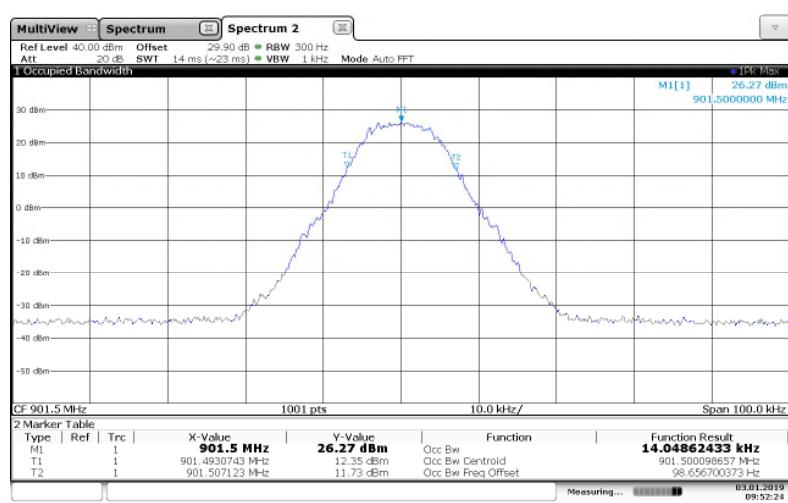


Figure 7.3.2-2: 901.5 MHz – 4SFSK Mode

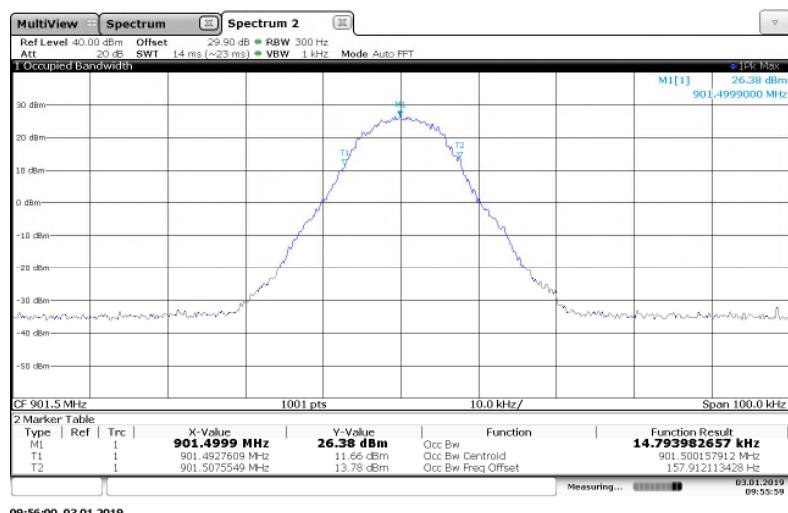


Figure 7.3.2-3: 901.5 MHz – 8SFSK Mode

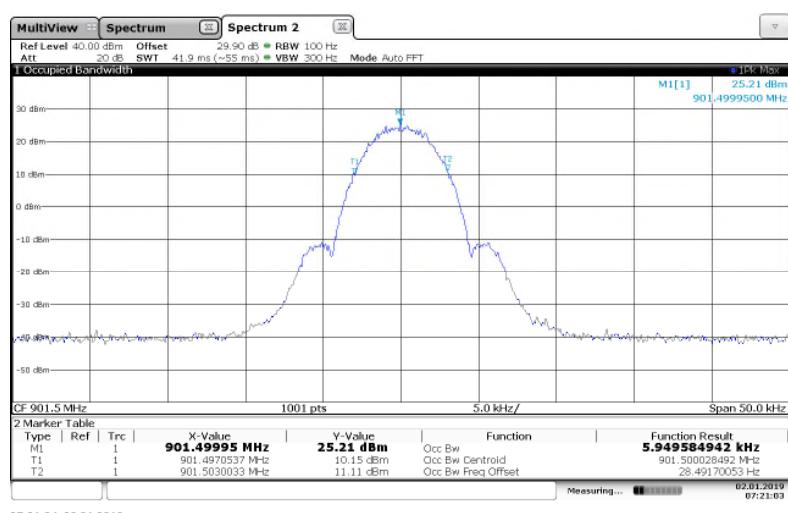


Figure 7.3.2-4: 901.5 MHz – 2SFSK (Half Baud) Mode

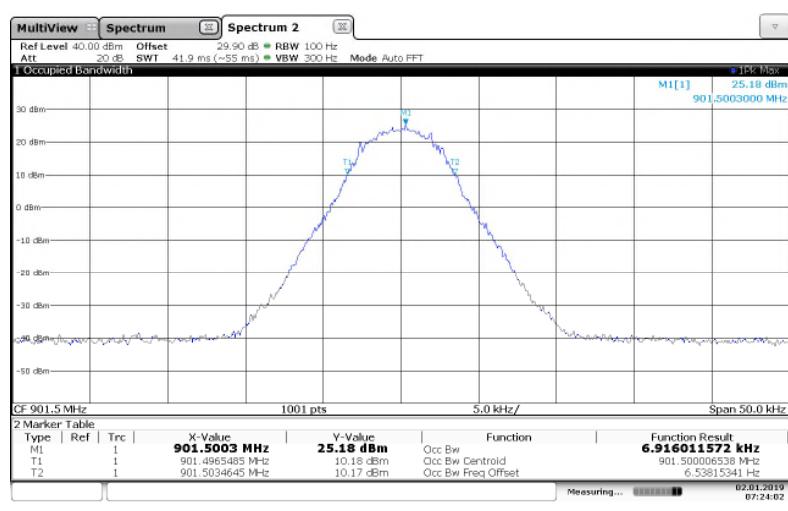


Figure 7.3.2-5: 901.5 MHz – 4SFSK (Half Baud) Mode

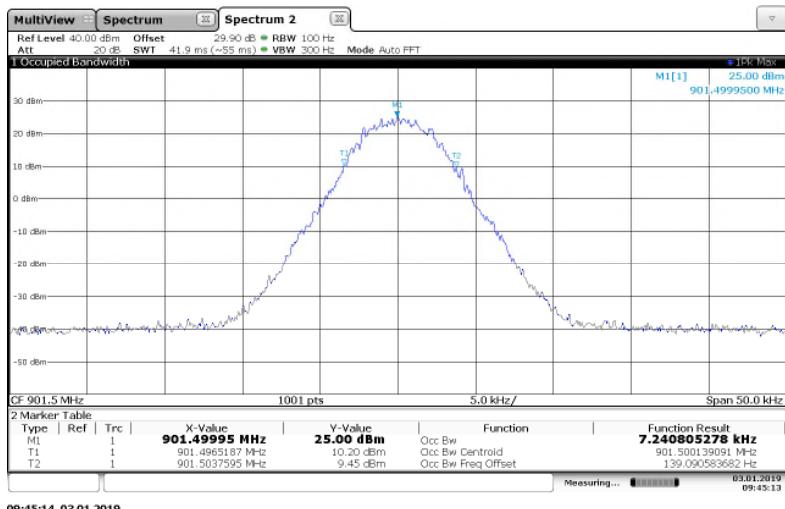


Figure 7.3.2-6: 901.5 MHz – 8SFSK (Half Baud) Mode

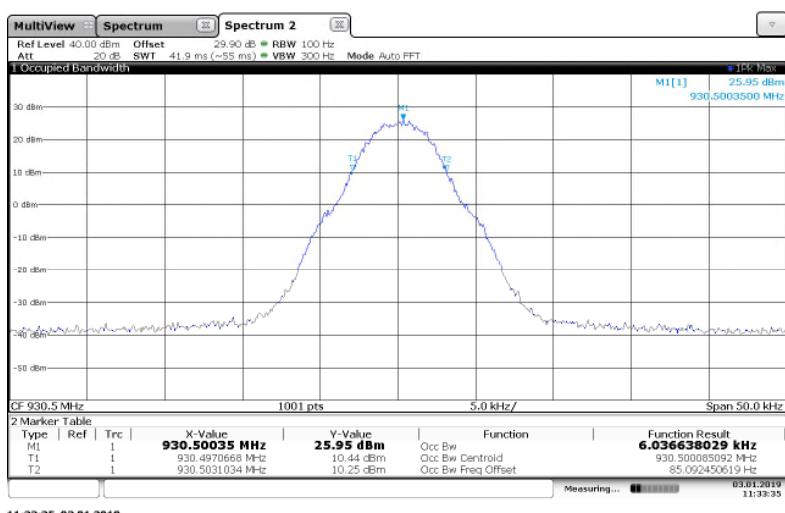


Figure 7.3.2-7: 930.5 MHz – m4Pass 10k Mode

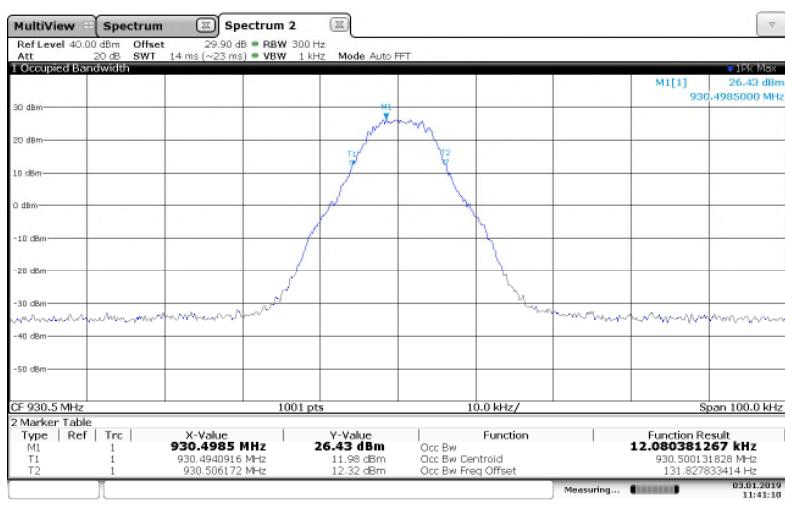


Figure 7.3.2-8: 930.5 MHz – m4Pass 20k Mode

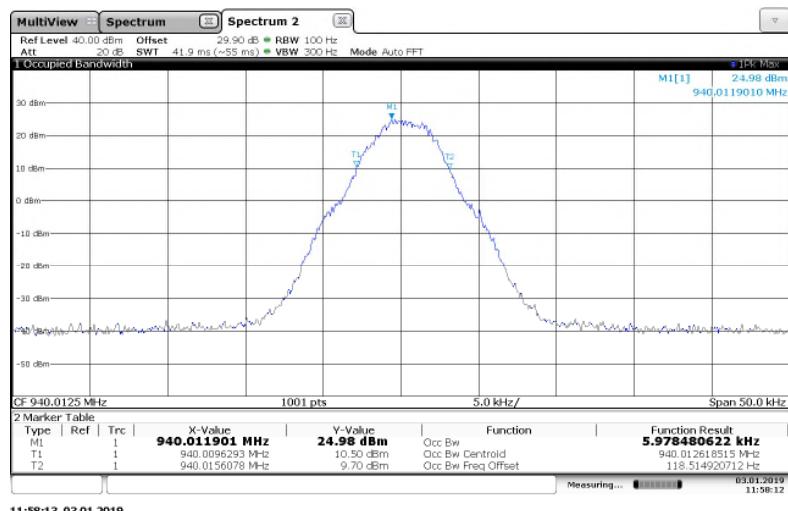


Figure 7.3.2-9: 940.0125 MHz – m4Pass 10k Mode

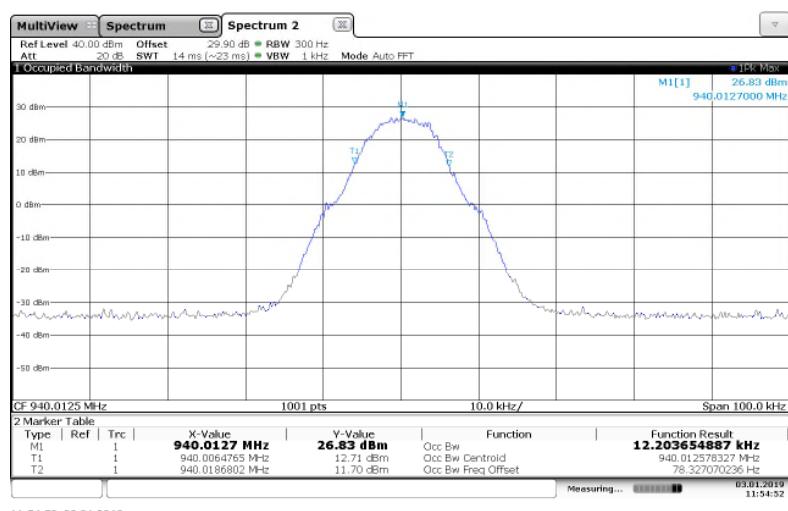
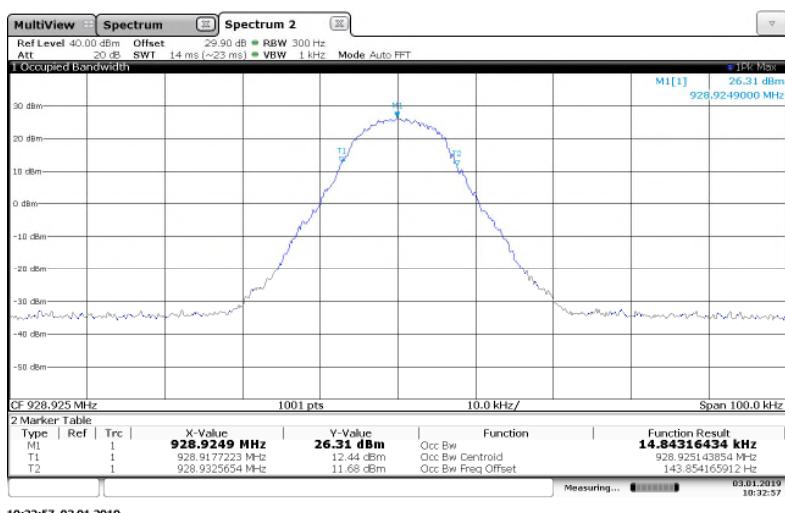
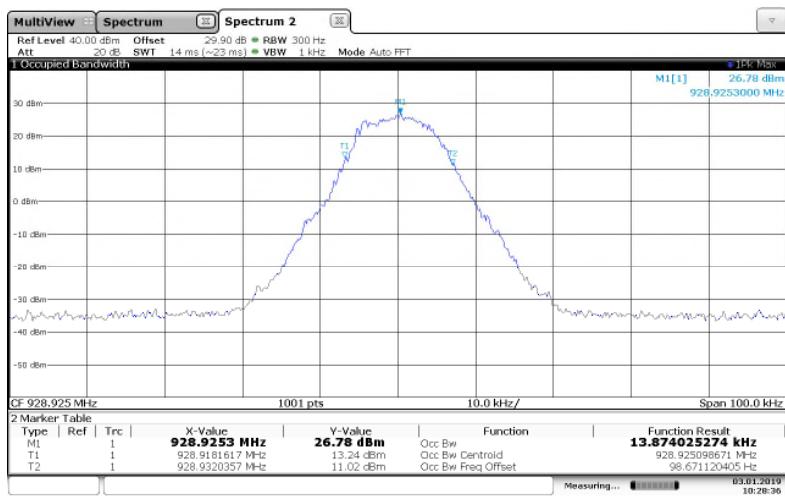
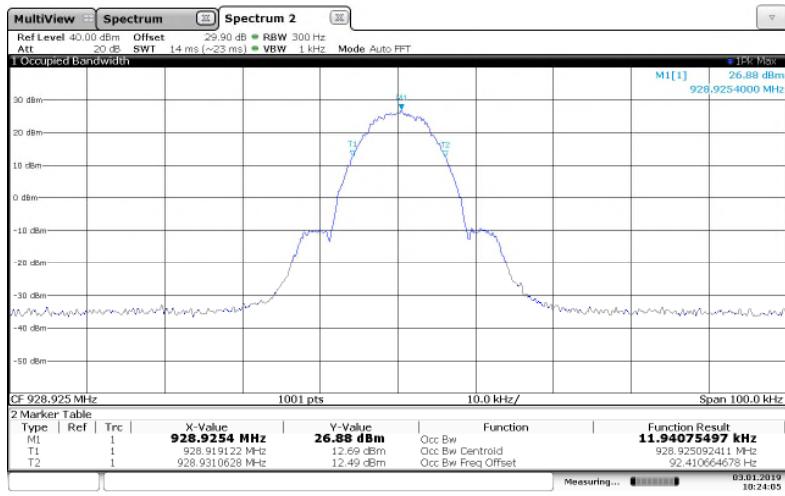


Figure 7.3.2-10: 940.0125 MHz – m4Pass 20k Mode

## ISED Canada RSS-GEN 6.6, ISED Canada RSS-119



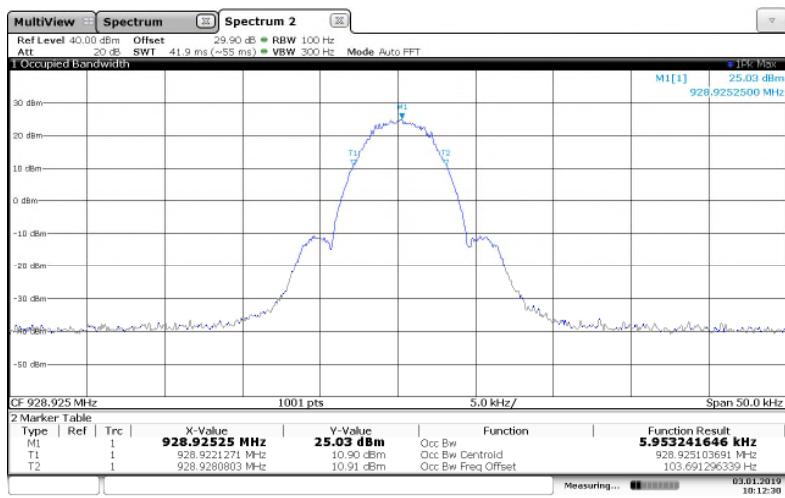


Figure 7.3.2-14: 928.925 MHz – 2SFSK (Half Baud) Mode

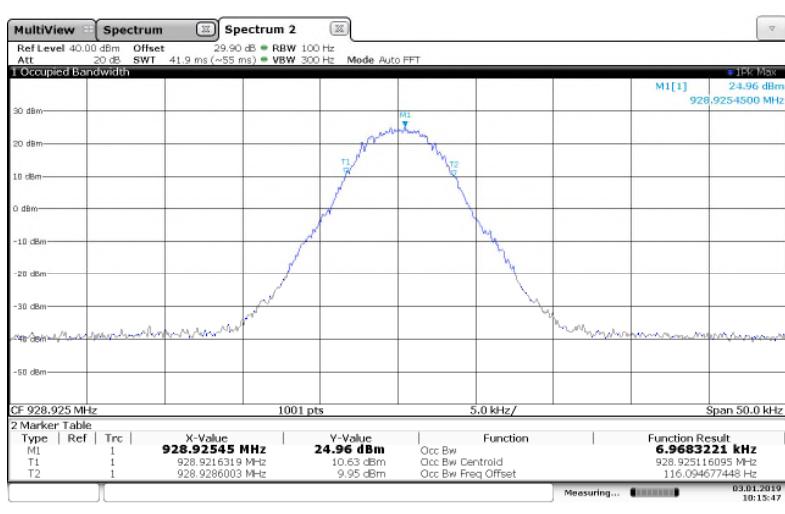


Figure 7.3.2-15: 928.925 MHz – 4SFSK (Half Baud) Mode

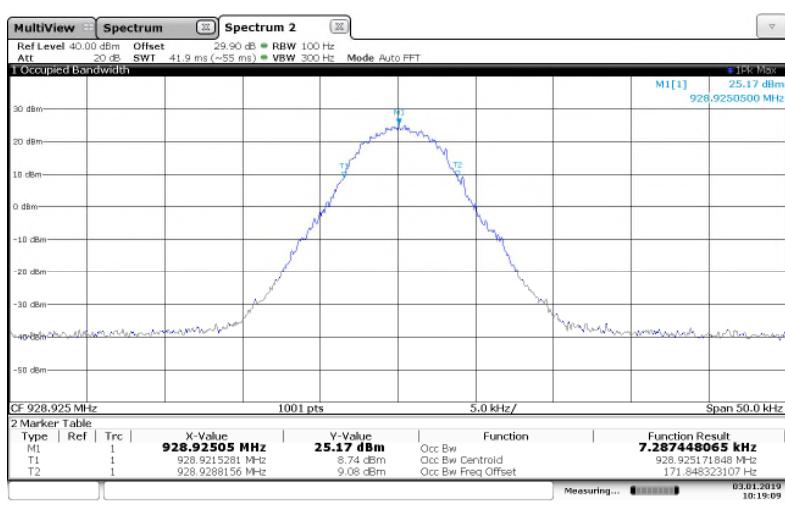


Figure 7.3.2-16: 928.925 MHz – 8SFSK (Half Baud) Mode

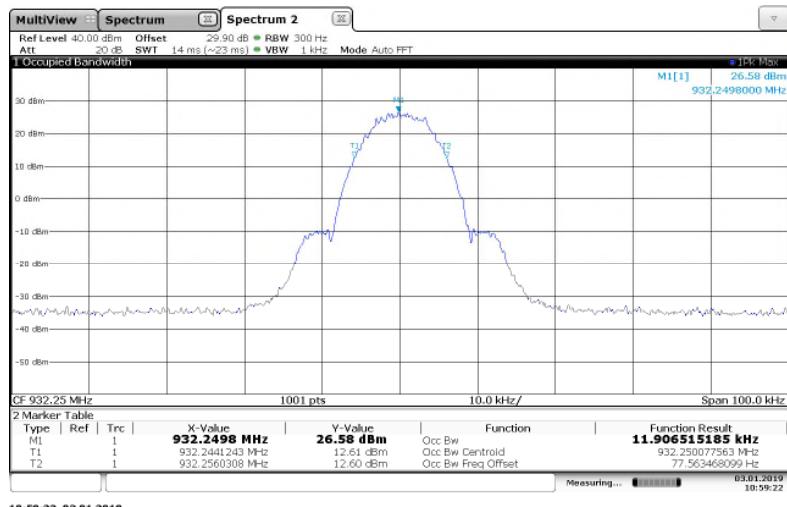


Figure 7.3.2-17: 932.25 MHz – 2SFSK Mode

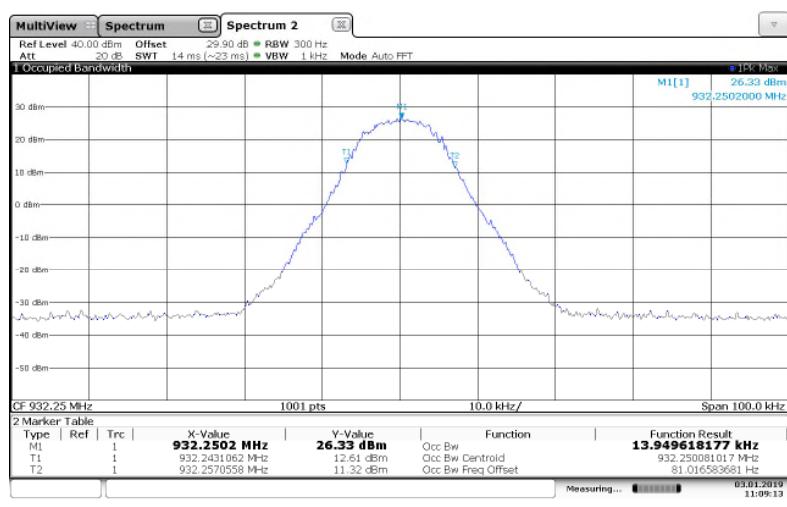


Figure 7.3.2-18: 932.25 MHz – 4SFSK Mode



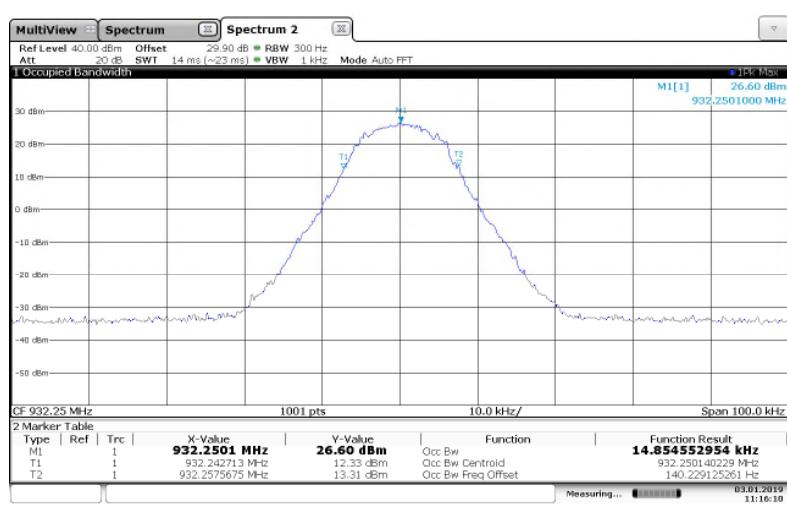


Figure 7.3.2-19: 932.25 MHz – 8SFSK Mode

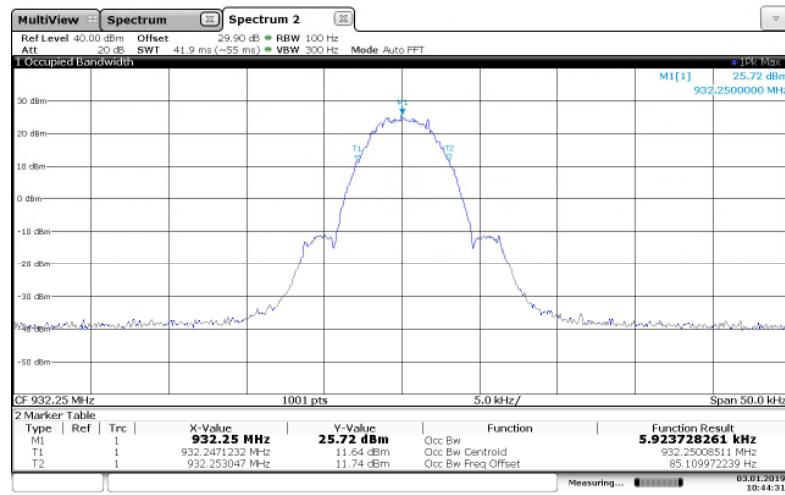


7 10:44:32 03.01.2019

Figure 7.3.2-20: 932.25 MHz — 2SFSK(Half Baud) Mode

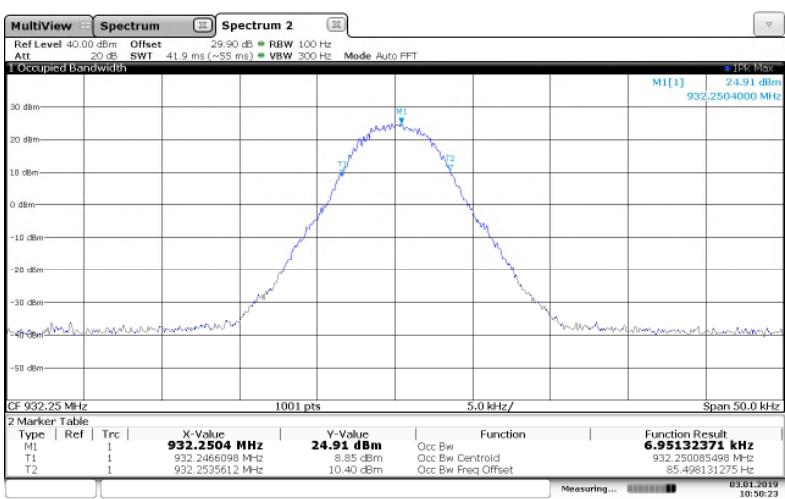

10:50:24 03.01.2019

Figure 7.3.2-21: 932.25 MHz — 4SFSK(Half Baud) Mode

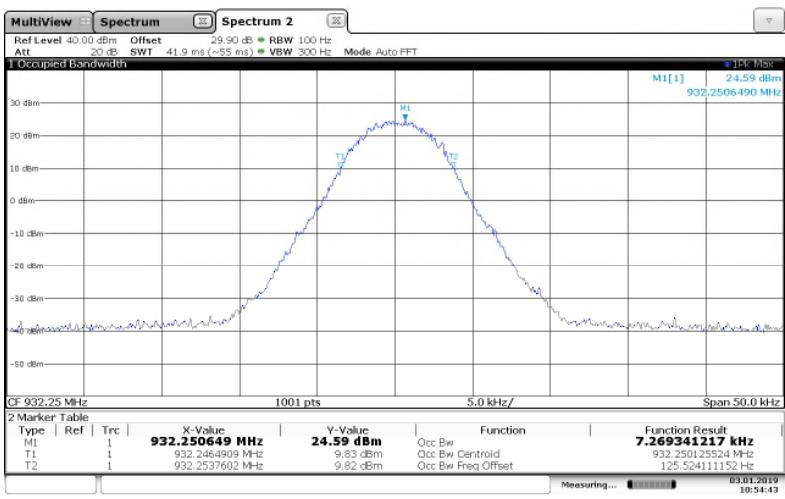

10:54:43 03.01.2019

Figure 7.3.2-22: 932.25 MHz — 8SFSK(Half Baud) Mode

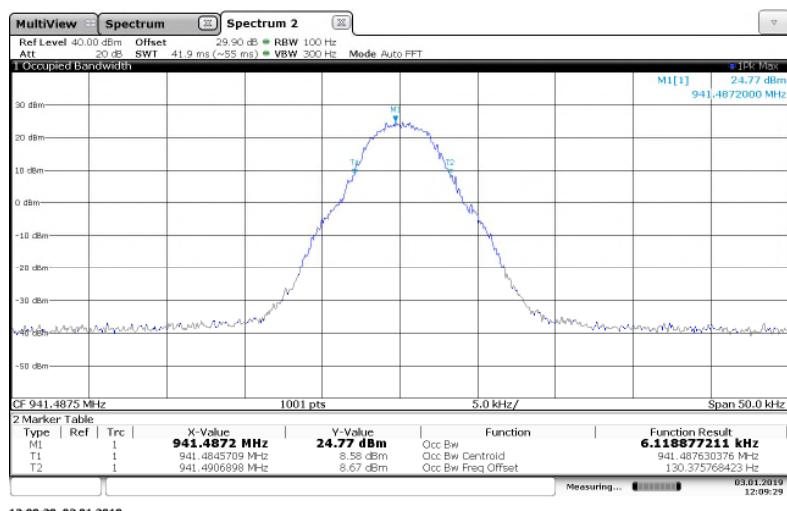


Figure 7.3.2-23: 941.4875 MHz – m4Pass 10k Mode

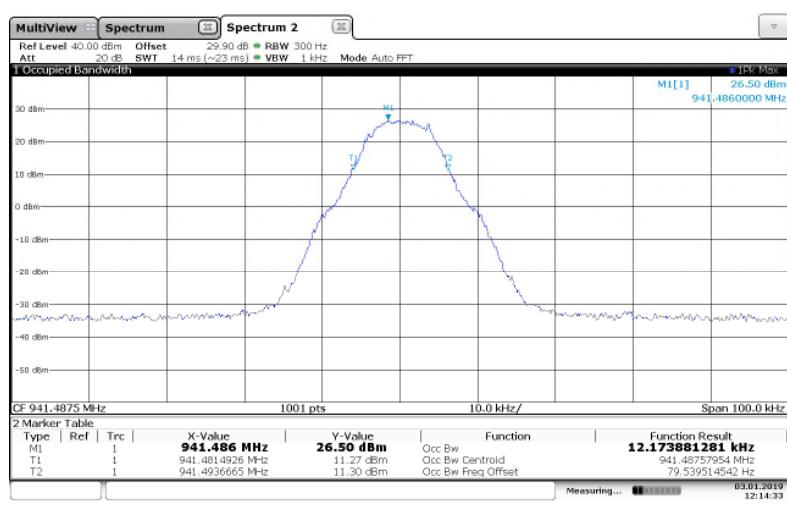


Figure 7.3.2-24: 941.4875 MHz – m4Pass 20k Mode

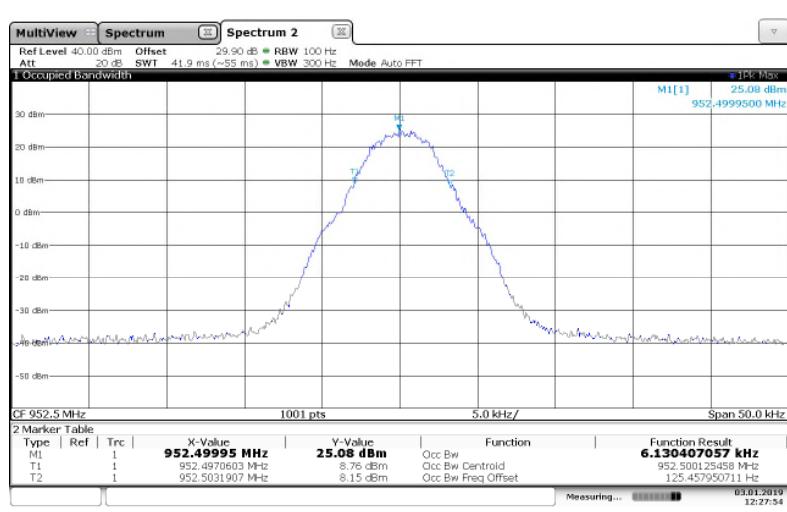


Figure 7.3.2-25: 952.5 MHz – m4Pass 10k Mode

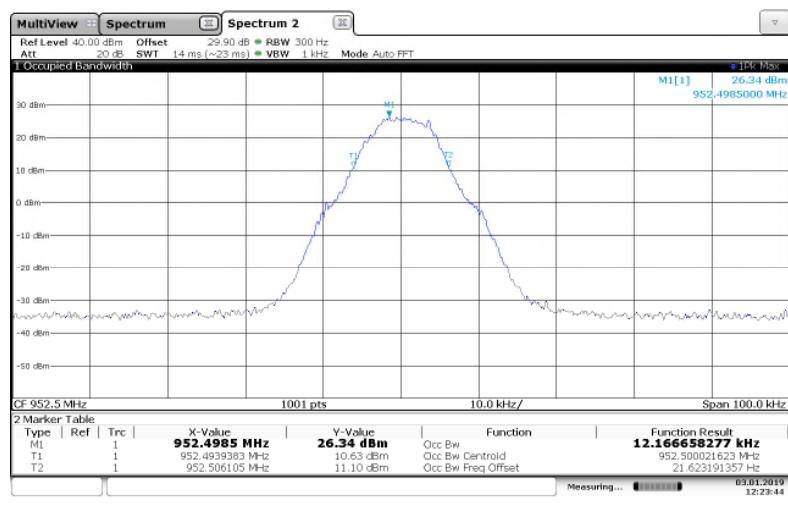


Figure 7.3.2-26: 952.5 MHz – m4Pass 20k Mode

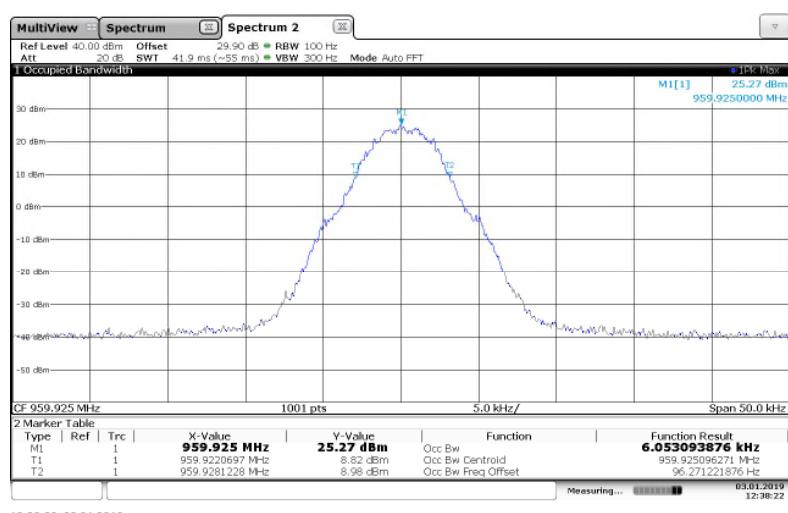


Figure 7.3.2-27: 959.925 MHz– m4Pass 10k Mode

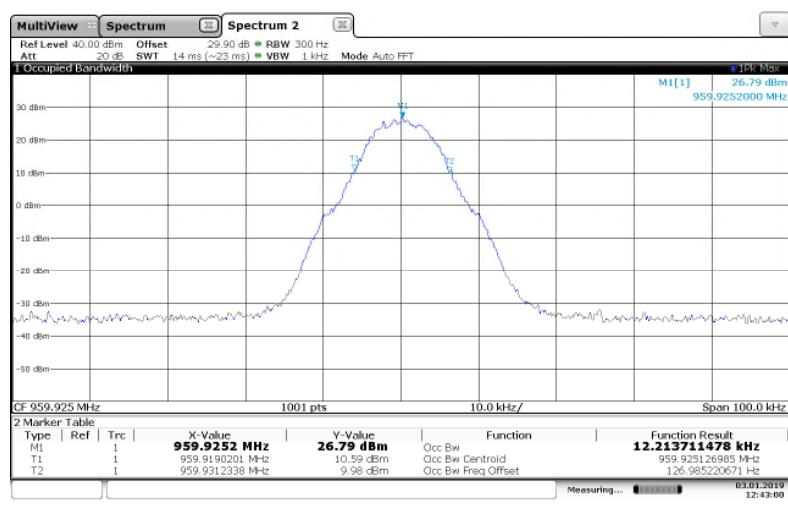


Figure 7.3.2-28: 959.925 MHz– m4Pass 20k Mode

## 7.4 Spurious Emissions at Antenna Terminals

### 7.4.1 Measurement Procedure (ANSI 63.26: 2015 Section 5.7.4)

The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer through 29.9dB of passive attenuation. The spectrum analyzer resolution bandwidth was set to 100 kHz below 1000 MHz and 1 MHz above 1000 MHz. The internal correction factors of the spectrum analyzer were employed to correct for any cable, attenuator or filter losses. The spectrum was investigated in accordance to CFR 47 Part 2.1057. There were no significant emissions from 9 kHz or lowest frequency generated to 30 MHz. Results are shown below.

### 7.4.2 Measurement Results

Performed by: Ben Ford

#### Part 24.133 a(1), a(2), ISED Canada RSS-134 4.4.1 (a), (b), 4.4.2 (a), (b) KDS/CBA

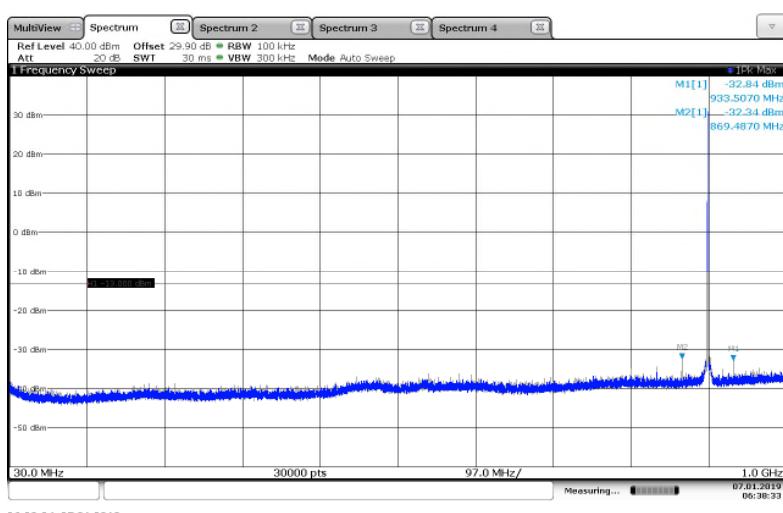


Figure 7.4.2-1: 901.5 MHz – 30MHz to 1GHz – Normal mode

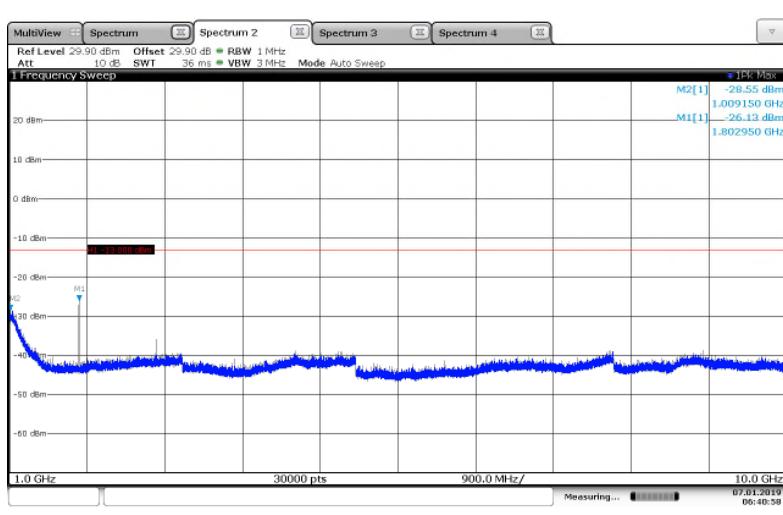


Figure 7.4.2-2: 901.5 MHz – 1GHz to 10GHz – Normal mode

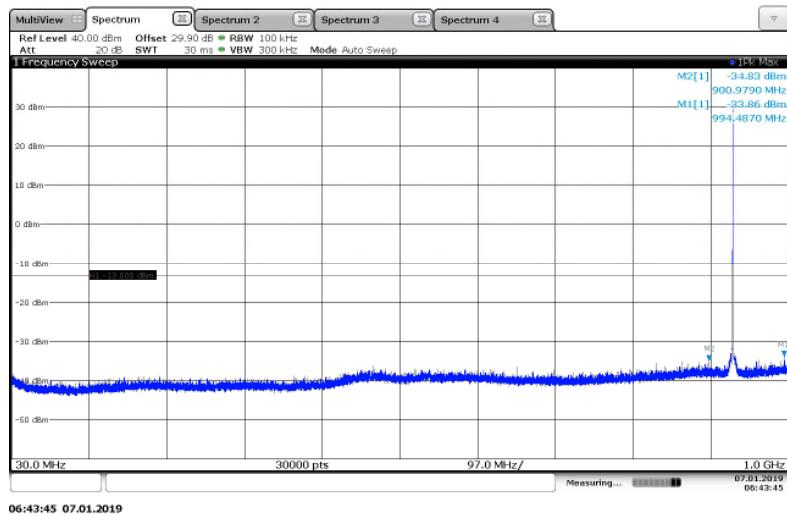


Figure 7.4.2-3: 930.5 MHz – 30MHz to 1GHz – mPass5k mode

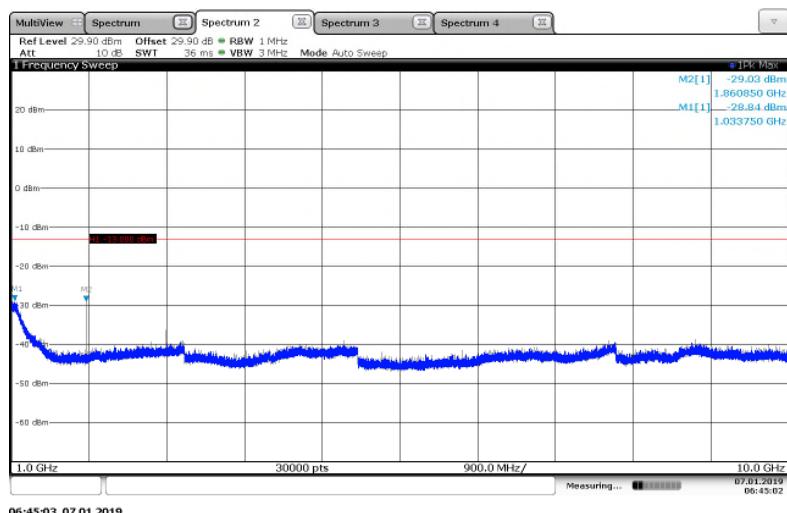


Figure 7.4.2-4: 930.5 MHz – 1GHz to 10GHz – mPass5k mode

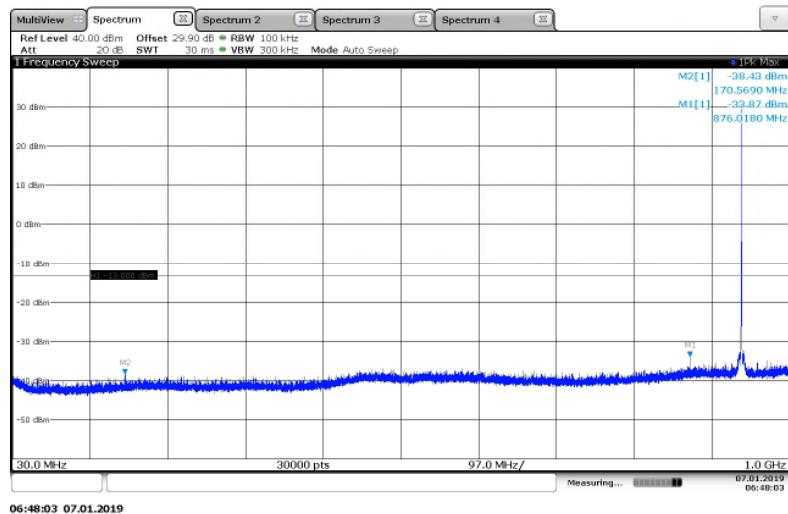


Figure 7.4.2-5: 940.0125 MHz – 30MHz to 1GHz – mPass5k mode

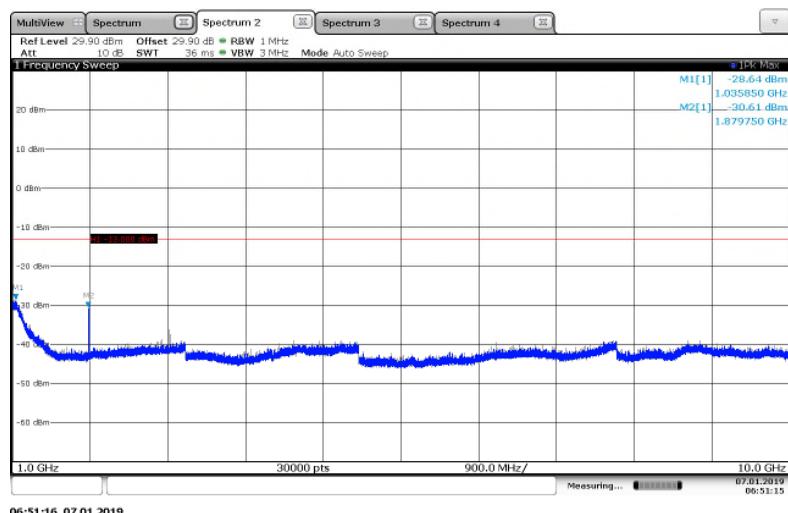
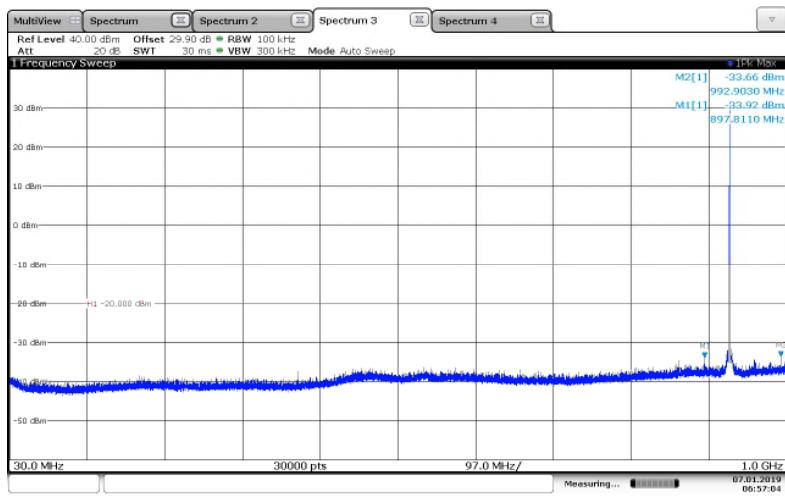
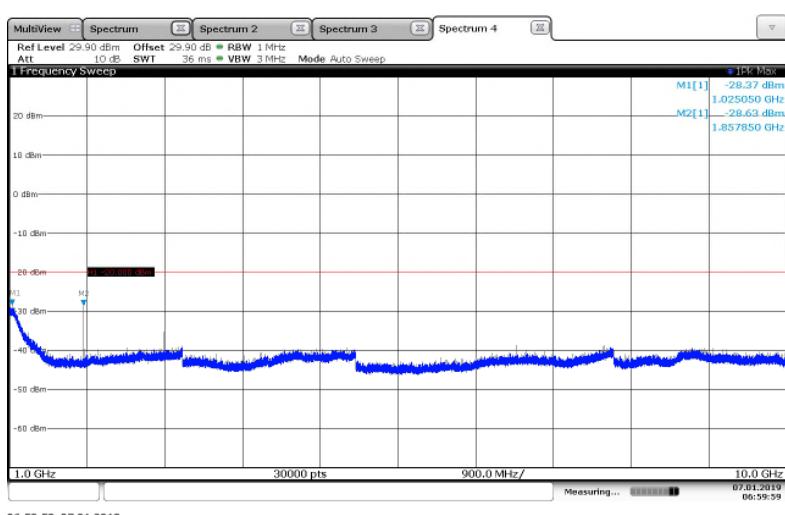


Figure 7.4.2-6: 940.0125 MHz – 1GHz to 10GHz – mPass5k mode

**Part 101.111 a(6), RSS-119 5.8.6****Figure 7.4.2-7: 928.925 MHz – 30MHz to 1GHz – Normal mode****Figure 7.4.2-8: 928.925 MHz – 1GHz to 10GHz – Normal mode**

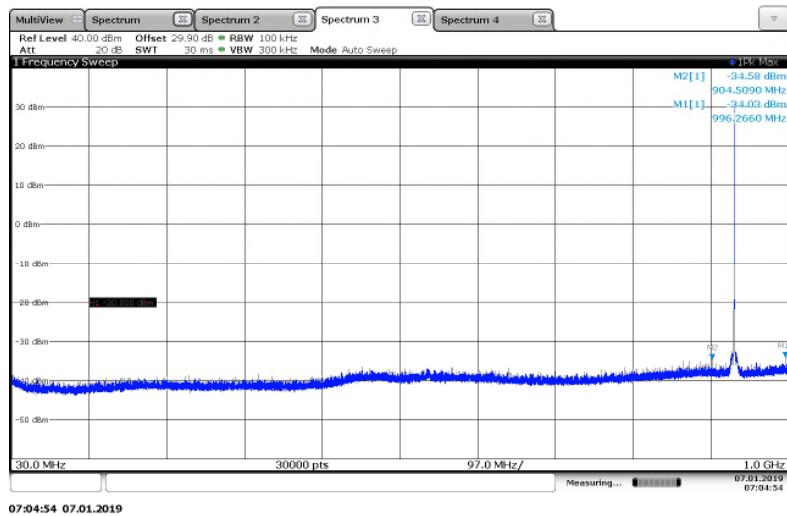


Figure 7.4.2-9: 932.25 MHz – 30MHz to 1GHz – Normal mode

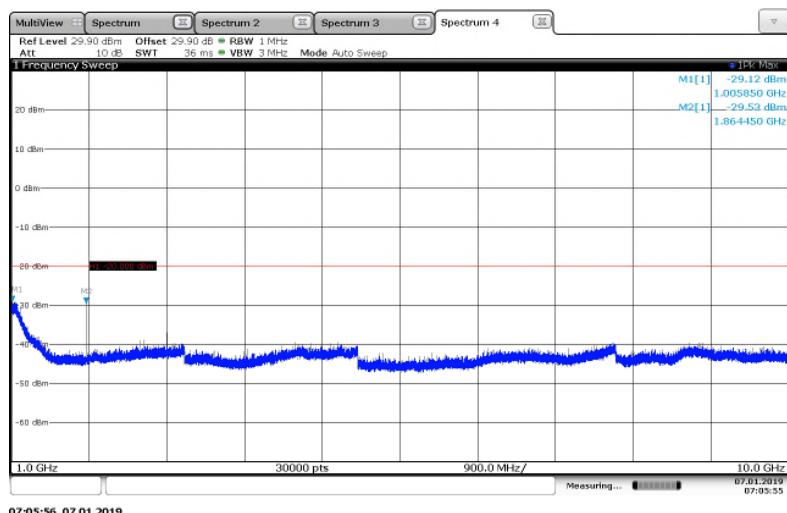


Figure 7.4.2-10: 932.25 MHz – 1GHz to 10GHz – Normal mode

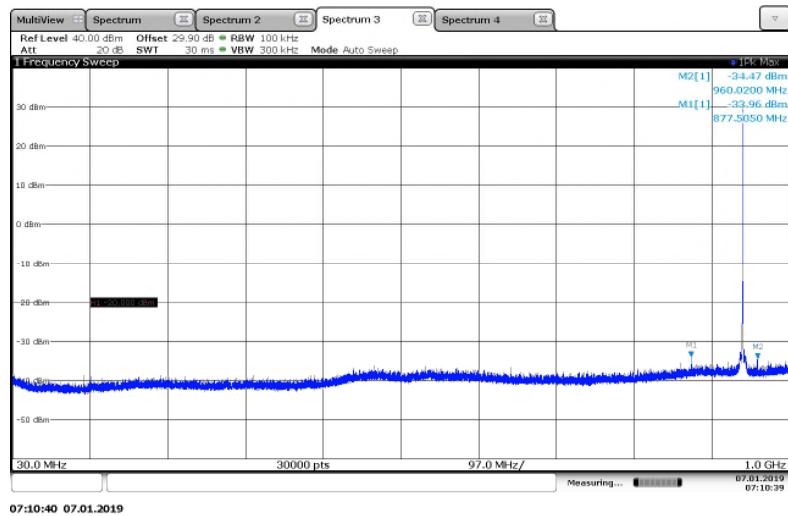


Figure 7.4.2-11: 941.4875 MHz – 30MHz to 1GHz – mPass5k mode

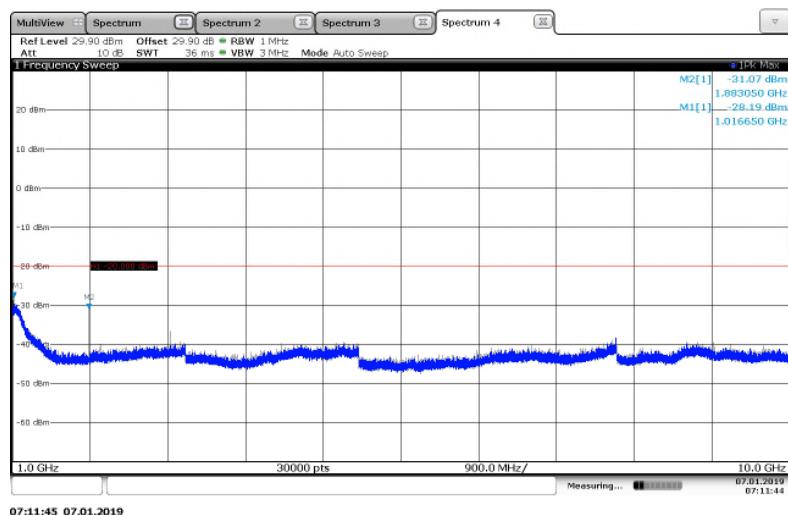


Figure 7.4.2-12: 941.4875 MHz – 1GHz to 10GHz – mPass5k mode

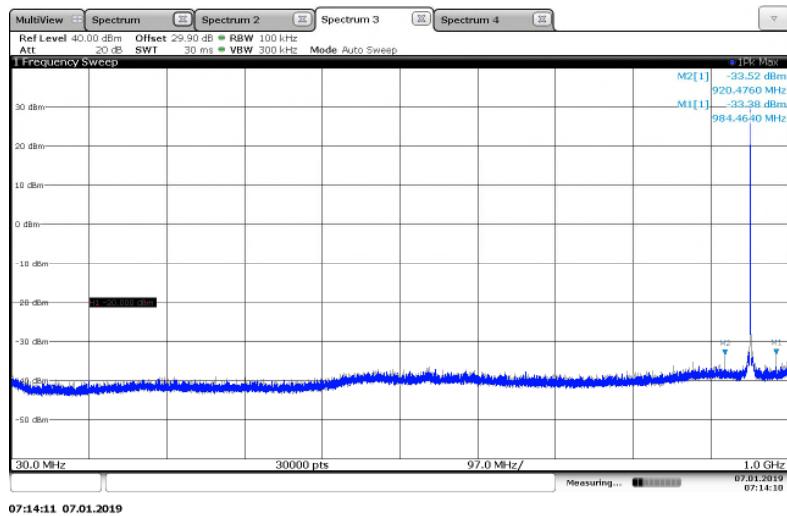


Figure 7.4.2-13: 952.5 MHz – 30MHz to 1GHz – mPass5k mode

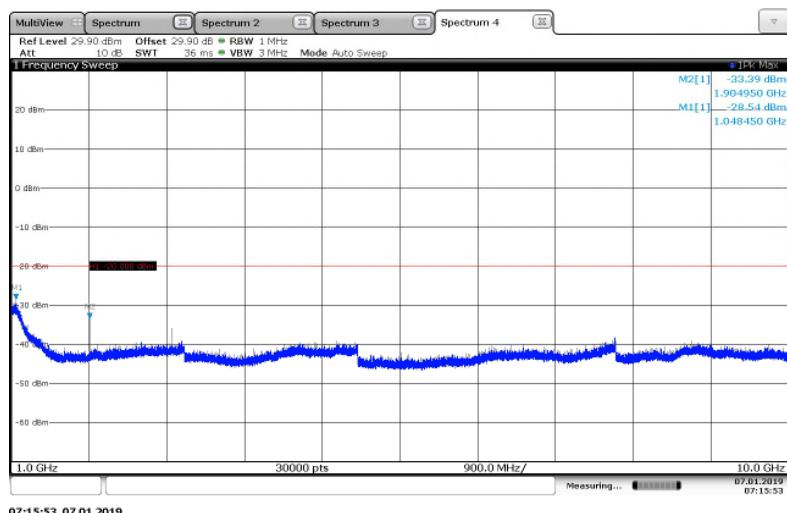


Figure 7.4.2-14: 952.5 MHz – 1GHz to 10GHz – mPass5k mode

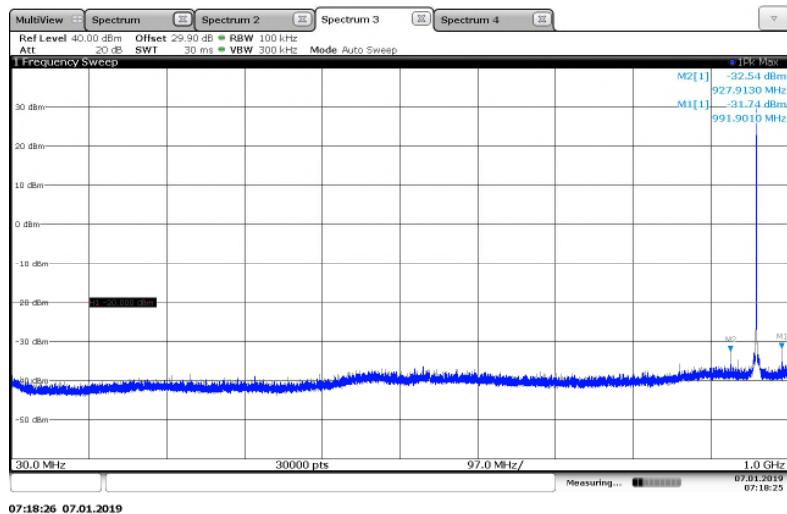


Figure 7.4.2-15: 959.925 MHz – 30MHz to 1GHz – mPass5k mode

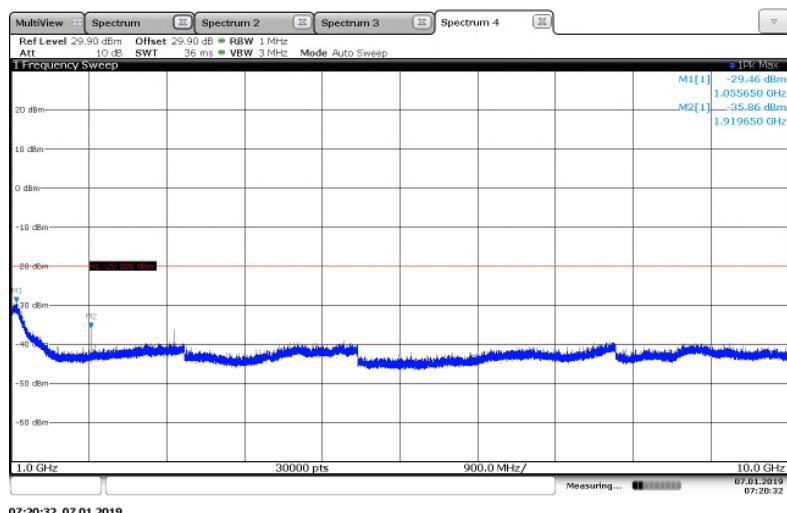


Figure 7.4.2-16: 959.925 MHz – 1GHz to 10GHz – mPass5k mode

## 7.5 Field Strength of Spurious Emissions

### 7.5.1 Measurement Procedure (ANSI 63.26: 2015 Section 5.5.2.3.1)

The equipment under test is placed in the Semi-Anechoic Chamber (described in section 2.3.1) on a table at the turntable center. Below 1 GHz the table height was 80cm and above 1 GHz the table height was 1.5m. For each spurious emission, the antenna mast is raised and lowered from one (1) to four (4) meters and the turntable is rotated 360° and the maximum reading on the spectrum analyzer is recorded. This was repeated for both horizontal and vertical polarizations of the receive antenna.

The equipment under test is then replaced with a substitution antenna fed by a signal generator. The signal generator's frequency is set to that of the spurious emission recorded from the equipment under test. The antenna mast is raised and lowered from one (1) to four (4) meters to obtain a maximum reading on the spectrum analyzer. The output of the signal generator is then adjusted until the reading on the spectrum analyzer matches that obtained from the equipment under test. The signal generator level is recorded. The power in dBm of each spurious emission is calculated by correcting the signal generator level for the cable loss and gain of the substitution antenna referenced to a dipole. The spectrum was investigated in accordance to CFR 47 Part 2.1057.

The magnitude of all spurious emissions not reported were attenuated below the noise floor of the measurement system and therefore not specified in this report. Results are shown below.

### 7.5.2 Measurement Results

Performed by: Charlie Callis

#### Part 24.133 a(1), a(2), RSS-134 4.4.1 (a), (b), 4.4.2 (a), (b)

KDS/CBA

Table 7.5.2-1: Field Strength of Spurious Emissions – 901.5 MHz – Normal Mode

Frequency (MHz)	Spectrum Analyzer Level (dB $\mu$ V)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
869.5	36.6	H	-41.96	-13.00	28.96
933.5	39.8	H	-36.72	-13.00	23.72
1145	65.1	H	-38.94	-13.00	25.94
1803	80.5	H	-21.77	-13.00	8.77
1803	77.4	V	-25.07	-13.00	12.07
2704.5	61.3	H	-39.59	-13.00	26.59
2704.5	53.5	V	-48.29	-13.00	35.29

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

**Table 7.5.2-2: Field Strength of Spurious Emissions – 930.5 MHz – mPass 5k Mode**

Frequency (MHz)	Spectrum Analyzer Level (dB $\mu$ V)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
901	35.5	H	-41.68	-13.00	28.68
994.5	40.1	H	-35.72	-13.00	22.72
1141.8	67.4	H	-36.55	-13.00	23.55
1861	67.3	H	-35.78	-13.00	22.78
1861	62.7	V	-39.88	-13.00	26.88
2791.5	53.7	H	-47.55	-13.00	34.55
2791.5	49.2	V	-52.85	-13.00	39.85

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

**Table 7.5.2-3: Field Strength of Spurious Emissions – 940.0125 MHz – mPass 5k Mode**

Frequency (MHz)	Spectrum Analyzer Level (dB $\mu$ V)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
908	36.7	H	-40.39	-13.00	27.39
960	34.3	H	-41.85	-13.00	28.85
1141	68.9	H	-35.05	-13.00	22.05
1880.025	63	H	-40.09	-13.00	27.09
1880.025	58.4	V	-44.39	-13.00	31.39
2820.0375	51.7	H	-49.97	-13.00	36.97
2820.0375	45.7	V	-58.27	-13.00	45.27

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

**Part 101.111 a(5) & (6), RSS-119 5.8.6****Table 7.5.2-4: Field Strength of Spurious Emissions – 928.925 MHz – Normal Mode**

Frequency (MHz)	Spectrum Analyzer Level (dB $\mu$ V)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
896.9	35.8	H	-41.25	-20.00	21.25
992.9	41.4	H	-34.12	-20.00	14.12
1139.4	67	H	-36.96	-20.00	16.96
1857.85	71.7	H	-30.88	-20.00	10.88
1857.85	60.5	V	-41.88	-20.00	21.88
2786.775	53.7	H	-47.65	-20.00	27.65
2786.775	47.3	V	-55.35	-20.00	35.35

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

**Table 7.5.2-5: Field Strength of Spurious Emissions – 932.25 MHz – Normal Mode**

Frequency (MHz)	Spectrum Analyzer Level (dB $\mu$ V)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
904.5	35.3	H	-41.89	-20.00	21.89
996.3	33.9	H	-42.53	-20.00	22.53
1141.8	66.9	H	-37.05	-20.00	17.05
1864.5	66.5	H	-36.28	-20.00	16.28
1864.5	59.1	V	-43.28	-20.00	23.28
2796.75	53.1	H	-48.25	-20.00	28.25
2796.75	48.9	V	-53.35	-20.00	33.35

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

**Table 7.5.2-6: Field Strength of Spurious Emissions – 941.4875 MHz – mPass 5k Mode**

Frequency (MHz)	Spectrum Analyzer Level (dB $\mu$ V)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
909.5	36.2	H	-40.94	-20.00	20.94
960	35.3	H	-40.75	-20.00	20.75
1144.2	68.6	H	-35.34	-20.00	15.34
1882.975	62.3	H	-40.69	-20.00	20.69
1882.975	57.8	V	-44.99	-20.00	24.99
2824.4625	51.7	H	-49.97	-20.00	29.97
2824.4625	46.8	V	-56.27	-20.00	36.27

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

**Table 7.5.2-7: Field Strength of Spurious Emissions – 952.5 MHz – mPass 5k Mode**

Frequency (MHz)	Spectrum Analyzer Level (dB $\mu$ V)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
920.5	38.5	H	-38.54	-20.00	18.54
984.5	39.3	H	-36.50	-20.00	16.50
1147.4	70.6	H	-33.23	-20.00	13.23
1905	59.6	H	-43.19	-20.00	23.19
1905	54	V	-49.19	-20.00	29.19
2857.5	50.1	H	-51.89	-20.00	31.89
2857.5	44.7	V	-61.09	-20.00	41.09

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

**Table 7.5.2-8: Field Strength of Spurious Emissions – 959.925 MHz – mPass 5k Mode**

Frequency (MHz)	Spectrum Analyzer Level (dB $\mu$ V)	Antenna Polarity (H/V)	Spurious ERP (dBm)	Limit (dBm)	Margin (dB)
927.9	38.5	H	-38.31	-20.00	18.31
991.9	39.3	H	-36.26	-20.00	16.26
1143.4	71.1	H	-32.74	-20.00	12.74
1919.85	60.6	H	-42.69	-20.00	22.69
1919.85	53.7	V	-49.29	-20.00	29.29
2879.775	49	H	-52.91	-20.00	32.91
2879.775	45	V	-59.01	-20.00	39.01

NOTE: All frequencies not listed were below the noise floor of the spectrum analyzer.

**8.0 MEASUREMENT UNCERTAINTY**

The expanded laboratory measurement uncertainty figures ( $U_{\text{Lab}}$ ) provided below correspond to an expansion factor (coverage factor)  $k = 1.96$  which provide confidence levels of 95%.

Parameter	$U_{\text{lab}}$
Occupied Channel Bandwidth	$\pm 0.004\%$
RF Conducted Output Power	$\pm 0.689 \text{ dB}$
Power Spectral Density	$\pm 0.5 \text{ dB}$
Antenna Port Conducted Emissions	$\pm 2.717 \text{ dB}$
Radiated Emissions	$\pm 5.877 \text{ dB}$
Temperature	$\pm 0.860 \text{ }^{\circ}\text{C}$
Radio Frequency	$\pm 2.832 \times 10^{-8}$
AC Power Line Conducted Emissions	$\pm 2.85$

**9.0 CONCLUSION**

In the opinion of TÜV SÜD America Inc. the model FXZIG210, manufactured by Sensus Metering Systems, Inc., meets all the requirements of FCC Part 24D and Part 101 as well as ISED Canada RSS-119 and RSS-134 where applicable.

End Report