

Transmitter Certification Test Report

Class II Permissive Change

FCC ID: SDBGFL

IC ID: 2220A-GFL

**FCC Rule Part: CFR 47 Part 24 Subpart D, Part 90 Subpart I, Part 101
Subpart C**

IC Standards Specification: RSS-119, RSS-134

ACS Report Number: 07-0397-LD

Applicant: Sensus Metering Systems

Model(s): GFL

Test Begin Date: September 11, 2007

Test End Date: September 29, 2007

Report Issue Date: October 1, 2007



FOR THE SCOPE OF ACCREDITATION UNDER LAB Code 200612-0

This report is not be used to claim certification, approval, or endorsement by NVLAP, NIST or any government agency.

Prepared by: _____

Jeff Woods
Wireless Certifications Engineer
ACS, Inc.

Reviewed by: _____

J. Kirby Munroe
Manager Wireless Certifications
ACS, Inc.

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

This report contains 20 pages

Table of Contents

1.0 General	3
1.1 Purpose	3
1.2 Product Description	3
1.3 Description of Changes	3
1.4 Test Methodology	4
1.4.1 General	4
1.4.2 In-Band Testing Methodology	4
1.5 Emission Designators	4
2.0 Test Facilities	5
2.1 Location	5
2.2 Laboratory Accreditations/Recognitions/Certifications	5
2.3 Radiated Emissions Test Site Description	6
2.3.1 Semi-Anechoic Chamber Test Site	6
2.3.2 Open Area Tests Site (OATS)	7
2.4 Conducted Emissions Test Site Description	8
3.0 Applicable Standards and References	8
4.0 List of Test Equipment	9
5.0 Support Equipment	10
6.0 EUT Setup and Block Diagram	10
7.0 Summary of Tests	11
7.1 Field Strength of Spurious Emissions	11
7.1.1 Measurement Procedure	11
7.1.2 Measurement Results	11
7.2 Radiated Emissions (Unintentional Radiators)	20
7.2.1 Measurement Procedure	20
7.2.2 Measurement Results	20
8.0 Conclusion	20
 <u>Additional Exhibits Included In Filing</u>	
Internal Photographs	
Test Setup Photographs	

1.0 GENERAL

1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 2 Subpart J, Part 24 Subpart D, Part 90 Subpart I, and Part 101 Subpart C of the FCC's Code of Federal Regulations and IC RSS-119 and RSS-134 for a Class II Permissive Change.

1.2 Product Description

Manufacturer:
Sensus Metering Systems
8601 Six Forks Road
Raleigh, NC 27615

Factory Contact:
Bob Davis
Sensus Metering Systems
114 Northpark Blvd
Suite 10
Covington, LA 70433
985-773-1236

The GFL Transmitter is a printed circuit board that provides wireless communication capability to Sensus gas meter products. The device monitors readings and diagnostic information collected from commercial and residential gas meters via industry standard switch closure or serial data interfaces. The GFL communicates via a fixed wireless telemetry network to provide meter readings and diagnostic data from the gas meters to the utility provider via a radio link. The device utilizes a printed circuit board antenna that is integral to the GFL circuit board and is battery operated.

There are three variations of the GFL transmitter module of which each was designed to be integrated into a different gas meter assembly and therefore the shape and size vary slightly. All three variations are covered in this report.

1.3 Description of Changes

A description of changes is provided in a separate cover letter document with this filing.

1.4 Test Methodology

1.4.1 General

The GFL Transmitter is designed as module to be integrated into gas meter assemblies. Three printed circuit boards were provided and tested for the purpose of certification. Each printed circuit board was designed to be integrated into a different gas meter assembly and therefore the shape and size vary slightly. The RF portion of each PCB is "electrically identical" and therefore all variations will be covered under a single FCC ID.

The three PCB variations tested and of which the test data is included in this report are identified by the following assembly and part numbers:

2200-1216-01, FlexNet 100G-FL
2200-1217-01, FlexNet 300G-FL
2200-1218-01, FlexNet 200G-FL

Based on changes from the originally certified device, only radiated emissions were evaluated for this report.

1.4.2 In-Band Testing Methodology

For testing in accordance with 47 CFR 2.1046-2.1057, OET/Lab recommends that the following be used to select test frequencies for licensed devices:

Frequency range over which device operates	Number of frequencies	Location in the range of operation
1 MHz or less	1	Middle
1 to 10 MHz	2	1 near top and 1 near bottom
10 to 100 MHz	3	1 near top, 1 near middle and 1 near bottom

The GFL Transmitter is designed to operate in multiple bands under the requirements of CFR 47 Parts 24, 90, and 101. The following is a list of the frequency bands of operation sorted based on the FCC rule parts in which the band is associated.

CFR Title 47 Rule Part	Frequency Band of Operation (MHz)
24D	901.0 - 902.0
24D	930.0 - 931.0
24D	940.0 - 941.0
90	896.0375 - 901.0
90	935.0 - 940.0
101	928.85 - 929.0
101	932.0 - 932.5
101	941.0 - 941.5
101	959.85 - 960.0

Based on the requirements set forth in accordance 47 CFR 2.1046-2.1057 as stated above, the methodology in selecting the places to test in the available bands of operation is outlined in the following table.

CFR Title 47 Rule Part	Frequency Band of Operation (MHz)	Location in the Range of Operation
90	896.0375 - 901.0	1 near top and 1 near bottom
24D	901.0 - 902.0	
101	928.85 - 929.0	Middle
24D	930.0 - 931.0	Middle
101	932.0 - 932.5	Middle
90	935.0 - 940.0	1 near top and 1 near bottom
24D	940.0 - 941.0	
101	941.0 - 941.5	
101	959.85 - 960.0	Middle

The data provided in this report is sorted based on the rule part.

1.5 Emission Designators

The GFL Transmitter produces four distinct modulation formats. The emissions designators for the four modulation types used by the GFL Transmitter are as follows:

Normal Mode: 9K60F2D
 Half-Baudrate Mode: 4K80F2D
 Boost Mode: 1K10F2D
 MPass Mode: 5K90F1D

2.0 TEST FACILITIES

2.1 Location

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions
5015 B.U. Bowman Drive
Buford, GA 30518
Phone: (770) 831-8048
Fax: (770) 831-8598

2.2 Laboratory Accreditations/Recognitions/Certifications

The Semi-Anechoic Chamber Test Site, Open Area Test Site (OATS) and Conducted Emissions Site have been fully described, submitted to, and accepted by the FCC, Industry Canada and the Japanese Voluntary Control Council for Interference by information technology equipment. In addition, ACS is compliant to ISO 17025 as certified by the National Institute of Standards and Technology under their National Voluntary Laboratory Accreditation Program. The following certification numbers have been issued in recognition of these accreditations and certifications:

FCC Registration Number: 894540
Industry Canada Lab Code: IC 4175
VCCI Member Number: 1831
- VCCI OATS Registration Number R-1526
- VCCI Conducted Emissions Site Registration Number: C-1608
NVLAP Lab Code: 200612-0

2.3 Radiated Emissions Test Site Description

2.3.1 Semi-Anechoic Chamber Test Site

The Semi-Anechoic Chamber Test Site consists of a 20' x 30' x 18' shielded enclosure. The chamber is lined with Toyo Ferrite Grid Absorber, model number FFG-1000. The ferrite tile grid is 101 x 101 x 19mm thick and weighs approximately 550 grams. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber.

The turntable is 150cm in diameter and is located 160cm from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is all steel, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Behind the turntable is a 3' x 6' x 4' deep shielded pit used for support equipment if necessary. The pit is equipped with 1 - 4" PVC chases from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3-1 below:

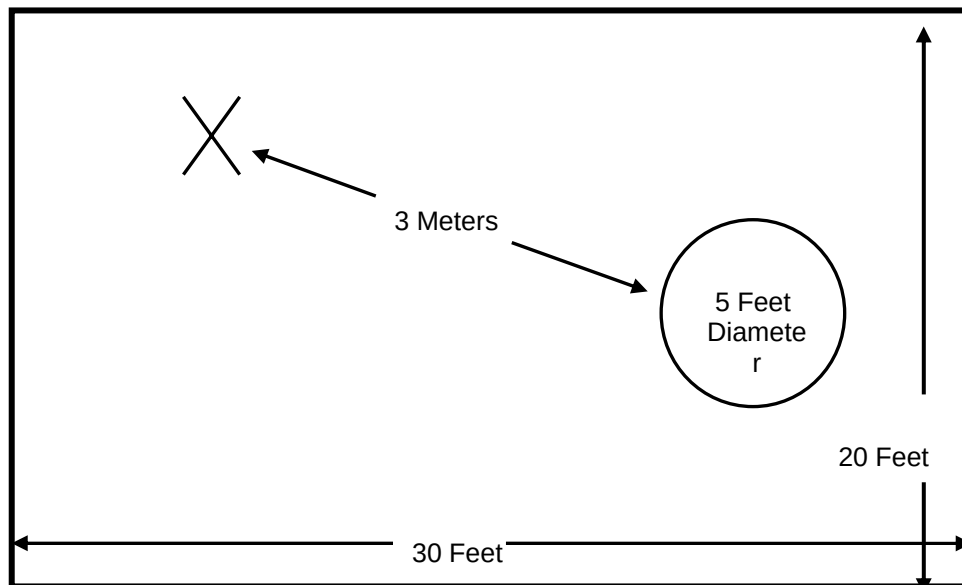


Figure 2.3-1: Semi-Anechoic Chamber Test Site

2.3.2 Open Area Tests Site (OATS)

The open area test site consists of a 40' x 66' concrete pad covered with a perforated electro-plated galvanized sheet metal. The perforations in the sheet metal are 1/8" holes that are staggered every 3/16". The individual sheets are placed to overlap each other by 1/4" and are riveted together to provide a continuous seam. Rivets are spaced every 3" in a 3 x 20 meter perimeter around the antenna mast and EUT area. Rivets in the remaining area are spaced as necessary to properly secure the ground plane and maintain the electrical continuity.

The entire ground plane extends 12' beyond the turntable edge and 16' beyond the antenna mast when set to a 10 meter measurement distance. The ground plane is grounded via 4 - 8' copper ground rods, each installed at a corner of the ground plane and bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is an all aluminum 10' flush mounted table installed in an all aluminum frame. The table is remotely operated from inside the control room located 40' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Adjacent to the turntable is a 7' x 7' square and 4' deep concrete pit used for support equipment if necessary. The pit is equipped with 5 - 4" PVC chases from the pit to the control room that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit. The pit is covered with 2 sheets of 1/4" diamond style reinforced steel sheets. The sheets are painted to match the perforated steel ground plane; however the underside edges have been masked off to maintain the electrical continuity of the ground plane. All reflecting objects are located outside of the ellipse defined in ANSI C63.4.

A diagram of the Open Area Test Site is shown in Figure 2.3-2 below:

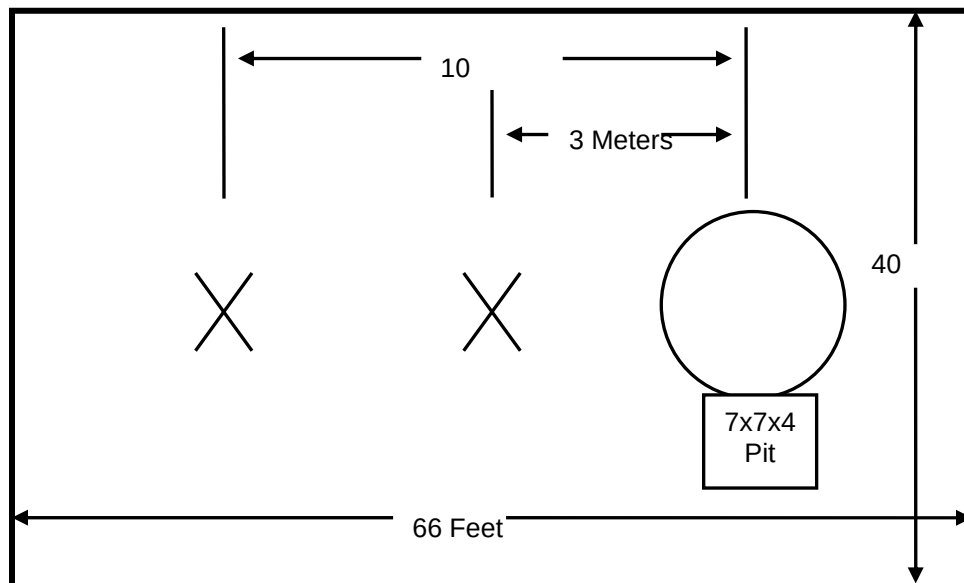


Figure 2.3-2: Open Area Test Site

2.4 Conducted Emissions Test Site Description

The AC mains conducted EMI site is located in the main EMC lab. It consists of an 8' x 8' solid aluminum horizontal ground reference plane (GRP) bonded every 3" to an 8' X 8' vertical ground plane.

The site is of sufficient size to test table top and floor standing equipment in accordance with section 6.1.4 of ANSI C63.4.

A diagram of the room is shown below in figure 4.1.3-1:

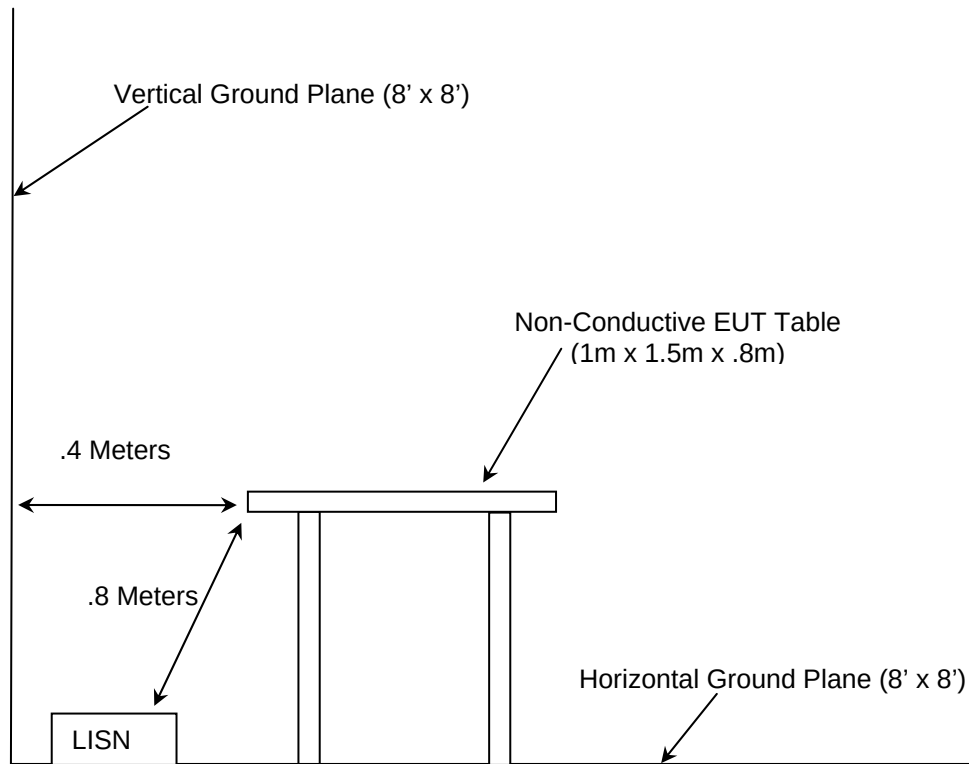


Figure 2.4-1: AC Mains Conducted EMI Site

3.0 APPLICABLE STANDARD REFERENCES

The following standards were used:

- 1 - ANSI C63.4-2003: Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the 9KHz to 40GHz - 2003
- 2 - US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures - 2006
- 3 - US Code of Federal Regulations (CFR): Title 47, Part 24, Subpart D: Personal Communication Service - 2006
- 4 - US Code of Federal Regulations (CFR): Title 47, Part 90, Subpart I: Private Land Mobile Radio Services - 2006
- 5 - US Code of Federal Regulations (CFR): Title 47, Part 101, Subpart C: Fixed Microwave Services – 2006
- 6 – TIA-603-C: Land Mobile FM or PM - Communications Equipment - Measurement and Performance Standards – 2004
- 7 - Industry Canada Radio Standards Specification: RSS-119 - Land Mobile and Fixed Radio Transmitters and Receivers Operating in the Frequency Range 27.41-960 MHz - Issue 9, June 2007
- 8 - Industry Canada Radio Standards Specification: RSS-134 - 900 MHz Narrowband Personal Communications Services - Issue 1, Revision 1, March 25, 2000

4.0 LIST OF TEST EQUIPMENT

All test equipment used for regulatory testing is calibrated yearly or according to manufacturer's specifications.

Table 4-1: Test Equipment

Equipment Calibration Information					
ACS#	Mfg.	Eq. type	Model	S/N	Cal. Due
25	Chase	Bi-Log Antenna	CBL6111	1043	6/6/08
22	Agilent	Pre-Amplifier	8449B	3008A00526	4/10/08
73	Agilent	Pre-Amplifier	8447D	272A05624	5/8/08
30	Spectrum Technologies	Horn Antenna	DRH-0118	970102	5/10/08
329	A.H. Systems	Horn Antenna	SAS-571	721	8/13/08
337	Microwave Circuits	High Pass Filter	H1G513G1	282706	8/28/08
3	Rohde & Schwarz	Receiver Display	804.8932.52	839379/011	10/24/07
4	Rohde & Schwarz	ESMI Receiver	1032.5640.53	833827/003	10/24/07
283	Rohde & Schwarz	Spectrum Analyzer	FSP-40	100033	11/9/08
222	Andrew	F1-SMSM	473703-A0138A	Cables	08/27/08
290	Florida RF Labs	HF RF Cable	SMSE-200-72.0-SMRE	NA	5/15/08
291	Florida RF Labs	HF RF Cable	SMRE-200W-12.0-SMRE	NA	5/15/08
292	Florida RF Labs	HF RF Cable	SMR-280AW-480.0-SMR	NA	5/24/08
167	ACS	Chamber EMI Cable Set	RG6	167	1/5/08
NA	Agilent	8257D	MY45470442	Signal Generator	3/24/08

5.0 SUPPORT EQUIPMENT

Table 5-1: Support Equipment

Diagram #	Manufacturer	Equipment Type	Model Number	Serial Number	FCC ID
1	Sensus	EUT	GFL	None	SDB5GFL
2	OK Industries	DC Power Supply	PS73C	36095	None

6.0 EQUIPMENT UNDER TEST SETUP AND BLOCK DIAGRAM

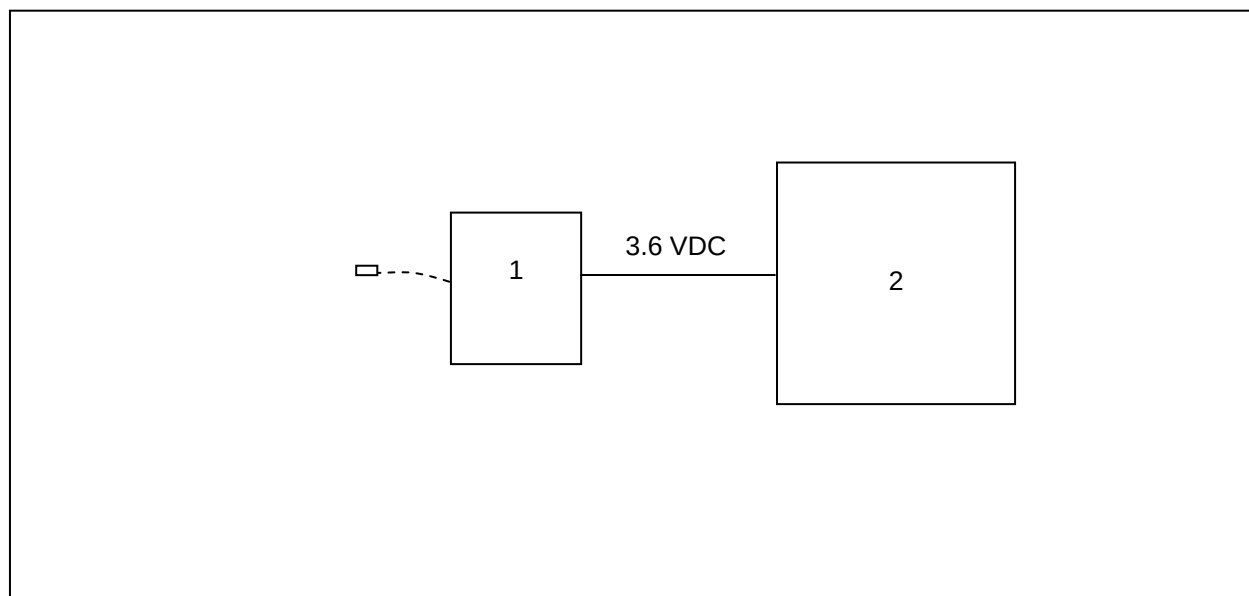


Figure 6-1: EUT Test Setup

* For transmitter radiated spurious emissions measurements, the GFL Transmitter was modified with an external RF connector to the PCB. The GFL Transmitter utilizes a printed antenna integral to the transmitter PCB for normal operation but for testing purposes a 50-Ohm test point is available on the PCB. The test point provides proper power level measurements only when the antenna is disconnected and a 50-Ohm test cable is soldered (with the appropriate ground connection) to the PCB. The EUT test cable was connected to non-radiating 50 Ohm load.

For the purpose of testing to Part 15 for unintentional radiators, the EUT was test with the integral antenna connected.

7.0 SUMMARY OF TESTS

7.1 Field Strength of Spurious Emissions

7.1.1 Measurement Procedure

The equipment under test is placed in the Semi-Anechoic Chamber (described in section 2.3.1) on a wooden table at the turntable center. For each spurious emission, the antenna mast is raised and lowered from one (1) to four (4) meters and the turntable is rotated 360° and the maximum reading on the spectrum analyzer is recorded. This was repeated for both horizontal and vertical polarizations of the receive antenna.

The equipment under test is then replaced with a substitution antenna fed by a signal generator. The signal generator's frequency is set to that of the spurious emission recorded from the equipment under test. The antenna mast is raised and lowered from one (1) to four (4) meters to obtain a maximum reading on the spectrum analyzer. The output of the signal generator is then adjusted until the reading on the spectrum analyzer matches that obtained from the equipment under test. The signal generator level is recorded. The power in dBm of each spurious emission is calculated by correcting the signal generator level for the cable loss and gain of the substitution antenna referenced to a dipole. The spectrum was investigated in accordance to CFR 47 Part 2.1057.

Data was collected at frequencies according to Section 1.3.2 on all three PCB variations. Results of the test are shown below. The magnitude of all spurious emissions not reported were attenuated below the noise floor of the measurement system and therefore not specified in this report.

7.1.2 Measurement Results

7.1.2.1 2200-1217-01 GFL Board:

PART 24

Table 7.1.2.1-1: Field Strength of Spurious Emissions – 901.9875 MHz – Normal Mode

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Generator Level (dBm)	Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
1803.975	-55.42	-57.00	H	5.10	-51.90	-13.00	38.90
1803.975	-53.9	-56	V	5.20	-50.80	-13.00	37.80
2705.9625	-58.39	-61	H	5.52	-55.48	-13.00	42.48
2705.9625	-55.24	-54	V	5.42	-48.58	-13.00	35.58
4509.9375	-50.87	-43	H	7.19	-35.81	-13.00	22.81
4509.9375	-52.7	-45	V	6.99	-38.01	-13.00	25.01
5411.925	-57.25	-52	H	6.75	-45.25	-13.00	32.25
5411.925	-54.68	-45	V	6.61	-38.39	-13.00	25.39
7215.9	-56.49	-44	H	5.83	-38.17	-13.00	25.17
8117.8875	-44.32	-28.74	H	6.25	-22.49	-13.00	9.49
8117.8875	-48.72	-34.11	V	6.25	-27.86	-13.00	14.86

Table 7.1.2.1-2: Field Strength of Spurious Emissions – 930.5 MHz – MPass Mode

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Generator Level (dBm)	Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
1861	-55.30	-60.00	H	4.99	-55.01	-13.00	42.01
1861	-54.48	-56	V	5.09	-50.91	-13.00	37.91
2791.5	-55.2	-55	H	5.63	-49.37	-13.00	36.37
2791.5	-55.4	-53	V	5.53	-47.47	-13.00	34.47
3722	-56.9	-55	H	6.66	-48.34	-13.00	35.34
3722	-57.73	-54	V	6.61	-47.39	-13.00	34.39
4652.5	-45.47	-36	H	6.91	-29.09	-13.00	16.09
4652.5	44.15	-35	V	6.68	-28.32	-13.00	15.32
5583	-57.33	-56	H	6.84	-49.16	-13.00	36.16
5583	-56.64	-50	V	6.76	-43.24	-13.00	30.24
7444	-47.02	-32.1	H	5.94	-26.16	-13.00	13.16
7444	-51.51	-37	V	6.04	-30.96	-13.00	17.96
8374.5	-49.33	-33.22	H	6.28	-26.94	-13.00	13.94
8374.5	-53.21	-37	V	6.28	-30.72	-13.00	17.72

PART 90**Table 7.1.2.1-3: Field Strength of Spurious Emissions – 896.0125MHz – Normal Mode**

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Generator Level (dBm)	Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
1792.025	-54.66	-56.00	H	5.12	-50.88	-20.00	30.88
1792.025	-56.29	-59	V	5.22	-53.78	-20.00	33.78
2688.0375	-56.67	-57	H	5.50	-51.50	-20.00	31.50
2688.0375	-55.2	-54	V	5.40	-48.60	-20.00	28.60
3584.15	-57.43	-57	H	6.84	-50.16	-20.00	30.16
4480.0625	-54.38	-50	H	7.17	-42.83	-20.00	22.83
4480.0625	-55.37	-51	V	6.98	-44.02	-20.00	24.02
5376.075	-55.7	-50	H	6.70	-43.30	-20.00	23.30
5376.075	-54.1	-46	V	6.55	-39.45	-20.00	19.45
7168.1	-56.48	-47	H	5.81	-41.19	-20.00	21.19
7168.1	-57.96	-46	V	5.91	-40.09	-20.00	20.09
8064.1125	-44.1	-29.2	H	6.25	-22.95	-20.00	2.95
8064.1125	-51.06	-37	V	6.25	-30.75	-20.00	10.75
8960.375	-57.71	-47	H	6.43	-40.57	-20.00	20.57

Table 7.1.2.1-4: Field Strength of Spurious Emissions – 935.0125MHz – MPass Mode

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Generator Level (dBm)	Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
1870.025	-56.36	-60.00	H	4.97	-55.03	-20.00	35.03
1870.025	-52.93	-55	V	5.07	-49.93	-20.00	29.93
2805.0375	-54.5	-53	H	5.65	-47.35	-20.00	27.35
2805.0375	-55.24	-55	V	5.55	-49.45	-20.00	29.45
4675.0625	-45.01	-35	H	6.86	-28.14	-20.00	8.14
4675.0625	-46.4	-37	V	6.63	-30.37	-20.00	10.37
7480.1	-46.35	-29.52	H	5.95	-23.57	-20.00	3.57
7480.1	-49.96	-36	V	6.05	-29.95	-20.00	9.95
8415.1125	-48.8	-32.33	H	6.29	-26.04	-20.00	6.04
8415.1125	-52.12	-36	V	6.29	-29.71	-20.00	9.71

PART 101**Table 7.1.2.1-5: Field Strength of Spurious Emissions – 928.925MHz – Normal Mode**

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Generator Level (dBm)	Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
1857.85	-54.81	-58.00	H	4.99	-53.01	-13.00	40.01
1857.85	-52.96	-54	V	5.09	-48.91	-13.00	35.91
2786.775	-55.44	-56	H	5.62	-50.38	-13.00	37.38
2786.775	-57.32	-55	V	5.52	-49.48	-13.00	36.48
4644.625	-45.39	-35	H	6.92	-28.08	-13.00	15.08
4644.625	-45.16	-35	V	6.70	-28.30	-13.00	15.30
7431.4	-47.32	-31.68	H	5.93	-25.75	-13.00	12.75
7431.4	-51.64	-39	V	6.03	-32.97	-13.00	19.97
8360.325	-49.15	-34.05	H	6.28	-27.77	-13.00	14.77
8360.325	-51.79	-36	V	6.28	-29.72	-13.00	16.72

Table 7.1.2.1-6: Field Strength of Spurious Emissions – 932.25MHz – Normal Mode

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Generator Level (dBm)	Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
1864.5	-56.94	-60.00	H	4.98	-55.02	-13.00	42.02
1864.5	-54.07	-57	V	5.08	-51.92	-13.00	38.92
2796.75	-55.11	-55	H	5.64	-49.36	-13.00	36.36
2796.75	-56.71	-56	V	5.54	-50.46	-13.00	37.46
4661.25	-45.06	-36	H	6.89	-29.11	-13.00	16.11
4661.25	-46.4	-37	V	6.66	-30.34	-13.00	17.34
7458	-46.66	-30.35	H	5.94	-24.41	-13.00	11.41
7458	-51.25	-38	V	6.04	-31.96	-13.00	18.96
8390.25	-50.29	-33.4	H	6.29	-27.11	-13.00	14.11
8390.25	-52.6	-37	V	6.29	-30.71	-13.00	17.71

Table 7.1.2.1-7: Field Strength of Spurious Emissions – 941.4875MHz – MPass Mode

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Generator Level (dBm)	Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
1882.975	-55.07	-55.00	H	4.94	-50.06	-13.00	37.06
1882.975	-53.27	-54	V	5.04	-48.96	-13.00	35.96
2824.4625	-52.71	-51	H	5.67	-45.33	-13.00	32.33
2824.4625	-55.4	-55	V	5.57	-49.43	-13.00	36.43
4707.4375	-46.36	-36	H	6.80	-29.20	-13.00	16.20
4707.4375	-45.95	-36	V	6.56	-29.44	-13.00	16.44
7531.9	-42.93	-26.9	H	5.98	-20.92	-13.00	7.92
7531.9	-49.3	-34.22	V	6.07	-28.15	-13.00	15.15
8473.3875	-50.75	-40	H	6.30	-33.70	-13.00	20.70
8473.3875	-52.88	-37	V	6.30	-30.70	-13.00	17.70

Table 7.1.2.1-8: Field Strength of Spurious Emissions – 959.925MHz – MPass Mode

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Generator Level (dBm)	Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
1919.85	-54.51	-56.00	H	4.87	-51.13	-13.00	38.13
1919.85	53.57	-55	V	4.97	-50.03	-13.00	37.03
2879.775	-53.44	-51	H	5.75	-45.25	-13.00	32.25
2879.775	-56.11	-56	V	5.65	-50.35	-13.00	37.35
3839.7	-57	-54	H	6.51	-47.49	-13.00	34.49
39839.7	-58.85	-56	V	6.44	-49.56	-13.00	36.56
4799.625	-50.52	-42	H	6.62	-35.38	-13.00	22.38
4799.625	-49.86	-40	V	6.36	-33.64	-13.00	20.64
7679.4	-46.28	-30.18	H	6.06	-24.12	-13.00	11.12
7679.4	-53.85	-40	V	6.12	-33.88	-13.00	20.88
8639.325	-58.55	-49	H	6.34	-42.66	-13.00	29.66
8639.325	-57.25	-44	V	6.37	-37.63	-13.00	24.63
9599.25	-57.02	-45	H	6.32	-38.68	-13.00	25.68

7.1.2.2 2200-1216-01 GFL Board:**PART 24****Table 7.1.2.2-1: Field Strength of Spurious Emissions – 901.9875 MHz – Normal Mode**

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Generator Level (dBm)	Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
1803.975	-57.95	-63.00	H	5.10	-57.90	-13.00	44.90
1803.975	-55.15	-54	V	5.20	-48.80	-13.00	35.80
2705.9625	-57.36	-60.00	H	5.52	-54.48	-13.00	41.48
4509.9375	-51.98	-44	H	7.19	-36.81	-13.00	23.81
4509.9375	-55.43	-48	V	6.99	-41.01	-13.00	28.01
5411.925	-55.91	-48	H	6.75	-41.25	-13.00	28.25
6313.9125	-57.48	-50	H	6.41	-43.59	-13.00	30.59
7215.9	-55.88	-47	H	5.83	-41.17	-13.00	28.17
7215.9	-56.85	-45	V	5.93	-39.07	-13.00	26.07
8117.8875	-55.42	-47	H	6.25	-40.75	-13.00	27.75

Table 7.1.2.2-2: Field Strength of Spurious Emissions – 930.5 MHz – MPass Mode

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Generator Level (dBm)	Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
1861	-55.93	-59.00	H	4.99	-54.01	-13.00	41.01
1861	-53.55	-56	V	5.09	-50.91	-13.00	37.91
2791.5	-55.55	-56	H	5.63	-50.37	-13.00	37.37
2791.5	-56.74	-55	V	5.53	-49.47	-13.00	36.47
3722	-57.79	-55	H	6.66	-48.34	-13.00	35.34
4652.5	-44.61	-35.08	H	6.91	-28.17	-13.00	15.17
4652.5	-46.08	-36.25	V	6.68	-29.57	-13.00	16.57
6513.5	-56.69	-47	H	6.18	-40.82	-13.00	27.82
6513.5	-58.17	-51	V	6.38	-44.62	-13.00	31.62
7444	-52.78	-39	H	5.94	-33.06	-13.00	20.06
7444	-55.6	-43	V	6.04	-36.96	-13.00	23.96
8374.5	-55.91	-42	H	6.28	-35.72	-13.00	22.72

PART 90**Table 7.1.2.2-3: Field Strength of Spurious Emissions – 896.0375MHz – Normal Mode**

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Generator Level (dBm)	Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
1792.075	-55.81	-60.00	H	5.12	-54.88	-20.00	34.88
1792.075	-54.38	-54	V	5.22	-48.78	-20.00	28.78
2688.1125	-55.86	-56	H	5.50	-50.50	-20.00	30.50
2688.1125	-57.68	-58	V	5.40	-52.60	-20.00	32.60
3584.15	-57.66	-54	H	6.84	-47.16	-20.00	27.16
4480.1875	-53.44	-46	H	7.17	-38.83	-20.00	18.83
4480.1875	-56.44	-54	V	6.98	-47.02	-20.00	27.02
5376.225	-56.34	-49	H	6.70	-42.30	-20.00	22.30
5376.225	-57.35	-52	V	6.55	-45.45	-20.00	25.45
6272.2625	-57.1	-51	H	6.45	-44.55	-20.00	24.55
6272.2625	-57.61	-51	V	6.56	-44.44	-20.00	24.44
7168.3	-55.5	-44	H	5.81	-38.19	-20.00	18.19
7168.3	-56.82	-46	V	5.91	-40.09	-20.00	20.09
8064.3375	-54.51	-42	H	6.25	-35.75	-20.00	15.75
8064.3375	-57.58	-47	V	6.25	-40.75	-20.00	20.75
8960.375	-57.51	-48	H	6.43	-41.57	-20.00	21.57

Table 7.1.2.2-4: Field Strength of Spurious Emissions – 935.0125MHz – MPass Mode

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Generator Level (dBm)	Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
1870.025	-55.42	-58.00	H	4.97	-53.03	-20.00	33.03
1870.025	-54.38	-57	V	5.07	-51.93	-20.00	31.93
2805.0375	-55.81	-55	H	5.65	-49.35	-20.00	29.35
2805.0375	-58.34	-60	V	5.55	-54.45	-20.00	34.45
3740.05	-57.94	-56	H	6.63	-49.37	-20.00	29.37
4675.0625	-45.83	-36.72	H	6.86	-29.86	-20.00	9.86
4675.0625	-47.63	-39	V	6.63	-32.37	-20.00	12.37
6545.0875	-56.69	-49	H	6.15	-42.85	-20.00	22.85
7480.1	-52.35	-37.3	H	5.95	-31.35	-20.00	11.35
7480.1	-55.5	-45	V	6.05	-38.95	-20.00	18.95
8415.1125	-55.68	-42.1	H	6.29	-35.81	-20.00	15.81

PART 101**Table 7.1.2.2-5: Field Strength of Spurious Emissions – 928.925MHz – Normal Mode**

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Generator Level (dBm)	Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
1857.85	-55.07	-59.00	H	4.99	-54.01	-13.00	41.01
1857.85	-53.47	-55	V	5.09	-49.91	-13.00	36.91
2786.775	-55.09	-56.00	H	5.62	-50.38	-13.00	37.38
2786.775	-56.82	-56	V	5.52	-50.48	-13.00	37.48
3715.7	-57.43	-57	V	6.67	-50.33	-13.00	37.33
4644.625	-43.9	-34.9	H	6.92	-27.98	-13.00	14.98
4644.625	-46.97	-38	V	6.70	-31.30	-13.00	18.30
7431.4	-53.05	-38	H	5.93	-32.07	-13.00	19.07
8360.325	-54.65	-40	H	6.28	-33.72	-13.00	20.72

Table 7.1.2.2-6: Field Strength of Spurious Emissions – 932.25MHz – Normal Mode

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Generator Level (dBm)	Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
1864.5	-56.45	-59.00	H	4.98	-54.02	-13.00	41.02
1864.5	-53.17	-55	V	5.08	-49.92	-13.00	36.92
2796.75	-57.14	-59.00	H	5.64	-53.36	-13.00	40.36
4661.25	-44.31	-35.08	H	6.89	-28.19	-13.00	15.19
4661.25	-45.38	-36.11	V	6.66	-29.45	-13.00	16.45
6525.75	-57.8	-50	H	6.17	-43.83	-13.00	30.83
7458	-50.74	-41	H	5.94	-35.06	-13.00	22.06
7458	-56.25	-46	V	6.04	-39.96	-13.00	26.96
8390.25	-55.89	-44	H	6.29	-37.71	-13.00	24.71

Table 7.1.2.2-7: Field Strength of Spurious Emissions – 941.4875MHz – MPass Mode

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Generator Level (dBm)	Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
1882.975	-55.58	-59.00	H	4.94	-54.06	-13.00	41.06
1882.975	-52.28	-53	V	5.04	-47.96	-13.00	34.96
2824.4625	-55.5	-56	H	5.67	-50.33	-13.00	37.33
2824.4625	-56.95	-55	V	5.57	-49.43	-13.00	36.43
3765.95	-57.15	-57	H	6.60	-50.40	-13.00	37.40
4707.4375	-42.83	-32.64	H	6.80	-25.84	-13.00	12.84
4707.4375	-45.77	-36.05	V	6.56	-29.49	-13.00	16.49
6590.4125	-56.31	-46	H	6.11	-39.89	-13.00	26.89
7531.9	-51.97	-37	H	5.98	-31.02	-13.00	18.02
7531.9	-55.45	-43	V	6.07	-36.93	-13.00	23.93
8473.3875	-57.15	-45	H	6.30	-38.70	-13.00	25.70
9414.875	-57.51	-47	H	6.15	-40.85	-13.00	27.85

Table 7.1.2.2-8: Field Strength of Spurious Emissions – 959.925MHz – MPass Mode

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Generator Level (dBm)	Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
1919.85	-55.09	-56.00	H	4.87	-51.13	-13.00	38.13
1919.85	-52.58	-53	V	4.97	-48.03	-13.00	35.03
2879.775	-55.65	-56	H	5.75	-50.25	-13.00	37.25
2879.775	-57.23	-60	V	5.65	-54.35	-13.00	41.35
4799.625	-41.25	-30.53	H	6.62	-23.91	-13.00	10.91
4799.625	43.67	-33.57	V	6.36	-27.21	-13.00	14.21
5759.55	-56.36	-53	H	6.81	-46.19	-13.00	33.19
5759.55	-56.92	-52	V	6.76	-45.24	-13.00	32.24
6719.475	-56.44	-48	H	5.99	-42.01	-13.00	29.01
6719.475	-57.68	-49	V	6.15	-42.85	-13.00	29.85
7679.4	-45.77	-29.4	H	6.06	-23.34	-13.00	10.34
7679.4	-53.24	-40	V	6.12	-33.88	-13.00	20.88

7.1.2.3 2200-1218-01 GFL Board:

PART 24**Table 7.1.2.3-1: Field Strength of Spurious Emissions – 901.9875 MHz – Normal Mode**

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Generator Level (dBm)	Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
1803.975	-55.75	-58.00	H	5.10	-52.90	-13.00	39.90
1803.975	-56.11	-57	V	5.20	-51.80	-13.00	38.80
2705.9625	-56.8	-56	H	5.52	-50.48	-13.00	37.48
2705.9625	-55.58	-53	V	5.42	-47.58	-13.00	34.58
3607.95	-56.69	-52	H	6.81	-45.19	-13.00	32.19
3607.95	-57.05	-54	V	6.79	-47.21	-13.00	34.21
4509.9375	-46.16	-38	H	7.19	-30.81	-13.00	17.81
4509.9375	-47.65	-39	V	6.99	-32.01	-13.00	19.01
5411.925	-51.82	-42	H	6.75	-35.25	-13.00	22.25
5411.925	-53.21	-43	V	6.61	-36.39	-13.00	23.39
6313.9125	-57.23	-47	H	6.41	-40.59	-13.00	27.59
6313.9125	-57.58	-47	V	6.53	-40.47	-13.00	27.47
8117.8875	-56.82	-44	H	6.25	-37.75	-13.00	24.75
8117.8875	-55.68	-42	V	6.25	-35.75	-13.00	22.75
9019.875	-57.71	-43	H	6.43	-36.57	-13.00	23.57
9019.875	-56.82	-42	V	6.53	-35.47	-13.00	22.47

Table 7.1.2.3-2: Field Strength of Spurious Emissions – 930.5 MHz – MPass Mode

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Generator Level (dBm)	Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
1861	-55.40	-56.00	H	4.99	-51.01	-13.00	38.01
1861	-55.32	-58	V	5.09	-52.91	-13.00	39.91
2791.5	-55.93	-56	H	5.63	-50.37	-13.00	37.37
2791.5	-54.71	-52	V	5.53	-46.47	-13.00	33.47
4652.5	-49.18	-40	H	6.91	-33.09	-13.00	20.09
4652.5	-52.22	-44	V	6.68	-37.32	-13.00	24.32
5583	-54.79	-46	H	6.84	-39.16	-13.00	26.16
5583	-55.88	-47	V	6.76	-40.24	-13.00	27.24
7444	-57.4	-44	H	5.94	-38.06	-13.00	25.06
7444	-57.46	-44	V	6.04	-37.96	-13.00	24.96
8374.5	-54.61	-39	H	6.28	-32.72	-13.00	19.72
8374.5	-53.82	-38	V	6.28	-31.72	-13.00	18.72

PART 90**Table 7.1.2.3-3: Field Strength of Spurious Emissions – 896.0125MHz – Normal Mode**

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Generator Level (dBm)	Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
1792.075	-56.21	-58.00	H	5.12	-52.88	-20.00	32.88
1792.075	-57.43	-60	V	5.22	-54.78	-20.00	34.78
2688.1125	-57.53	-56	H	5.50	-50.50	-20.00	30.50
2688.1125	-55.78	-52	V	5.40	-46.60	-20.00	26.60
3584.15	-56.67	-53	H	6.84	-46.16	-20.00	26.16
3584.15	-57.73	-53	V	6.82	-46.18	-20.00	26.18
4480.0625	-45.22	-37.32	H	7.17	-30.15	-20.00	10.15
4480.0625	-46.97	-39	V	6.98	-32.02	-20.00	12.02
5376.075	-52.17	-42	H	6.70	-35.30	-20.00	15.30
5376.075	-53.19	-43	V	6.55	-36.45	-20.00	16.45
6272.0875	-56.36	-46	H	6.45	-39.55	-20.00	19.55
6272.0875	-56.67	-46	V	6.56	-39.44	-20.00	19.44
8064.1125	-57.66	-45	H	6.25	-38.75	-20.00	18.75
8064.1125	-56.82	-44	V	6.25	-37.75	-20.00	17.75
8960.375	-57.28	-44	H	6.43	-37.57	-20.00	17.57
8960.375	-57	-43	V	6.52	-36.48	-20.00	16.48

Table 7.1.2.3-4: Field Strength of Spurious Emissions – 935.0125MHz – MPass Mode

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Generator Level (dBm)	Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
1870.025	-54.92	-55.00	H	4.97	-50.03	-20.00	30.03
1870.025	-55.45	-57	V	5.07	-51.93	-20.00	31.93
2805.0375	-56.24	-56	H	5.65	-50.35	-20.00	30.35
2805.0375	-54.79	-52	V	5.55	-46.45	-20.00	26.45
4675.0625	-47.86	-38	H	6.86	-31.14	-20.00	11.14
4675.0625	-51.03	-43	V	6.63	-36.37	-20.00	16.37
5610.075	-54.64	-46	H	6.84	-39.16	-20.00	19.16
5610.075	-56.01	-48	V	6.76	-41.24	-20.00	21.24
7480.1	-56.72	-44	H	5.95	-38.05	-20.00	18.05
7480.1	-56.64	-42	V	6.05	-35.95	-20.00	15.95
8415.1125	-54.97	-41	H	6.29	-34.71	-20.00	14.71
8415.1125	-53.98	-39	V	6.29	-32.71	-20.00	12.71

PART 101**Table 7.1.2.3-5: Field Strength of Spurious Emissions – 928.925MHz – Normal Mode**

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Generator Level (dBm)	Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
1857.85	-55.81	-55.00	H	4.99	-50.01	-13.00	37.01
1857.85	55.25	-58	V	5.09	-52.91	-13.00	39.91
2786.775	-56.36	-56	H	5.62	-50.38	-13.00	37.38
2786.775	-54.59	-55	V	5.52	-49.48	-13.00	36.48
3715.7	-57.33	-54	H	6.67	-47.33	-13.00	34.33
4644.625	-49.61	-40	H	6.92	-33.08	-13.00	20.08
4644.625	-53.55	-44	V	6.70	-37.30	-13.00	24.30
5573.55	-56.29	-47	H	6.85	-40.15	-13.00	27.15
5573.55	-54.61	-45	V	6.76	-38.24	-13.00	25.24
8360.325	-56.16	-41	H	6.28	-34.72	-13.00	21.72
8360.325	-51.54	-35.39	V	6.28	-29.11	-13.00	16.11

Table 7.1.2.3-6: Field Strength of Spurious Emissions – 932.25MHz – Normal Mode

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Generator Level (dBm)	Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
1864.5	-55.27	-55.00	H	4.98	-50.02	-13.00	37.02
1864.5	-54.18	-56	V	5.08	-50.92	-13.00	37.92
2796.75	-55.91	-55	H	5.64	-49.36	-13.00	36.36
2796.75	-55.14	-53	V	5.54	-47.46	-13.00	34.46
4661.25	-48.92	-40	H	6.89	-33.11	-13.00	20.11
4661.25	-54.26	-46	V	6.66	-39.34	-13.00	26.34
5593.5	-55.4	-48	H	6.84	-41.16	-13.00	28.16
5593.5	-56.29	-47	V	6.76	-40.24	-13.00	27.24
7458	-56.64	-43	H	5.94	-37.06	-13.00	24.06
7458	-56.92	-44	V	6.04	-37.96	-13.00	24.96
8390.25	-53.82	-37	H	6.29	-30.71	-13.00	17.71
8390.25	-52.05	-36.5	V	6.29	-30.21	-13.00	17.21

Table 7.1.2.3-7: Field Strength of Spurious Emissions – 941.4875MHz – MPass Mode

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Generator Level (dBm)	Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
1882.975	-54.46	-54.00	H	4.94	-49.06	-13.00	36.06
1882.975	-53.93	-54	V	5.04	-48.96	-13.00	35.96
2824.4625	-55.68	-55	H	5.67	-49.33	-13.00	36.33
2824.4625	-54.61	-56	V	5.57	-50.43	-13.00	37.43
4707.4375	-47.98	-38	H	6.80	-31.20	-13.00	18.20
4707.4375	-51.34	-41	V	6.56	-34.44	-13.00	21.44
5648.925	-55.98	-46	H	6.83	-39.17	-13.00	26.17
5648.925	-56.49	-47	V	6.76	-40.24	-13.00	27.24
7531.9	-55.98	-43	H	5.98	-37.02	-13.00	24.02
7531.9	-56.11	-43	V	6.07	-36.93	-13.00	23.93
8473.3875	-56.44	-43	H	6.30	-36.70	-13.00	23.70
8473.3875	-55.52	-40	V	6.30	-33.70	-13.00	20.70

Table 7.1.2.3-8: Field Strength of Spurious Emissions – 959.925MHz – MPass Mode

Frequency (MHz)	Spectrum Analyzer Level (dBm)	Generator Level (dBm)	Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)
1919.85	-52.66	-51.00	H	4.87	-46.13	-20.00	26.13
1919.85	-53.04	-54	V	4.97	-49.03	-20.00	29.03
2879.775	-55.53	-53	H	5.75	-47.25	-20.00	27.25
2879.775	-55.09	-53	V	5.65	-47.35	-20.00	27.35
3839.7	-57.76	-52	V	6.44	-45.56	-20.00	25.56
4799.625	-50.49	-40	H	6.62	-33.38	-20.00	13.38
4799.625	-54.74	-46	V	6.36	-39.64	-20.00	19.64
7679.4	-57.43	-44	H	6.06	-37.94	-20.00	17.94
7679.4	-56.31	-43	V	6.12	-36.88	-20.00	16.88
8639.325	-57.58	-43	V	6.37	-36.63	-20.00	16.63

7.2 Radiated Emissions (Unintentional Radiators)

7.2.1 Measurement Procedure

The equipment under test is placed in the Semi-Anechoic Chamber (described in section 2.3.1) on a wooden table at the turntable center. For each radiated emission, the antenna mast is raised and lowered from one (1) to four (4) meters and the turntable is rotated 360° to obtain a maximum peak reading on the spectrum analyzer. The radiated emissions are then measured using an EMI receiver employing a CISPR quasi-peak detector for frequencies below 1000 MHz and an Average detector function for frequencies above 1000 MHz. This repeated for both horizontal and vertical polarizations of the receive antenna. All PCB variants were evaluated and the worst case data presented below.

The field strength of each radiated emission is calculated by correcting the EMI receiver level for cable loss, amplifier gain, and antenna correction factors.

Field Strength (dBuV/m) = EMI Receiver Level (dBuV) + Cable Loss (dB) – Amplifier Gain (dB) + Antenna Correction Factor (1/m)

Results of the test are shown below in Table 7.2.2-1.

7.2.2 Measurement Results

Table 7.2.2-1: Radiated Emissions Tabulated Data

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
30	-----	27.27	V	-8.40	-----	18.87	-----	40.0	-----	21.13
34.1	-----	28.47	V	-10.53	-----	17.94	-----	40.0	-----	22.06
311	-----	21.69	V	-11.16	-----	10.53	-----	46.0	-----	35.47
326.22	-----	21.59	V	-10.55	-----	11.04	-----	46.0	-----	34.96
446.22	-----	21.74	V	-7.01	-----	14.73	-----	46.0	-----	31.27
509.33	-----	22.37	V	-5.13	-----	17.24	-----	46.0	-----	28.76
592.88	-----	22.17	V	-3.67	-----	18.50	-----	46.0	-----	27.50
721.77	-----	22.17	V	-1.12	-----	21.05	-----	46.0	-----	24.95
771.55	-----	22.25	V	-0.20	-----	22.05	-----	46.0	-----	23.95
869.33	-----	21.69	V	0.39	-----	22.08	-----	46.0	-----	23.92

Measurements taken above 869.33 MHz were below the noise floor of the measurement equipment.

8.0 CONCLUSION

In the opinion of ACS, Inc. the model GFL, manufactured by Sensus Metering Systems, meets all the requirements of FCC Part 24, 90, and 101 as well as IC RSS-119 and RSS-134 for a Class II Permissive Change as applicable.

End Report