


FCC PART 15 Subpart C
EMI MEASUREMENT AND TEST REPORT
For
Shanghai Fullband Technologies Co., Ltd.

Suite 213-215, Building 22, 498 Guo Shoujing Rd.
Shanghai 201203, P.R. China

FCC ID: SDECN20040518

This Report Concerns: <input checked="" type="checkbox"/> Original Report	Equipment Type: 2.4GHz Wireless (VGA to TV) Audio/Video, Transmitter
Test Engineer: Ling Zhang 	
Report No.: R0406115(T)	
Report Date: 2004-07-16	
Reviewed By: Benjamin Jin 	
Prepared By: Bay Area Compliance Laboratory Corporation 230 Commercial Street Sunnyvale, CA 94085 Tel (408) 732-9162 Fax (408) 732-9164	

Note: The test report is specially limited to the above company and the product model only.
It may not be duplicated without prior written consent of Bay Area Compliance Laboratory Corporation. This report **must not** be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the US Government.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
TEST FACILITY	3
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION	5
EQUIPMENT MODIFICATIONS	5
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	5
EXTERNAL I/O CABLING LIST AND DETAILS	5
POWER SUPPLY INFORMATION.....	5
CONFIGURATION OF TEST SYSTEM	6
TEST SETUP BLOCK DIAGRAM.....	6
SUMMARY OF TEST RESULTS	7
§15.203 - ANTENNA REQUIREMENT.....	8
STANDARD APPLICABLE	8
ANTENNA CONNECTED CONSTRUCTION	8
§ 15.249 (C) - CONDUCTED EMISSIONS TEST DATA	9
MEASUREMENT UNCERTAINTY	9
EUT SETUP	9
SPECTRUM ANALYZER SETUP	9
TEST EQUIPMENT LIST AND DETAILS.....	9
TEST PROCEDURE	9
ENVIRONMENTAL CONDITIONS	10
SUMMARY OF TEST RESULTS	10
CONDUCTED EMISSIONS TEST DATA	10
PLOT OF CONDUCTED EMISSIONS TEST DATA	10
§15.209(A) - RADIATED EMISSION DATA	13
MEASUREMENT UNCERTAINTY	13
EUT SETUP	13
SPECTRUM ANALYZER SETUP	13
TEST EQUIPMENT LIST AND DETAILS.....	14
ENVIRONMENTAL CONDITIONS	14
TEST PROCEDURE	14
CORRECTED AMPLITUDE & MARGIN CALCULATION	14
SUMMARY OF TEST RESULTS	15
RADIATED EMISSIONS TEST RESULT DATA	15
§15.249(C) – BAND-EDGE TESTING	17
STANDARD APPLICABLE	17
TEST PROCEDURE	17
TEST EQUIPMENT LIST AND DETAILS.....	17
ENVIRONMENTAL CONDITIONS	17
TEST RESULTS	17

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

The *Shanghai Fullband Technologies Co., Ltd.*'s product, model number: Flyimage5000 or the "EUT" as referred to in this report is the transmitter part of a 2.4GHz Wireless (VGA to TV) Audio/Video, DXX, operating frequency 2414 – 2468 MHz. The EUT is measured approximately 100cmL x 40cmW x 15cmH.

* *The test data gathered are from production sample, serial number: 1001, provided by the manufacturer.*

Objective

This document is a test report based on the Electromagnetic Interference (EMI) tests performed on the EUT. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4 - 2001.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.205, 15.207, and 15.249, 15.203, 15.209 rules.

Related Submittal(s)/Grant(s)

No Related Submittals

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4 - 2001, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Open Area Test site used by Bay Area Compliance Laboratory Corporation to collect radiated and conducted emission measurement data is located in the back parking lot of the building at 230 Commercial Street, Sunnyvale, California, USA.

Test site at Bay Area Compliance Laboratory Corporation has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2001.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-1298 and R-1234. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratory Corporation is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (NVLAP). The scope of the accreditation covers the FCC Method - 47 CFR Part 15 - Digital Devices, CISPR 22:1997 and AS/NZS 3548: Electromagnetic Interference - Limits and Methods of Measurement of Information Technology Equipment test methods under NVLAP Lab Code 200167-0.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing according to ANSI C63.4-2001.

The final qualification test was performed with the EUT operating at normal mode

Equipment Modifications

No modifications were made to the EUT.

Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
SONY	Notebook PC	PCG-F150	28986303404240	DOC
HP	Printer	Thinkjet 2225C	2512S43681	BS46XU2225C


External I/O Cabling List and Details

Cable Description	Length (M)	Port/From	To
VGA Cable	1	VGA Port/Notebook	EUT
A/V Cable	1	A/V port/Notebook	EUT
Shield printer Cable	1.5	Parallel port/Notebook	Printer


Power Supply Information

Manufacturer	Description	Model	Serial Number	FCC ID
DVE	AC Adapter	DSA-009F-07	E135856	DoC

Configuration of Test System

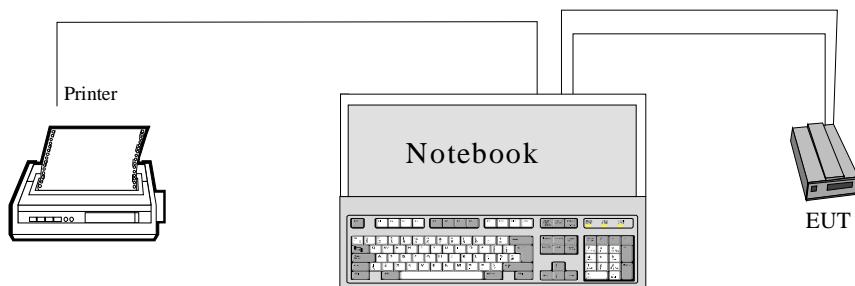

Test Setup Block Diagram

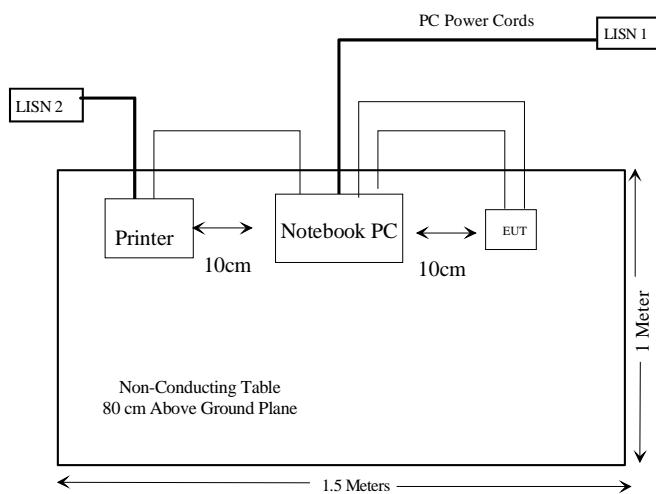

SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.203	Antenna Requirement	Compliant
§15.205	Restricted Bands of Operation	Compliant
§15.207 (a)	Conducted Emission	Compliant
§15.209 (a), §15.249 (a)	Radiated Emission	Compliant
§15.249 (c)	Band Edge Testing	Compliant

§15.203 - ANTENNA REQUIREMENT

Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Connected Construction

The antenna connector is designed with permanent attachment and no consideration of replacement.

§ 15.249 (c) - CONDUCTED EMISSIONS TEST DATA

Measurement Uncertainty

All measurements involve certain levels of uncertainties. These uncertainties are attributed to: Spectrum analyzer, Cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the estimated uncertainty of any conducted emission measurement at BACL is ±2.4 dB.

EUT Setup

The measurement was performed in the shielded room, using the same setup per ANSI C63.4-2001 measurement procedure. The specification used was FCC 15 Subpart C limits.

External I/O cables were draped along the edge of the test table and bundle as required.

The Notebook PC was connected with 120Vac/60Hz power source.

Spectrum Analyzer Setup

The spectrum analyzer was set to investigate the spectrum from 150 kHz to 30Mhz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Date
Rohde & Schwarz	Artificial LISN	ESH2-Z5	871884/039	2003-03-28
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2003-05-06

* **Statement of Traceability:** BACL attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

During the conducted emission test, the power cord of the host system was connected to the auxiliary outlet of the first LISN.

Maximizing procedure were performed on the six (6) highest emissions of the EUT.

All data was recorded in the peak detection mode, quasi-peak and average. Quasi-Peak readings are distinguished with an “QP”. Average readings are distinguished with an “Ave”.

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	38%
ATM Pressure:	1032mbar

Testing was performed by Ling Zhang on 2004-06-25.

Summary of Test Results

According to the recorded data in following table, the EUT complies with the FCC Conducted limit for a Class B device, with the *worst* margin reading of:

-11.5857 dB μ V at 0.180 MHz in the Neutral mode

Conducted Emissions Test Data

LINE CONDUCTED EMISSIONS				FCC CLASS B	
Frequency MHz	Amplitude dB μ V	Detector Qp/Ave/Peak	Phase Line/Neutral	Limit dB μ V	Margin dB
0.180	52.9	QP	Neutral	64.49	-11.5857
0.180	41.3	Ave	Neutral	54.49	-13.1857
0.275	39.4	QP	Neutral	60.97	-21.5655
0.270	27.2	Ave	Neutral	51.12	-23.9179
7.500	37.3	QP	Neutral	60.00	-22.7000
7.500	32.7	Ave	Neutral	50.00	-17.3000
0.180	52.2	QP	Line	64.49	-12.2857
0.180	40.4	Ave	Line	54.49	-14.0857
0.265	38.0	QP	Line	61.27	-23.2732
0.350	28.8	Ave	Line	48.96	-20.1625
7.900	38.5	QP	Line	60.00	-21.5000
7.900	32.4	Ave	Line	50.00	-17.6000

Plot of Conducted Emissions Test Data

Plot of Conducted Emissions test data was presented hereinafter as reference.


Bay Area Compliance Laboratory Corp
Class B

28. Jun 04 16:44

EUT: FLYIMAGE5000
Manuf: SHANGHAI FULLBAND
Op Cond: Normal
Operator: LING
Comment: L

Scan Settings (3 Ranges)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	H-Time	Atten	Preamp
180k	1M	5k	8k	GP+AV	20ms	15dBBLN	OFF
1M	5M	10k	9k	GP+AV	1ms	15dBBLN	OFF
5M	30M	100k	9k	GP+AV	1ms	15dBBLN	OFF

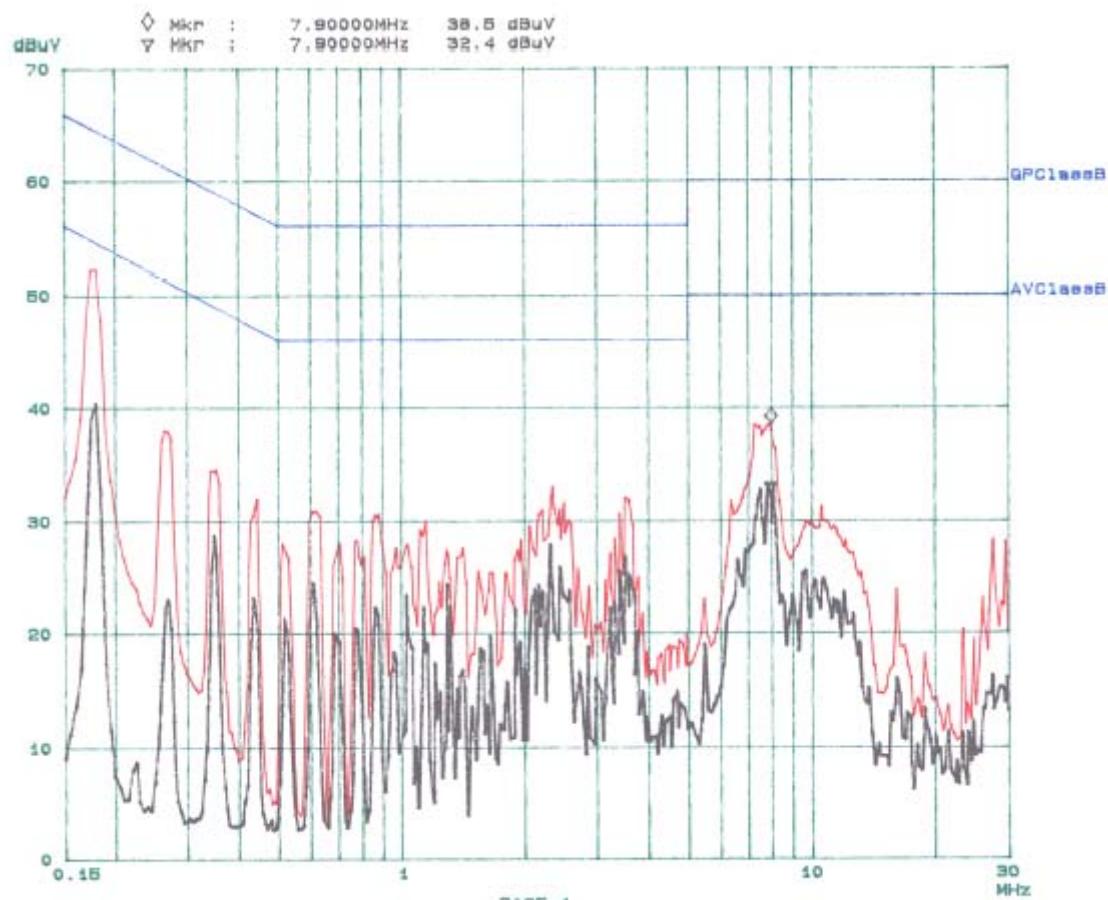

WZ 2004-6-25


Bay Area Compliance Laboratory Corp
Class B

25. Jun 04 15:10

EUT: FLYIMAGE5000
Manuf: SHANGHAI FULLBAND
Op Cond: Normal
Operator: LING
Comment: N

Scan Settings (3 Ranges)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	W-Time	Atten	Preamp
150k	1M	8k	8k	QP+AV	20ms	16dBBLN	OFF
1M	5M	10k	8k	QP+AV	1ms	16dBBLN	OFF
5M	30M	100k	8k	QP+AV	1ms	16dBBLN	OFF

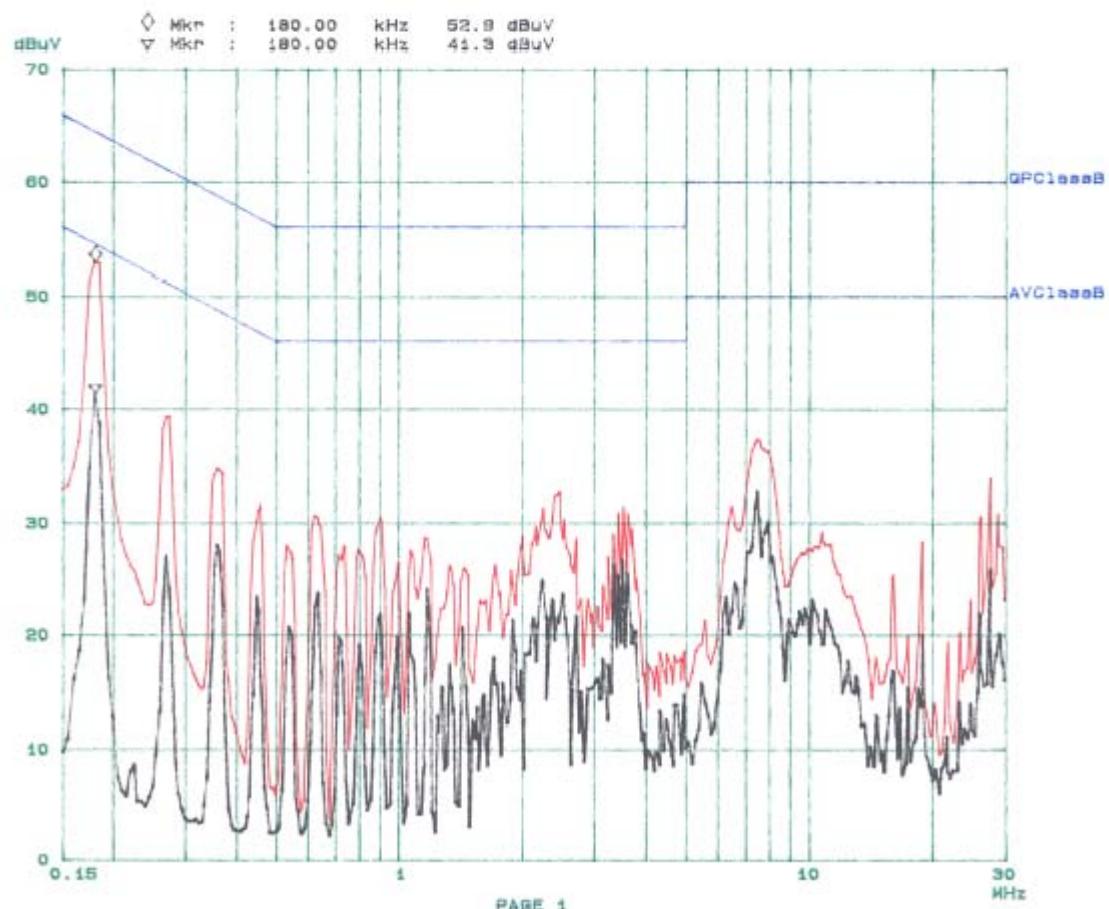

2004-6-25

§15.209(a) - RADIATED EMISSION DATA

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at BACL is ± 4.0 dB.

EUT Setup

The radiated emission tests were performed in the open area 3-meter test site, using the setup in accordance with ANSI C63.4-2001. The specification used was the FCC 15 Subpart C limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle as required.

The Notebook PC was connected with 120Vac/60Hz power source.

Spectrum Analyzer Setup

According to FCC Rules, 47 CFR 15.33 (a) (1), the system was tested to 25GHz.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

<u>Frequency Range</u>	<u>RBW</u>	<u>Video B/W</u>
Below 30MHz	10kHz	10kHz
30 – 1000MHz	100kHz	100kHz
Above 1000MHz	1MHz	1MHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Date
HP	Spectrum Analyzer	8568B	2601A02165	2003-07-03
HP	Amplifier	8447E	2944A10187	2003-09-23
HP	Quasi-Peak Adapter	85650A	3019A05393	2004-06-13
EMCO	Biconical Antenna	3110B	9309-1165	2003-10-11
EMCO	Log Periodic Antenna	3146	2101	2003-10-11
Agilent	Spectrum Analyzer (9KHz – 50GHz)	8565EC	3946A00131	2004-05-03
HP	Amplifier (1-26.5GHz)	8449B	3147A00400	2004-03-14
A.H.System	Horn Antenna (700MHz-18GHz)	SAS-200/571	261	2004-05-31

* **Statement of Traceability:** BACL attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	38%
ATM Pressure:	1032mbar

Testing was performed by Ling Zhang on 2004-06-25.

Test Procedure

For the radiated emissions test, the power cord of the EUT was connected to the AC floor outlet.

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combinations.

All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB μ V of specification limits), and are distinguished with a "Qp" in the data table.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB μ V means the emission is 7dB μ V below the maximum limit for applicable limits. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Applicable Limit}$$

Summary of Test Results

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.207, and 15.249 after tested to 10th harmonics as required by FCC and had the worst margin of:

- 1.57 dB at 2414MHz in the Vertical polarization at Low Channel
- 2.80 dB at 2450 MHz in the Vertical polarization at Middle Channel
- 4.73 dB at 2468 MHz in the Vertical polarization at High Channel
- 6.59 dB at 110.843 MHz in the Vertical polarization at Unintentional Emission

Radiated Emissions Test Result Data

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 Subpart C	
Frequency MHz	Ampl. dB μ V/m	Comments		Angle Degree	Height Meter	Polar H/V	Antenna dB μ V/m	Cable DB		Corr. Ampl. dB μ V/m	Limit dB μ V/m
1GHz – 25GHz, Low Channel											
2414	97.53	Fund/Ave	0	1.8	v	28.1	2	35.2	92.43	94	-1.57
2414	94.70	Fund/Ave	300	1.4	h	28.1	2	35.2	89.60	94	-4.40
4828	48.03	Ave	180	1.8	v	32.5	3.1	34.7	48.93	54	-5.07
4828	45.03	Ave	150	1.6	h	32.5	3.1	34.7	45.93	54	-8.07
7242	40.37	Ave	100	1.4	h	35.1	3.7	33.5	45.67	54	-8.33
7242	39.87	Ave	270	1.5	v	35.1	3.7	33.5	45.17	54	-8.83
7242	49.20	Peak	100	1.4	h	35.1	3.7	33.5	54.50	74	-19.50
2414	99.53	Fund/Peak	0	1.8	v	28.1	2	35.2	94.43	114	-19.57
7242	48.87	Peak	270	1.5	v	35.1	3.7	33.5	54.17	74	-19.83
4828	53.03	Peak	180	1.8	v	32.5	3.1	34.7	53.93	74	-20.07
4828	51.70	Peak	150	1.6	h	32.5	3.1	34.7	52.60	74	-21.40
2414	96.37	Fund/Peak	300	1.4	h	28.1	2	35.2	91.27	114	-22.73
2400	36.37	Ave	30	1.6	v	28.1	2	35.2	31.27	54	-22.73
2400	35.87	Ave	300	2.0	h	28.1	2	35.2	30.77	54	-23.23
2400	55.53	Peak	30	1.6	v	28.1	2	35.2	50.43	74	-23.57
2400	53.53	Peak	300	2.0	h	28.1	2	35.2	48.43	74	-25.57
1GHz – 25GHz, Middle Channel											
2450	96.30	Fund/Ave	60	1.6	v	28.1	2	35.2	91.20	94	-2.80
2450	95.87	Fund/Ave	300	1.8	h	28.1	2	35.2	90.77	94	-3.23
7350	43.03	Ave	250	1.6	h	35.1	3.7	33.5	48.33	54	-5.67
4900	46.40	Ave	330	1.4	h	32.5	3.1	34.7	47.30	54	-6.70
7350	40.53	Ave	270	1.8	v	35.1	3.7	33.5	45.83	54	-8.17
4900	43.70	Ave	45	1.8	v	32.5	3.1	34.7	44.60	54	-9.40
7350	50.70	Peak	250	1.6	h	35.1	3.7	33.5	56.00	74	-18.00
7350	49.53	Peak	270	1.8	v	35.1	3.7	33.5	54.83	74	-19.17
2450	98.53	Fund/Peak	60	1.6	v	28.1	2	35.2	93.43	114	-20.57
2450	97.87	Fund/Peak	300	1.8	h	28.1	2	35.2	92.77	114	-21.23
4900	51.50	Peak	330	1.4	h	32.5	3.1	34.7	52.40	74	-21.60
4900	50.03	Peak	45	1.8	v	32.5	3.1	34.7	50.93	74	-23.07

Radiated Emissions Test Result Data (Continued)

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 Subpart C	
Frequency MHz	Ampl. dB μ V/m	Comments		Angle Degree	Height Meter	Polar H/V	Antenna dB μ V/m	Cable dB		Corr. Ampl. dB μ V/m	Limit dB μ V/m
1GHz – 25GHZ, High Channel											
2468	94.37	Fund/Ave	150	1.6	v	28.1	2	35.2	89.27	94	-4.73
2468	92.37	Fund/Ave	270	2.0	h	28.1	2	35.2	87.27	94	-6.73
4936	46.37	Ave	330	1.4	h	32.5	3.1	34.7	47.27	54	-6.73
7404	41.53	Ave	270	1.5	h	35.1	3.7	33.5	46.83	54	-7.17
4936	45.87	Ave	200	1.6	v	32.5	3.1	34.7	46.77	54	-7.23
7404	37.87	Ave	90	1.8	v	35.1	3.7	33.5	43.17	54	-10.83
7404	49.17	Peak	270	1.5	h	35.1	3.7	33.5	54.47	74	-19.53
7404	48.87	Peak	90	1.8	v	35.1	3.7	33.5	54.17	74	-19.83
4936	52.03	Peak	200	1.6	v	32.5	3.1	34.7	52.93	74	-21.07
4936	51.53	Peak	330	1.4	h	32.5	3.1	34.7	52.43	74	-21.57
2468	96.20	Fund/Peak	150	1.6	v	28.1	2	35.2	91.10	114	-22.90
2468	94.70	Fund/Peak	270	2.0	h	28.1	2	35.2	89.60	114	-24.40
2483.5	32.87	Ave	220	1.4	v	28.1	2	35.2	27.77	54	-26.23
2483.5	32.80	Ave	60	1.8	h	28.1	2	35.2	27.70	54	-26.30
2483.5	44.70	Peak	220	1.4	v	28.1	2	35.2	39.60	74	-34.40
2483.5	44.30	Peak	60	1.8	h	28.1	2	35.2	39.20	74	-34.80
Unintentional Emission, 30MHz to 1000MHz											
110.843	51.87		270	2.5	v	11.3	1.54	27.8	36.91	43.5	-6.59
141.900	49.87		0	1.0	h	12.4	1.63	27.8	36.10	43.5	-7.40
177.370	47.87		200	1.4	v	13.1	1.91	27.8	35.08	43.5	-8.42
141.900	48.37		150	1.4	v	12.4	1.63	27.8	34.60	43.5	-8.90
177.370	47.20		60	1.0	h	13.1	1.91	27.8	34.41	43.5	-9.09
122.873	48.00		200	2.0	v	11.7	1.57	27.8	33.47	43.5	-10.03
122.880	47.70		150	1.6	h	11.7	1.57	27.8	33.17	43.5	-10.33
110.778	47.87		0	1.0	h	11.3	1.54	27.8	32.91	43.5	-10.59
238.593	42.70		330	1.6	v	12.6	2.17	27.8	29.67	46	-16.33
238.600	41.37		180	1.0	h	12.6	2.17	27.8	28.34	46	-17.66

§15.249(c) – BAND-EDGE TESTING

Standard Applicable

Requirements: FCC 15.249 (c), the emission power at the START and STOP frequencies shall be at least 50 dB below the level of the fundamental or to the general radiated emission limits in FCC 15.209, whichever is the lesser attenuation.

Test Procedure

With the EUT's antenna attached, the EUT's radiated emission power was received by the test antenna which was connected to the spectrum analyzer with the START and STOP frequencies set to the EUT's operation band.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Due Date
HP	Spectrum Analyzer	8565EC	3946A00131	2004-05-03

* **Statement of Traceability:** BACL attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	39%
ATM Pressure:	1034mbar

Testing was performed by Ling Zhang on 2004-07-06.

Test Results

Refer to the attached plots.

