



KTFT-UX200

SAM II Phantom: Left Hand [CRP] Section: Position: (90°,180°); Frequency: 1900 MHz
 Probe: ET3DV6 - SN1798; ConvF(5.20,5.20,5.20); Crest factor: 1.0; Brain 1900 MHz: $\sigma = 1.39$
 mho/m $\epsilon_r = 40.3$ $\rho = 1.00 \text{ g/cm}^3$
 Cube 5x5x7; SAR (1g): 1.39 mW/g, SAR (10g): 0.892 mW/g
 Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
 Powerdrift: 0.23 dB
 Comment:
 FCC ID: SDJKTFT-UX200 / MODEL: KTFT-UX200
 Company: KTF Technologies Co., Ltd.
 Test Position: Left / touch / Antenna: Fixed
 Mode: PCS CDMA / Channel: 25 (1851.25MHz)
 Conducted Power: 24.0 dBm
 Liquid Temperature: 21.6 °C
 Date Tested: July 30, 2004

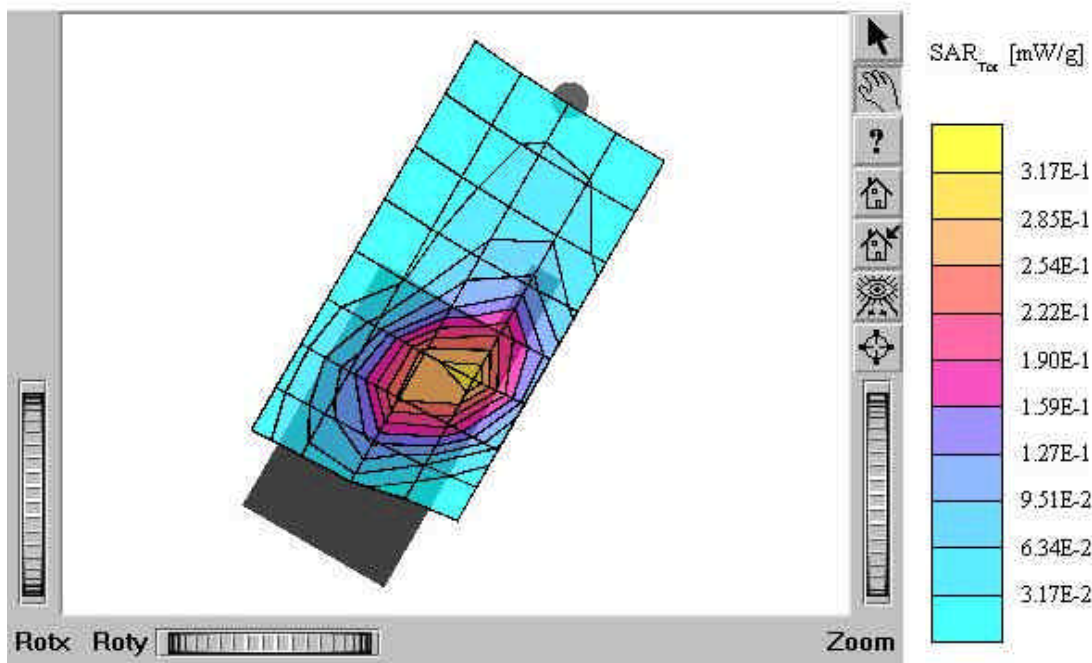


KTFT-UX200

SAM II Phantom: Left Hand [CRP] Section: Position: (90°,180°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1798; ConvF(5.20,5.20,5.20); Crest factor: 1.0; Brain 1900 MHz: $\sigma = 1.39$
mho/m $\epsilon_r = 40.3$ $\rho = 1.00$ g/cm³
Cube 5x5x7; SAR (1g): 1.37 mW/g, SAR (10g): 0.863 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.10 dB
Comment:
FCC ID: SDJKTFT-UX200 / MODEL: KTFT-UX200 (E-battery)
Company: KTF Technologies Co., Ltd.
Test Position: Left / touch / Antenna: Fixed
Mode: PCS CDMA / Channel: 25 (1851.25MHz)
Conducted Power: 24.0 dBm
Liquid Temperature: 21.6 °C
Date Tested: July 30, 2004

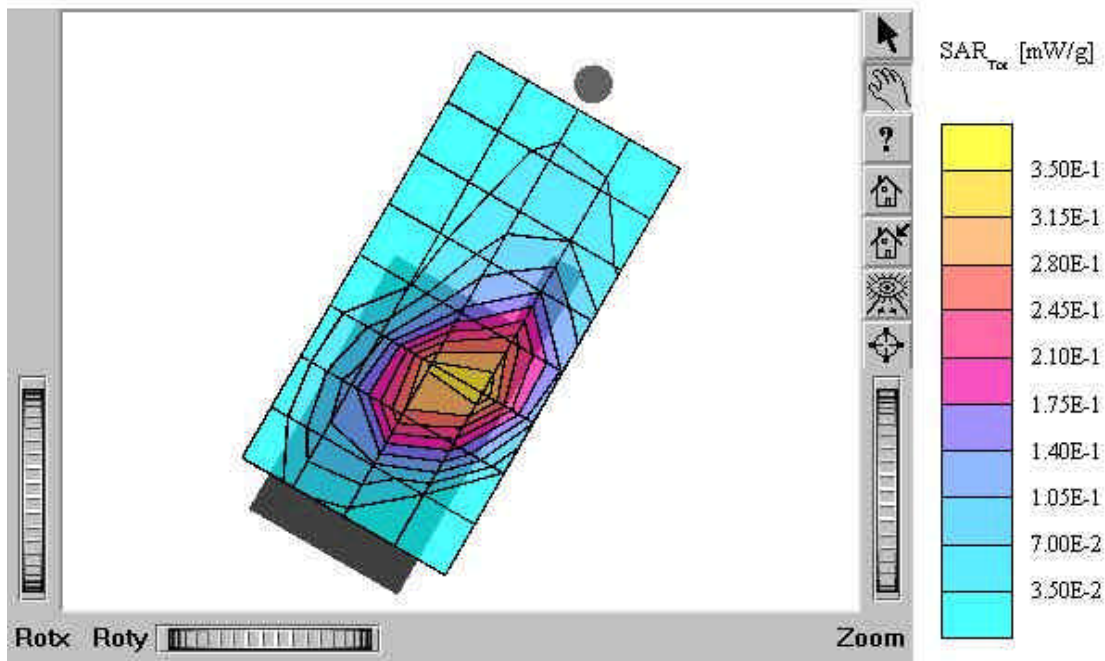


KTFT-UX200

SAM II Phantom: Left Hand [CRP] Section: Position: (90°,180°); Frequency: 1900 MHz
 Probe: ET3DV6 - SN1798; ConvF(5.20,5.20,5.20); Crest factor: 1.0; Brain 1900 MHz: $\sigma = 1.39$
 mho/m $\epsilon_r = 40.3$ $\rho = 1.00 \text{ g/cm}^3$
 Cube 5x5x7; SAR (1g): 0.838 mW/g, SAR (10g): 0.529 mW/g
 Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
 Powerdrift: -0.11 dB
 Comment:
 FCC ID: SDJKTFT-UX200 / MODEL: KTFT-UX200
 Company: KTF Technologies Co., Ltd.
 Test Position: Left / touch / Antenna: Fixed
 Mode: PCS CDMA / Channel: 600 (1880 MHz)
 Conducted Power: 24.0 dBm
 Liquid Temperature: 21.6 °C
 Date Tested: July 30, 2004

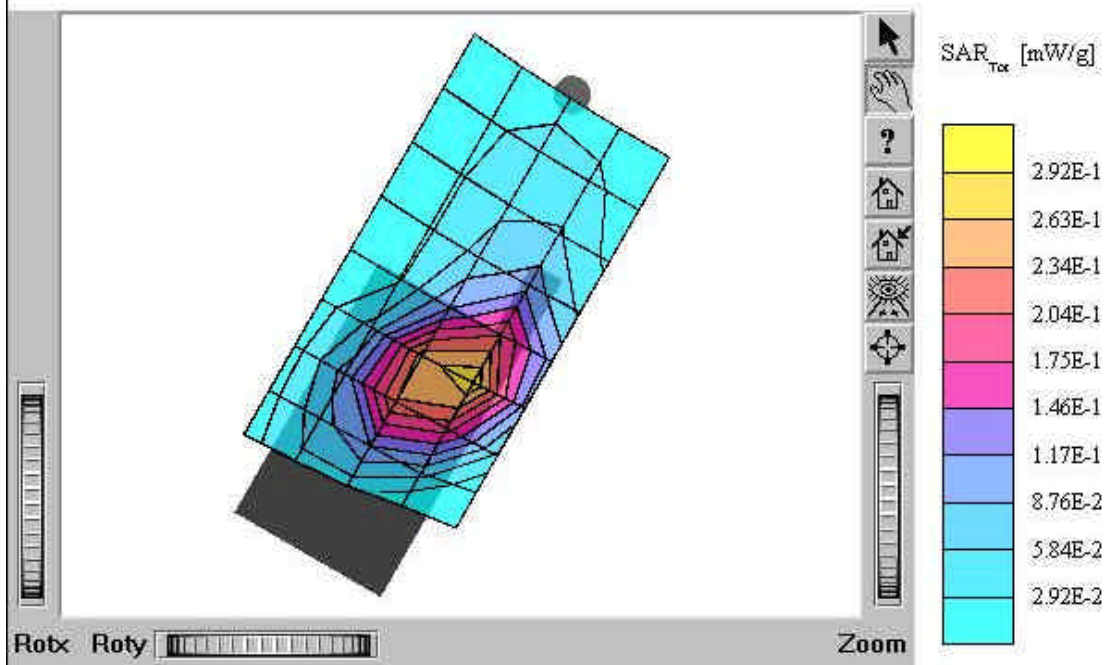


KTFT-UX200

SAM II Phantom: Left Hand [CRP] Section: Position: (90°,180°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1798; ConvF(5.20,5.20,5.20); Crest factor: 1.0; Brain 1900 MHz: $\sigma = 1.39$
mho/m $\epsilon_r = 40.3$ $\rho = 1.00$ g/cm³
Cube 5x5x7; SAR (1g): 0.942 mW/g, SAR (10g): 0.593 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.23 dB
Comment:
FCC ID: SDJKTFT-UX200 / MODEL: KTFT-UX200
Company: KTF Technologies Co., Ltd.
Test Position: Left / touch / Antenna: Fixed
Mode: PCS CDMA / Channel: 1175 (1908.75 MHz)
Conducted Power: 24.0 dBm
Liquid Temperature: 21.6 °C
Date Tested: July 30, 2004

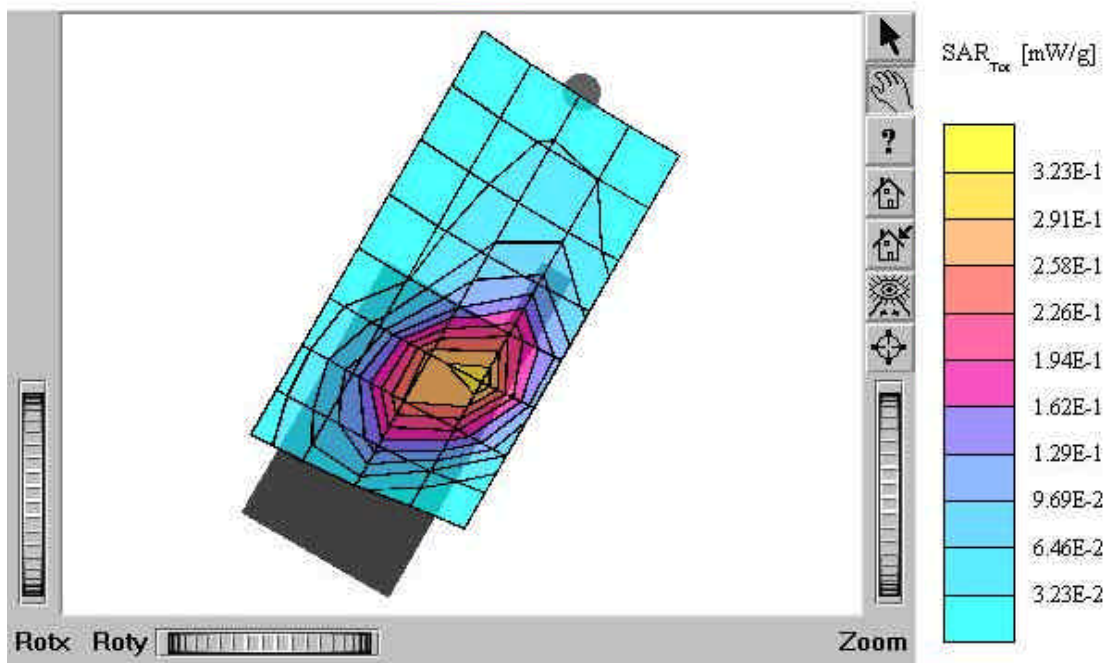

KTFT-UX200

SAM II Phantom: Right Hand [CRP] Section: Position: (90°,180°); Frequency: 1900 MHz
 Probe: ET3DV6 - SN1798; ConvF(5.20,5.20,5.20); Crest factor: 1.0; Brain 1900 MHz: $\sigma = 1.39$
 mho/m $\epsilon_r = 40.3$ $\rho = 1.00$ g/cm³
 Cube 5x5x7; SAR (1g): 1.22 mW/g, SAR (10g): 0.764 mW/g
 Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
 Powerdrift: 0.01 dB
 Comment:
 FCC ID: SDJKTFT-UX200 / MODEL: KTFT-UX200
 Company: KTF Technologies Co., Ltd.
 Test Position: Right / touch / Antenna: Fixed
 Mode: PCS CDMA / Channel: 25 (1851.25MHz)
 Conducted Power: 24.0 dBm
 Liquid Temperature: 21.6 °C
 Date Tested: July 30, 2004

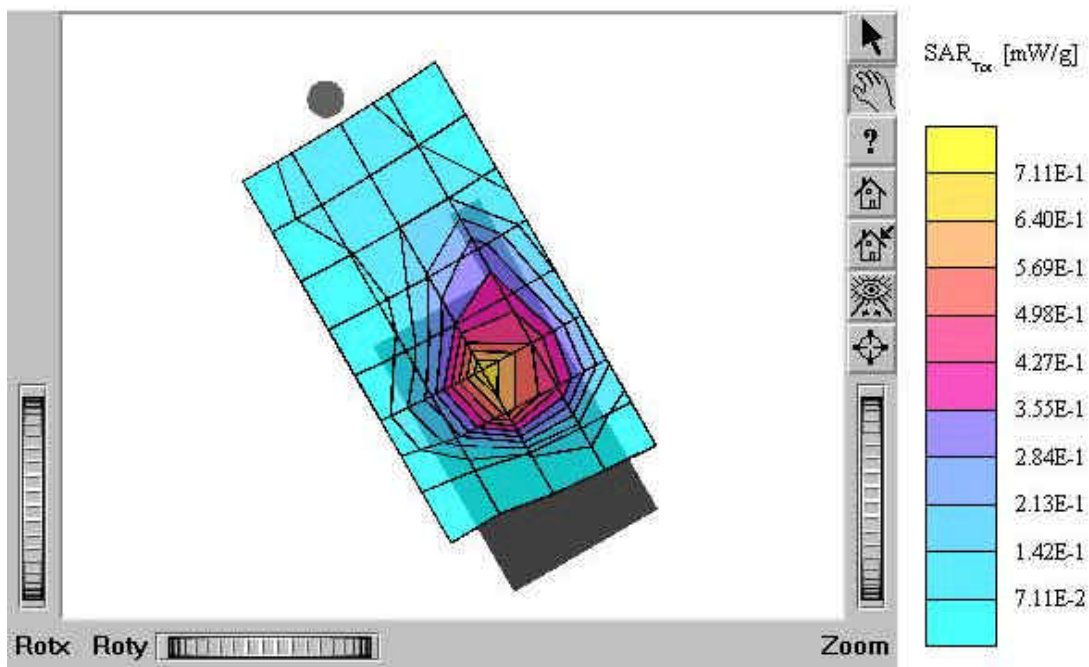

KTFT-UX200

SAM II Phantom: Right Hand [CRP] Section: Position: (90°,180°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1798; ConvP(5.20,5.20,5.20); Crest factor: 1.0; Brain 1900 MHz: $\sigma = 1.39$ mho/m $\epsilon_r = 40.3$ $\rho = 1.00$ g/cm³

Cube 5x5x7; SAR (1g): 0.820 mW/g, SAR (10g): 0.510 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: 0.17 dB

Comment:

FCC ID: SDJKTFT-UX200 / MODEL: KTFT-UX200

Company: KTF Technologies Co., Ltd.


Test Position: Right / touch / Antenna: Fixed

Mode: PCS CDMA / Channel: 600 (1880 MHz)

Conducted Power: 24.0 dBm


Liquid Temperature: 21.6 °C

Date Tested: July 30, 2004

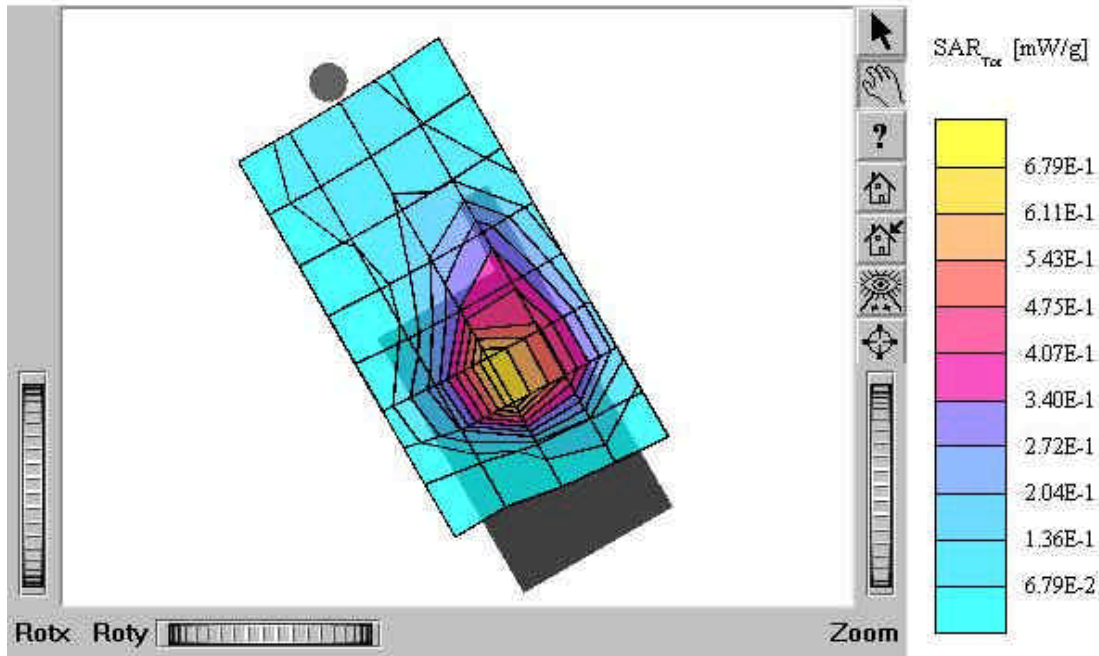


KTFT-UX200

SAM II Phantom: Right Hand [CRP] Section: Position: (90°,180°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1798; ConvP(5.20,5.20,5.20); Crest factor: 1.0; Brain 1900 MHz: $\sigma = 1.39$
mho/m $\epsilon_r = 40.3$ $\rho = 1.00$ g/cm³
Cube 5x5x7; SAR (1g): 1.26 mW/g, SAR (10g): 0.654 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.24 dB
Comment:
FCC ID: SDJKTFT-UX200 / MODEL: KTFT-UX200
Company: KTF Technologies Co., Ltd.
Test Position: Right / touch / Antenna: Fixed
Mode: PCS CDMA / Channel: 1175 (1908.75 MHz)
Conducted Power: 24.0 dBm
Liquid Temperature: 21.6 °C
Date Tested: July 30, 2004

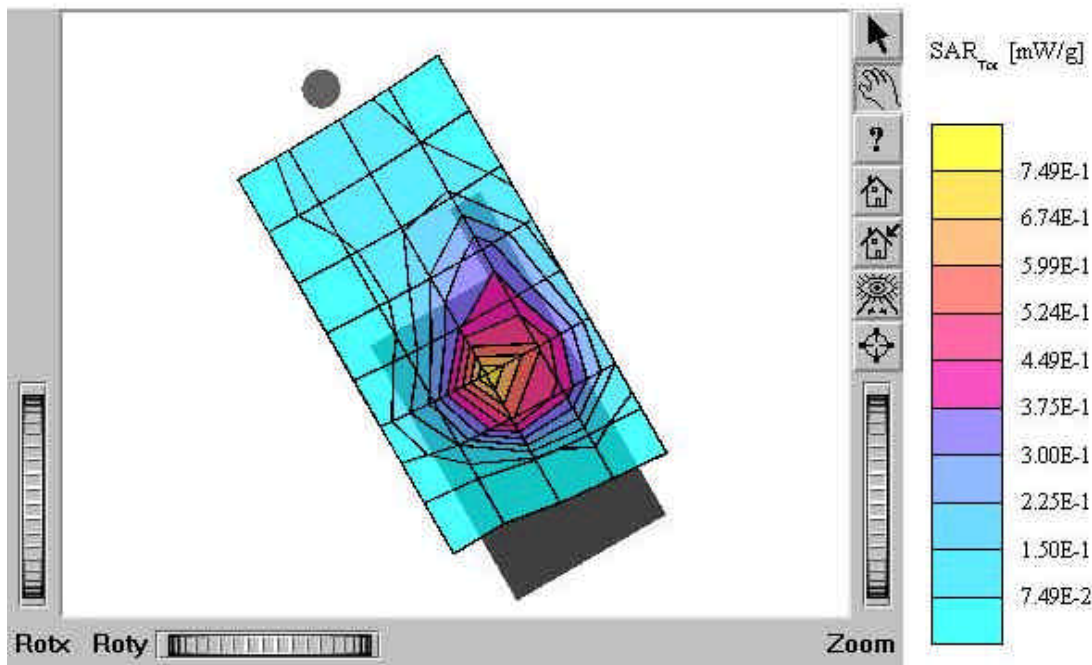

KTFT-UX200

SAM II Phantom: Left Hand [CRP] Section: Position: (90°,180°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1798; ConvF(5.20,5.20,5.20); Crest factor: 1.0; Brain 1900 MHz: $\sigma = 1.39$
mho/m $\epsilon_r = 40.3$ $\rho = 1.00$ g/cm³
Cube 5x5x7; SAR (1g): 0.454 mW/g, SAR (10g): 0.270 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.21 dB
Comment:
FCC ID: SDJKTFT-UX200 / MODEL: KTFT-UX200
Company: KTF Technologies Co., Ltd.
Test Position: Left / tilt 15° / Antenna: Fixed
Mode: PCS CDMA / Channel: 600 (1880 MHz)
Conducted Power: 24.0 dBm
Liquid Temperature: 21.6 °C
Date Tested: July 30, 2004

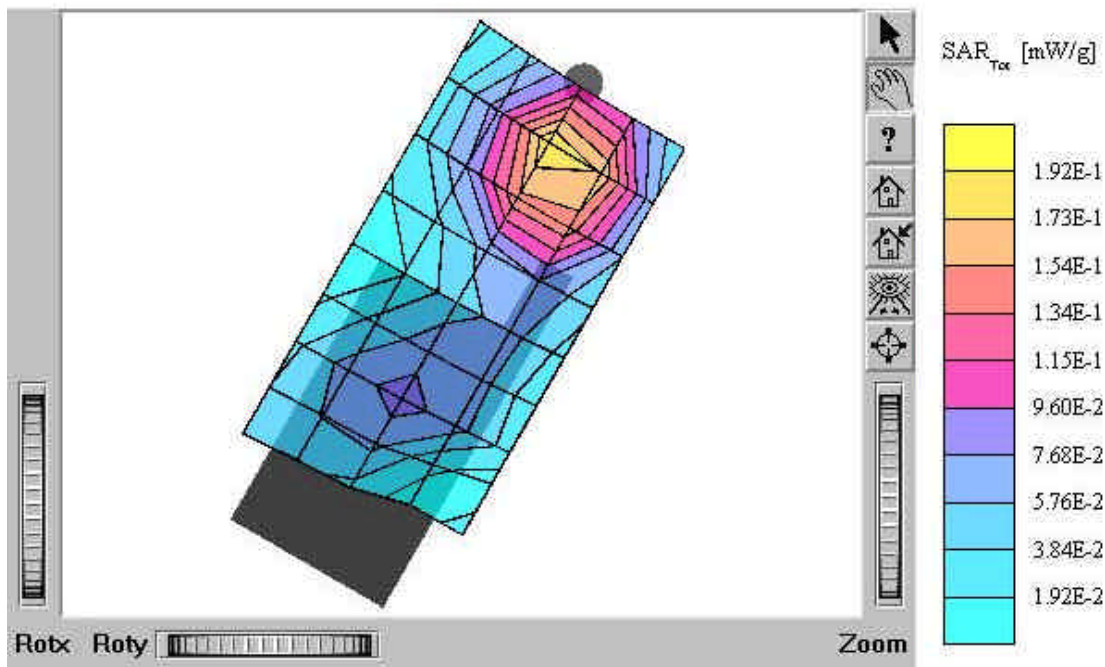

KTFT-UX200

SAM II Phantom; Right Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1798; ConvF(5.20,5.20,5.20); Crest factor: 1.0; Brain 1900 MHz: $\sigma = 1.39$ mho/m $\epsilon_r = 40.3$ $\rho = 1.00$ g/cm³

Cube 5x5x7; SAR (1g): 0.491 mW/g, SAR (10g): 0.297 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.13 dB

Comment:

FCC ID: SDJKTFT-UX200 / MODEL: KTFT-UX200

Company: KTF Technologies Co., Ltd.


Test Position: Right / tilt 15° / Antenna: Fixed

Mode: PCS CDMA / Channel: 600 (1880 MHz)

Conducted Power: 24.0 dBm

Liquid Temperature: 21.6 °C

Date Tested: July 30, 2004

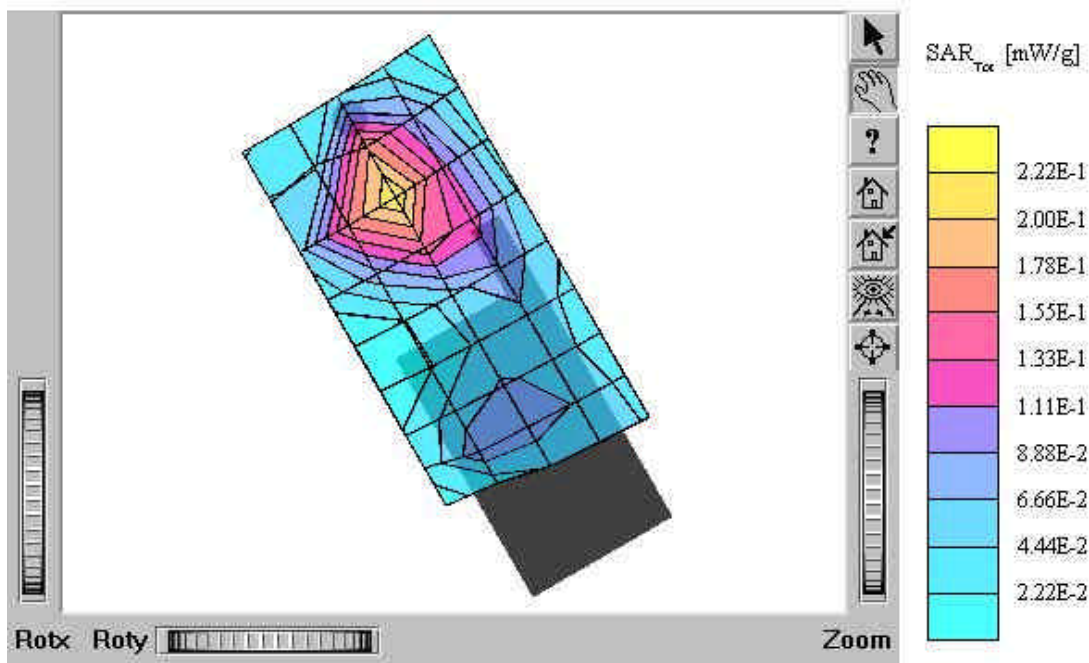

KTFT-UX200 (Body)

SAM II Phantom: Flat Section; Position: (90°, 90°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1798; ConvF(4.70, 4.70, 4.70); Crest factor: 1.0; Body 1900 MHz: $\sigma = 1.57$

mho/m $\epsilon_r = 51.4$ $\rho = 1.00$ g/cm³

Cube 5x5x7; SAR (1g): 0.478 mW/g, SAR (10g): 0.282 mW/g

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: -0.26 dB

Comment:

FCC ID: SDJKTFT-UX200 / MODEL: KTFT-UX200

Company: KTF Technologies Co., Ltd.


Test Position: Body / Antenna: Fixed

Mode: PCS CDMA / Channel: 500 (1880 MHz)

Conducted Power: 24.0 dBm

Liquid Temperature: 21.6 °C

Date Tested: July 30, 2004

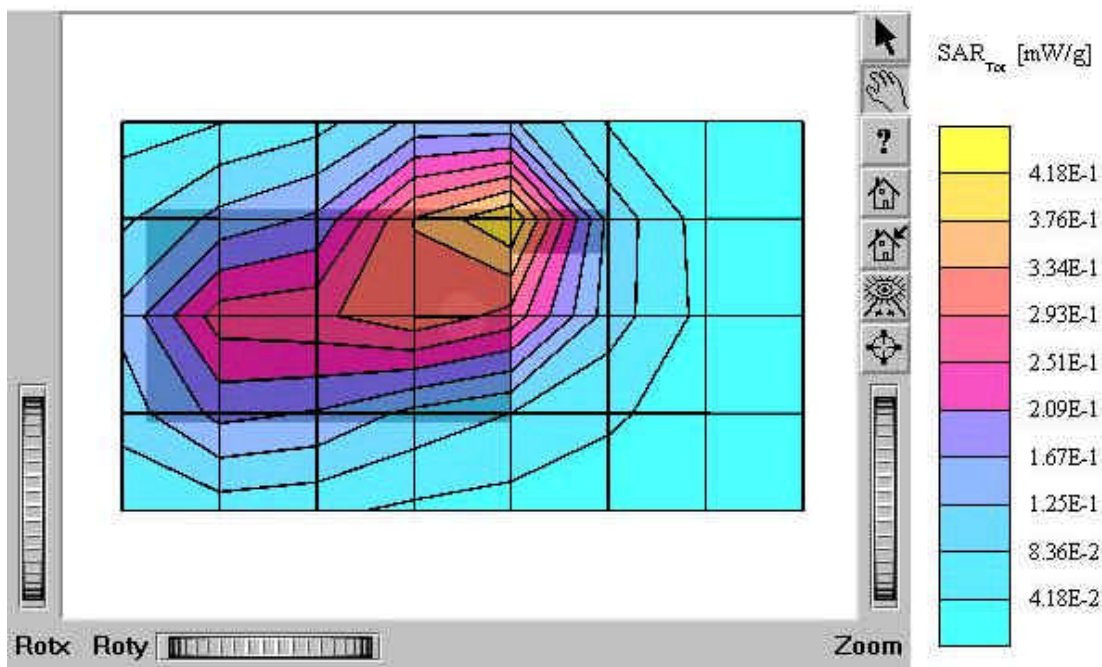

KTFT-UX200 (Body)

SAM II Phantom; Flat Section; Position: (90°, 90°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1798; ConvF(4.70,4.70,4.70); Crest factor: 1.0; Body 1900 MHz: $\sigma = 1.57$

mho/m $\epsilon_r = 51.4$ $\rho = 1.00$ g/cm³

Cube 5x5x7; SAR (1g): 0.459 mW/g, SAR (10g): 0.270 mW/g

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: -0.14 dB

Comment:

FCC ID: SDJKTFT-UX200 / MODEL: KTFT-UX200 (E-battery)

Company: KTF Technologies Co., Ltd.


Test Position: Body / Antenna: Fixed

Mode: PCS CDMA / Channel: 600 (1880 MHz)

Conducted Power: 24.0 dBm

Liquid Temperature: 21.6 °C

Date Tested: July 30, 2004

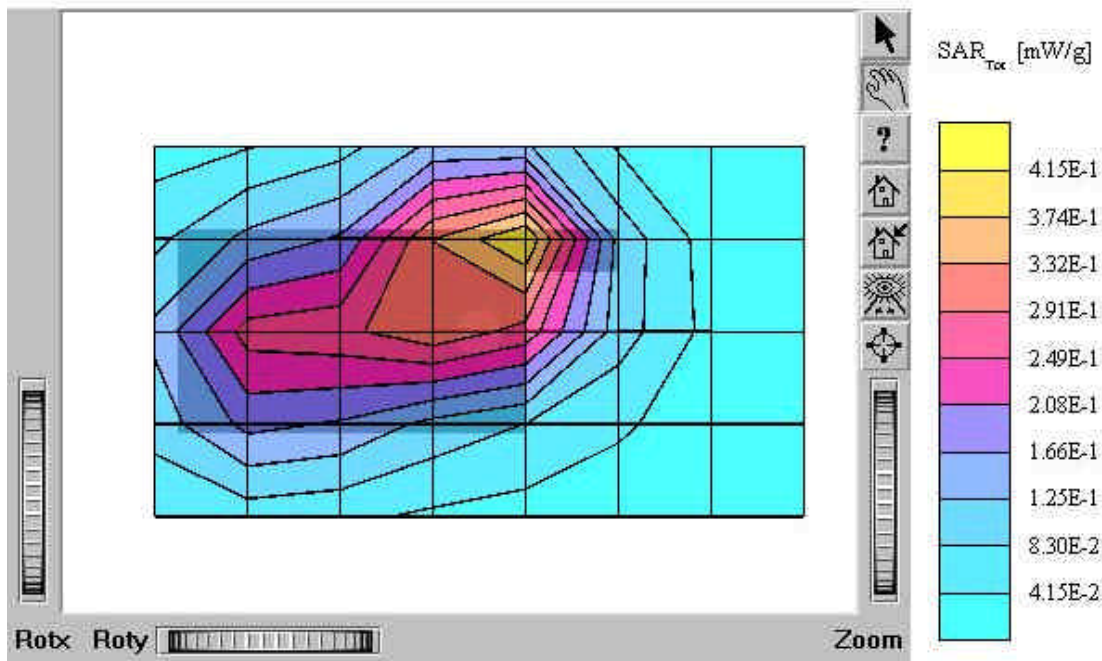

KTFT-UX200 (Body)

SAM I Phantom: Flat Section; Position: (90°, 90°); Frequency: 835 MHz

Probe: ET3DV6 - SN1798; ConvF(6.30,6.30,6.30); Crest factor: 1.0; Body 835 MHz: $\sigma = 0.97$ mho/m $\epsilon_r = 55.8$ $\rho = 1.00$ g/cm³

Cube 5x5x7; SAR (1g): 0.470 mW/g, SAR (10g): 0.324 mW/g

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: -0.15 dB

Comment:

FCC ID: SDJKTFT-UX200 / MODEL: KTFT-UX200

Company: KTF Technologies Co., Ltd.


Test Position: Body / Antenna: Fixed

Mode: CDMA / Channel: 363 (835.89MHz)

Conducted Power: 25.5 dBm

Liquid Temperature: 21.4 °C

Date Tested: July 29, 2004

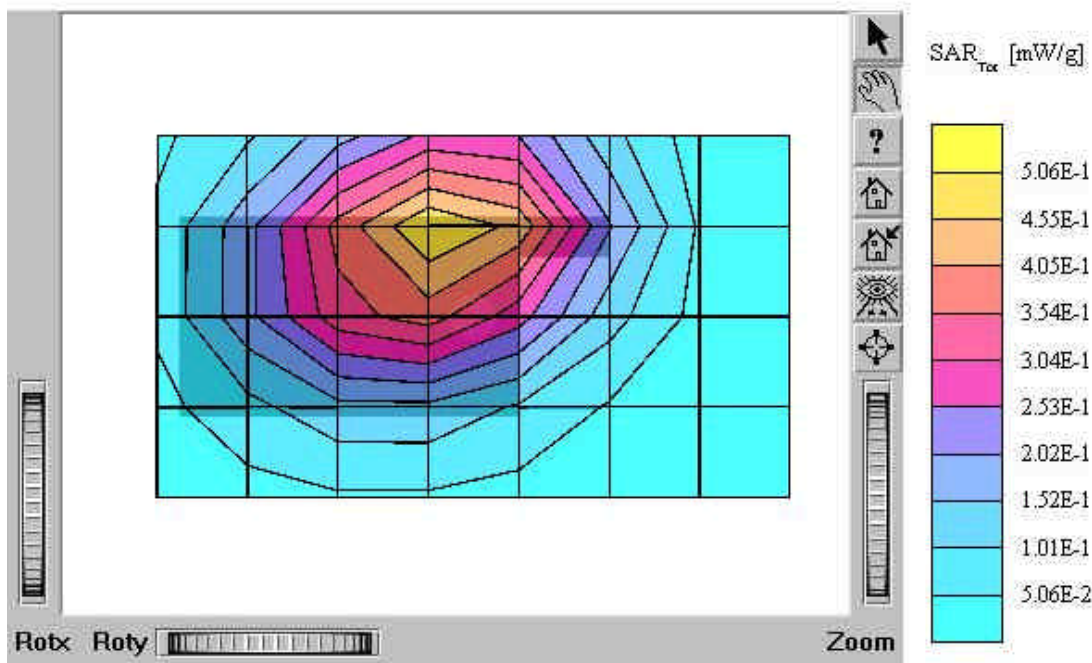

KTFT-UX200 (Body)

SAM 1 Phantom: Flat Section: Position: (90°, 90°); Frequency: 835 MHz

Probe: ET3DV6 - SN1798; ConvF(6.30,6.30,6.30); Crest factor: 1.0; Body 835 MHz: $\sigma = 0.97$

mho/m $\epsilon_r = 55.8$ $\rho = 1.00$ g/cm³

Cube 5x5x7; SAR (1g): 0.459 mW/g, SAR (10g): 0.317 mW/g

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: -0.12 dB

Comment:

FCC ID: SDJKTFT-UX200 / MODEL: KTFT-UX200 (E-battery)

Company: KTF Technologies Co., Ltd.


Test Position: Body / Antenna: Fixed

Mode: CDMA / Channel: 363 (835.89MHz)

Conducted Power: 25.5 dBm

Liquid Temperature: 21.4 °C

Date Tested: July 29, 2004

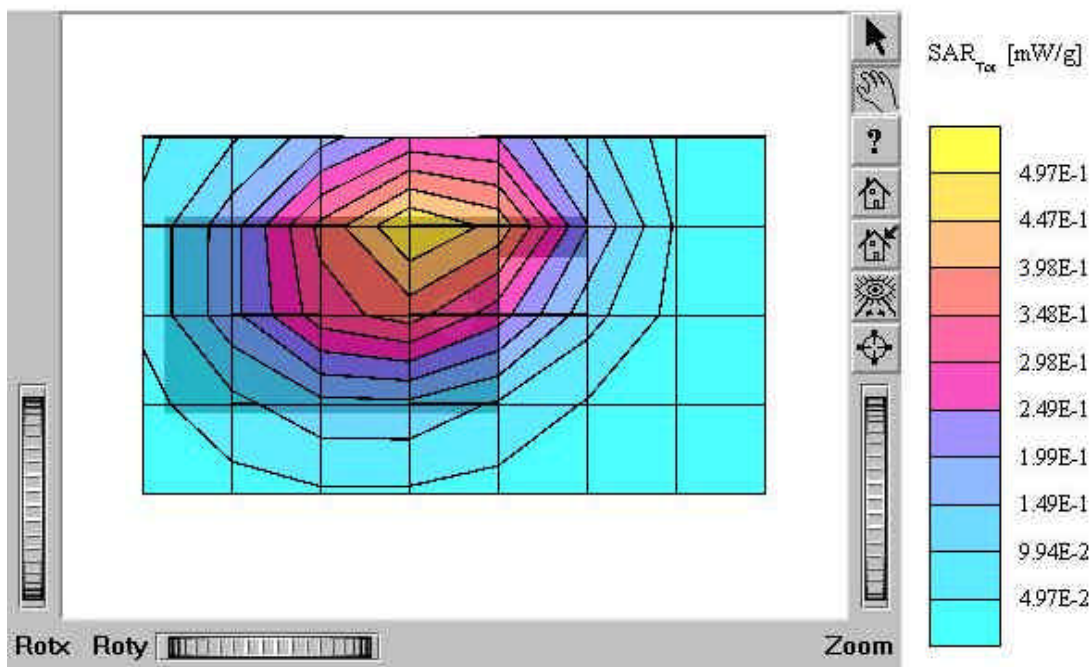

KTFT-UX200 (Body)

SAM I Phantom: Flat Section: Position: (90°, 90°); Frequency: 835 MHz

Probe: ET3DV6 - SN1798; ConvF(6.30,6.30,6.30); Crest factor: 1.0; Body 835 MHz: $\sigma = 0.97$ mho/m $\epsilon_r = 55.8$ $\rho = 1.00$ g/cm³

Cube 5x5x7; SAR (1g): 0.600 mW/g, SAR (10g): 0.415 mW/g

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: -0.12 dB

Comment:

FCC ID: SDJKTFT-UX200 / MODEL: KTFT-UX200

Company: KTF Technologies Co., Ltd.


Test Position: Body / Antenna: Fixed

Mode: AMPS / Channel: 383 (836.49MHz)

Conducted Power: 27.0 dBm

Liquid Temperature: 21.5 °C

Date Tested: July 28, 2004

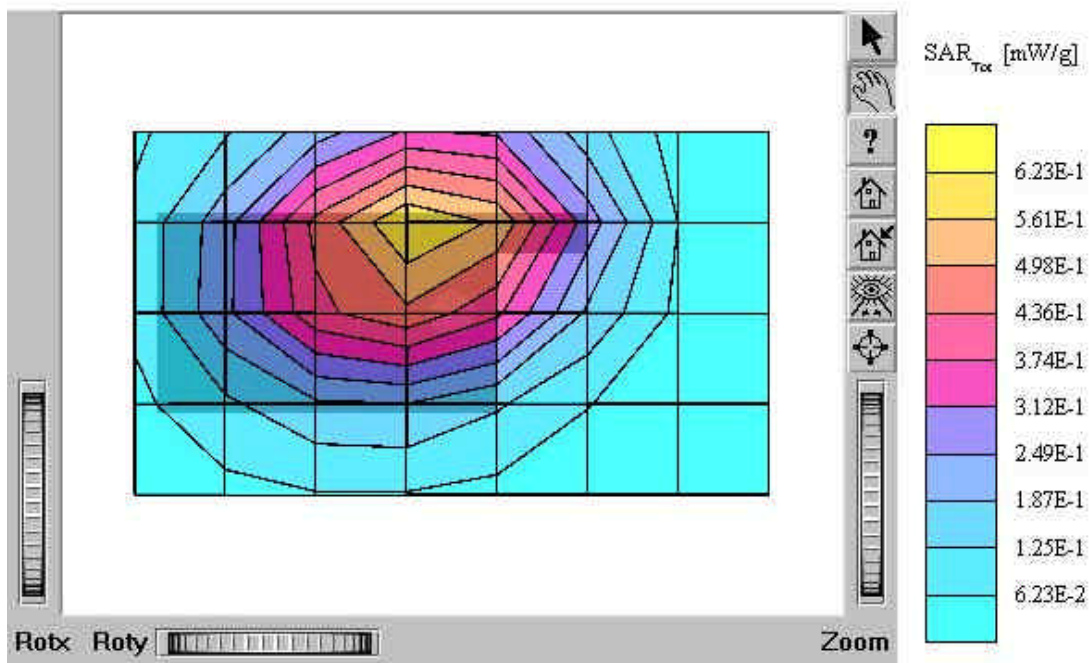

KTFT-UX200 (Body)

SAM I Phantom: Flat Section; Position: (90°, 90°); Frequency: 835 MHz

Probe: ET3DV6 - SN1798; ConvF(6.30, 6.30, 6.30); Crest factor: 1.0; Body 835 MHz: $\sigma = 0.97$ mho/m $\epsilon_r = 55.8$ $\rho = 1.00$ g/cm³

Cube 5x5x7; SAR (1g): 0.563 mW/g, SAR (10g): 0.388 mW/g

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: -0.25 dB

Comment:

FCC ID: SDJKTFT-UX200 / MODEL: KTFT-UX200 (E-battery)

Company: KTF Technologies Co., Ltd.


Test Position: Body / Antenna: Fixed

Mode: AMPS / Channel: 383 (836.49MHz)

Conducted Power: 27.0 dBm

Liquid Temperature: 21.5 °C

Date Tested: July 28, 2004

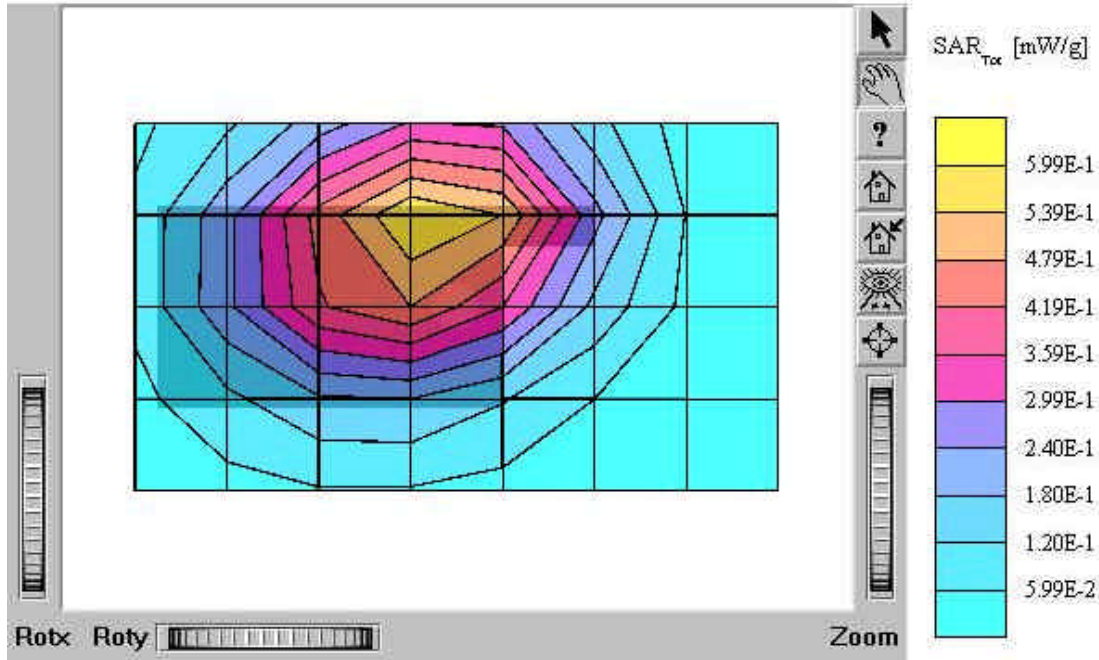

KTFT-UX200

SAM I Phantom: Section: Position: ; Frequency: 835 MHz

Probe: ET3DV6 - SN1798; ConvF(6.60,6.60,6.60); Crest factor: 1.0; Brain 835 MHz: $\sigma = 0.89$ mho/m $\epsilon_r = 42.8$ $\rho = 1.00$ g/cm³

;

Z-Axis: Dx = 0.0, Dy = 0.0, Dz = 5.0

Comment:

FCC ID: SDJKTFT-UX200 / MODEL: KTFT-UX200

Company: KTF Technologies Co., Ltd.


Test Position: Right Touch / Antenna: Fixed

Mode: AMPS / Channel: 799 (848.97MHz)

Conducted Power: 27.0 dBm

Liquid Temperature: 21.5 °C

Date Tested: July 28, 2004

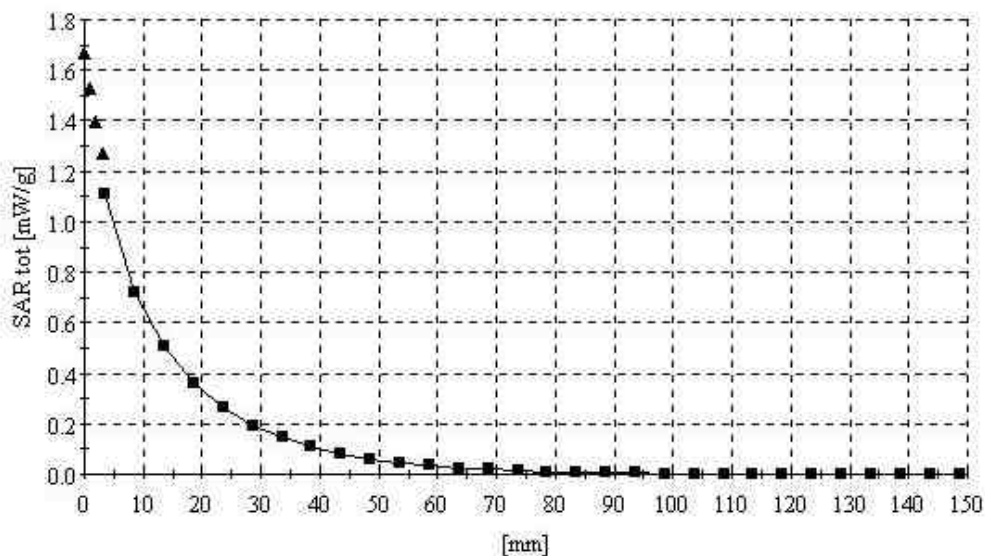

KTFT-UX200

SAM I Phantom: Section: Position: ; Frequency: 835 MHz

Probe: ET3DV6 - SN1798; ConvF(6.60,6.60,6.60); Crest factor: 1.0; Brain 835 MHz: $\sigma = 0.89$ mho/m $\epsilon_r = 42.8$ $\rho = 1.00$ g/cm³

:

Z-Axis: Dx = 0.0, Dy = 0.0, Dz = 5.0

Comment:

FCC ID: SDJKTFT-UX200 / MODEL: KTFT-UX200

Company: KTF Technologies Co., Ltd.


Test Position: Right / touch / Antenna: Fixed

Mode: CDMA / Channel: 363 (835.89MHz)

Conducted Power: 25.5 dBm

Liquid Temperature: 21.4 °C

Date Tested: July 29, 2004

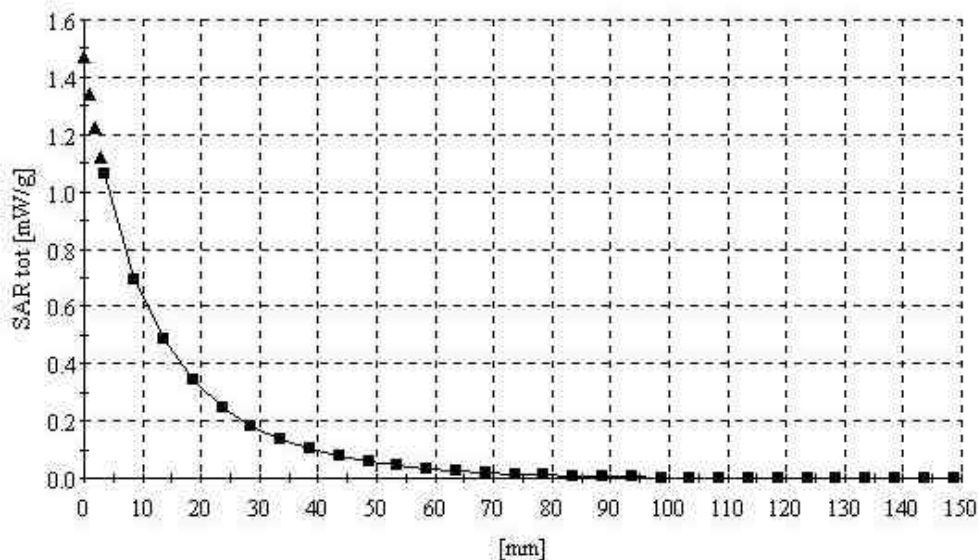

KTFT-UX200

SAM II Phantom; Section: Position: ; Frequency: 1900 MHz

Probe: ET3DV6 - SN1798; ConvF(5.20,5.20,5.20); Crest factor: 1.0; Brain 1900 MHz: $\sigma = 1.39$
mho/m $\epsilon_r = 40.3$ $\rho = 1.00$ g/cm³

Z-Axis: Dx = 0.0; Dy = 0.0; Dz = 5.0

Comment:

FCC ID: SDJKTFT-UX200 / MODEL: KTFT-UX200

Company: KTF Technologies Co., Ltd.


Test Position: Left / touch / Antenna: Fixed

Mode: PCS CDMA / Channel: 25 (1851.25MHz)

Conducted Power: 24.0 dBm

Liquid Temperature: 21.6 °C

Date Tested: July 30, 2004

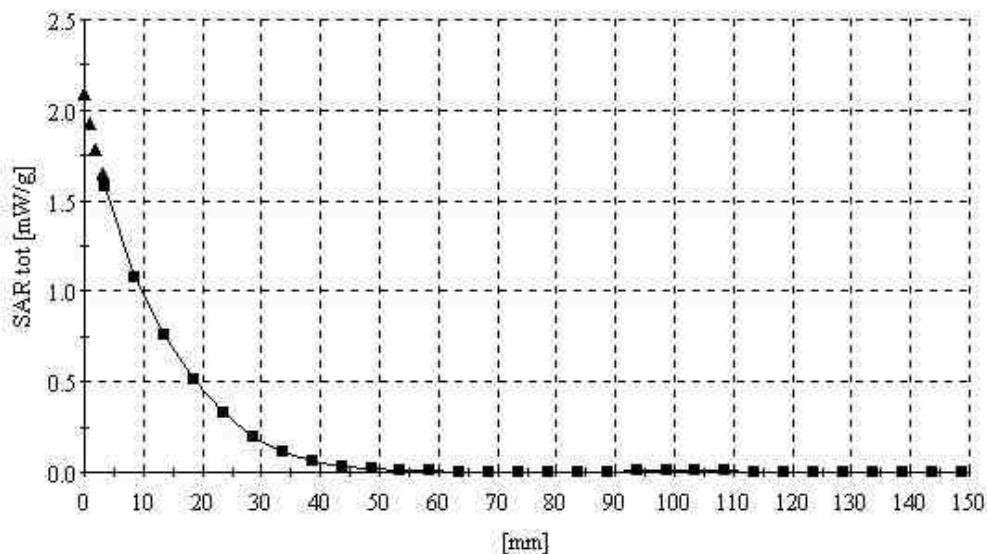

KTFT-UX200 (Body)

SAM I Phantom: Section: Position: ; Frequency: 835 MHz

Probe: ET3DV6 - SN1798; ConvF(6.30,6.30,6.30); Crest factor: 1.0; Body 835 MHz: $\sigma = 0.97$
mho/m $\epsilon_r = 55.8$ $\rho = 1.00$ g/cm³

Z-Axis: Dx = 0.0, Dy = 0.0, Dz = 5.0

Comment:

FCC ID: SDJKTFT-UX200 / MODEL: KTFT-UX200

Company: KTF Technologies Co., Ltd.


Test Position: Body / Antenna: Fixed

Mode: AMPS / Channel: 383 (836.49MHz)

Conducted Power: 27.0 dBm

Liquid Temperature: 21.5 °C

Date Tested: July 28, 2004

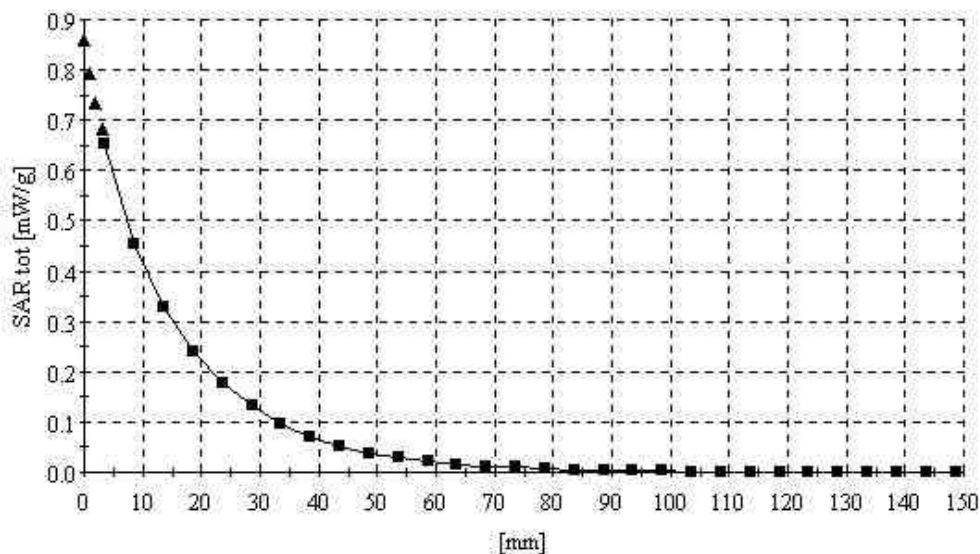

KTFT-UX200 (Body)

SAM I Phantom; Section: Position: ; Frequency: 835 MHz

Probe: ET3DV6 - SN1798; ConvF(6.30,6.30,6.30); Crest factor: 1.0; Body 835 MHz: $\sigma = 0.97$ mho/m $\epsilon_r = 55.8$ $\rho = 1.00$ g/cm³

:

Z-Axis: Dx = 0.0, Dy = 0.0, Dz = 5.0

Comment:

FCC ID: SDJKTFT-UX200 / MODEL: KTFT-UX200

Company: KTF Technologies Co., Ltd.


Test Position: Body / Antenna: Fixed

Mode: CDMA / Channel: 363 (835.89MHz)

Conducted Power: 25.5 dBm

Liquid Temperature: 21.4 °C

Date Tested: July 29, 2004

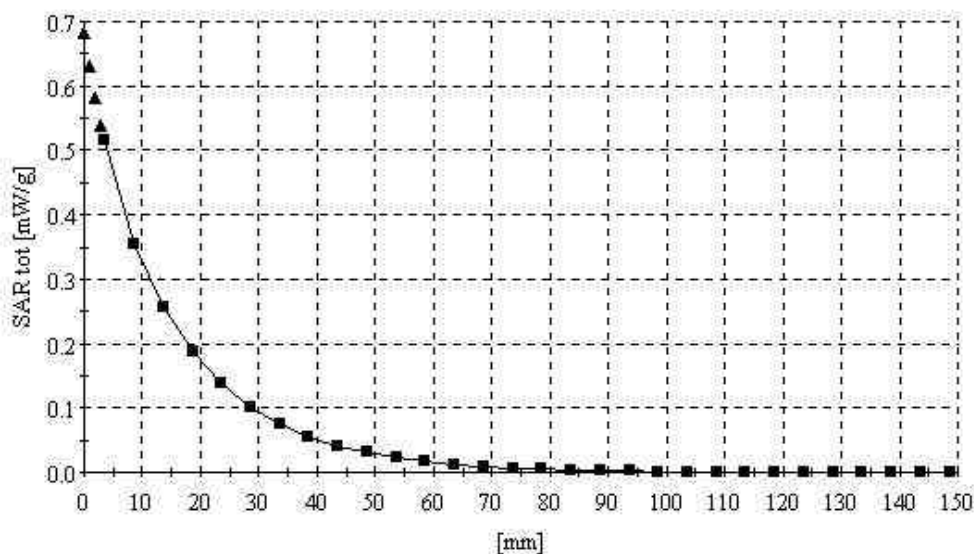

KTFT-UX200 (Body)

SAM II Phantom: Section: Position: ; Frequency: 1900 MHz

Probe: ET3DV6 - SN1798; ConvF(4.70,4.70,4.70); Crest factor: 1.0; Body 1900 MHz: $\sigma = 1.57$
mho/m $\epsilon_r = 51.4$ $\rho = 1.00$ g/cm³

Z-Axis: Dx = 0.0, Dy = 0.0, Dz = 5.0

Comment:

FCC ID: SDJKTFT-UX200 / MODEL: KTFT-UX200

Company: KTF Technologies Co., Ltd.

Test Position: Body / Antenna: Fixed

Mode: PCS CDMA / Channel: 600 (1880 MHz)

Conducted Power: 24.0 dBm

Liquid Temperature: 21.6 °C

Date Tested: July 30, 2004

