

FCC

RF

TEST REPORT


ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
WATER DANCING TOWER SPEAKER

ISSUED TO
Tonika Electronics Technology (Shenzhen) CO., Ltd

3rd floor, D Building, Haikexing Industrial Park No.16, Baoshan Road,
Jinlong Avenue, Pingshan New District, Shenzhen, China

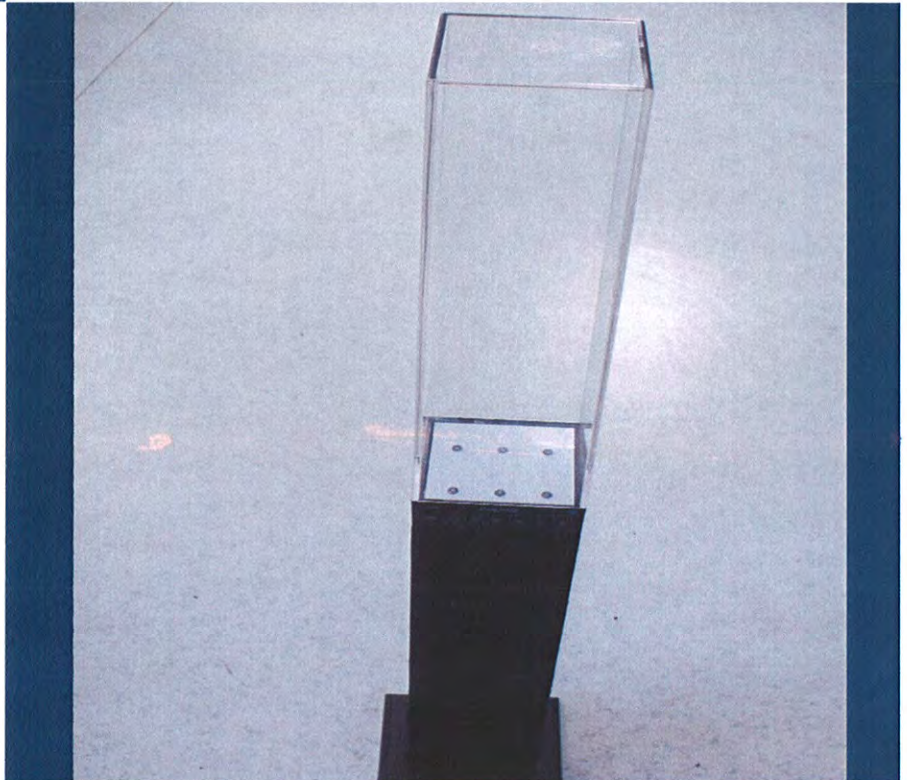

Prepared by: Zhang Yangqing
Zhang Yangqing
(Reporting Specialist)

Date: May 21, 2015

Approved by: Wei Yanquan
Wei Yanquan
(Chief Engineer)

Date: May 21, 2015

Report No.: BL-SZ1540120-601

EUT Type: WATER DANCING TOWER SPEAKER

Model Name: TA-440, CHT965

Brand Name: Tonika, Craig

Test Standard: 47 CFR Part 15 Subpart C

FCC ID: SDNTA-440-01

Test conclusion: Pass

Test Date: May. 10, 2015 ~ May. 19, 2015

Date of Issue: May. 21, 2015

NOTE: This test report can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. BALUN Laboratory. Any objections should be raised within thirty days from the date of issue. To validate the report, please visit BALUN website.

Revision History

Version	Issue Date	Revisions
Rev. 01	May. 21, 2015	Initial Issue

TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION)	5
1.1	Identification of the Testing Laboratory.....	5
1.2	Identification of the Responsible Testing Location	5
1.3	Announce	5
2	PRODUCT INFORMATION	6
2.1	Applicant	6
2.2	Manufacturer	6
2.3	General Description for Equipment under Test (EUT)	6
2.4	Technical Information	6
2.5	Ancillary Equipment.....	7
3	SUMMARY OF TEST RESULTS	8
3.1	Test Standards.....	8
3.2	Verdict.....	8
4	GENERAL TEST CONFIGURATIONS	9
4.1	Test Environments	9
4.2	Test Equipment List.....	9
4.3	Test Configurations	10
4.4	Description of Test Setup	10
4.4.1	For Antenna Port Test	10
4.4.2	For AC Power Supply Port Test.....	11
4.4.3	For Radiated Test (Below 30 MHz).....	11
4.4.4	For Radiated Test (30 MHz-1 GHz)	12
4.4.5	For Radiated Test (Above 1 GHz)	12
4.5	Test Conditions	13

4.6	Measurement Results Explanation Example	14
4.6.1	For conducted test items:	14
4.6.2	For radiated band edges and spurious emission test:	14
5	TEST ITEMS	15
5.1	Antenna Requirements	15
5.1.1	Standard Applicable	15
5.1.2	Antenna Anti-Replacement Construction	15
5.1.3	Antenna Gain	15
5.2	Number of Hopping Frequency	16
5.2.1	Limit	16
5.2.2	Test Procedure	16
5.3	Peak Output Power	17
5.3.1	Test Limit	17
5.3.2	Test Procedure	17
5.4	Occupied Bandwidth	18
5.4.1	Limit	18
5.4.2	Test Procedure	18
5.5	Carrier Frequency Separation	19
5.5.1	Limit	19
5.5.2	Test Procedure	19
5.6	Time of Occupancy (Dwell time)	20
5.6.1	Limit	20
5.6.2	Test Procedure	20
5.7	Conducted Spurious Emission	21
5.7.1	Limit	21
5.7.2	Test Procedure	21
5.8	Conducted Emission	22
5.8.1	Limit	22
5.8.2	Test Procedure	22
5.9	Radiated Spurious Emission	23
5.9.1	Limit	23

5.9.2	Test Procedure	23
5.10	Band Edge	25
5.10.1	Limit	25
5.10.2	Test Procedure	25
ANNEX A	TEST RESULT	26
A.1	Number of Hopping Frequency	26
A.2	Peak Output Power	30
A.3	Occupied Bandwidth	36
A.4	Hopping Frequency Separation	42
A.5	Average Time of Occupancy	44
A.6	Conducted Spurious Emissions	50
A.7	Conducted Emissions	63
A.8	Radiated Emission	65
A.9	Band Edge	92

1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6683 3402
Fax Number	+86 755 6182 4271

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1. The laboratory has been listed by US Federal Communications Commission to perform electromagnetic emission measurements. The recognition numbers of test site are 832625. The laboratory has met the requirements of the IAS Accreditation Criteria for Testing Laboratories (AC89), has demonstrated compliance with ISO/IEC Standard 17025:2005. The accreditation certificate number is TL-588. The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Announce

- (1) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (2) The test report is invalid if there is any evidence and/or falsification.
- (3) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (4) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

2 PRODUCT INFORMATION

2.1 Applicant

Applicant	Tonika Electronics Technology (Shenzhen) CO., Ltd
Address	3rd floor, D Building, Haikexing Industrial Park No.16, Baoshan Road, Jinlong Avenue, Pingshan New District, Shenzhen, China

2.2 Manufacturer

Manufacturer	Tonika Electronics Technology (Shenzhen) CO., Ltd
Address	3rd floor, D Building, Haikexing Industrial Park No.16, Baoshan Road, Jinlong Avenue, Pingshan New District, Shenzhen, China

2.3 General Description for Equipment under Test (EUT)

EUT Type	WATER DANCING TOWER SPEAKER
The Under Test Model Name	TA-440
Series Model Name	TA-440, CHT965
Description of Model name differentiation	The equipment model TA-440 and CHT965 are WATER DANCING TOWER SPEAKER, the electrical parameters and internal structure of circuit are same, only the model is different.
Hardware Version	Ver 1.0
Software Version	Ver 1.0
Network and Wireless connectivity	Bluetooth 2.1+EDR
About the Product	The equipment is WATER DANCING TOWER SPEAKER, it contains Bluetooth 2.1+ERR operating at 2.4 GHz ISM band.

2.4 Technical Information

Modulation Technology	FHSS
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Transfer Rate	1 Mbps, 2 Mbps, 3 Mbps
Frequency Range	The frequency range used is 2402 MHz – 2480 MHz; The frequency block is 2400 MHz to 2483.5 MHz.
Number of channel	79 (at intervals of 1 MHz)
Tested Channel	0 (2402 MHz), 39 (2441 MHz), 78 (2480 MHz).
Antenna Type	PCB Antenna
Antenna Gain	0 dBi (All involve the antenna gain test item, has been included in the final results)

Note: The above EUT information in section 2.3 and 2.4 was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

2.5 Ancillary Equipment

Ancillary Equipment 1	Charger	
	Brand Name	N/A
	Model No	GQ30-120200-AU
	Serial No	N/A
	Rated Input	~ 100-240 V, 1.0 A, 50/60 Hz
	Rated Output	= 12 V, 2 A
Ancillary Equipment 2	Audio Line	
	Length	50 cm
Ancillary Equipment 3	Remote Control	

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C (10-1-14 Edition)	Miscellaneous Wireless Communications Services
2	FCC PUBLIC NOTICE DA 00-705 (Mar. 30, 2000)	Filling and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems
3	ANSI C63.4-2003	American National Standard for Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
4	ANSI C63.10-2009	American National Standard for Testing Unlicensed Wireless Devices

3.2 Verdict

No.	Description	FCC Part No.	Test Result	Verdict
1	Antenna Requirement	15.203	--	Pass ^{Note 1}
2	Number of Hopping Frequency	15.247(a)	ANNEX A.1	Pass
3	Peak Output Power	15.247(b)	ANNEX A.2	Pass
4	Occupied Bandwidth	15.247(a)	ANNEX A.3	Pass
5	Carrier Frequency Separation	15.247(a)	ANNEX A.4	Pass
6	Time of Occupancy (Dwell time)	15.247(a)	ANNEX A.5	Pass
7	Conducted Spurious Emission	15.247(d)	ANNEX A.6	Pass
8	Conducted Emission	15.207	ANNEX A.7	Pass
9	Radiated Spurious Emission	15.209 15.247(d)	ANNEX A.8	Pass
10	Band Edge	15.209 15.247(d)	ANNEX A.9	Pass
Note 1: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.				

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% - 55%	
Atmospheric Pressure	100 kPa - 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	AC 110 V/60 Hz

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2014.07.10	2015.07.09
Vector Signal Generator	ROHDE&SCHWARZ	SMBV100A	177746	2014.07.09	2015.07.08
Signal Generator	ROHDE&SCHWARZ	SMB100A	260592	2014.07.21	2015.07.20
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2014.07.23	2015.07.22
Spectrum Analyzer	AGILENT	E4440A	MY45304434	2014.10.18	2015.10.17
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2014.07.07	2015.07.06
LISN	SCHWARZBECK	NSLK 8127	8127-687	2014.07.07	2015.07.06
Bluetooth Tester	ROHDE&SCHWARZ	CBT	101005	2014.07.07	2015.07.06
Power Splitter	KMW	DCPD-LDC	1305003215	2014.07.07	2015.07.06
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2014.07.07	2015.07.06
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	--	--
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	--	--
DC Power Supply	ROHDE&SCHWARZ	HMP2020	018141664	2014.07.09	2015.07.08
Temperature Chamber	ANGELANTIONI SCIENCE	NTH64-40A	1310	2014.07.07	2015.07.06
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2013.07.02	2015.07.01
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2013.07.03	2015.07.02
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1148	2013.07.02	2015.07.01
Test Antenna-Horn(15-26.5 GHz)	SCHWARZBECK	BBHA 9170	9170-305	2013.07.02	2015.07.01
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2015.02.28	2016.02.27
Shielded Enclosure	ChangNing	CN-130701	130703	--	--

4.3 Test Configurations

Test Configurations (TC) NO.	Description	
	Signal Description	Operating Frequency
Transmitter		
TC01	GFSK modulation, package type DH5, hopping on	--
TC02	GFSK modulation, package type DH5, hopping off	Ch No. 0/ 2402 MHz
TC03	GFSK modulation, package type DH5, hopping off	Ch No. 39/ 2441 MHz
TC04	GFSK modulation, package type DH5, hopping off	Ch No. 78/ 2480 MHz
TC05	$\pi/4$ -DQPSK modulation, package type DH5, hopping on	--
TC06	$\pi/4$ -DQPSK modulation, package type DH5, hopping off	Ch No. 0/ 2402 MHz
TC07	$\pi/4$ -DQPSK modulation, package type DH5, hopping off	Ch No. 39/ 2441 MHz
TC08	$\pi/4$ -DQPSK modulation, package type DH5, hopping off	Ch No. 78/ 2480 MHz
TC09	8DPSK modulation, package type DH5, hopping on	--
TC10	8DPSK modulation, package type DH5, hopping off	Ch No. 0/ 2402 MHz
TC11	8DPSK modulation, package type DH5, hopping off	Ch No. 39/ 2441 MHz
TC12	8DPSK modulation, package type DH5, hopping off	Ch No. 78/ 2480 MHz


4.4 Description of Test Setup

4.4.1 For Antenna Port Test




(Diagram 1)

4.4.2 For AC Power Supply Port Test

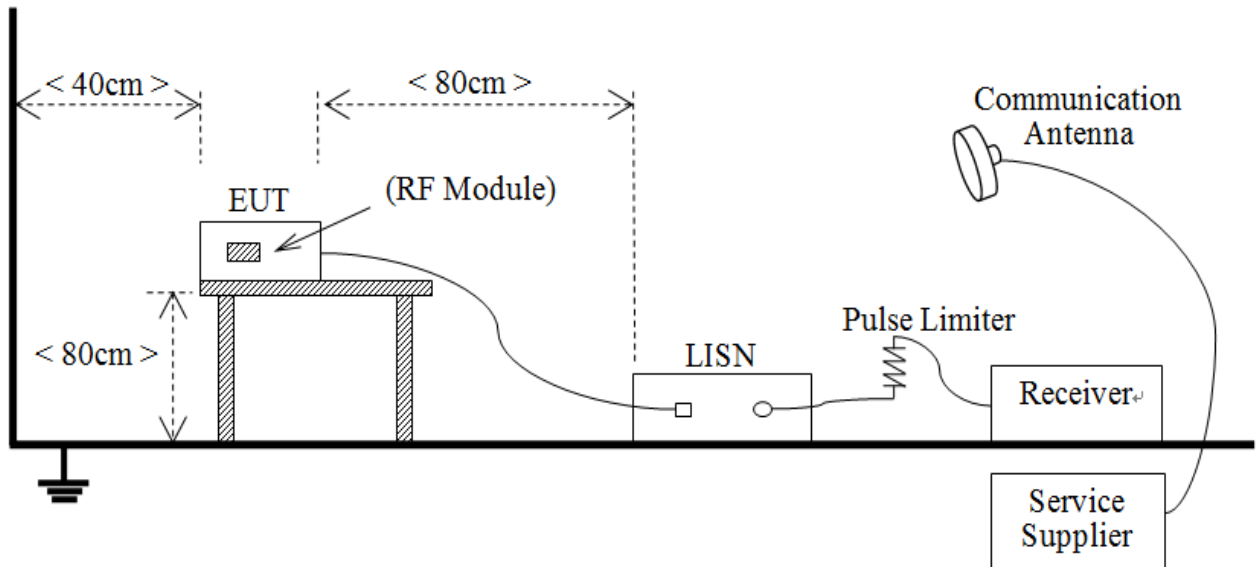


(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

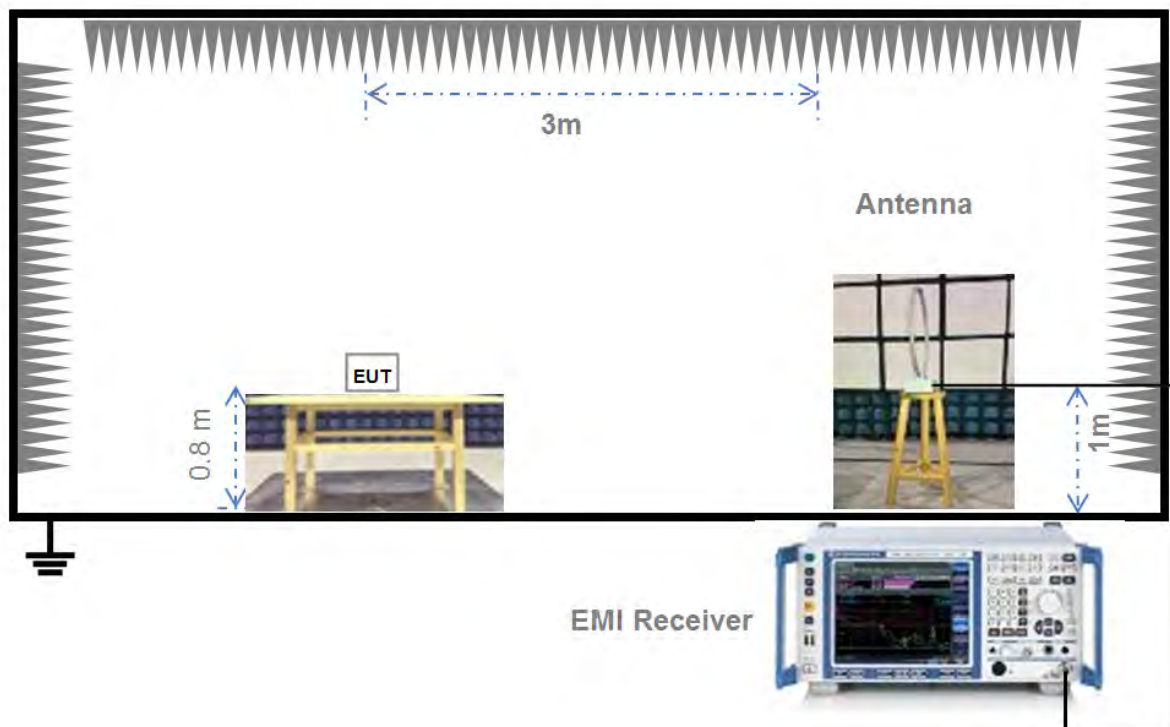


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

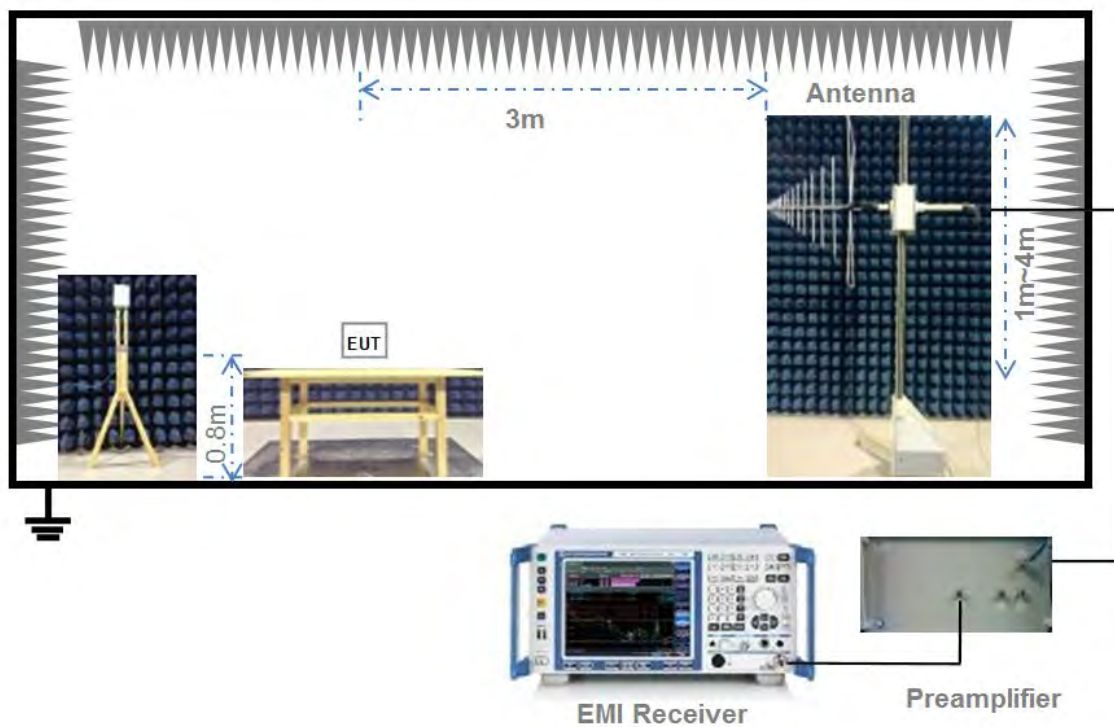

(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

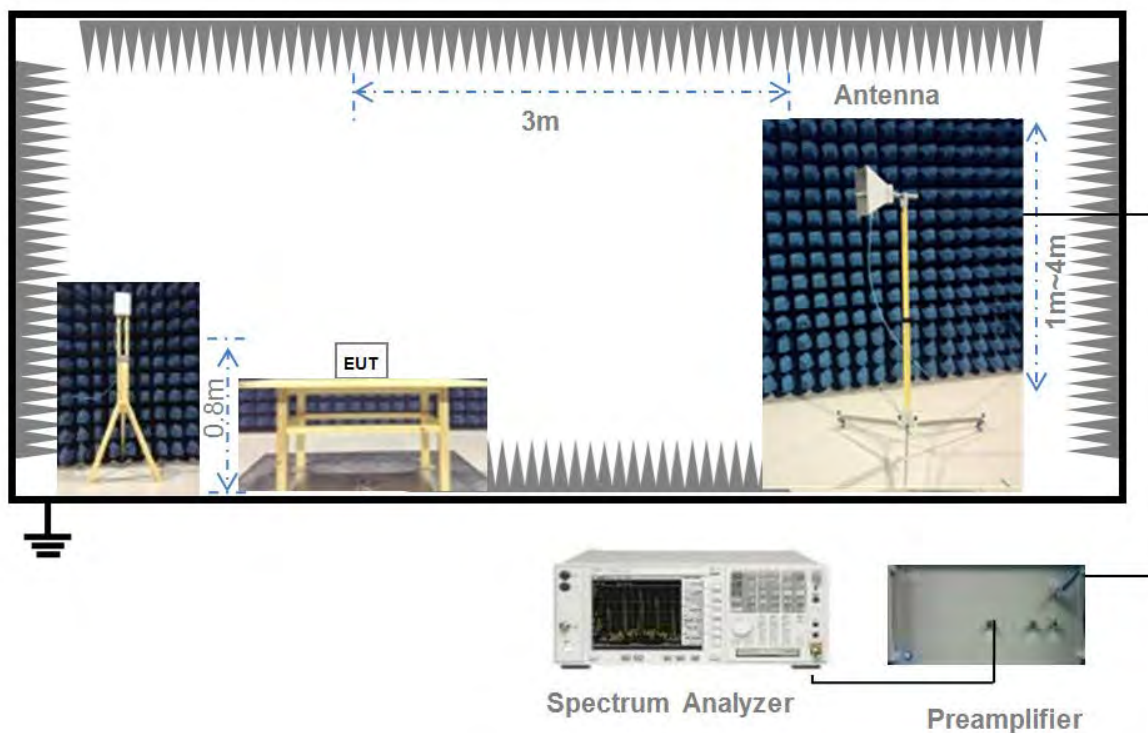

(Diagram 5)

4.5 Test Conditions

Test Case	Test Conditions		
	Test Env.	Test Setup ^{Note 1}	Test Configuration ^{Note 2}
Number of Hopping Frequency	NTNV	Test Setup 1	TC01, TC05, TC09
Peak Output Power	NTNV	Test Setup 1	TC02, TC03, TC04, TC06, TC07, TC08, TC10, TC11, TC12
Occupied Bandwidth	NTNV	Test Setup 1	TC02, TC03, TC04, TC06, TC07, TC08, TC10, TC11, TC12
Carrier Frequency Separation	NTNV	Test Setup 1	TC01, TC05, TC09
Time of Occupancy (Dwell time)	NTNV	Test Setup 1	TC01, TC05, TC09
Conducted Spurious Emission	NTNV	Test Setup 1	TC02, TC03, TC04, TC06, TC07, TC08, TC10, TC11, TC12
Conducted Emission	NTNV	Test Setup 2	TC01, TC02, TC03, TC04, TC05, TC06, TC07, TC08, TC09, TC10, TC11, TC12
Radiated Emission	NTNV	Test Setup 3 Test Setup 4 Test Setup 5	TC01, TC02, TC03, TC04, TC05, TC06, TC07, TC08, TC09, TC10, TC11, TC12
Band Edge	NTNV	Test Setup 5	TC01, TC02, TC04, TC05, TC06, TC08, TC09, TC10, TC12
Note: 1. Please refer to section 4.4 for test setup details. 2. Please refer to section 4.3 for test configuration details.			

4.6 Measurement Results Explanation Example

4.6.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

4.6.2 For radiated band edges and spurious emission test:

Per part 15.35(c), the EUT Bluetooth average emission level could be determined by the peak emission level applying duty cycle correction factor, to represent averaging over the whole pulse train.

The average level is derived from the peak level corrected with "Duty cycle correction factor".

Average Emission Level (dBuV/m) = Peak Emission Level (dBuV/m) + Duty cycle correction factor (dB)

Duty cycle correction factor (dB) = $20 * \log (\text{Duty cycle})$.

Duty cycle = on time / 100 milliseconds

On time = dwell time * hopping number in 100 ms

For example: bluetooth with dwell time 2.9 ms and 3 hops in 100 ms, then

Duty cycle correction factor (dB) = $20 * \log ((2.9 * 3) / 100) = -21.21 \text{ dB}$

Following shows an average computation example with duty cycle correction factor = -21.21 dB, and the peak emission level is 45.61 dBuV/m.

Example:

Average Emission Level (dBuV/m) = Peak Emission Level (dBuV/m) + duty cycle correction factor (dB)
= $45.61 + (-21.21) = 24.4 \text{ (dBuV/m)}$

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Standard Applicable

FCC §15.203 & 15.247(b)


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is An embedded-in	An embedded-in antenna design is used.

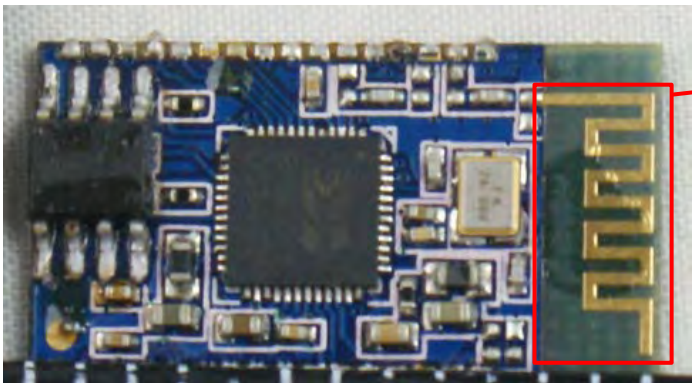Reference Documents	Item
Photo	

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Number of Hopping Frequency

5.2.1 Limit

FCC §15.247(a) (1) (iii)

Frequency hopping systems operating in the 2400 MHz to 2483.5 MHz bands shall use at least 15 hopping frequencies.

5.2.2 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.3 Peak Output Power

5.3.1 Test Limit

FCC § 15.247(b)

For frequency hopping systems that operates in the 2400 MHz to 2483.5 MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1 Watt.

5.3.2 Test Procedure

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

5.4 Occupied Bandwidth

5.4.1 Limit

FCC §15.247(a)

The 20 dB bandwidth is known as the 99% emission bandwidth, or 20 dB bandwidth ($10 \cdot \log 1\% = 20$ dB) taking the total RF output power.

5.4.2 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq$ 1% of the 20 dB bandwidth

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.5 Carrier Frequency Separation

5.5.1 Limit

FCC §15.247(a)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

5.5.2 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

5.6 Time of Occupancy (Dwell time)

5.6.1 Limit

FCC §15.247(a)

Frequency hopping systems in the 2400 MHz - 2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

5.6.2 Test Procedure

The average time of occupancy on any channel within the Period can be calculated with formulas:

For DH1 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For DH3 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For DH5 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

5.7 Conducted Spurious Emission

5.7.1 Limit

FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.7.2 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.8 Conducted Emission

5.8.1 Limit

FCC §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.8.2 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

5.9 Radiated Spurious Emission

5.9.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	$2400/F(\text{kHz})$	300
0.490 - 1.705	$24000/F(\text{kHz})$	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength ($\text{dB}\mu\text{V/m}$) = $20 \cdot \log[\text{Field Strength } (\mu\text{V/m})]$.
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: $54\text{dB}\mu\text{V/m}@3\text{m (AV)}$ and $74\text{dB}\mu\text{V/m}@3\text{m (PK)}$.

5.9.2 Test Procedure

The measurement frequency range is from 30 MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360° , and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1 \text{ GHz}$, 100 kHz for $f < 1 \text{ GHz}$

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported

5.10 Band Edge

5.10.1 Limit

FCC §15.209&15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.10.2 Test Procedure

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep = auto

Detector function = peak /AV

Trace = max hold

Allow the trace to stabilize.

$E \text{ [dB}\mu\text{V/m]} = UR + AT + A\text{Factor [dB]}; AT = LCable \text{ loss [dB]} - G\text{preamp [dB]}$

AT: Total correction Factor except Antenna

UR: Receiver Reading

Gpreamp: Preamplifier Gain

AFactor: Antenna Factor at 3m

ANNEX A TEST RESULT


A.1 Number of Hopping Frequency

Test Data

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	Pass
π/4-DQPSK	2400 - 2483.5	79	15	Pass
8-DPSK	2400 - 2483.5	79	15	Pass


Test plots

GFSK 2.4 GHz ~ 2.4415 GHz

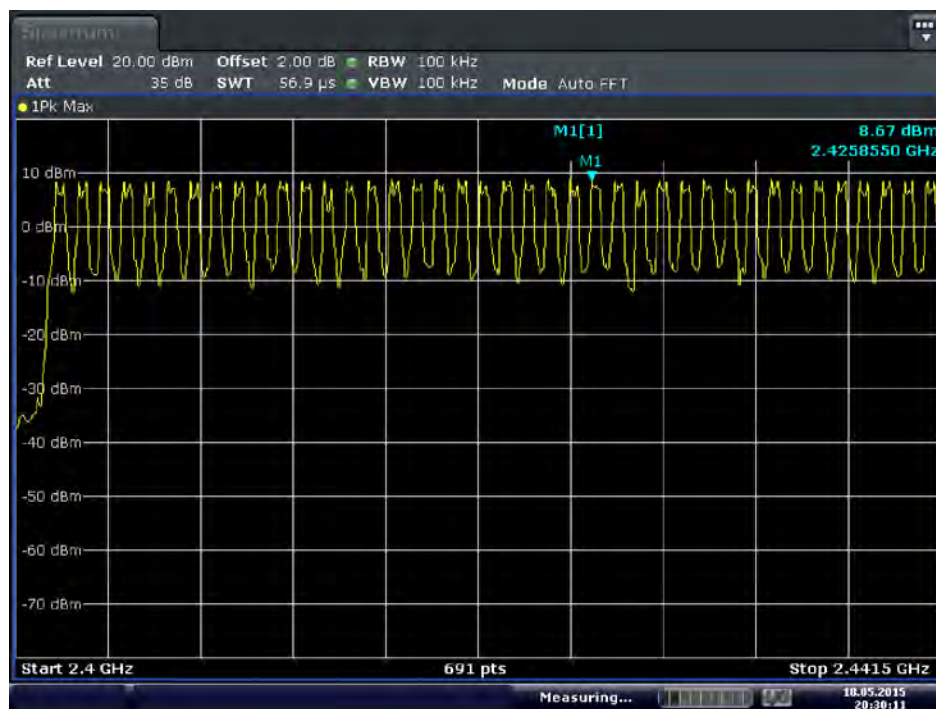


Date: 18.MAY.2015 20:30:11

GFSK 2.4415 GHz ~ 2.4835 GHz

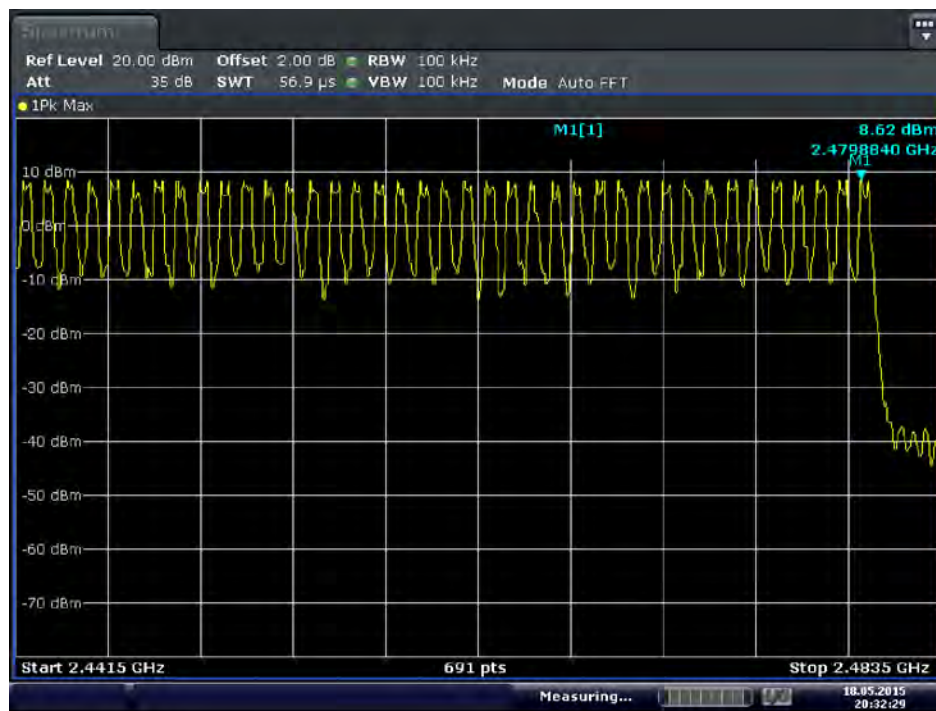


Date: 18.MAY.2015 20:32:30

π/4-DQPSK 2.4 GHz ~ 2.4415 GHz

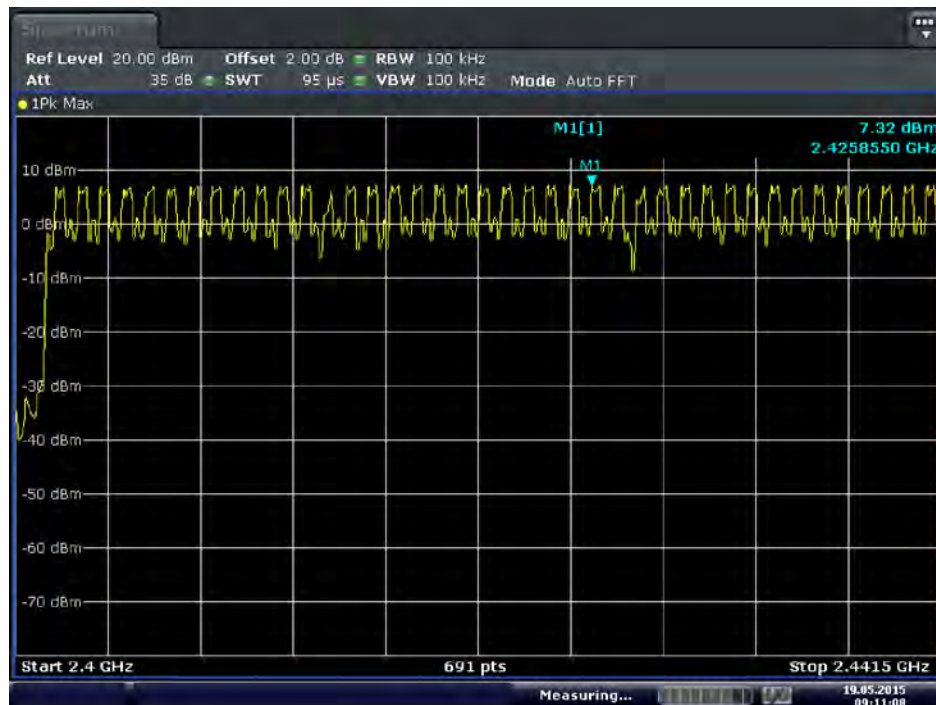

Date: 19.MAY.2015 09:11:08

$\pi/4$ -DQPSK 2.4415 GHz ~ 2.4835 GHz

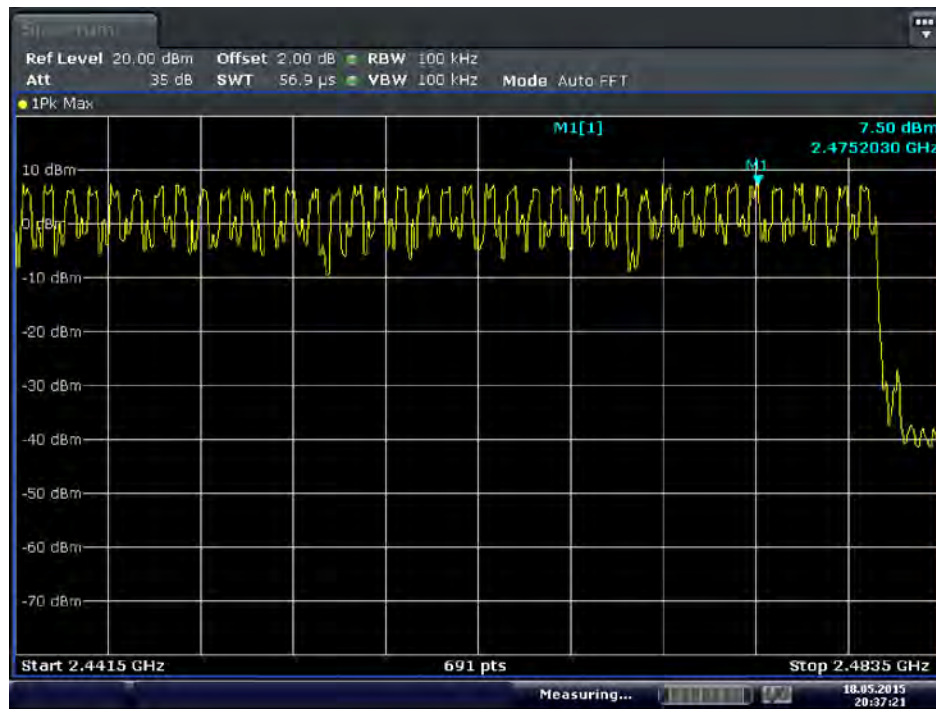


Date: 18.MAY.2015 20:37:21

8-DPSK 2.4 GHz ~ 2.4415 GHz



Date: 19.MAY.2015 09:16:49

8-DPSK 2.4415 GHz ~ 2.4835 GHz

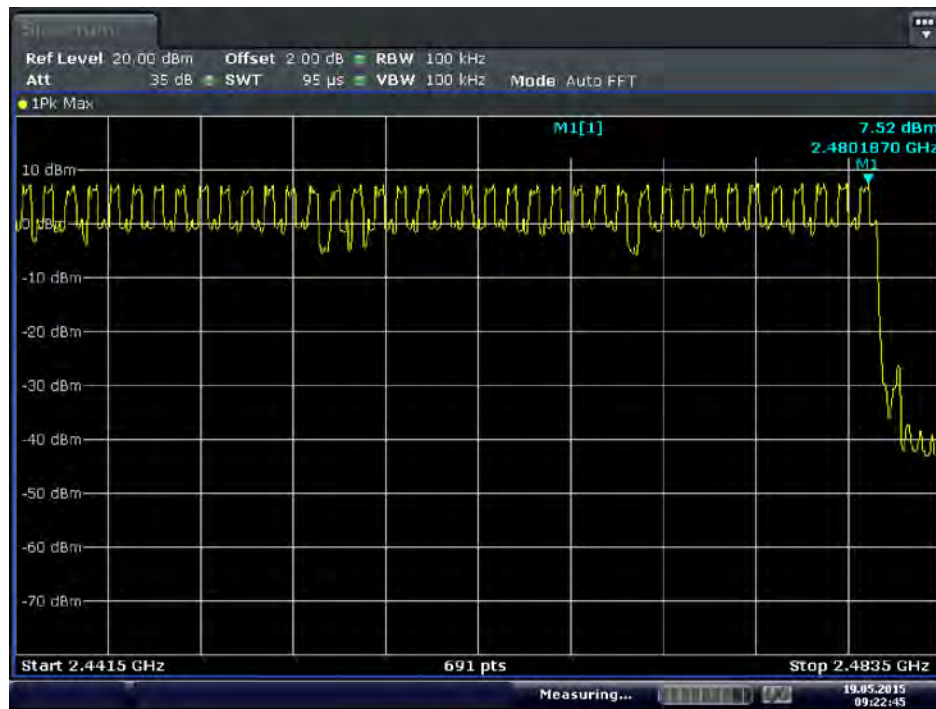

Date: 19.MAY.2015 09:22:46

A.2 Peak Output Power

Test Data

GFSK Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	8.69	7.40	30	1000	Pass
Middle	7.16	5.20			Pass
High	7.13	5.16			Pass

□/4-DQPSK Mode:


Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	8.71	7.43	30	1000	Pass
Middle	7.29	5.36			Pass
High	7.29	5.36			Pass

8-DPSK Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	8.68	7.38	30	1000	Pass
Middle	7.19	5.24			Pass
High	7.28	5.35			Pass

Test plots

GFSK LOW CHANNEL

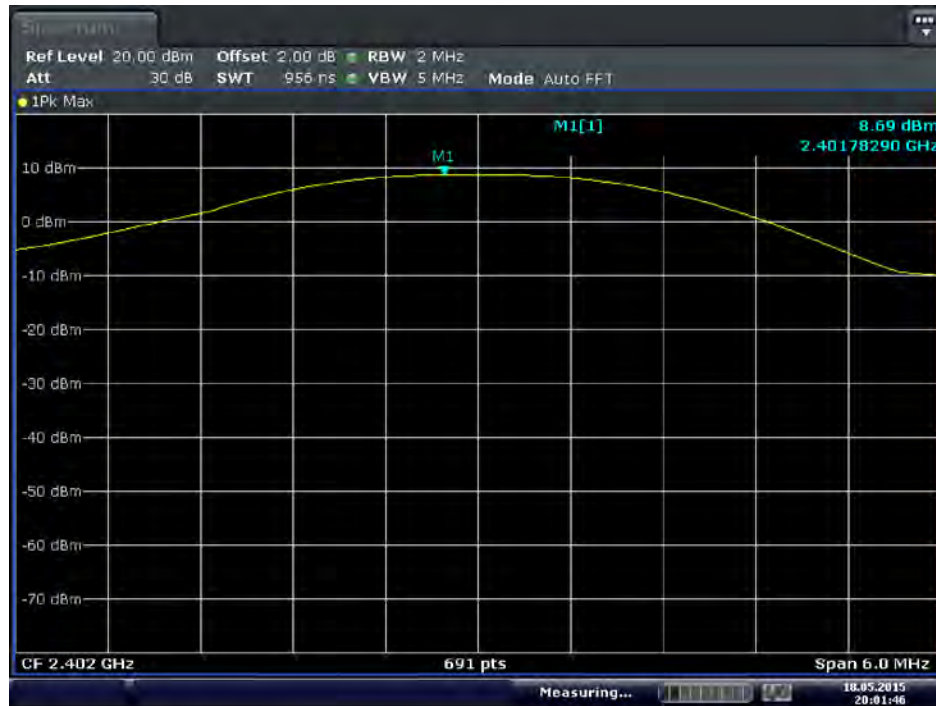


Date: 18.MAY.2015 20:01:47

GFSK MIDDLE CHANNEL




Date: 18.MAY.2015 20:02:16

GFSK HIGH CHANNEL

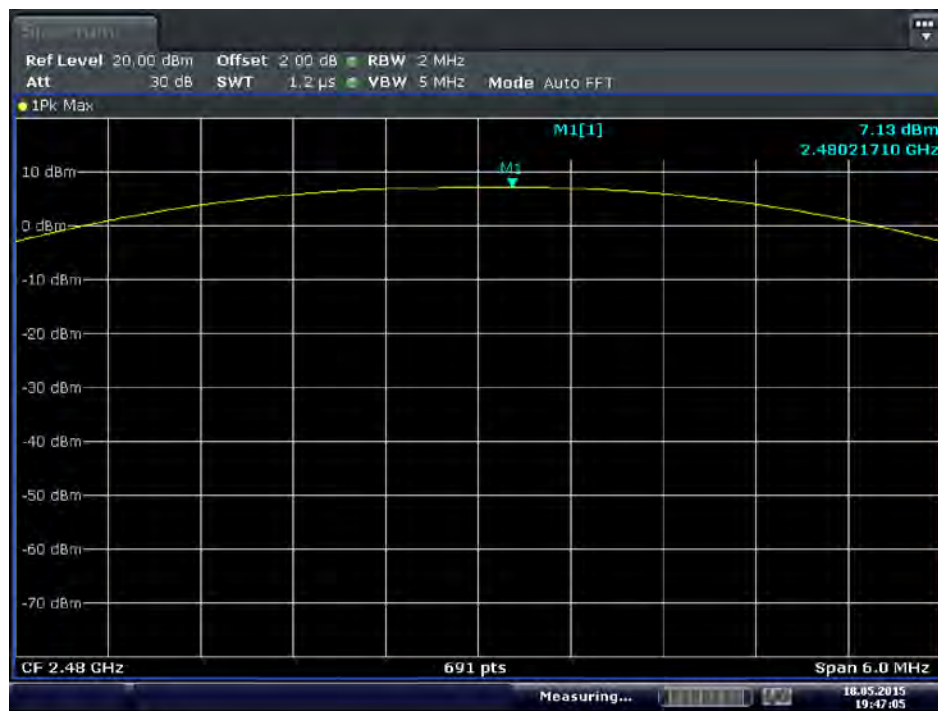

Date: 18.MAY.2015 19:47:06

$\pi/4$ -DQPSK LOW CHANNEL

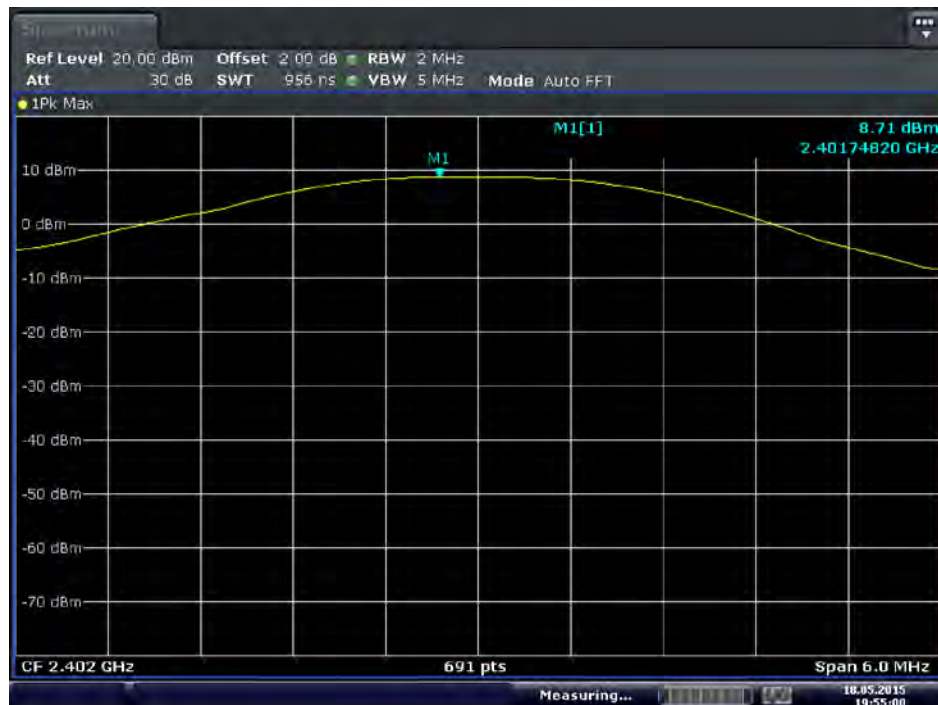


Date: 18.MAY.2015 19:55:00

□/4-DQPSK MIDDLE CHANNEL



Date: 18.MAY.2015 19:59:35

□/4-DQPSK HIGH CHANNEL

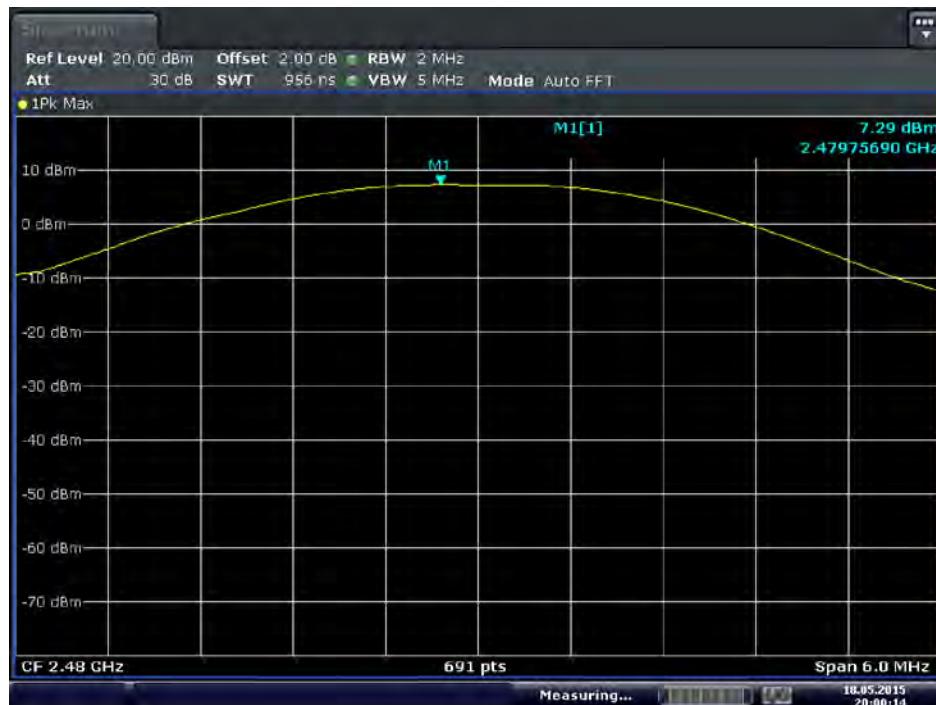

Date: 18.MAY.2015 20:00:14

Signal: 2.40184370 GHz

Ref Level: 20.00 dBm Offset: 2.00 dB RBW: 2 MHz

Att: 30 dB SWT: 956 ns VBW: 5 MHz Mode: Auto FFT

● 1Pk Max

M1

M1[1]

8.68 dBm
2.40184370 GHz

CF 2.402 GHz 691 pts Span 6.0 MHz


Measuring... 18.05.2015 20:01:20

The screenshot shows a spectrum analyzer interface with the following parameters and data:

- Parameters:**
 - Ref Level: 20.00 dBm
 - Offset: 2.00 dB
 - RBW: 2 MHz
 - Att: 30 dB
 - SWT: 956 ns
 - VBW: 5 MHz
 - Mode: Auto FFT
- Trace:** A yellow trace shows a signal peak labeled **M1[1]** at **7.19 dBm** and **2.44076560 GHz**.
- Grid:** The vertical axis (dBm) ranges from -70 to 10. The horizontal axis (Frequency) ranges from 2.441 GHz to 2.447 GHz (Span 6.0 MHz).
- Other Labels:**
 - 1Pk Max
 - CF 2.441 GHz
 - 691 pts
 - Measuring...
 - 18.05.2015 20:01:09

34

8-DPSK HIGH CHANNEL

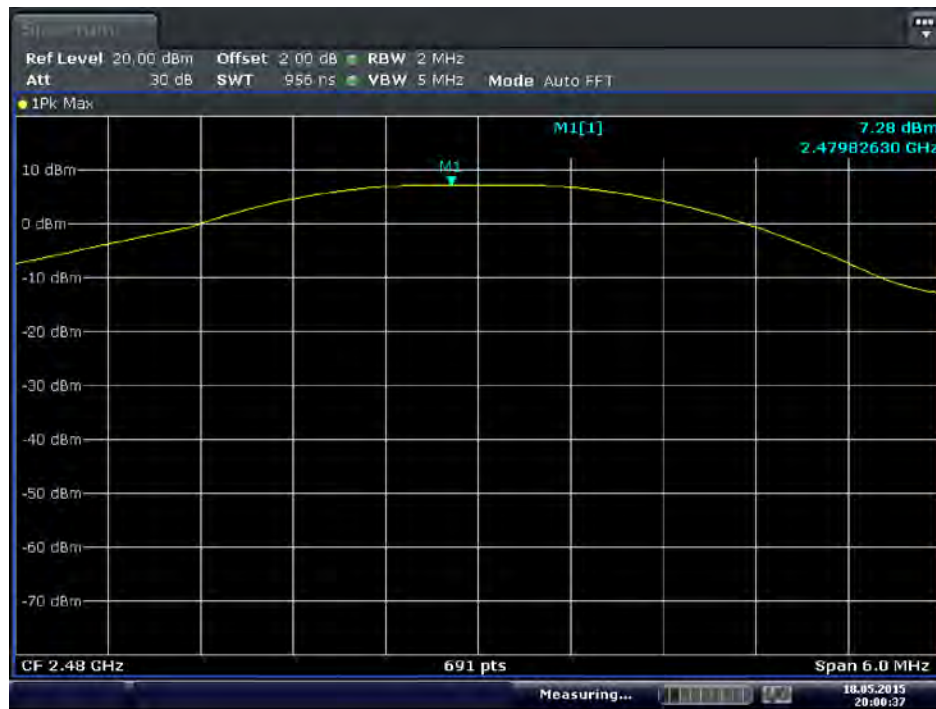

Date: 18.MAY.2015 20:00:36

A.3 Occupied Bandwidth

Test Data

GFSK Mode:

Channel	20 dB Bandwidth (MHz)
Low	1.1114
Middle	1.1071
High	1.1071

π/4-DQPSK Mode:

Channel	20 dB Bandwidth (MHz)
Low	1.2808
Middle	1.2808
High	1.2851

8-DPSK Mode:

Channel	20 dB Bandwidth (MHz)
Low	1.2808
Middle	1.2764
High	1.2721

Test plots

GFSK LOW CHANNEL



Date: 18.MAY.2015 20:25:08

GFSK MIDDLE CHANNEL



Date: 18.MAY.2015 20:25:43

GFSK HIGH CHANNEL



Date: 18.MAY.2015 20:26:16

$\pi/4$ -DQPSK LOW CHANNEL



Date: 18.MAY.2015 20:24:36

□/4-DQPSK MIDDLE CHANNEL



Date: 18.MAY.2015 20:24:02

□/4-DQPSK HIGH CHANNEL



Date: 18.MAY.2015 20:23:30

8-DPSK LOW CHANNEL



Date: 18.MAY.2015 20:21:05

8-DPSK MIDDLE CHANNEL



Date: 18.MAY.2015 20:22:20

8-DPSK HIGH CHANNEL



Date: 18.MAY.2015 20:22:54

A.4 Hopping Frequency Separation

Test Data

Mode	Frequency separation (MHz)	Max 20 dB Bandwidth (MHz)	Two-thirds of the 20 dB bandwidth (MHz)	Verdict
GFSK	1.0000	1.1114	0.7409	Pass
$\Pi/4$ -DQPSK	1.0000	1.2851	0.8567	Pass
8-DPSK	1.0000	1.2808	0.8539	Pass

Test plots

GFSK



Date: 18.MAY.2015 20:56:11

$\pi/4$ -DQPSK



Date: 18.MAY.2015 20:55:07

8-DPSK



Date: 18.MAY.2015 20:53:51

A.5 Average Time of Occupancy

Test Data

GFSK Mode:

DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.371	118.724	0.4	Pass
DH 3	1.632	261.128	0.4	Pass
DH 5	2.875	306.676	0.4	Pass

π/4-DQPSK Mode:


DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.377	120.644	0.4	Pass
DH 3	1.632	261.128	0.4	Pass
DH 5	2.881	307.316	0.4	Pass

8-DPSK Mode:

DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.380	121.604	0.4	Pass
DH 3	1.632	261.128	0.4	Pass
DH 5	2.881	307.316	0.4	Pass


Test Plots

GFSK DH1

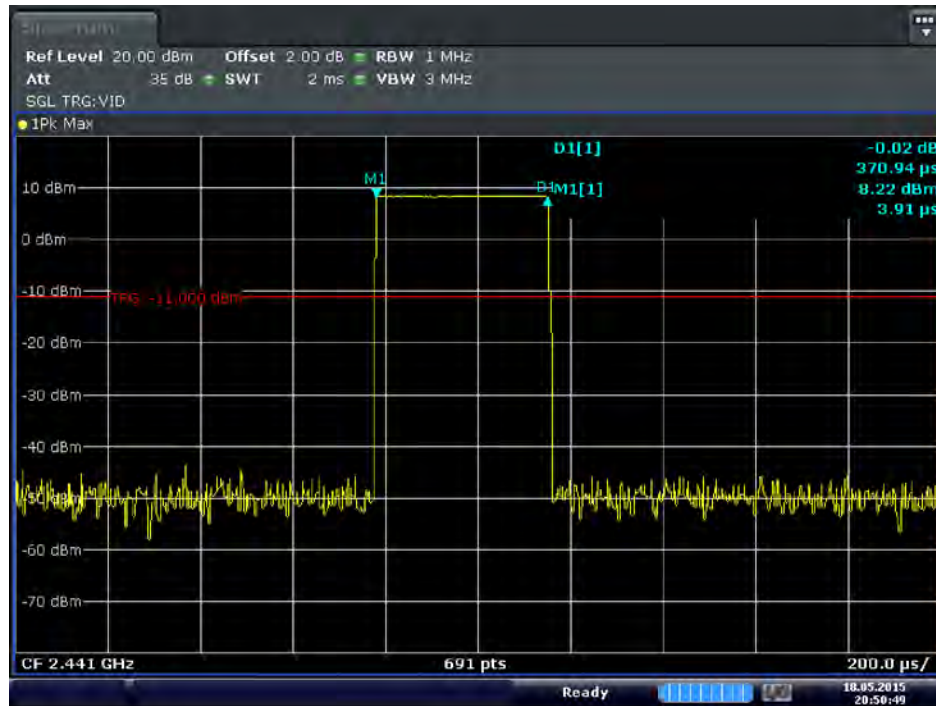

Date: 18.MAY.2015 20:50:49

GFSK DH3

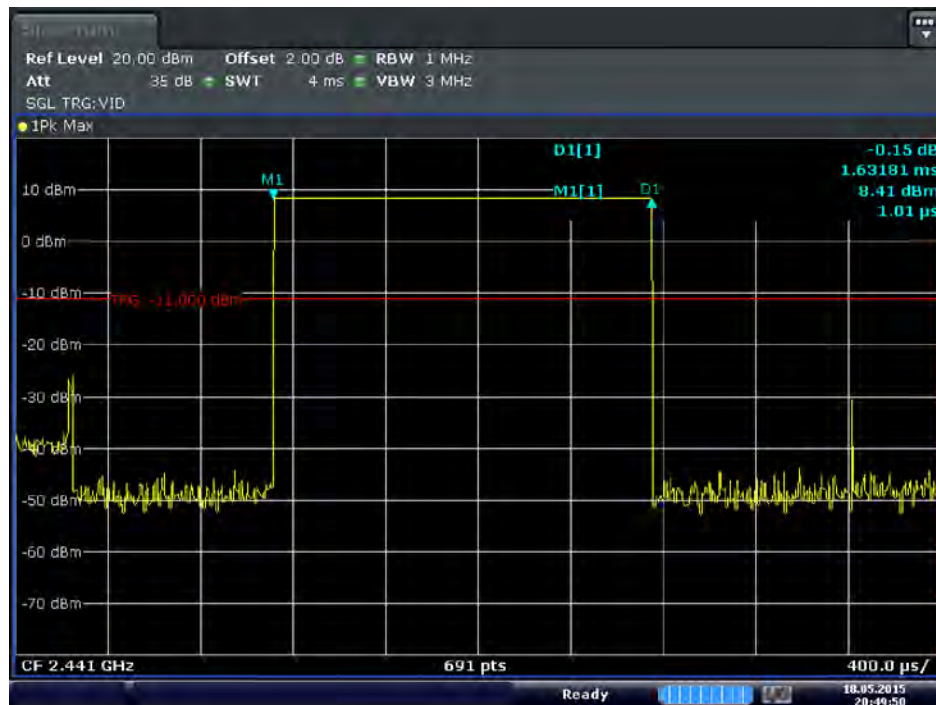


Date: 18.MAY.2015 20:49:50

GFSK DH5




Date: 18.MAY.2015 20:47:34

$\pi/4$ -DQPSK DH1

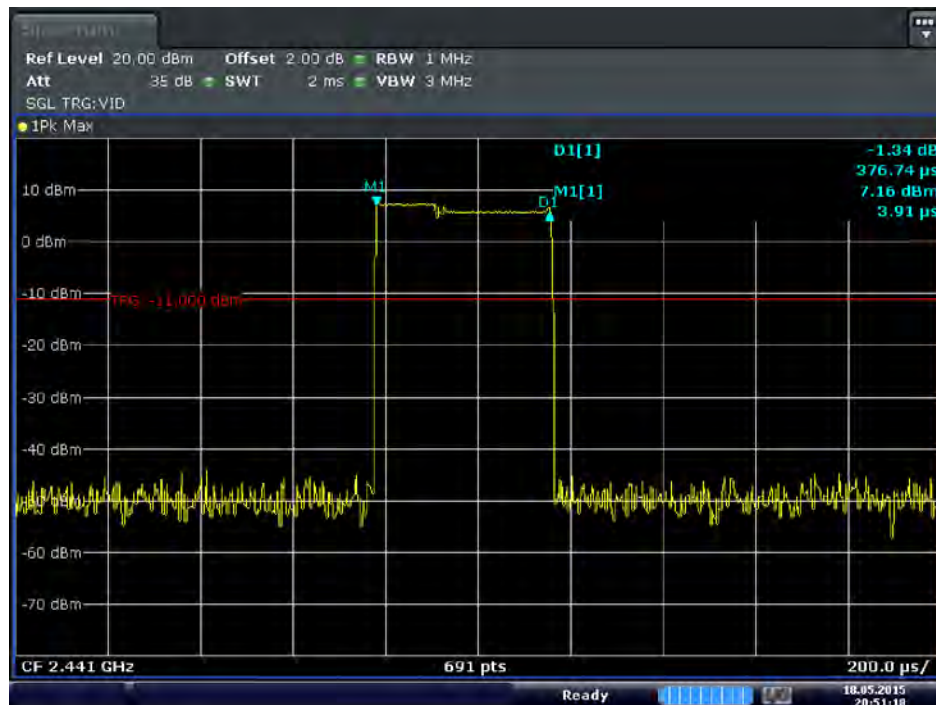


Date: 18.MAY.2015 20:51:18

$\pi/4$ -DQPSK DH3

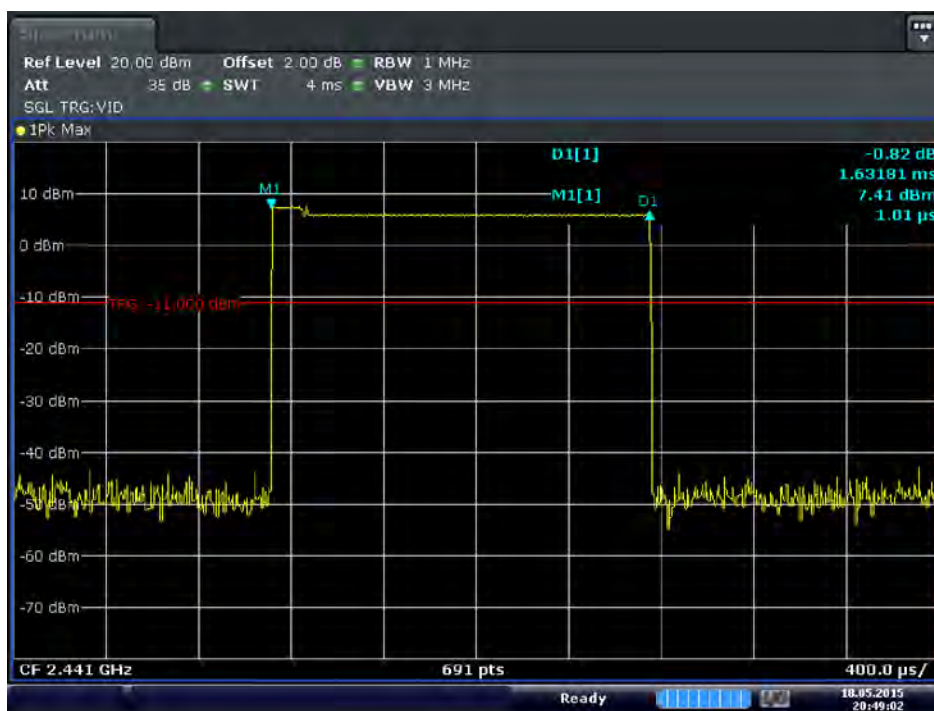


Date: 18.MAY.2015 20:49:02

$\pi/4$ -DQPSK DH5

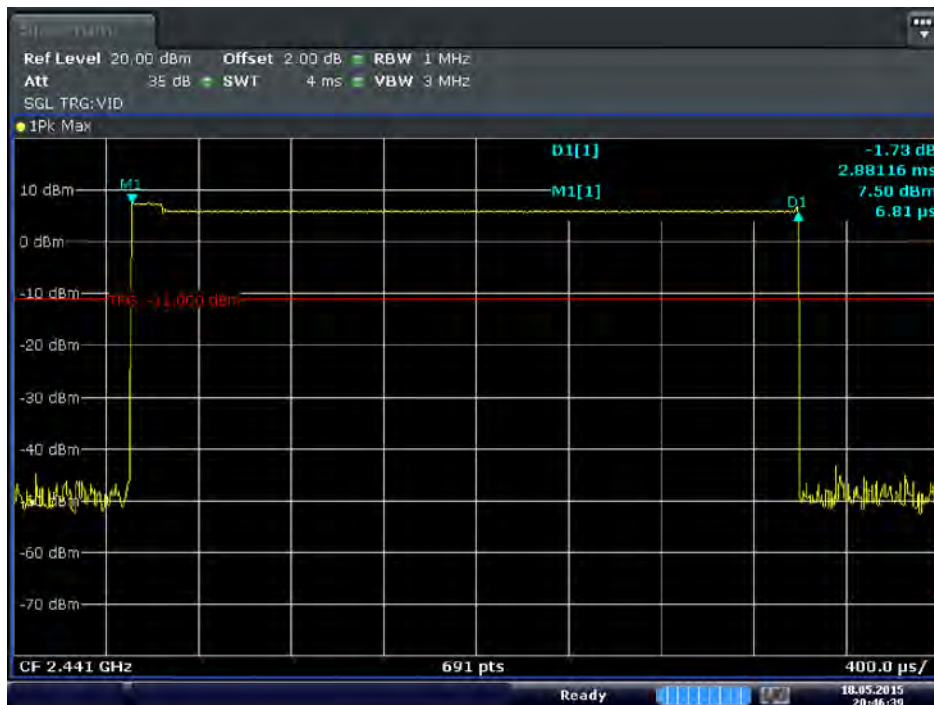


Date: 18.MAY.2015 20:46:39

8-DPSK DH1

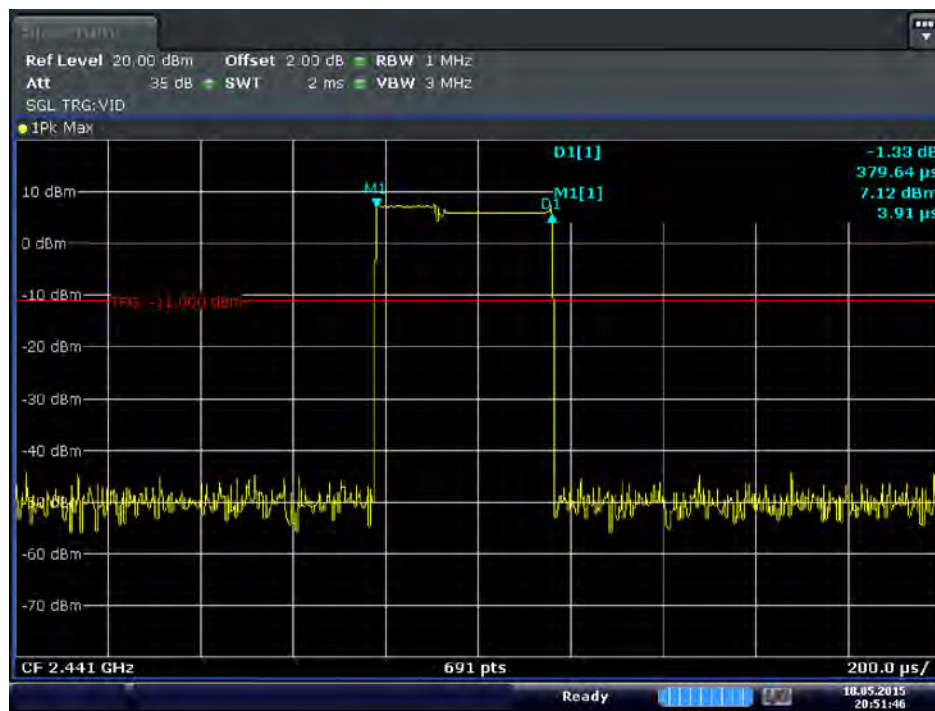


Date: 18.MAY.2015 20:51:46

8-DPSK DH3

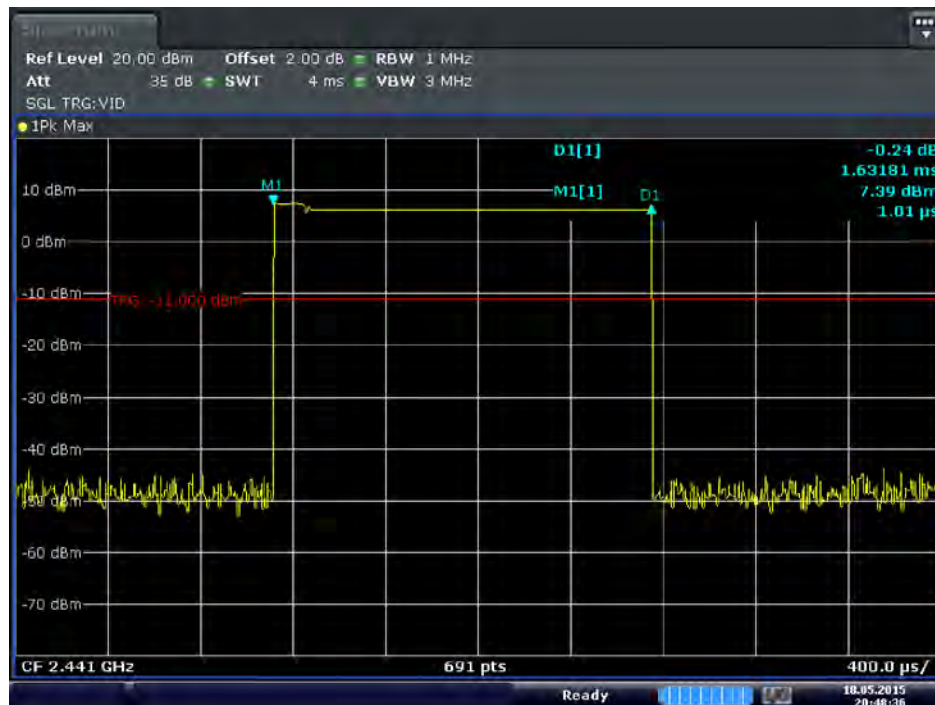

Date: 18.MAY.2015 20:48:37

8-DPSK DH5

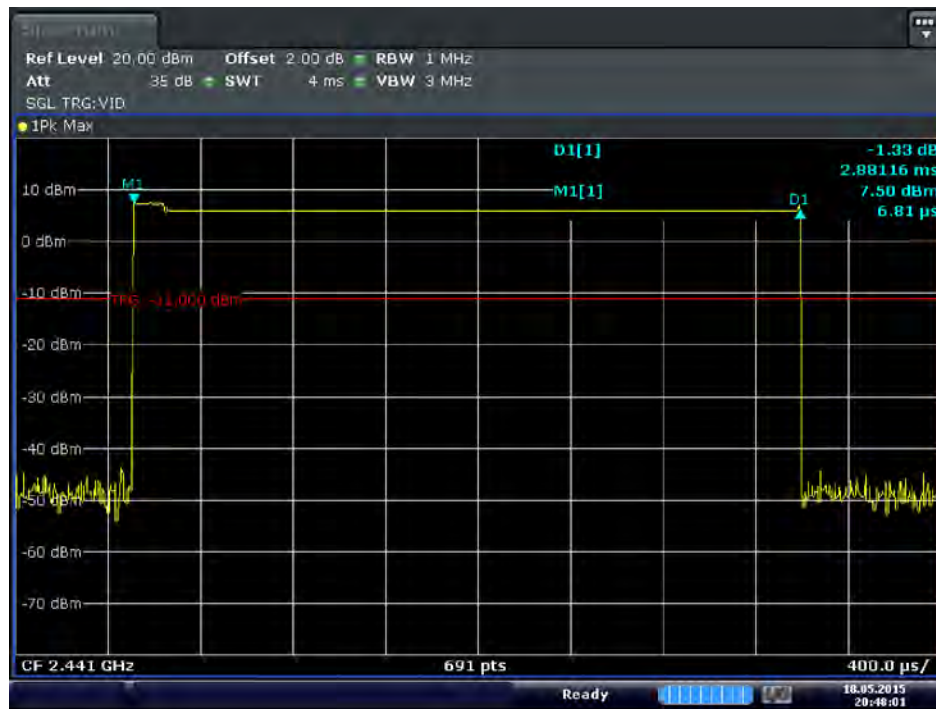

Date: 18.MAY.2015 20:48:01

A.6 Conducted Spurious Emissions

Test Data

GFSK Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-27.82	8.12	-11.88	Pass
Middle	-27.11	8.24	-11.76	Pass
High	-26.45	8.52	-11.48	Pass

π/4-DQPSK Mode:


Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-31.71	6.48	-13.52	Pass
Middle	-31.68	7.05	-12.95	Pass
High	-31.39	6.76	-13.24	Pass

8-DPSK Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-31.10	6.74	-13.26	Pass
Middle	-36.50	7.11	-12.89	Pass
High	-29.71	7.08	-12.92	Pass


Test Plots

GFSK LOW CHANNEL , BAND EDGE

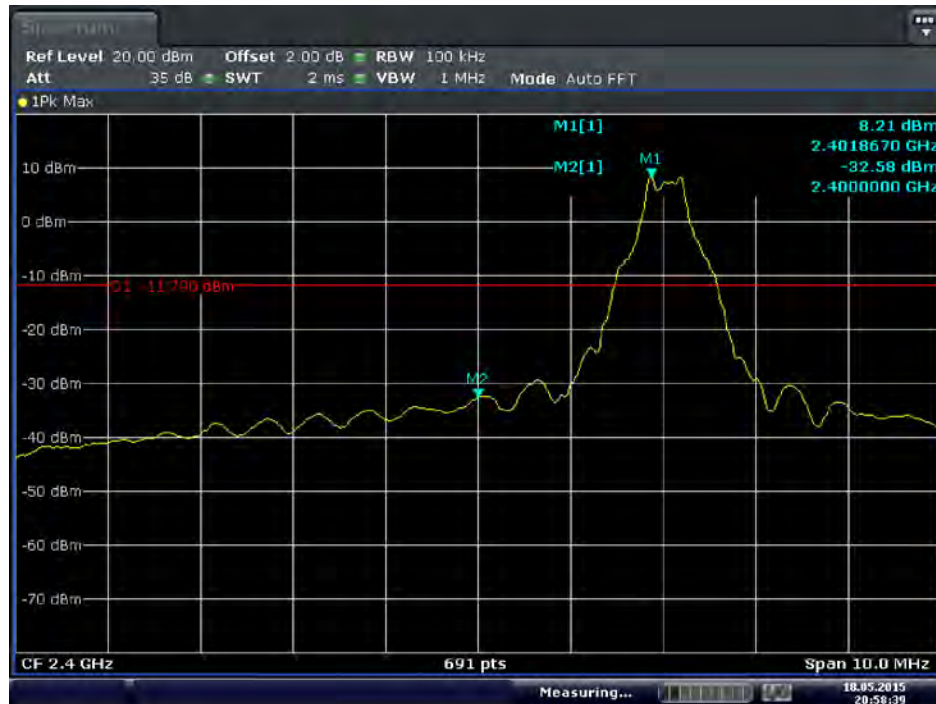

Date: 18.MAY.2015 20:58:39

GFSK LOW CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

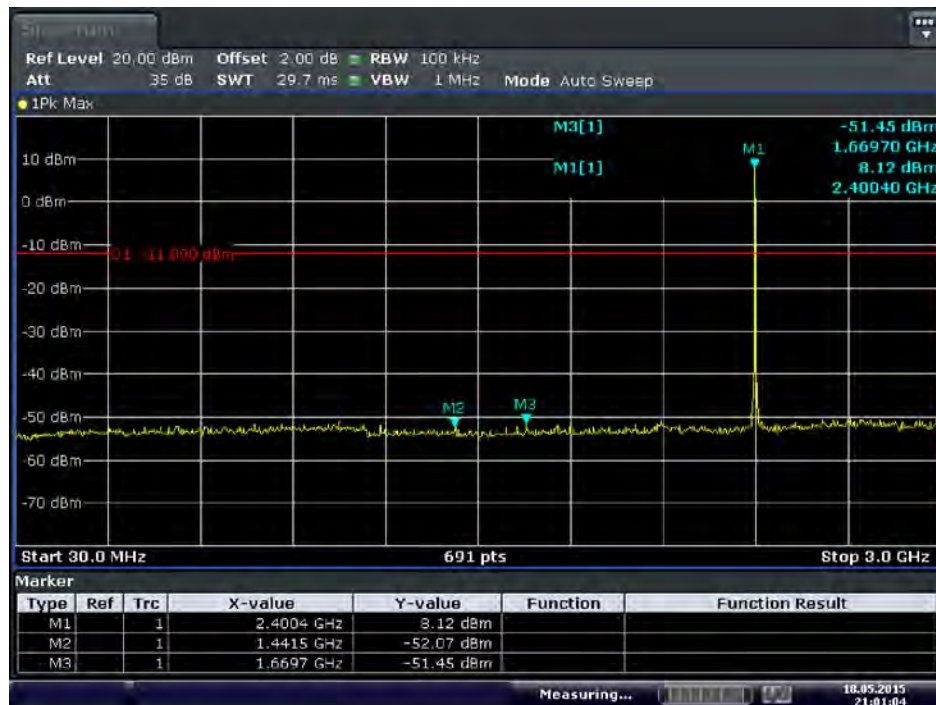


Date: 18.MAY.2015 21:01:04

GFSK LOW CHANNEL , SPURIOUS 3 GHz ~ 25 GHz




Date: 18.MAY.2015 21:02:33

GFSK MIDDLE CHANNEL , SPURIOUS 30 MHz ~ 3GHz

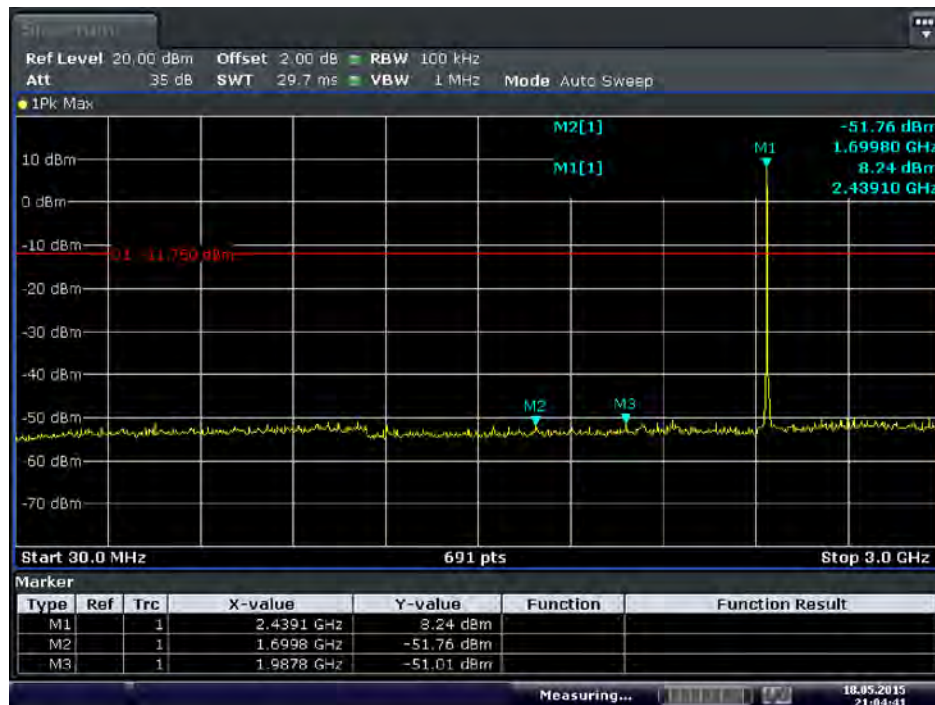

Date: 18.MAY.2015 21:04:40

GFSK MIDDLE CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

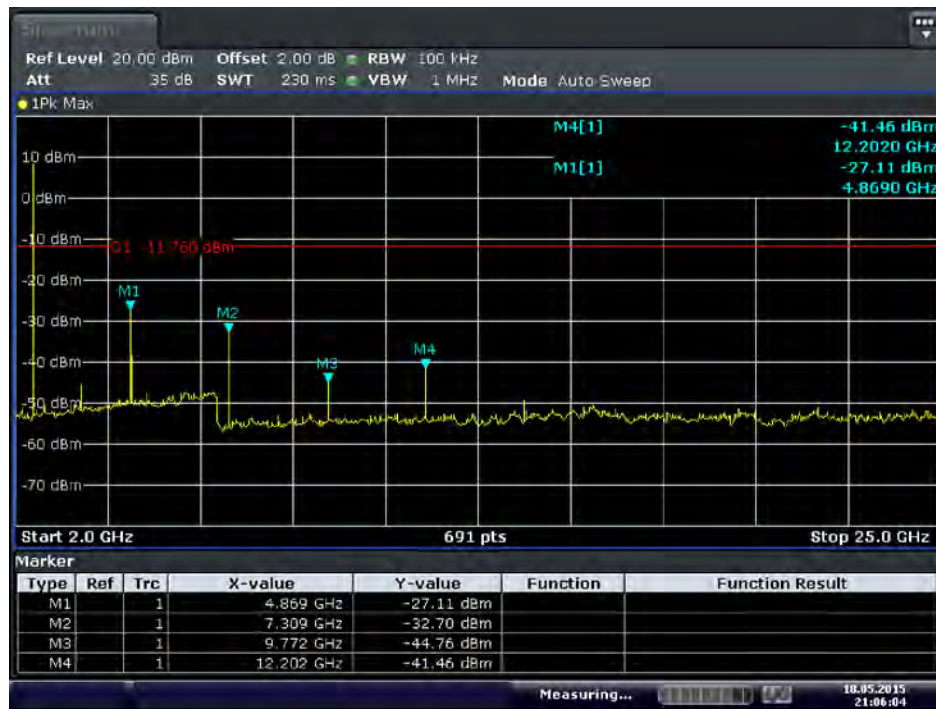

Date: 18.MAY.2015 21:06:04

GFSK HIGH CHANNEL , BAND EDGE



Date: 18.MAY.2015 21:09:10

The screenshot displays a Spectrum Analyzer interface. At the top, the configuration is set to: Ref Level 20.00 dBm, Offset 2.00 dB, RBW 100 kHz, Att 35 dB, SWT 29.7 ms, VBW 1 MHz, and Mode Auto Sweep. The main display shows a spectrum plot with a noise floor around -50 dBm and a prominent signal peak at 2.4778 GHz. Three markers are placed on the plot: M1 at the peak, M2 on the noise floor, and M3 on the noise floor. A red horizontal line is drawn at -10 dBm. Below the plot, a table provides the details for each marker.

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1	1	2.4778 GHz	8.52 dBm		
M2	1	1	1.631 GHz	-52.82 dBm		
M3	1	1	2.1554 GHz	-50.79 dBm		

Additional information at the bottom of the screen includes the text "Measuring..." and a progress bar, and the date and time "18.05.2015 21:07:16".

Ref Level 20.00 dBm Offset 2.00 dB RBW 100 kHz
Att 35 dB SWT 230 ms VBW 1 MHz Mode Auto Sweep

1Pk Max

10 dBm
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
-60 dBm
-70 dBm

M4[1] -40.55 dBm
12.4020 GHz
M1[1] -26.45 dBm
4.9410 GHz

M1 -11.490 dBm

M1
M2
M3
M4

Start 2.0 GHz 691 pts Stop 25.0 GHz

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	4.941 GHz	-25.45 dBm		
M2		1	7.442 GHz	-34.64 dBm		
M3		1	9.911 GHz	-43.15 dBm		
M4		1	12.402 GHz	-40.55 dBm		

Measuring... 10.95.2015 21:08:09


54

□/4-DQPSK LOW CHANNEL , BAND EDGE




Date: 18.MAY.2015 21:17:35

□/4-DQPSK LOW CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

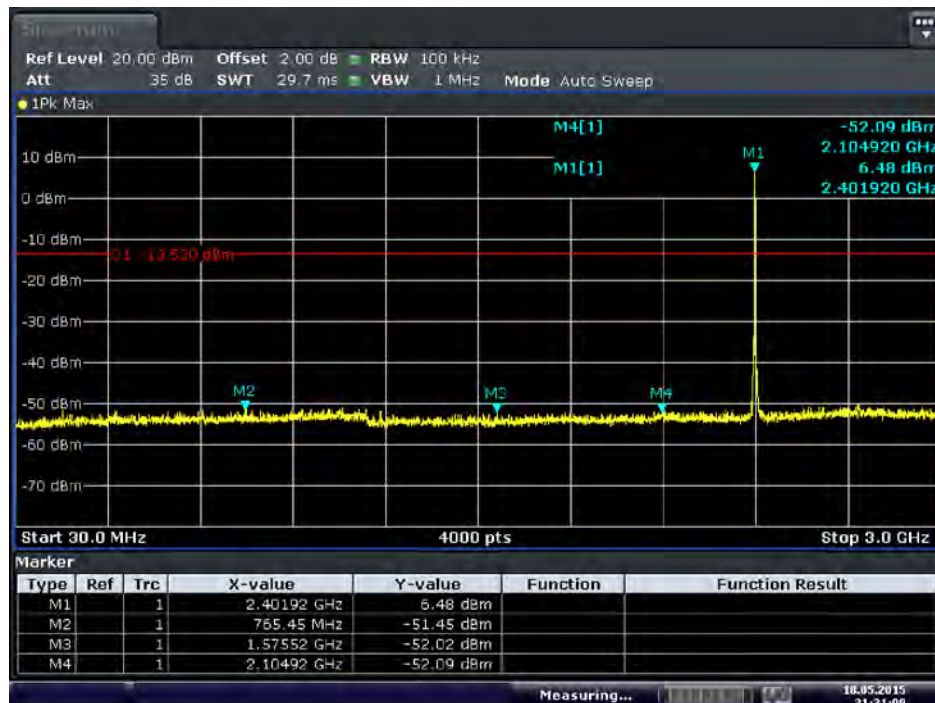

Date: 18.MAY.2015 21:31:09

$\pi/4$ -DQPSK LOW CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

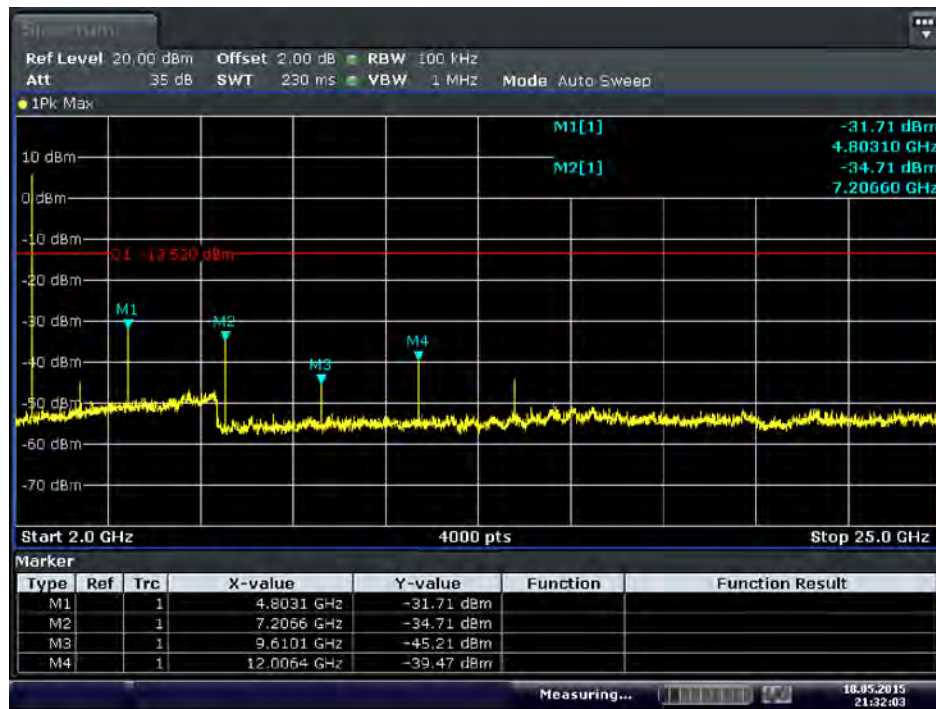


Date: 18.MAY.2015 21:32:04

$\pi/4$ -DQPSK MIDDLE CHANNEL , SPURIOUS 30 MHz ~ 3 GHz



Date: 18.MAY.2015 21:14:06

□/4-DQPSK MIDDLE CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

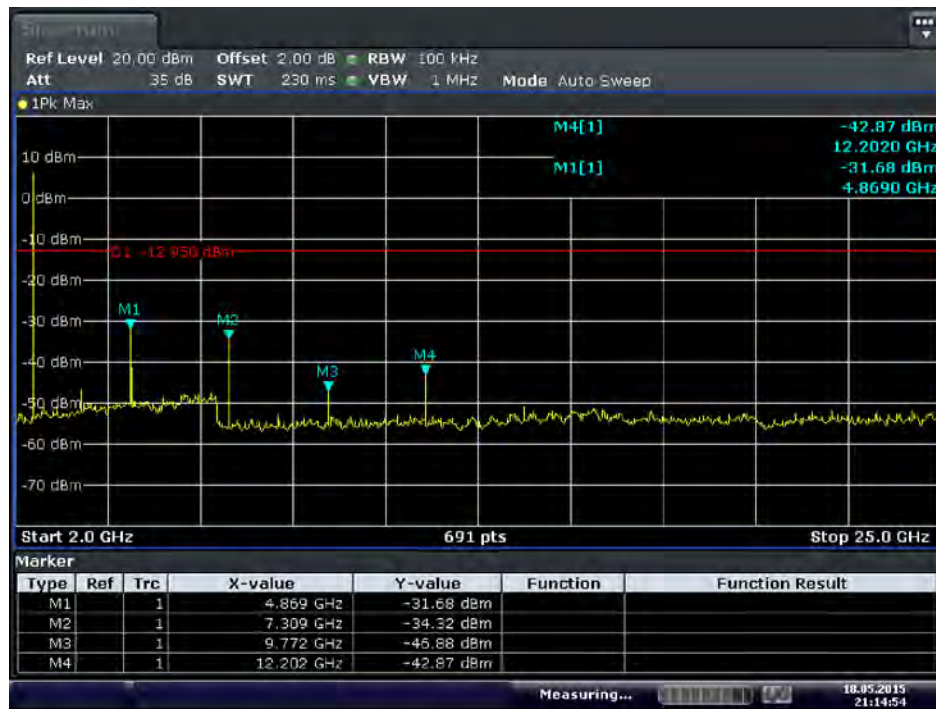


Date: 18.MAY.2015 21:14:54

□/4-DQPSK HIGH CHANNEL , BAND EDGE




Date: 18.MAY.2015 21:10:54

$\pi/4$ -DQPSK HIGH CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

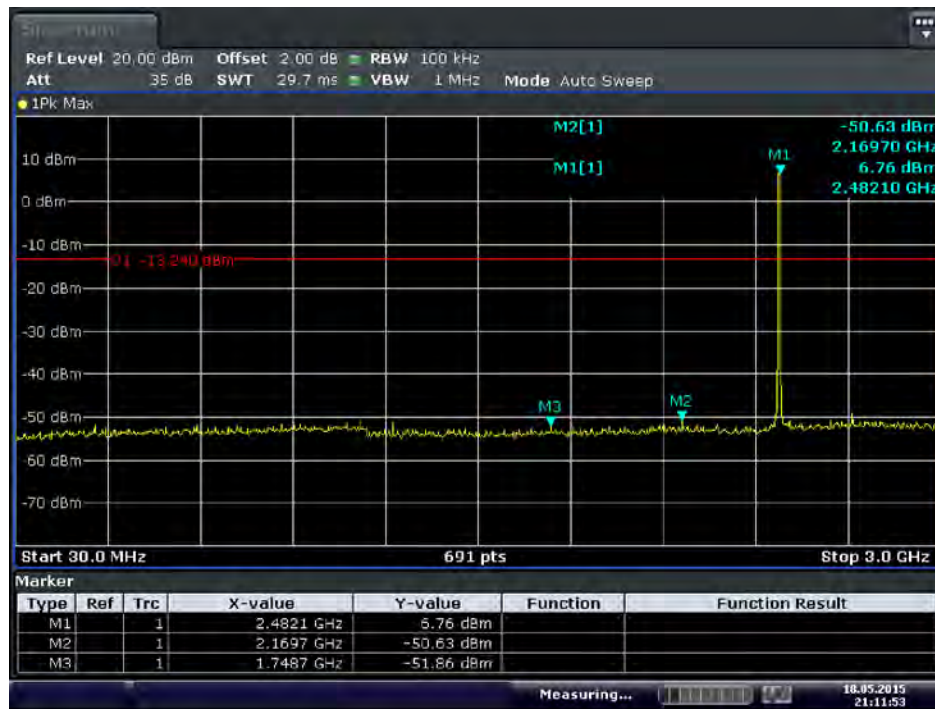

Date: 18.MAY.2015 21:11:53

$\pi/4$ -DQPSK HIGH CHANNEL , SPURIOUS 3 GHz ~ 25GHz

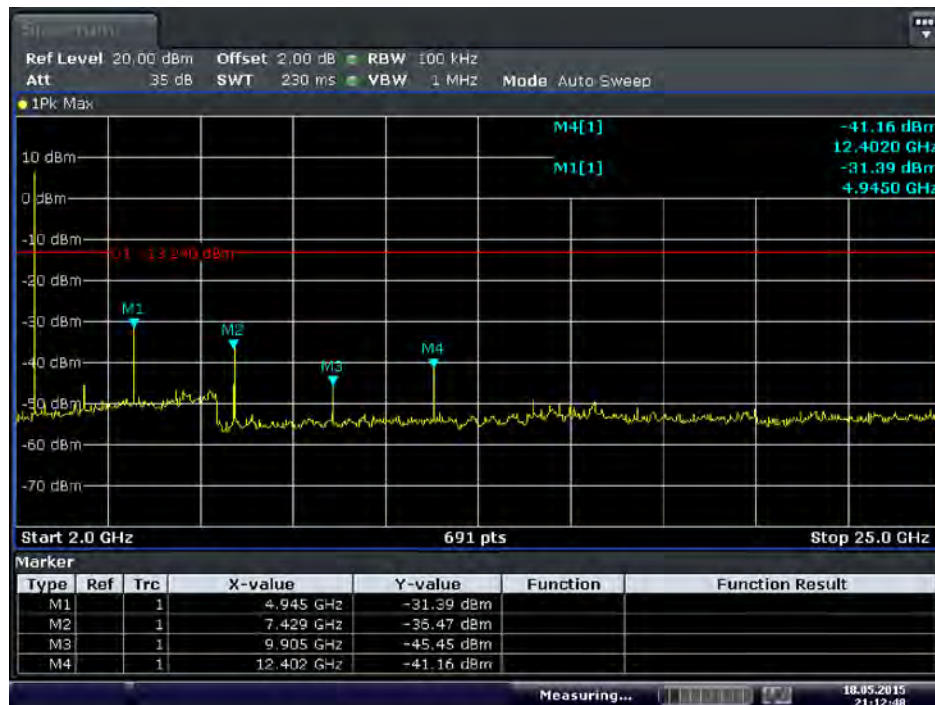


Date: 18.MAY.2015 21:12:48

8-DPSK LOW CHANNEL , BAND EDGE




Date: 18.MAY.2015 21:18:33

8-DPSK LOW CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

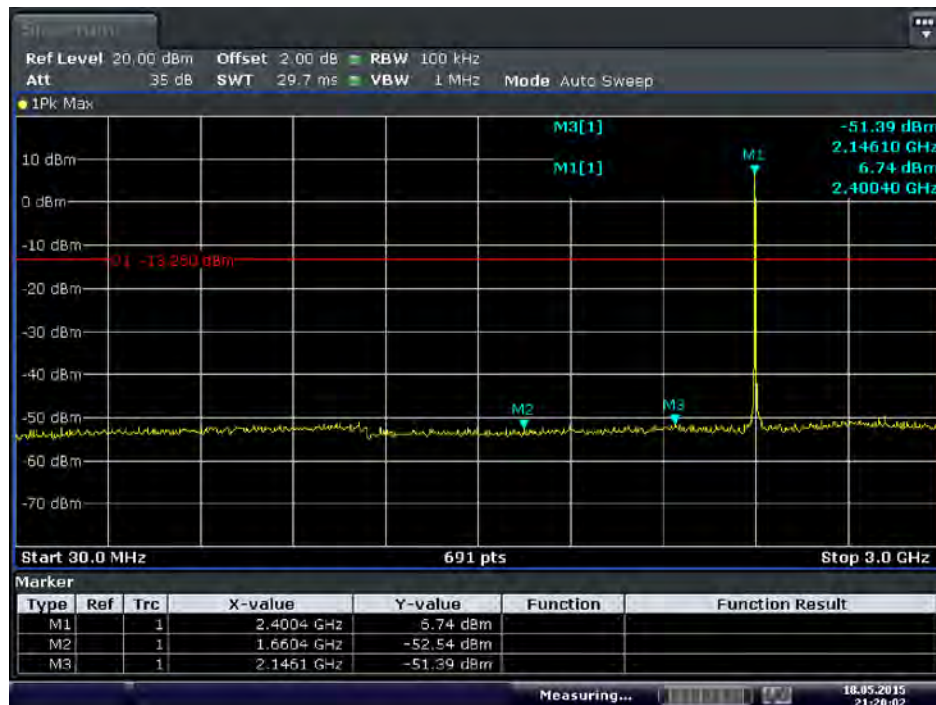


Date: 18.MAY.2015 21:20:03

8-DPSK LOW CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

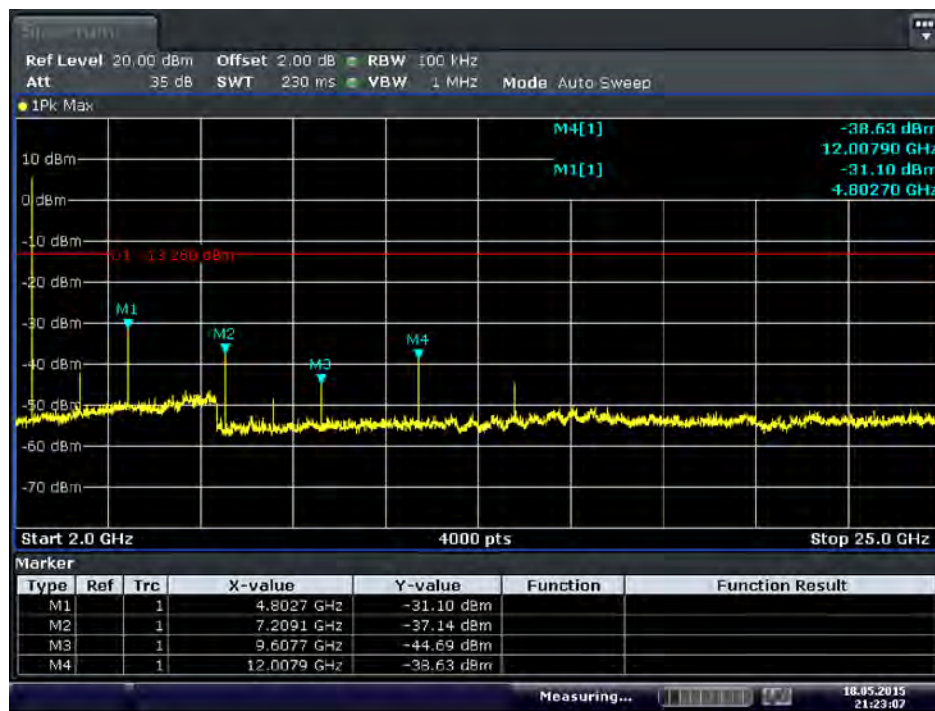


Date: 18.MAY.2015 21:23:07

8-DPSK MIDDLE CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

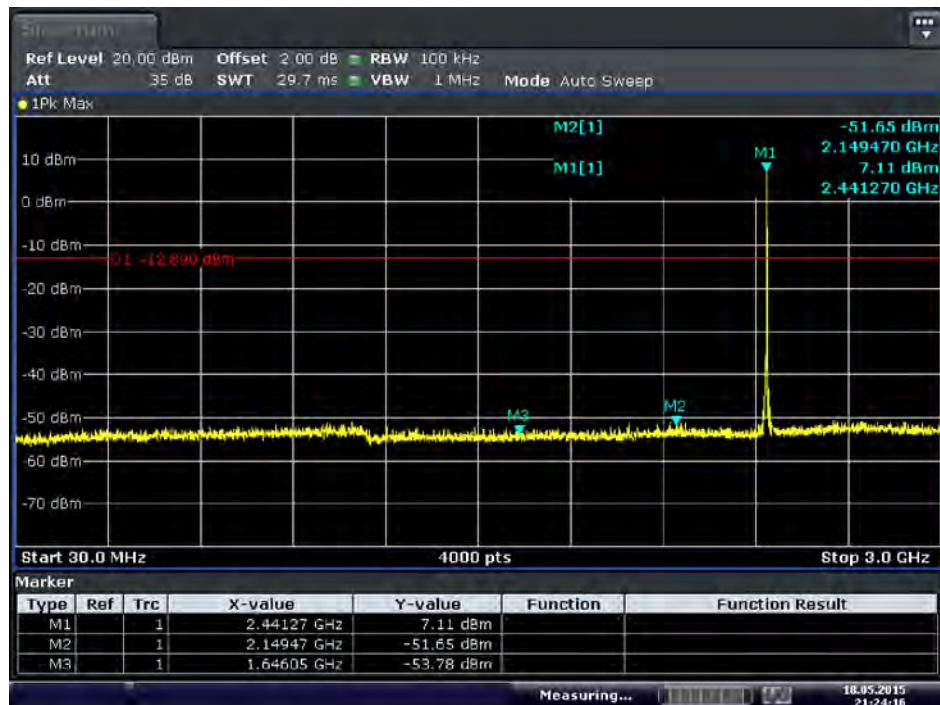

Date: 18.MAY.2015 21:24:16

8-DPSK MIDDLE CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

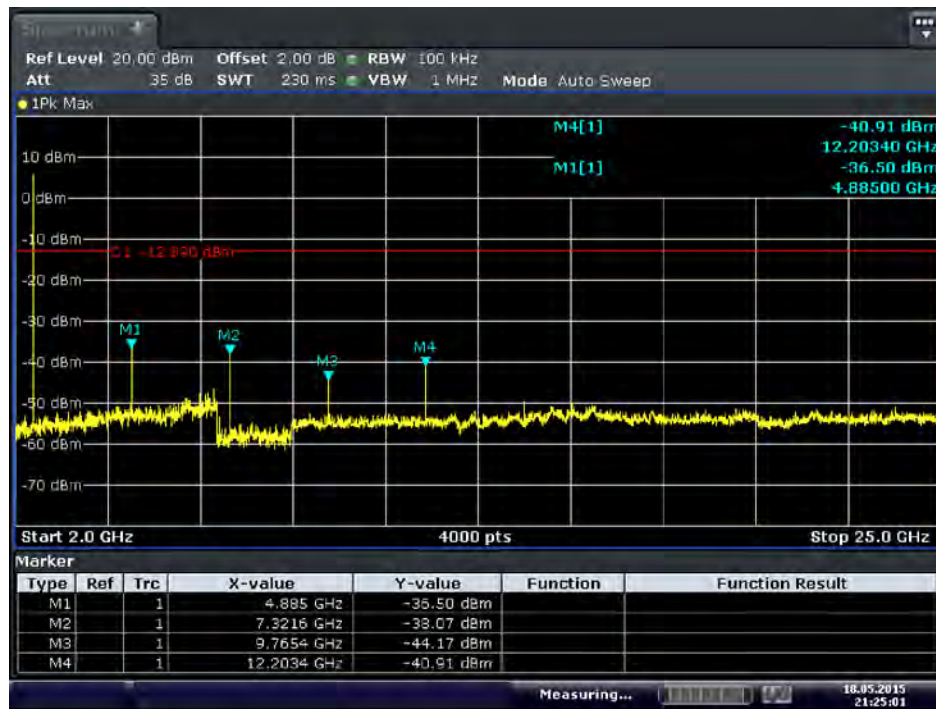


Date: 18.MAY.2015 21:25:02

8-DPSK HIGH CHANNEL , BAND EDGE




Date: 18.MAY.2015 21:27:59

8-DPSK HIGH CHANNEL , SPURIOUS 30 MHz ~3 GHz

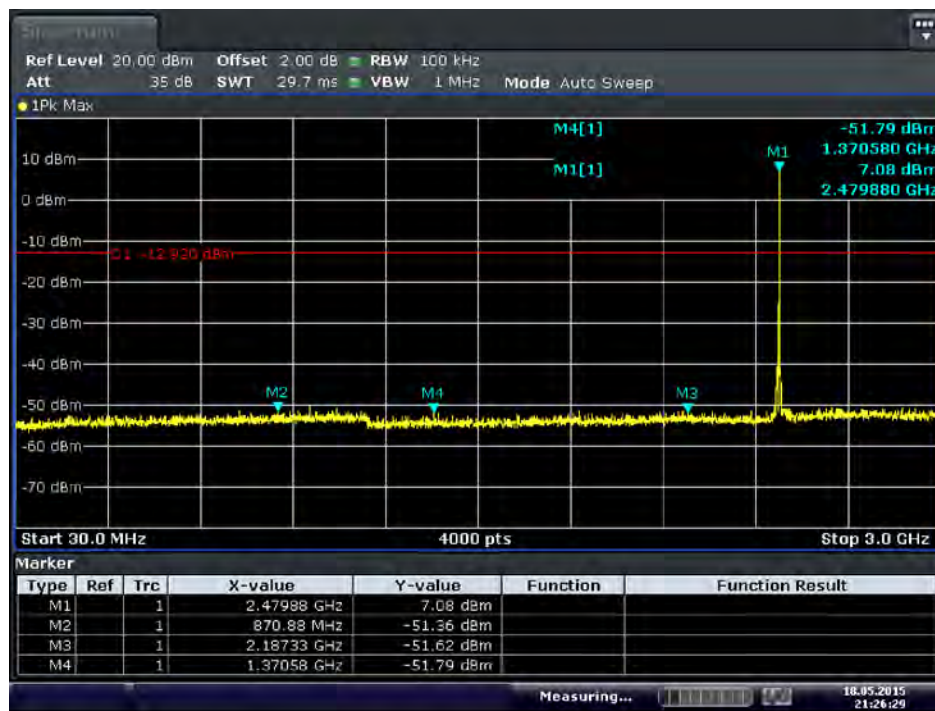

Date: 18.MAY.2015 21:26:29

8-DPSK HIGH CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

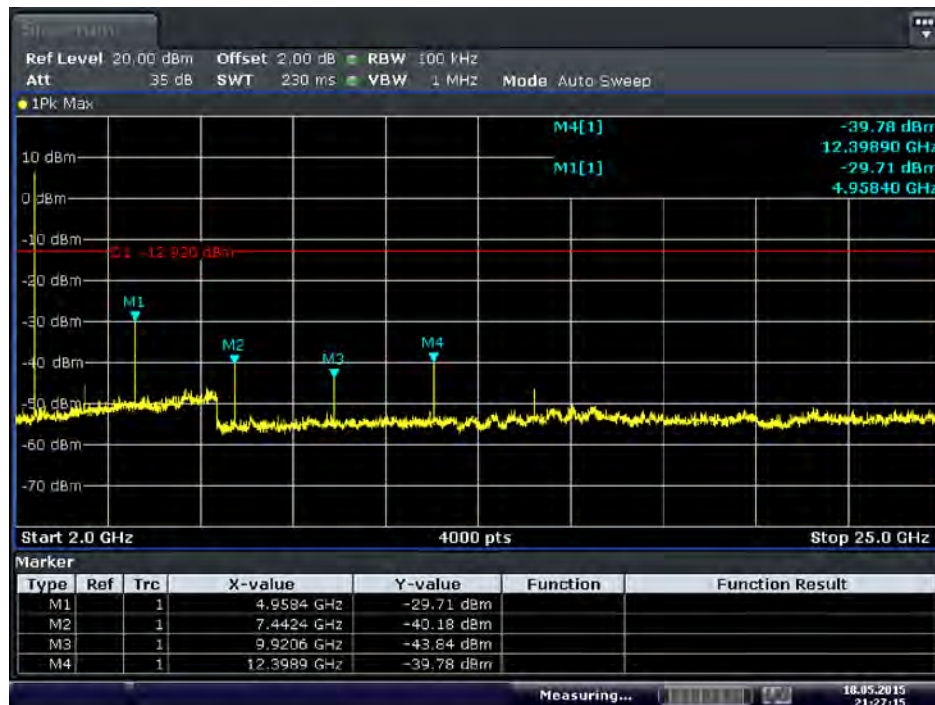


Date: 18.MAY.2015 21:27:15

A.7 Conducted Emissions

Note: All configurations have been tested, only the worst configuration (GFSK High Channel) shown here.


Test Data and Plots

PHASE L

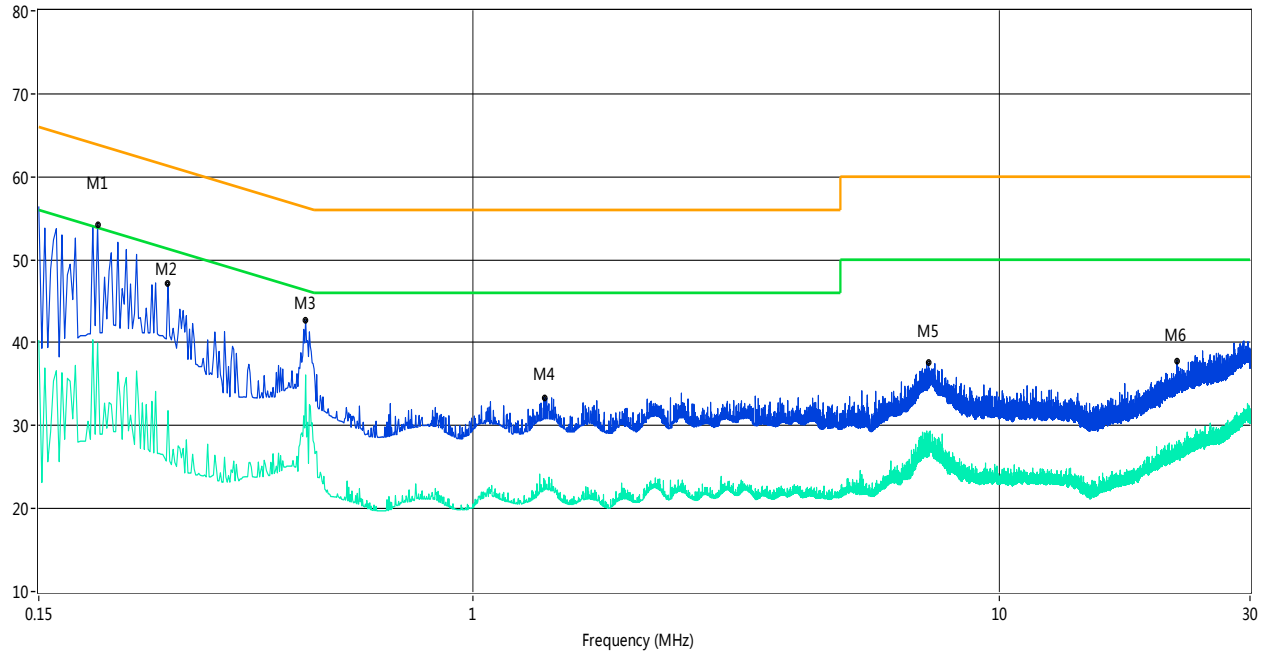

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.19	54.3	13.00	64.7	10.40	Peak	L Line	Pass
1**	0.19	39.9	13.00	54.7	14.80	AV	L Line	Pass
2	0.26	47.1	13.00	62.7	15.60	Peak	L Line	Pass
2**	0.26	31.8	13.00	52.7	20.90	AV	L Line	Pass
3	0.48	42.7	13.00	56.5	13.80	Peak	L Line	Pass
3**	0.48	36.1	13.00	46.5	10.40	AV	L Line	Pass
4	1.37	33.4	13.00	56.0	22.60	Peak	L Line	Pass
4**	1.37	22.1	13.00	46.0	23.90	AV	L Line	Pass
5	7.35	37.6	13.00	60.0	22.40	Peak	L Line	Pass
5**	7.35	28.4	13.00	50.0	21.60	AV	L Line	Pass
6	21.80	37.8	13.00	60.0	22.20	Peak	L Line	Pass
6**	21.80	26.2	13.00	50.0	23.80	AV	L Line	Pass

PHASE N

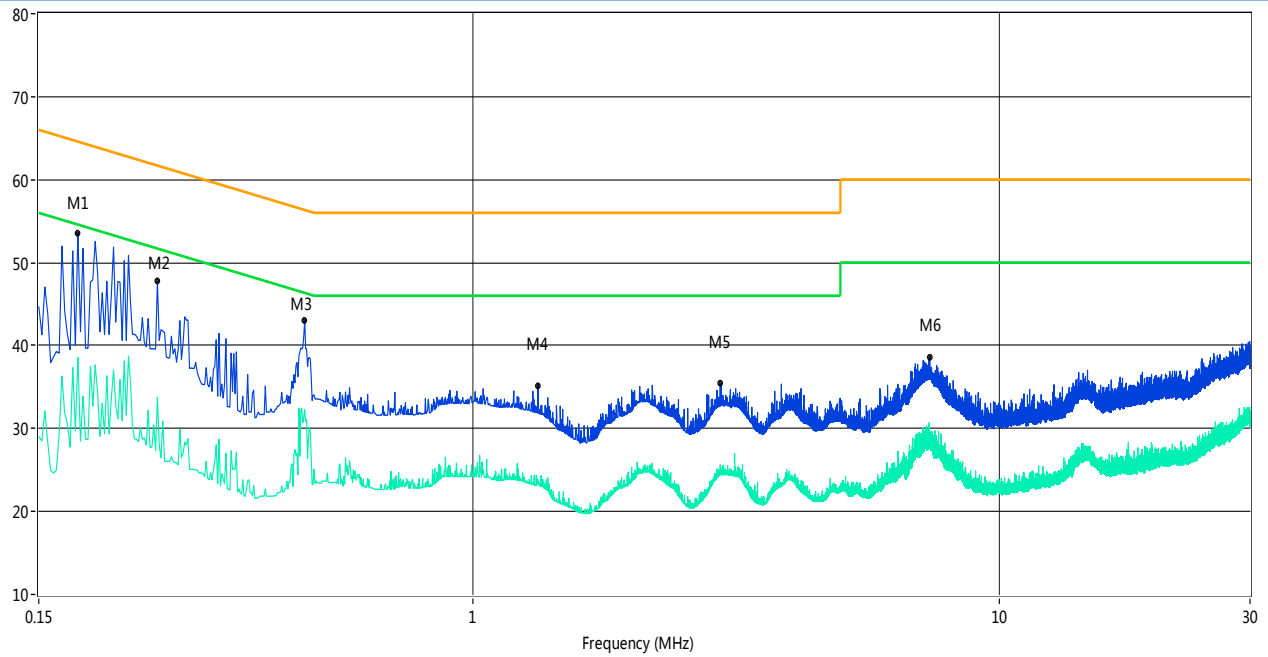


No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.18	53.5	13.00	65.2	11.70	Peak	N Line	Pass
1**	0.18	38.6	13.00	55.2	16.60	AV	N Line	Pass
2	0.25	47.7	13.00	63.1	15.40	Peak	N Line	Pass
2**	0.25	33.8	13.00	53.1	19.30	AV	N Line	Pass
3	0.48	43.1	13.00	56.6	13.50	Peak	N Line	Pass
3**	0.48	32.3	13.00	46.6	14.30	AV	N Line	Pass
4	1.33	35.2	13.00	56.0	20.80	Peak	N Line	Pass
4**	1.33	23.4	13.00	46.0	22.60	AV	N Line	Pass
5	2.96	35.5	13.00	56.0	20.50	Peak	N Line	Pass
5**	2.96	25.6	13.00	46.0	20.40	AV	N Line	Pass
6	7.39	38.7	13.00	60.0	21.30	Peak	N Line	Pass
6**	7.39	29.7	13.00	50.0	20.30	AV	N Line	Pass

A.8 Radiated Emission

Duty cycle correction factor for average measurement.

DH5 on time/100 ms(Count Pulses) Plot on Channel 39

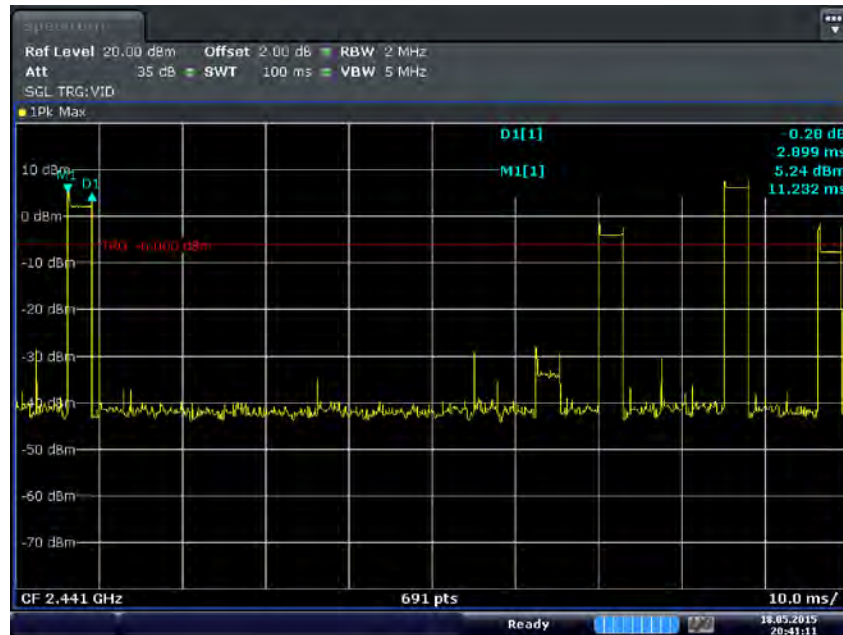

Date: 18.MAY.2015 20:41:11

DH5 on time/100 ms(One Pulse) Plot on Channel 39



Date: 18.MAY.2015 20:48:01

Note:

1. Duty cycle = on time/100 milliseconds = $4 \times 2.88 / 100 = 11.52\%$
2. Duty cycle correction factor = $20 \times \log(\text{Duty cycle}) = -18.77 \text{ dB}$
3. DH5 has the highest duty cycle and is reported.

Note 1: The symbol of “--” in the table which means not application.


Note 2: For the test data above 1 GHz, According the ANSI C63.4-2003, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 3: All configurations have been tested, only the worst configuration (GFSK High Channel) shown here.

Test Data and Plots


The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

30 MHz to 1 GHz, ANT V

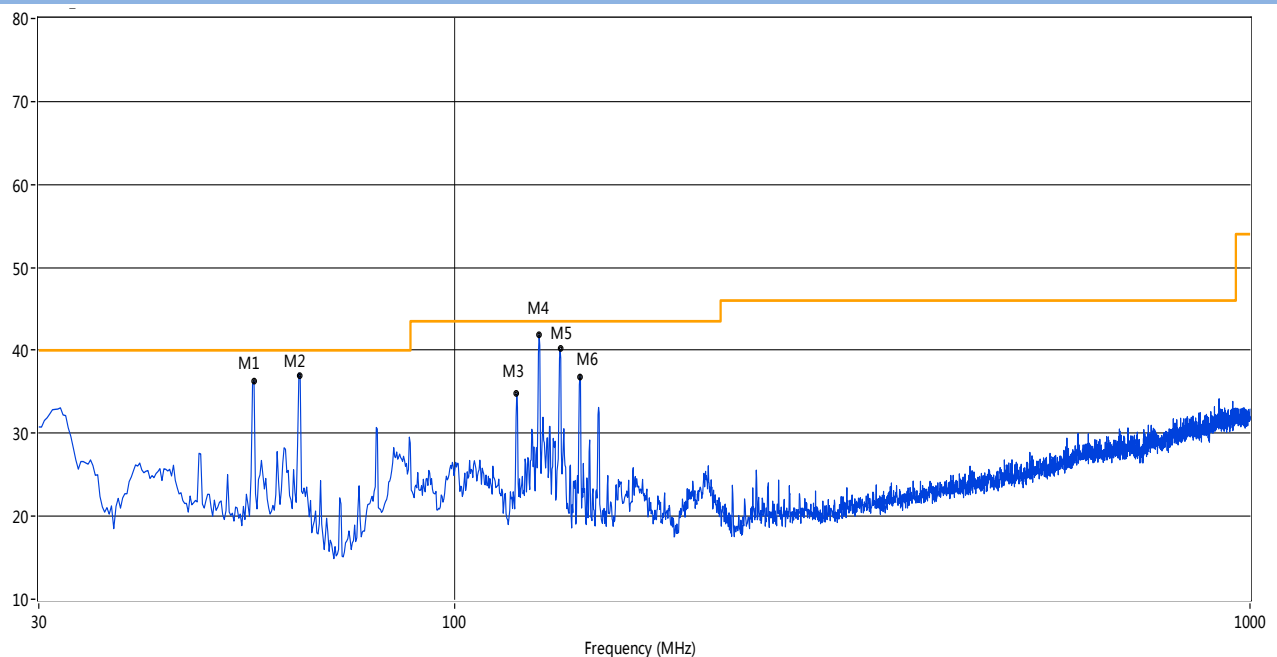

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	55.94	36.34	-19.30	40.0	3.66	Peak	37.00	100	Vertical	Pass
2	63.94	36.87	-20.36	40.0	3.13	Peak	264.40	100	Vertical	Pass
3	119.70	34.77	-21.66	43.5	8.73	Peak	108.20	100	Vertical	Pass
4	127.80	41.87	-22.91	43.5	1.63	Peak	130.50	102.60	Vertical	Pass
4*	127.80	40.31	-22.91	43.5	3.19	QP	130.50	102.60	Vertical	Pass
5	135.70	40.16	-23.53	43.5	3.34	Peak	335.60	100	Vertical	Pass
6	143.70	36.84	-23.65	43.5	6.66	Peak	283.20	100	Vertical	Pass

30 MHz to 1 GHz, ANT H

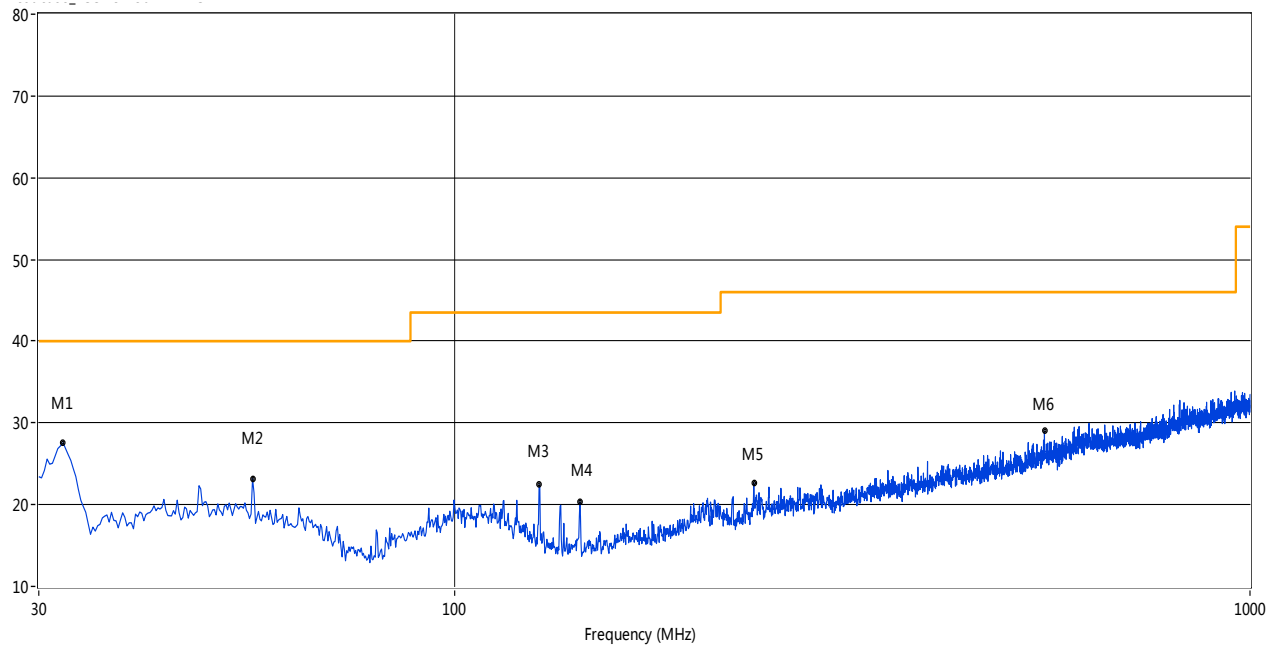


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	32.18	27.57	-22.02	40.0	12.43	Peak	-0.00	100	Horizontal	Pass
2	55.70	23.17	-19.19	40.0	16.83	Peak	308.10	100	Horizontal	Pass
3	127.70	22.44	-22.91	43.5	21.06	Peak	129.90	100	Horizontal	Pass
4	143.70	20.33	-23.65	43.5	23.17	Peak	137.30	100	Horizontal	Pass
5	237.77	22.68	-19.23	46.0	23.32	Peak	36.40	100	Horizontal	Pass
6	551.49	29.02	-12.01	46.0	16.98	Peak	21.40	100	Horizontal	Pass

Note: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Test Data and Plots (1 GHz ~ 10th Harmonic)

GFSK LOW CHANNEL 1 GHz to 25 GHz, ANT V


RE Test case_FCC 15C 1GHz-25GHz

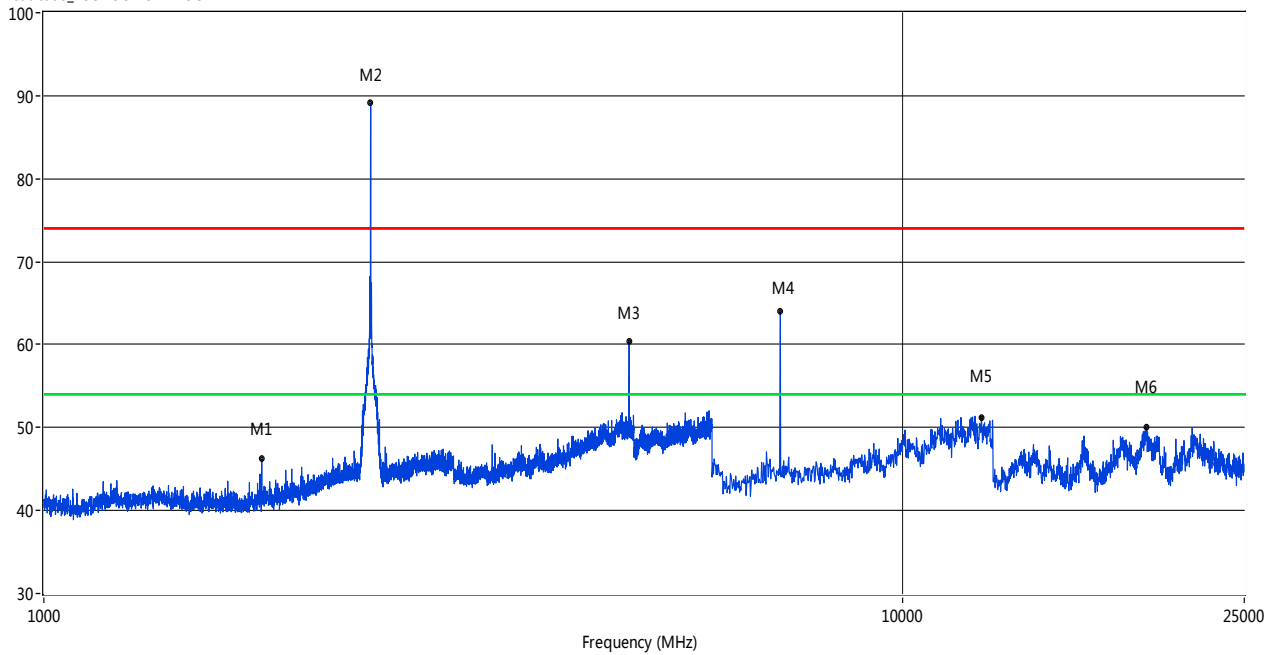

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1793.30	46.20	-3.72	74.0	27.80	Peak	28.50	100	Vertical	PASS
2	2402.15	89.12	-0.34	74.0	-15.12	Peak	340.20	100	Vertical	N/A
3	4804.05	60.43	13.74	74.0	13.57	Peak	321.10	100	Vertical	PASS
3**	4804.05	41.66	13.74	54.0	12.34	Average	321.10	100	Vertical	PASS
4	7205.75	64.07	14.44	74.0	9.93	Peak	345.20	100	Vertical	PASS
4**	7205.75	45.30	14.44	54.0	8.70	Average	345.20	100	Vertical	PASS
5	12356.91	51.20	20.64	74.0	22.80	Peak	216.90	100	Vertical	PASS
6	19229.62	50.01	13.94	74.0	23.99	Peak	19.80	100	Vertical	PASS

GFSK LOW CHANNEL 1 GHz to 25 GHz, ANT H


RE Test case_FCC 15C 1GHz-25GHz

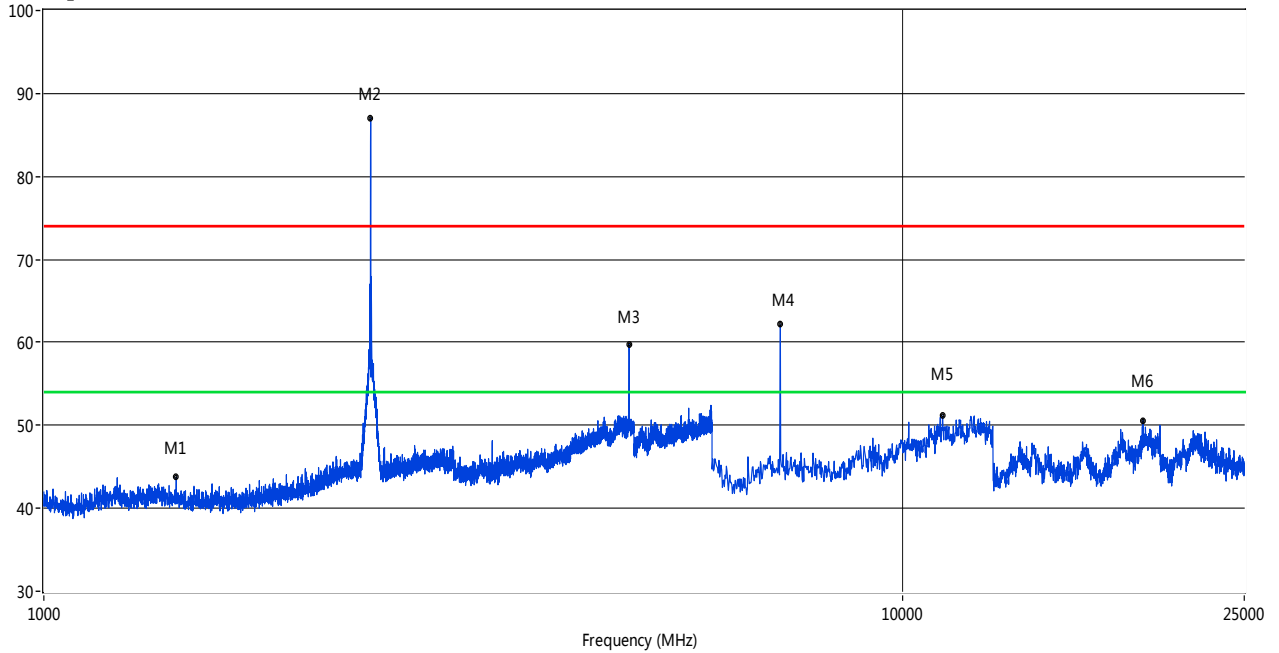

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1426.39	43.79	-4.63	74.0	30.21	Peak	133.20	100	Horizontal	PASS
2	2401.65	87.00	-0.27	74.0	-13.00	Peak	276.90	100	Horizontal	N/A
3	4804.05	59.76	13.74	74.0	14.24	Peak	296.80	100	Horizontal	PASS
3**	4804.05	40.99	13.74	54.0	13.01	Average	296.80	100	Horizontal	PASS
4	7205.75	64.09	14.44	74.0	9.91	Peak	345.20	100	Horizontal	PASS
4**	7205.75	45.32	14.44	54.0	8.68	Average	345.20	100	Horizontal	PASS
5	11132.70	51.14	20.22	74.0	22.86	Peak	175.10	100	Horizontal	PASS
6	19059.90	50.59	13.60	74.0	23.41	Peak	252.20	100	Horizontal	PASS

GFSK MIDDLE CHANNEL 1 GHz to 25 GHz, ANT V


RE Test case_FCC 15C 1GHz-25GHz

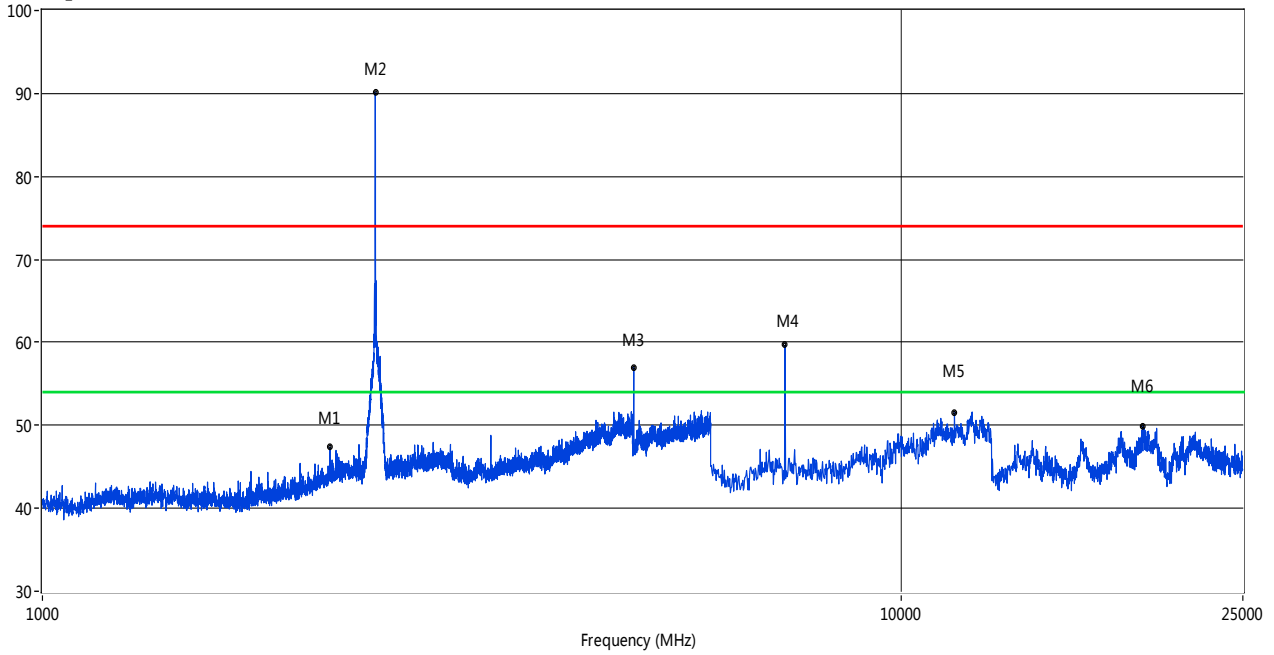

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2162.21	47.37	-0.98	74.0	26.63	Peak	40.10	100	Vertical	PASS
2	2441.14	90.13	-0.38	74.0	-16.13	Peak	336.00	100	Vertical	N/A
3	4882.03	56.96	13.60	74.0	17.04	Peak	291.10	100	Vertical	PASS
3**	4882.03	38.19	13.60	54.0	15.81	Average	291.10	100	Vertical	PASS
4	7323.29	59.67	14.18	74.0	14.33	Peak	160.60	100	Vertical	PASS
4**	7323.29	40.90	14.18	54.0	13.10	Average	160.60	100	Vertical	PASS
5	11537.02	51.51	20.17	74.0	22.49	Peak	208.70	100	Vertical	PASS
6	19129.78	49.92	13.86	74.0	24.08	Peak	354.60	100	Vertical	PASS

GFSK MIDDLE CHANNEL 1 GHz to 25 GHz, ANT H


RE Test case_FCC 15C 1GHz-25GHz

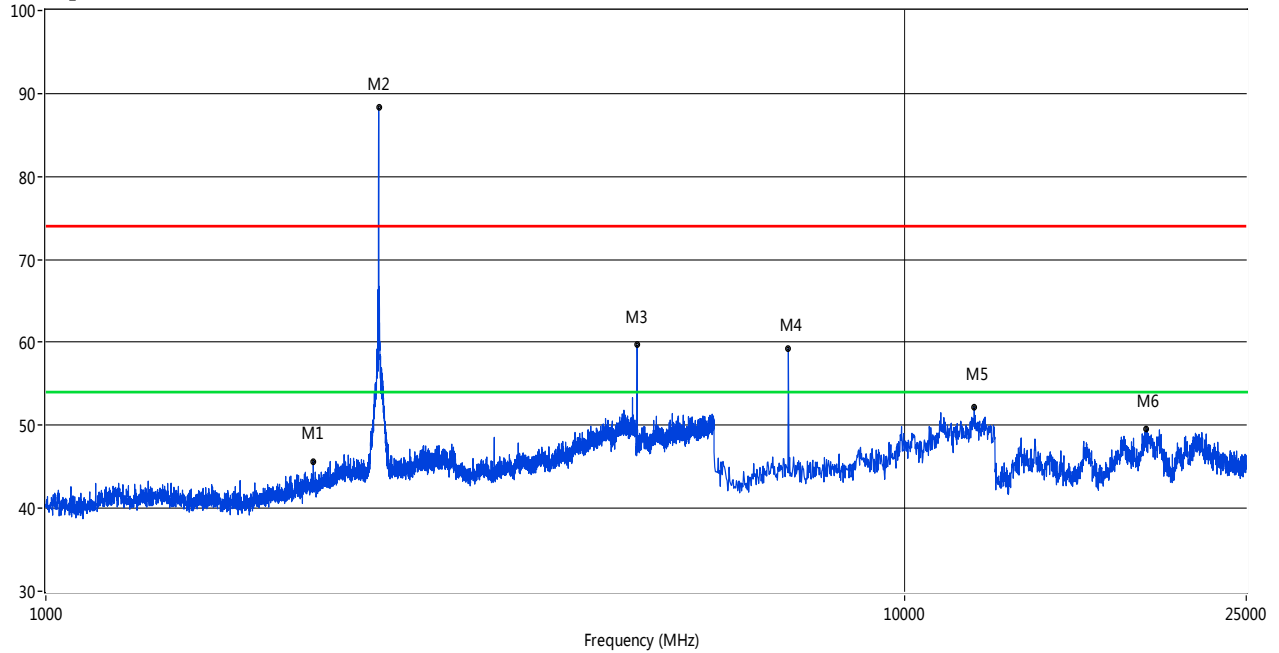

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2048.24	45.63	-2.02	74.0	28.37	Peak	131.00	100	Horizontal	PASS
2	2441.14	88.31	-0.38	74.0	-14.31	Peak	332.00	100	Horizontal	N/A
3	4882.03	59.67	13.60	74.0	14.33	Peak	272.90	100	Horizontal	PASS
3**	4882.03	40.90	13.60	54.0	13.10	Average	272.90	100	Horizontal	PASS
4	7323.29	59.25	14.18	74.0	14.75	Peak	296.70	100	Horizontal	PASS
4**	7323.29	40.48	14.18	54.0	13.52	Average	296.70	100	Horizontal	PASS
5	12053.66	52.22	20.82	74.0	21.78	Peak	205.80	100	Horizontal	PASS
6	19139.77	49.57	13.90	74.0	24.43	Peak	195.50	100	Horizontal	PASS

GFSK HIGH CHANNEL 1 GHz to 25 GHz, ANT V


RE Test case_FCC 15C 1GHz-25GHz

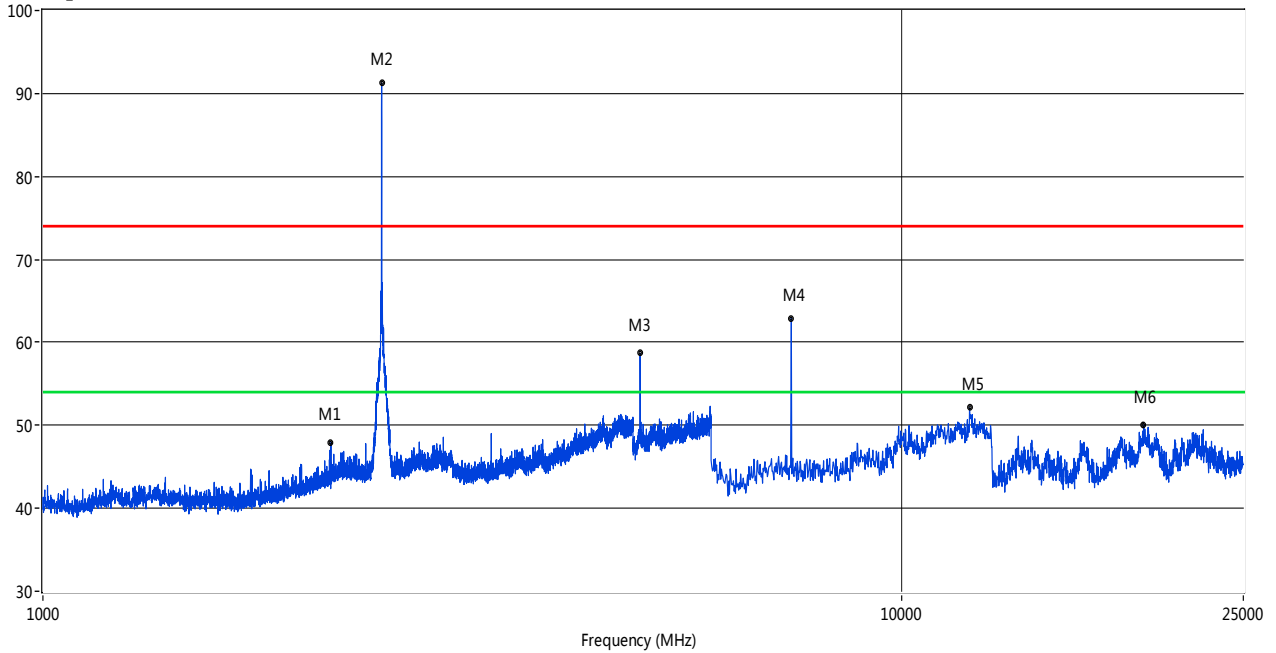

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2164.21	47.91	-0.94	74.0	26.09	Peak	47.50	100	Vertical	PASS
2	2480.13	91.27	-0.60	74.0	-17.27	Peak	343.80	100	Vertical	N/A
3	4960.01	58.67	14.22	74.0	15.33	Peak	269.10	100	Vertical	PASS
3**	4960.01	39.90	14.22	54.0	14.10	Average	269.10	100	Vertical	PASS
4	7439.60	62.92	14.21	74.0	11.08	Peak	205.80	100	Vertical	PASS
4**	7439.60	44.15	14.21	54.0	9.85	Average	205.80	100	Vertical	PASS
5	11997.50	52.11	20.87	74.0	21.89	Peak	141.20	100	Vertical	PASS
6	19139.77	49.57	13.90	74.0	24.43	Peak	195.50	100	Vertical	PASS

GFSK HIGH CHANNEL 1 GHz to 25 GHz, ANT H


RE Test case_FCC 15C 1GHz-25GHz

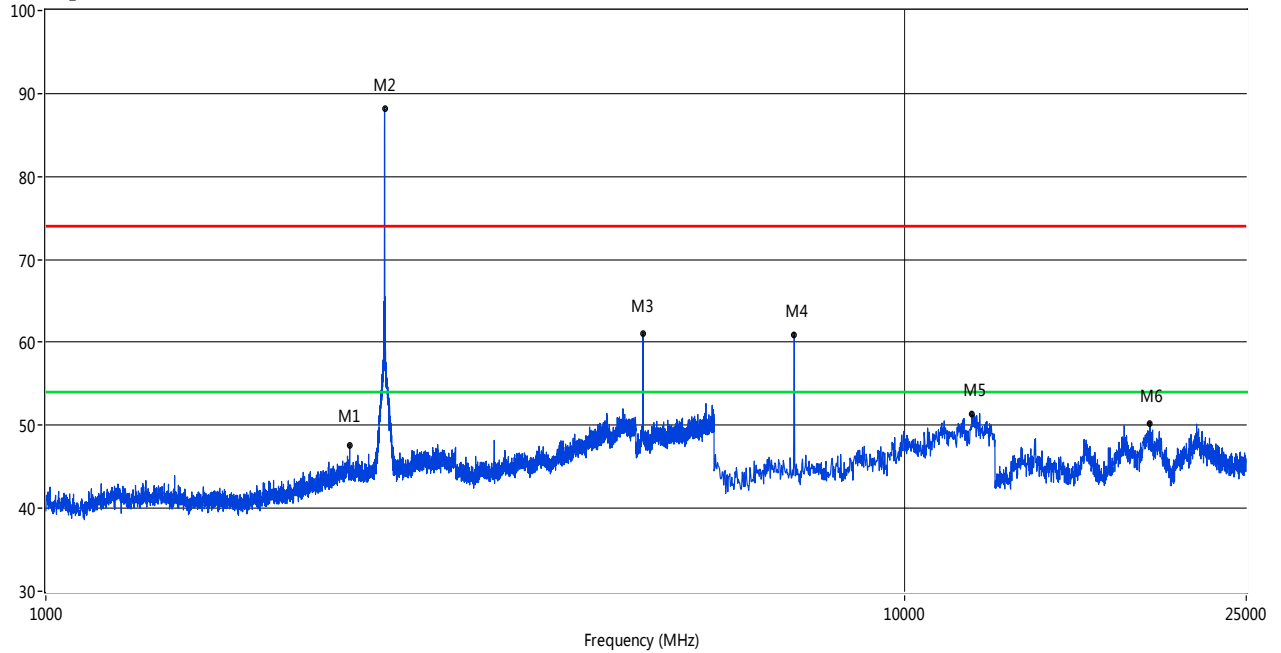

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2258.18	47.62	-0.48	74.0	26.38	Peak	0.00	100	Horizontal	PASS
2	2480.13	88.16	-0.60	74.0	-14.16	Peak	331.60	100	Horizontal	N/A
3	4960.01	61.09	14.22	74.0	12.91	Peak	267.00	100	Horizontal	PASS
3**	4960.01	42.32	14.22	54.0	11.68	Average	267.00	100	Horizontal	PASS
4	7439.60	60.93	14.21	74.0	13.07	Peak	247.80	100	Horizontal	PASS
4**	7439.60	42.16	14.21	54.0	11.84	Average	247.80	100	Horizontal	PASS
5	11975.04	51.33	20.76	74.0	22.67	Peak	70.90	100	Horizontal	PASS
6	19309.48	50.23	13.46	74.0	23.77	Peak	57.40	100	Horizontal	PASS

Π/4-DQPSK LOW CHANNEL 1 GHz to 25 GHz, ANT V


RE Test case_FCC 15C 1GHz-25GHz

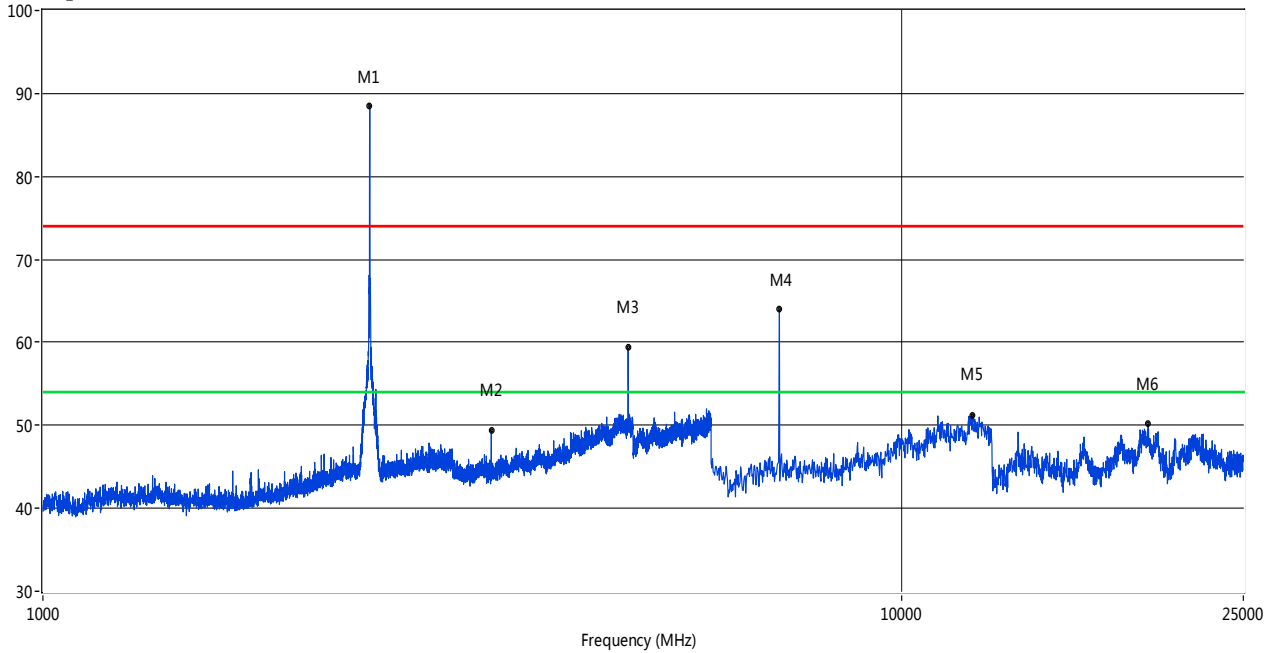

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdi t
1	2401.65	88.49	-0.27	74.0	-14.49	Peak	276.40	100	Vertical	N/A
2	3327.67	49.39	8.95	74.0	24.61	Peak	307.00	100	Vertical	PASS
3	4803.30	59.34	13.74	74.0	14.66	Peak	321.40	100	Vertical	PASS
3**	4803.30	40.57	13.74	54.0	13.43	Average	321.40	100	Vertical	PASS
4	7205.75	64.02	14.44	74.0	9.98	Peak	317.90	100	Vertical	PASS
4**	7205.75	45.25	14.44	54.0	8.75	Average	317.90	100	Vertical	PASS
5	12087.35	51.26	20.78	74.0	22.74	Peak	45.40	100	Vertical	PASS
6	19369.38	50.17	13.09	74.0	23.83	Peak	0.00	100	Vertical	PASS

π/4-DQPSK LOW CHANNEL 1 GHz to 25 GHz, ANT H


RE Test case_FCC 15C 1GHz-25GHz

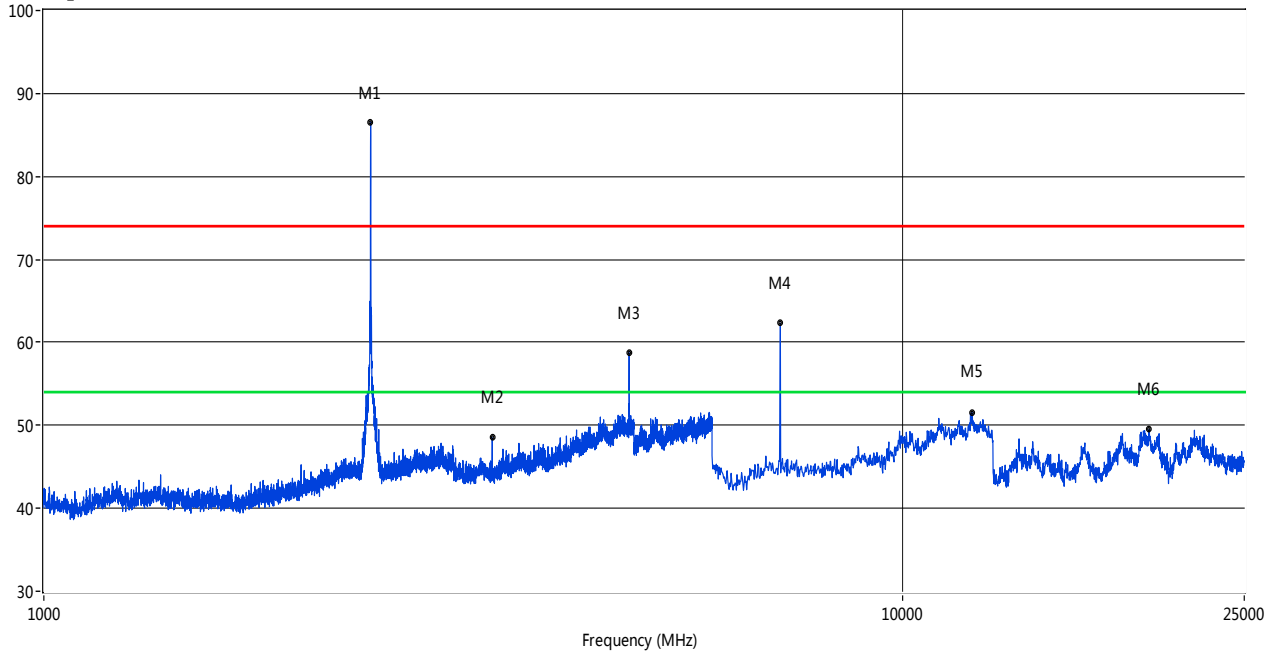

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2401.65	88.49	-0.27	74.0	-14.49	Peak	276.40	100	Horizontal	N/A
2	3327.67	48.50	8.95	74.0	25.50	Peak	344.70	100	Horizontal	PASS
3	4803.30	59.34	13.74	74.0	14.66	Peak	321.40	100	Horizontal	PASS
3**	4803.30	40.57	13.74	54.0	13.43	Average	321.40	100	Horizontal	PASS
4	7205.75	62.30	14.44	74.0	11.70	Peak	317.90	100	Horizontal	PASS
4**	7205.75	43.53	14.44	54.0	10.47	Average	317.90	100	Horizontal	PASS
5	12042.43	51.55	20.83	74.0	22.45	Peak	216.60	100	Horizontal	PASS
6	19369.38	49.48	13.09	74.0	24.52	Peak	-0.00	100	Horizontal	PASS

Π/4-DQPSK MIDDLE CHANNEL 1 GHz to 25 GHz, ANT V


RE Test case_FCC 15C 1GHz-25GHz

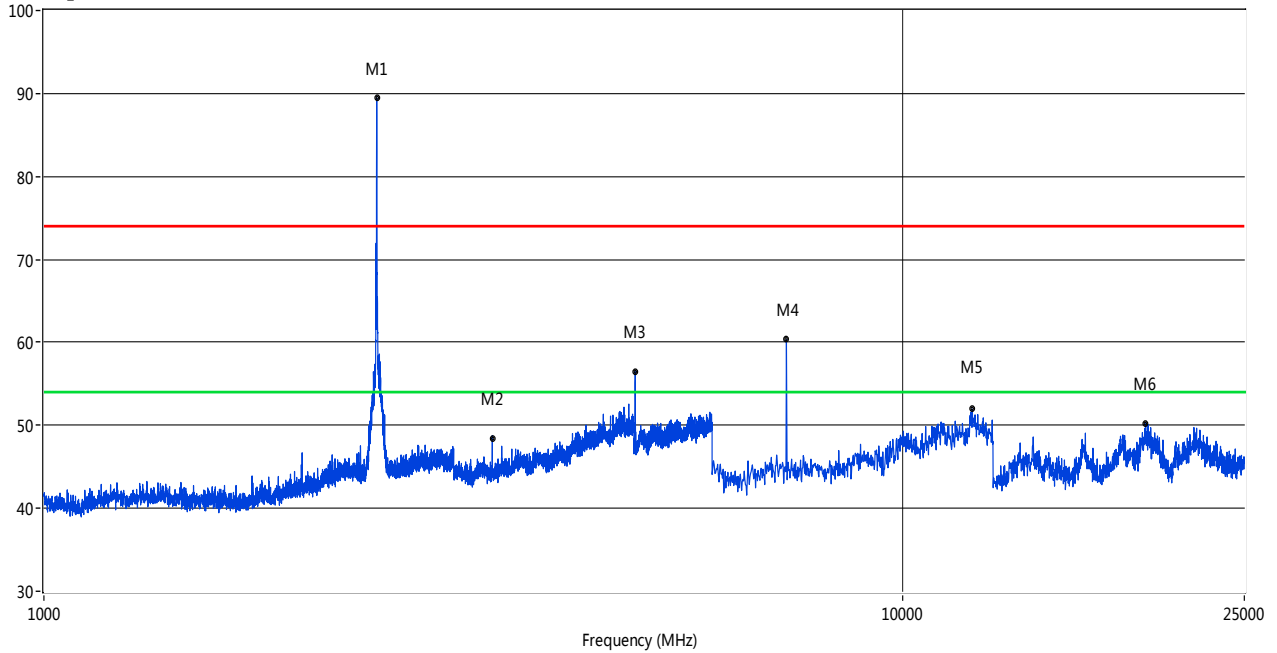

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2441.14	89.48	-0.38	74.0	-15.48	Peak	344.10	100	Vertical	N/A
2	3327.67	49.39	8.95	74.0	24.61	Peak	307.00	100	Vertical	PASS
3	4882.03	56.49	13.60	74.0	17.51	Peak	284.00	100	Vertical	PASS
3**	4882.03	37.72	13.60	54.0	16.28	Average	284.00	100	Vertical	PASS
4	7323.29	60.32	14.18	74.0	13.68	Peak	199.20	100	Vertical	PASS
4**	7323.29	41.55	14.18	54.0	12.45	Average	199.20	100	Vertical	PASS
5	12053.66	51.96	20.82	74.0	22.04	Peak	269.70	100	Vertical	PASS
6	19189.68	50.25	14.08	74.0	23.75	Peak	360.20	100	Vertical	PASS

Π/4-DQPSK MIDDLE CHANNEL 1 GHz to 25 GHz, ANT H


RE Test case_FCC 15C 1GHz-25GHz

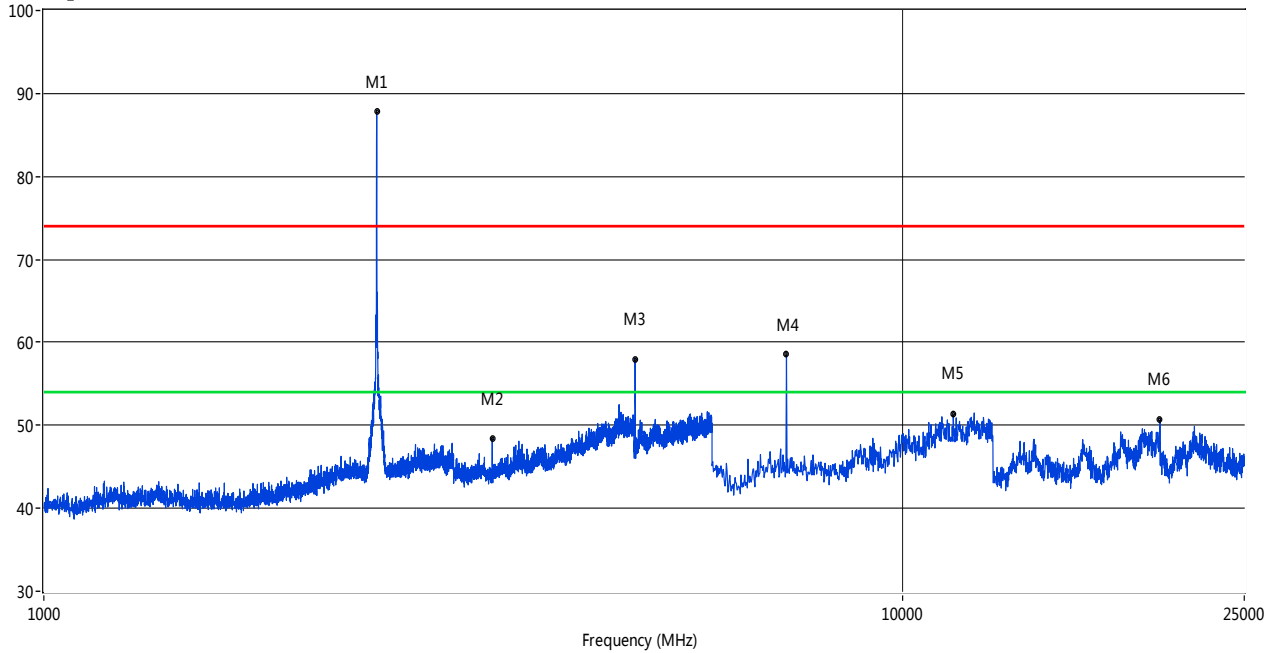

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2441.14	89.48	-0.38	74.0	-15.48	Peak	344.10	100	Horizontal	N/A
2	3327.67	49.39	.95	74.0	24.61	Peak	307.00	100	Horizontal	PASS
3	4882.03	56.49	13.60	74.0	17.51	Peak	284.00	100	Horizontal	PASS
3**	4882.03	37.72	13.60	54.0	16.28	Average	284.00	100	Horizontal	PASS
4	7323.29	60.32	14.18	74.0	13.68	Peak	199.20	100	Horizontal	PASS
4**	7323.29	41.55	14.18	54.0	12.45	Average	199.20	100	Horizontal	PASS
5	11458.40	51.28	20.05	74.0	22.72	Peak	304.40	100	Horizontal	PASS
6	19938.44	50.67	11.93	74.0	23.33	Peak	-0.20	100	Horizontal	PASS

Π/4-DQPSK HIGH CHANNEL 1 GHz to 25 GHz, ANT V


RE Test case_FCC 15C 1GHz-25GHz

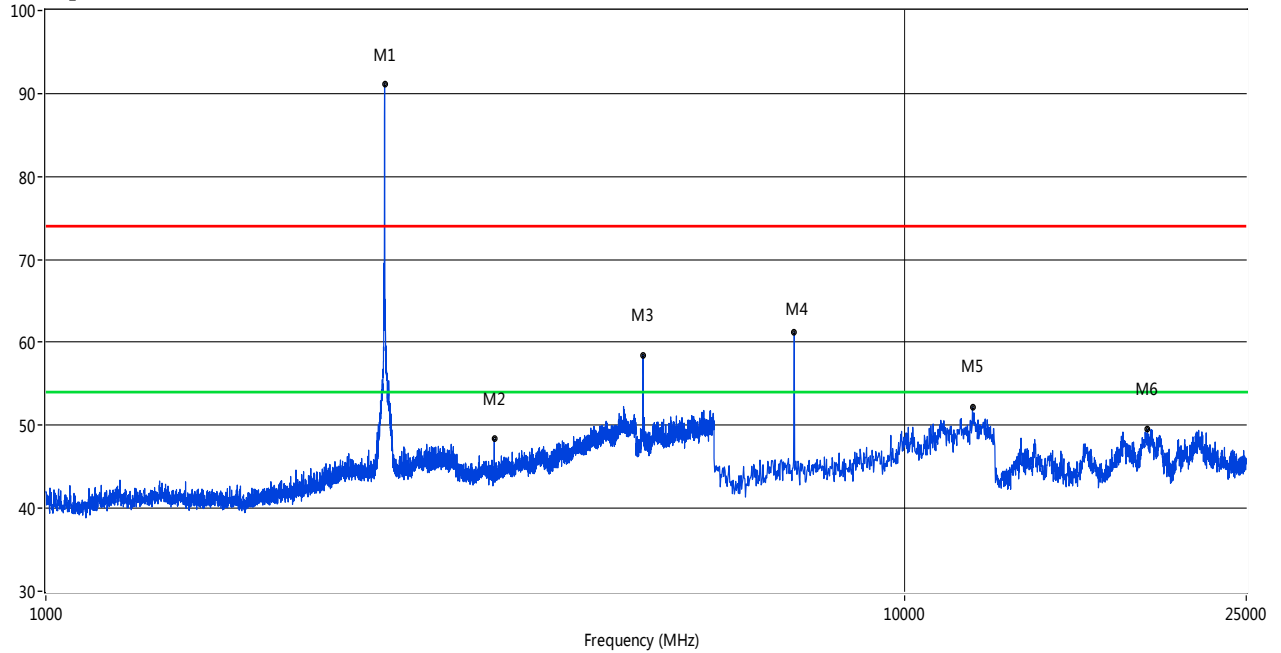

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2480.13	91.17	-0.60	74.0	-17.17	Peak	336.00	100	Vertical	N/A
2	3327.67	49.39	8.95	74.0	24.61	Peak	307.00	100	Vertical	PASS
3	4959.26	58.44	14.19	74.0	15.56	Peak	272.90	100	Vertical	PASS
3**	4959.26	39.67	14.19	54.0	14.33	Average	272.90	100	Vertical	PASS
4	7439.60	61.19	14.21	74.0	12.81	Peak	205.80	100	Vertical	PASS
4**	7439.60	42.42	14.21	54.0	11.58	Average	205.80	100	Vertical	PASS
5	11997.50	52.17	20.87	74.0	21.83	Peak	141.20	100	Vertical	PASS
6	19179.70	49.50	14.04	74.0	24.50	Peak	275.90	100	Vertical	PASS

π/4-DQPSK HIGH CHANNEL 1 GHz to 25 GHz, ANT H


RE Test case_FCC 15C 1GHz-25GHz

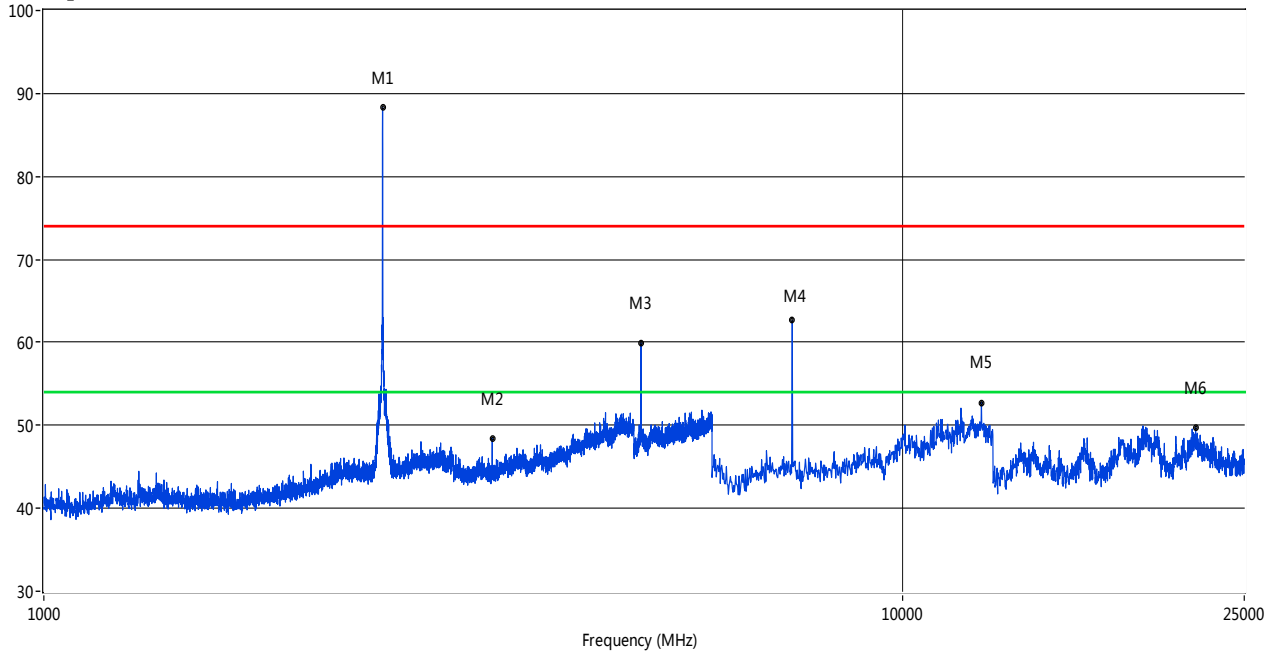

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2480.13	91.17	-0.60	74.0	-17.17	Peak	336.00	100	Horizontal	N/A
2	3327.67	49.39	8. 5	74.0	24.61	Peak	307.00	100	Horizontal	PASS
3	4959.26	59.93	14.19	74.0	14.07	Peak	269.90	100	Horizontal	PASS
3**	4959.26	41.16	14.19	54.0	12.84	Average	269.90	100	Horizontal	PASS
4	7439.60	62.62	14.21	74.0	11.38	Peak	40.50	100	Horizontal	PASS
4**	7439.60	43.85	14.21	54.0	10.15	Average	40.50	100	Horizontal	PASS
5	12356.91	52.72	20.64	74.0	21.28	Peak	216.90	100	Horizontal	PASS
6	21945.09	49.75	12.50	74.0	24.25	Peak	207.40	100	Horizontal	PASS

8-DPSK LOW CHANNEL 1 GHz to 25 GHz, ANT V


RE Test case_FCC 15C 1GHz-25GHz

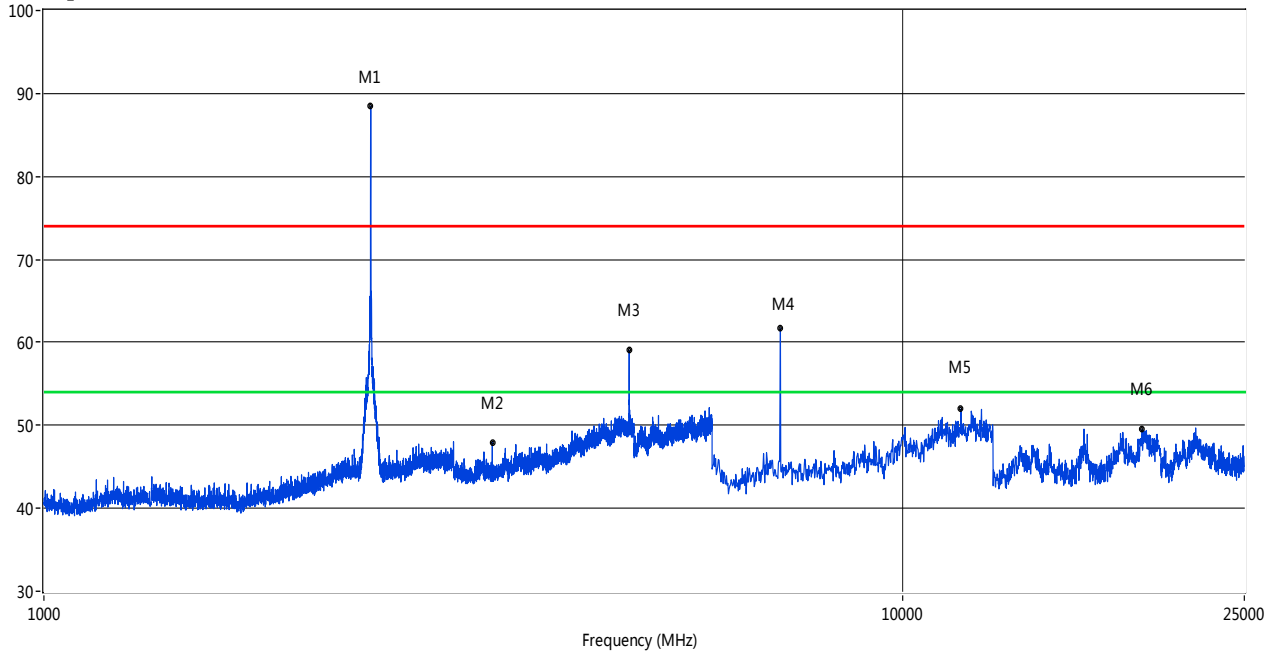

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2402.15	88.44	-0.34	74.0	-14.44	Peak	339.70	100	Vertical	N/A
2	3327.67	49.39	8.95	74.0	24.61	Peak	307.00	100	Vertical	PASS
3	4803.30	59.04	13.74	74.0	14.96	Peak	320.40	100	Vertical	PASS
3**	4803.30	40.27	13.74	54.0	13.73	Average	320.40	100	Vertical	PASS
4	7205.75	62.25	14.44	74.0	11.75	Peak	345.20	100	Vertical	PASS
4**	7205.75	43.48	14.44	54.0	10.52	Average	345.20	100	Vertical	PASS
5	11694.26	51.99	20.51	74.0	22.01	Peak	136.40	100	Vertical	PASS
6	19009.98	49.52	13.42	74.0	24.48	Peak	25.00	100	Vertical	PASS

8-DPSK LOW CHANNEL 1 GHz to 25 GHz, ANT H


RE Test case_FCC 15C 1GHz-25GHz

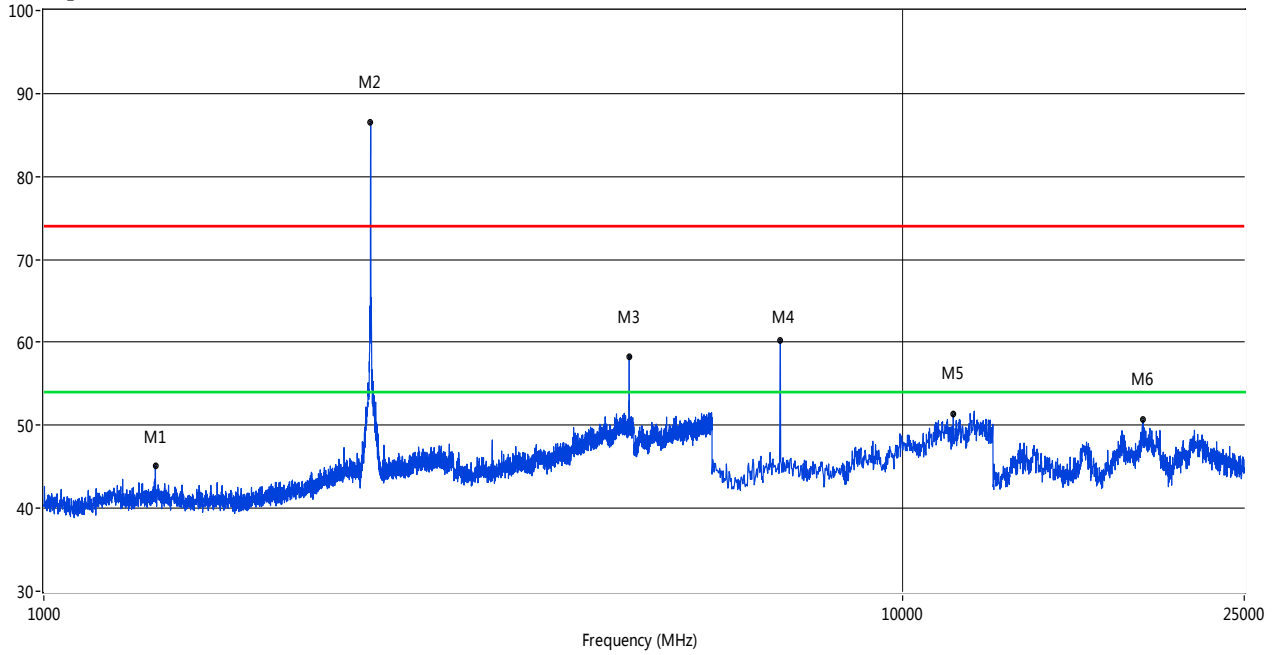

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1348.91	45.12	-4.56	74.0	28.88	Peak	91.40	100	Horizontal	PASS
2	2401.65	86.46	-0.27	74.0	-12.46	Peak	267.50	100	Horizontal	N/A
3	4804.05	58.29	13.74	74.0	15.71	Peak	308.50	100	Horizontal	PASS
3**	4804.05	39.52	13.74	54.0	14.48	Average	308.50	100	Horizontal	PASS
4	7205.75	61.66	14.44	74.0	12.34	Peak	345.20	100	Horizontal	PASS
4**	7205.75	42.89	14.44	54.0	11.11	Average	345.20	100	Horizontal	PASS
5	11458.40	51.28	20.05	74.0	22.72	Peak	304.40	100	Horizontal	PASS
6	19059.90	50.66	13.60	74.0	23.34	Peak	252.20	100	Horizontal	PASS

8-DPSK MIDDLE CHANNEL 1 GHz to 25 GHz, ANT V


RE Test case_FCC 15C 1GHz-25GHz

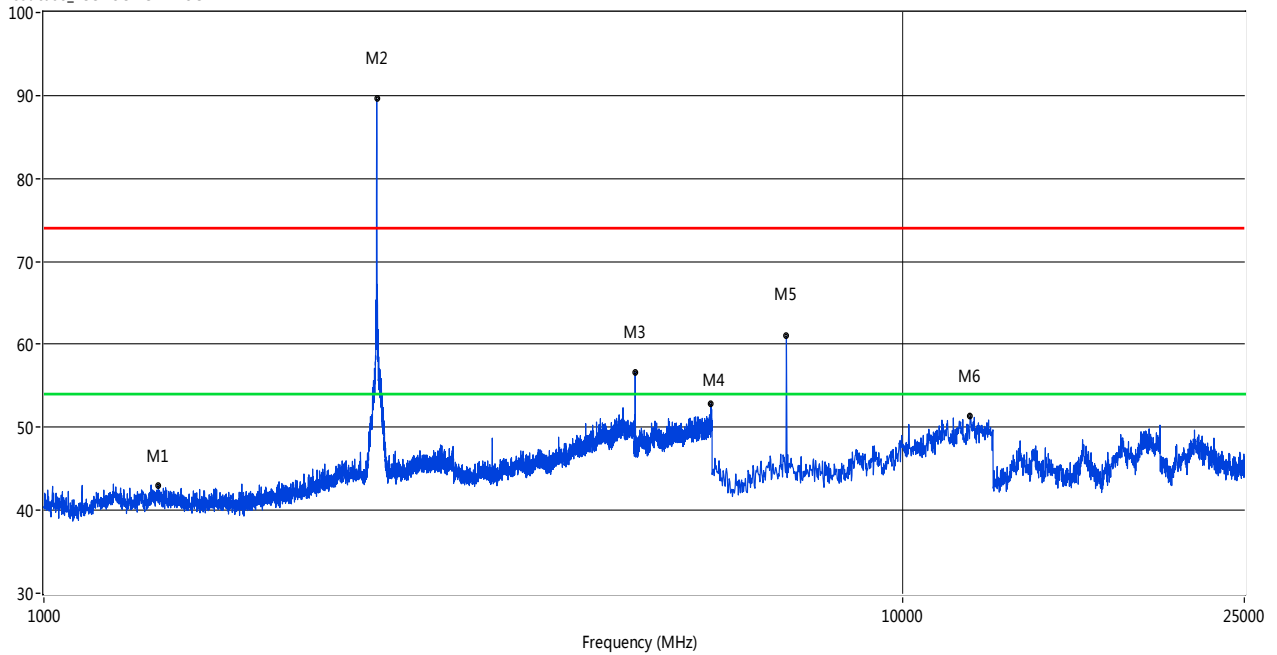

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1358.91	42.99	-4.47	74.0	31.01	Peak	316.00	100	Vertical	PASS
2	2441.14	89.58	-0.38	74.0	-15.58	Peak	343.50	100	Vertical	N/A
3	4881.28	56.60	13.62	74.0	17.40	Peak	23.30	100	Vertical	PASS
3**	4881.28	37.83	13.62	54.0	16.17	Average	23.30	100	Vertical	PASS
4	5982.75	52.80	15.82	74.0	21.20	Peak	357.60	100	Vertical	PASS
5	7323.29	60.98	14.18	74.0	13.02	Peak	360.00	100	Vertical	PASS
5**	7323.29	42.21	14.18	54.0	11.79	Average	360.00	100	Vertical	PASS
6	11986.27	51.35	20.81	74.0	22.65	Peak	127.20	100	Vertical	PASS

8-DPSK MIDDLE CHANNEL 1 GHz to 25 GHz, ANT H


RE Test case_FCC 15C 1GHz-25GHz

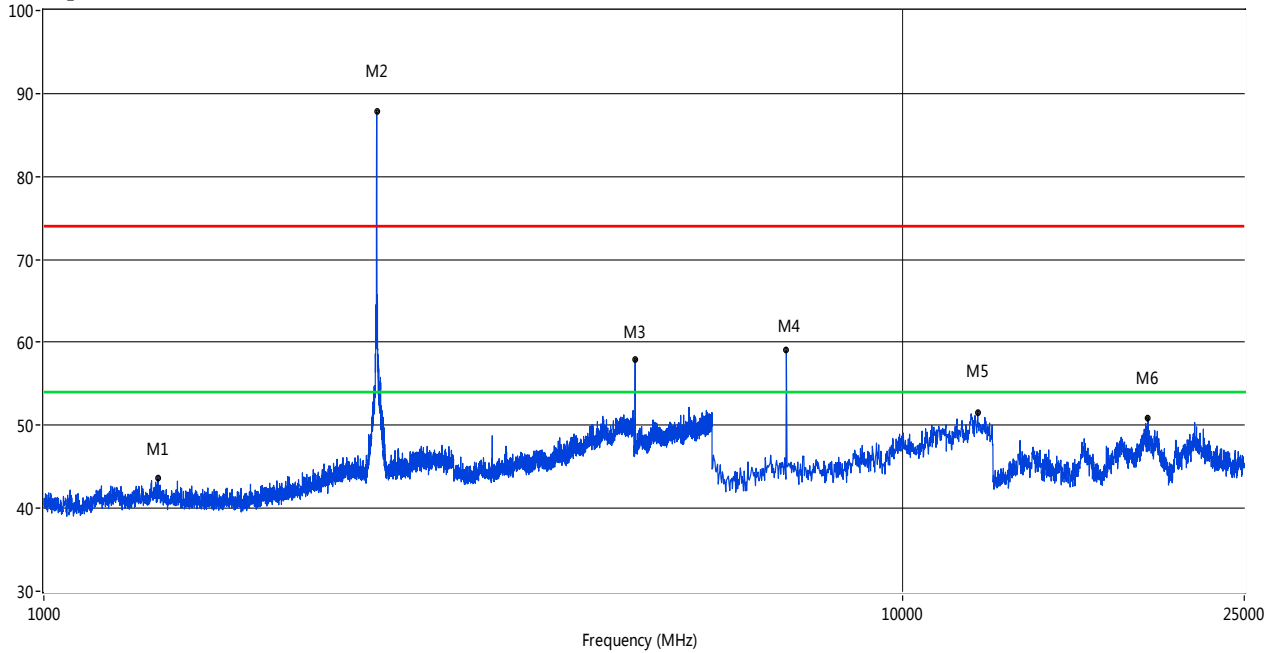

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1357.91	43.57	-4.42	74.0	30.43	Peak	252.30	100	Horizontal	PASS
2	2441.14	89.58	-0.38	74.0	-15.58	Peak	343.50	100	Horizontal	N/A
3	4882.03	58.01	13.60	74.0	15.99	Peak	273.20	100	Horizontal	PASS
3**	4882.03	39.24	13.60	54.0	14.76	Average	273.20	100	Horizontal	PASS
4	7323.29	59.03	14.18	74.0	14.97	Peak	199.20	100	Horizontal	PASS
4**	7323.29	40.26	14.18	54.0	13.74	Average	199.20	100	Horizontal	PASS
5	12233.36	51.59	20.65	74.0	22.41	Peak	0.30	100	Horizontal	PASS
6	19309.48	50.91	13.46	74.0	23.09	Peak	57.40	100	Horizontal	PASS

8-DPSK HIGH CHANNEL 1 GHz to 25 GHz, ANT V


RE Test case_FCC 15C 1GHz-25GHz

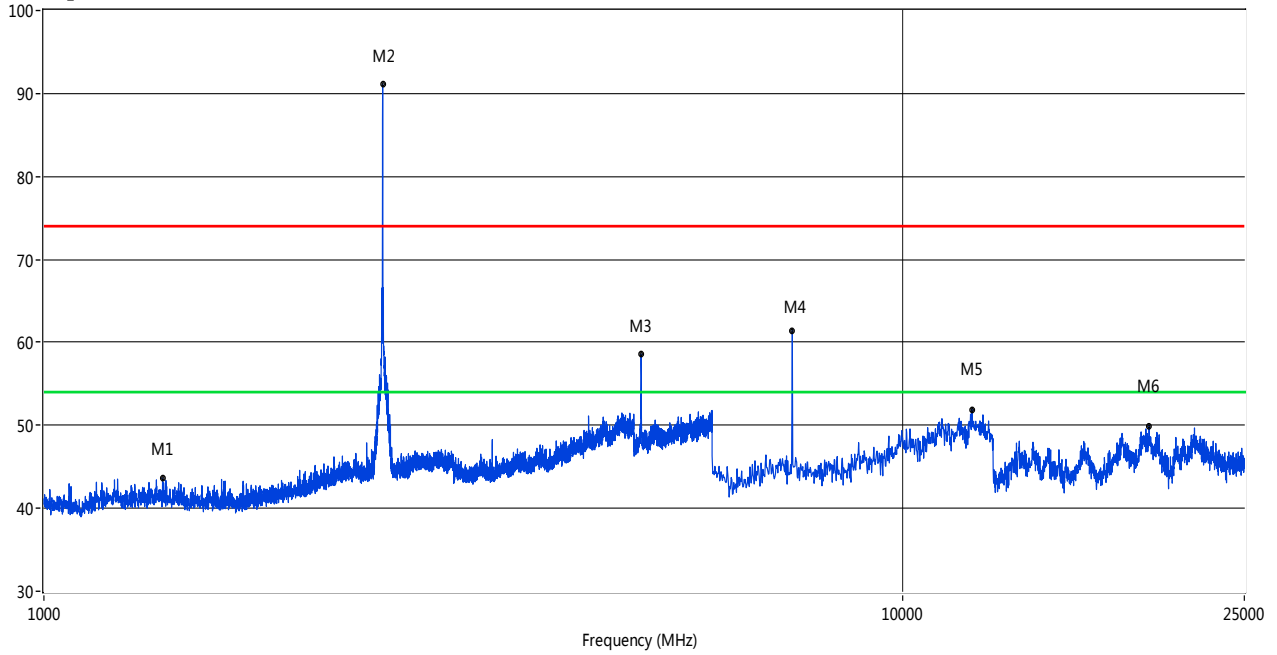

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1374.41	43.65	-4.58	74.0	30.35	Peak	308.20	100	Vertical	PASS
2	2480.13	91.12	-0.60	74.0	-17.12	Peak	340.00	100	Vertical	N/A
3	4960.01	58.58	14.22	74.0	15.42	Peak	272.40	100	Vertical	PASS
3**	4960.01	39.81	14.22	54.0	14.19	Average	272.40	100	Vertical	PASS
4	7439.60	61.44	14.21	74.0	12.56	Peak	205.80	100	Vertical	PASS
4**	7439.60	42.67	14.21	54.0	11.33	Average	205.80	100	Vertical	PASS
5	12042.43	51.93	20.83	74.0	22.07	Peak	216.60	100	Vertical	PASS
6	19369.38	49.94	13.09	74.0	24.06	Peak	0.00	100	Vertical	PASS

8-DPSK HIGH CHANNEL 1 GHz to 25 GHz, ANT H

RE Test case_FCC 15C 1GHz-25GHz

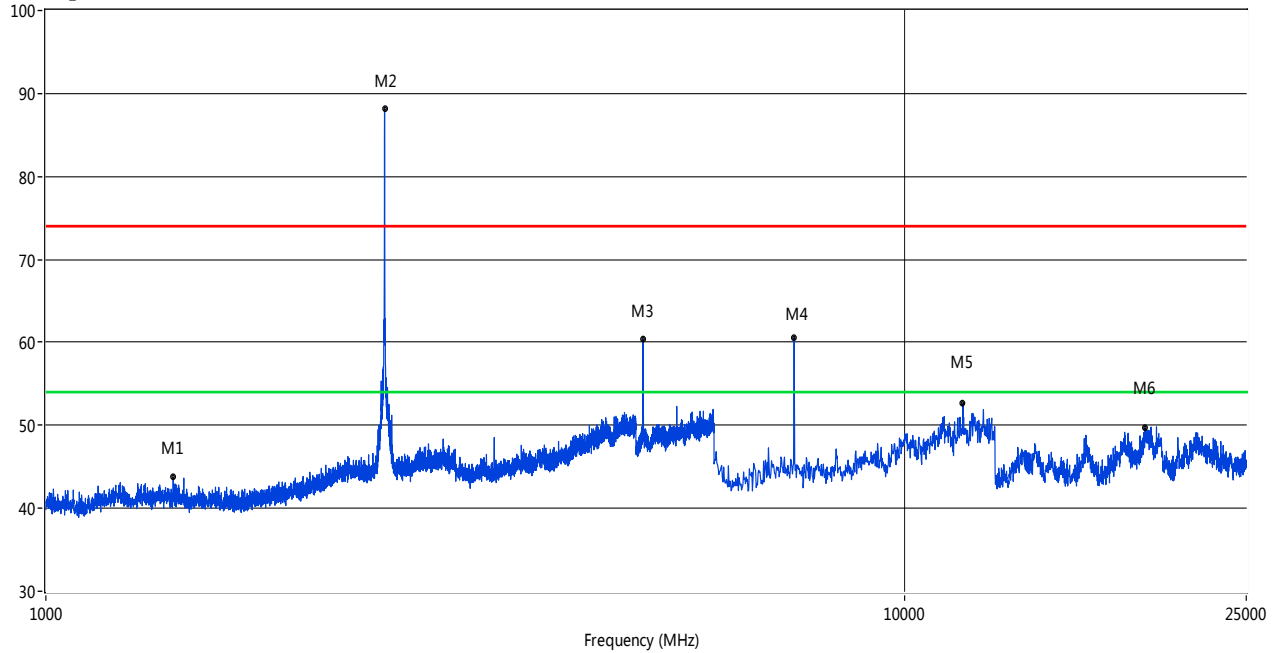


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1406.90	43.74	-4.67	74.0	30.26	Peak	204.80	100	Horizontal	PASS
2	2480.13	88.20	-0.60	74.0	-14.20	Peak	331.90	100	Horizontal	N/A
3	4959.26	60.38	14.19	74.0	13.62	Peak	267.00	100	Horizontal	PASS
3**	4959.26	41.61	14.19	54.0	12.39	Average	267.00	100	Horizontal	PASS
4	7439.60	61.44	14.21	74.0	12.56	Peak	205.80	100	Horizontal	PASS
4**	7439.60	42.67	14.21	54.0	11.33	Average	205.80	100	Horizontal	PASS
5	11694.26	52.62	20.51	74.0	21.38	Peak	136.40	100	Horizontal	PASS
6	19049.92	49.71	13.57	74.0	24.29	Peak	164.80	100	Horizontal	PASS

Hopping Mode:

GFSK MODE 1 GHz to 25 GHz, ANT V


RE Test case_FCC 15C 1GHz-25GHz

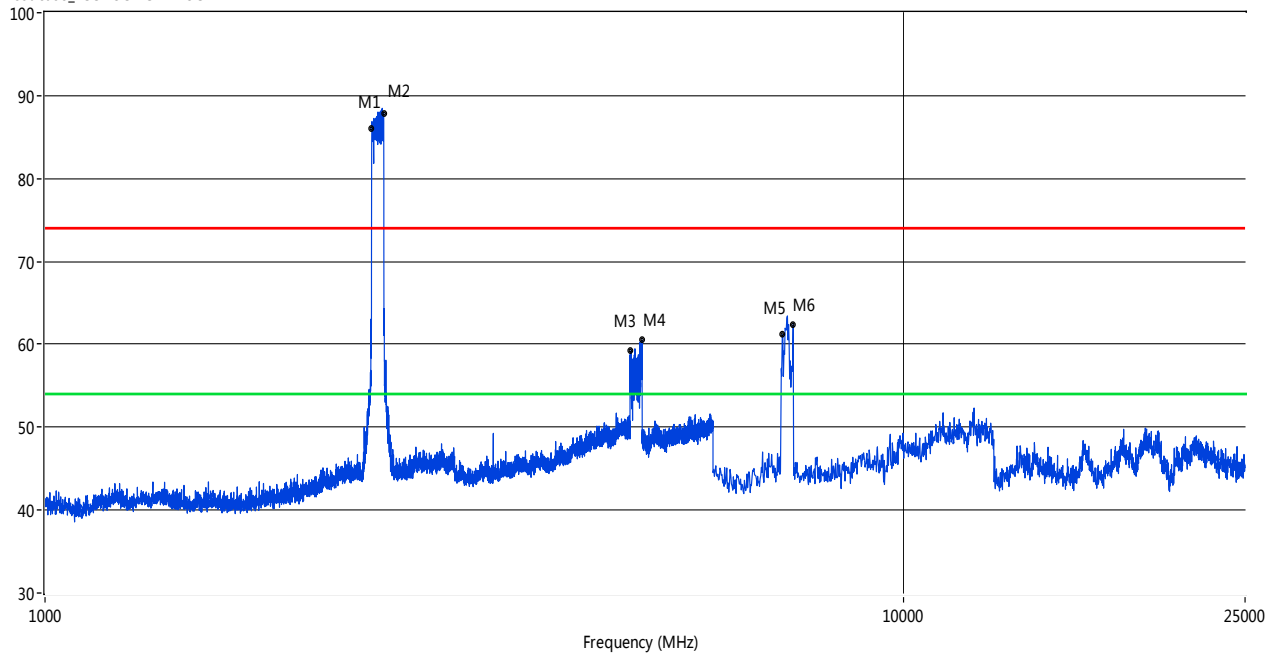

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2402.65	86.00	-0.26	74.0	-12.00	Peak	320.10	100	Vertical	N/A
2	2480.13	87.83	-0.60	74.0	-13.83	Peak	320.10	100	Vertical	N/A
3	4813.80	59.22	13.96	74.0	14.78	Peak	286.50	100	Vertical	PASS
3**	4813.80	40.45	13.96	54.0	13.55	Average	286.50	100	Vertical	PASS
4	4957.76	60.52	14.15	74.0	13.48	Peak	272.70	100	Vertical	PASS
4**	4957.76	41.75	14.15	54.0	12.25	Average	272.70	100	Vertical	PASS
5	7235.44	61.18	14.34	74.0	12.82	Peak	0.80	100	Vertical	PASS
5**	7235.44	42.41	14.34	54.0	11.59	Average	0.80	100	Vertical	PASS
6	7439.60	59.37	14.21	74.0	14.63	Peak	337.30	100	Vertical	PASS
6**	7439.60	40.60	14.21	54.0	13.40	Average	337.30	100	Vertical	PASS

GFSK MODE 1 GHz to 25 GHz, ANT H


RE Test case_FCC 15C 1GHz-25GHz

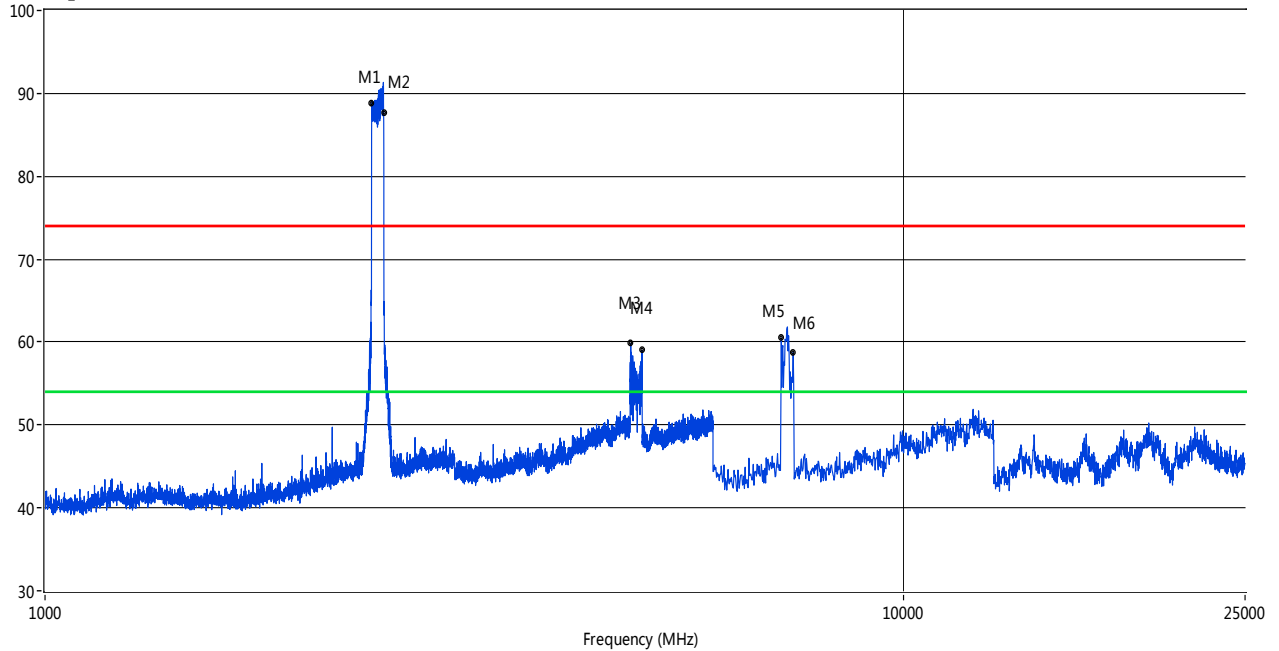

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2402.15	88.78	-0.34	74.0	-14.78	Peak	331.90	100	Horizontal	N/A
2	2480.13	87.69	-0.60	74.0	-13.69	Peak	323.80	100	Horizontal	N/A
3	4812.30	59.83	13.93	74.0	14.17	Peak	331.10	100	Horizontal	PASS
3**	4812.30	41.06	13.93	54.0	12.94	Average	331.10	100	Horizontal	PASS
4	4960.01	59.02	14.22	74.0	14.98	Peak	272.10	100	Horizontal	PASS
4**	4960.01	40.25	14.22	54.0	13.75	Average	272.10	100	Horizontal	PASS
5	7206.75	60.50	14.44	74.0	13.50	Peak	108.00	100	Horizontal	PASS
5**	7206.75	41.73	14.44	54.0	12.27	Average	108.00	100	Horizontal	PASS
6	7439.60	58.77	14.21	74.0	15.23	Peak	247.80	100	Horizontal	PASS
6**	7439.60	40.00	14.21	54.0	14.00	Average	247.80	100	Horizontal	PASS

Π/4-DQPSK MODE 1 GHz to 25 GHz, ANT V


RE Test case_FCC 15C 1GHz-25GHz

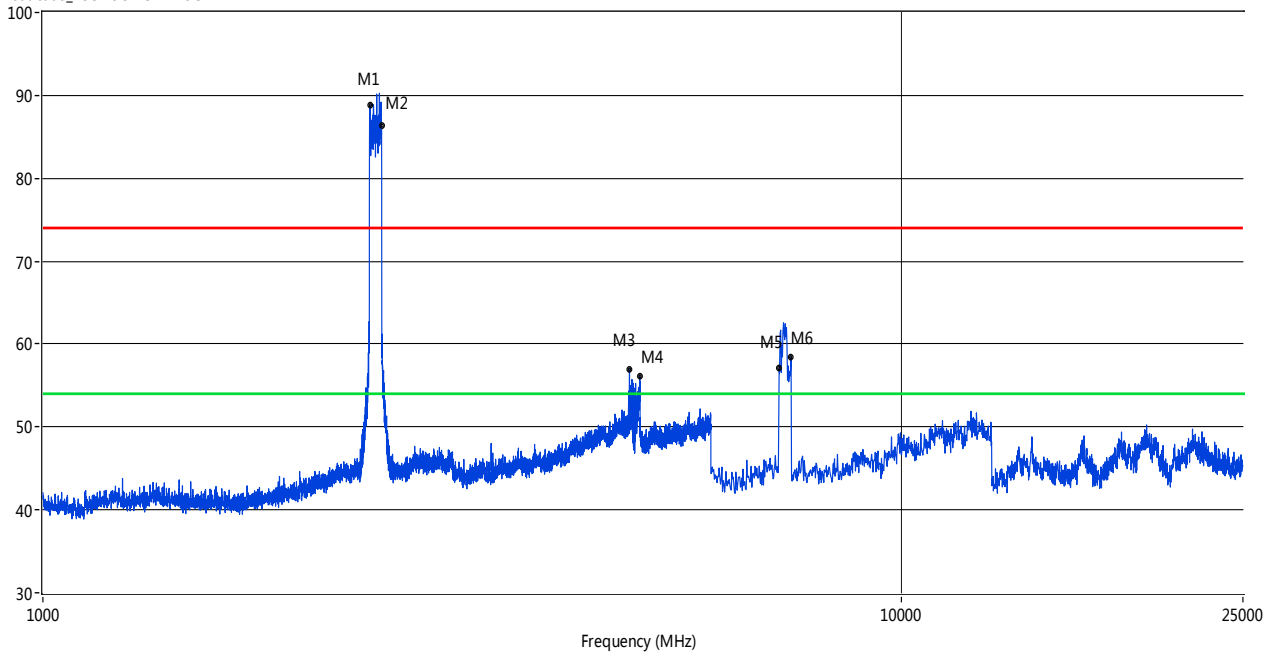

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2404.65	88.86	-0.31	74.0	-14.86	Peak	284.70	100	Vertical	N/A
2	2480.13	86.34	-0.60	74.0	-12.34	Peak	332.10	100	Vertical	N/A
3	4822.79	56.99	13.86	74.0	17.01	Peak	321.10	100	Vertical	PASS
3**	4822.79	38.22	13.86	54.0	15.78	Average	321.10	100	Vertical	PASS
4	4957.01	56.20	14.13	74.0	17.80	Peak	335.50	100	Vertical	PASS
4**	4957.01	37.43	14.13	54.0	16.57	Average	335.50	100	Vertical	PASS
5	7206.75	57.04	14.44	74.0	16.96	Peak	108.00	100	Vertical	PASS
5**	7206.75	38.27	14.44	54.0	15.73	Average	108.00	100	Vertical	PASS
6	7439.60	58.46	14.21	74.0	15.54	Peak	247.80	100	Vertical	PASS
6**	7439.60	39.69	14.21	54.0	14.31	Average	247.80	100	Vertical	PASS

Π/4-DQPSK MODE 1 GHz to 25 GHz, ANT H


RE Test case_FCC 15C 1GHz-25GHz

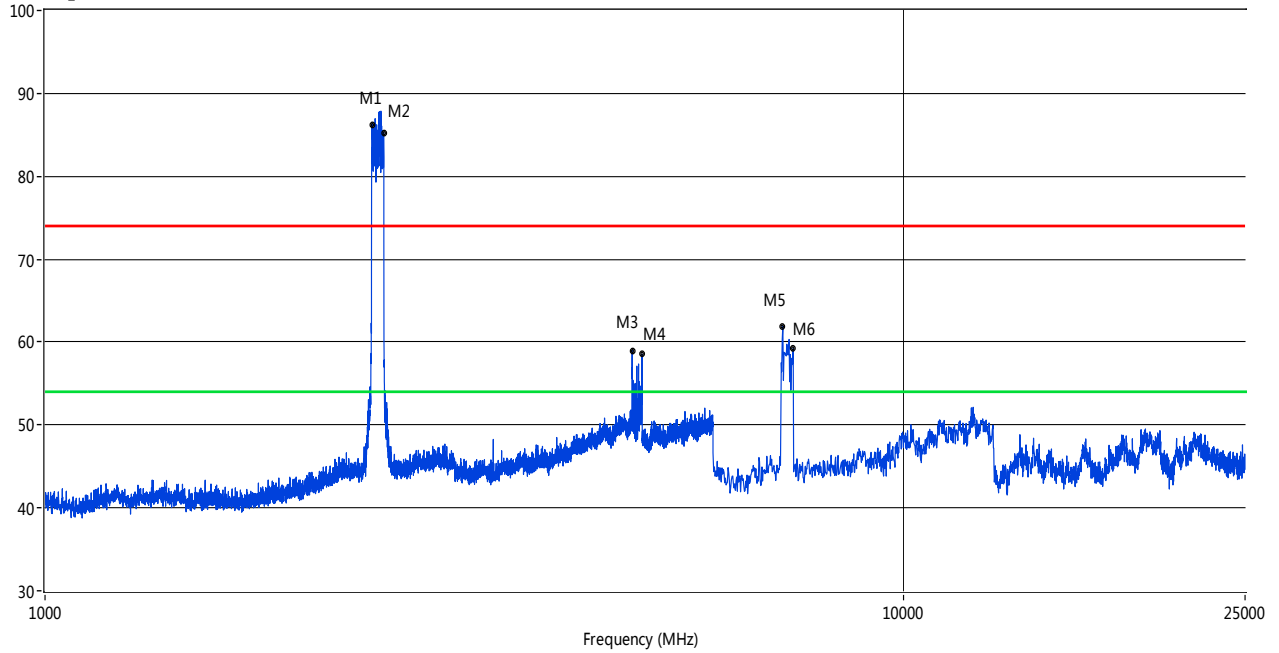

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2403.65	86.20	-0.25	74.0	-12.20	Peak	331.50	100	Horizontal	N/A
2	2480.13	85.28	-0.60	74.0	-11.28	Peak	353.30	100	Horizontal	N/A
3	4830.29	58.98	13.71	74.0	15.02	Peak	298.30	100	Horizontal	PASS
3**	4830.29	40.21	13.71	54.0	13.79	Average	298.30	100	Horizontal	PASS
4	4957.76	58.54	14.15	74.0	15.46	Peak	200.40	100	Horizontal	PASS
4**	4957.76	39.77	14.15	54.0	14.23	Average	200.40	100	Horizontal	PASS
5	7235.44	61.88	14.34	74.0	12.12	Peak	211.00	100	Horizontal	PASS
5**	7235.44	43.11	14.34	54.0	10.89	Average	211.00	100	Horizontal	PASS
6	7439.60	58.46	14.21	74.0	15.54	Peak	247.80	100	Horizontal	PASS
6**	7439.60	39.69	14.21	54.0	14.31	Average	247.80	100	Horizontal	PASS

8-DPSK MODE 1 GHz to 25 GHz, ANT V


RE Test case_FCC 15C 1GHz-25GHz

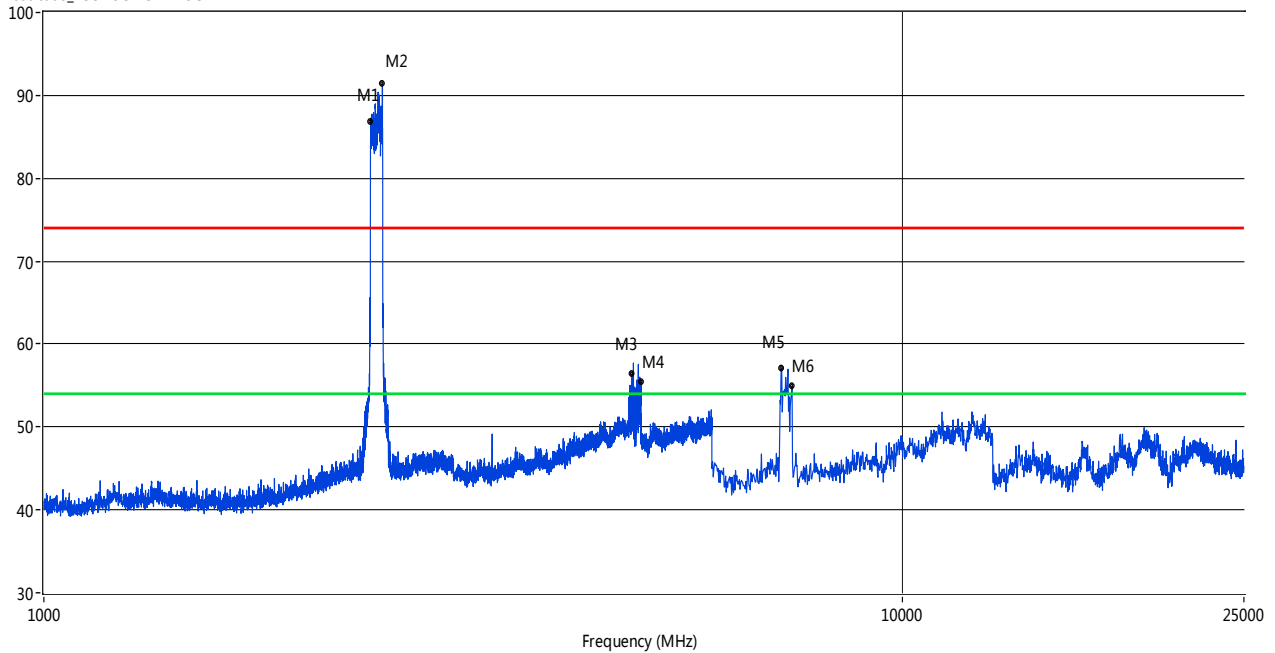

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2402.65	86.91	-0.26	74.0	-12.91	Peak	6.10	100	Vertical	N/A
2	2479.13	91.40	-0.58	74.0	-17.40	Peak	339.70	100	Vertical	N/A
3	4843.79	56.46	13.59	74.0	17.54	Peak	320.90	100	Vertical	PASS
3**	4843.79	37.69	13.59	54.0	16.31	Average	320.90	100	Vertical	PASS
4	4960.01	55.49	14.22	74.0	18.51	Peak	335.80	100	Vertical	PASS
4**	4960.01	36.72	14.22	54.0	17.28	Average	335.80	100	Vertical	PASS
5	7235.44	61.88	14.34	74.0	12.12	Peak	211.00	100	Vertical	PASS
5**	7235.44	43.11	14.34	54.0	10.89	Average	211.00	100	Vertical	PASS
6	7439.60	54.92	14.21	74.0	19.08	Peak	337.30	100	Vertical	PASS
6**	7439.60	36.15	14.21	54.0	17.85	Average	337.30	100	Vertical	PASS

8-DPSK MODE 1 GHz to 25 GHz, ANT H

RE Test case_FCC 15C 1GHz-25GHz

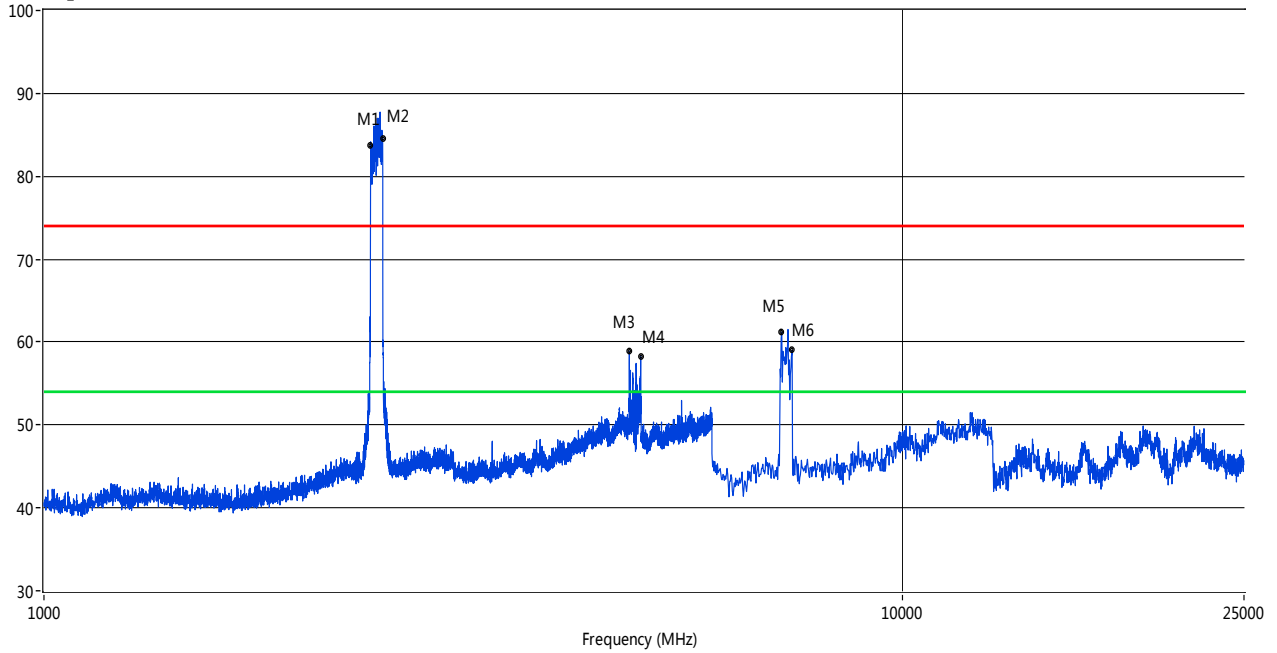

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2402.65	83.71	-0.26	74.0	-9.71	Peak	323.10	100	Horizontal	N/A
2	2480.13	84.61	-0.60	74.0	-10.61	Peak	339.40	100	Horizontal	N/A
3	4807.80	58.88	13.83	74.0	15.12	Peak	302.40	100	Horizontal	PASS
3**	4807.80	40.11	13.83	54.0	13.89	Average	302.40	100	Horizontal	PASS
4	4955.51	58.27	14.10	74.0	15.73	Peak	199.40	100	Horizontal	PASS
4**	4955.51	39.50	14.10	54.0	14.50	Average	199.40	100	Horizontal	PASS
5	7235.44	61.88	14.34	74.0	12.12	Peak	211.00	100	Horizontal	PASS
5**	7235.44	43.11	14.34	54.0	10.89	Average	211.00	100	Horizontal	PASS
6	7439.60	59.01	14.21	74.0	14.99	Peak	205.80	100	Horizontal	PASS
6**	7439.60	40.24	14.21	54.0	13.76	Average	205.80	100	Horizontal	PASS

A.9 Band Edge

Test Data

Note 1: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note 2: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have show the worst case.


Note 3: The average levels were calculated from the peak level corrected with duty cycle correction factor (21.21dB) derived from $20\log(\text{dwell time}/100 \text{ ms})$.

For example: Average level = 67.39 dBuV/m – 18.77 (dB) = 48.62 dBuV/m.

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
GFSK	Low	2390	67.39	74	6.61	PEAK	Pass
		2390	48.62	54	5.38	AVERAGE	Pass
GFSK	HIGH	2483.5	65.27	74	8.73	PEAK	Pass
		2483.5	46.50	54	7.50	AVERAGE	Pass
Π/4DQPSK	Low	2390	66.61	74	7.39	PEAK	Pass
		2390	47.84	54	6.16	AVERAGE	Pass
Π/4DQPSK	HIGH	2483.5	58.24	74	15.76	PEAK	Pass
		2483.5	39.47	54	14.53	AVERAGE	Pass
8-DPSK	Low	2390	66.52	74	7.48	PEAK	Pass
		2390	47.75	54	6.25	AVERAGE	Pass
8-DPSK	HIGH	2483.5	58.01	74	15.99	PEAK	Pass
		2483.5	39.24	54	14.76	AVERAGE	Pass
GFSK(Hopping)	Low	2390	56.06	74	17.94	PEAK	Pass
		2390	37.29	54	16.71	AVERAGE	Pass
GFSK(Hopping)	HIGH	2483.5	56.83	74	17.17	PEAK	Pass
		2483.5	38.06	54	15.94	AVERAGE	Pass
Π/4DQPSK (Hopping)	Low	2390	55.34	74	18.66	PEAK	Pass
		2390	36.57	54	17.43	AVERAGE	Pass
Π/4DQPSK (Hopping)	HIGH	2483.5	56.67	74	17.33	PEAK	Pass
		2483.5	37.90	54	16.10	AVERAGE	Pass
8-DPSK (Hopping)	Low	2390	55.32	74	18.68	PEAK	Pass
		2390	36.55	54	17.45	AVERAGE	Pass
8-DPSK (Hopping)	HIGH	2483.5	57.05	74	16.95	PEAK	Pass
		2483.5	38.28	54	15.72	AVERAGE	Pass


Test Plots

GFSK LOW CHANNEL , PEAK

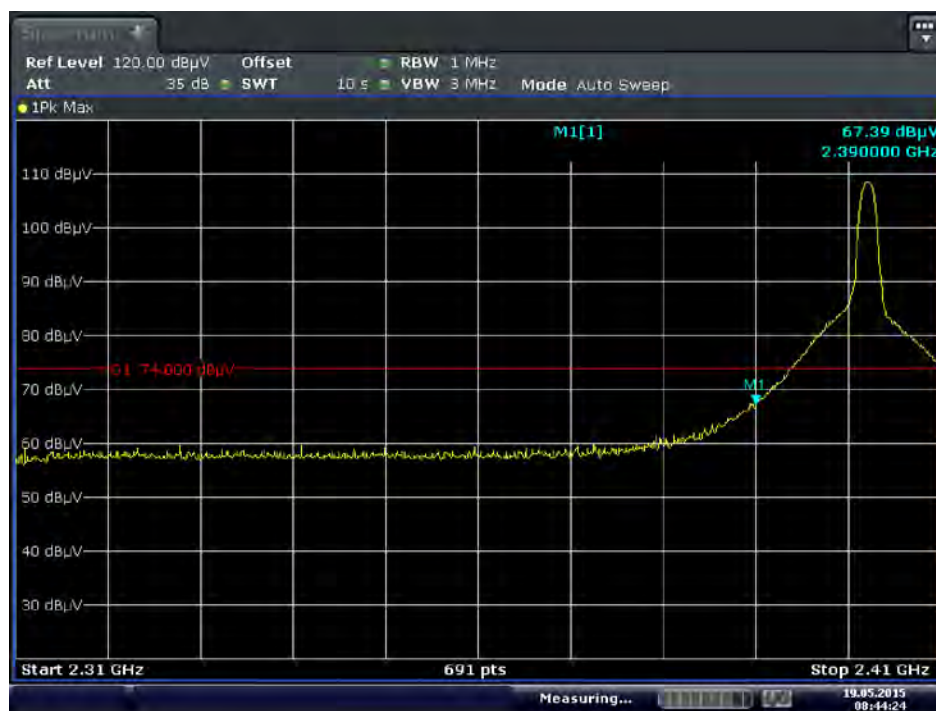


Date: 19.MAY.2015 08:44:23

GFSK HIGH CHANNEL , PEAK

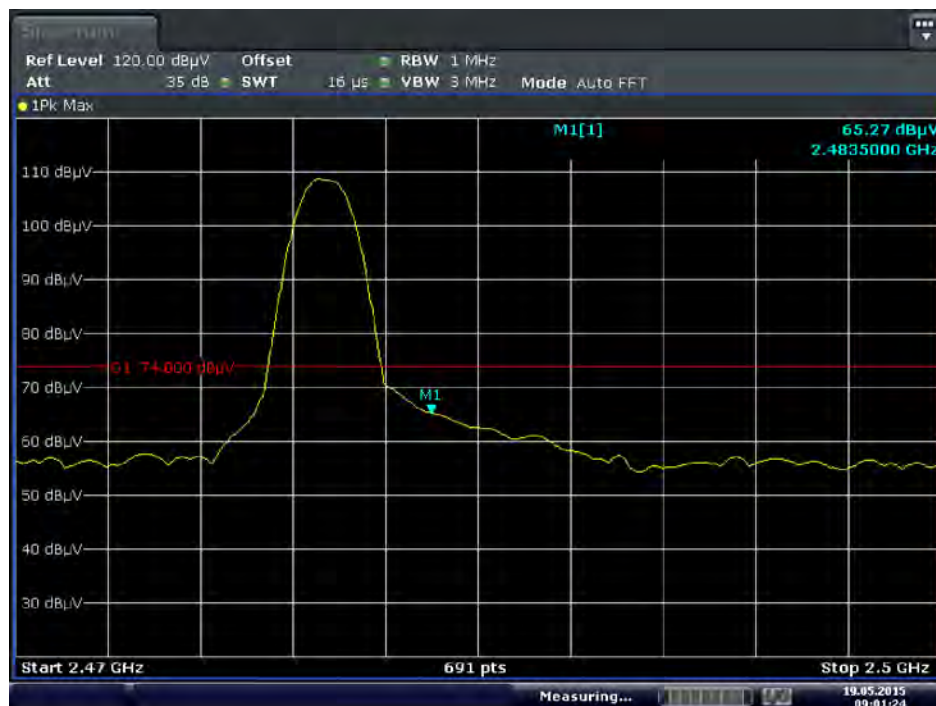


Date: 19.MAY.2015 09:01:24

$\pi/4$ -DQPSK LOW CHANNEL , PEAK

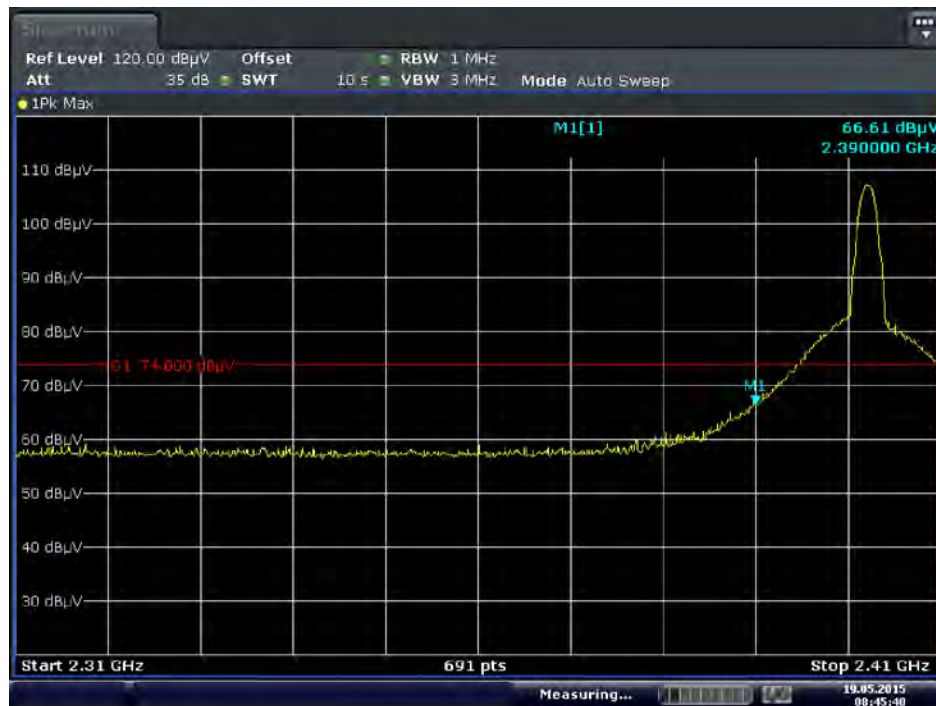


Date: 19.MAY.2015 08:45:40

$\pi/4$ -DQPSK HIGH CHANNEL , PEAK

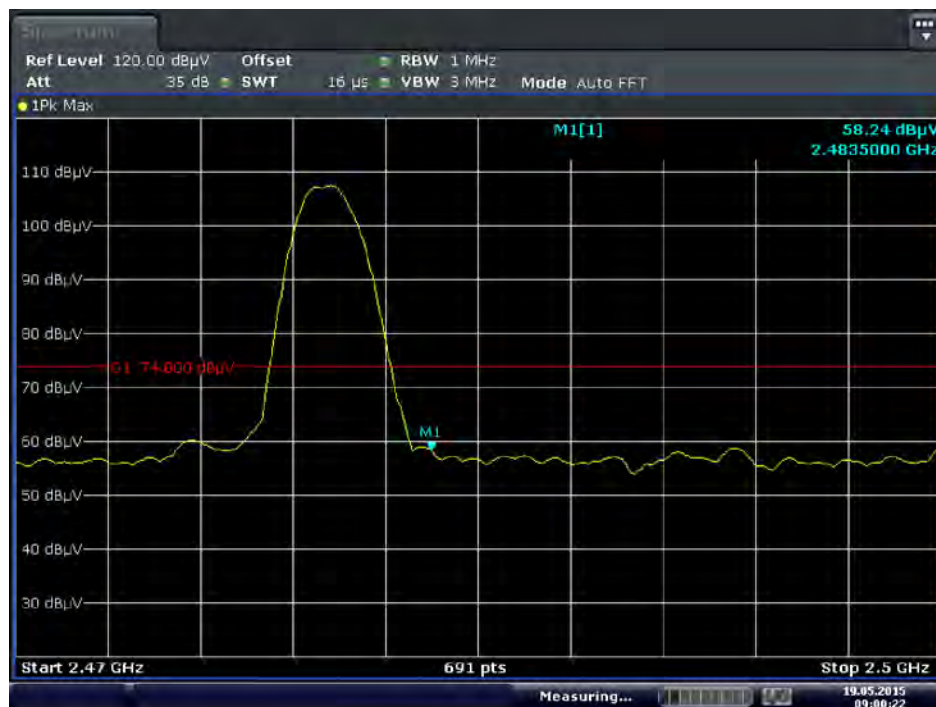


Date: 19.MAY.2015 09:00:22

8-DPSK LOW CHANNEL , PEAK

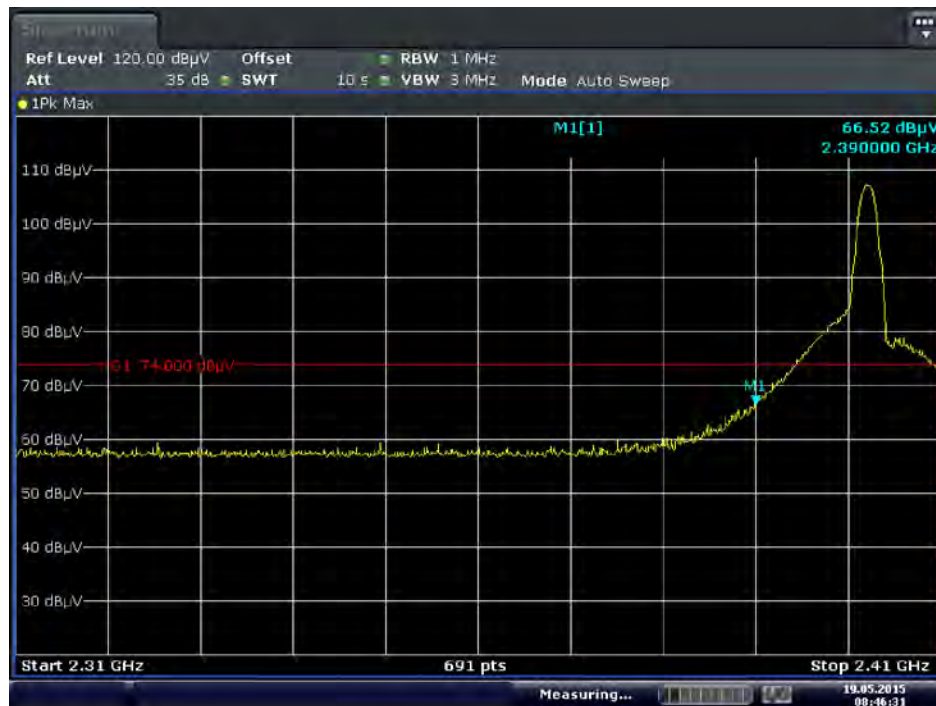

Date: 19.MAY.2015 08:46:31


8-DPSK HIGH CHANNEL , PEAK

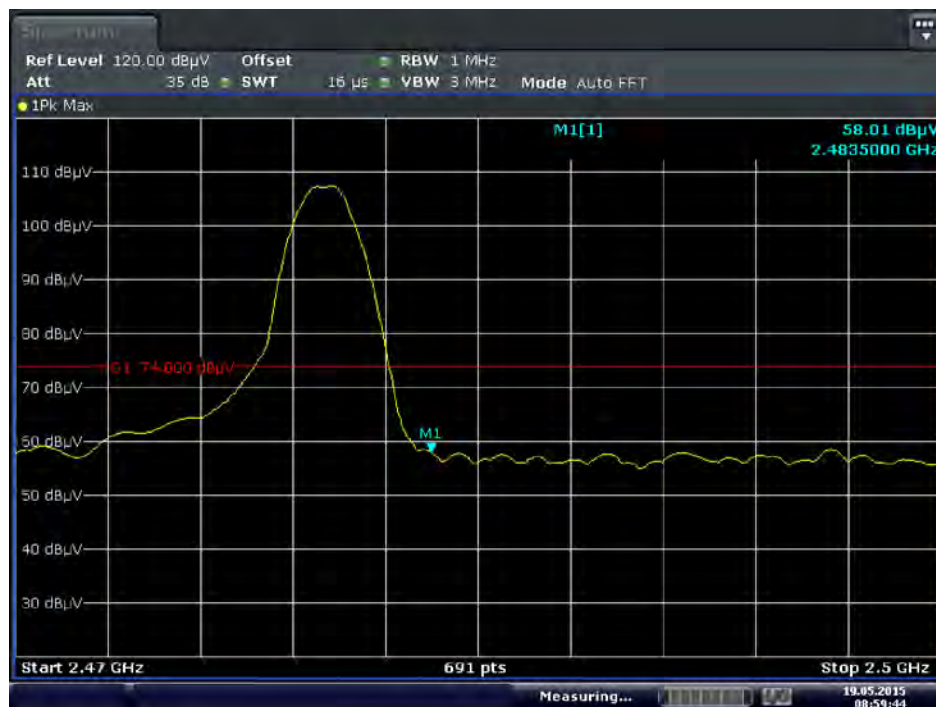

Date: 19.MAY.2015 08:59:44


Hopping Mode:

GFSK LOW FREQUENCY BAND, PEAK

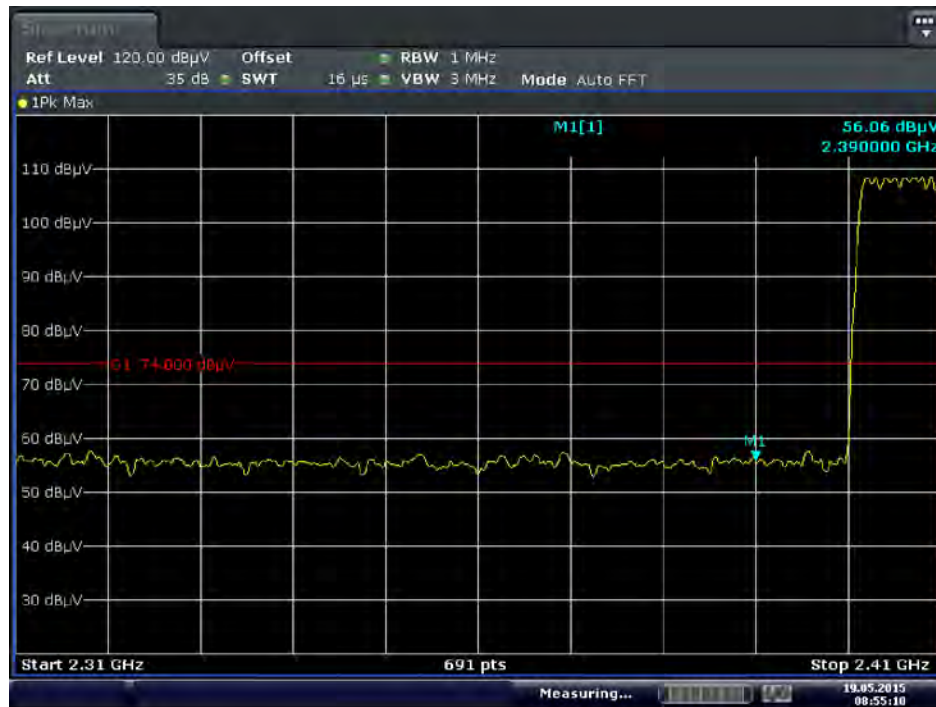


Date: 19.MAY.2015 08:55:10

GFSK HIGH FREQUENCY BAND, PEAK

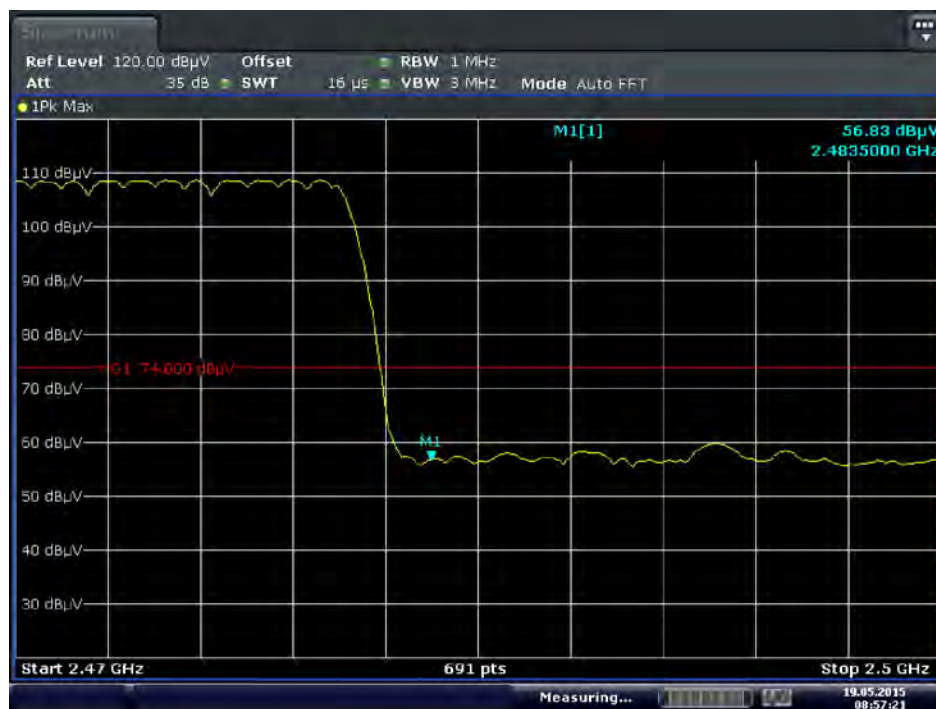


Date: 19.MAY.2015 08:57:21

$\pi/4$ -DQPSK LOW FREQUENCY BAND, PEAK

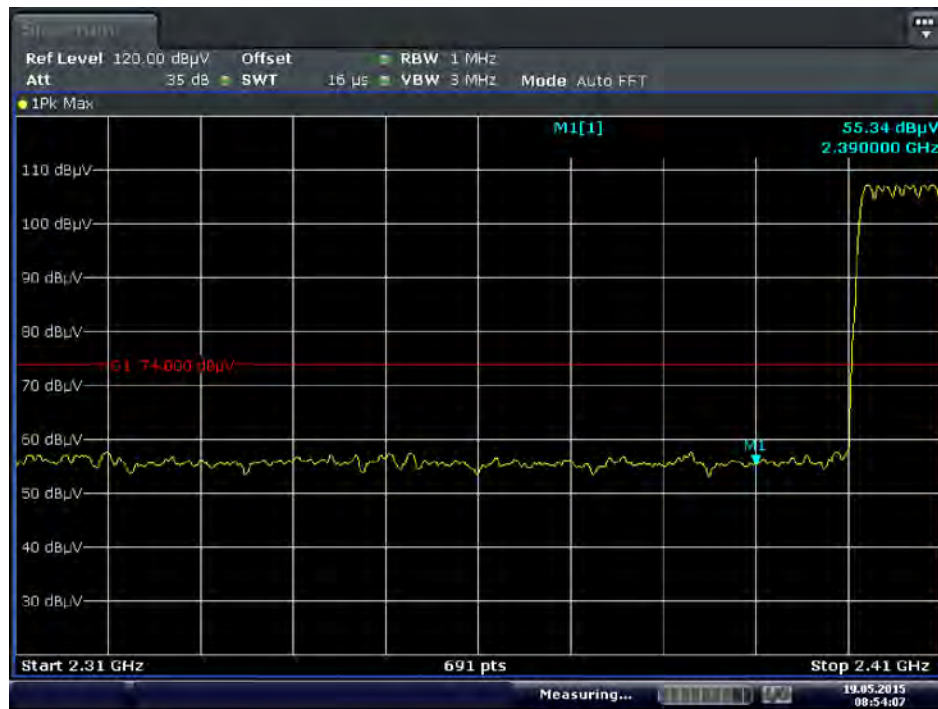


Date: 19.MAY.2015 08:54:07

$\pi/4$ -DQPSK HIGH FREQUENCY BAND, PEAK

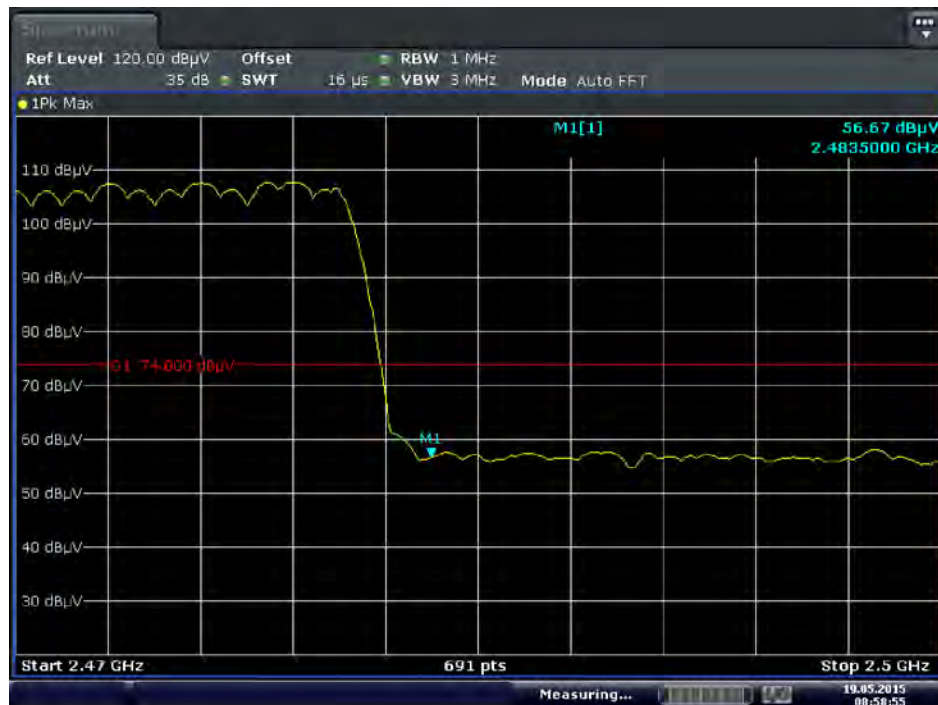


Date: 19.MAY.2015 08:58:55

8-DPSK LOW FREQUENCY BAND, PEAK

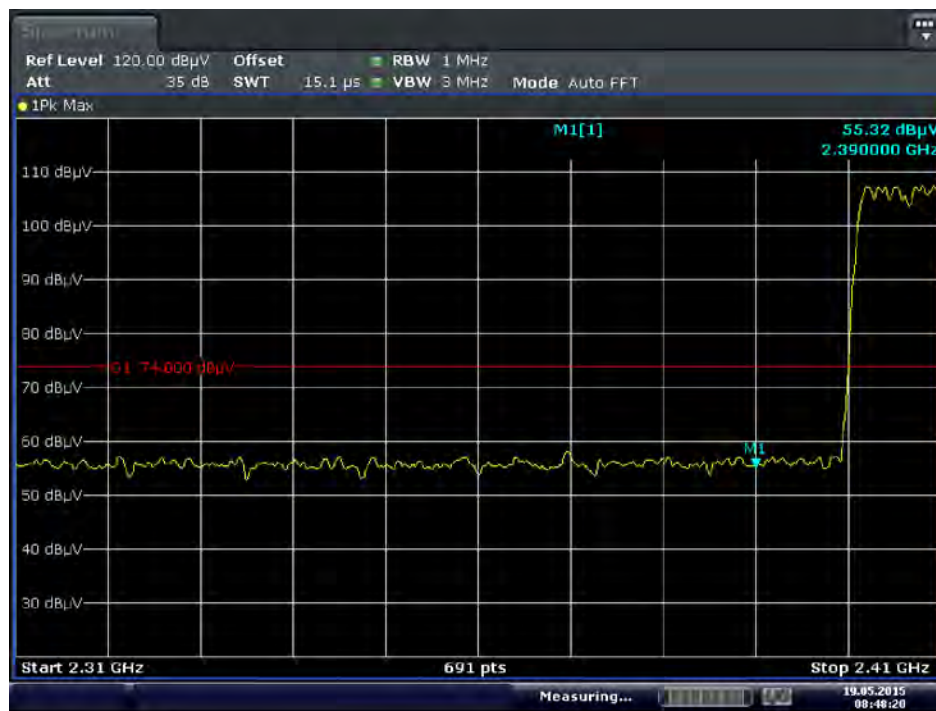

Date: 19.MAY.2015 08:48:20

8-DPSK HIGH FREQUENCY BAND, PEAK

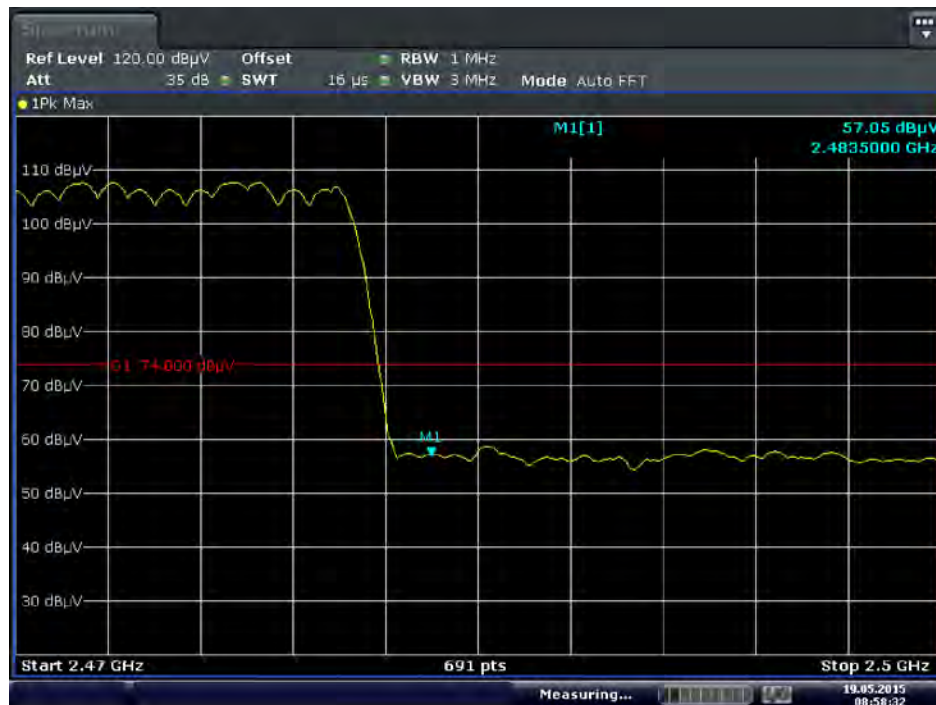

Date: 19.MAY.2015 08:58:32

--END OF REPORT--