

TEST REPORT FROM RFI GLOBAL SERVICES LTD

Test of: Modular Ubitag V2.0

To: FCC Part 15.249: 2008 Subpart C, RSS-210 Issue 7 June 2007
& RSS-Gen Issue 2 June 2007

Test Report Serial No:
RFI/RPT1/RP75860JD08A

This Test Report Is Issued Under The Authority Of Brian Watson, Operations Director:		pp 
Checked By:	R. Graham	
Signature:		
Date of Issue:	27 November 2009	

This report is issued in Adobe Acrobat portable document format (PDF). It is only a valid copy of the report if it is being viewed in PDF format with the following security options not allowed: Changing the document, Selecting text and graphics, Adding or changing notes and form fields.

This report may not be reproduced other than in full, except with the prior written approval of RFI Global Services Ltd. The results in this report apply only to the sample(s) tested.

RFI Global Services Ltd

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire RG23 8BG
Telephone: +44 (0)1256 312000 Facsimile: +44 (0)1256 312001
Email: info@rfi-global.com Website: www.rfi-global.com

Registered in England and Wales. Company number: 2117901

This page has been left intentionally blank.

Table of Contents

1. Customer Information	4
2. Summary of Testing	5
3. Equipment Under Test (EUT)	7
4. Operation and Monitoring of the EUT during Testing	9
5. Measurements, Examinations and Derived Results	10
6. Measurement Uncertainty	26
Appendix 1. Test Equipment Used	27

1. Customer Information

Company Name:	Ubisense Ltd.
Address:	St Andrew's House St Andrew's Road Chesterton, Cambridge Cambridgeshire CB4 1DL United Kingdom

2. Summary of Testing

2.1. General Information

Specification Reference:	47CFR15.249
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications) 2008: Part 15 Subpart C (Radio Frequency Devices) - Section 15.249
Specification Reference:	RSS-210 Issue 7 June 2007
Specification Title:	Low-power Licence-exempt Radio communication Devices (All Frequency Bands): Category I Equipment.
Specification Reference:	RSS-GEN Issue 2 June 2007
Specification Title:	General Requirements and Information for the Certification of Radio communication Equipment
Site Registration:	FCC: 209735; Industry Canada: 3245B-2
Location of Testing:	RFI Global Services Ltd, Wade Road, Basingstoke, Hampshire, RG24 8AH.
Test Dates:	14 September to 09 November 2009

2.2. Summary of Test Results

FCC Reference (47CFR)	IC Reference	Measurement	Port Type	Result
Part 15.107	RSS-Gen 7.2.2	Idle Mode AC Conducted Emissions	AC Mains	
Part 15.109	RSS-Gen 4.10 RSS-Gen 6.0	Receiver/Idle Mode Radiated Spurious Emissions	Antenna	
Part 15.207	RSS-Gen 7.2.2	Transmitter AC Conducted Emissions	AC Mains	
Part 15.249(a)	RSS-Gen 4.8 RSS-210 A2.9	Transmitter Fundamental Field Strength	Antenna	
Part 2.1049	RSS-Gen 4.6.1	Transmitter 20 dB Bandwidth	Antenna	
Part 15.249(a)(d)(e) & 15.209	RSS-Gen 4.9 RSS-210 A2.9	Transmitter Radiated Spurious Emissions	Antenna	
Part 15.249(d) & 15.209	RSS-Gen 4.9 RSS-210 A2.9	Transmitter Band Edge Radiated Emissions	Antenna	
Key to Results  = Complied  = Did not comply				

2.3. Methods and Procedures

Reference:	ANSI C63.4 (2003)
Title:	American National Standard Methods of Measurement of Electromagnetic Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

2.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

3. Equipment Under Test (EUT)

3.1. Identification of Equipment Under Test (EUT)

Brand Name:	Ubisense
Model Name or Number:	Modular Ubitag V2.0
Serial Number:	2
FCC ID Number:	SEAMOD21
Industry Canada Certification Number:	8673A-MOD21

3.2. Description of EUT

The equipment under test was a location tag.

3.3. Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

3.4. Additional Information Related to Testing

Tested Technology:	Short Range Device (SRD)	
Type of Radio Device:	Transceiver	
Power Supply Requirement(s):	Nominal	3.3 V DC
Modulation Type:	125 kbit/s MSK	
Channel Spacing:	Wideband	
Transmit Frequency Range:	2400 MHz to 2483.5 MHz	
Transmit Channels Tested:	Channel ID	Channel Frequency (MHz)
	Bottom	2402.5
	Middle	2442.0
	Top	2480.5
Receive Frequency Range:	2400 MHz to 2483.5 MHz	
Receive Channels Tested:	Channel ID	Channel Frequency (MHz)
	Bottom	2402.5
	Middle	2442.0
	Top	2480.5

3.5. Support Equipment

The following support equipment was used to exercise the EUT during testing:

Description:	Power Supply Unit
Brand Name:	Stontronics
Model Name or Number:	3A-061WP03
Serial Number:	T3915ST

4. Operation and Monitoring of the EUT during Testing

4.1. Operating Modes

The EUT was tested in the following operating mode(s):

- Constantly transmitting on the top, centre or bottom channel.

4.2. Configuration and Peripherals

The EUT was tested in the following configuration(s):

- Powered from an AC/DC power supply.
This power supply was connected to a 120 VAC 60 Hz source.

5. Measurements, Examinations and Derived Results

5.1. General Comments

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to *Section 6. Measurement Uncertainty* for details.

5.2. Test Results

5.2.1. Idle Mode AC Conducted Spurious Emissions

Test Summary:

FCC Part:	15.107
Test Method Used:	As detailed in ANSI C63.4 Section 7 and relevant annexes

Environmental Conditions:

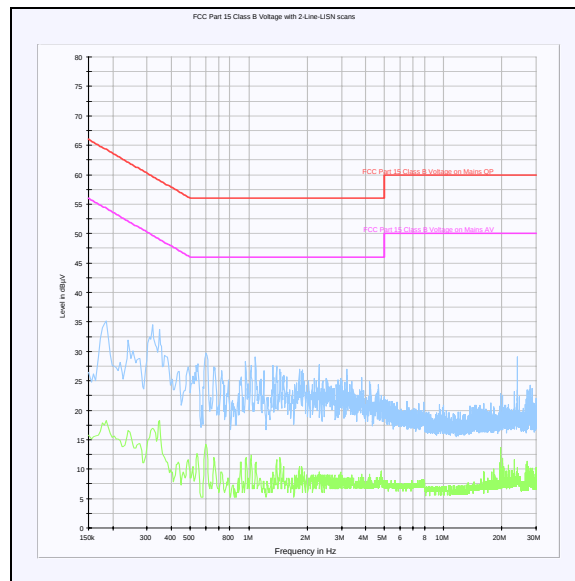
Temperature (°C):	27
Relative Humidity (%):	35

Results:

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
Refer to Note 1					

Note(s):

- All emissions were greater than 20 dB below the applicable limit.



Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.

5.2.2. Receiver/Idle Mode Radiated Spurious Emissions**Test Summary:**

FCC Part:	15.109
Test Method Used:	As detailed in ANSI C63.4 Section 8 and relevant annexes
Frequency Range:	30 MHz to 1000 MHz

Environmental Conditions:

Temperature Range (°C):	25
Relative Humidity Range (%):	32


Results:

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
Refer to Note 1					

Note(s):

1. All emissions were greater than 20 dB below the applicable limit.

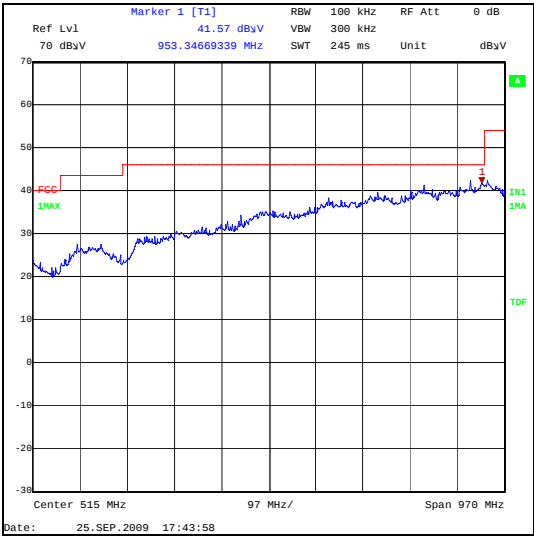Receiver/Idle Mode Radiated Spurious Emissions (continued)



Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.

Receiver/Idle Mode Radiated Spurious Emissions (continued)**Test Summary:**

FCC Part:	15.109
Test Method Used:	As detailed in ANSI C63.4 Section 8 and relevant annexes
Frequency Range:	1000 MHz to 26.5 GHz

Environmental Conditions:





Temperature Range (°C):	25
Relative Humidity Range (%):	31

Results:

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
Refer to Note 1					


Note(s):

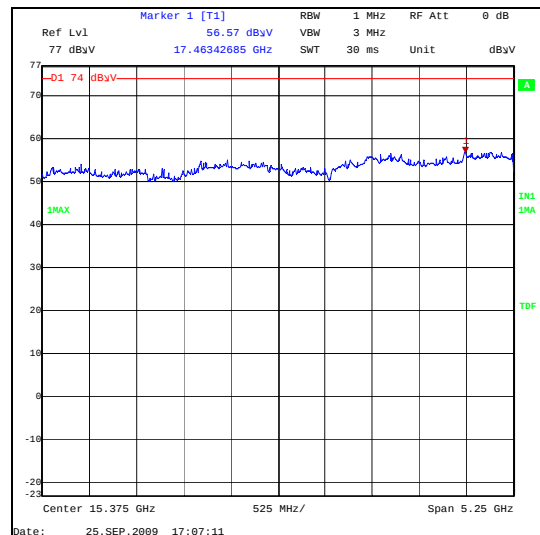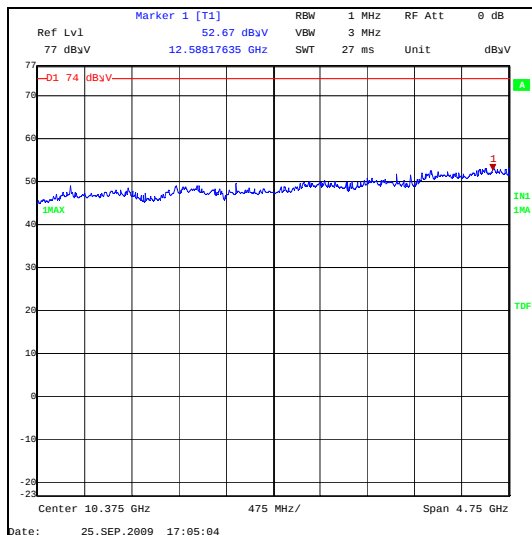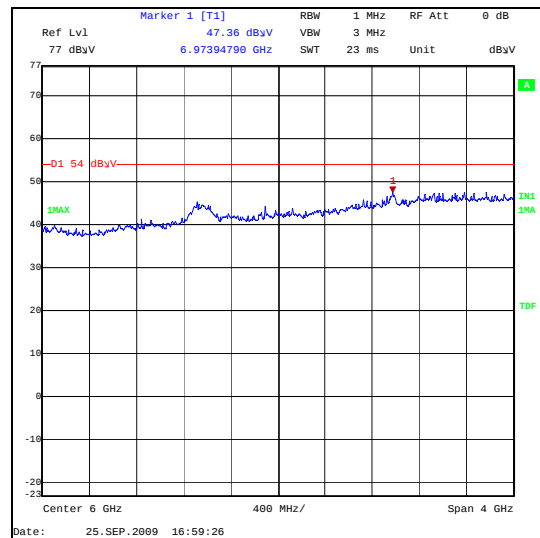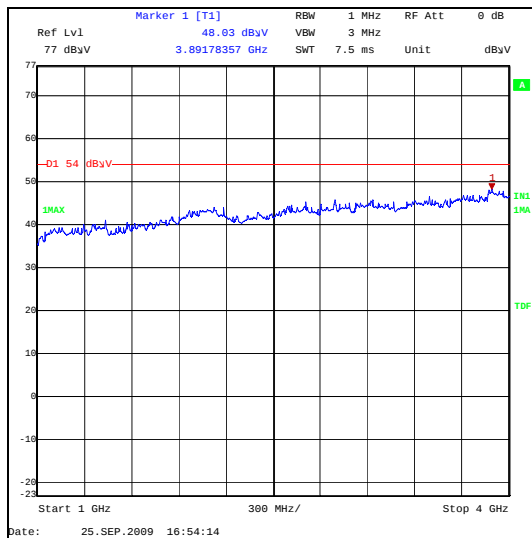1. All emissions were greater than 20 dB below the applicable limit.

Receiver/Idle Mode Radiated Spurious Emissions (continued)

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying table.

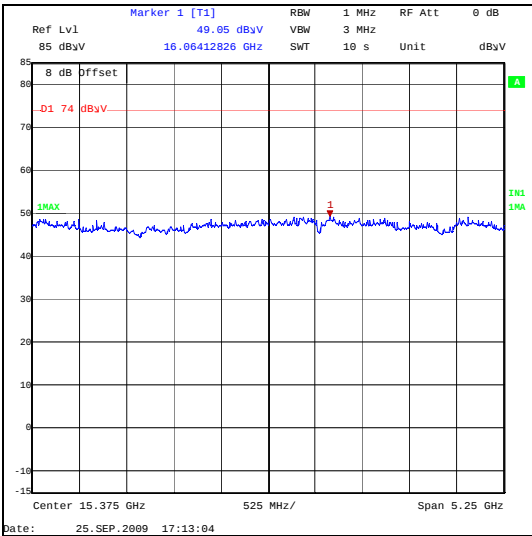Receiver/Idle Mode Radiated Spurious Emissions (continued)



Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.

5.2.3. Transmitter AC Conducted Spurious Emissions

Test Summary:

FCC Part:	15.207
Test Method Used:	As detailed in ANSI C63.4 Section 7 and relevant annexes

Environmental Conditions:


Temperature (°C):	27
Relative Humidity (%):	35

Results:

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
Refer to Note 1					

Note(s):

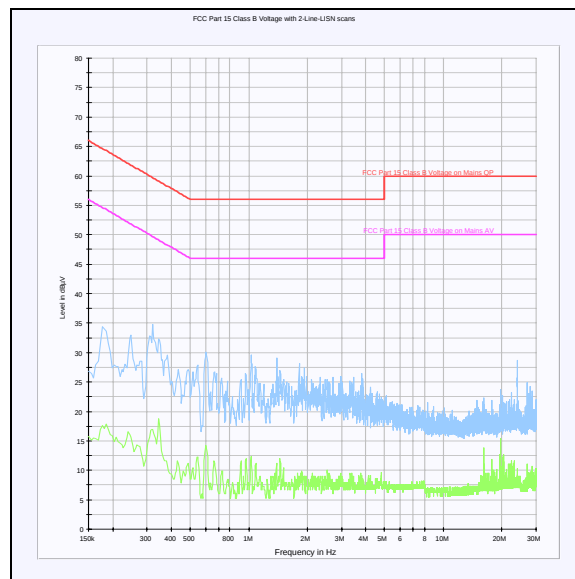1. All emissions were greater than 20 dB below the applicable limit.



Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.

5.2.4. Transmitter Fundamental Field Strength**Test Summary:**

FCC Part:	15.249(a)
Test Method Used:	As detailed in ANSI C63.4 Section 8 and relevant annexes

Environmental Conditions:

Temperature (°C):	25
Relative Humidity (%):	37

Results Bottom Channel: Peak

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2402.5	Horizontal	90.9	114.0	23.1	Complied

Results Bottom Channel: Average

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2402.5	Horizontal	90.1	94.0	3.9	Complied

Results Centre Channel: Peak

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2442.0	Horizontal	90.0	114.0	24.0	Complied

Results Centre Channel: Average

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2442.0	Vertical	89.5	94.0	4.5	Complied

Results Top Channel: Peak

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2480.5	Vertical	90.4	114.0	23.6	Complied

Results Top Channel: Average

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2480.5	Vertical	90.2	94.0	3.8	Complied

Note(s):

1. Measurements were made with the test system antenna in the vertical and horizontal polarisation. The highest levels were recorded in the above tables.

5.2.5. Transmitter 20 dB Bandwidth**Test Summary:**

FCC Part:	2.1049
Test Method Used:	As detailed in ANSI C63.4 Section 13.1.7 and relevant annexes (see note below)

Environmental Conditions:

Temperature (°C):	25
Relative Humidity (%):	37




Results:

Channel	20 dB Bandwidth (kHz)
Bottom	0.793587
Middle	0.750300
Top	0.804409

Note(s):

1. In lieu of the test method detailed in ANSI C63.4 Section 13.1.7 the 99% occupied bandwidth was measured using the Occupied Bandwidth function of the spectrum analyser

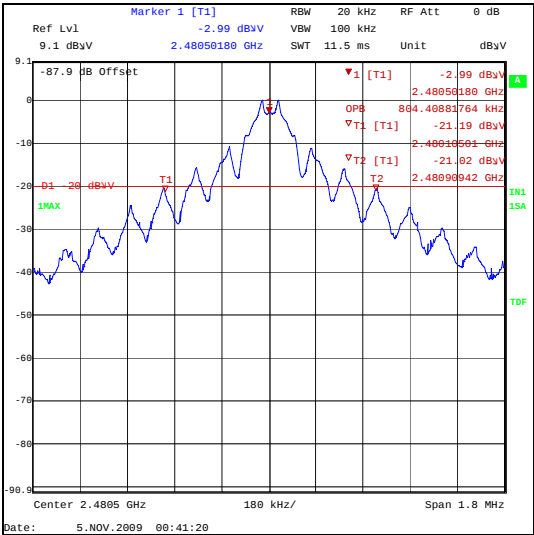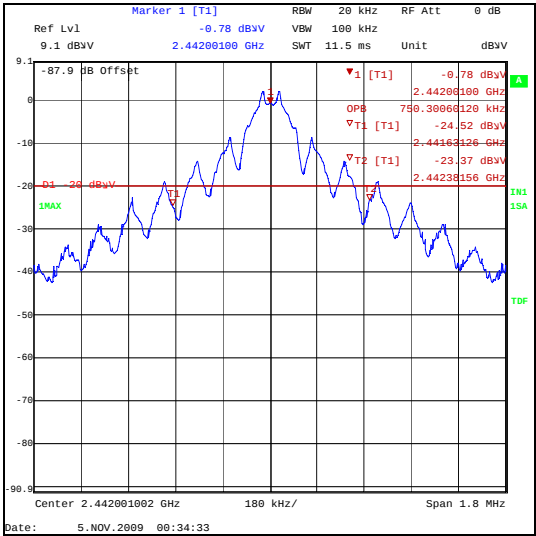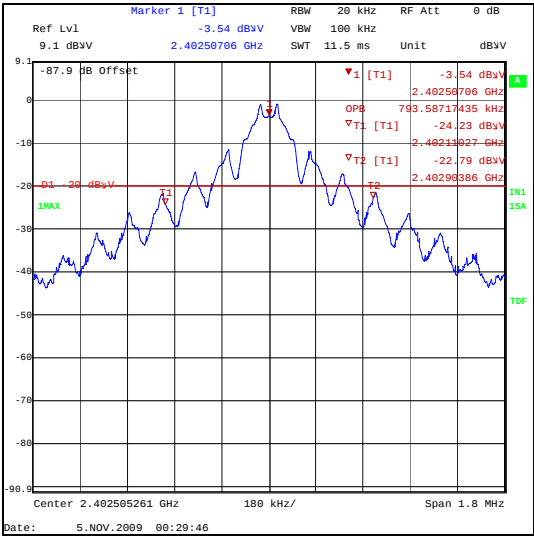Transmitter 20 dB Bandwidth (continued)



5.2.6. Transmitter Radiated Spurious Emissions**Test Summary:**

FCC Part:	15.249(a)(d)(e) & 15.209
Test Method Used:	As detailed in ANSI C63.4 Section 8 and relevant annexes
Frequency Range:	30 MHz to 26.5 GHz

Environmental Conditions:

Temperature (°C):	25
Relative Humidity (%):	32

Results Bottom Channel:

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
4804.490	Horizontal	33.6	54.0	20.4	Complied

Results Middle Channel:





Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
4884.050	Horizontal	36.5	54.0	17.5	Complied

Results Top Channel:





Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
4960.982	Horizontal	36.5	54.0	17.5	Complied

Note(s):

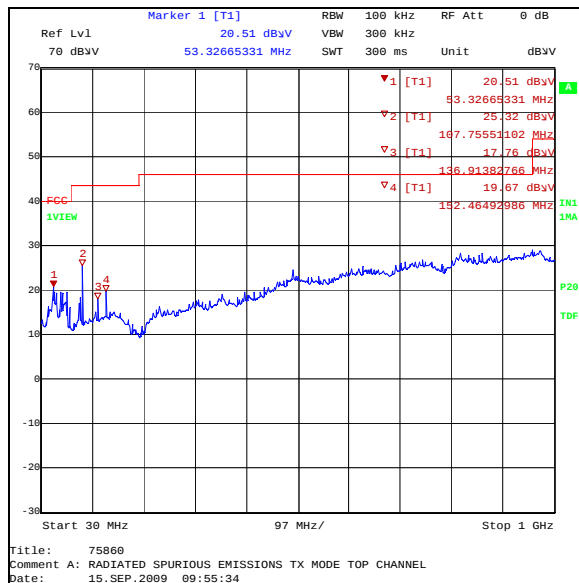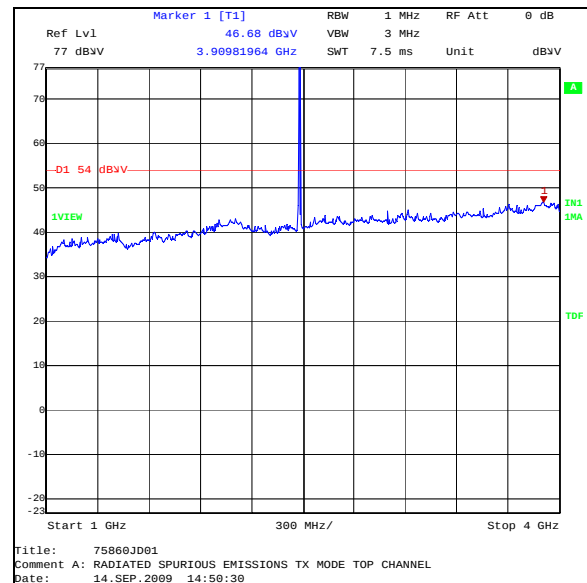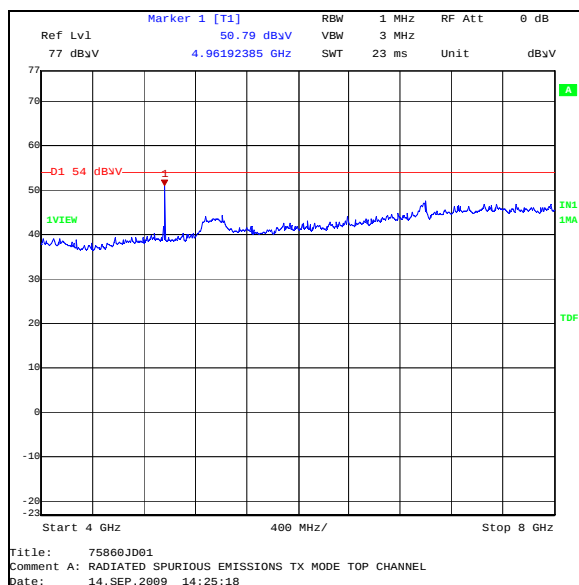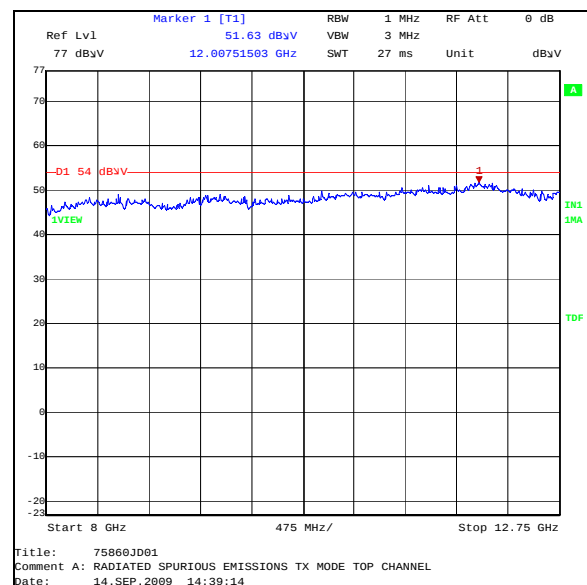1. Measurements were made with the test system antenna in the vertical and horizontal planes. The highest levels were recorded in the above tables.
2. Final measurements were made using appropriate filters and attenuators where required.

Transmitter Radiated Spurious Emissions (continued)**30 MHz to 1 GHz****1 GHz to 4 GHz****4 GHz to 8 GHz****8 GHz to 12.75 GHz**

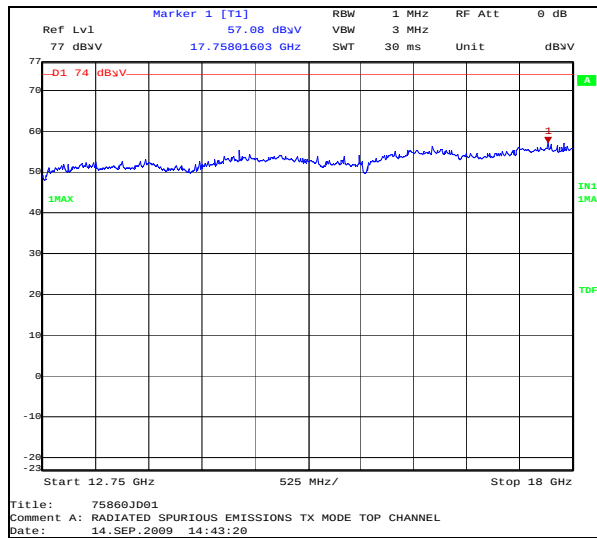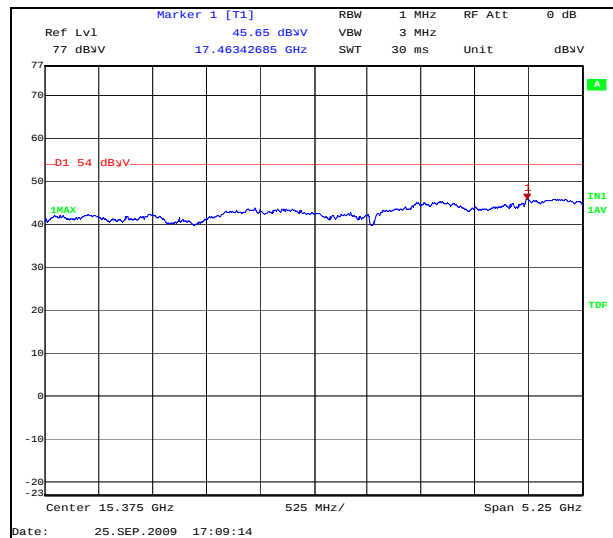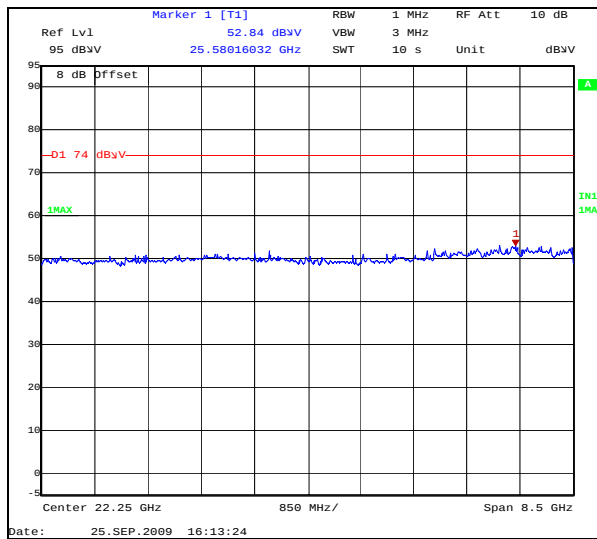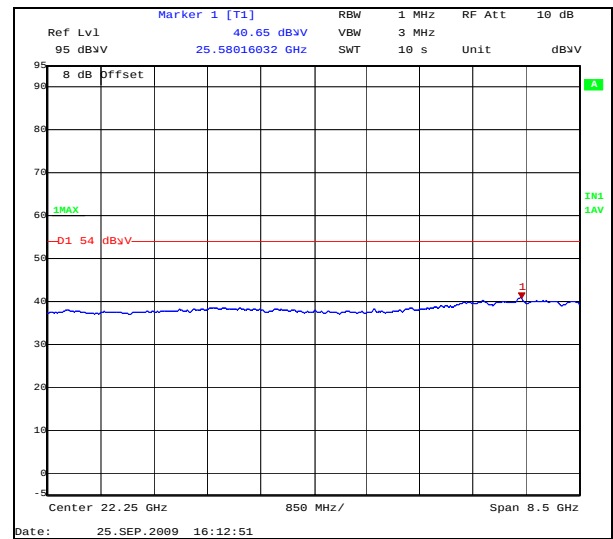Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Transmitter Radiated Spurious Emissions (continued)**12.75 GHz to 18 GHz Pk Measurement****12.75 GHz to 18 GHz Avg Measurement****18 GHz to 26.5 GHz Pk Measurement****18 GHz to 26.5 GHz Avg Measurement**

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

5.2.7. Transmitter Radiated Emissions at Band Edges**Test Summary:**

FCC Part:	15.249(d) & 15.209
Test Method Used:	As detailed in ANSI C63.4 Section 8 and relevant annexes

Environmental Conditions:

Temperature (°C):	24
Relative Humidity (%):	33

Results: Bottom Band Edge - Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2400	59.3	74.0	14.7	Complied

Results: Bottom Band Edge - Average





Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2400	50.6	54.0	3.4	Complied

Results: Top Band Edge - Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	54.1	74.0	19.9	Complied

Results: Top Band Edge - Average

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	42.4	54.0	11.6	Complied

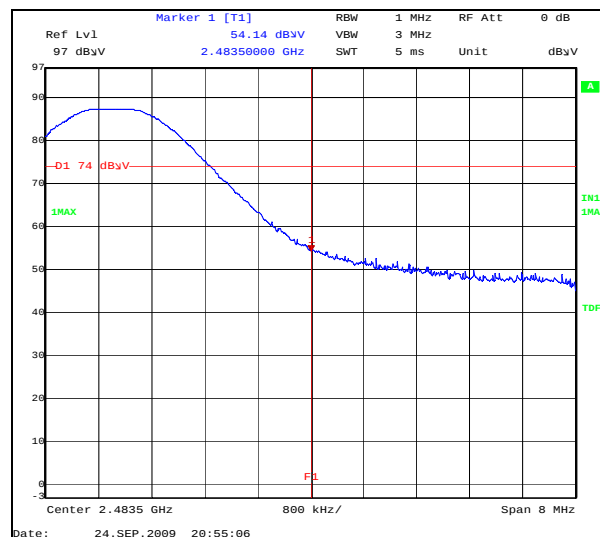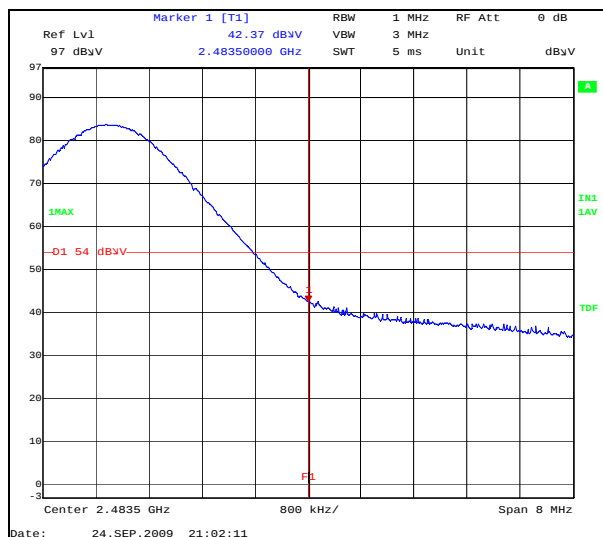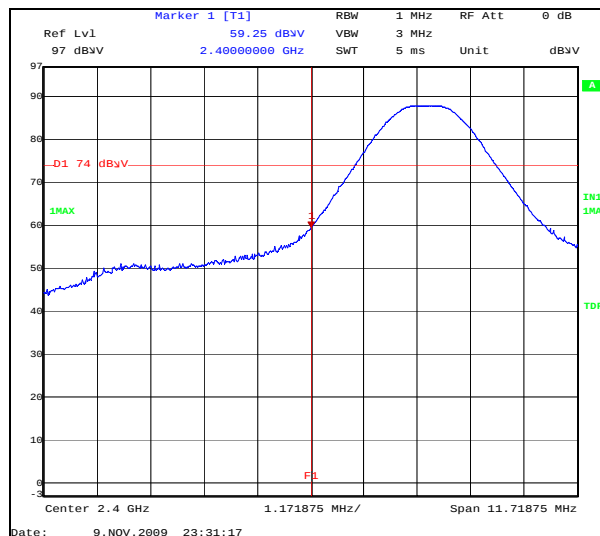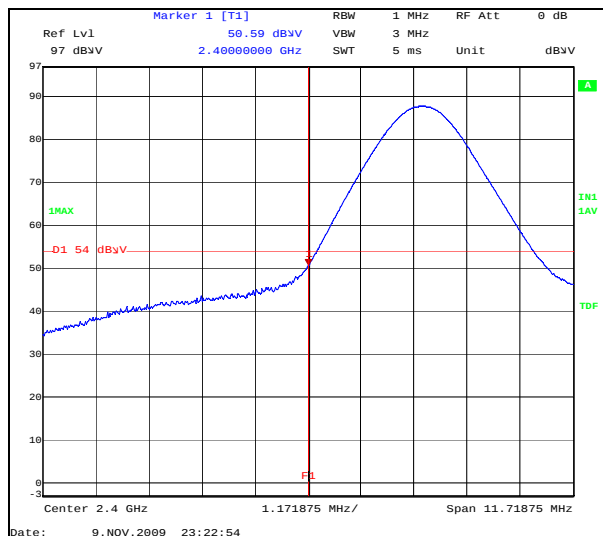Transmitter Radiated Emissions at Band Edges (continued)

6. Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document “approximately” is interpreted as meaning “effectively” or “for most practical purposes”.

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
AC Conducted Spurious Emissions	0.15 MHz to 30 MHz	95%	±3.72 dB
Fundamental Fieldstrength	Not Applicable	95%	±2.94 dB
Transmitter 20 dB Bandwidth	Not Applicable	95%	±0.92 ppm
Radiated Spurious Emissions	30 MHz to 40 GHz	95%	±2.94 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

Appendix 1. Test Equipment Used

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Last Calibrated	Cal. Interval (Months)
A1534	Pre Amplifier	Hewlett Packard	8449B OPT H02	3008A00405	Calibrated before use	-
A1818	Antenna	EMCO	3115	00075692	25 Oct 2008	12
A1830	Pulse Limiter	Rhode & Schwarz	ESH3-Z2	100668	05 Jan 2009	12
A1975	High Pass Filter	AtlanTecRF	AFH-03000	090424010	Calibrated before use	-
A288	Antenna	Chase	CBL6111A	1589	13 Mar 2009	12
A436	Antenna	Flann	20240-20	330	24 Apr 2009	36
A649	LISN	Rohde & Schwarz	ESH3-Z5	825562/008	19 Mar 2009	12
K0001	5m Semi-Anechoic Chamber	Rainford EMC	N/A	N/A	04 May 2009	12
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	01 Sep 2009	12
K0008	Site Reference 4422	RFI Global Services Ltd	N/A	N/A	26 Aug 2009	12
M1124	Test Receiver	Rohde & Schwarz	ESIB26	100046K	09 Mar 2009	12
M1263	Test Receiver	Rohde & Schwarz	ESIB7	100265	22 Apr 2009	12
M1390	Harmonic Mixer	Farran Technology	WHMP 28	FTL1677B	Calibrated before use	-

NB In accordance with UKAS requirements all the measurement equipment is on a calibration schedule.