

FCC EVALUATION REPORT FOR CERIFICATION

KOREA Standard Technology

Test report No.: KST-FCC0602

Applicant's Name : Alltec Electronics Co., Ltd.
Applicant's Address : 301-1505, BucheonTechnopark 365-1, Samjung-Dong,
Ojeong-gu, Bucheon-City, Kyeonggi-Do, Seoul, Korea
Manufacturer's Name : Alltec Electronics Co., Ltd.
Manufacturer's Address : 301-1505, BucheonTechnopark 365-1, Samjung-Dong,
Ojeong-gu, Bucheon-City, Kyeonggi-Do, Seoul, Korea

EUT's:

FCC ID : SEEAVIT5
Product Name : MP3 Player
Model Number(s) : AVIT5
Product Options : N/A
Category : FCC Part 15 subpart B
Class B Computing Digital Device

Supplementary Information


The device bearing the brand name and FCC ID specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with measurement procedures specified in ANSI C63.4-2003.

I attest to the accuracy of data and all measurements reported herein were performed by or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Test Date : January 3, 2006

Issued Date : January 11, 2006

Tested by:

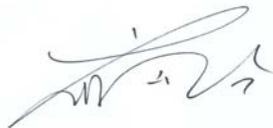

Choi, Jae-Rak

Approved by:



Lee, Weon-Woo



Contents

1. Description of Device
2. Test Facility
3. MAP
4. Test system configuration
5. Description of E.U.T.
6. Summary of test results.
7. Test results.
8. Photographs.

Appendix. Schematics

1. Description of Device

1) Kind of equipment:	MP3 Player
2) FCC ID:	SEEAVID5
3) Model Name:	AVIT5
4) Serial No.:	None
5) Type of Sample Tested:	Pre-production
6) High Frequency Used:	12.000 MHz
7) Adapter	None
8) Tested Power supply:	DC 1.5V AA Size Battery & 1phase AC120 V, 60 Hz by PC
9) Date of Manufacture:	December, 2006
10) Manufacture:	Alltec Electronics Co., Ltd.
11) Description of Operating:	Up & Download mode & mp3 played & Sound recording mode & FM tuner mode
12) Dates of Test:	January 3, 2006
13) Place of Tests:	KOSTEC CO., LTD. EMC site
14) Test Report No:	KST-FCC0602

2. Test Facility

The open field test site and conducted measurement facility are used for these testing, where are located following address and drawing. This site was fully described in a report dated November 14, 2002, that was submitted to the FCC.

KOSTEC CO., LTD (Korea Standard Technology)

Head office & Test Lab ;

:180-254, Annyung-Ri, Taeon-Yup, Hwasung-shi, Gyeonggi-do, Korea

Telephone Number : 82-31-222-4251

Facsimile Number: 82-31-222-4252

MIC(Ministry of Information and Communication) Number: **KR0041**


FCC Filing Number. : **525762**

VCCI Membership Number : **2005**


VCCI Registration Number : **R-1657 / C-1763**

3. Route Map of Measurement Facility

Korea

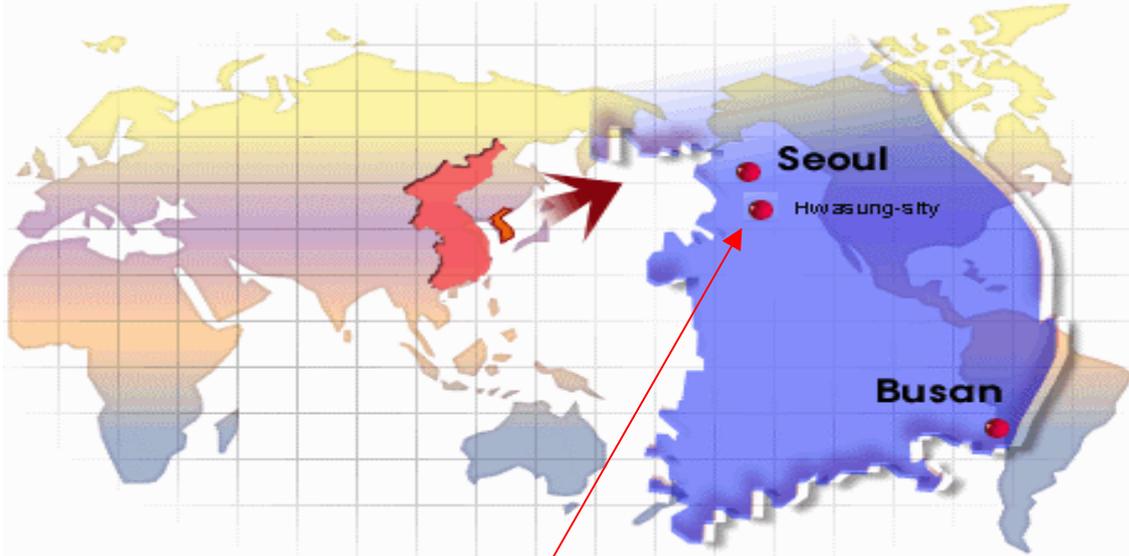

Hwasung-shi (open area test site)

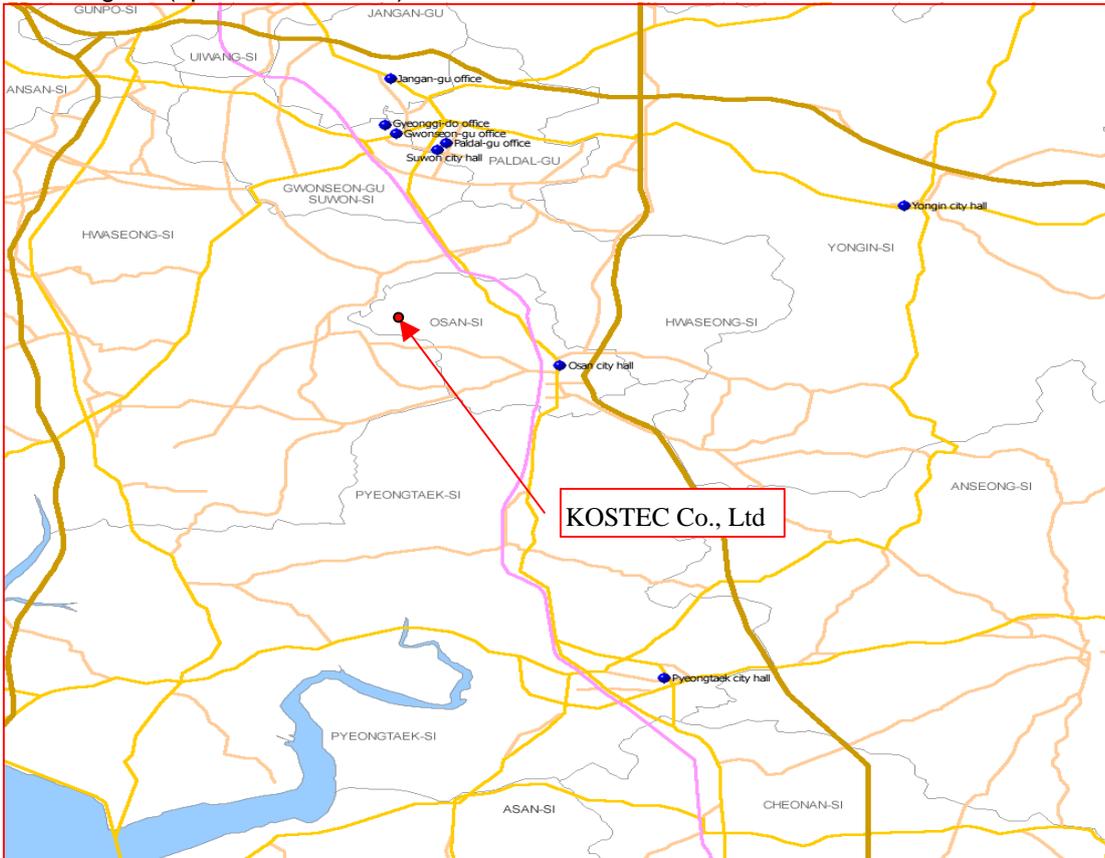

4. Test System Configuration

Operation Environment

Ambient	<u>Temperature</u> (°C)	<u>Humidity</u> (%)	<u>Pressure</u> (hPa)
10 m Open Area site	0	40	1018
Shielded room:	18	37	1018

Test site

These testing were performed following locations ;

Shielded room : Conducted Emission,

10 m Open Area Site: Radiated Emission

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC.

The factors contributing to uncertainties are test receiver, Cable loss, antenna factor calibration, Antenna directivity, antenna factor variation with height, antenna phase center variation, antenna frequency interpolation, measurement distance variation, site imperfection, mismatch, and system repeatability.

Based on NIS 80, 81, The measurement uncertainty level with a 95% confidence level were applied.

sample calculation

Conducted emission

The field strength is calculated by adding the LISN factor, cable loss from the measured reading.

The sample calculation is as follows:

$$\begin{aligned} FS &= MR + LF + CL \\ MR &= \text{Meter Reading} \\ LF &= \text{LISN Factor} \\ CL &= \text{Cable Loss} \end{aligned}$$

If MR is 30 dB, LISN Factor 1 dB, CL 1 dB

The result (MR) is

$$30 + 1 + 1 = 32 \text{ dBuV}$$

EMI TEST REPORT



Report reference No: KST-FCC0602

5. Description of E.U.T.

Product Description

Manufactured By:	Alltec Electronics Co., Ltd.
Address:	301-1505, BucheonTechnopark 365-1, Samjung-Dong, Ojeong-gu, Bucheon-City, Kyeonggi-Do, Seoul, Korea.
Model:	AVIT5
Serial Number:	None

Configuration of EUT

Description	Manufacturer	Model/Part #	Serial Number
Main controller	Alltec Electronics Co., Ltd.	None	None
LCD	None.	None.	None.
Battery	None	PR-041834	5K0901954
Ear phone	None	None	None

EUT Used cables

Cable Type	Shield	Length (m)	Ferrite	Connector	Connection Point 1	Connection Point 2
POWER	Yes	1.2	-	DC INLET	PC	Main power source
USB	Yes	1.5	Y	D-sub	EUT	PC
USB	Yes	1.5	Y	Jack	EUT	PC
Audio	Yes	1.2	Y	Jack	EUT	Earphone
PS/2	Y	1.2	Y	Din	PC	Keyboard
PS/2	Y	1.5	-	Din	PC	Mouse
Parallel	Y	1.5	Y	D-sub	PC	Printer

Operating conditions

The operating mode/system were as follows in details:

Operating: After connected from USB port of EUT to PC by USB cable. And then use to "Down & Upload" program for data transmission and continuously "Down & Upload" pattern displayed on the Monitor. And each played in mp3 file and continuously sound recording mode.



7. TEST RESULTS

7.1 Conducted emission

Measurement procedure

Mains

The measurements were performed in a shielded room. EUT was placed on a non-metallic table height of 0.4 m above the reference ground plane. They were folded back and forth forming a bundle 30 cm to 40 cm long and were hanged at a 40 cm height to the ground plane.

Each EUT power lead, except ground (safety) lead, were individually connected through a LISN to input power source.

Both lines of power cord, hot and neutral, were measured.

Used equipment

Equipment	Model no.	Serial no.	Makers	Next cal date	Used
Test receiver	ESPI3	100109	R&S	2006.3.15	●
L.I.S.N.	ESH2-Z5	100044	R&S	2006.4.23	●
	ESH3-Z5	100147	R&S	2006.8.12	●

Measurement uncertainty

Conducted Emission measurement : ± 2.4 (K=2)

Test data

< Class B >

FREQ. (MHz)	LEVEL (dB μV)		LINE Pol	Loss (dB)	LIMIT (dB μV)		MARGIN (dB)	
	QP	AV			QP	AV	QP	AV
0.150	37.44	28.77	L	0.29	66.00	56.00	28.85	27.52
0.426	37.78	35.52	L	0.29	57.33	47.33	19.84	12.10
0.710	35.17	34.17	L	0.43	56.00	46.00	21.26	12.26
1.210	34.85	33.87	L	0.44	56.00	46.00	21.59	12.57
12.298	36.80	34.93	N	1.52	60.00	50.00	24.72	16.59
13.934	40.99	39.01	N	1.61	60.00	50.00	20.62	12.60
24.002	45.05	43.20	L	2.20	60.00	50.00	17.15	9.00

* Level = test receiver reading value

* Loss = LISN insertion Loss + Cable Loss


EMI TEST REPORT



Report reference No: KST-FCC0602


Conducted emission test graph

Line. Live

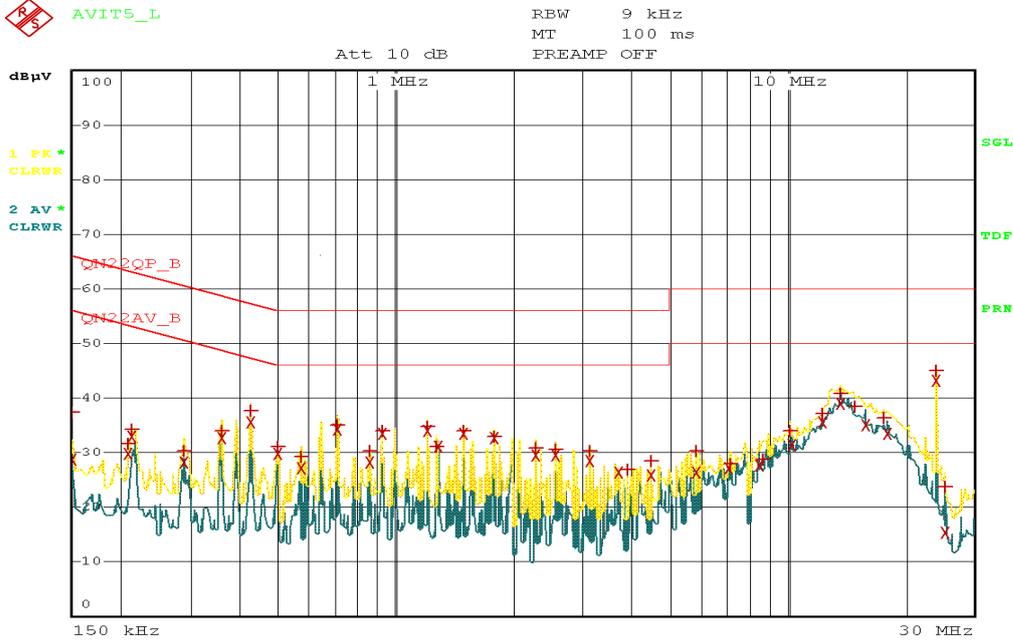

Date: 3.JAN.2006 18:11:00

Line. Neutral

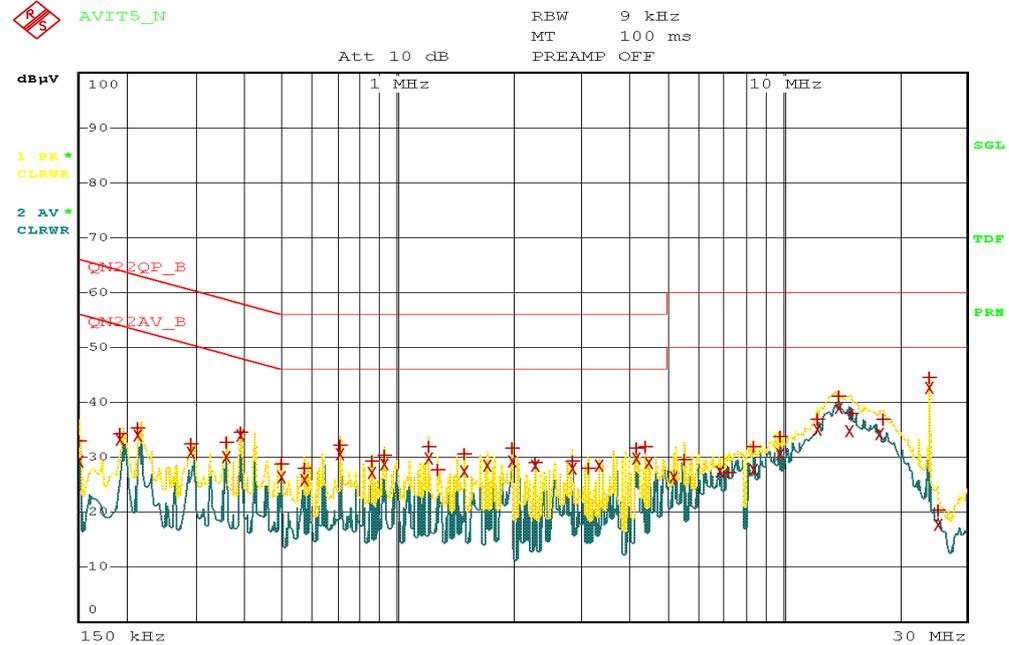

Date: 3.JAN.2006 18:04:40



EMI TEST REPORT



Report reference No: KST-FCC0602

7.2 Radiated Emission Measurement procedure

A pretest was performed at 3 m distances in a semi-anechoic chamber for searching correct frequency. The final test was done at a 10 m open area test site with a quasi-peak detector. EUT was placed on a non-metallic table height of 0.8 m above the reference ground plane. Cables connected to EUT were fixed to cause maximum emission. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

Used equipment

Equipment	Model no.	Serial no.	Makers	Next cal date
Test receiver	ESCS30	100111	R&S	2006.3.17
Ultra broadband antenna	HL562	100075	R&S	2006.3.16
Matching network	RAM	358.5414.02	R&S	-
Antenna Mast	AT14	none	Daeil EMC	-
Turn Table	TT15	none	Daeil EMC	-
10 m Open area site	none	none	KOSTEC Lab	-
chamber(3 m)	none	none	FRANCONIA	-

Measurement uncertainty

Radiated Emission measurement :
30-300 MHz +3.96 dB / -4.04 dB
300-1000 MHz +3.04 dB / -3.00 dB

Test data

< Class B >

Freq (MHz)	Reading (dBuV)	P (H/V)	H (m)	A (.)	Antenna (dB/m)	Cable Loss (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
36.00	12.37	V	1.20	180	16.15	2.18	30.70	40.0	9.30
72.00	24.24	V	1.20	180	7.00	3.06	34.30	40.0	5.70
120.00	15.80	H	2.40	90	9.60	3.70	29.10	43.5	14.40
144.30	16.40	H	2.30	90	7.76	4.14	28.30	43.5	15.20
264.00	7.30	H	2.00	270	9.88	6.12	23.30	46.0	22.70
359.99	9.49	V	1.70	180	12.57	7.14	29.20	46.0	16.80
468.06	11.22	H	2.00	270	14.96	7.82	34.00	46.0	12.00
516.07	8.58	H	1.90	180	15.94	8.08	32.60	46.0	13.40

Reading = Test receiver reading / P= antenna Polarization / H=antenna Height
A=turn table Angle / Antenna = antenna factor / Cable loss = used cable loss
Result = reading + antenna + loss / Margin = Limit - result

* Receiving Antenna Mode: Horizontal, Vertical / * Test site: 3m Open area site

