



**SGS-CSTC Standards Technical
Services (Shanghai) Co., Ltd.**

No. 588 West Jindu Road, Songjiang District, Shanghai, China

Telephone: +86 (0) 21 61915666

Fax: +86 (0) 21 61915678

ee.shanghai@sgs.com

Report No.: SHEM130400024403

Page 1 of 9

FCC MPE REPORT

Application No.:	SHEM1304000244RF
Applicant:	iSmart Alarm, Inc
Equipment Under Test (EUT):	
NOTE: The following sample(s) submitted was/were identified on behalf of the client as	
Product Name:	CUBEONE
Brand Name:	iSmart Alarm
Model:	IPU3
Added Model:	N/A
FCC ID:	SENIPU3
IC:	10970A-IPU3
Standards:	FCC Rules 47 CFR §2.1091 FCC OET Bulletin 65 supplement C
Date of Receipt:	Feb. 28, 2013
Date of Test:	Mar.01, 2013 to Mar.03, 2013
Date of Issue:	Mar. 12, 2013
Test Result :	PASS*

*In the configuration tested, the EUT detailed in this report complied with the standards specified above.



Mar. 2013

Tony Wu

E&E Section Manager

SGS-CSTC (Shanghai) Co., Ltd.

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



**SGS-CSTC Standards Technical
Services Co., Ltd.**


No. 588 West Jindu Road, Songjiang District, Shanghai, China

Telephone: +86 (0) 21 61915666
Fax: +86 (0) 21 61915655
ee.shanghai@sgs.com

Report No.: SHEM130400024403
Page 2 of 9

2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00	/	Mar. 12, 2013	/	Original

Authorized for issue by:				
Engineer		Zenger Zhang _____ Print Name		 _____
Clerk		Susie Liu _____ Print Name		 _____
Reviewer		Keny Xu _____ Print Name		 _____



3 Contents

	Page
1 COVER PAGE	1
2 VERSION.....	2
3 CONTENTS.....	3
4 GENERAL INFORMATION	4
4.1 CLIENT INFORMATION	4
4.2 GENERAL DESCRIPTION OF EUT (EQUIPMENT UNDER TEST)	4
4.3 TECHNICAL SPECIFICATIONS:	4
4.4 TEST LOCATION.....	5
4.5 TEST FACILITY	5
5 TEST STANDARDS AND LIMITS.....	6
6 SUMMARY OF RESULTS.....	7
7 MEASUREMENT AND CALCULATION	7
7.1 CONDUCTED OUTPUT POWER.....	7
7.2 MPE EVALUATION.....	8
8 EUT CONSTRUCTIONAL DETAILS	9



4 General Information

4.1 Client Information

Applicant:	iSmart Alarm, Inc
Address of Applicant:	723 N. Shoreline Blvd Mountain View, CA 94043
Manufacturer:	iSmart Alarm, Inc
Address of Manufacturer:	723 N. Shoreline Blvd Mountain View, CA 94043
Factory:	iSmart Alarm, Inc

4.2 General Description of EUT (Equipment Under Test)

Product Name	CUBEONE
Brand Name:	iSmart Alarm
Model No:	iPU3
Added Model:	N/A
Power Supply:	5.0V DC
Product Description:	Fixed production

4.3 Technical Specifications:

Operation Frequency:	802.11b/g/n(HT20):2412MHz~2462MHz
Modulation Technique:	☒ 802.11b: DSSS ☒ 802.11g: OFDM ☒ 802.11n(HT20): OFDM
Modulation Type:	☒ 802.11 b DSSS(CCK, DQPSK, DBPSK) ☒ 802.11g/n OFDM(64QAM, 16QAM, QPSK, BPSK)
Number of Channel:	802.11b/g/n11
Power Supply:	5.0V DC
Antenna Type	Integral
Antenna Gain	3.0dBi



4.4 Test Location

All tests were performed at SGS E&E EMC lab

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.
No.588 West Jindu Road, Songjiang District, Shanghai, China. 201612.
Tel: +86 21 6191 5666 Fax: +86 21 6191 5678

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L0599)**

CNAS has accredited SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing. Date of expiry: 2014-07-26.

- **FCC – Registration No.: 402683**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered and fully described in a report filed with the Federal Communications Commission (FCC). The acceptance letter from the FCC is maintained in our files. Registration No.: 402683, Expiry Date: 2015-02-22.

- **Industry Canada (IC) – IC Assigned Code: 8617A**

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 8617A. Expiry Date: 2014-09-20.

- **VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-3868 and C-4336 respectively. Date of Registration: 2012-05-29. Date of Expiry: 2015-05-28.

5 Test Standards and Limits

The Equipment under Test (EUT) has been tested at SGS's (own or subcontracted) laboratories.

The following table summarizes the specific reference documents such as harmonized standards or test specifications which were used for testing as SGS's (own or subcontracted) laboratories.

Identity	Document Title	Version
FCC OET Bulletin 65 supplement C	Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields	2001

In the configuration tested, the EUT complied with the standards specified above.

FCC LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

(B) Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f ²)*	30
30-300	27.5	0.073	0.2	30
300-1500	--	--	f/1500	30
1500-100,000	--	--	1.0	30

f = frequency in MHz *Plane-wave equivalent power density

6 Summary of Results

Frequency Band	Limit (mW/cm ²)	Result (mW/cm ²)	Verdict
2412-2462MHz	1.0	0.101	Pass

7 Measurement and Calculation


7.1 Conducted Output Power

Test Date: Mar. 12, 2013

The is from RF test Reprot SHEM130400024402 for Wi-Fi

EUT Operation: Test in fixing frequency operating mode at lowest, middle and highest frequency.

Test Configuration:

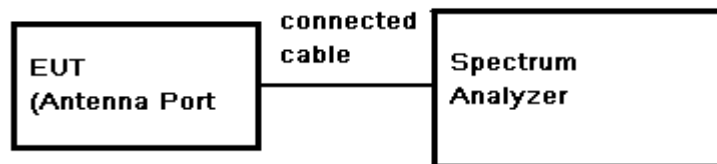

Test Results record:

For Antenna A of WiFi:

Test mode	Channel	Reading Peak Power (dBm)	Cable Loss (dB)	Output Peak Power (dBm)
802.11b	Low	21.93	1.5	23.43
	Mid	21.80	1.5	23.30
	High	22.55	1.5	24.05
802.11g	Low	21.25	1.5	22.75
	Mid	21.61	1.5	23.11
	High	22.44	1.5	23.94
802.11n HT20	Low	21.07	1.5	22.57
	Mid	21.48	1.5	22.98
	High	22.28	1.5	23.78



7.2 MPE Evaluation

Test Results: MPE Limit Calculation: the EUT's operating frequencies 2412MHz to 2464MHz; the highest power is High channel(2462MHz). The Measured maximum conducted power is 24.05 dBm(277.97mW).with maximum peak gain is 3.0dBi. Duty factor is 100%

Equation from page 18 of OET 65, Edition 97-01

$$S = PG * \text{Duty factor} / 4\pi R^2$$

P =Power Input to antenna (254.10mWatts)

G =Antenna Gain (2.00numeric)

R = distance to the center of radiation of antenna (in meter) = 20cm

$$S = (254.10 * 2.00 * 1) / (4\pi * 20^2) = 0.101 \text{ mW/cm}^2$$

$$\text{MPE limit} = 1.0 \text{ mW/cm}^2$$

Note:

$$1) P (\text{Watts}) = 10^{\frac{\text{dBm}}{10}} / 1000$$

$$2) G (\text{Antenna gain in numeric}) = 10^{\text{(Antenna gain in dBi / 10)}}$$



8 EUT Constructional Details

Refer to the < IPU3_External Photos > & < IPU3 _Internal Photos >.

THE END OF REPORT