

FCC CERTIFICATION
On Behalf of
HYGINEX

BEACON
Model No.: PIR-000-01

FCC ID: SEOHY-PIR001

Prepared for : HYGINEX
Address : 18 Shenkar St, First Floor, P. O. Box 12317, HERZLIYA, Israel
Prepared by : ACCURATE TECHNOLOGY CO. LTD
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd. Science
& Industry Park, Nanshan, Shenzhen, Guangdong P.R. China

Tel: (0755) 26503290
Fax: (0755) 26503396

Report Number : ATE20130952
Date of Test : May 13-22, 2013
Date of Report : May 23, 2013

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT).....	4
1.2. Description of Test Facility	4
1.3. Measurement Uncertainty	5
2. MEASURING DEVICE AND TEST EQUIPMENT	6
3. SUMMARY OF TEST RESULTS.....	7
4. FUNDAMENTAL AND HARMONICS RADIATED EMISSION FOR SECTION 15.249(A) 8	8
4.1. Block Diagram of Test Setup.....	8
4.2. The Emission Limit	9
4.3. Configuration of EUT on Measurement	9
4.4. Operating Condition of EUT	9
4.5. Test Procedure	10
4.6. The Field Strength of Radiation Emission Measurement Results	11
5. SPURIOUS RADIATED EMISSION FOR SECTION 15.249(D)	14
5.1. Block Diagram of Test Setup.....	14
5.2. The Emission Limit For Section 15.249(d)	14
5.3. EUT Configuration on Measurement	15
5.4. Operating Condition of EUT	15
5.5. Test Procedure	16
5.6. The Emission Measurement Result	17
6. BAND EDGES	20
6.1. The Requirement	20
6.2. EUT Configuration on Measurement	20
6.3. Operating Condition of EUT	20
6.4. Test Procedure	20
6.5. The Measurement Result	21
7. ANTENNA REQUIREMENT.....	23
7.1. The Requirement	23
7.2. Antenna Construction	23

APPENDIX I (TEST CURVES) (28 pages)

Test Report Certification

Applicant : HYGINEX
Manufacturer : Exploit Innovation Limited
EUT Description : BEACON
(A) MODEL NO.: PIR-000-01
(B) POWER SUPPLY: 6V DC ("AA" batteries 1.5V×4)

Measurement Procedure Used:


FCC Rules and Regulations Part 15 Subpart C Section 15.249
ANSI C63.4: 2009

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.249 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test : May 13-22, 2013

Prepared by :



(Engineer)

Approved & Authorized Signer :



(Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	:	BEACON
Model Number	:	PIR-000-01
Power Supply	:	6V DC (“AA” batteries 1.5V × 4)
Operate Frequency	:	2412.000-2480.000MHz
Applicant	:	HYGINEX
Address	:	18 Shenkar St, First Floor, P. O. Box 12317, HERZLIYA, Israel
Manufacturer	:	Exploit Innovation Limited
Address	:	RM2901, Wen Jin South Road, Zhong Shang Da Sha, Luo Hu, Shenzhen, China
Date of sample received	:	May 13, 2013
Date of Test	:	May 13-22, 2013

1.2. Description of Test Facility

EMC Lab	:	Accredited by TUV Rheinland Shenzhen
		Listed by FCC
		The Registration Number is 752051
		Listed by Industry Canada
		The Registration Number is 5077A-2
		Accredited by China National Accreditation Committee for Laboratories
		The Certificate Registration Number is L3193
Name of Firm	:	ACCURATE TECHNOLOGY CO. LTD
Site Location	:	F1, Bldg. A, Changyuan New Material Port, Keyuan Rd. Science & Industry Park, Nanshan, Shenzhen, Guangdong P.R. China

1.3.Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty = 3.08dB, k=2
(9kHz-30MHz)

Radiated emission expanded uncertainty = 4.42dB, k=2
(30MHz-1000MHz)

Radiated emission expanded uncertainty = 4.06dB, k=2
(Above 1GHz)

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated date	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 12, 2013	Jan. 11, 2014
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 12, 2013	Jan. 11, 2014
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 12, 2013	Jan. 11, 2014
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 12, 2013	Jan. 11, 2014
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Feb. 06, 2013	Feb. 05, 2014
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Feb. 06, 2013	Feb. 05, 2014
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Feb. 06, 2013	Feb. 05, 2014
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Feb. 06, 2013	Feb. 05, 2014
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 12, 2013	Jan. 11, 2014
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 12, 2013	Jan. 11, 2014

3. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
Section 15.207	Conducted Emission	N/A
Section 15.249(a)	Fundamental and Harmonics Radiated Emission	Compliant
Section 15.249(d)	Spurious Radiated Emission	Compliant
Section 15.249(d)	Band Edge	Compliant
Section 15.203	Antenna Requirement	Compliant

Remark: “N/A” means “Not applicable”.


4. FUNDAMENTAL AND HARMONICS RADIATED EMISSION FOR SECTION 15.249(A)

4.1. Block Diagram of Test Setup

4.1.1. Block diagram of connection between the EUT and simulators



4.1.2. Semi-Anechoic Chamber Test Setup Diagram

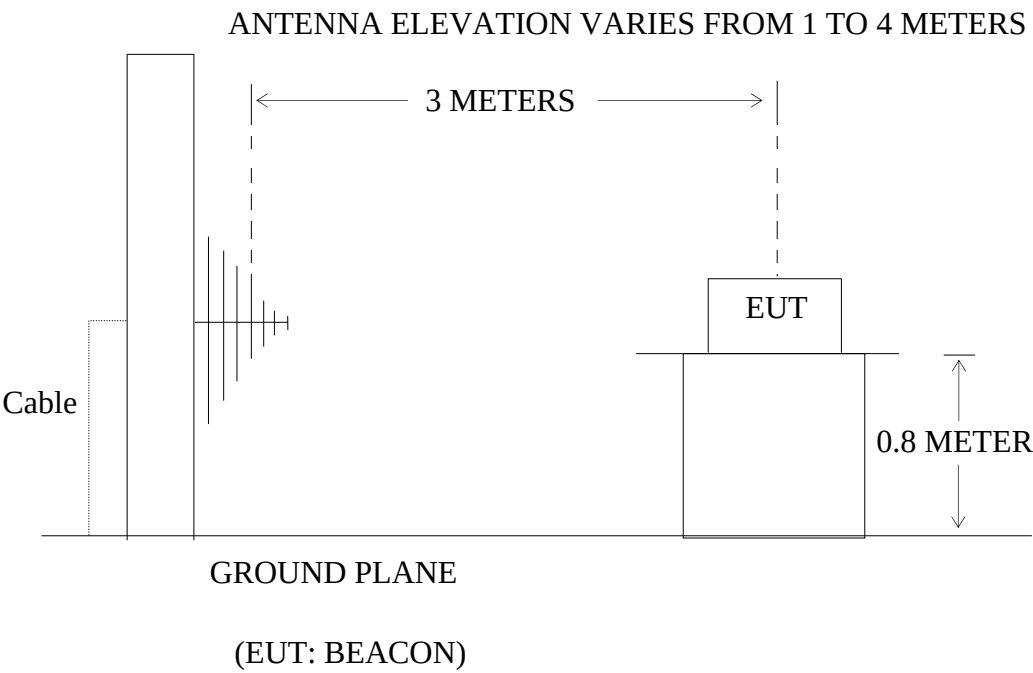

4.2.The Emission Limit

4.2.1.For intentional radiators, According to section 15.249(a), Operation within the frequency band of 2.4 to 2.4835GHz, The fundamental field strength shall not exceed 94 dBμV/m and the harmonics shall not exceed 54 dBμV/m.

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of harmonics (microvolts/meter)
902-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

4.2.2.According to section 15.249(e), as shown in section 15.35(b), the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

4.3.Configuration of EUT on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.3.1. BEACON (EUT)

Model Number : PIR-000-01
 Serial Number : N/A
 Manufacturer : Exploit Innovation Limited

4.4.Operating Condition of EUT

4.4.1.Setup the EUT and simulator as shown as Section 4.1.

4.4.2.Turn on the power of all equipment.

4.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412.000 - 2480.000 MHz MHz. We are select 2412.000MHz, 2446.000MHz, 2480.000MHz TX frequency to transmit.

4.5. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2009 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The bandwidth of test receiver is set at 120kHz in 30-1000MHz. and set at 1MHz in above 1000MHz.

The frequency range from 30MHz to 25000MHz is checked.

4.6.The Field Strength of Radiation Emission Measurement Results PASS.

Date of Test:	May 14, 2013	Temperature:	25°C
EUT:	BEACON	Humidity:	50%
Model No.:	PIR-000-01	Power Supply:	DC 6V
Test Mode:	TX 2412.000MHz	Test Engineer:	Pei

Fundamental Radiated Emissions

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2412.000	90.12	96.59	-7.43	82.69	89.16	94.00	114.00	-11.31	-24.84	Vertical
2412.000	82.31	88.35	-7.43	74.88	80.92	94.00	114.00	-19.12	-33.08	Horizontal

Harmonics Radiated Emissions

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
4824.000	50.28	55.78	-0.19	50.09	55.59	54.00	74.00	-3.91	-18.41	Vertical
4824.000	49.65	54.45	-0.19	49.46	54.26	54.00	74.00	-4.54	-19.74	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

$$\text{Where Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

3. The spectral diagrams in appendix I display the measurement of peak values.

Date of Test:	May 14, 2013	Temperature:	25°C
EUT:	BEACON	Humidity:	50%
Model No.:	PIR-000-01	Power Supply:	DC 6V
Test Mode:	TX 2446.000MHz	Test Engineer:	Pei

Fundamental Radiated Emissions

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2446.000	88.45	94.78	-7.34	81.11	87.44	94.00	114.00	-12.89	-26.56	Vertical
2446.000	76.84	83.68	-7.34	69.50	76.34	94.00	114.00	-24.50	-37.66	Horizontal

Harmonics Radiated Emissions

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
4892.000	51.79	56.29	0.20	51.99	56.49	54.00	74.00	-2.01	-17.51	Vertical
4892.000	47.43	52.93	0.20	47.63	53.13	54.00	74.00	-6.37	-20.87	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

$$\text{Where Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

3. The spectral diagrams in appendix I display the measurement of peak values.

Date of Test:	May 14, 2013	Temperature:	25°C
EUT:	BEACON	Humidity:	50%
Model No.:	PIR-000-01	Power Supply:	DC 6V
Test Mode:	TX 2480.000MHz	Test Engineer:	Pei

Fundamental Radiated Emissions

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2480.000	89.02	95.57	-7.37	81.65	88.20	94.00	114.00	-12.35	-25.80	Vertical
2480.000	74.65	80.76	-7.37	67.28	73.39	94.00	114.00	-26.72	-40.61	Horizontal

Harmonics Radiated Emissions

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
4960.000	49.06	54.67	0.52	49.58	55.19	54.00	74.00	-4.42	-18.81	Vertical
4960.000	46.78	51.69	0.52	47.30	52.21	54.00	74.00	-6.70	-21.79	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

$$\text{Where Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

3. The spectral diagrams in appendix I display the measurement of peak values.


5. SPURIOUS RADIATED EMISSION FOR SECTION 15.249(D)

5.1. Block Diagram of Test Setup

5.1.1. Block diagram of connection between the EUT and simulators



5.1.2. Semi-Anechoic Chamber Test Setup Diagram

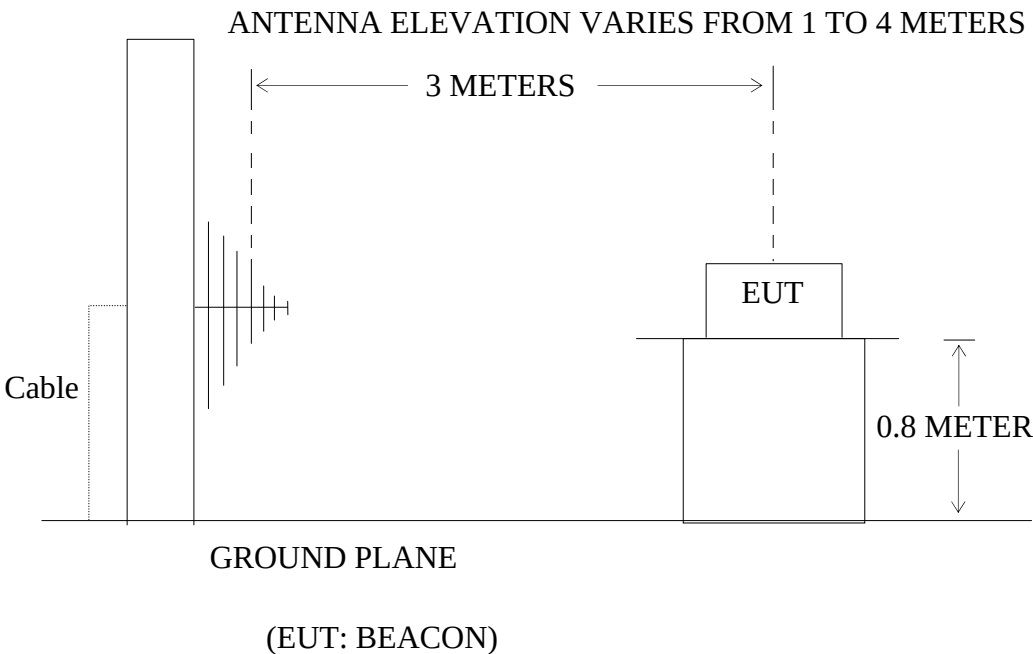

5.2. The Emission Limit For Section 15.249(d)

5.2.1. Emission radiated outside of the specified frequency bands, except for harmonics, shall be comply with the general radiated emission limits in Section 15.209.

Radiation Emission Measurement Limits According to Section 15.209

Frequency (MHz)	Limit		The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector.
	Field Strength (microvolts/meter)	Measurement Distance (meters)	
0.009 – 0.490	2400/F(kHz)	300	

0.490 – 1.705	24000/F(kHz)	30	Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.
1.705 – 30.0	30	30	
30 - 88	100	3	
88 - 216	150	3	
216 - 960	200	3	
Above 960	500	3	

5.3.EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.3.1. BEACON (EUT)

Model Number : PIR-000-01
Serial Number : N/A
Manufacturer : Exploit Innovation Limited

5.4.Operating Condition of EUT

5.4.1.Setup the EUT and simulator as shown as Section 5.1.

5.4.2.Turn on the power of all equipment.

5.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412.000 - 2480.000 MHz. We are select 2412.000MHz, 2446.000MHz, 2480.000MHz TX frequency to transmit.

5.5. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2009 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The bandwidth of test receiver is set at 9kHz in below 30MHz. and set at 120kHz in 30-1000MHz, and 1MHz in above 1000MHz.

The frequency range from 9kHz to 25GHz is checked.

The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

5.6.The Emission Measurement Result

PASS.

Date of Test:	May 14, 2013	Temperature:	25°C
EUT:	BEACON	Humidity:	50%
Model No.:	PIR-000-01	Power Supply:	DC 6V
Test Mode:	TX 2412.000MHz	Test Engineer:	Pei

Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

30MHz-25GHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	Vertical
-	-	-	-	-	-	
-	-	-	-	-	-	
-	-	-	-	-	-	Horizontal
-	-	-	-	-	-	
-	-	-	-	-	-	

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

$$\text{Where Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$
3. The spectral diagrams in appendix I display the measurement of peak values.

Date of Test:	May 14, 2013	Temperature:	25°C
EUT:	BEACON	Humidity:	50%
Model No.:	PIR-000-01	Power Supply:	DC 6V
Test Mode:	TX 2446.000MHz	Test Engineer:	Pei

Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

30MHz-25GH

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	Vertical
-	-	-	-	-	-	
-	-	-	-	-	-	
-	-	-	-	-	-	Horizontal
-	-	-	-	-	-	
-	-	-	-	-	-	

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

$$\text{Where Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

3. The spectral diagrams in appendix I display the measurement of peak values.

Date of Test:	May 14, 2013	Temperature:	25°C
EUT:	BEACON	Humidity:	50%
Model No.:	PIR-000-01	Power Supply:	DC 6V
Test Mode:	TX 2480.000MHz	Test Engineer:	Pei

Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

30MHz-25GH

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	Vertical
-	-	-	-	-	-	
-	-	-	-	-	-	
-	-	-	-	-	-	Horizontal
-	-	-	-	-	-	
-	-	-	-	-	-	

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

$$\text{Where Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

3. The spectral diagrams in appendix I display the measurement of peak values.

6. BAND EDGES

6.1.The Requirement

6.1.1.Band Edge from 2400MHz to 2483.5MHz. Emission radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

6.2.EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.2.1. BEACON (EUT)

Model Number	:	PIR-000-01
Serial Number	:	N/A
Manufacturer	:	Exploit Innovation Limited

6.3.Operating Condition of EUT

6.3.1.Setup the EUT and simulator as shown as Section 4.1.

6.3.2.Turn on the power of all equipment.

6.3.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412.000-2480.000MHz MHz. We are select 2412.000MHz, 2480.000MHz TX frequency to transmit.

6.4.Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
RBW=1MHz, VBW=1MHz

6.5.The Measurement Result

Pass.

Date of Test:	May 14, 2013	Temperature:	25°C
EUT:	BEACON	Humidity:	50%
Model No.:	PIR-000-01	Power Supply:	DC 6V
Test Mode:	TX 2412.000MHz	Test Engineer:	Pei

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2310.000	36.99	43.35	-7.81	29.18	35.54	54.00	74.00	-24.82	-38.46	Vertical
2483.598	46.22	53.67	-7.57	38.65	46.10	54.00	74.00	-15.35	-27.90	Vertical
2390.000	37.95	43.80	-7.53	30.42	36.27	54.00	74.00	-23.58	-37.73	Vertical
2310.000	37.00	44.48	-7.81	29.19	36.67	54.00	74.00	-24.81	-37.33	Horizontal
2356.516	37.56	45.61	-7.74	29.82	37.87	54.00	74.00	-24.18	-36.13	Horizontal
2390.000	36.47	43.66	-7.53	28.94	36.13	54.00	74.00	-25.06	-37.87	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain

3. The spectral diagrams in appendix I display the measurement of peak values.

Date of Test:	May 14, 2013	Temperature:	25°C
EUT:	BEACON	Humidity:	50%
Model No.:	PIR-000-01	Power Supply:	DC 6V
Test Mode:	TX 2480.000MHz	Test Engineer:	Pei

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2483.500	57.14	64.06	-7.37	49.77	56.69	54.00	74.00	-4.23	-17.31	Vertical
2500.000	36.98	42.61	-7.40	29.58	35.21	54.00	74.00	-11.27	-38.79	Vertical
2483.500	46.50	51.57	-7.37	39.13	44.20	54.00	74.00	-14.87	-29.80	Horizontal
2486.399	41.25	46.91	-7.39	33.86	39.52	54.00	74.00	-20.14	-34.48	Horizontal
2500.000	37.11	42.41	-7.40	29.71	35.01	54.00	74.00	-24.29	-38.99	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

$$\text{Where Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

3. The spectral diagrams in appendix I display the measurement of peak values.


7. ANTENNA REQUIREMENT

7.1.The Requirement

7.1.1.According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.2.Antenna Construction

Device is equipped with unique antenna, which isn't displaced by other antenna. Therefore, the equipment complies with the antenna requirement of Section 15.203.

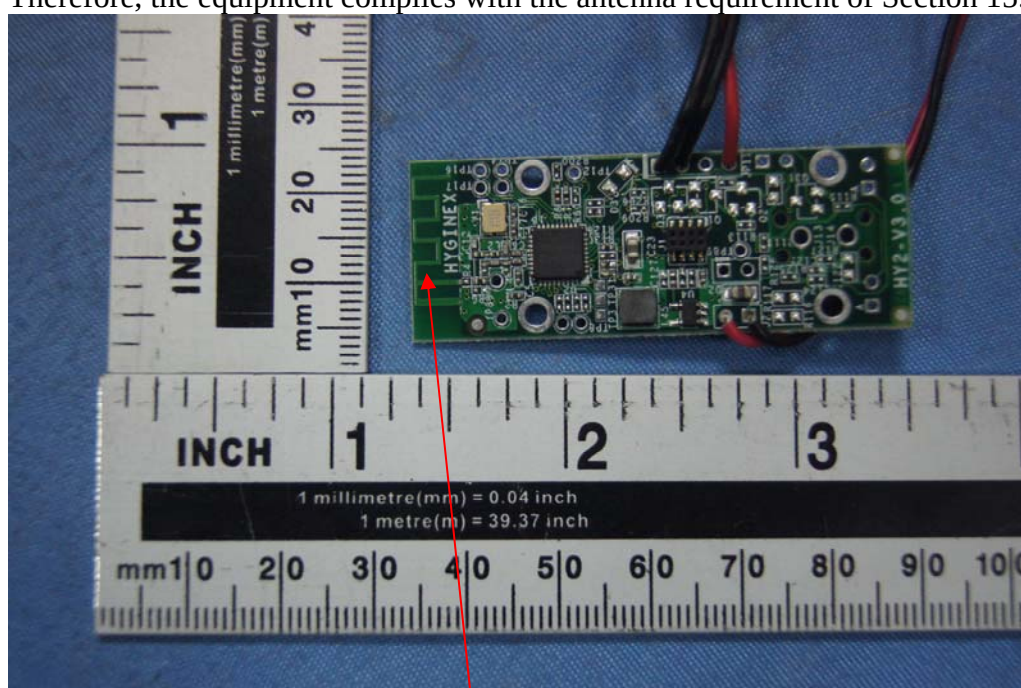

Antenna

APPENDIX I (Test Curves)



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #4384
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: BEACON
Mode: TX 2412MHz
Model: PIR-000-01
Manufacturer: Exploit Innovation Limited

Polarization: Horizontal
Power Source: DC 6V
Date: 2013/05/14
Time: 19:07:34
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20130952

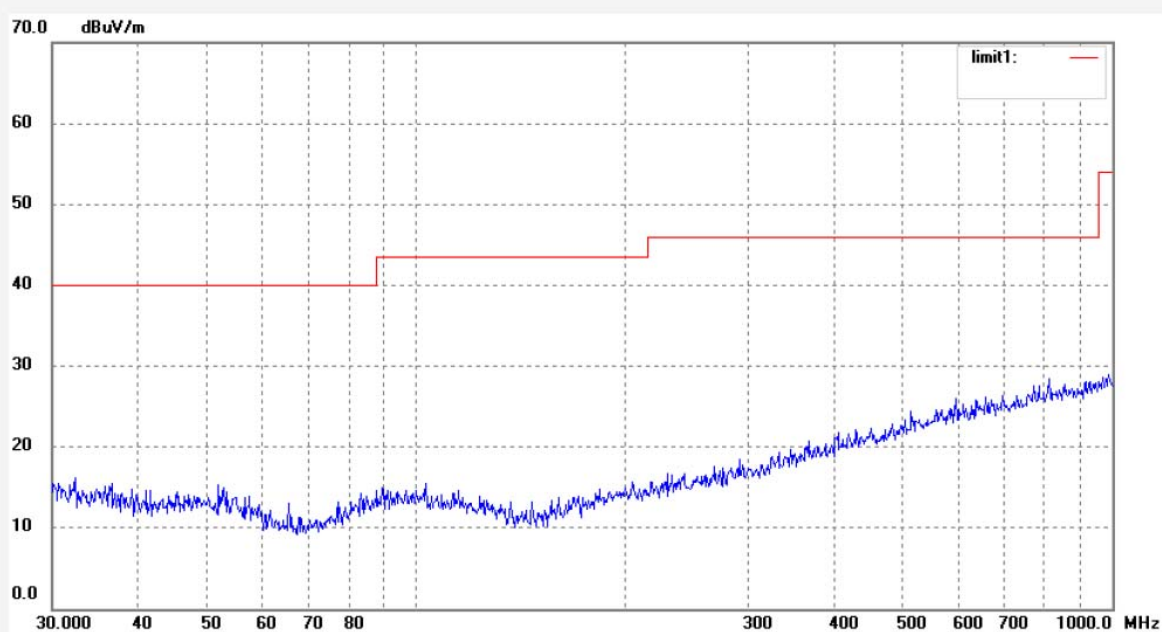

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #4385
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: BEACON
Mode: TX 2412MHz
Model: PIR-000-01
Manufacturer: Exploit Innovation Limited

Polarization: Vertical
Power Source: DC 6V
Date: 2013/05/14
Time: 19:10:01
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20130952

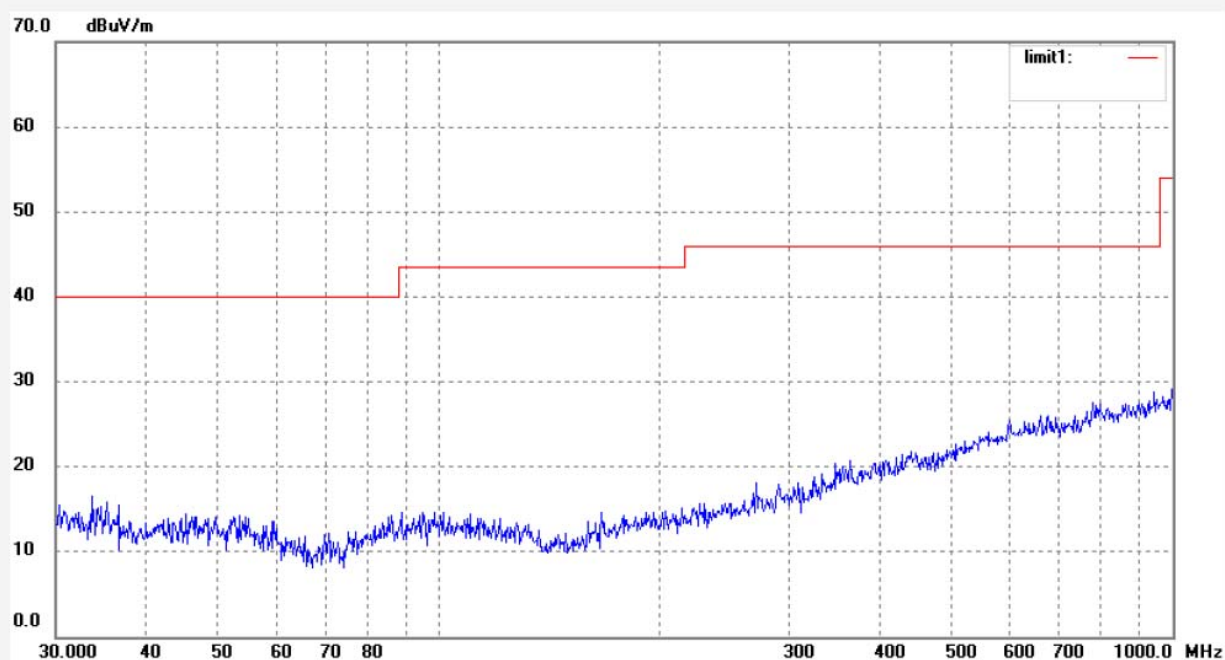

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #4400
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: BEACON
Mode: TX 2412MHz
Model: PIR-000-01
Manufacturer: Exploit Innovation Limited

Polarization: Horizontal
Power Source: DC 6V
Date: 2013/05/14
Time: 19:45:28
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20130952

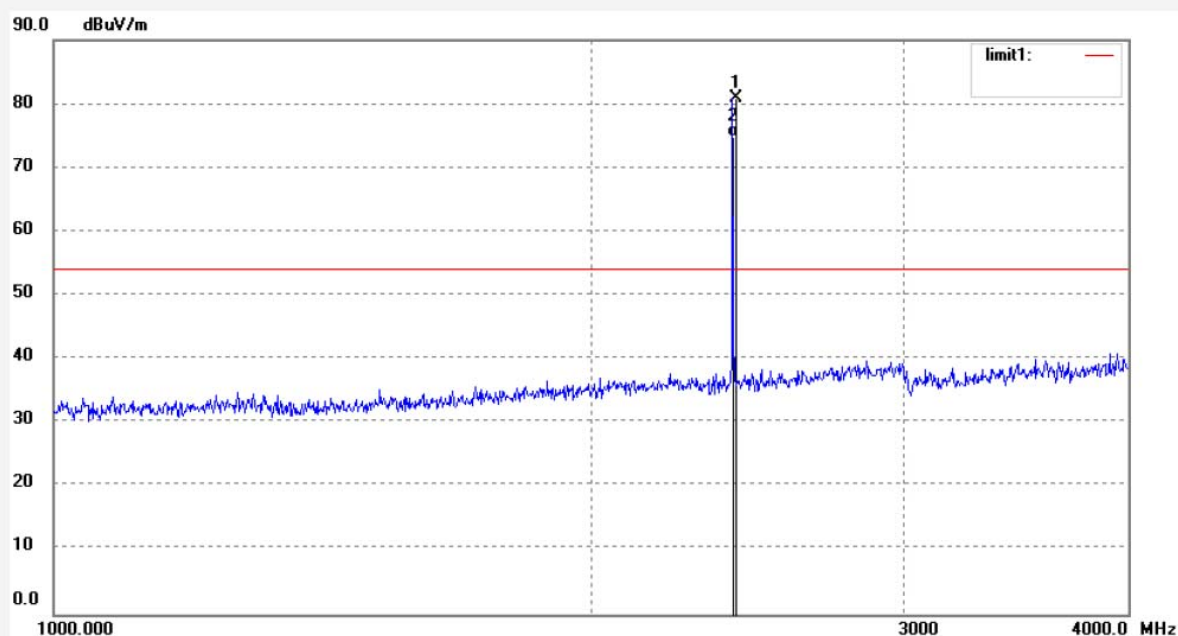

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2412.000	88.35	-7.43	80.92	114.00	-33.08	peak			
2	2412.000	82.31	-7.43	74.88	94.00	-19.12	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #4401
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: BEACON
Mode: TX 2412MHz
Model: PIR-000-01
Manufacturer: Exploit Innovation Limited

Polarization: Vertical
Power Source: DC 6V
Date: 2013/05/14
Time: 19:49:48
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20130952

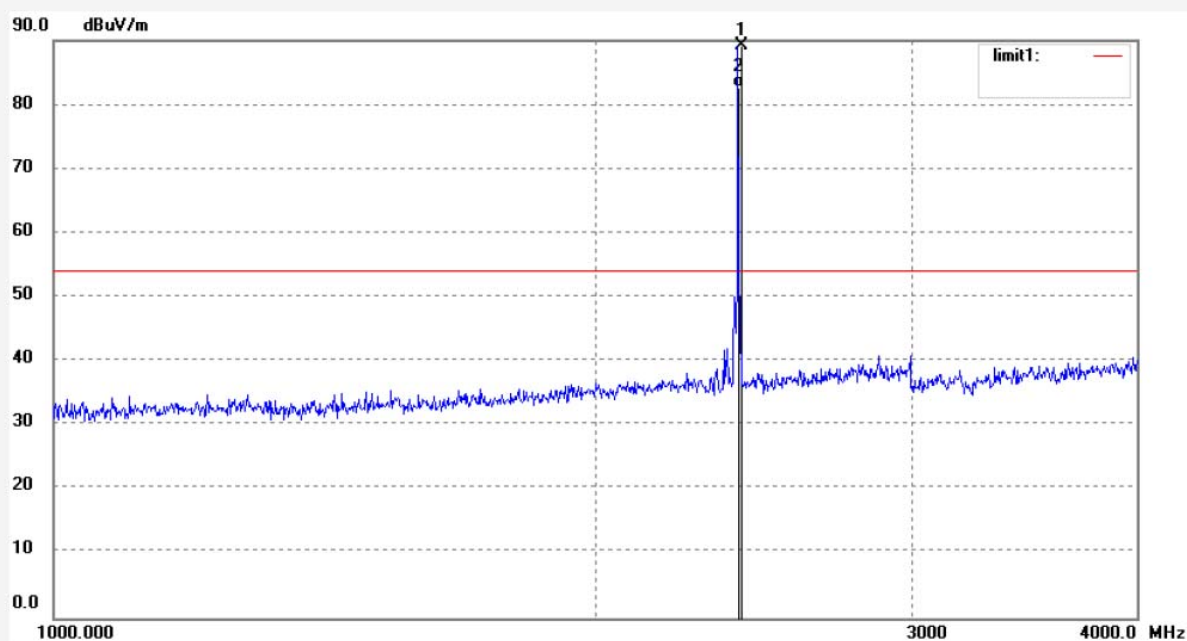

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2412.000	96.59	-7.43	89.16	114.00	-24.84	peak			
2	2412.000	90.12	-7.43	82.69	94.00	-11.31	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #4402
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: BEACON
Mode: TX 2412MHz
Model: PIR-000-01
Manufacturer: Exploit Innovation Limited

Polarization: Vertical
Power Source: DC 6V
Date: 2013/05/14
Time: 19:53:45
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20130952

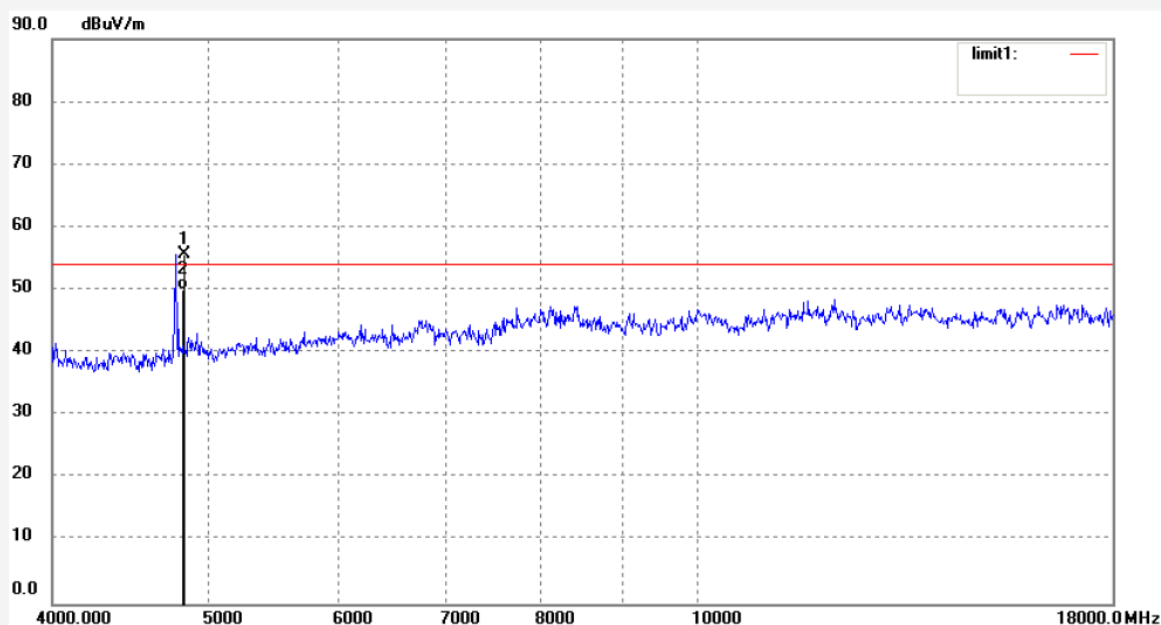

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4824.000	55.78	-0.19	55.59	74.00	-18.41	peak			
2	4824.000	50.28	-0.19	50.09	54.00	-3.91	AVG			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #4403

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: BEACON

Mode: TX 2412MHz

Model: PIR-000-01

Manufacturer: Exploit Innovation Limited

Polarization: Horizontal

Power Source: DC 6V


Date: 2013/05/14

Time: 19:56:05

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20130952

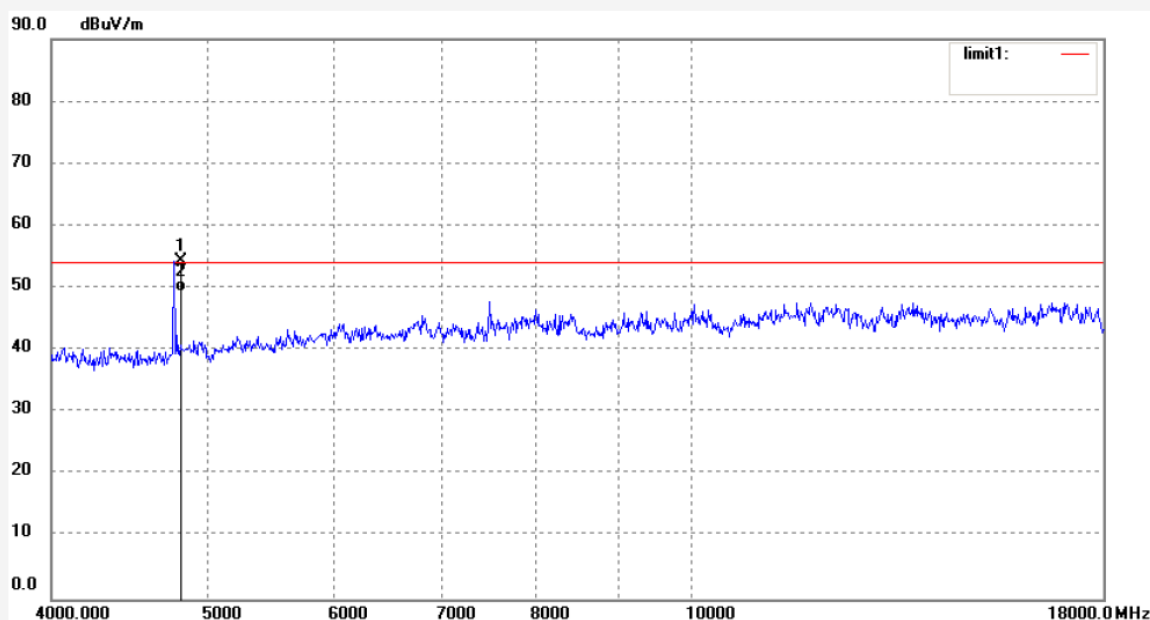

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4824.000	54.45	-0.19	54.26	74.00	-19.74	peak			
2	4824.000	49.65	-0.19	49.46	54.00	-4.54	AVG			


ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #4412
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: BEACON
Mode: TX 2412MHz
Model: PIR-000-01
Manufacturer: Exploit Innovation Limited

Polarization: Vertical
Power Source: DC 6V
Date: 2013/05/14
Time: 20:31:27
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20130952

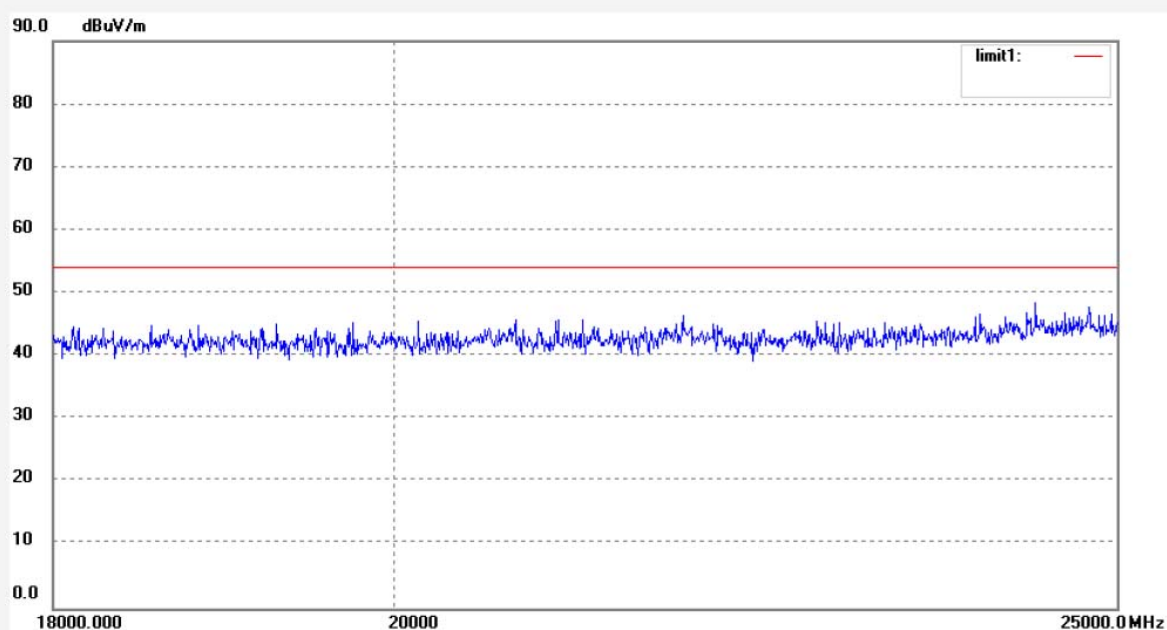

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #4413
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: BEACON
Mode: TX 2412MHz
Model: PIR-000-01
Manufacturer: Exploit Innovation Limited

Polarization: Horizontal
Power Source: DC 6V
Date: 2013/05/14
Time: 20:35:33
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20130952

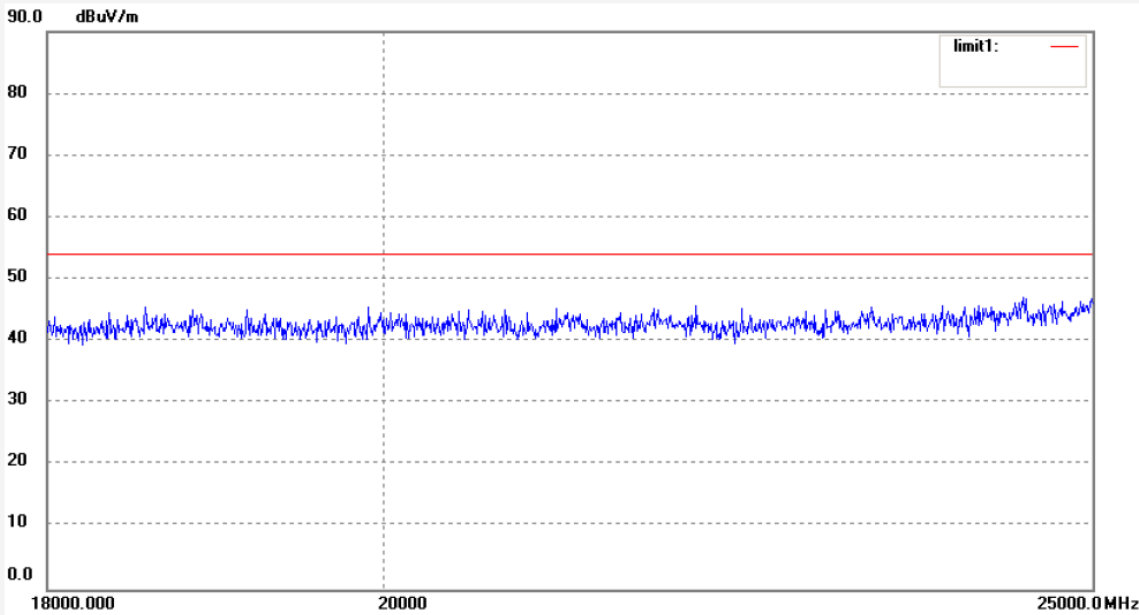

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #4386
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 25 C / 55 %
 EUT: BEACON
 Mode: TX 2446MHz
 Model: PIR-000-01
 Manufacturer: Exploit Innovation Limited

Polarization: Vertical
 Power Source: DC 6V
 Date: 2013/05/14
 Time: 19:14:38
 Engineer Signature:
 Distance: 3m

Note: Report No.:ATE20130952

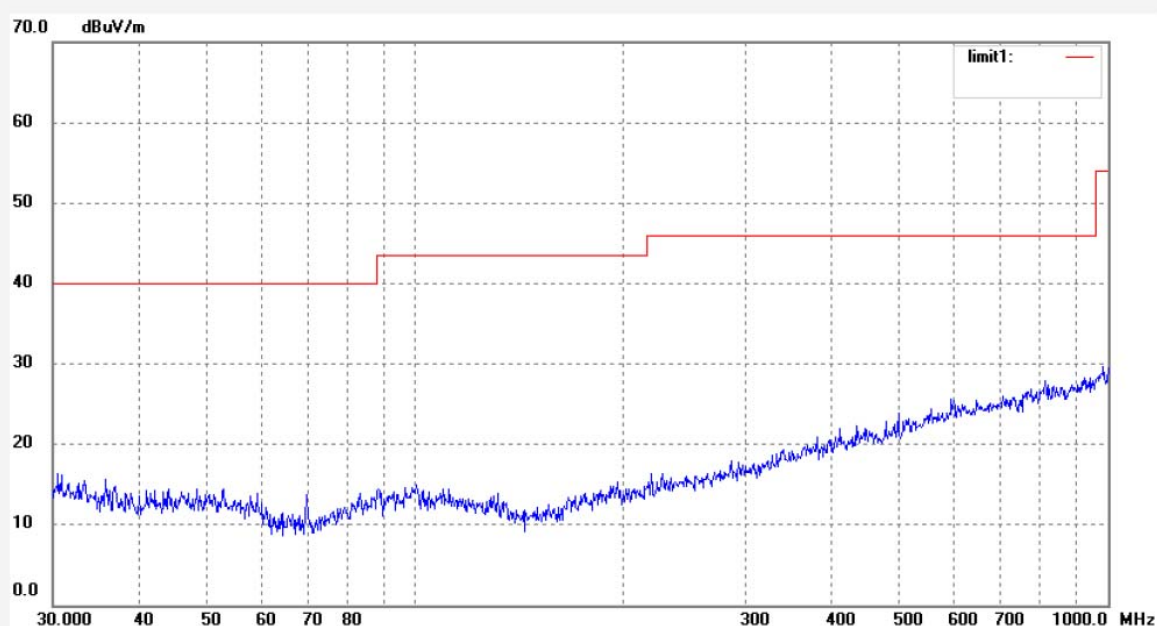

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #4387

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: BEACON

Mode: TX 2446MHz

Model: PIR-000-01

Manufacturer: Exploit Innovation Limited

Polarization: Horizontal

Power Source: DC 6V


Date: 2013/05/14

Time: 19:17:09

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20130952

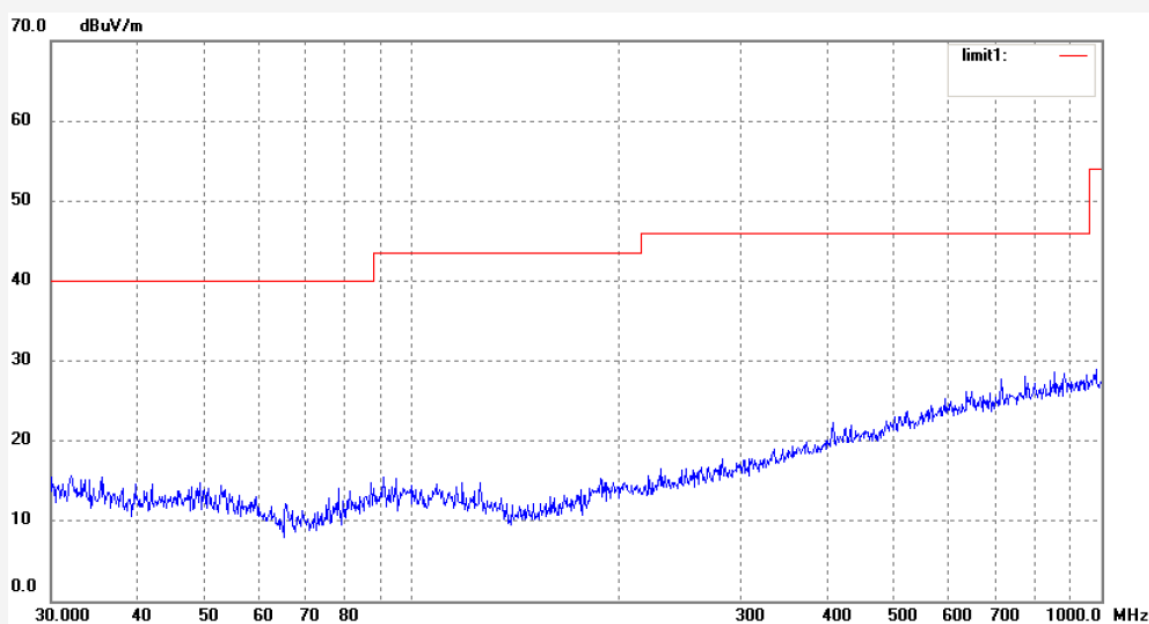

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #4398
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: BEACON
Mode: TX 2446MHz
Model: PIR-000-01
Manufacturer: Exploit Innovation Limited

Polarization: Vertical
Power Source: DC 6V
Date: 2013/05/14
Time: 19:36:36
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20130952

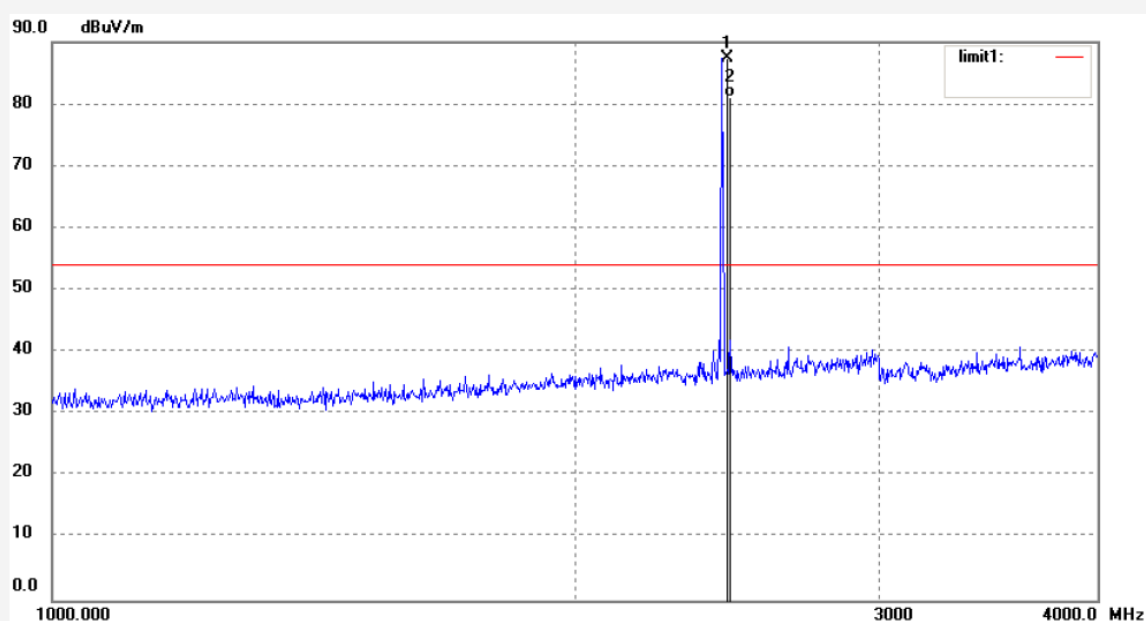

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2446.000	94.78	-7.34	87.44	114.00	-26.56	peak			
2	2446.000	88.45	-7.34	81.11	94.00	-12.89	AVG			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #4399

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: BEACON

Mode: TX 2446MHz

Model: PIR-000-01

Manufacturer: Exploit Innovation Limited

Polarization: Horizontal

Power Source: DC 6V


Date: 2013/05/14

Time: 19:40:21

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20130952

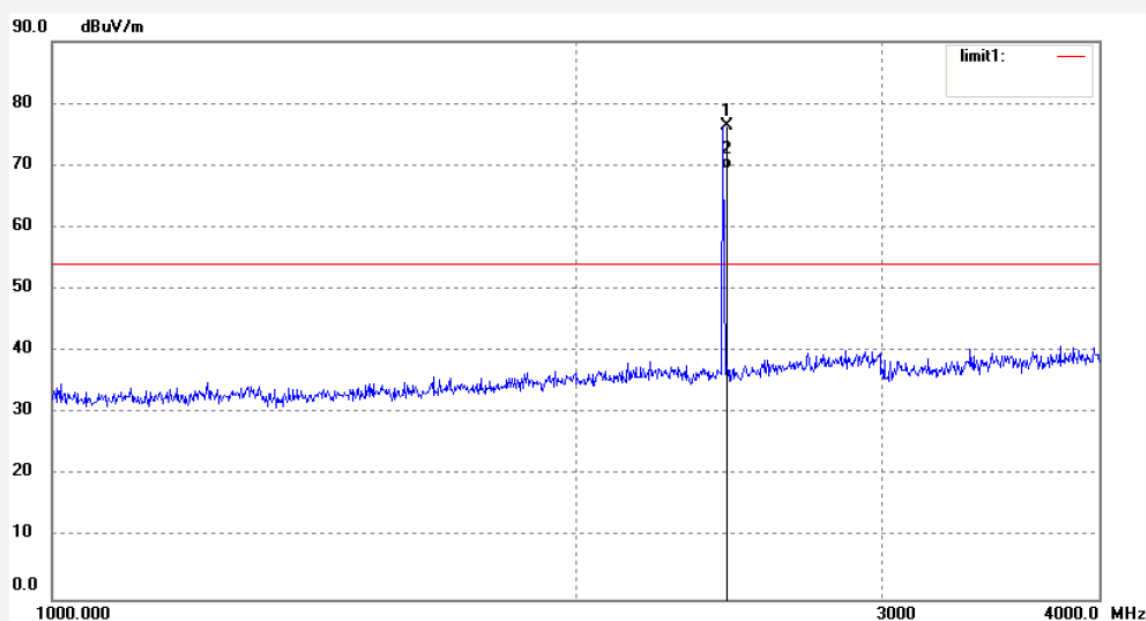

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2446.000	83.68	-7.34	76.34	114.00	-37.66	peak			
2	2446.000	76.84	-7.34	69.50	94.00	-24.50	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #4404
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: BEACON
Mode: TX 2446MHz
Model: PIR-000-01
Manufacturer: Exploit Innovation Limited

Polarization: Horizontal
Power Source: DC 6V
Date: 2013/05/14
Time: 19:59:10
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20130952

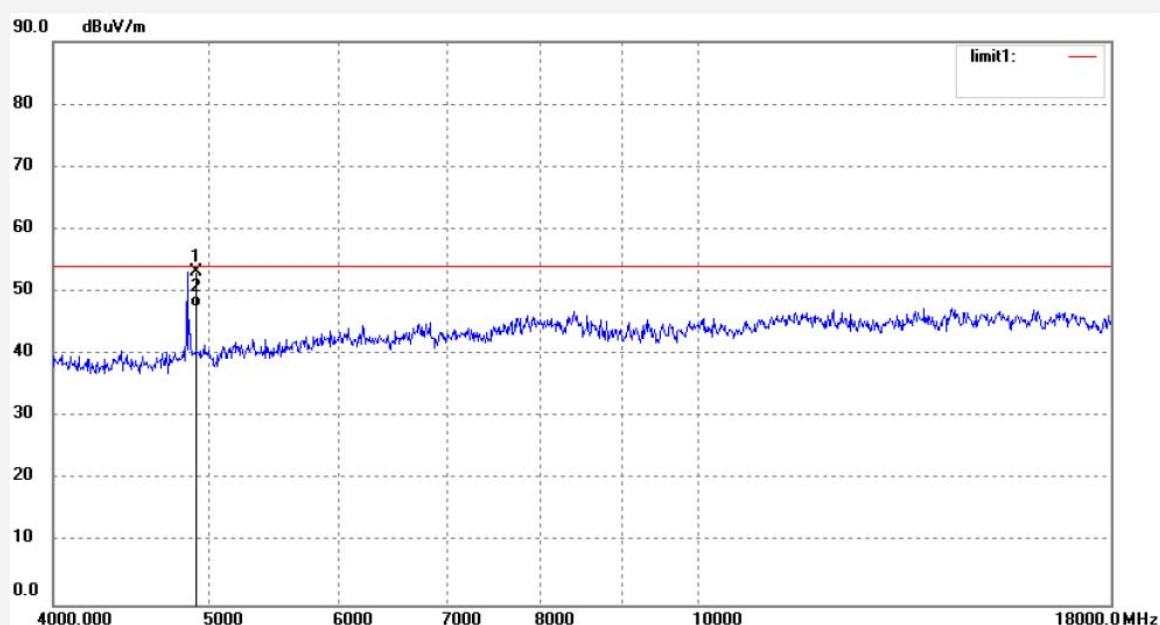

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4892.000	52.93	0.20	53.13	74.00	-20.87	peak			
2	4892.000	47.43	0.20	47.63	54.00	-6.37	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #4405

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: BEACON

Mode: TX 2446MHz

Model: PIR-000-01

Manufacturer: Exploit Innovation Limited

Polarization: Vertical

Power Source: DC 6V


Date: 2013/05/14

Time: 20:03:20

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20130952

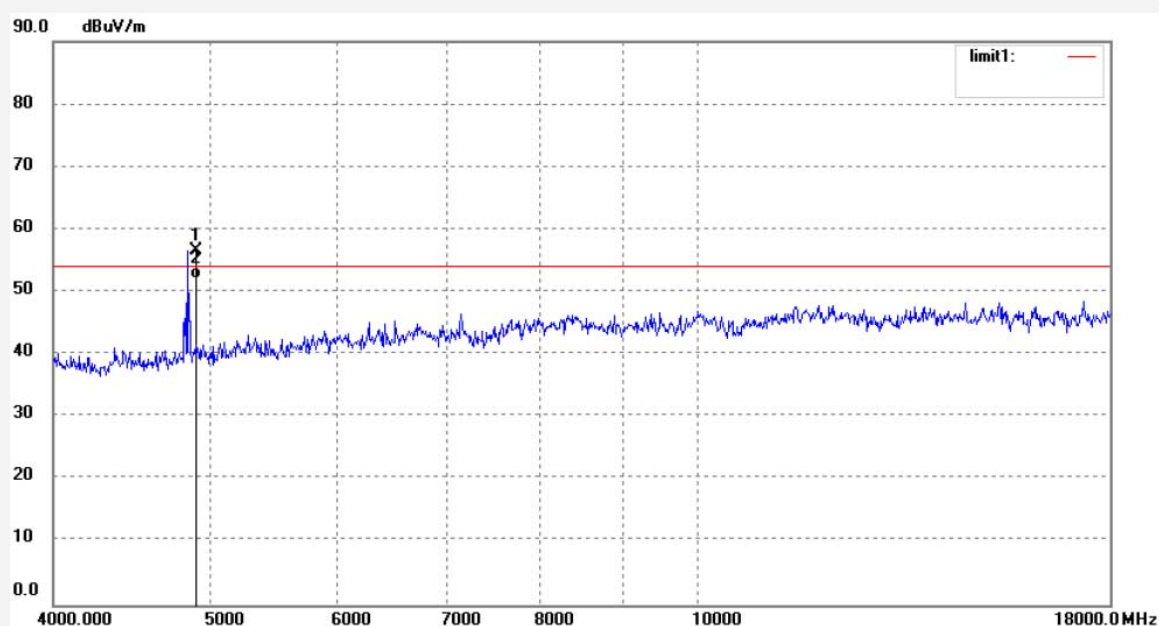

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4892.000	56.29	0.20	56.49	74.00	-17.51	peak			
2	4892.000	51.79	0.20	51.99	54.00	-2.01	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #4410

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: BEACON

Mode: TX 2446MHz

Model: PIR-000-01

Manufacturer: Exploit Innovation Limited

Polarization: Horizontal

Power Source: DC 6V


Date: 2013/05/14

Time: 20:22:11

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20130952

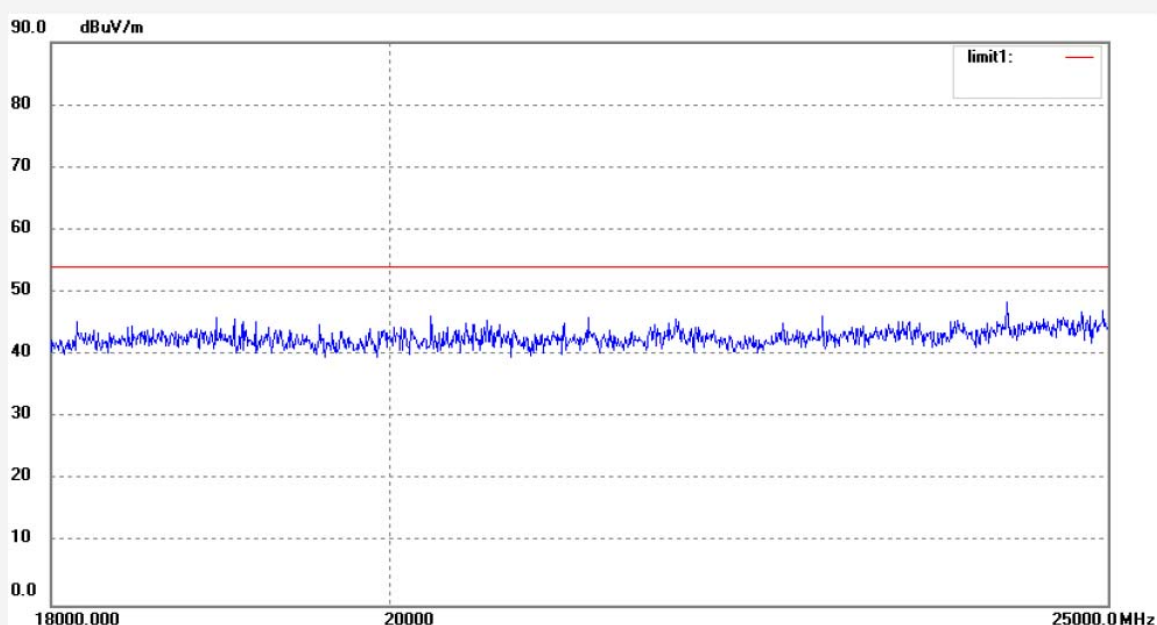

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------

**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #4411

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: BEACON

Mode: TX 2446MHz

Model: PIR-000-01

Manufacturer: Exploit Innovation Limited

Polarization: Vertical

Power Source: DC 6V


Date: 2013/05/14

Time: 20:27:20

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20130952

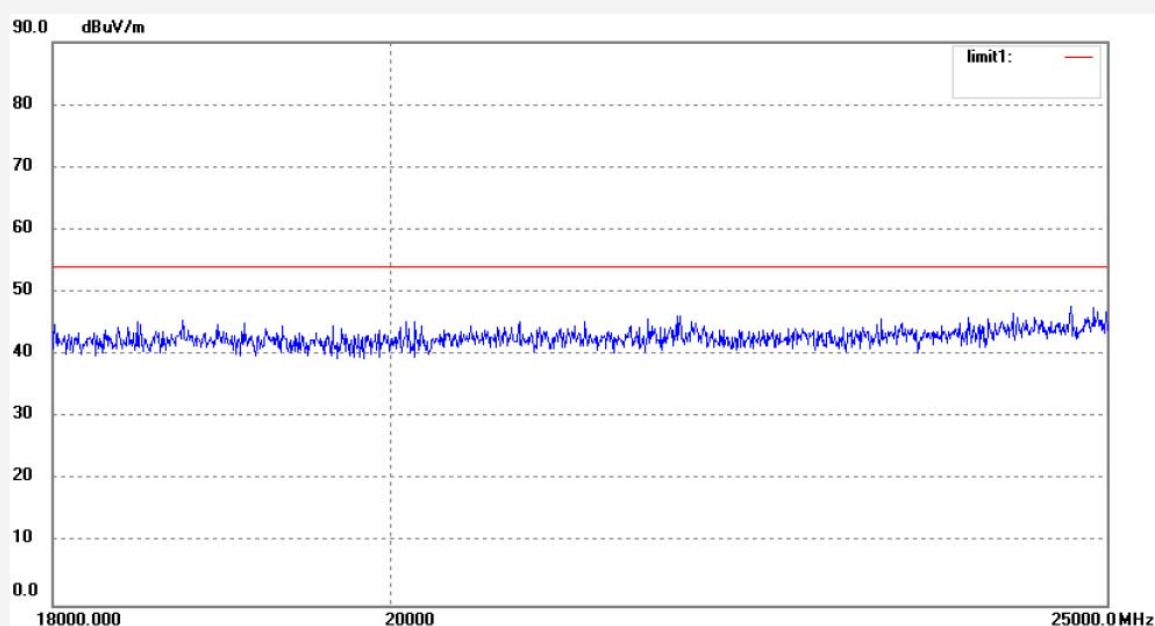

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #4388
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: BEACON
Mode: TX 2480MHz
Model: PIR-000-01
Manufacturer: Exploit Innovation Limited

Polarization: Horizontal
Power Source: DC 6V
Date: 2013/05/14
Time: 19:21:31
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20130952

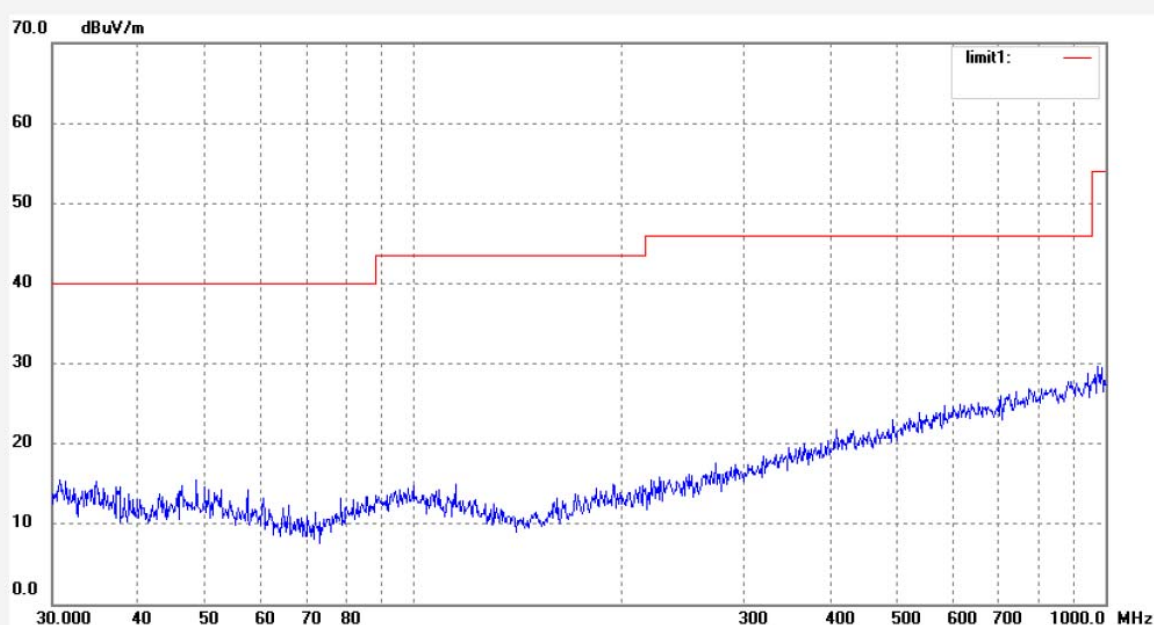

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #4389

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: BEACON

Mode: TX 2480MHz

Model: PIR-000-01

Manufacturer: Exploit Innovation Limited

Polarization: Vertical

Power Source: DC 6V


Date: 2013/05/14

Time: 19:24:52

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20130952

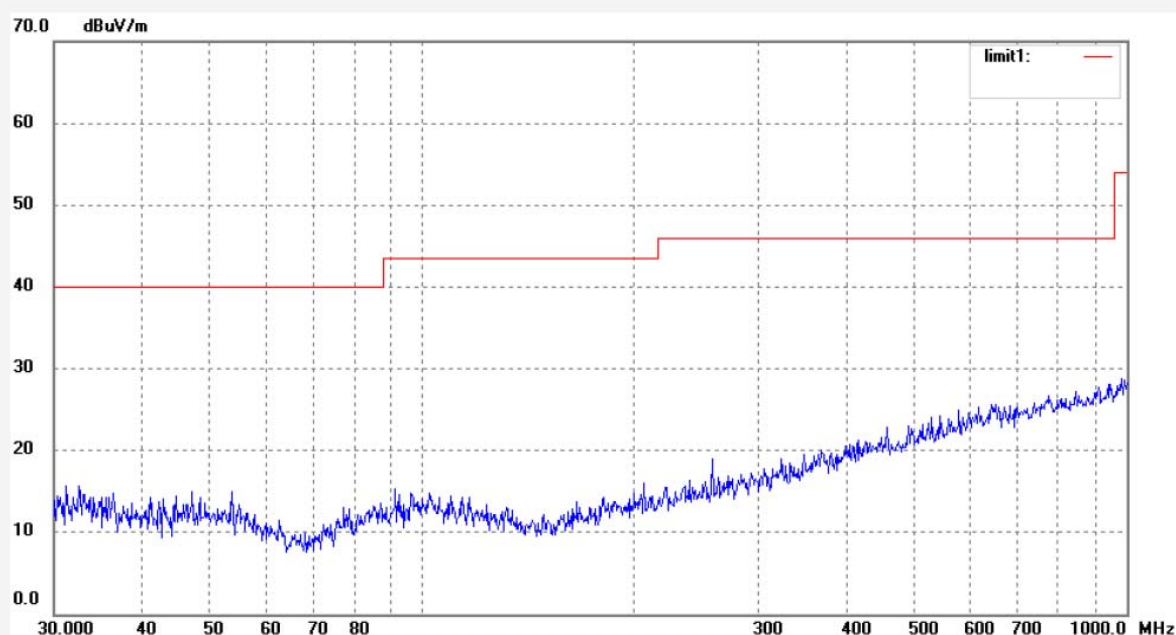

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #4396
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: BEACON
Mode: TX 2480MHz
Model: PIR-000-01
Manufacturer: Exploit Innovation Limited

Polarization: Horizontal
Power Source: DC 6V
Date: 2013/05/14
Time: 19:28:16
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20130952

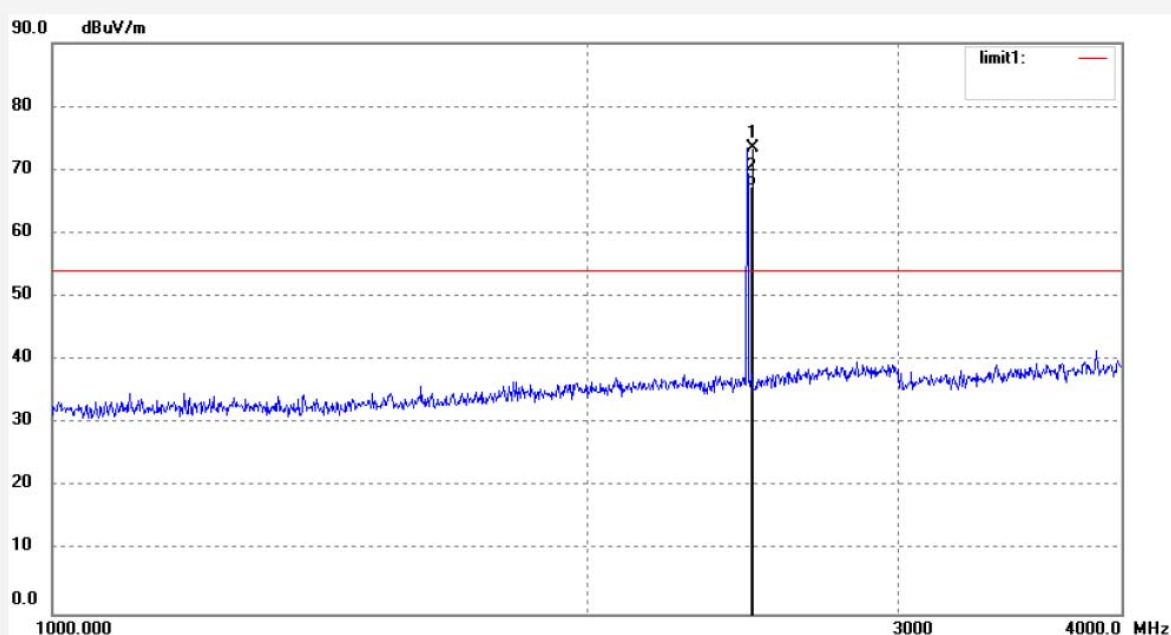

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	80.76	-7.37	73.39	114.00	-40.61	peak			
2	2480.000	74.65	-7.37	67.28	94.00	-29.72	AVG			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #4397

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: BEACON

Mode: TX 2480MHz

Model: PIR-000-01

Manufacturer: Exploit Innovation Limited

Polarization: Vertical

Power Source: DC 6V


Date: 2013/05/14

Time: 19:32:30

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20130952

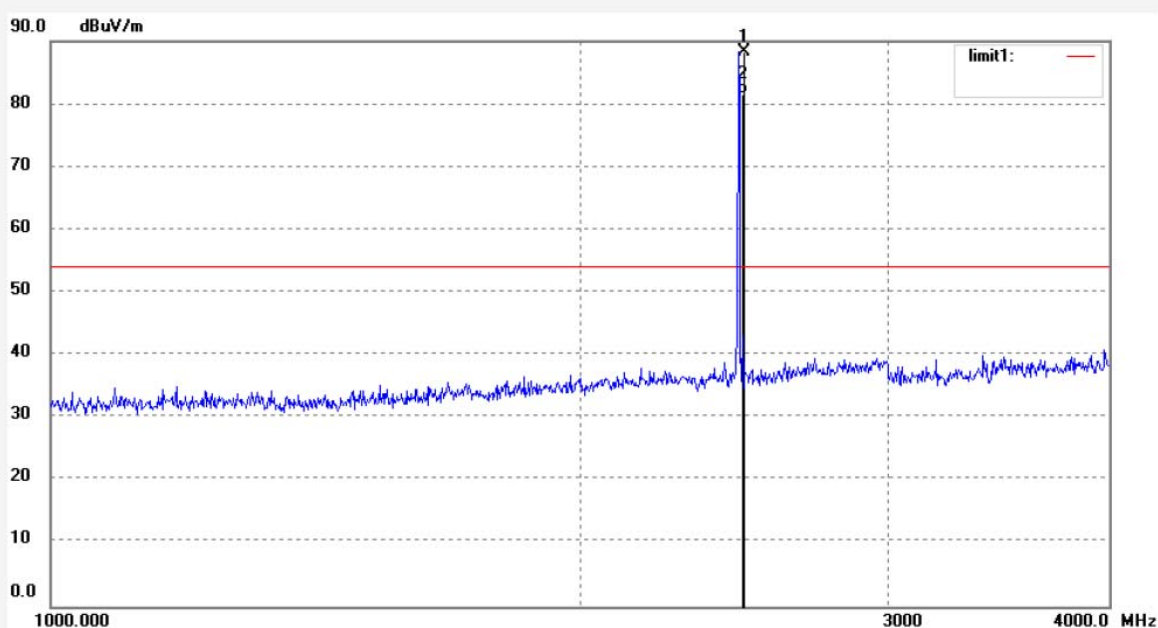

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	95.57	-7.37	88.20	114.00	-25.80	peak			
2	2480.000	89.02	-7.37	81.65	94.00	-12.35	AVG			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #4406
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 25 C / 55 %
 EUT: BEACON
 Mode: TX 2480MHz
 Model: PIR-000-01
 Manufacturer: Exploit Innovation Limited

Polarization: Vertical
 Power Source: DC 6V
 Date: 2013/05/14
 Time: 20:05:26
 Engineer Signature:
 Distance: 3m

Note: Report No.:ATE20130952

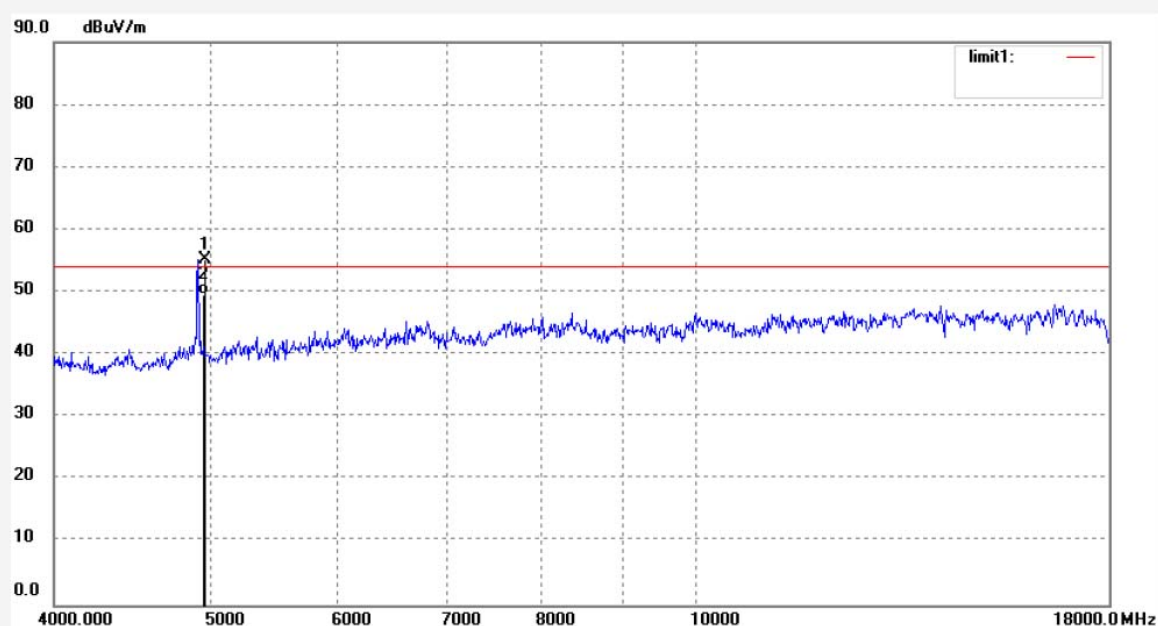

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4960.000	54.67	0.52	55.19	74.00	-18.81	peak			
2	4960.000	49.06	0.52	49.58	54.00	-4.42	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #4407

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: BEACON

Mode: TX 2480MHz

Model: PIR-000-01

Manufacturer: Exploit Innovation Limited

Polarization: Horizontal

Power Source: DC 6V


Date: 2013/05/14

Time: 20:10:46

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20130952

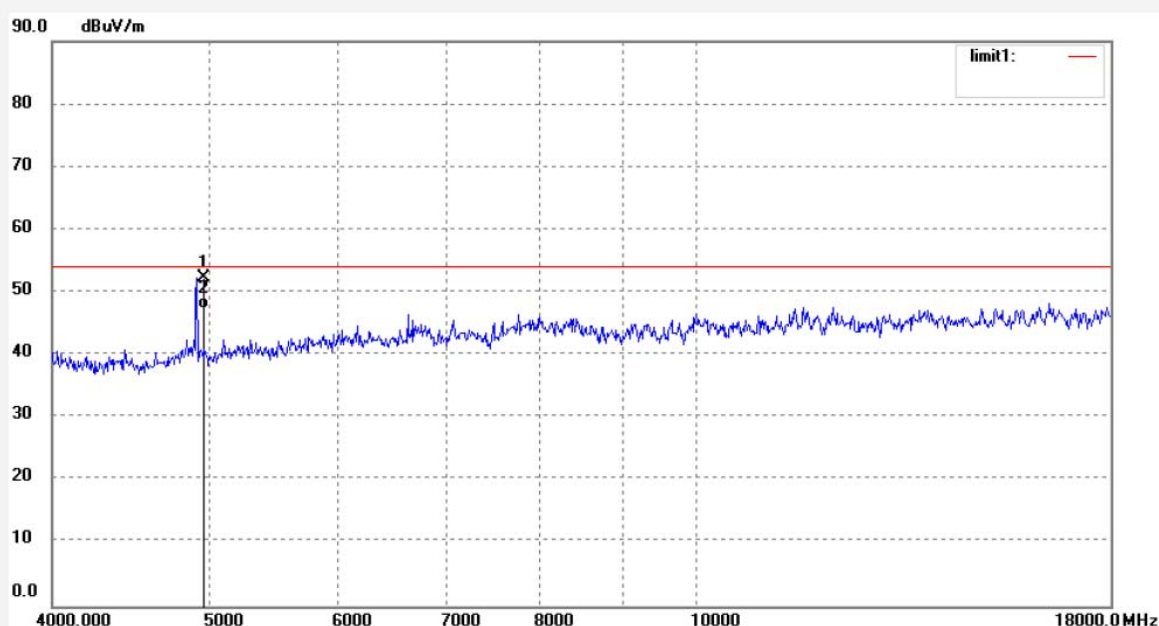

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4960.000	51.69	0.52	52.21	74.00	-21.79	peak			
2	4960.000	46.78	0.52	47.30	54.00	-6.70	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #4408
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: BEACON
Mode: TX 2480MHz
Model: PIR-000-01
Manufacturer: Exploit Innovation Limited

Polarization: Vertical
Power Source: DC 6V
Date: 2013/05/14
Time: 20:15:49
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20130952

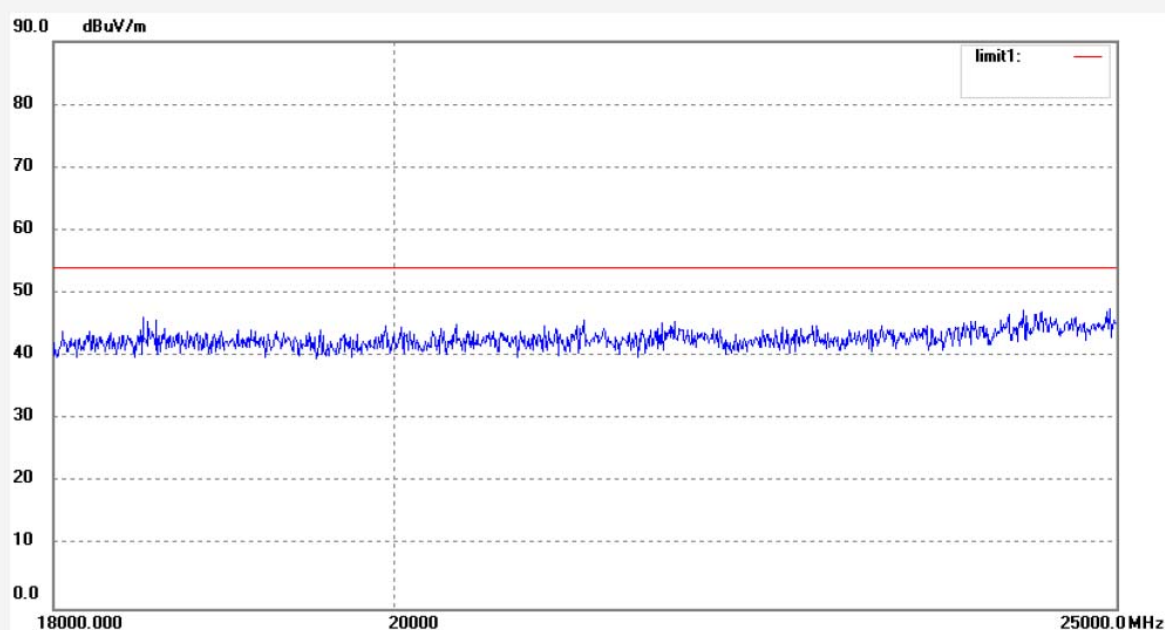

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------

**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #4409
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: BEACON
Mode: TX 2480MHz
Model: PIR-000-01
Manufacturer: Exploit Innovation Limited

Polarization: Horizontal
Power Source: DC 6V
Date: 2013/05/14
Time: 20:18:04
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20130952

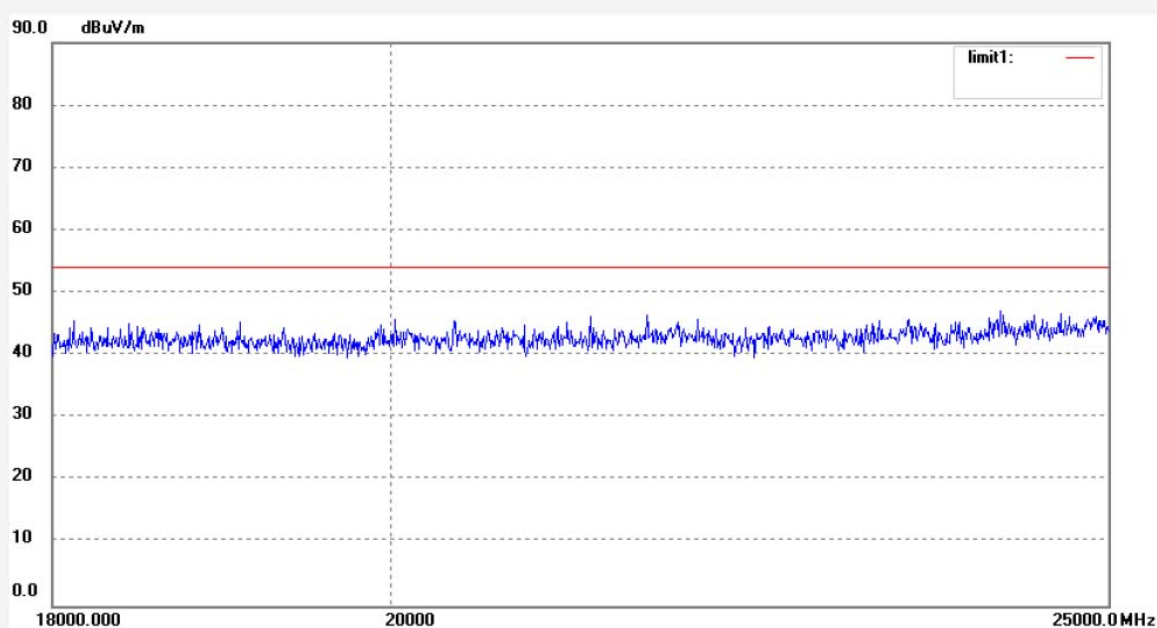

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #4414
 Standard: FCC PK
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 25 C / 55 %
 EUT: BEACON
 Mode: TX 2480MHz
 Model: PIR-000-01
 Manufacturer: Exploit Innovation Limited

Polarization: Horizontal
 Power Source: DC 6V
 Date: 13/05/15/
 Time: 8/55/37
 Engineer Signature:
 Distance: 3m

Note: Report No.:ATE20130952

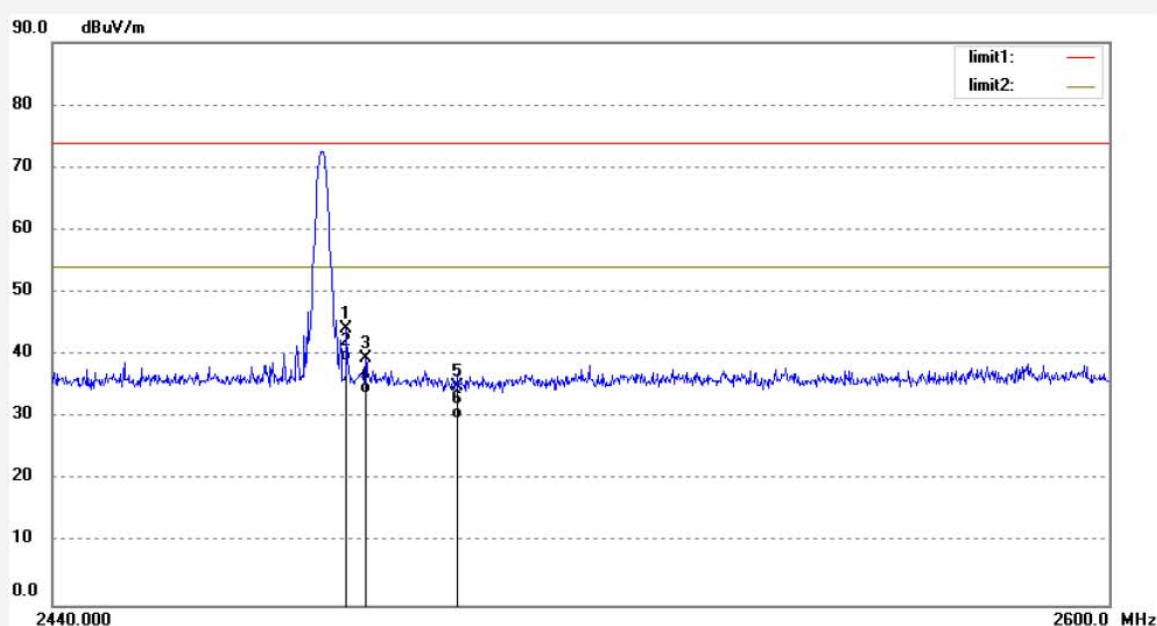

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	51.57	-7.37	44.20	74.00	-29.80	peak			
2	2483.500	46.50	-7.37	39.13	54.00	-14.87	AVG			
3	2486.399	46.91	-7.39	39.52	74.00	-34.48	peak			
4	2486.399	41.25	-7.39	33.86	54.00	-20.14	AVG			
5	2500.000	42.41	-7.40	35.01	74.00	-38.99	peak			
6	2500.000	37.11	-7.40	29.71	54.00	-24.29	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #4415

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: BEACON

Mode: TX 2480MHz

Model: PIR-000-01

Manufacturer: Exploit Innovation Limited

Polarization: Vertical

Power Source: DC 6V


Date: 13/05/15/

Time: 8/59/34

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20130952

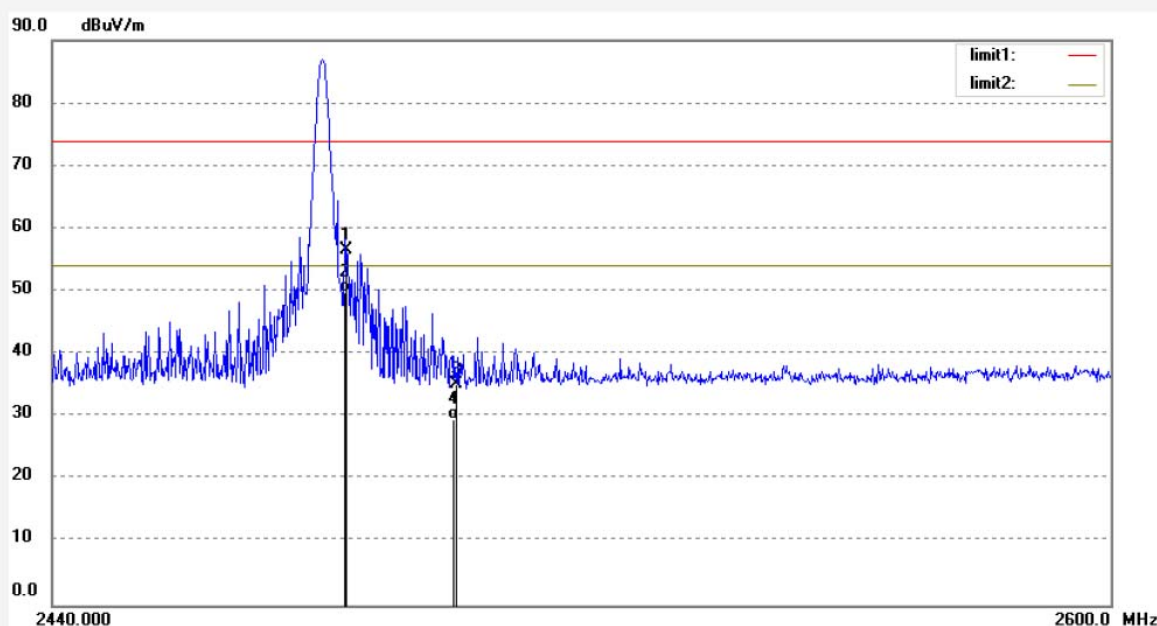

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	64.06	-7.37	56.69	74.00	-17.31	peak			
2	2483.500	57.14	-7.37	49.77	54.00	-4.23	AVG			
3	2500.000	42.61	-7.40	35.21	74.00	-38.79	peak			
4	2500.000	36.98	-7.40	29.58	54.00	-24.42	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #4416

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: BEACON

Mode: TX 2412MHz

Model: PIR-000-01

Manufacturer: Exploit Innovation Limited

Polarization: Vertical

Power Source: DC 6V


Date: 13/05/15/

Time: 9/04/40

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20130952

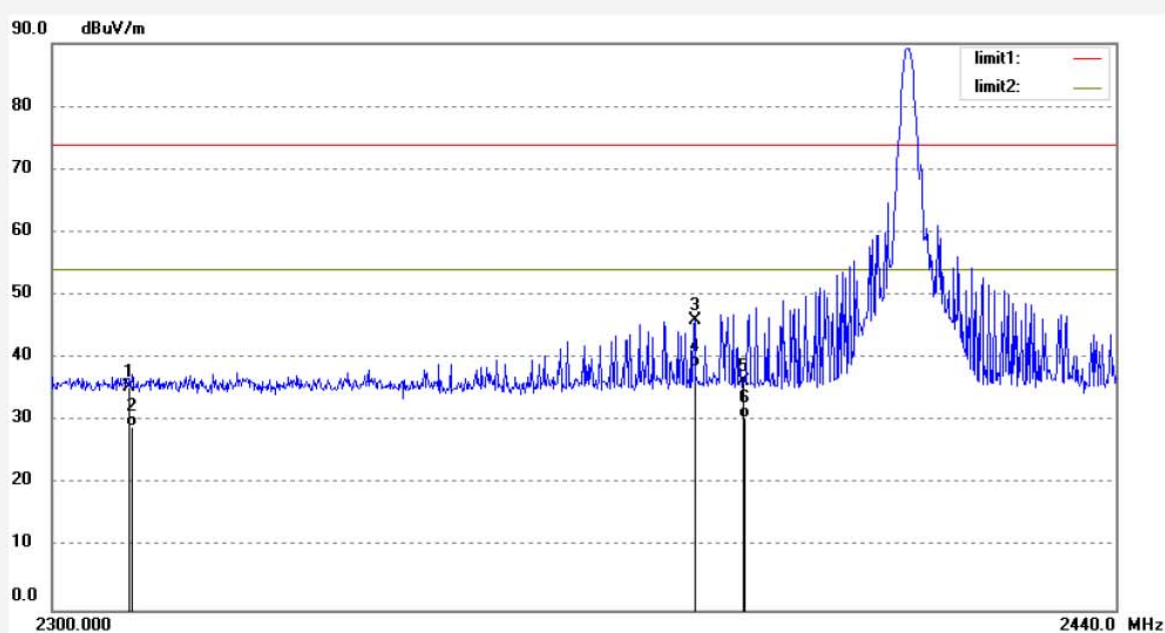

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	43.35	-7.81	35.54	74.00	-38.46	peak			
2	2310.000	36.99	-7.81	29.18	54.00	-24.82	AVG			
3	2383.598	53.67	-7.57	46.10	74.00	-27.90	peak			
4	2383.598	46.22	-7.57	38.65	54.00	-15.35	AVG			
5	2390.000	43.80	-7.53	36.27	74.00	-37.73	peak			
6	2390.000	37.95	-7.53	30.42	54.00	-23.58	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #4417

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: BEACON

Mode: TX 2412MHz

Model: PIR-000-01

Manufacturer: Exploit Innovation Limited

Polarization: Horizontal

Power Source: DC 6V


Date: 13/05/15/

Time: 9/09/00

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20130952

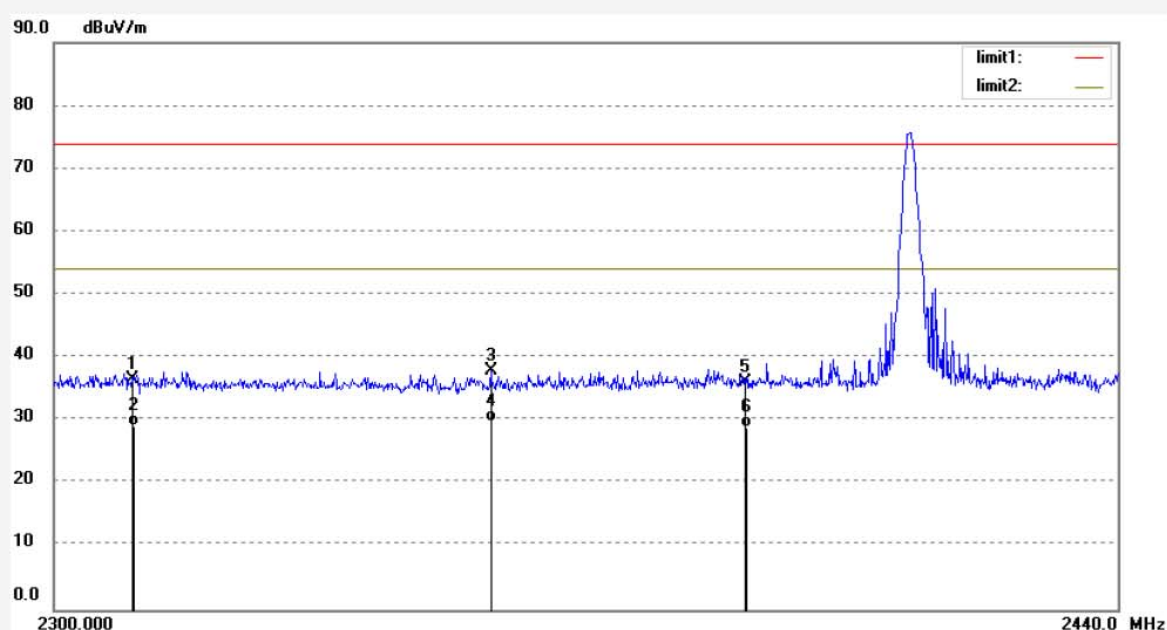

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	44.48	-7.81	36.67	74.00	-37.33	peak			
2	2310.000	37.00	-7.81	29.19	54.00	-24.81	AVG			
3	2356.516	45.61	-7.74	37.87	74.00	-36.13	peak			
4	2356.516	37.56	-7.74	29.82	54.00	-24.18	AVG			
5	2390.000	43.66	-7.53	36.13	74.00	-37.87	peak			
6	2390.000	36.47	-7.53	28.94	54.00	-25.06	AVG			