

# FCC Part 15C

## Measurement and Test Report

### For

**ATI Electronics (Shenzhen) Co., LTD**

**1/F, B Tower, Shengdelan Industrial Park, Kukeng Village, Guanlan Town,  
Shenzhen, China.**

**FCC ID: SF4-BTDF414**

<b>FCC Rule(s):</b>	<u>FCC Part 15.247</u>
<b>Product Description:</b>	<u>Bluetooth Carkit</u>
<b>Tested Model:</b>	<u>BT Drive Free 414</u>
<b>Report No.:</b>	<u>STR15018242I-1</u>
<b>Tested Date:</b>	<u>2015-01-27 to 2015-02-02</u>
<b>Issued Date:</b>	<u>2015-02-02</u>
<b>Tested By:</b>	<u>Jason Su / Engineer</u>
<b>Reviewed By:</b>	<u>Lahm Peng / EMC Manager</u>
<b>Approved &amp; Authorized By:</b>	<u>Jandy so / PSQ Manager</u>
<b>Prepared By:</b>	<p><b>Shenzhen SEM.Test Technology Co., Ltd.</b> 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101) Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: <a href="http://www.semtest.com.cn">www.semtest.com.cn</a></p>

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permission by Shenzhen SEM.Test Technology Co., Ltd.

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY.....	5
1.4 TEST FACILITY .....	5
1.5 EUT SETUP AND TEST MODE.....	6
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>7</b>
<b>3. RF EXPOSURE .....</b>	<b>8</b>
3.1 STANDARD APPLICABLE.....	8
3.2 TEST RESULT.....	8
<b>4. ANTENNA REQUIREMENT .....</b>	<b>9</b>
4.1 STANDARD APPLICABLE.....	9
4.2 EVALUATION INFORMATION .....	9
<b>5. FREQUENCY HOPPING SYSTEM REQUIREMENTS .....</b>	<b>10</b>
5.1 STANDARD APPLICABLE.....	10
5.2 FREQUENCY HOPPING SYSTEM.....	10
5.3 EUT PSEUDORANDOM FREQUENCY HOPPING SEQUENCE .....	11
<b>6. QUANTITY OF HOPPING CHANNELS AND CHANNEL SEPARATION .....</b>	<b>12</b>
6.1 STANDARD APPLICABLE.....	12
6.2 TEST EQUIPMENT LIST AND DETAILS .....	12
6.3 TEST PROCEDURE.....	12
6.4 ENVIRONMENTAL CONDITIONS .....	12
6.5 SUMMARY OF TEST RESULTS/PLOTS .....	13
<b>7. DWELL TIME OF HOPPING CHANNEL.....</b>	<b>17</b>
7.1 STANDARD APPLICABLE.....	17
7.2 TEST EQUIPMENT LIST AND DETAILS .....	17
7.3 TEST PROCEDURE.....	17
7.4 ENVIRONMENTAL CONDITIONS .....	17
7.5 SUMMARY OF TEST RESULTS/PLOTS .....	18
<b>8. 20DB BANDWIDTH .....</b>	<b>28</b>
8.1 STANDARD APPLICABLE.....	28
8.2 TEST EQUIPMENT LIST AND DETAILS .....	28
8.3 TEST PROCEDURE.....	28
8.4 ENVIRONMENTAL CONDITIONS .....	28
8.5 SUMMARY OF TEST RESULTS/PLOTS .....	28
<b>9. RF OUTPUT POWER .....</b>	<b>32</b>
9.1 STANDARD APPLICABLE.....	32
9.2 TEST EQUIPMENT LIST AND DETAILS .....	32
9.3 TEST PROCEDURE.....	32
9.4 ENVIRONMENTAL CONDITIONS .....	32
9.5 SUMMARY OF TEST RESULTS/PLOTS .....	32
<b>10. FIELD STRENGTH OF SPURIOUS EMISSIONS .....</b>	<b>34</b>
10.1 MEASUREMENT UNCERTAINTY .....	34
10.2 STANDARD APPLICABLE.....	34
10.3 TEST EQUIPMENT LIST AND DETAILS .....	34
10.4 TEST PROCEDURE.....	35
10.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	36
10.6 ENVIRONMENTAL CONDITIONS .....	36
10.7 SUMMARY OF TEST RESULTS/PLOTS .....	36
<b>11. OUT OF BAND EMISSIONS.....</b>	<b>46</b>
11.1 STANDARD APPLICABLE.....	46
11.2 TEST EQUIPMENT LIST AND DETAILS .....	46
11.3 TEST PROCEDURE.....	46

---

11.4 ENVIRONMENTAL CONDITIONS .....	47
11.5 SUMMARY OF TEST RESULTS/PLOTS .....	47
<b>12. CONDUCTED EMISSIONS .....</b>	<b>51</b>
12.1 MEASUREMENT UNCERTAINTY .....	51
12.2 TEST EQUIPMENT LIST AND DETAILS .....	51
12.3 TEST PROCEDURE.....	51
12.4 BASIC TEST SETUP BLOCK DIAGRAM.....	51
12.5 ENVIRONMENTAL CONDITIONS .....	52
12.6 TEST RECEIVER SETUP .....	52
12.7 SUMMARY OF TEST RESULTS/PLOTS .....	52
12.8 CONDUCTED EMISSIONS TEST DATA.....	52

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: ATI Electronics (ShenZhen) Co., LTD  
Address of applicant: 1/F, B Tower, Shengdelan Industrial Park, Kukeng Village, Guanlan Town, Shenzhen, China.  
Manufacturer: ATI Electronics (ShenZhen) Co., LTD  
Address of manufacturer: 1/F, B Tower, Shengdelan Industrial Park, Kukeng Village, Guanlan Town, Shenzhen, China.

<b>General Description of EUT</b>	
Product Name:	Bluetooth Carkit
Trade Name:	Blaupunkt
Model No.:	BT Drive Free 414
Adding Model(s):	/
Rated Voltage:	Battery:DC3.7V; USB:DC5V charging purpose only
Power Adapter Model:	/
<i>Note: The test data is gathered from a production sample provided by the manufacturer. This product contains NFC slave function.</i>	

<b>Technical Characteristics of EUT</b>	
Bluetooth Version:	V4.0 (EDR mode)
Frequency Range:	2402-2480MHz
RF Output Power:	4.802dBm (Conducted)
Data Rate:	1Mbps, 2Mbps, 3Mbps
Modulation:	GFSK, Pi/4 QDPSK, 8DPSK
Quantity of Channels:	79
Channel Separation:	1MHz
Type of Antenna:	PCB
Antenna Gain:	0dBi
Lowest Internal Frequency of EUT:	26MHz

## 1.2 Test Standards

The following report is prepared on behalf of the ATI Electronics (ShenZhen) Co., LTD in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. The measurement guide DA 00-705 for frequency hopping spread spectrum systems shall be performed also.

## 1.4 Test Facility

### FCC – Registration No.: 934118

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

### Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

### CNAS Registration No.: L4062

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2<sup>nd</sup> Road, Bao'an District, Shenzhen, P.R.C (518101).

## 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List			
Test Mode	Description	Remark	
TM1	Low Channel	2402MHz	
TM2	Middle Channel	2441MHz	
TM3	High Channel	2480MHz	
TM4	Hopping	2402-2480MHz	

Modulation Configure			
Modulation	Packet	Packet Type	Packet Size
GFSK	DH1	4	27
	DH3	11	183
	DH5	15	339
Pi/4 DQPSK	2DH1	20	54
	2DH3	26	367
	2DH5	30	379
8DPSK	3DH1	24	83
	3DH3	27	552
	3DH5	31	1021
Normal mode: the Bluetooth has been tested on the modulation of GFSK, (Pi/4)DQPSK and 8DPSK, compliance test and record the worst case.			

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	0.8	Unshielded	Wthout Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	E10	N/A

## 2. SUMMARY OF TEST RESULTS

---

FCC Rules	Description of Test Item	Result
§ 2.1093	RF Exposure	Compliant
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.209(a)	Radiated Spurious Emissions	Compliant
§ 15.247(a)(1)(iii)	Quantity of Hopping Channel	Compliant
§ 15.247(a)(1)	Channel Separation	Compliant
§ 15.247(a)(1)(iii)	Time of Occupancy (Dwell time)	Compliant
§ 15.247(a)	20dB Bandwidth	Compliant
§ 15.247(b)(1)	RF Power Output	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant
§ 15.247(a)(1)	Frequency Hopping Sequence	Compliant
§ 15.247(g), (h)	Frequency Hopping System	Compliant

N/A: not applicable

### 3. RF Exposure

---

#### 3.1 Standard Applicable

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

#### 3.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

## 4. Antenna Requirement

---

### 4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### 4.2 Evaluation Information

This product has an integral antenna, fulfill the requirement of this section.

## 5. Frequency Hopping System Requirements

---

### 5.1 Standard Applicable

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

### 5.2 Frequency Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule.

This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

This device was tested with an bluetooth system receiver to check that the device maintained hopping synchronization, and the device complied with these requirements for DA 00-705 and FCC Part 15.247 rule.

### **5.3 EUT Pseudorandom Frequency Hopping Sequence**

Pseudorandom Frequency Hopping Sequence Table as below:

Channel: 08, 24, 40, 56, 40, 56, 72, 09, 01, 09, 33, 41, 33, 41, 65, 73, 53, 69, 06, 22, 04, 20, 36, 52, 38, 46, 70, 78, 68, 76, 21, 29, 10, 26, 42, 58, 44, 60, 76, 13, 03, 11, 35, 43, 37, 45, 69, 77, 55, 71, 08, 24, 08, 24, 40, 56, 40, 48, 72, 01, 72, 01, 25, 33, 12, 28, 44, 60, 42, 58, 74, 11, 05, 13, 37, 45 etc.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

## 6. Quantity of Hopping Channels and Channel Separation

### 6.1 Standard Applicable

According to FCC 15.247(a)(1), frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, and frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

### 6.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2014-05-28	2015-05-27
Attenuator	ATTEN	ATS100-4-20	/	2014-05-28	2015-05-27

### 6.3 Test Procedure

According to the DA 00-705, the number of hopping frequencies test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set span = the frequency band of operation (2400MHz to 2483.5MHz)

RBW = 100kHz, VBW = 100kHz

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize, observed the band of 2400MHz to 2483.5MHz, than count it out the number of channels for comparing with the FCC rules.

The channel spacing test method as follows:

Set span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW)  $\geq 1\%$  of the span

Video (or Average) Bandwidth (VBW)  $\geq$  RBW

Sweep = auto; Detector function = peak; Trace = max hold


Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.

### 6.4 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	54%
ATM Pressure:	1011 mbar


## 6.5 Summary of Test Results/Plots

No. of Channel = 79

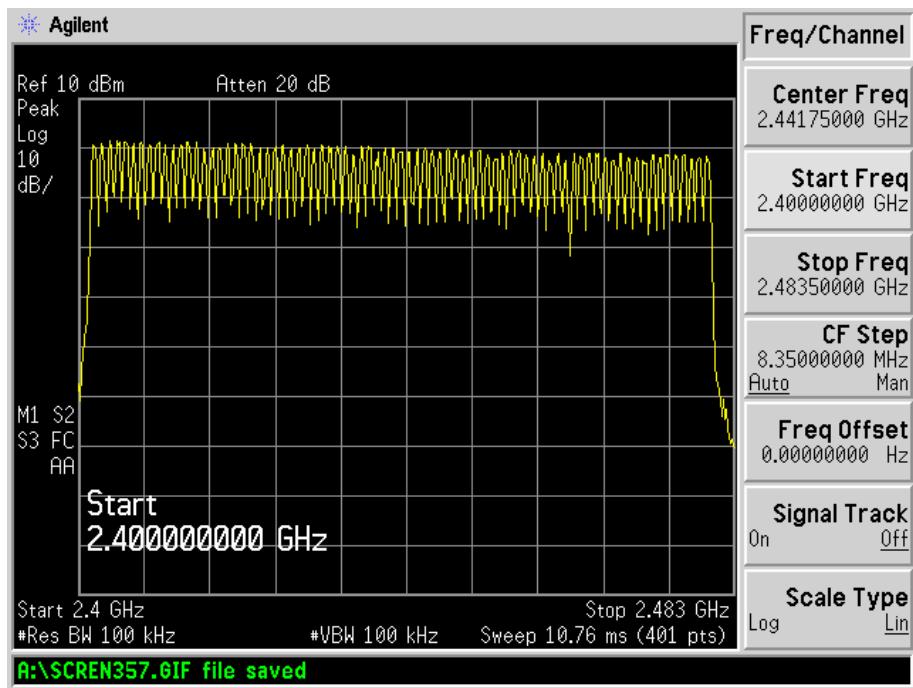


For GFSK mode


Channel Spacing (Low CH=1MHz)

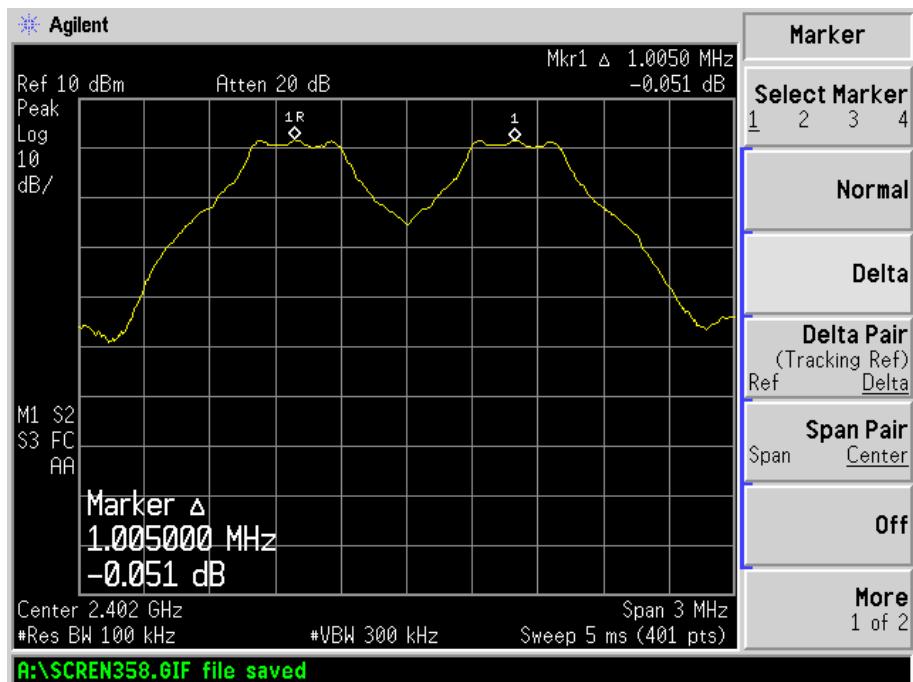

## Channel Spacing (Middle CH=1MHz)

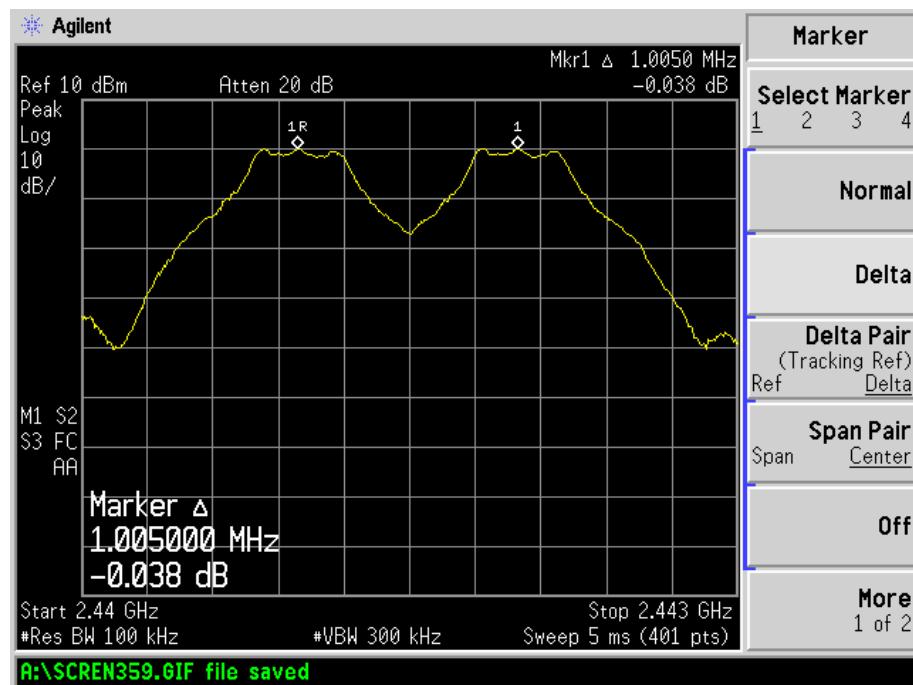


## Channel Spacing (High CH=1MHz)

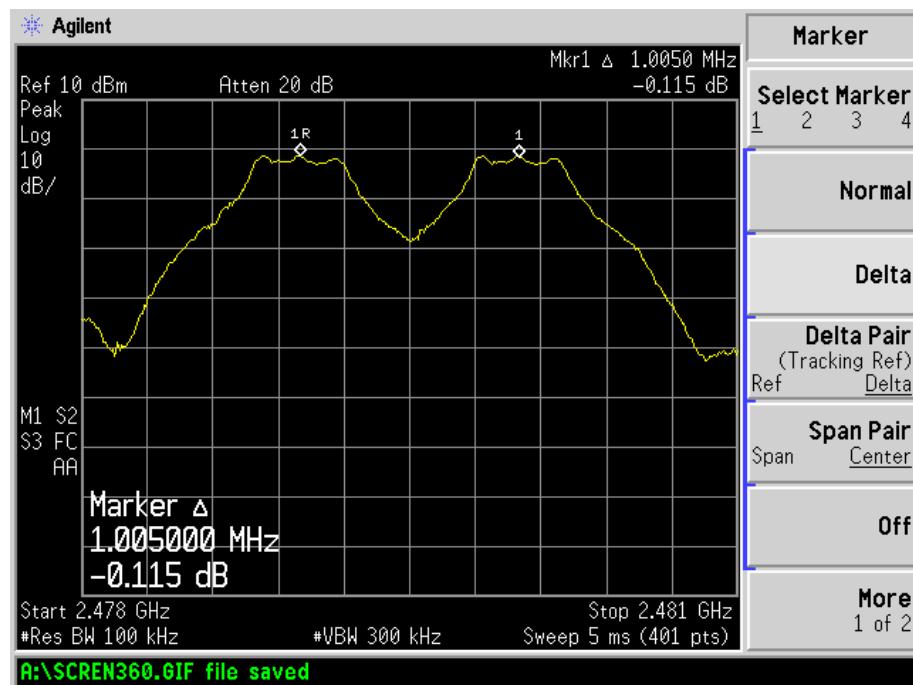


For 8DPSK mode


Channel Spacing (Low CH=1MHz)

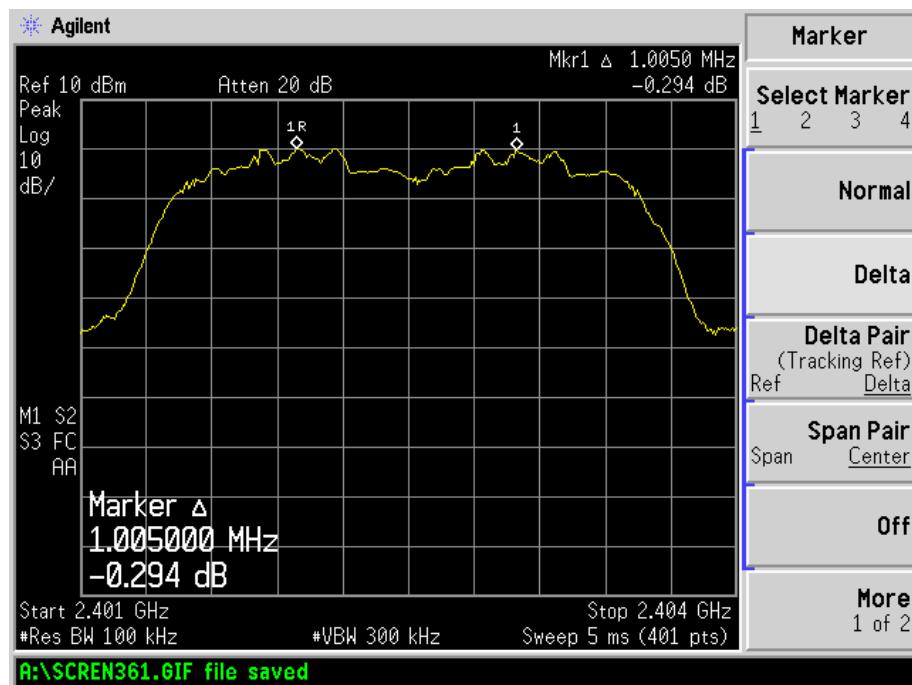

Channel Spacing (Middle CH=1MHz)

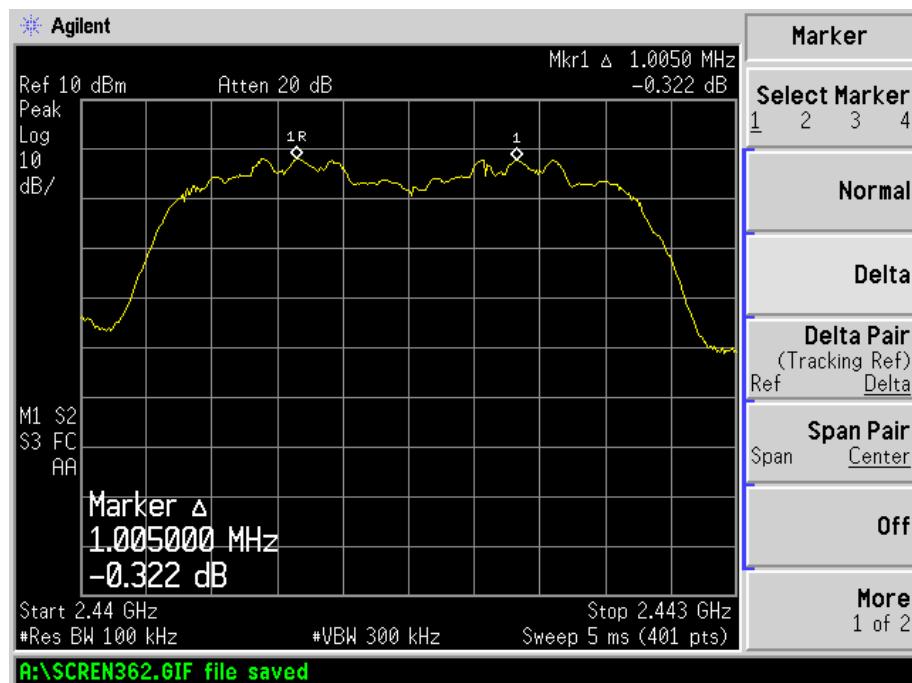

## Channel Spacing (High CH=1MHz)

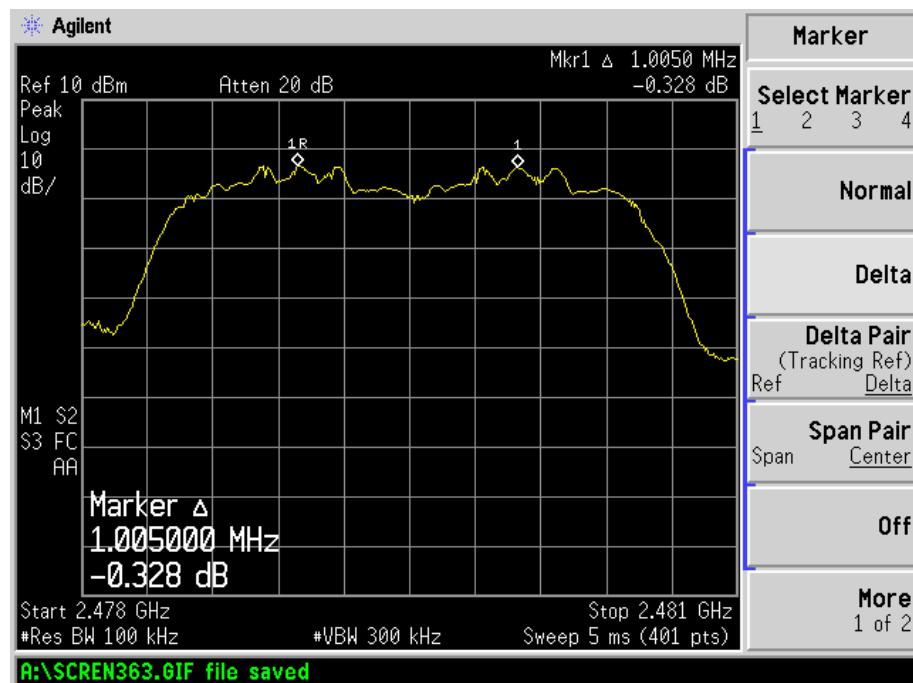

## 7. Dwell Time of Hopping Channel

### 7.1 Standard Applicable

According to 15.247(a)(1)(iii), Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 7.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2014-05-28	2015-05-27
Attenuator	ATTEN	ATS100-4-20	/	2014-05-28	2015-05-27

### 7.3 Test Procedure

According to the DA 00-705, the dwell time of a hopping channel test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Span = zero span, centered on a hopping channel

RBW = 1 MHz

VBW  $\geq$  RBW

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold

Use the marker-delta function to determine the dwell time

### 7.4 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

## 7.5 Summary of Test Results/Plots

The dwell time within a period in data mode is independent from the packet type (packet length). Test data is corrected with the worse case, which the packet length is DH1, DH3, and DH5.



The test period:  $T = 0.4 \text{ Second} * 79 \text{ Channel} = 31.6 \text{ s}$


Dwell time = time slot length \* (Hopping rate / Number of hopping channels) \* Period

Modulation	Test Channel	Packet	Time Slot Length	Dwell Time	Limit
			ms	ms	ms
GFSK	2402MHz	DH1	0.360	115.200	400
		DH3	1.630	260.800	400
		DH5	2.870	306.133	400
	2441MHz	DH1	0.390	124.800	400
		DH3	1.640	262.400	400
		DH5	2.880	307.200	400
	2480MHz	DH1	0.370	118.400	400
		DH3	1.640	262.400	400
		DH5	2.860	305.067	400
8DPSK	2402MHz	3DH1	0.400	128.000	400
		3DH3	1.650	264.000	400
		3DH5	2.880	307.200	400
	2441MHz	3DH1	0.390	124.800	400
		3DH3	1.640	262.400	400
		3DH5	2.850	304.000	400
	2480MHz	3DH1	0.390	124.800	400
		3DH3	1.640	262.400	400
		3DH5	2.870	306.133	400


*Please refer to the test plots as below:*



## DH1 time slot (Low, Middle, High Channels)

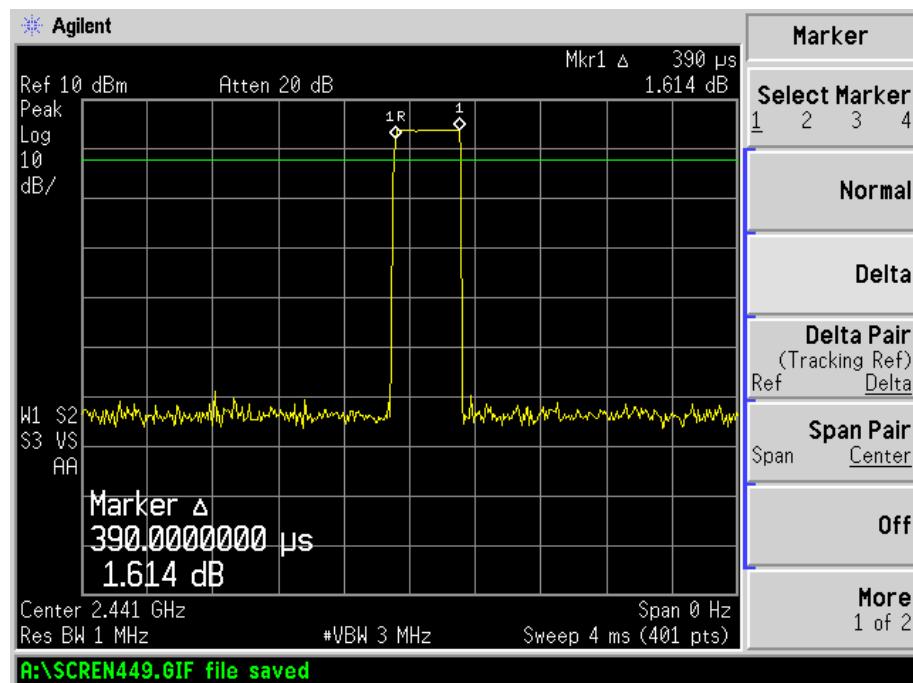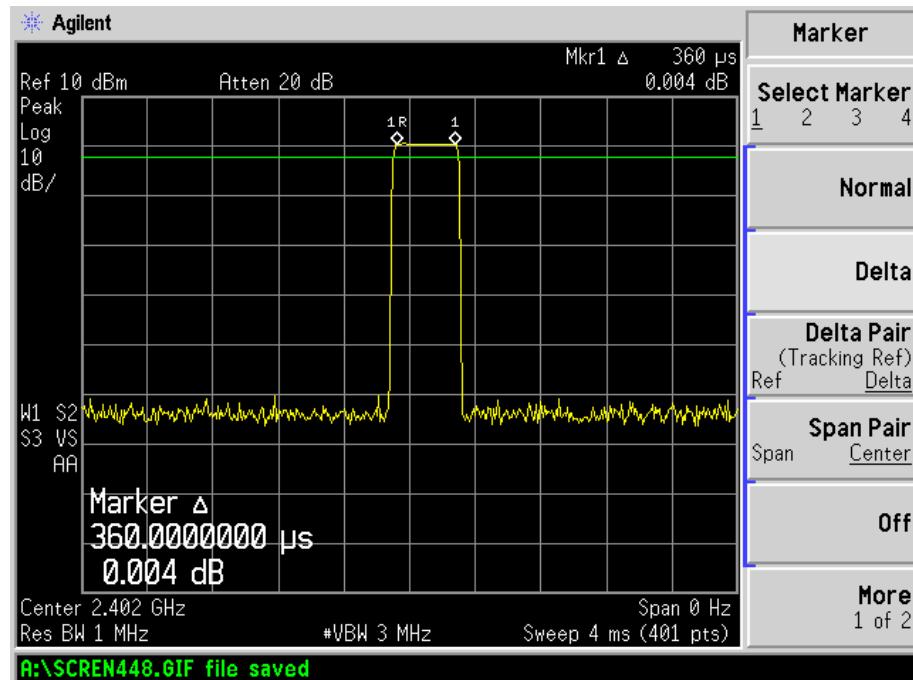


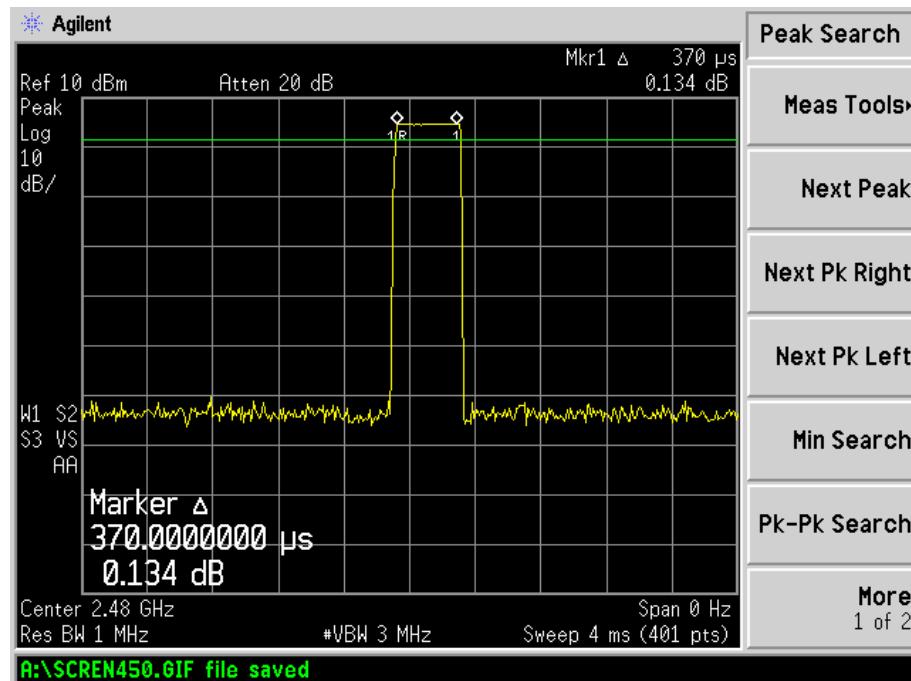



DH3 time slot (Low, Middle, High Channels)

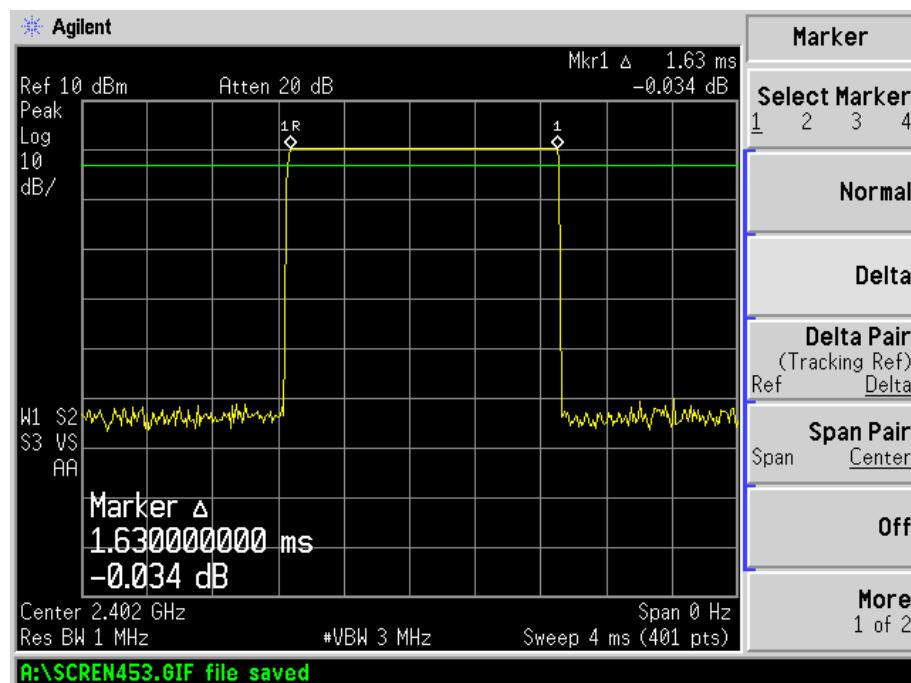

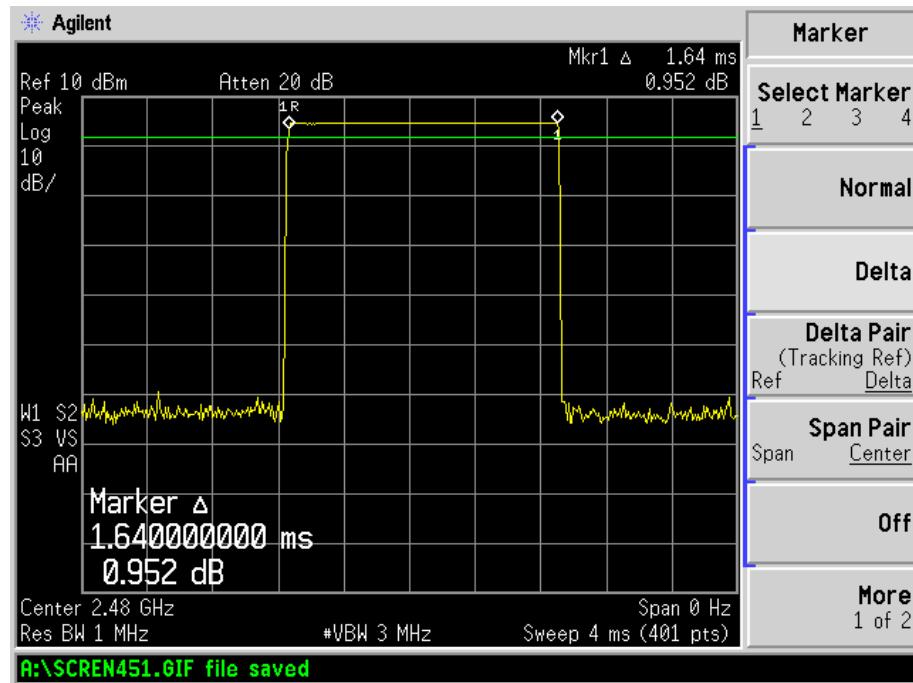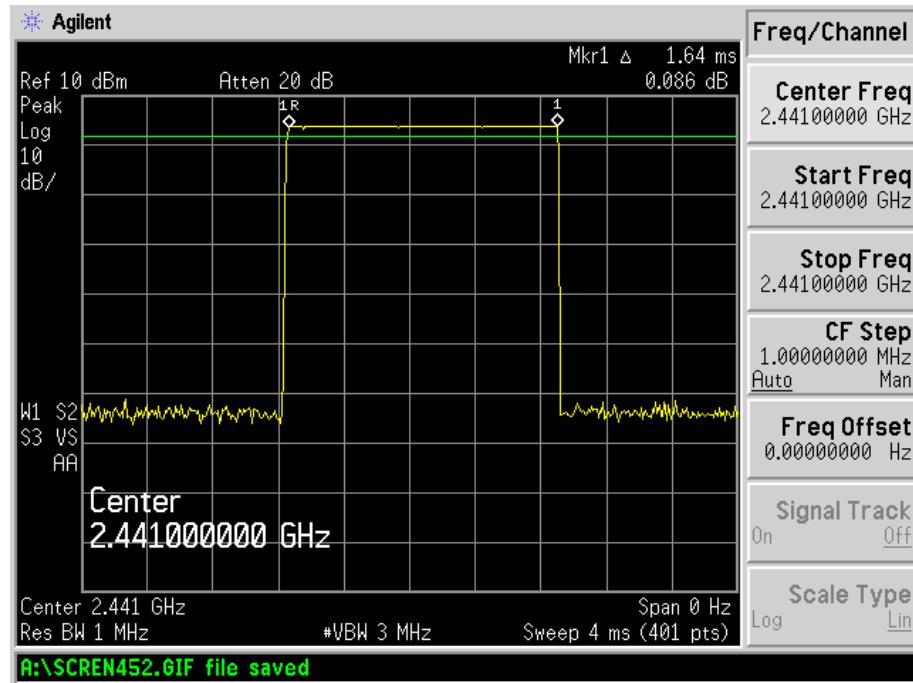




## DH5 time slot (Low, Middle, High Channels)

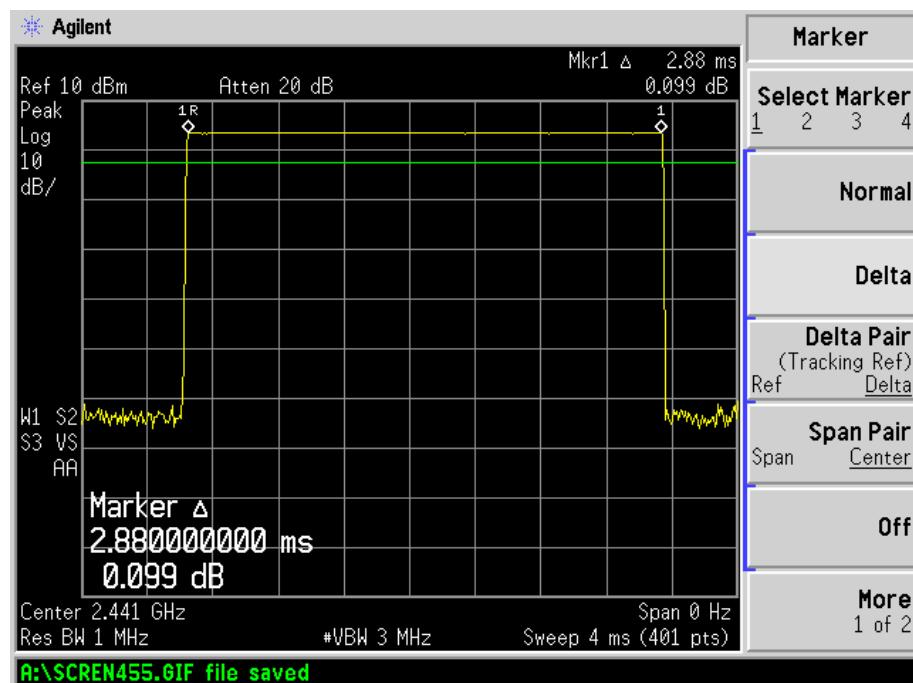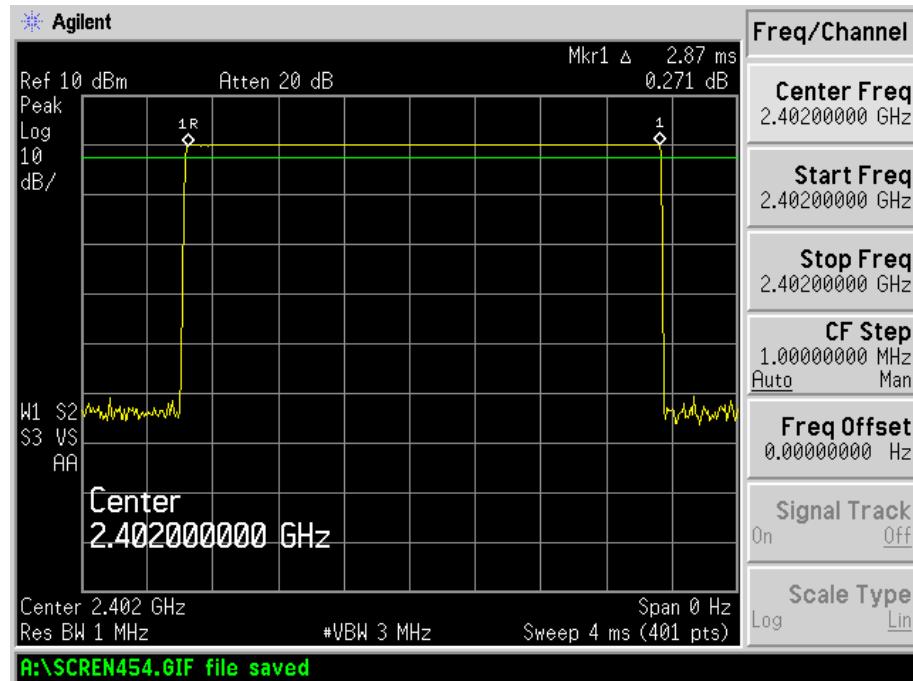


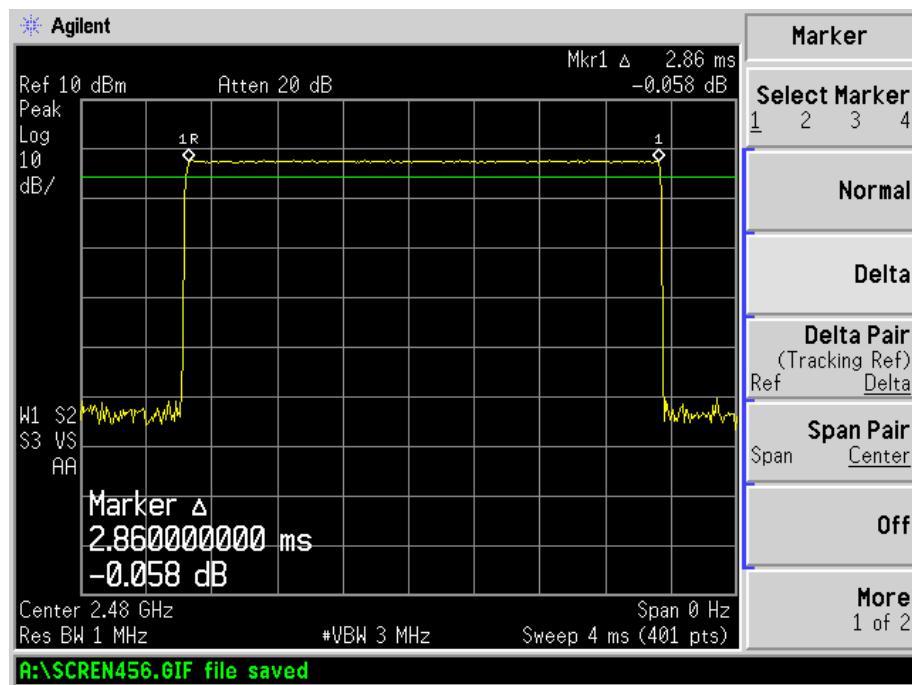



3DH1 time slot (Low, Middle, High Channels)

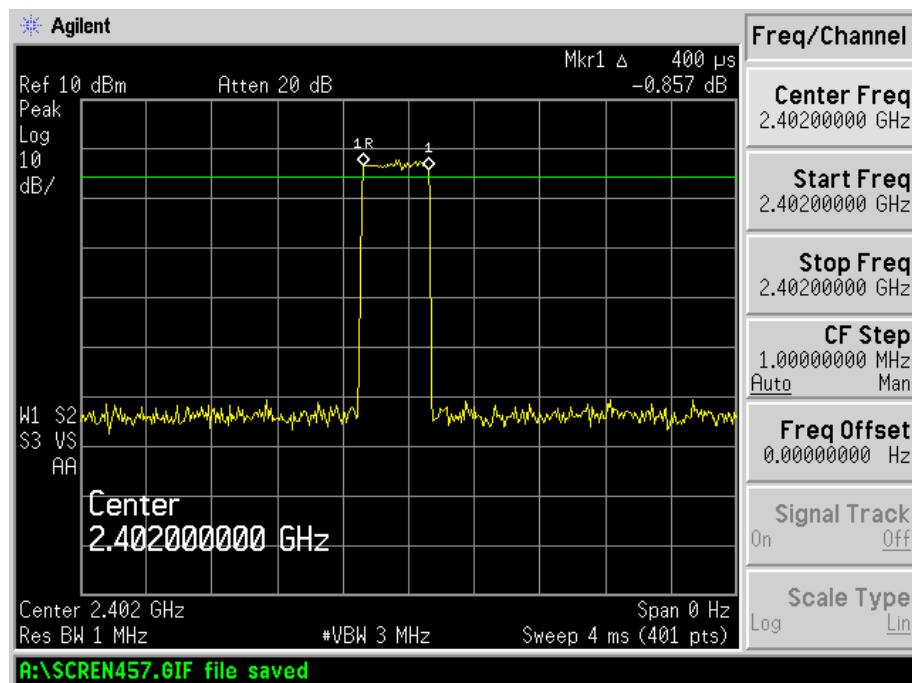

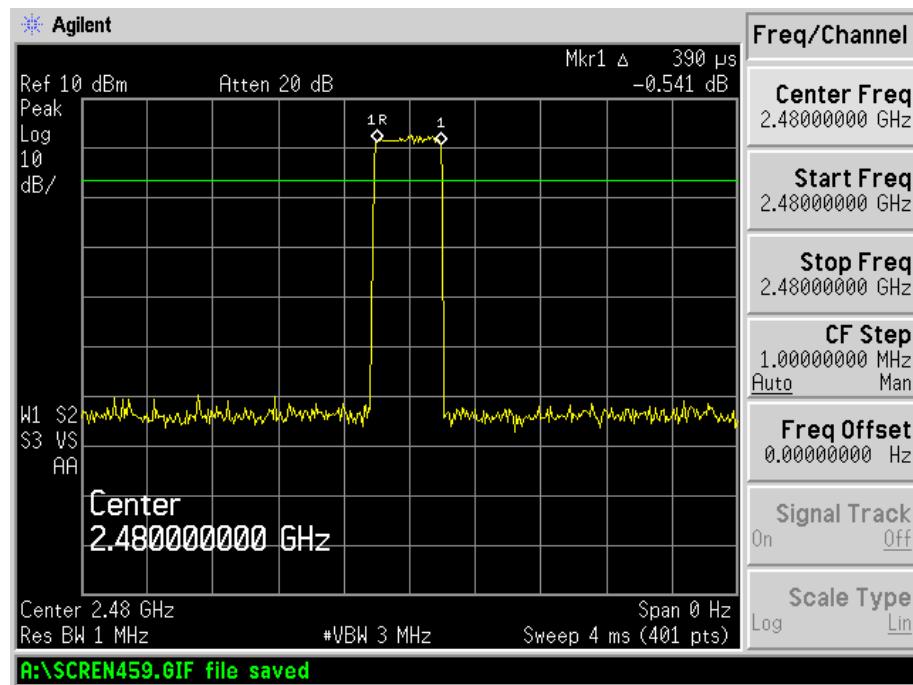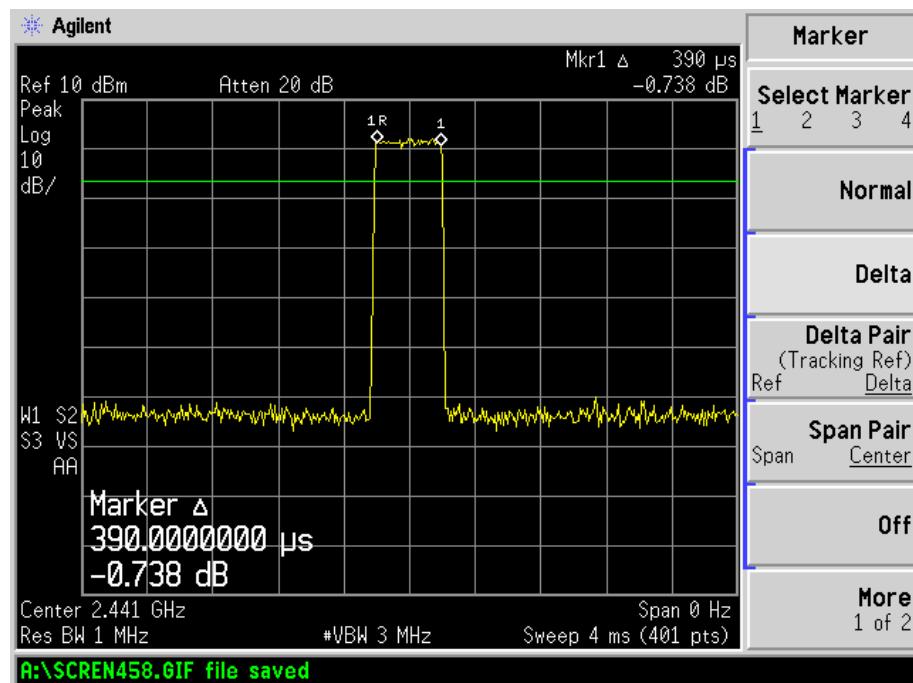




## 3DH3 time slot (Low, Middle, High Channels)

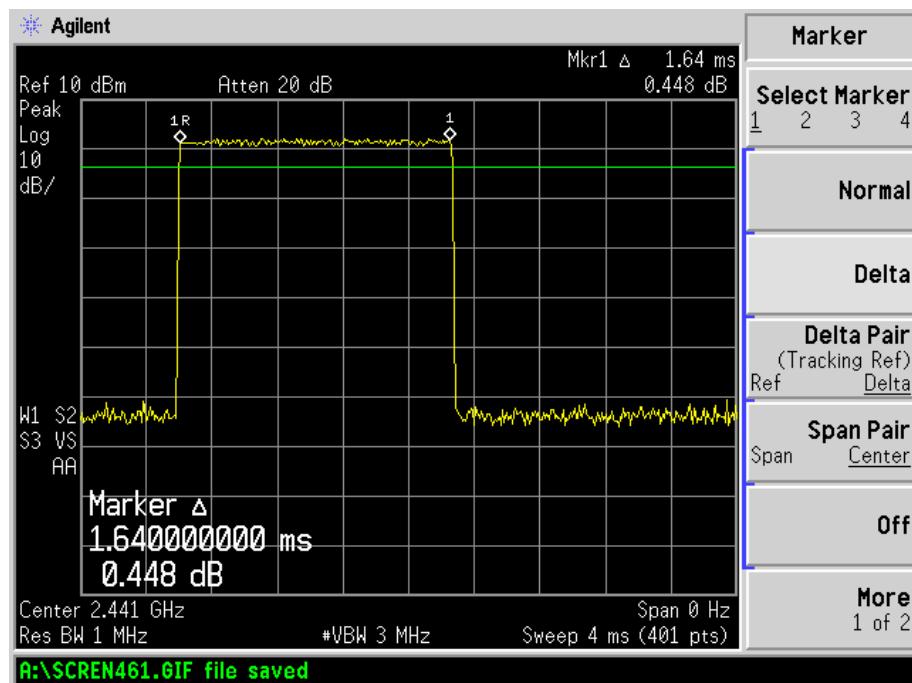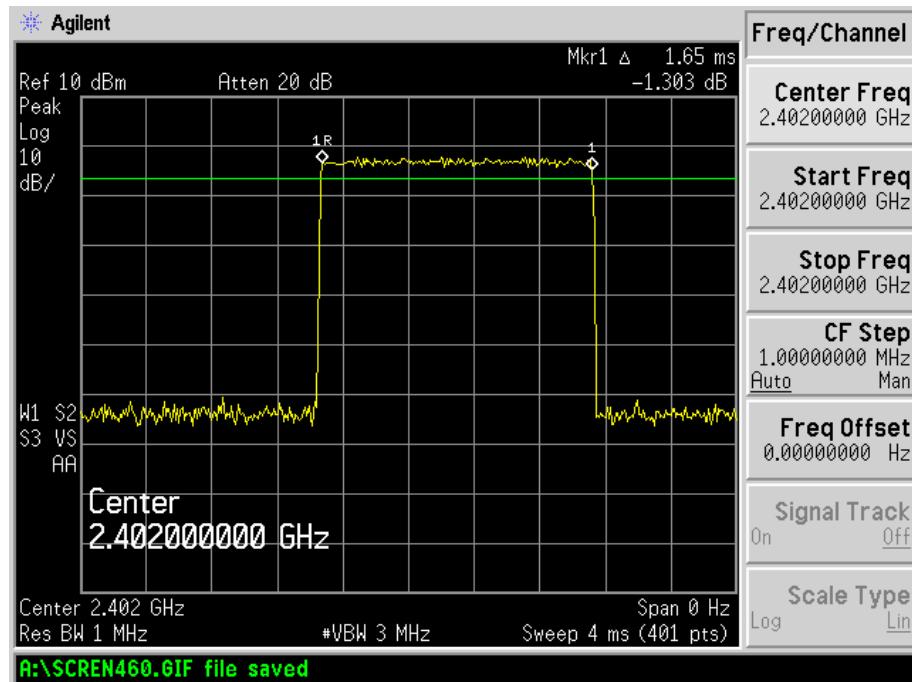

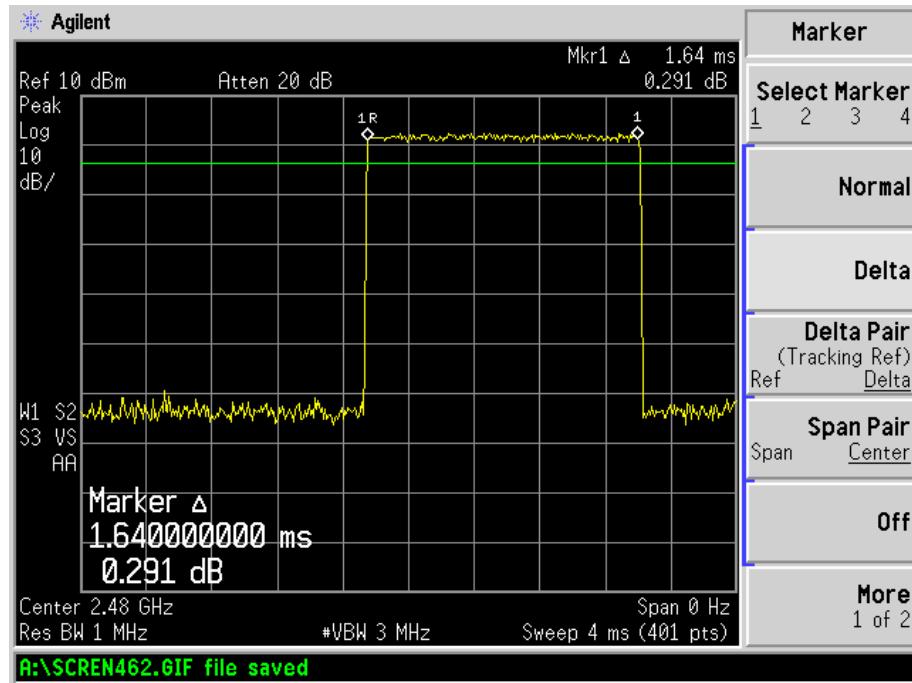

3DH5 time slot (Low, Middle, High Channels)

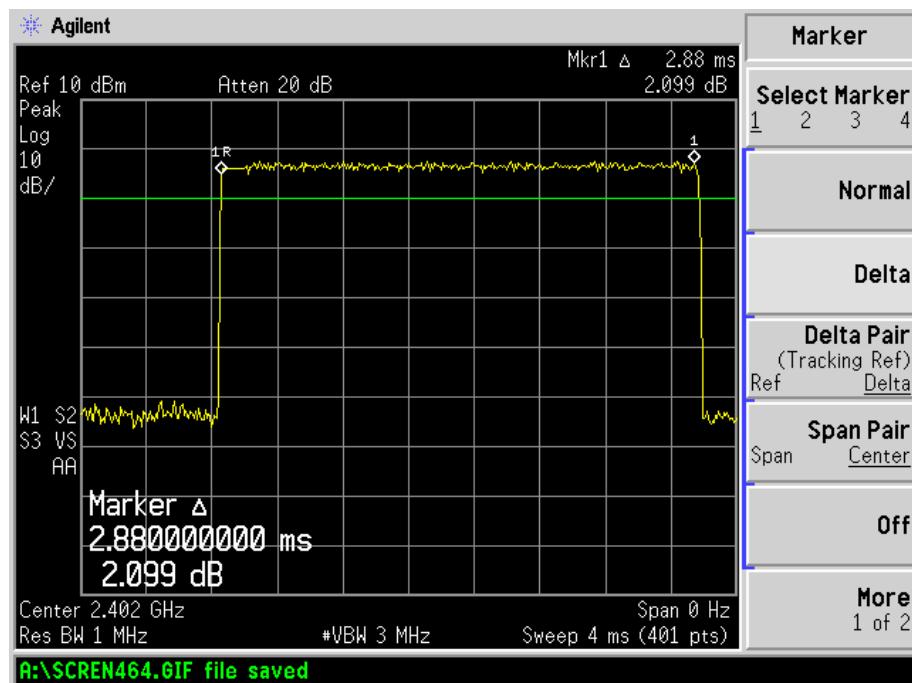

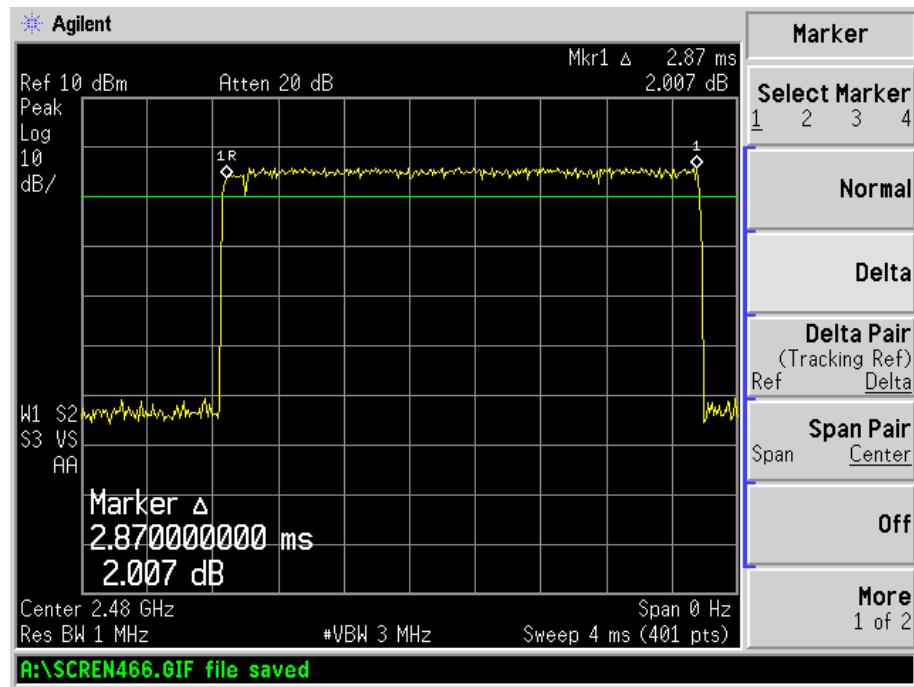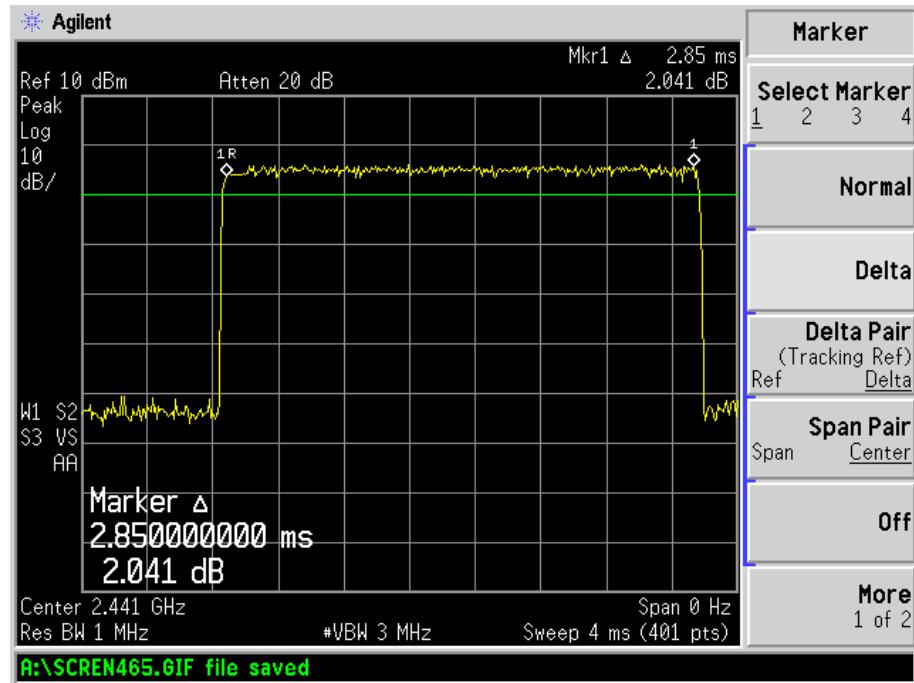

## 8. 20dB Bandwidth

### 8.1 Standard Applicable

According to 15.247(a)(1)(iii). For frequency hopping systems operating in the 2400MHz-2483.5 MHz no limit for 20dB bandwidth.

### 8.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2014-05-28	2015-05-27
Attenuator	ATTEN	ATS100-4-20	/	2014-05-28	2015-05-27

### 8.3 Test Procedure

According to the DA 00-705, the 20dB bandwidth test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW  $\geq$  1% of the 20 dB bandwidth

VBW  $\geq$  RBW

Sweep = auto; Detector function = peak

Trace = max hold

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down bandwidth of the emission.

### 8.4 Environmental Conditions


Temperature:	25 °C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

### 8.5 Summary of Test Results/Plots

Test Mode	Test Channel MHz	20 dB Bandwidth kHz	99% Bandwidth kHz	Limit kHz
GFSK	2402	886.323	844.6289	---
	2441	887.303	855.5451	---
	2480	888.442	841.0588	---
8DPSK	2402	1286	1189.6	---
	2441	1293	1177.7	---
	2480	1320	1198.4	---

For GFSK


Low Channel:

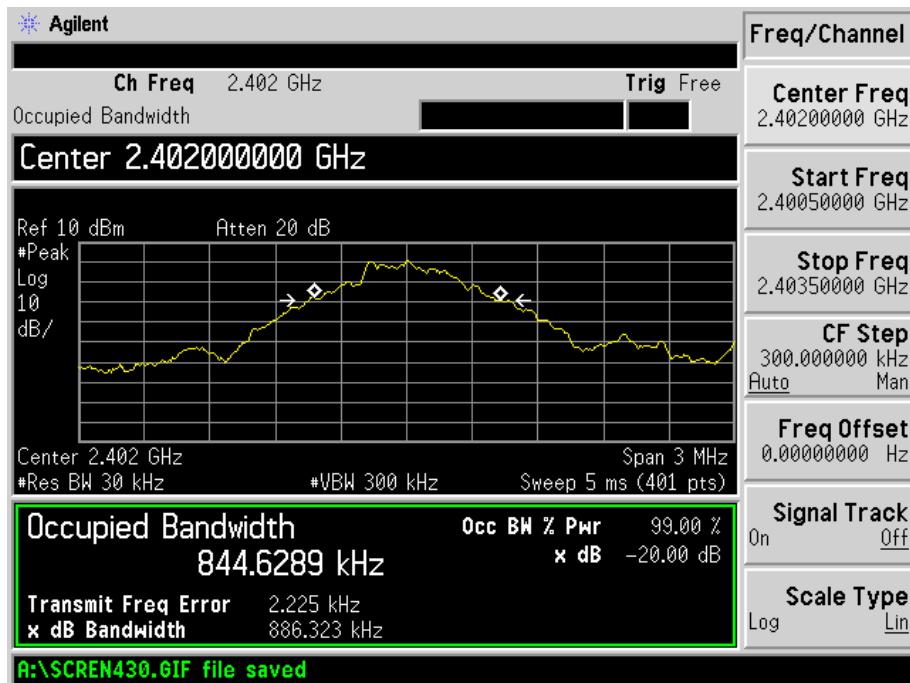

Middle Channel:




High Channel:

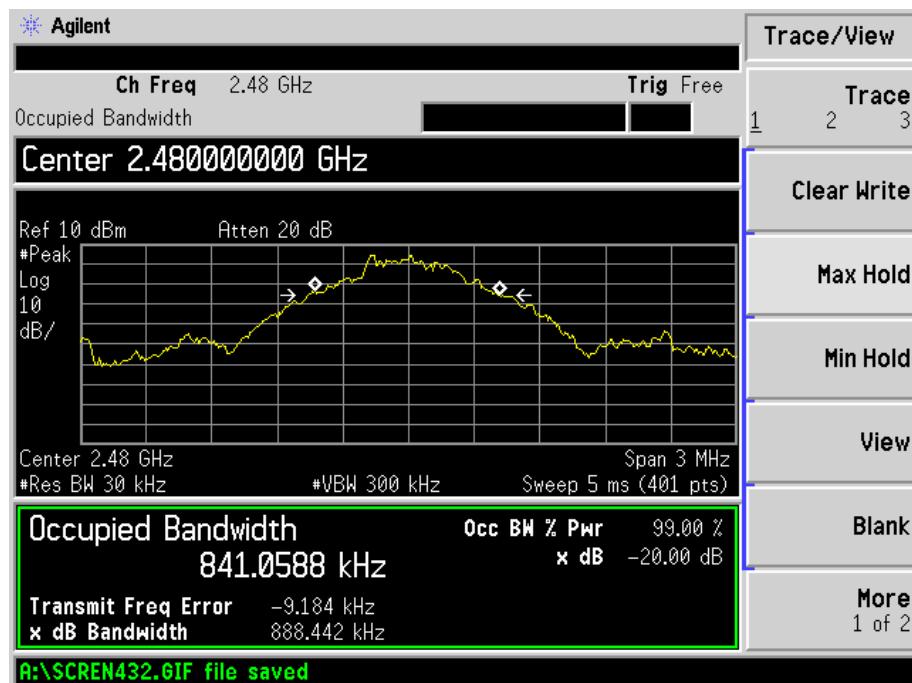


For 8DPSK


Low Channel:

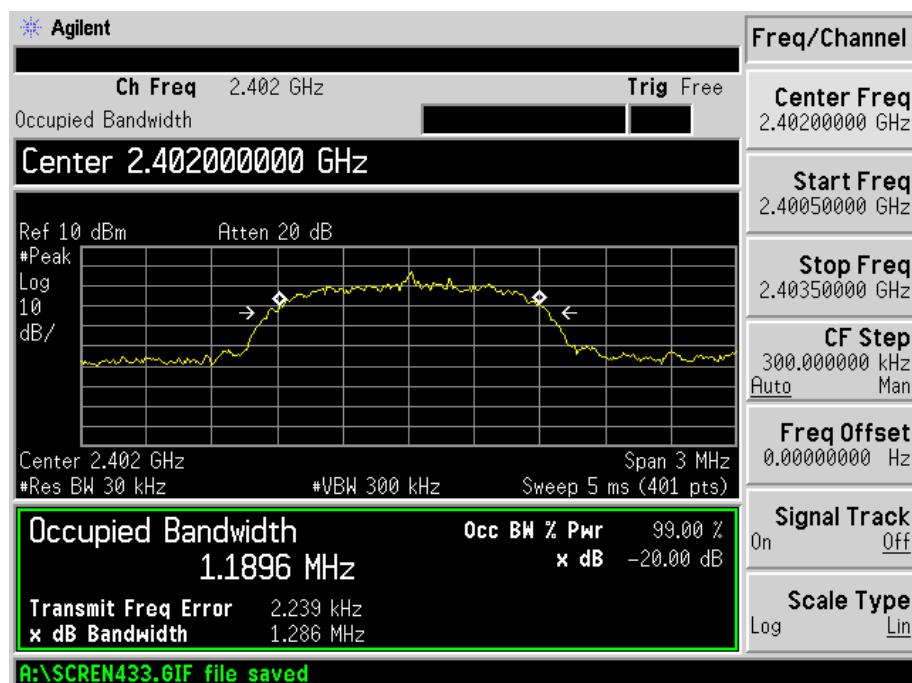

Middle Channel:

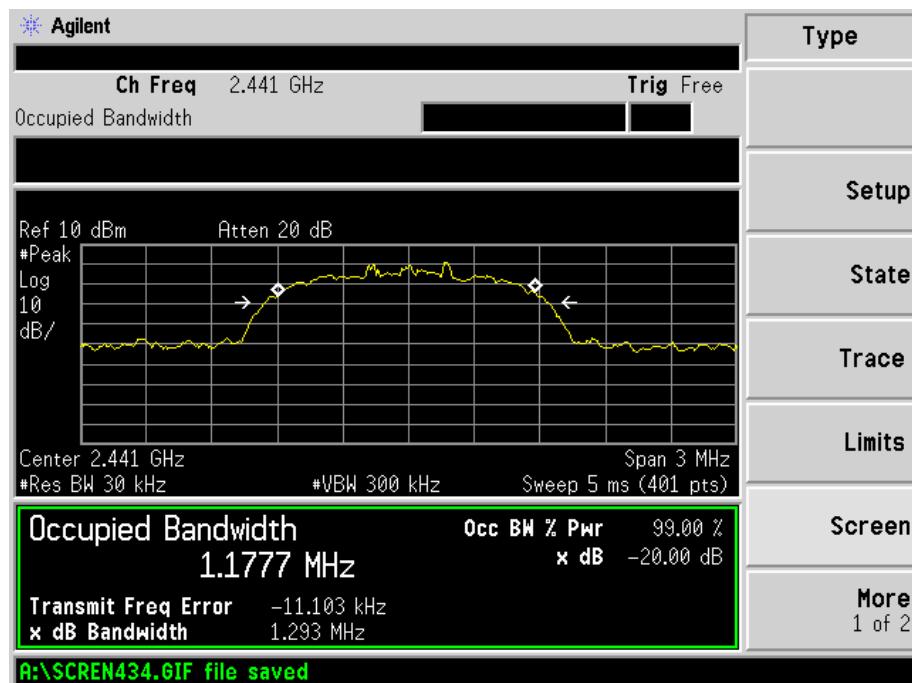

High Channel:

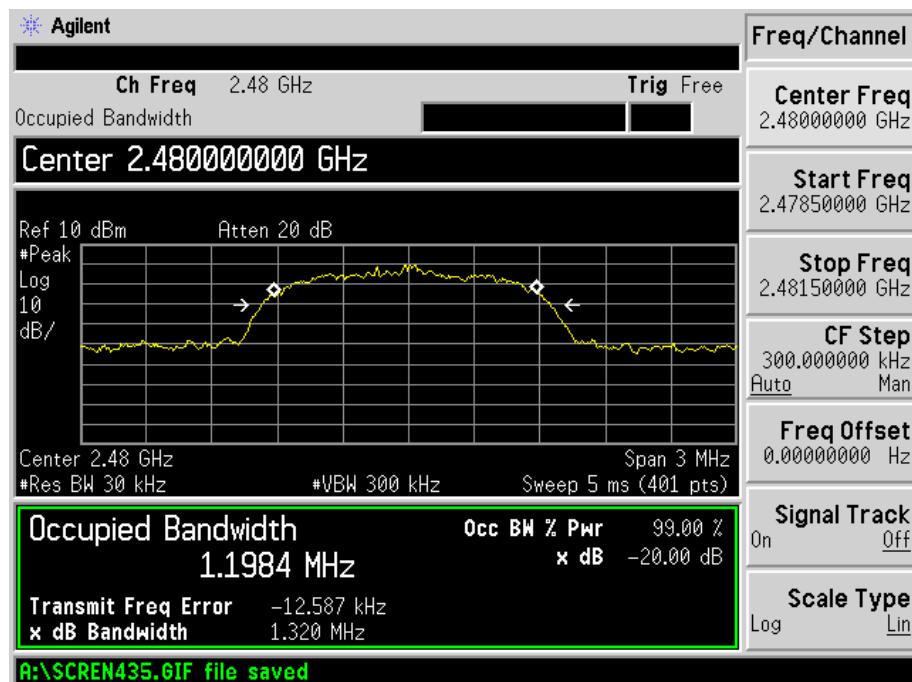

## 9. RF Output Power

---

### 9.1 Standard Applicable

According to 15.247(b)(1). For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

### 9.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2014-05-28	2015-05-27
Attenuator	ATTEN	ATS100-4-20	/	2014-05-28	2015-05-27

### 9.3 Test Procedure

According to the DA 00-705, the peak output power test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, the indicated level is the peak output power (the external attenuation and cable loss shall be considered).

### 9.4 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	55%
ATM Pressure:	1011 mbar

### 9.5 Summary of Test Results/Plots

For GFSK

Channel	Frequency MHz	Measured Value dBm	Output Power mW	Limit mW
Low Channel	2402	0.760	1.191	1000
Middle Channel	2441	3.946	2.481	1000
High Channel	2480	4.802	3.021	1000

For Pi/4 QDPSK

Channel	Frequency MHz	Measured Value dBm	Output Power mW	Limit mW
Low Channel	2402	-1.732	0.671	1000
Middle Channel	2441	2.364	1.724	1000
High Channel	2480	2.984	1.988	1000

For 8DPSK

Channel	Frequency MHz	Measured Value dBm	Output Power mW	Limit mW
Low Channel	2402	-1.596	0.693	1000
Middle Channel	2441	2.525	1.789	1000
High Channel	2480	3.199	2.089	1000

*Note: the antenna gain of 0dBi less than 6dBi maximum permission antenna gain value based on 1 watt peak output power limit.*

## 10. Field Strength of Spurious Emissions

---

### 10.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is  $\pm 5.10$  dB.

### 10.2 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

### 10.3 Test Equipment List and Details



Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2014-05-28	2015-05-27
EMI Test Receiver	R&S	ESVB	825471/005	2014-05-28	2015-05-27
Pre-amplifier	Agilent	8447F	3113A06717	2014-05-28	2015-05-27
Pre-amplifier	Compliance Direction	PAP-0118	24002	2014-05-28	2015-05-27
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2014-05-24	2015-05-23
Horn Antenna	ETS	3117	00086197	2014-05-24	2015-05-23
Horn Antenna	ETS	3116B	00088203	2014-05-24	2015-05-23
Loop Antenna	SCHWARZECK	HFRA 5165	9365	2014-05-24	2015-05-23

## 10.4 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

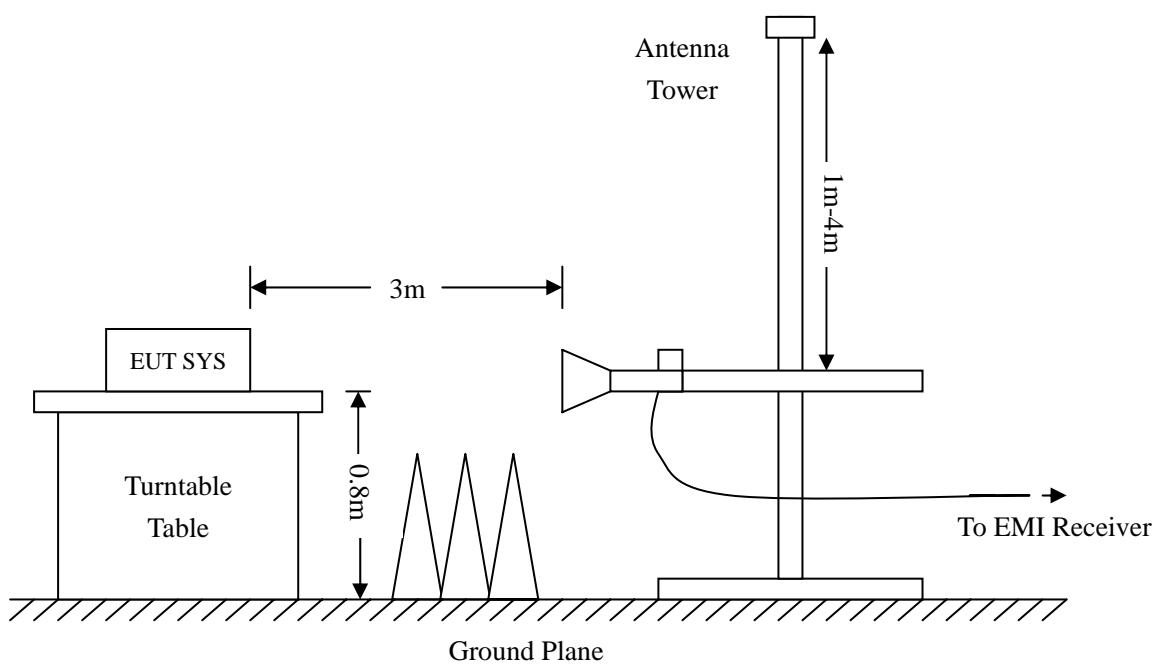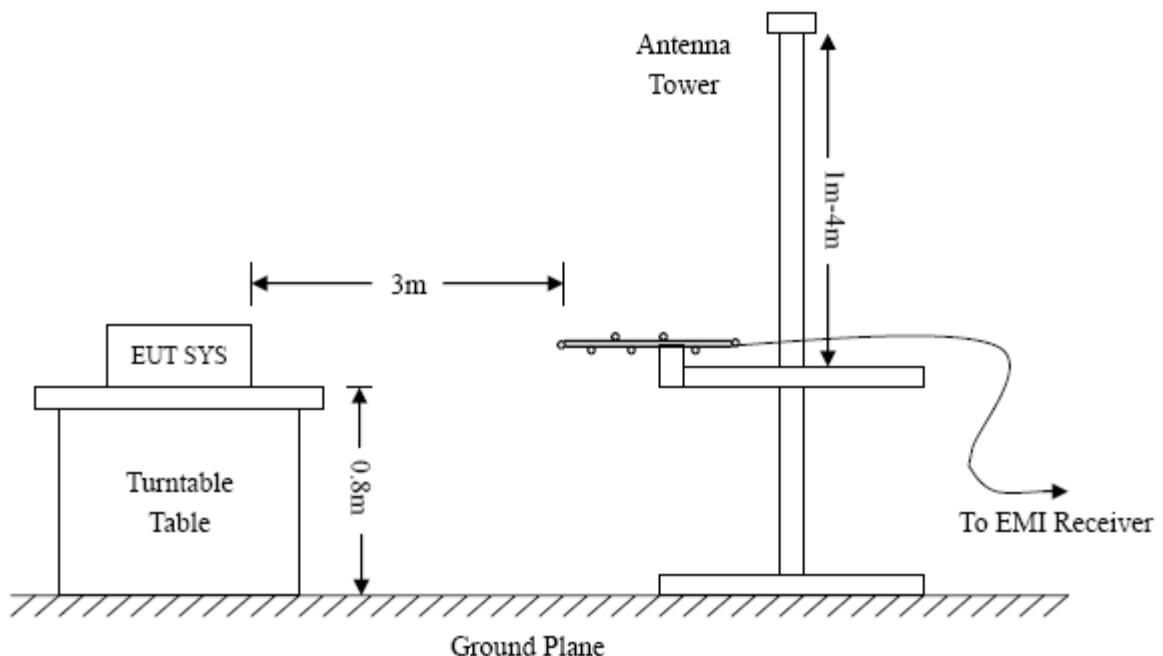

Frequency :9kHz-30MHz	Frequency :30MHz-1GHz	Frequency :Above 1GHz
RBW=10KHz,	RBW=120KHz,	RBW=1MHz,
VBW =30KHz	VBW=300KHz	VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto	Sweep time= Auto	Sweep time= Auto
Trace = max hold	Trace = max hold	Trace = max hold
Detector function = peak	Detector function = peak, QP	Detector function = peak, AV

## 10.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$


## 10.6 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

## 10.7 Summary of Test Results/Plots


According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst cases:

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*

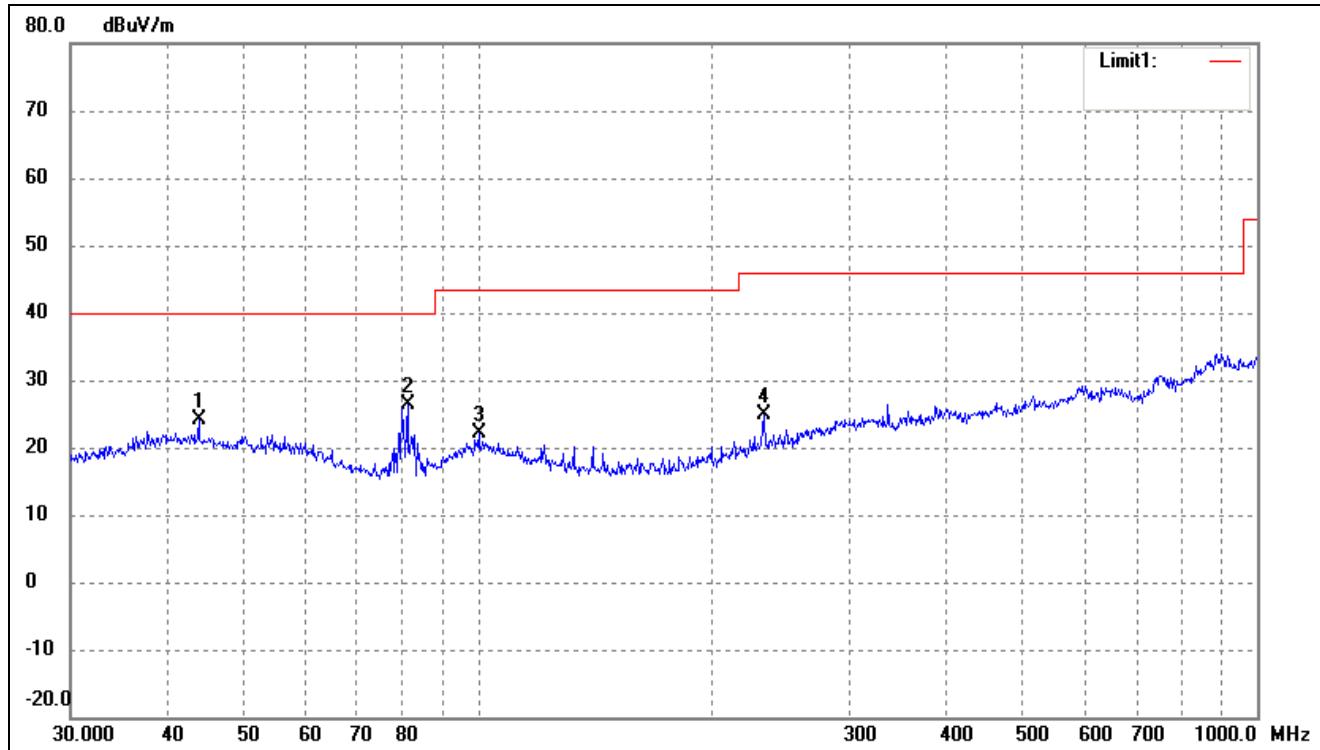
**Plot of Radiated Emissions Test Data (30MHz to 1GHz)**EUT: *Bluetooth Carkit*Tested Model: *BT Drive Free 414*Operating Condition: *Charging*Comment: *AC 120V/60Hz; USB 5V charging*Test Specification: *Horizontal*

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	43.8119	17.15	6.88	24.03	40.00	-15.97	153	100	peak
2	81.2117	25.01	1.32	26.33	40.00	-13.67	264	100	peak
3	100.2286	15.92	6.10	22.02	43.50	-21.48	47	100	peak
4	232.5318	19.06	5.87	24.93	46.00	-21.07	55	100	peak

Test Specification: Vertical

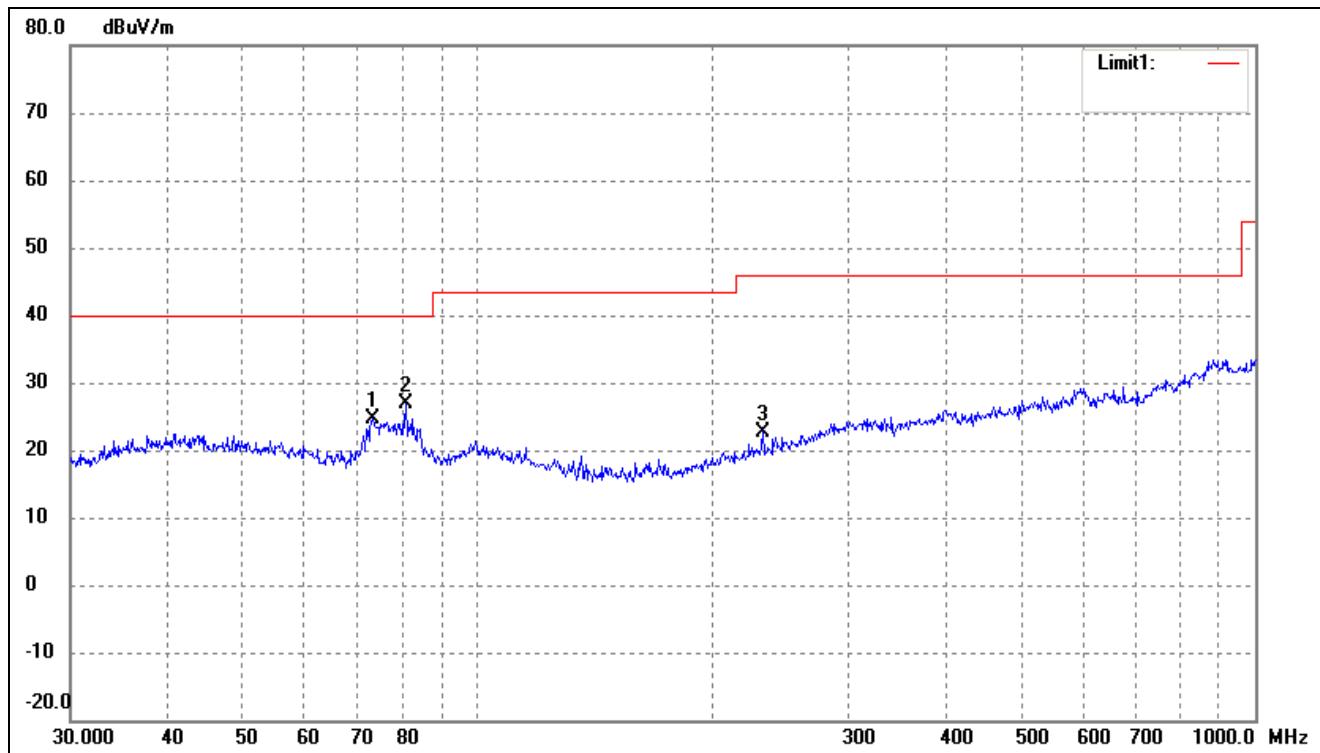


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	73.3593	22.85	1.79	24.64	40.00	-15.36	147	100	peak
2	80.9275	25.76	1.24	27.00	40.00	-13.00	58	100	peak
3	232.5318	16.88	5.87	22.75	46.00	-23.25	63	100	peak

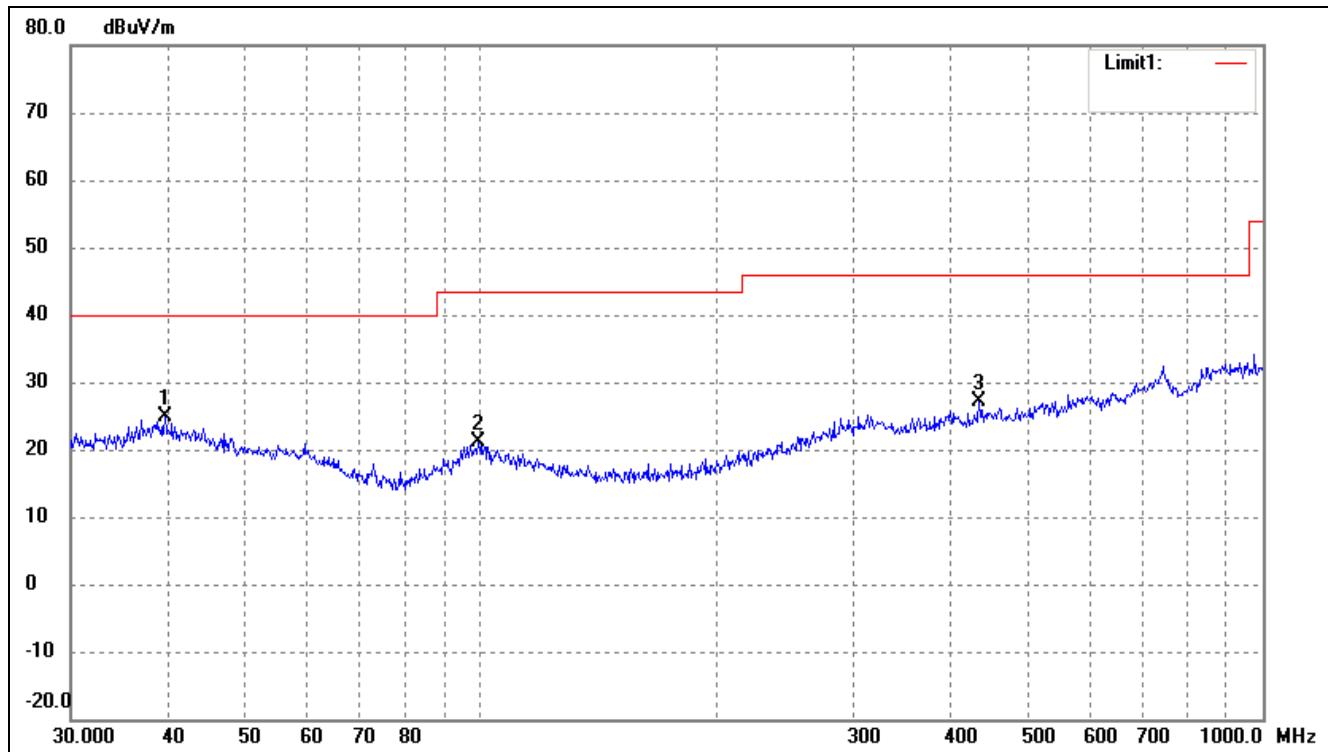**Plot of Radiated Emissions Test Data (30MHz to 1GHz)**EUT: *Bluetooth Carkit*Tested Model: *BT Drive Free 414*Operating Condition: *Transmitting Low Channel (2402MHz)*Comment: *Battery DC3.7V*Test Specification: *Horizontal*

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	39.5757	17.68	7.13	24.81	40.00	-15.19	95	100	peak
2	99.5281	15.13	6.01	21.14	43.50	-22.36	316	100	peak
3	434.0651	17.29	9.83	27.12	46.00	-18.88	223	100	peak


Test Specification: Vertical

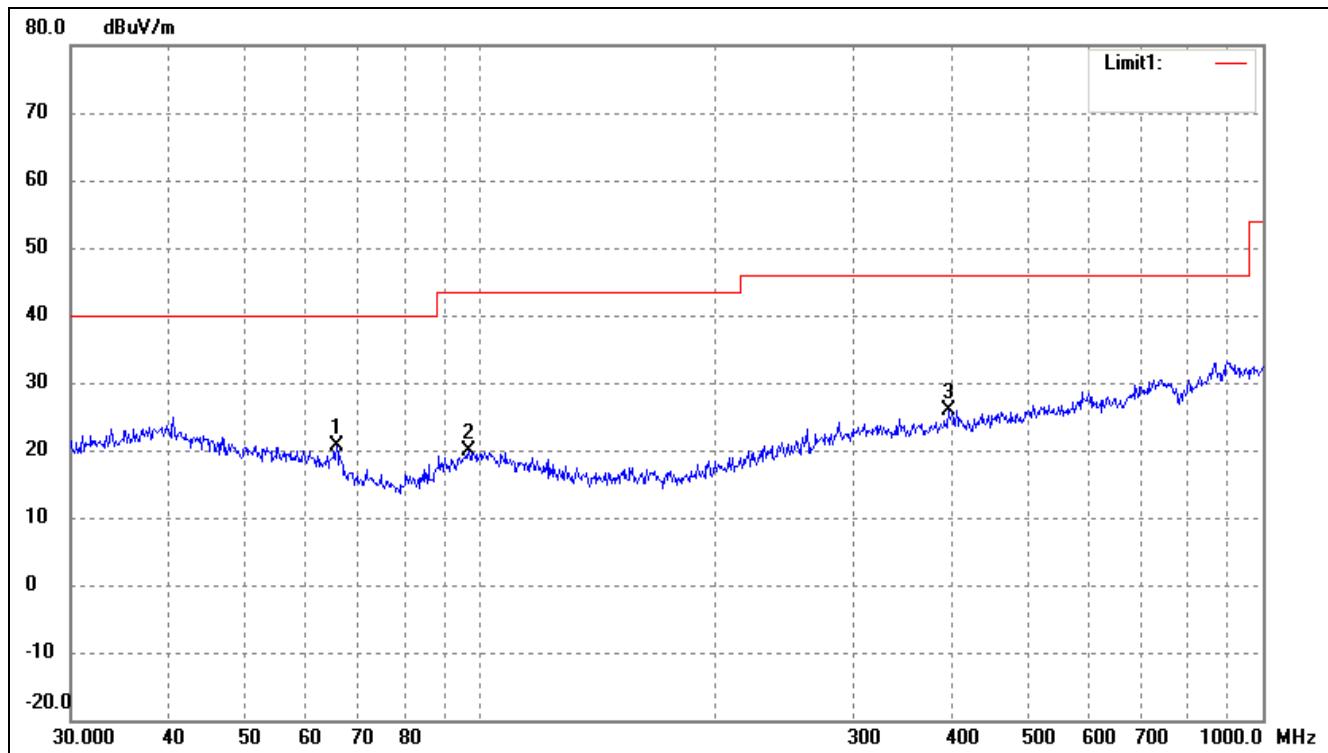

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	65.5727	17.06	3.60	20.66	40.00	-19.34	95	100	peak
2	96.7749	14.61	5.32	19.93	43.50	-23.57	310	100	peak
3	396.2415	16.05	9.95	26.00	46.00	-20.00	168	100	peak


*Operating Condition:* Transmitting Middle Channel (2441MHz)  
*Comment:* Battery DC3.7V

*Test Specification:* Horizontal

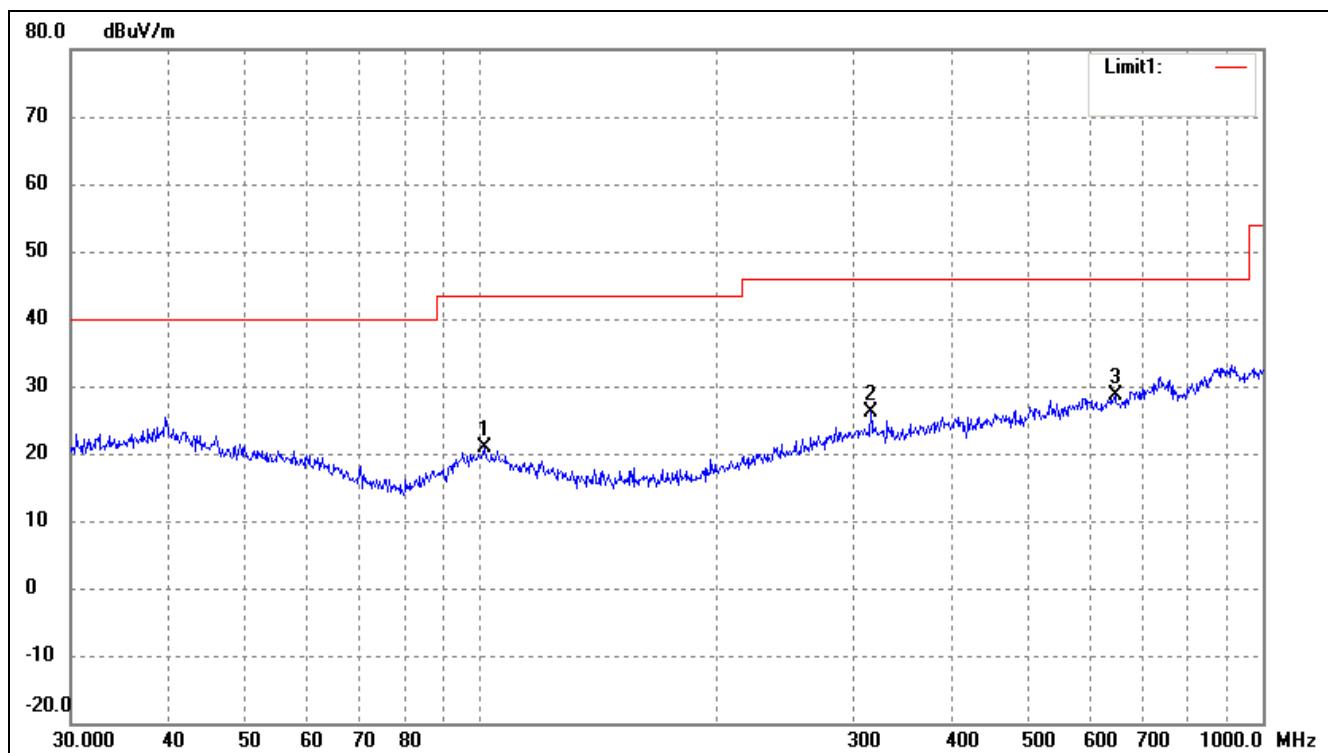

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	( °)	(cm)	
1	101.2885	14.99	5.99	20.98	43.50	-22.52	98	100	peak
2	315.4808	16.96	9.27	26.23	46.00	-19.77	215	100	peak
3	647.3856	16.28	12.45	28.73	46.00	-17.27	321	100	peak


Test Specification: Vertical

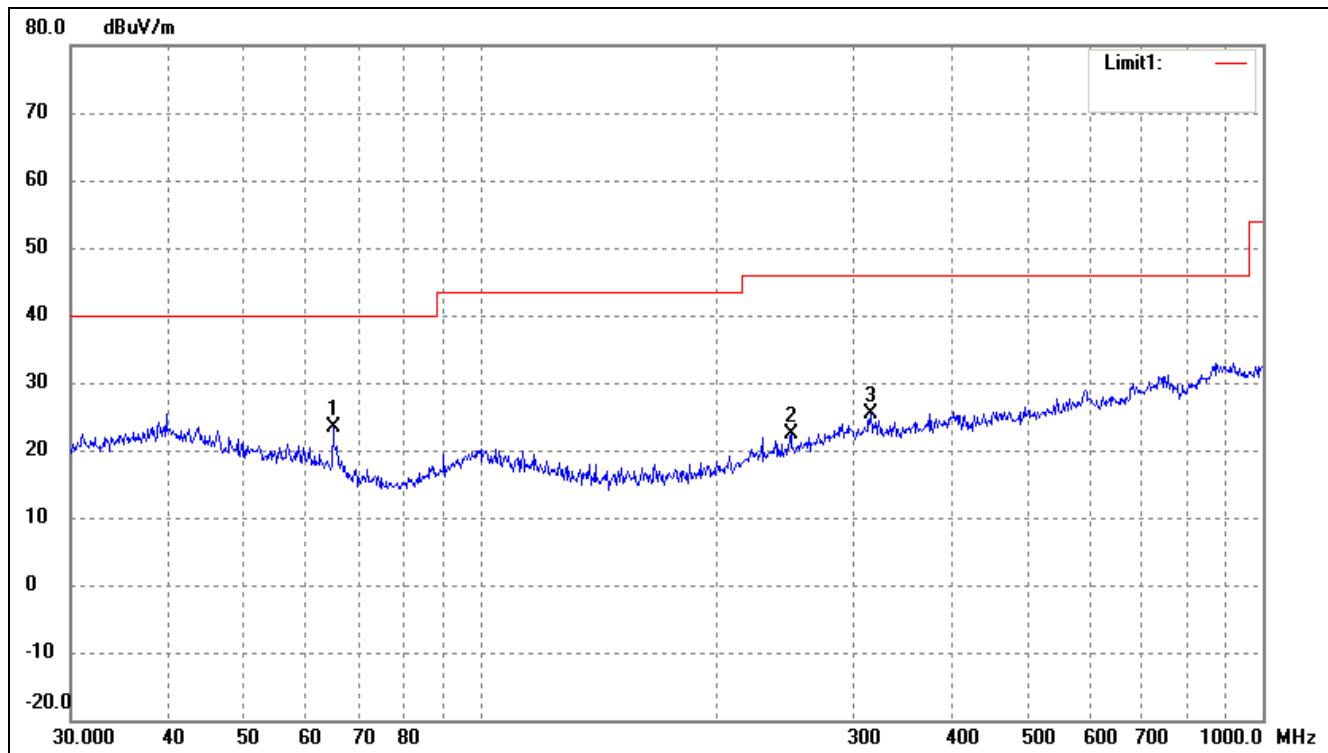

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	( °)	(cm)	
1	64.8865	19.56	3.82	23.38	40.00	-16.62	385	100	peak
2	249.4250	15.81	6.68	22.49	46.00	-23.51	212	100	peak
3	315.4808	16.10	9.27	25.37	46.00	-20.63	331	100	peak


*Operating Condition:* Transmitting High Channel (2480MHz)  
*Comment:* Battery DC3.7V

*Test Specification:* Horizontal

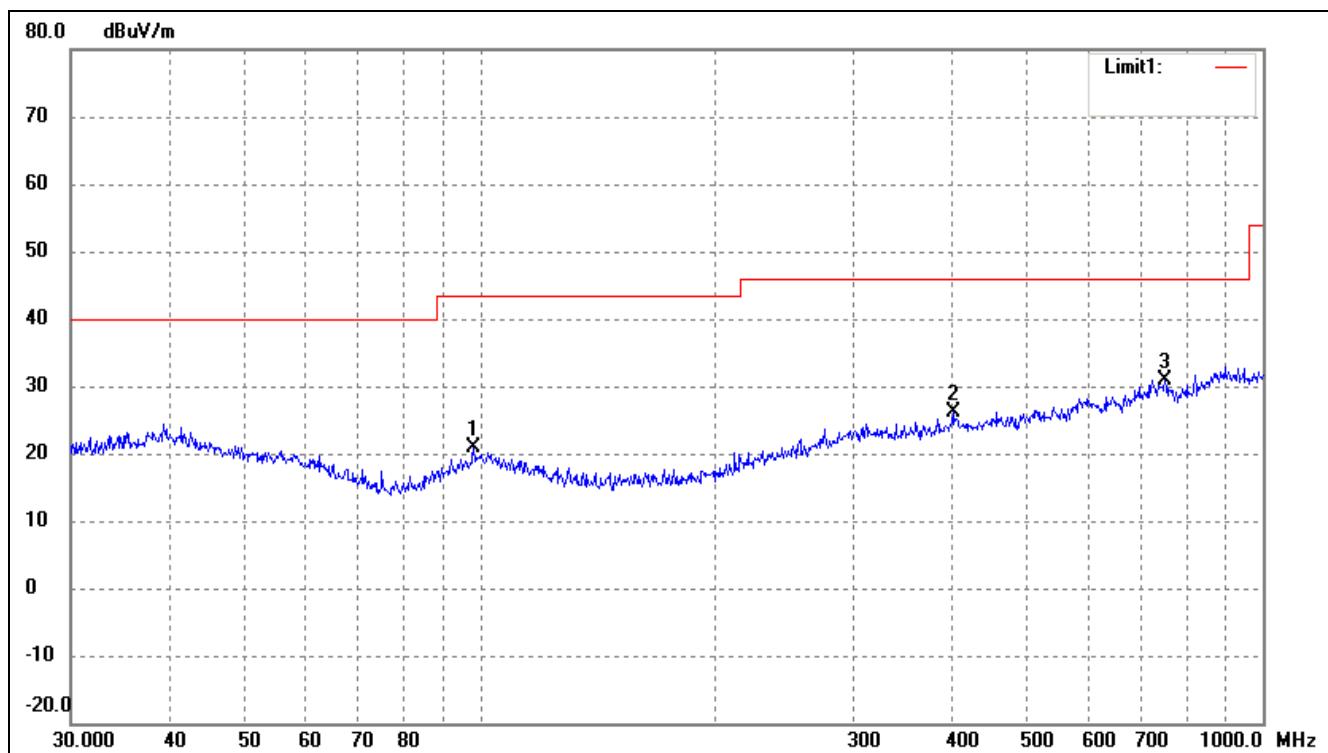

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( °)	Height (cm)	Remark
1	98.1419	15.25	5.67	20.92	43.50	-22.58	301	100	peak
2	401.8385	16.04	10.06	26.10	46.00	-19.90	323	100	peak
3	750.1083	16.85	14.10	30.95	46.00	-15.05	39	100	peak

Test Specification: Vertical

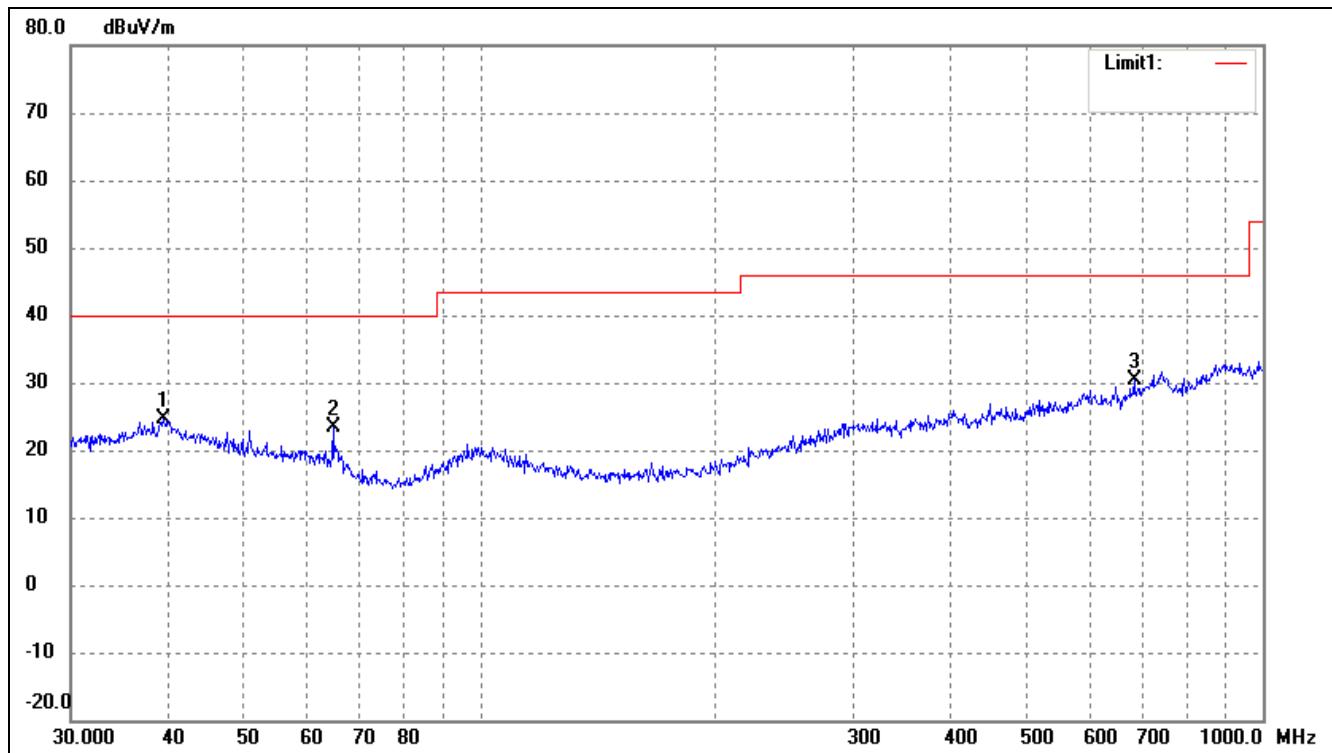

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	39.4372	15.56	9.16	24.72	40.00	-15.28	54	100	peak
2	64.8865	19.63	3.82	23.45	40.00	-16.55	135	100	peak
3	684.7454	16.88	13.39	30.27	46.00	-15.73	97	100	peak

*Spurious Emissions Above 1GHz*

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2402MHz							
4804	55.91	-3.59	52.32	74	-21.68	H	PK
4804	44.82	-3.59	41.23	54	-12.77	H	AV
7206	50.83	-0.52	50.31	74	-23.69	H	PK
7206	40.36	-0.52	39.84	54	-14.16	H	AV
4804	56.79	-3.59	53.20	74	-20.80	V	PK
4804	45.87	-3.59	42.28	54	-11.72	V	AV
7206	51.91	-0.52	51.39	74	-22.61	V	PK
7206	44.33	-0.52	43.81	54	-10.19	V	AV
Middle Channel-2441MHz							
4882	57.36	-3.49	53.87	74	-20.13	H	PK
4882	46.14	-3.49	42.65	54	-11.35	H	AV
7323	50.62	-0.47	50.15	74	-23.85	H	PK
7323	41.11	-0.47	40.64	54	-13.36	H	AV
4882	53.82	-3.49	50.33	74	-23.67	V	PK
4882	43.59	-3.49	40.10	54	-13.90	V	AV
7323	51.71	-0.47	51.24	74	-22.76	V	PK
7323	41.52	-0.47	41.05	54	-12.95	V	AV
High Channel-2480MHz							
4960	56.61	-3.41	53.20	74	-20.8	H	PK
4960	45.62	-3.41	42.21	54	-11.79	H	AV
7440	50.89	-0.42	50.47	74	-23.53	H	PK
7440	42.00	-0.42	41.58	54	-12.42	H	AV
4960	54.61	-3.41	51.2	74	-22.80	V	PK
4960	44.53	-3.41	41.12	54	-12.88	V	AV
7440	52.70	-0.42	52.28	74	-21.72	V	PK
7440	41.39	-0.42	40.97	54	-13.03	V	AV

*Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 3<sup>th</sup> Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*

*The measurements greater than 20dB below the limit from 9kHz to 30MHz..*

## 11. Out of Band Emissions

---

### 11.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### 11.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2014-05-28	2015-05-27
EMI Test Receiver	R&S	ESVB	825471/005	2014-05-28	2015-05-27
Pre-amplifier	Agilent	8447F	3113A06717	2014-05-28	2015-05-27
Pre-amplifier	Compliance Direction	PAP-0118	24002	2014-05-28	2015-05-27
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2014-05-24	2015-05-23
Horn Antenna	ETS	3117	00086197	2014-05-24	2015-05-23
Spectrum Analyzer	Agilent	E4402B	US41192821	2014-05-28	2015-05-27
Attenuator	ATTEN	ATS100-4-20	/	2014-05-28	2015-05-27

### 11.3 Test Procedure

According to the DA 00-705, the band-edge radiated test method as follows.

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2410MHz for low bandedge, 2470MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

According to the DA 00-705, the band-edge conducted test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2380MHz to 2410MHz for low bandedge, 2470MHz to 2500MHz for the high bandedge)

RBW = 100kHz, VBW = 300kHz

Sweep = auto; Detector function = peak; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the limit specified in this section (at least 20dB attenuation).

#### 11.4 Environmental Conditions

Temperature:	23°C
Relative Humidity:	54%
ATM Pressure:	1011 mbar


#### 11.5 Summary of Test Results/Plots

Please refer to the test plots as below.

Bandedge (Radiated)


Lowest Bandedge

Vertical (Worst case)

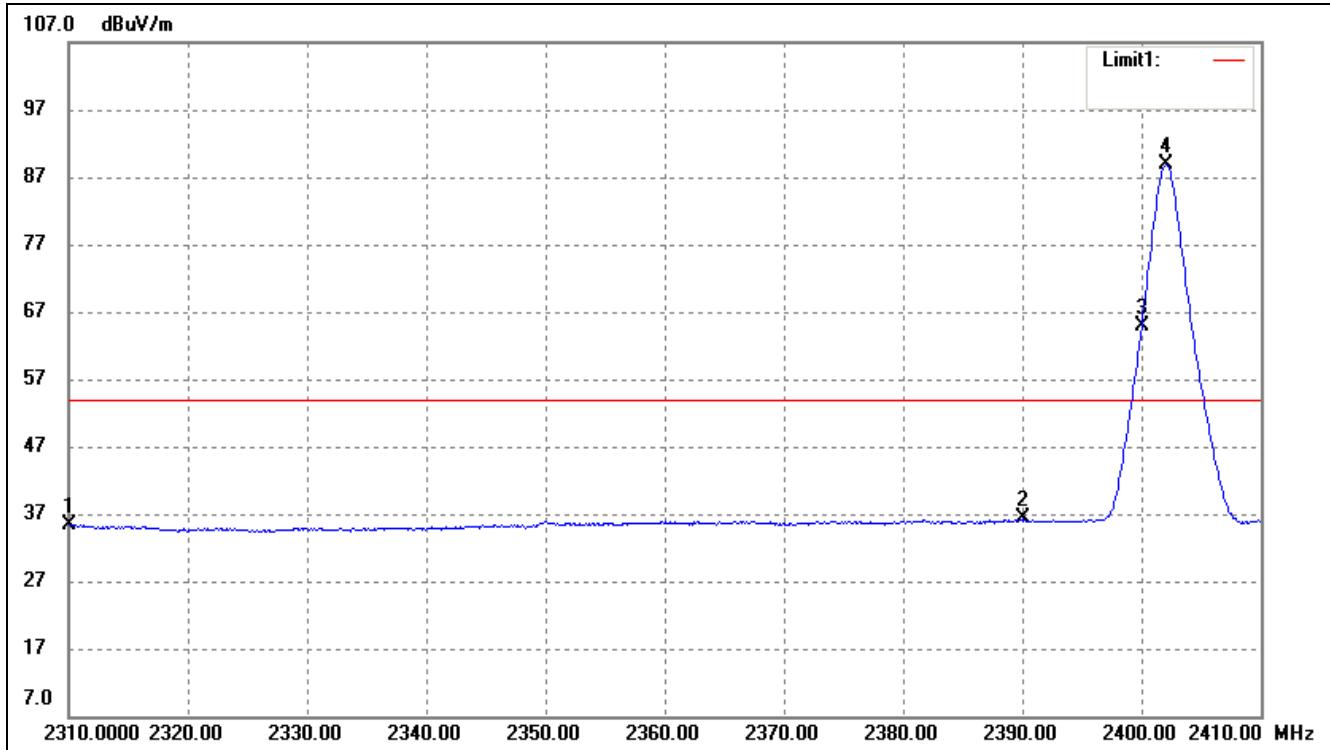

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2310.000	18.93	16.34	35.27	54.00	-18.73	Average Detector
	2310.000	30.96	16.34	47.30	74.00	-26.70	Peak Detector
2	2390.000	19.24	17.03	36.27	54.00	-17.73	Average Detector
	2390.000	31.42	17.03	48.45	74.00	-25.55	Peak Detector
3	2400.000	47.89	17.11	65.00	Delta=23.89dBc		Average Detector
4	2402.000	71.77	17.12	88.89			Average Detector


Highest Bandedge  
Vertical (Worst case)

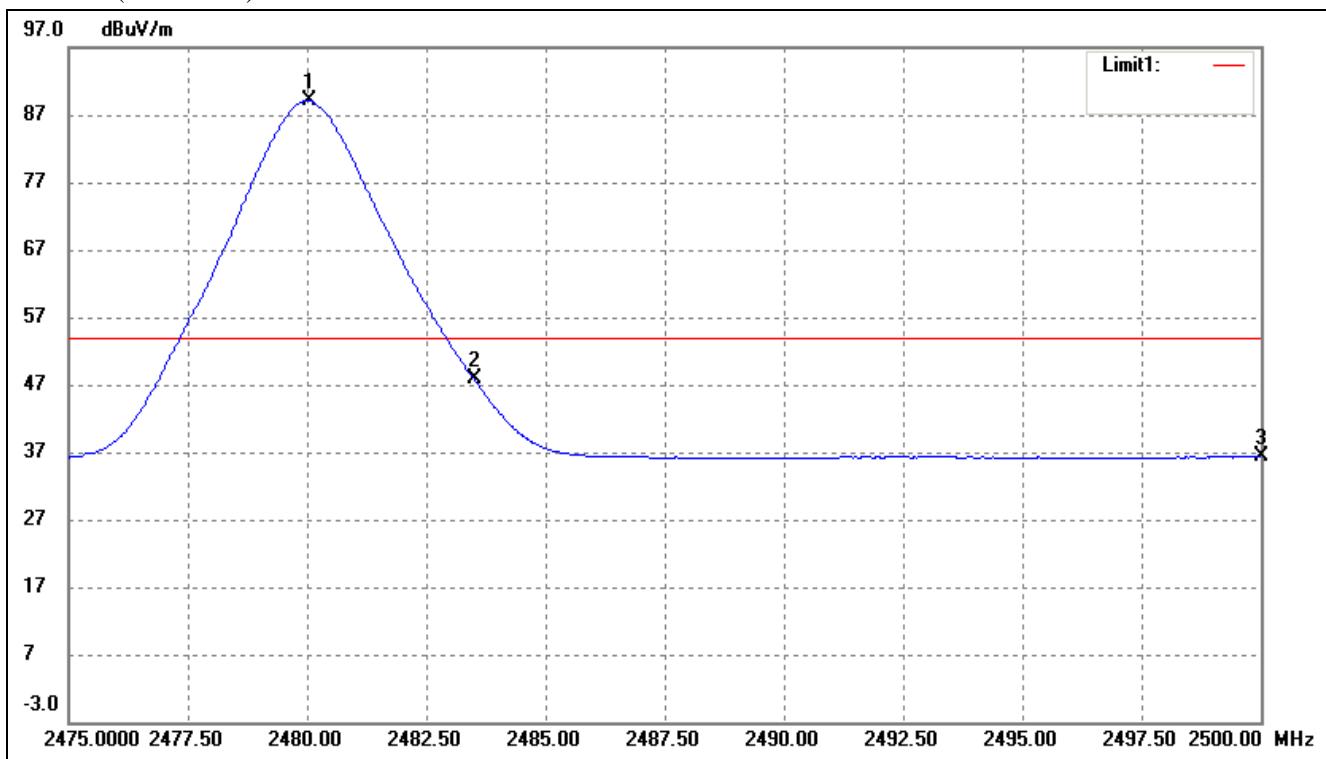


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.050	71.42	17.71	89.13	/	/	Average Detector
	2480.000	79.02	17.71	96.73	/	/	Peak Detector
2	2483.500	Delta = 51.67 dBc		37.46	54.00	-16.54	Average Detector
	2483.500			45.06	74.00	-28.94	Peak Detector
3	2500.000	18.44	17.86	36.30	54.00	-17.70	Average Detector
	2500.000	30.07	17.86	47.93	74.00	-26.07	Peak Detector

Bandedge (Conducted)

Lowest Bandedge

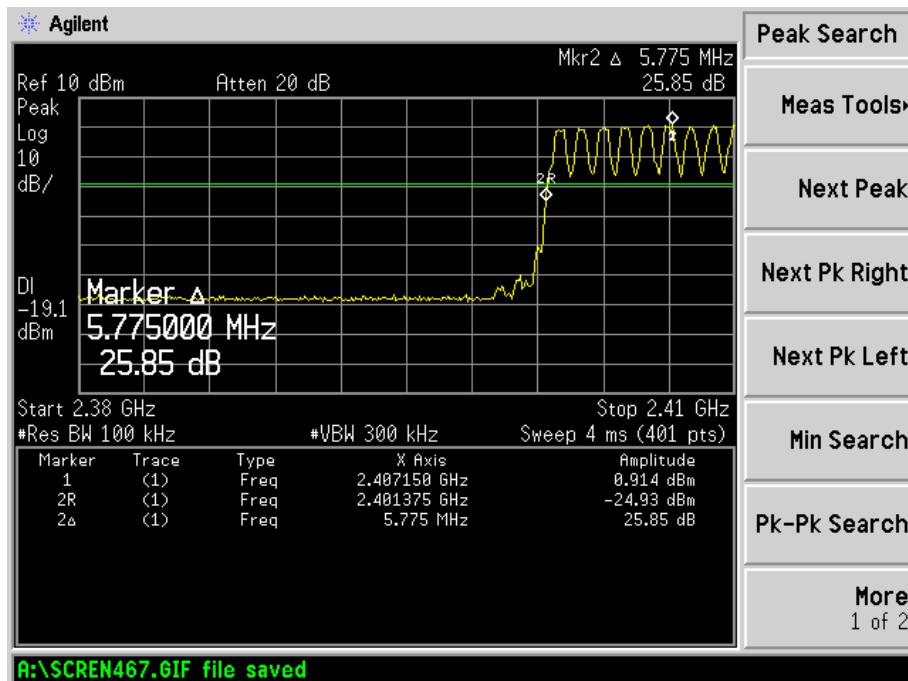

Highest Bandedge

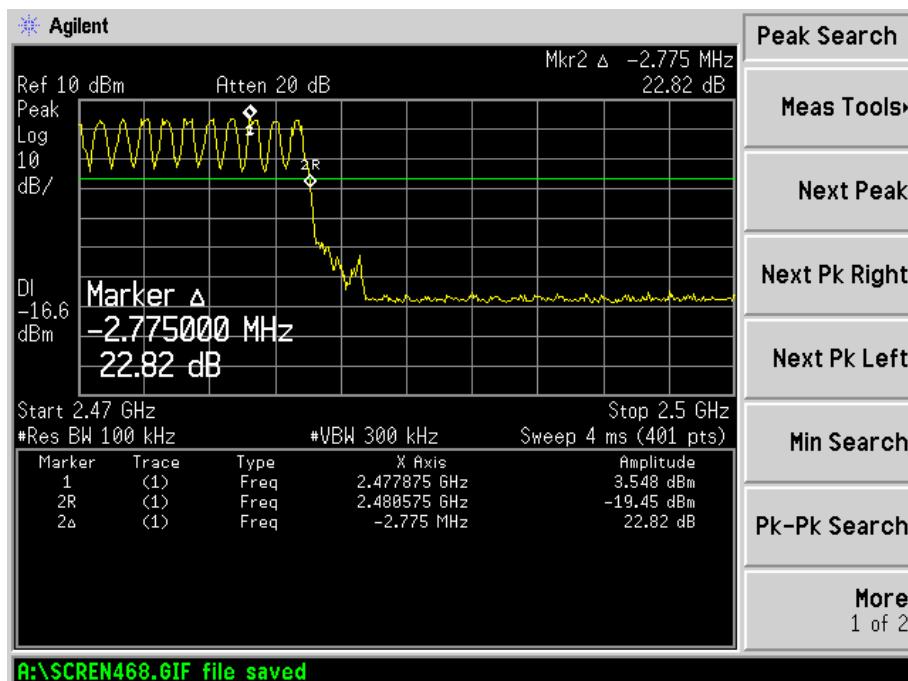

## 12. Conducted Emissions

### 12.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is  $\pm 2.88$  dB.

### 12.2 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2014-05-28	2015-05-27
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2014-05-28	2015-05-27
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2014-05-28	2015-05-27

### 12.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

### 12.4 Basic Test Setup Block Diagram

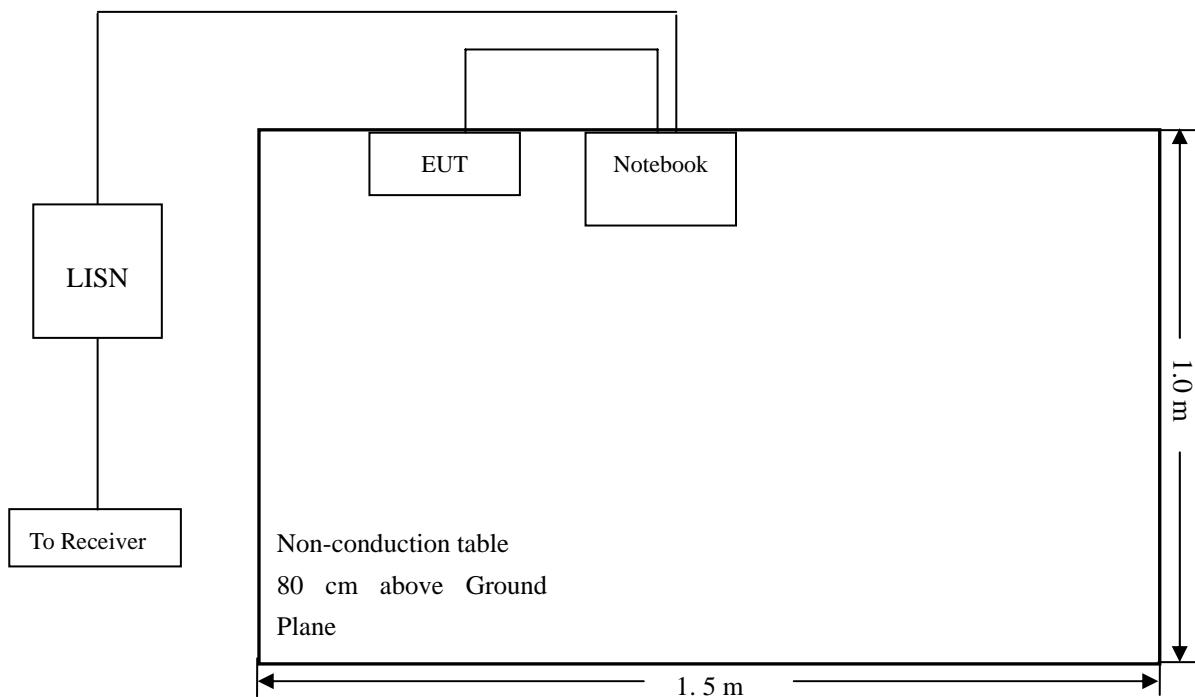

## 12.5 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

## 12.6 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency ..... 150 kHz  
Stop Frequency..... 30 MHz  
Sweep Speed ..... Auto  
IF Bandwidth..... 10 kHz  
Quasi-Peak Adapter Bandwidth ..... 9 kHz  
Quasi-Peak Adapter Mode ..... Normal

## 12.7 Summary of Test Results/Plots


According to the data in section 12.8, the EUT complied with the FCC Part 15.207 Conducted margin for a Class B device, with the *worst* margin reading of:

**-11.83 dB at 3.7980 MHz in the *Neutral* mode, peak detector, 0.15-30MHz**

## 12.8 Conducted Emissions Test Data


**Plot of Conducted Emissions Test Data**

EUT: *Bluetooth Carkit*  
 Tested Model: *BT Drive Free 414*  
 Operating Condition: *BT Transmitting*  
 Comment: *AC 120V/60Hz; Notebook USB 5V*  
 Test Specification: *Neutral*

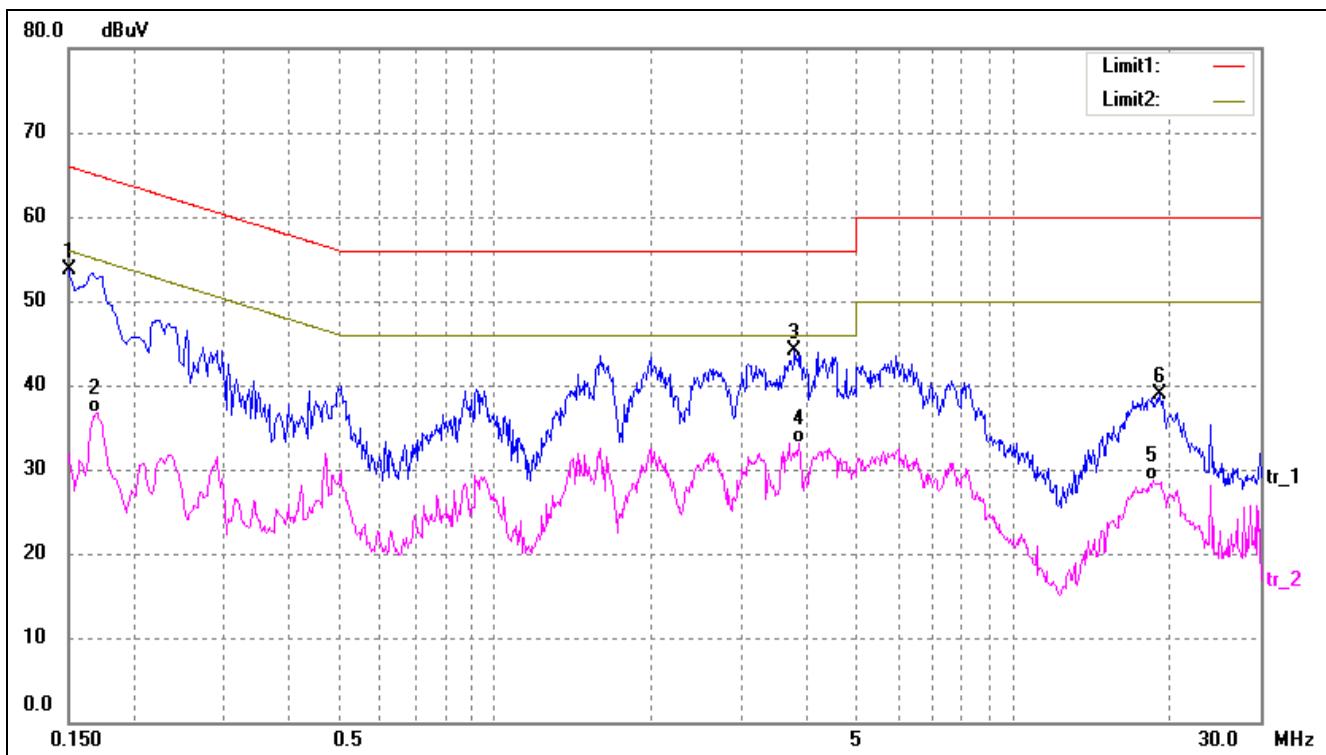

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	44.11	9.50	53.61	66.00	-12.39	peak
2	0.1700	27.26	9.50	36.76	54.96	-18.20	AVG
3	3.7980	34.17	10.00	44.17	56.00	-11.83	peak
4	3.8540	23.06	10.00	33.06	46.00	-12.94	AVG
5	18.6420	17.04	11.73	28.77	50.00	-21.23	AVG
6	19.1380	27.13	11.83	38.96	60.00	-21.04	peak

Test Specification: Line

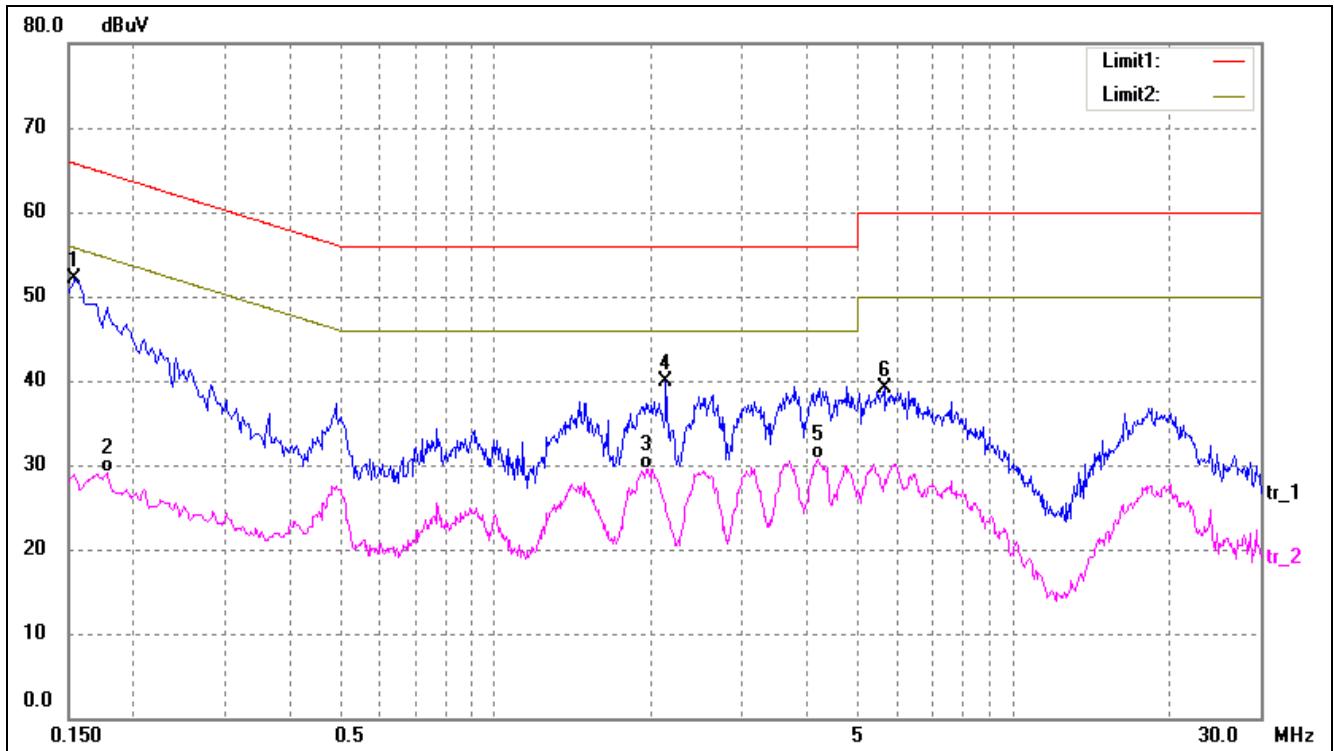

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1540	42.54	9.50	52.04	65.78	-13.74	peak
2	0.1780	19.56	9.50	29.06	54.58	-25.52	AVG
3	1.9580	19.58	10.00	29.58	46.00	-16.42	AVG
4	2.1340	29.98	10.00	39.98	56.00	-16.02	peak
5	4.1980	20.75	10.00	30.75	46.00	-15.25	AVG
6	5.6340	29.15	10.00	39.15	60.00	-20.85	peak

\*\*\*\*\* END OF REPORT \*\*\*\*\*