

# EMI TEST REPORT

## FCC PART 15 CLASS B

*for*

**JSJ Ventures, Inc.**  
**21947 Plummer St. Chatsworth,**  
**CA 91311, USA**


*on the*


**External HDD Enclosure**  
**DATASTORMINI**  
**FCC ID: SF6DATASTORMINI**

Issued Date : Aug 19, 2004  
Report Number : KSQ-FCC040819

**Prepared By:**

**Test Date:** Aug 19, 2004

**Test Engineer:** Y. Choi   
Printed Name Signature

**Compliance Engineer:** I. S. Jang   
Printed Name Signature



**Korea Standard Quality Laboratories**  
Testing Laboratories for EMC and Safety Compliance  
#102, Jangduk-Dong, Hwasung-Shi, Kyunggi-Do, KOREA

*This report may not be reproduced without the full written  
consent of Korea Standard Quality Laboratories.*

# EMI TEST REPORT



Report Number : KSQ-FCC040819

FCCID : SF6DATASTORMINI

## Table of Contents

1	General Information	
1.1	Introduction	3
1.2	Product Description for Equipment Under Test (EUT)	3
1.3	Equipment Under Test	4
1.4	Host System Configuration	4
1.5	External I/O Cabling	4
1.6	Special Accessories	4
1.7	EUT Modifications	5
1.8	Configuration of Test System	5
2	Test Performed	
2.1	Conducted Emission Measurements	6
2.1.1	Test Description	6
2.1.2	Test Equipments	6
2.1.3	Test Environments	6
2.1.4	Test Limits	6
2.1.5	Test Procedure	6
2.1.6	Test Configuration	7
2.1.7	Test Results	7
2.1.8	Test Data	7
2.1.9	Plots of Test Data	8
2.2	Radiated Emission Measurements	9
2.2.1	Test Description	9
2.2.2	Test Equipments	9
2.2.3	Test Environments	9
2.2.4	Test Limits	9
2.2.5	Test Procedure	10
2.2.6	Field Strength Calculation	10
2.2.7	Test Configuration	10
2.2.8	Test Results	11
2.2.9	Test Data	11

# EMI TEST REPORT



Report Number : KSQ-FCC040819

FCCID : SF6DATASTORMINI

## Table of Contents(cont'd)

3	Product Labelling Requirements	
3.1	FCC ID/Statement	12
3.2	Label Location	12
4	Test Setup Photographs	
4.1	Conducted Emission: Front View	13
4.2	Conducted Emission: Rear View	13
4.3	Radiated Emission: Front View	14
4.4	Radiated Emission: Rear View	14
5	External Photographs	
5.1	EUT: Front View	15
5.2	EUT: Rear View	15
5.3	EUT: Label View	16
5.4	EUT: Internal View	16
6	Internal Photographs	
6.1	EUT: Main Board, Top View	17
6.2	EUT: Main Board, Bottom View	18
	Appendix A Schematics/Block Diagram	19
	Appendix B User's Manual	20

# EMI TEST REPORT



Report Number : KSQ-FCC040819

FCCID : SF6DATASTORMINI

## 1. General Information

### 1.1 Introduction

The EMI Test Report of Information Technology Equipment is prepared on behalf of named applicant in accordance with the ANSI C63.4-1992. The test results reported in this document relate only to the item that was tested.

The detailed description of the measurement facility was found to be in compliance with the requirement of Section 2.948 of the FCC Rules. The Federal Communications Commission has the reports on file and is listed under Registration Number 100384. The scope of the accreditation covers the FCC Method - 47 CFR Part 15 or 18 of the Commission's Rules.

All measurements contained in this report were conducted in accordance with ANSI C63.4-1992. The instrumentation utilized for the measurements conforms with CISPR16 Specification for Radio Disturbance and Immunity Measuring Apparatus and Methods. Some accessories are used to increase sensitivity and prevent overloading of the measuring instrument. Calibration checks are performed yearly on the instruments by a local calibration laboratories.

All radiated and conducted emission measurements are performed manually at Korea Standard Quality Laboratories (hereinafter referred to as "KSQLab"), #102, Jangduk-Dong, Hwasung-Shi, Kyunggi-Do, KOREA. The radiated emission measurements required by the FCC Rules were performed on 3 meter or 10 meter, Open Area Test Site, test range maintained by KSQLab. Complete ANSI 63.4-1992 description and site attenuation measurement data records are maintained at the test facility and have been placed on file with the Federal Communications Commission. The power line conducted emission measurements were performed in a shielded enclosure also located at the same facility. The KSQLab EMC test facility in Hwasung-Shi are designated testing laboratory according to ISO/IEC 17025 by Radio Research Laboratory (RRL), Ministry of Information and Communication.

### 1.2 Product Description for Equipment Under Test (EUT)

JSJ Ventures, Inc.'s External HDD Enclosure, Model No: DATASTORMINI, or the "EUT" as referred to in this report is smaller than your wallet but it packs enough storage space for 5,000 MP3 songs, 29 CDs worth of data, or 8.5 hours of digital video (20GB version).

Main Features of EUT are:

- USB 2.0 certified with transfer rates up to 480Mbps (40x faster than USB 1.1)
- Backwards compatible with USB 1.1
- Tiny footprint offers maximum portability
- Massive storage capacity
- Multiple DATASTORMINIs can be attached to your computer
- No additional power source required (no batteries or AC adapter required)

# EMI TEST REPORT



Report Number : KSQ-FCC040819

FCCID : SF6DATASTORMINI

## 1.3 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
External HDD Enclosure	DATASTORMINI	none	JSJ Ventures, Inc.	EUT

## 1.4 Host System Configuration

Description	Model Number	Serial Number	Manufacturer	Remarks
Host Computer	TH-1000	none	Hanmi I&C Co., Ltd.	ATX
VGA Monitor	DP15HS	H8OR107714	Chung Hwa Electronics	15"
Keyboard	SEM-DT35	22022689	Samsung Electro-Mecha	PS/2
Mouse	76FSERIAL9D	1005213	Microsoft Corp.	Serial
Printer	6XU2225C	3037S84200	Hwelett Packard	Inkjet
Joystick	DHA-2000	none	Dahwoon Electronics	-
Speaker	AN-808	none	CHINA DONGGUAN	-
Microphone	C106N	none	COSY	-

## 1.5 External I/O Cabling

Description	Length (m)	Port/From	Port/To	Remarks
Video Cable	1.5	Dsub/Host	Monitor	Shielded
Keyboard Cable	2.0	PS2/Host	Keyboard	Shielded
Mouse Cable	2.0	Dsub/Host	Mouse	Shielded
Printer Cable	1.5	Dsub/Host	Printer	Shielded
USB Cable	1.5	USB/Host	EUT	Shielded
Joystick Cable	1.5	Dsub/Host	Joystick	Shielded
Speaker Cable	1.5	Jack/Host	Speaker	Shielded
Microphone Cable	2.0	Jack/Host	Microphone	Shielded

## 1.6 Special Accessories

As shown in section 1.8, all interface cables used for compliance testing are shielded as normally supplied or by use respective component manufacturers.

# EMI TEST REPORT




Report Number : KSQ-FCC040819

FCCID : SF6DATASTORMINI

## 1.7 EUT Modifications

No modifications were made to the EUT in order to achieve and maintain compliance to the standards described in this report.

## 1.8 Configuration of Test System

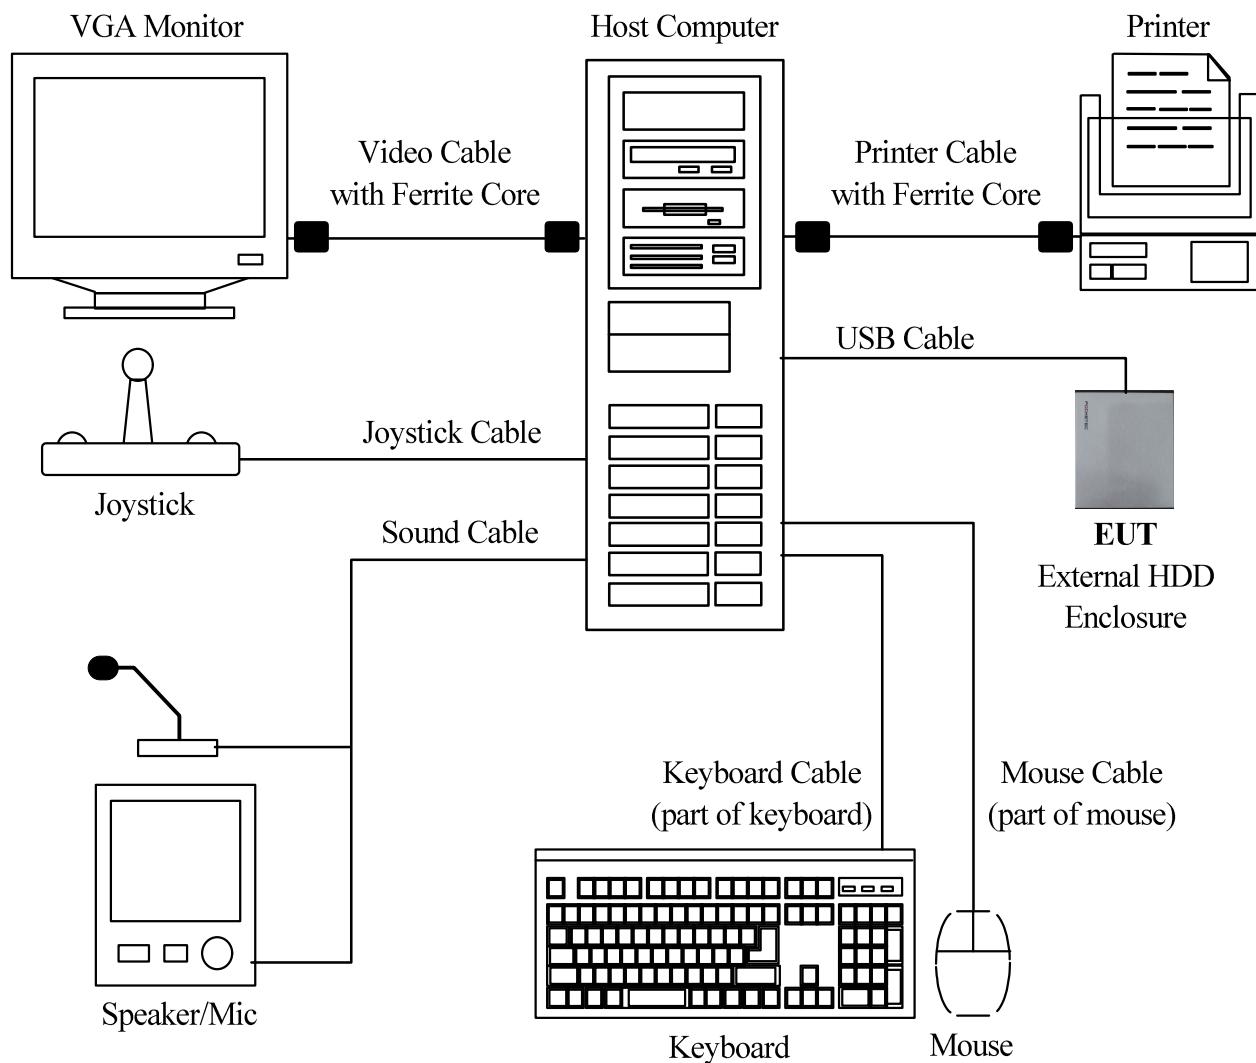

# EMI TEST REPORT



Report Number : KSQ-FCC040819

FCCID : SF6DATASTORMINI

## 2. Test Performed

### 2.1 Conducted Emission Measurements

#### 2.1.1 Test Description

The power line conducted emission measurements were performed in a shielded enclosure, using the setup in accordance with ANSI C63.4-1992 conducted emission measurement procedure.

#### 2.1.2 Test Equipments

Description	Manufacturer	Model Number	Serial Number	Cal. Due
Spectrum Analyzer	Advantest	3261A	21720240	11, 2004
LISN1	Electro Metrics	ANS-25/2	2535	11, 2004
LISN2	Kyoritsu	KNW-407	8-1010-14	11, 2004
Plotter	Hewlett Packard	7550B	3050A14513	n/a

#### 2.1.3 Test Environments

Ambient Temperatures	Relative Humidity
15~35 °C	30~60 %

#### 2.1.4 Test Limits

Frequency (MHz)	CISPR22 Limits			
	Class B (dBuV)		Class A (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 to 0.50	66.0 to 56.0	56.0 to 46.0	79.0	66.0
0.50 to 5.00	56.0	46.0	73.0	60.0
5.00 to 30.00	60.0	50.0	73.0	60.0

#### 2.1.5 Test Procedure

Conducted emission levels were measured on each current-carrying line with the spectrum analyzer operating in the CISPR quasi-peak mode (or peak mode if applicable). The analyzer's 6dB bandwidth was set to 9kHz. The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. If the conducted emission exceed the average limit with the instrument set to the quasi-peak mode, the measurements are made in the average mode. The emission spectrum was scanned from 150kHz to 30MHz. The highest emission amplitudes relative to the appropriate limits were measured and have been recorded. Quasi-peak readings are distinguished with a "QP". The conducted emission test was performed with the EUT exercise program loaded, and the emissions were scanned between 150kHz to 30MHz on the HOT side and NEUTRAL side, herein referred to as H and N, respectively.


# EMI TEST REPORT



Report Number : KSQ-FCC040819

FCCID : SF6DATASTORMINI

## 2.1.6 Test Configuration

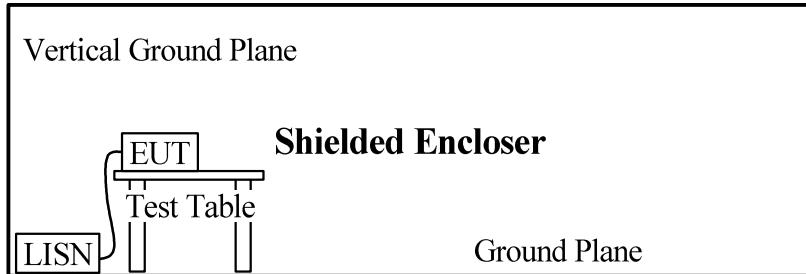

## 2.1.7 Test Results

According to the data in section 2.1.9, the EUT complied with the CISPR22 limits, and had the worst margin reading of:

-15.2dB at 9.20MHz in the NEUTRAL side.

## 2.1.8 Test Data

Frequency (MHz)	Line Conducted Emission			CISPR22 Class B		
	Amplitude (dBuV)	Phase Hot/Neutral	Detector QP/AV/PK	Applicable Limit QP (dBuV)	Applicable Limit AV (dBuV)	Margin (dB)
0.16	45.0	H	PK	65.5	55.5	-20.5
0.18	39.0	H	PK	64.5	54.5	-25.5
0.21	41.2	H	PK	63.2	53.2	-22.0
0.25	32.8	H	PK	61.8	51.8	-29.0
0.29	35.5	H	PK	60.5	50.5	-25.0
0.31	39.0	H	PK	60.0	50.0	-21.0
0.50	23.8	N	PK	56.0	46.0	-32.2
0.52	26.0	H	PK	56.0	46.0	-30.0
0.54	22.4	H	PK	56.0	46.0	-33.6
0.61	21.0	H	PK	56.0	46.0	-35.0
1.70	22.2	N	PK	56.0	46.0	-33.8
2.20	29.5	N	PK	56.0	46.0	-26.5
9.20	44.8	N	PK	60.0	50.0	-15.2
10.30	41.1	N	PK	60.0	50.0	-18.9
10.50	39.2	H	PK	60.0	50.0	-20.8
10.80	36.7	H	PK	60.0	50.0	-23.3
20.30	32.6	N	PK	60.0	50.0	-27.4
26.50	35.0	H	PK	60.0	50.0	-25.0

Temperature: 21 °C      Humidity: 45 %      Test Date: Aug 19, 2004      Tested by: Y. Choi

# EMI TEST REPORT




Report Number : KSQ-FCC040819


FCCID : SF6DATASTORMINI

## 2.1.9 Plots of Test Data

Polarization: HOT (LIVE)

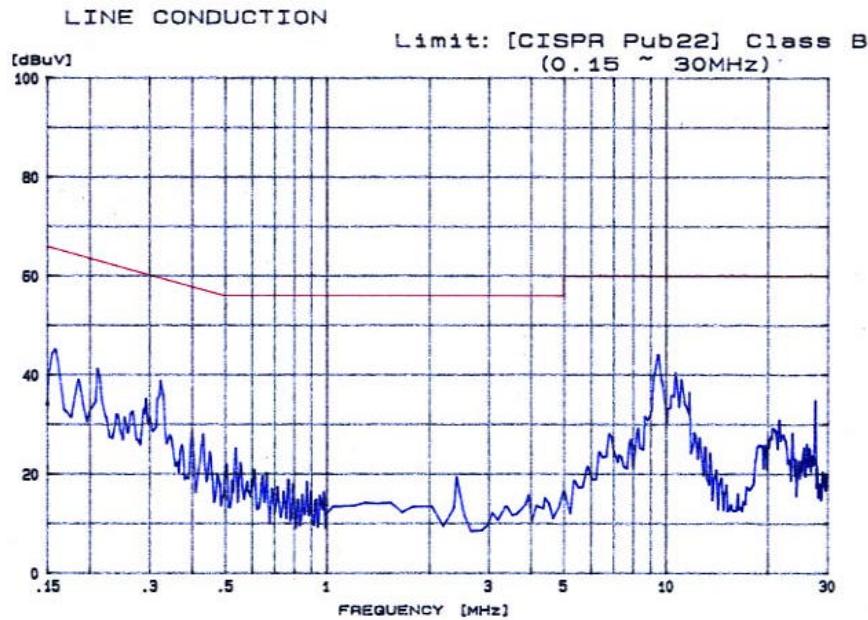

Polarization: NEUTRAL

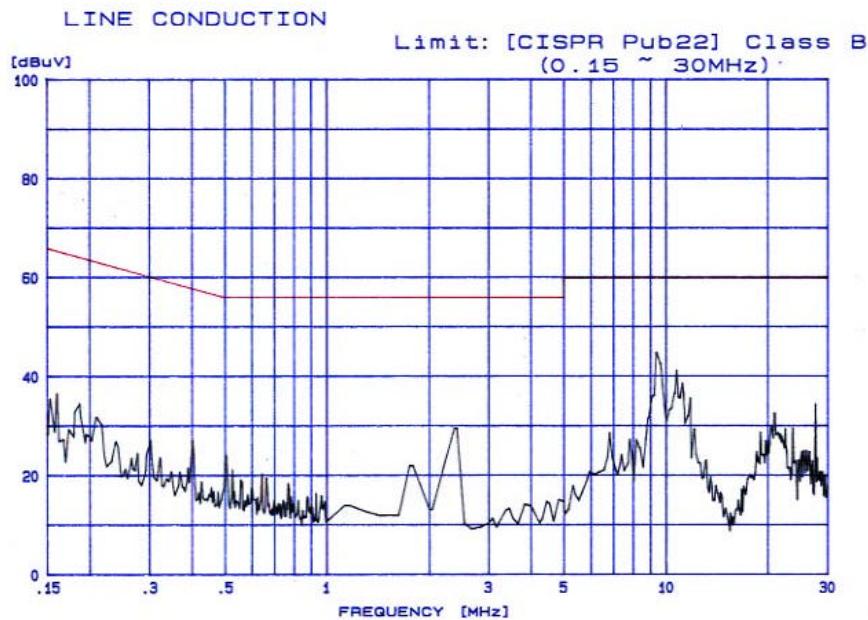

# EMI TEST REPORT



Report Number : KSQ-FCC040819

FCCID : SF6DATASTORMINI

## 2.2 Radiated Emission Measurements

### 2.2.1 Test Description

The radiated emission measurements were performed in a Open Area Test Site (OATS), using the setup in accordance with ANSI C63.4-1992 radiated emission measurement procedure.

### 2.2.2 Test Equipments

Description	Manufacturer	Model Number	Serial Number	Cal. Due
Spectrum Analyzer	Hewlett Packard	8568B	3217A05629	08, 2004
Spectrum Display	Hewlett Packard	85682A	3144A20886	08, 2004
RF Preselector	Hewlett Packard	85685A	3221A01366	08, 2004
Quasi-Peak Adapter	Hewlett Packard	85650A	3145A01652	08, 2004
Biconical Antenna	Electro Metrics	BIA-30S	164	02, 2005
Log Periodic Antenna	Electro Metrics	LPA-30	387	02, 2005
Turn Table	KSQ	KSQ-T10	KSQ98121	n/a
Antenna Mast	KSQ	KSQ-A10	KSQ98122	n/a

### 2.2.3 Test Environments

Ambient Temperatures	Relative Humidity
15~35 °C	30~60 %

### 2.2.4 Test Limits

Frequency (MHz)	FCC Part 15 Limits			
	Class B @3m		Class A @10m	
	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)
30 to 88	40.0	100	39.5	90
88 to 216	43.5	150	43.5	150
216 to 960	46.0	200	46.5	210
above 960	54.0	500	49.5	300

# EMI TEST REPORT



Report Number : KSQ-FCC040819

FCCID : SF6DATASTORMINI

## 2.2.5 Test Procedure

Before final measurements of radiated emission were made on the OATS, the EUT was scanned in semi-anechoic chamber in order to determine its emission spectrum signature. The physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emission in amplitude, direction and frequency. This process was repeated during final radiated emission measurements on the OATS range, at each frequency, in order to ensure that maximum emissions amplitudes were attained.

The radiated emission test was performed with EUT exercise program loaded, and the emissions were scanned between 30MHz to 1000MHz using a HP 8568B spectrum analyzer. The spectrum analyzer's 6dB bandwidth was set to 120kHz, and the analyzer was operated in the CISPR quasi-peak detection mode.


At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum emission levels. Measurements were taken using both HORIZONTAL and VERTICAL antenna polarization, herein referred to as H and V, respectively.

## 2.2.6 Field Strength Calculation

The Field Strength (FS) is calculated by adding the Antenna Factor (AF) and Cable Factor (CF) from the Measured Reading (MR). The basic equation with a sample calculation is as follows:

$$FS(\text{dBuV/m}) = MR(\text{dBuV}) + [AF(\text{dB/m}) + CF(\text{dB})]$$

## 2.2.7 Test Configuration

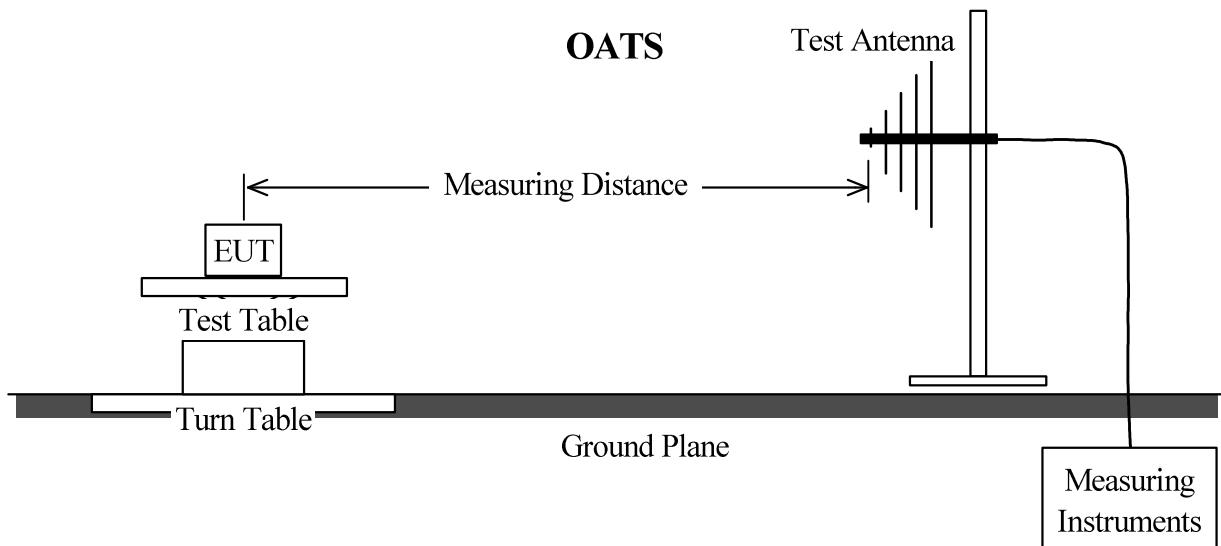

# EMI TEST REPORT



Report Number : KSQ-FCC040819

FCCID : SF6DATASTORMINI

## 2.2.8 Test Results

According to the data in section 2.2.10, the EUT complied with the FCC Part 15 standards, and had the worst margin reading of:

-4.2dB at 736.50MHz in the VERTICAL antenna polarization.

## 2.2.9 Test Data

Indicated		Antenna		Correction Factor		Corrected Amplitude	FCC Part15 Class B		
Frequency (MHz)	Amplitude (dBuV/m)	Polar. (H/V)	Height (m)	Ant. (dB)	Cable (dB)	(dBuV/m)	Applicable Limit (dBuV/m)	Margin (uV/m)	(dB)
31.62	13.6	H	3.9	18.1	0.9	32.6	40.0	100	-7.4
39.51	13.3	V	3.0	14.3	0.9	28.5	40.0	100	-11.5
47.46	19.1	H	3.9	10.9	1.1	31.1	40.0	100	-8.9
55.58	17.1	V	3.0	7.7	1.3	26.1	40.0	100	-13.9
63.35	18.7	V	2.8	6.0	1.4	26.1	40.0	100	-13.9
79.30	14.3	V	2.7	7.8	1.5	23.6	40.0	100	-16.4
100.33	14.8	V	2.5	11.7	1.7	28.2	43.5	150	-15.3
102.90	14.2	V	2.5	12.0	1.7	27.9	43.5	150	-15.6
110.63	14.2	H	3.5	12.9	1.9	29.0	43.5	150	-14.5
156.26	17.9	H	3.3	15.3	2.2	35.4	43.5	150	-8.1
168.30	14.7	H	3.2	15.5	2.3	32.5	43.5	150	-11.0
179.94	13.8	V	2.2	15.7	2.4	31.9	43.5	150	-11.6
495.20	17.3	H	2.0	19.3	4.5	41.1	46.0	200	-4.9
498.50	17.6	H	2.0	19.5	4.5	41.6	46.0	200	-4.4
516.30	17.5	H	1.8	19.4	4.6	41.5	46.0	200	-4.5
669.60	14.7	V	1.2	21.3	5.4	41.4	46.0	200	-4.6
703.00	13.2	V	1.0	22.1	5.6	40.9	46.0	200	-5.1
736.50	14.5	V	1.0	21.6	5.7	41.8	46.0	200	-4.2
-	-	-	-	-	-	-	54.0	500	-

Temperature: 21 °C      Humidity: 45 %      Test Date: Aug 19, 2004      Tested by: Y. Choi