



MEASUREMENT REPORT

FCC PART 15.247 Bluetooth-LE

FCC ID: SFK-WF402LB

Application: CIG Shanghai Co., Ltd.

Application Type: Certification

Product: AirFinder Location Beacon;
AirFinder Location Beacon AC Power

Model No.: WF-402B, WF-402CB

Brand Name: CIG


FCC Classification: Digital Transmission System (DTS)

FCC Rule Part(s): Part 15 Subpart C (Section 15.247)

Test Procedure(s): ANSI C63.10-2013, KDB 558074 D01v05r02

Test Date: August 04 ~ 27, 2019

Reviewed By: 
(Sunny Sun)

Approved By: 
(Robin Wu)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
1907RSU054-U1	Rev. 01	Initial Report	09-09-2019	Valid

CONTENTS

Description	Page
1. INTRODUCTION	6
1.1. Scope	6
1.2. MRT Test Location	6
2. PRODUCT INFORMATION	7
2.1. Feature of Equipment under Test	7
2.2. Working Frequencies for this report	8
2.3. Device Capabilities	9
2.4. EMI Suppression Device(s)/Modifications	9
2.5. Labeling Requirements	9
2.6. Test Software	9
3. DESCRIPTION OF TEST	10
3.1. Evaluation Procedure	10
3.2. AC Line Conducted Emissions	10
3.3. Radiated Emissions	11
4. ANTENNA REQUIREMENTS.....	12
5. TEST EQUIPMENT CALIBRATION DATE	13
6. MEASUREMENT UNCERTAINTY.....	15
7. TEST RESULT	16
7.1. Summary	16
7.2. 6dB Bandwidth Measurement.....	17
7.2.1. Test Limit	17
7.2.2. Test Procedure used.....	17
7.2.3. Test Setting.....	17
7.2.4. Test Setup	17
7.2.5. Test Result.....	18
7.3. Output Power Measurement	19
7.3.1. Test Limit	19
7.3.2. Test Procedure Used	19
7.3.3. Test Setting.....	19
7.3.4. Test Setup	19
7.3.5. Test Result of Output Power	20
7.4. Power Spectral Density Measurement.....	21
7.4.1. Test Limit	21

7.4.2. Test Procedure Used	21
7.4.3. Test Setting.....	21
7.4.4. Test Setup	21
7.4.5. Test Result.....	22
7.5. Conducted Band Edge and Out-of-Band Emissions.....	23
7.5.1. Test Limit	23
7.5.2. Test Procedure Used	23
7.5.3. Test Setting.....	23
7.5.4. Test Setup	24
7.5.5. Test Result.....	25
7.6. Radiated Spurious Emission Measurement	27
7.6.1. Test Limit	27
7.6.2. Test Procedure Used	27
7.6.3. Test Setting.....	27
7.6.4. Test Setup	29
7.6.5. Test Result.....	30
7.7. Radiated Restricted Band Edge Measurement	40
7.7.1. Test Limit	40
7.7.2. Test Procedure Used	41
7.7.3. Test Setting.....	41
7.7.4. Test Setup	42
7.7.5. Test Result.....	43
7.8. AC Conducted Emissions Measurement.....	59
7.8.1. Test Limit	59
7.8.2. Test Setup	59
7.8.3. Test Result.....	60
8. CONCLUSION.....	62
Appendix A – Test Setup Photograph.....	63
Appendix B – EUT Photograph	64

§2.1033 General Information

Applicant:	CIG Shanghai Co., Ltd.
Applicant Address:	5/F, Building 37, No. 8 Dongbeiwang West Road, Haidian District Beijing 100194, P.R. China
Manufacturer:	CIG Shanghai Co., Ltd., Shanghai Branch.
Manufacturer Address:	F/2, 3 Building 1, No. 505 Jiangyue Road, Minhang District, Shanghai, P.R.China
Test Site:	MRT Technology (Suzhou) Co., Ltd
Test Site Address:	D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 893164) test facility with the site description report on file and has met all the requirements specified in ANSI C63.4-2014.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-20025, G-20034, C-20020, T-20020) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications, Radio and SAR testing.



1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The measurement facility compliant with the test site requirements specified in ANSI C63.4-2014.



2. PRODUCT INFORMATION

2.1. Feature of Equipment under Test

Product Name:	AirFinder Location Beacon; AirFinder Location Beacon AC Power
Model No.:	WF-402B, WF-402CB
Brand Name:	CIG
Bluetooth Specification:	v4.0 (Bluetooth-LE only)
Bluetooth Frequency:	2402~2480MHz
Data Rate:	1Mbps
Antenna Type:	PCB Antenna
Antenna Gain:	2dBi

Note 1: The product name of M/N “WF-402B” is “AirFinder Location Beacon”, and product name of M/N “WF-402CB” is “AirFinder Location Beacon AC Power”.

Note 2: “WF-402B” is powered by AAA battery, “WF-402CB” is powered by AC power. Here is only the difference of power supply circuit between two model numbers and the other circuits are all the same.

2.2. Working Frequencies for this report

Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz
03	2408 MHz	04	2410 MHz	05	2412 MHz
06	2414 MHz	07	2416 MHz	08	2418 MHz
09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz
15	2432 MHz	16	2434 MHz	17	2436 MHz
18	2438 MHz	19	2440 MHz	20	2442 MHz
21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz
27	2456 MHz	28	2458 MHz	29	2460 MHz
30	2462 MHz	31	2464 MHz	32	2466 MHz
33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz
39	2480 MHz	--	--	--	--


2.3. Device Capabilities

This device contains the following capabilities:

Bluetooth (v4.0, Bluetooth-LE only)

Note: The maximum achievable duty cycles was determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Test Mode	Duty Cycle
BLE	62.65%

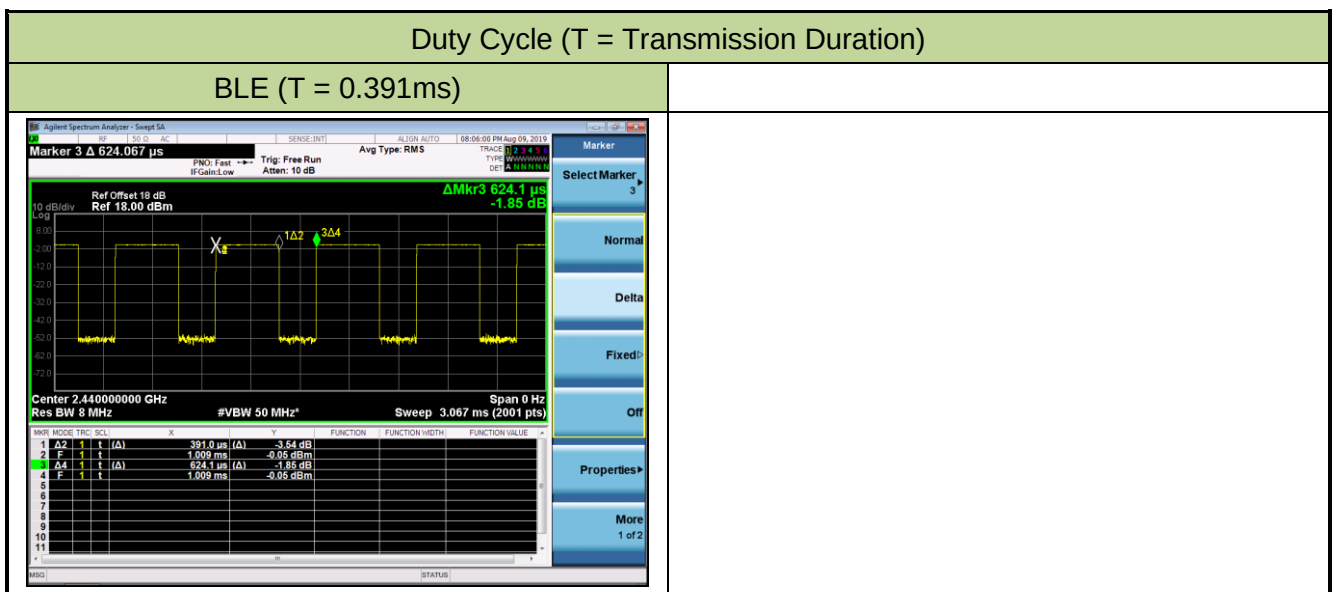

2.4. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.5. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

2.6. Test Software

The test utility software used during testing was “nRFgo Studio”.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 558074 D01v05r02 were used in the measurement.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions were used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the Antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable. For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive Antenna height using a broadband Antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn Antennas were used. For frequencies below 30MHz, a calibrated loop Antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband Antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive Antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn Antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive Antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive Antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn Antenna, the horn Antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna is permanently attached.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions - SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2020/04/15
Two-Line V-Network	R&S	ENV 216	MRTSUE06002	1 year	2020/06/13
Two-Line V-Network	R&S	ENV 216	MRTSUE06003	1 year	2020/06/13
Thermohygrometer	Testo	608-H1	MRTSUE06404	1 year	2020/08/08
Shielding Room	MIX-BEP	Chamber-SR2	MRTSUE06215	N/A	N/A

Radiated Emissions - AC1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2020/08/01
PXA Signal Analyzer	Keysight	9030B	MRTSUE06395	1 year	2019/09/25
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2019/11/09
Bilog Period Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2020/03/31
Broad Band Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2019/10/19
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06024	1 year	2019/12/17
Microwave System Amplifier	Agilent	83017A	MRTSUE06076	1 year	2019/11/16
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2020/06/11
Thermohygrometer	Testo	608-H1	MRTSUE06403	1 year	2020/08/08
Anechoic Chamber	TDK	Chamber-AC1	MRTSUE06212	1 year	2020/04/30

Radiated Emission - AC2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Keysight	N9038A	MRTSUE06125	1 year	2020/08/01
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2019/11/09
Bilog Period Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2019/10/19
Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06171	1 year	2019/11/09
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06024	1 year	2019/12/17
Broadband Coaxial Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2019/11/16
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2020/06/11
Temperature/Humidity Meter	Minggao	ETH529	MRTSUE06170	1 year	2019/12/13
Anechoic Chamber	RIKEN	Chamber-AC2	MRTSUE06213	1 year	2020/04/30

Conducted Test Equipment - TR3

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2020/04/15
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06452	1 year	2020/07/11
Signal Analyzer	R&S	FSV40	MRTSUE06218	1 year	2020/04/15
Power Meter	Agilent	U2021XA	MRTSUE06030	1 year	2019/11/16
USB wideband power sensor	Keysight	U2021XA	MRTSUE06446	1 year	2020/06/30
USB wideband power sensor	Keysight	U2021XA	MRTSUE06447	1 year	2020/06/30
Bluetooth Test Set	Anritsu	MT8852B-042	MRTSUE06389	1 year	2020/06/13
Audio Analyzer	Agilent	U8903B	MRTSUE06143	1 year	2020/06/13
Modulation Analyzer	HP	8901A	MRTSUE06098	1 year	2019/10/18
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2019/11/16
DC Power Supply	GWINSTEK	DPS-3303C	MRTSUE06064	N/A	N/A
Temperature & Humidity Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2019/11/16
Thermohygrometer	testo	608-H1	MRTSUE06401	1 year	2020/08/08

Software	Version	Function
EMI Software	V3	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement - SR2
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 150kHz~30MHz: 3.46dB
Radiated Emission Measurement - AC1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 9kHz ~ 1GHz: 4.18dB 1GHz ~ 25GHz: 4.76dB

7. TEST RESULT

7.1. Summary

FCC Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	6dB Bandwidth	$\geq 500\text{kHz}$	Conducted	Pass	Section 7.2
15.247(b)(3)	Output Power	$\leq 30\text{dBm}$		Pass	Section 7.3
15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$		Pass	Section 7.4
15.247(d)	Band Edge / Out-of-Band Emissions	$\leq 20\text{dBc}$ (Peak)		Pass	Section 7.5
15.205 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	Pass	Section 7.6 & 7.7
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	N/A	Section 7.8

Notes:

- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- All modes of operation, peripheral device and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.
- This report had been assessed the test item “Radiated Spurious Emissions” & “Radiated Band Edge” with two model numbers. The other test items been tested with “WF-402B”.

7.2. 6dB Bandwidth Measurement

7.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


7.2.2. Test Procedure used

ANSI C63.10-2013 - Section 11.8.2 Option 2

7.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace was allowed to stabilize


7.2.4. Test Setup

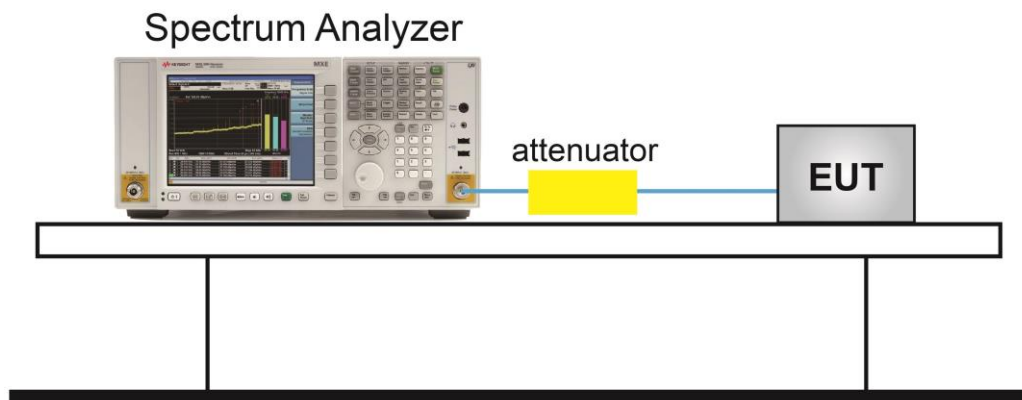

7.2.5. Test Result

Product	AirFinder Location Beacon	Temperature	25°C
Test Engineer	Chase Zhu	Relative Humidity	52%
Test Site	TR3	Test Date	2019/08/09

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
BLE	1	00	2402	0.70	≥ 0.5	Pass
BLE	1	19	2440	0.70	≥ 0.5	Pass
BLE	1	39	2480	0.71	≥ 0.5	Pass

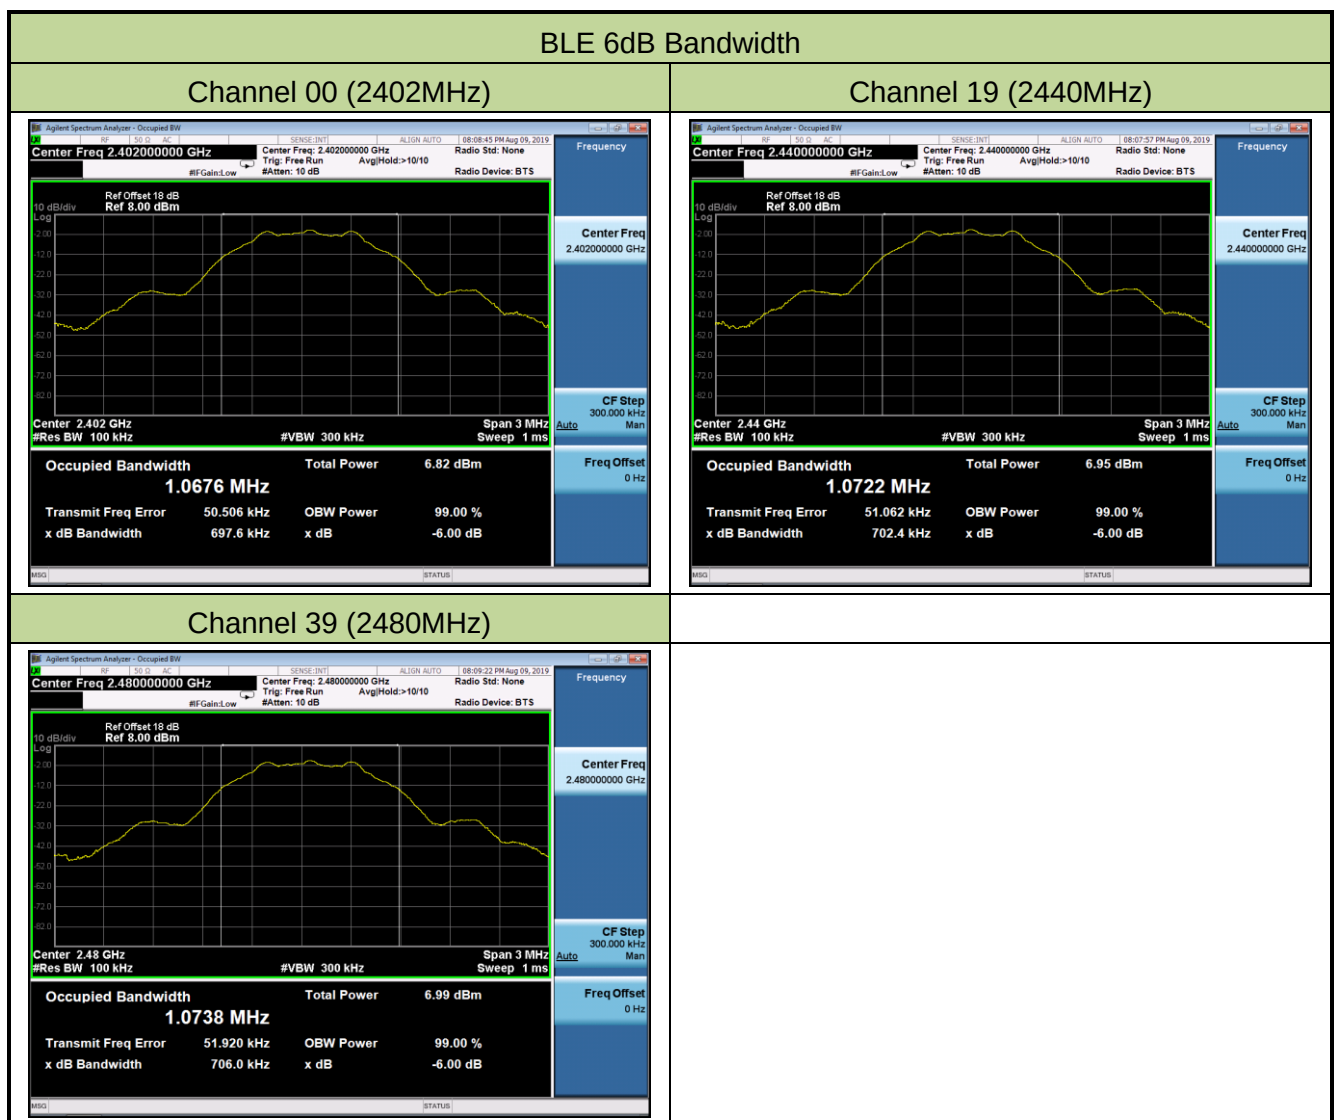

7.3. Output Power Measurement

7.3.1. Test Limit

The maximum out power shall be less 1 Watt (30dBm).

The conducted output power limit specified in paragraph FCC Part 15.247(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs FCC Part 15.247(b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

7.3.2. Test Procedure Used


ANSI C63.10-2013 - Section 11.9.1.3 & 11.9.2.3.

7.3.3. Test Setting

Method PKPM1 (Peak Power Measurement of Signals with DTS BW $\leq$ 50MHz)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

7.3.4. Test Setup

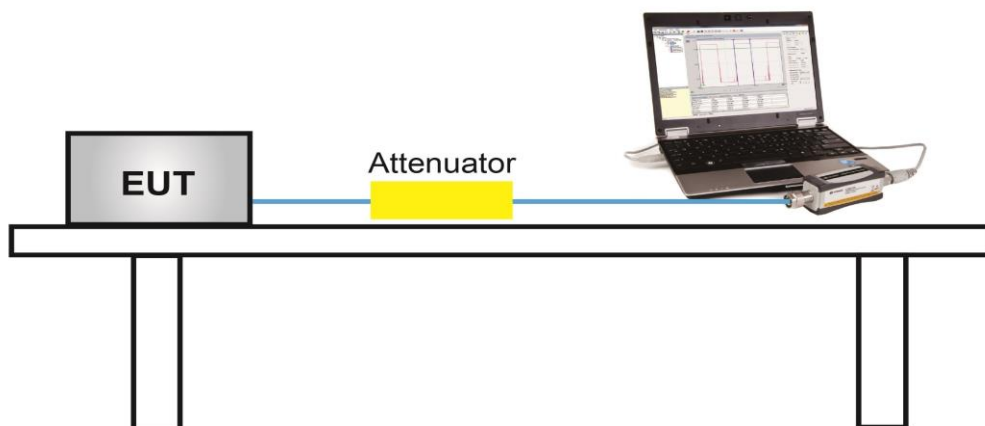

7.3.5. Test Result of Output Power

Product	AirFinder Location Beacon	Temperature	25°C
Test Engineer	Chase Zhu	Relative Humidity	52%
Test Site	TR3	Test Date	2019/08/09

Test Result of Peak Output Power

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Result
BLE	1	00	2402	1.84	≤ 30.00	Pass
BLE	1	19	2440	1.76	≤ 30.00	Pass
BLE	1	39	2480	1.83	≤ 30.00	Pass

Test Result of Average Output Power (Reporting Only)

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Average Power (dBm)	Limit (dBm)	Result
BLE	1	00	2402	1.15	≤ 30.00	Pass
BLE	1	19	2440	1.16	≤ 30.00	Pass
BLE	1	39	2480	1.19	≤ 30.00	Pass

7.4. Power Spectral Density Measurement

7.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.


7.4.2. Test Procedure Used

ANSI C63.10 Section 11.10.2

7.4.3. Test Setting

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 10kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize


7.4.4. Test Setup

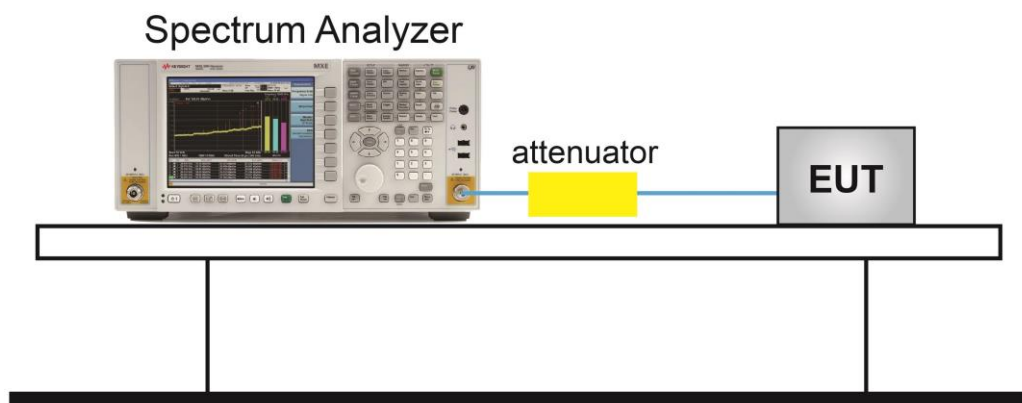

7.4.5. Test Result

Product	AirFinder Location Beacon	Temperature	25°C
Test Engineer	Chase Zhu	Relative Humidity	52%
Test Site	TR3	Test Date	2019/08/09

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	PSD Result (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
BLE	1	00	2402	-7.75	≤ 8.00	Pass
BLE	1	19	2440	-7.64	≤ 8.00	Pass
BLE	1	39	2480	-7.55	≤ 8.00	Pass

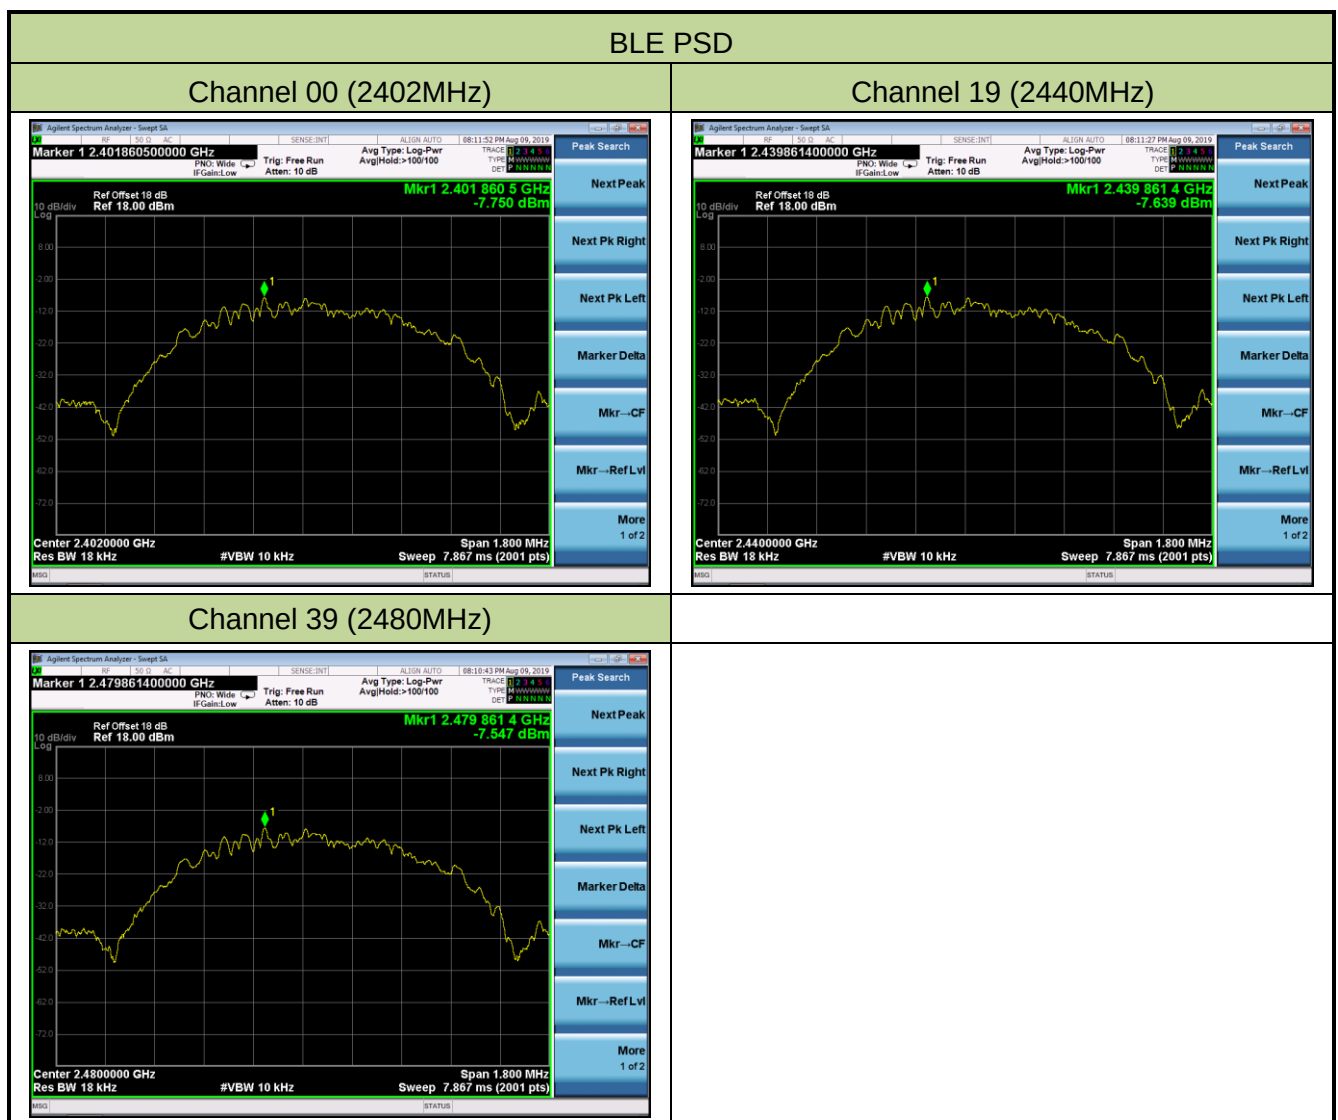

7.5. Conducted Band Edge and Out-of-Band Emissions

7.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure.

7.5.2. Test Procedure Used

ANSI C63.10 Section 11.11

7.5.3. Test Setting

Reference level measurement


1. Set instrument center frequency to DTS channel center frequency
2. Set the span to ≥ 1.5 times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW $\geq 3 \times$ RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize

Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Number of sweep points $\geq 2 \times$ Span/RBW
6. Trace mode = max hold
7. Sweep time = auto couple
8. The trace was allowed to stabilize

Test Notes


1. RBW was set to 1.3MHz rather than 100kHz in order to increase the measurement speed.
2. The display line shown in the following plots denotes the limit at 20dB below the fundamental emission level measured in a 100kHz bandwidth. However, since the traces in the following plots are measured with a 1.3MHz RBW, the display line may not necessarily appear to be 20dB below the level of the fundamental in a 1.3MHz bandwidth.
3. For plots showing conducted spurious emissions near the limit, the frequencies were investigated with a reduced RBW to ensure that no emissions were present.

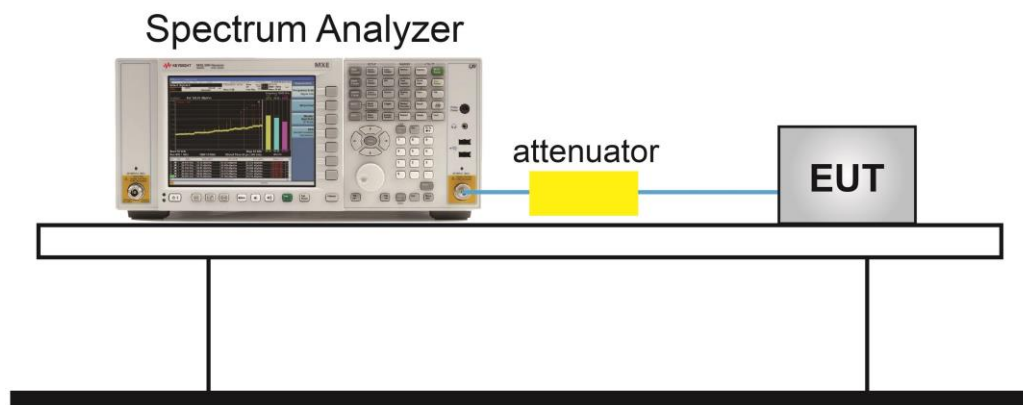7.5.4.Test Setup

7.5.5. Test Result


Product	AirFinder Location Beacon	Temperature	25°C
Test Engineer	Chase Zhu	Relative Humidity	52%
Test Site	TR3	Test Date	2019/08/09

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Limit	Result
BLE	1	00	2402	20dBc	Pass
BLE	1	19	2440	20dBc	Pass
BLE	1	39	2480	20dBc	Pass

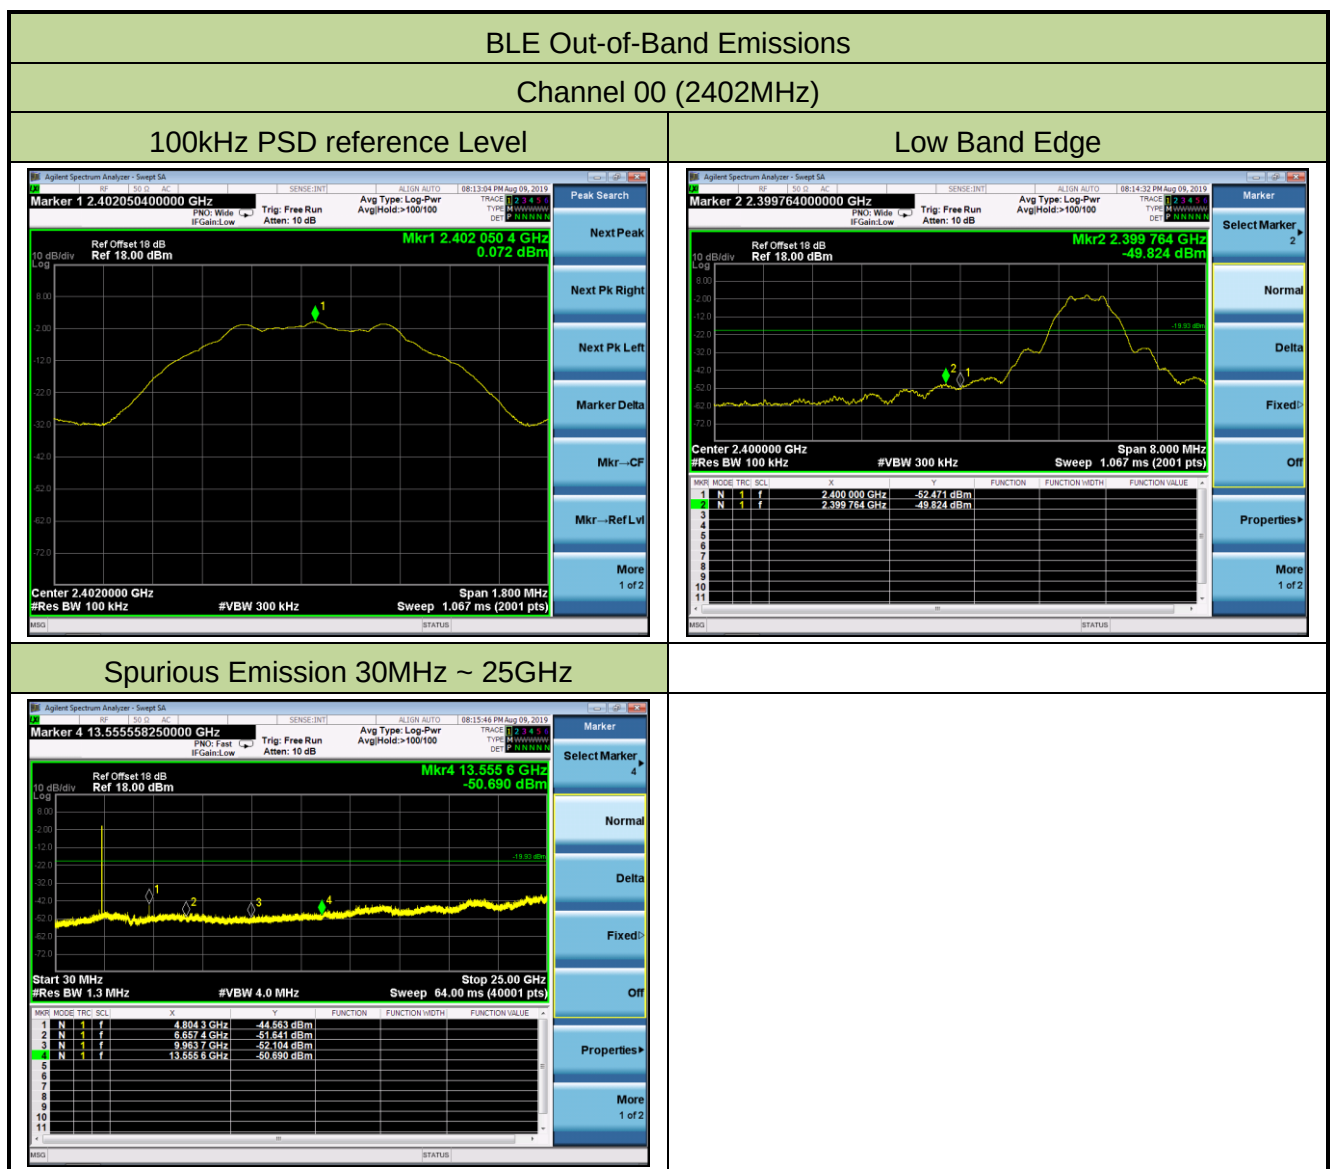


Channel 19 (2440MHz)

100kHz PSD reference Level

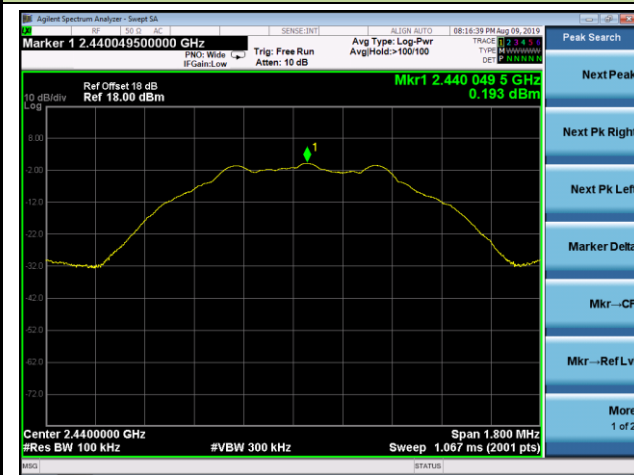


Spurious Emission 30MHz ~ 25GHz

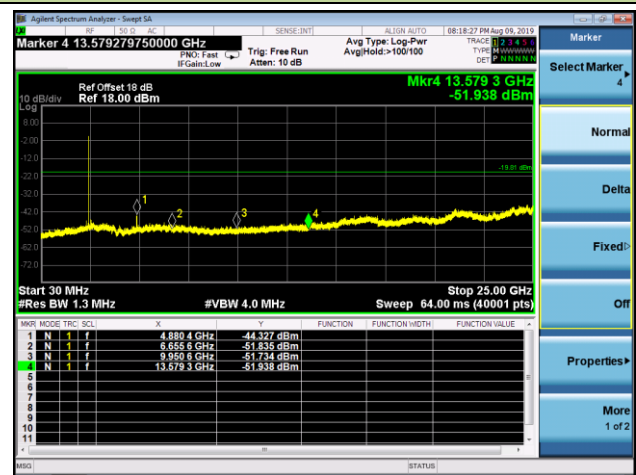


Channel 39 (2480MHz)


100kHz PSD reference Level

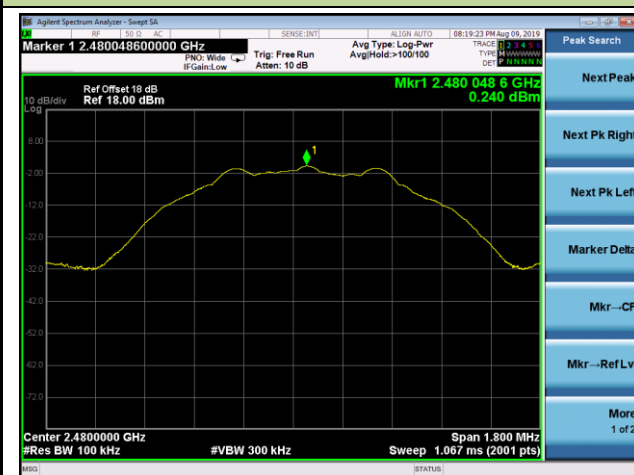

High Band Edge

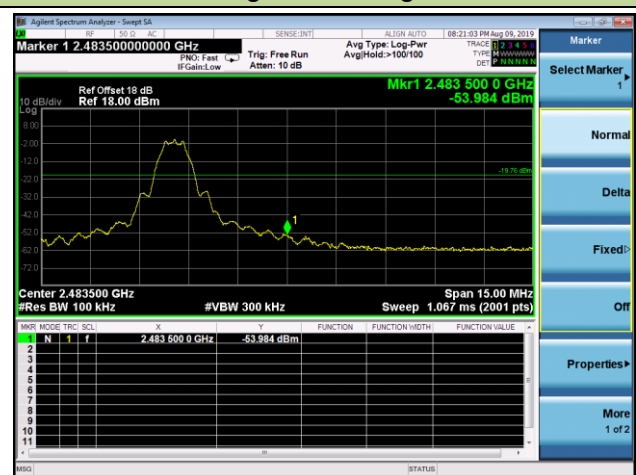

Spurious Emission 30MHz ~ 25GHz

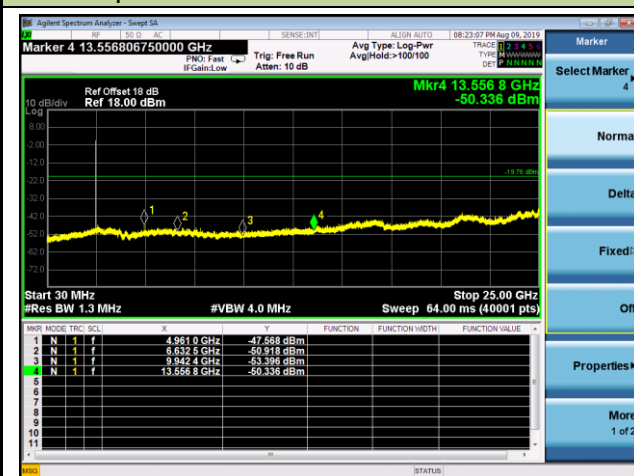

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency (MHz)	Field Strength (uV/m)	Measured Distance (Meters)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.6.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Table 1 - RBW as a function of frequency


Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW $\geq 1/T$
4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

7.6.4. Test Setup

Below 1GHz Test Setup:

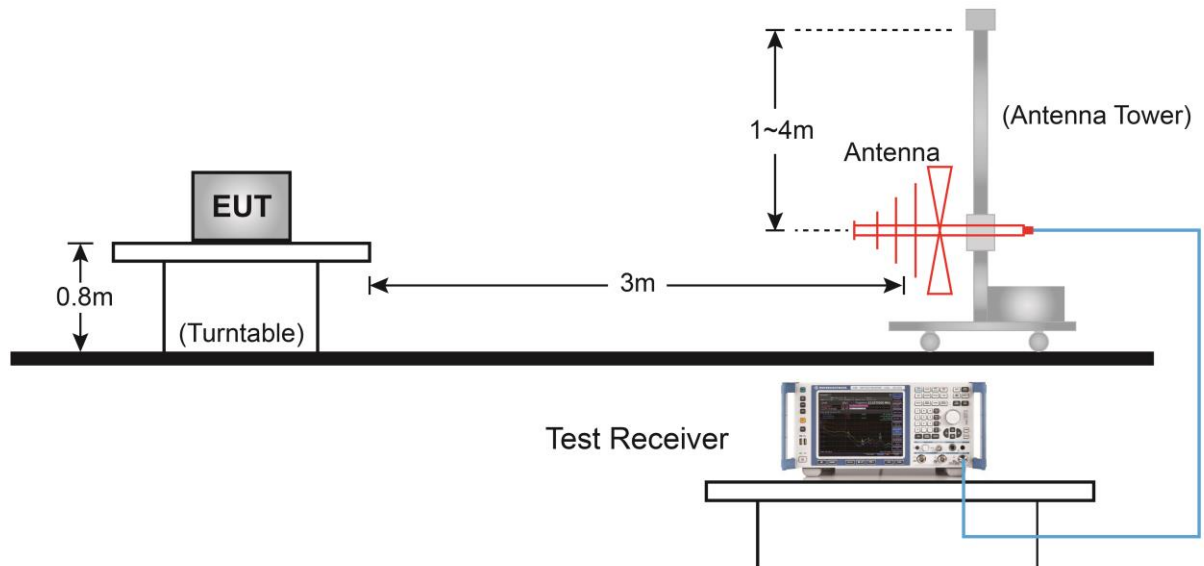

Above 1GHz Test Setup:

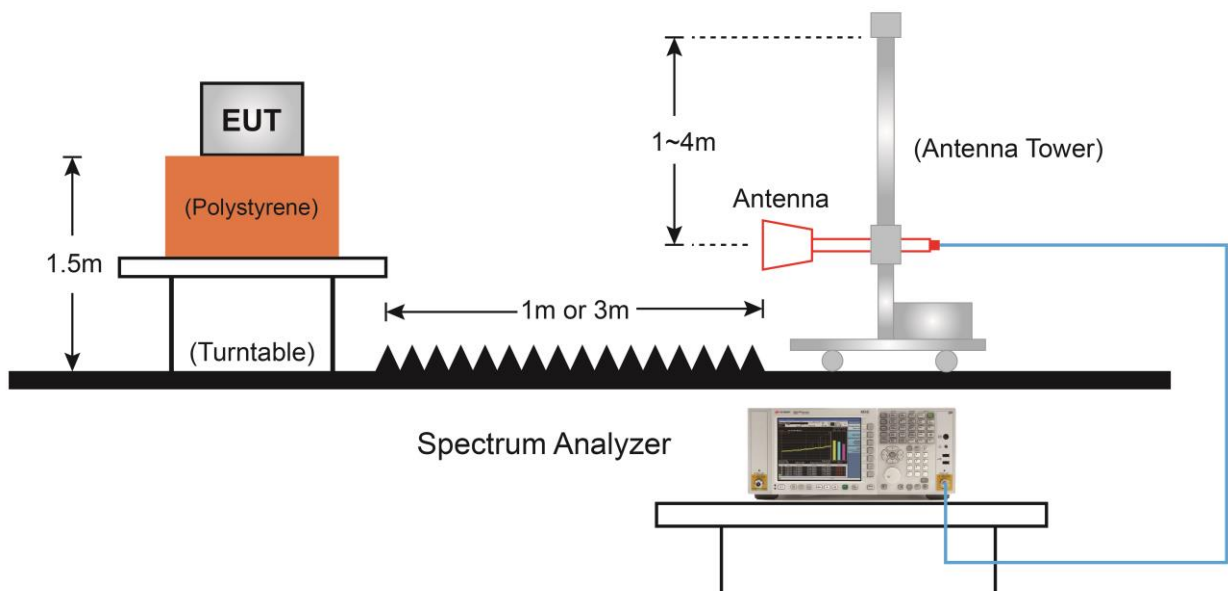

7.6.5. Test Result

Product	AirFinder Location Beacon	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC1	Test Date	2019/08/06
Model No.	WF-402B	Test Channel	00
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4893.0	37.5	5.6	43.1	74.0	-30.9	Peak	Horizontal
	7349.5	36.1	11.7	47.8	74.0	-26.2	Peak	Horizontal
*	8556.5	35.9	12.8	48.7	74.0	-25.3	Peak	Horizontal
*	10180.0	35.1	16.3	51.4	74.0	-22.6	Peak	Horizontal
	4561.5	38.2	4.5	42.7	74.0	-31.3	Peak	Vertical
	8310.0	36.9	12.4	49.3	74.0	-24.7	Peak	Vertical
*	8879.5	35.9	13.4	49.3	74.0	-24.7	Peak	Vertical
*	9865.5	34.8	16.1	50.9	74.0	-23.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (92.8dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AirFinder Location Beacon	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC1	Test Date	2019/08/06
Model No.	WF-402B	Test Channel	19
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	5454.0	36.1	6.6	42.7	74.0	-31.3	Peak	Horizontal
	8029.5	35.9	12.6	48.5	74.0	-25.5	Peak	Horizontal
*	8624.5	36.2	13.0	49.2	74.0	-24.8	Peak	Horizontal
*	9568.0	35.3	15.5	50.8	74.0	-23.2	Peak	Horizontal
	5148.0	37.7	6.4	44.1	74.0	-29.9	Peak	Vertical
	7400.5	36.2	11.7	47.9	74.0	-26.1	Peak	Vertical
*	7995.5	36.7	12.7	49.4	74.0	-24.6	Peak	Vertical
*	9882.5	35.2	16.1	51.3	74.0	-22.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (91.7dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AirFinder Location Beacon	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC1	Test Date	2019/08/06
Model No.	WF-402B	Test Channel	39
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	5080.0	37.2	6.4	43.6	74.0	-30.4	Peak	Horizontal
	7332.5	36.2	11.7	47.9	74.0	-26.1	Peak	Horizontal
*	8709.5	35.9	13.2	49.1	74.0	-24.9	Peak	Horizontal
*	9925.0	35.2	16.0	51.2	74.0	-22.8	Peak	Horizontal
	4961.0	37.2	5.9	43.1	74.0	-30.9	Peak	Vertical
	5420.0	36.9	6.4	43.3	74.0	-30.7	Peak	Vertical
*	7230.5	36.5	11.7	48.2	74.0	-25.8	Peak	Vertical
*	8692.5	36.8	13.2	50.0	74.0	-24.0	Peak	Vertical


Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (89.6dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The worst case of Radiated Emission below 1GHz:

Site: AC1	Time: 2019/08/16 - 10:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: VULB 9168_20-2000MHz	Polarity: Horizontal
EUT: AirFinder Location Beacon	Power: AC 120V/60Hz
Worse Case Mode: Transmit by BLE at channel 2402MHz	

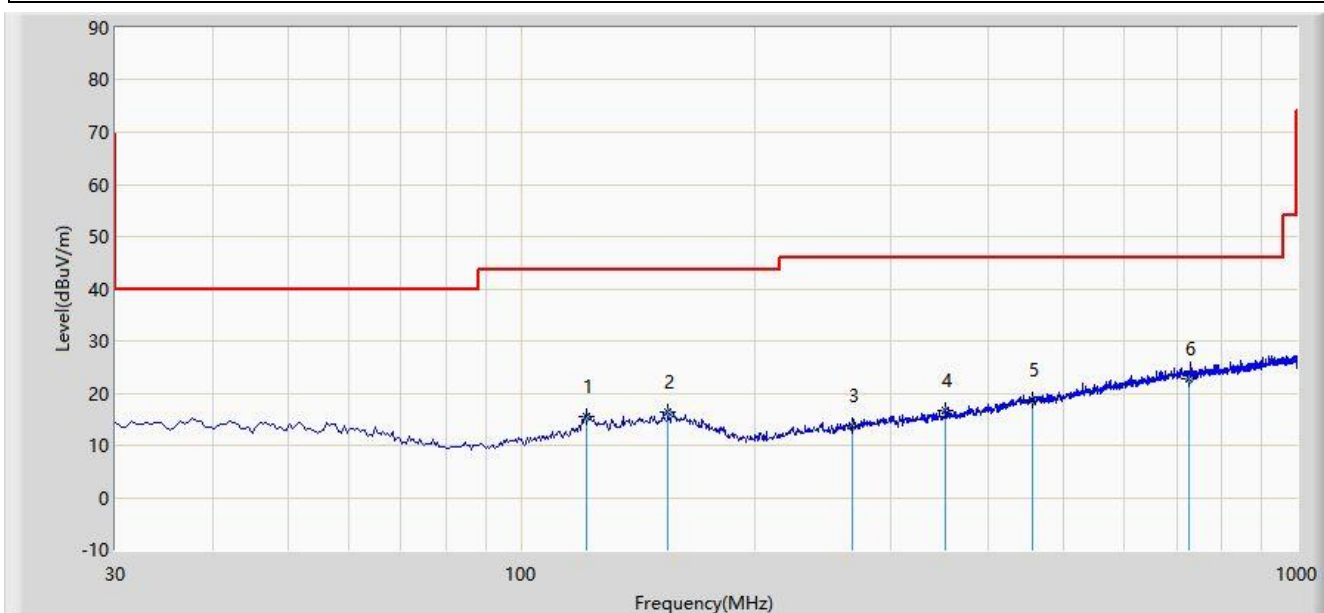


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			121.182	15.397	1.984	-28.103	43.500	13.412	QP
2			154.321	16.246	0.845	-27.254	43.500	15.401	QP
3			267.354	13.842	0.214	-32.158	46.000	13.628	QP
4			352.000	16.751	1.023	-29.249	46.000	15.728	QP
5			456.993	18.720	0.546	-27.280	46.000	18.174	QP
6		*	727.549	22.811	-0.014	-23.189	46.000	22.824	QP

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

Site: AC1	Time: 2019/08/16 - 10:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: VULB 9168_20-2000MHz	Polarity: Vertical
EUT: AirFinder Location Beacon	Power: AC 120V/60Hz
Worse Case Mode: Transmit by BLE at channel 2402MHz	

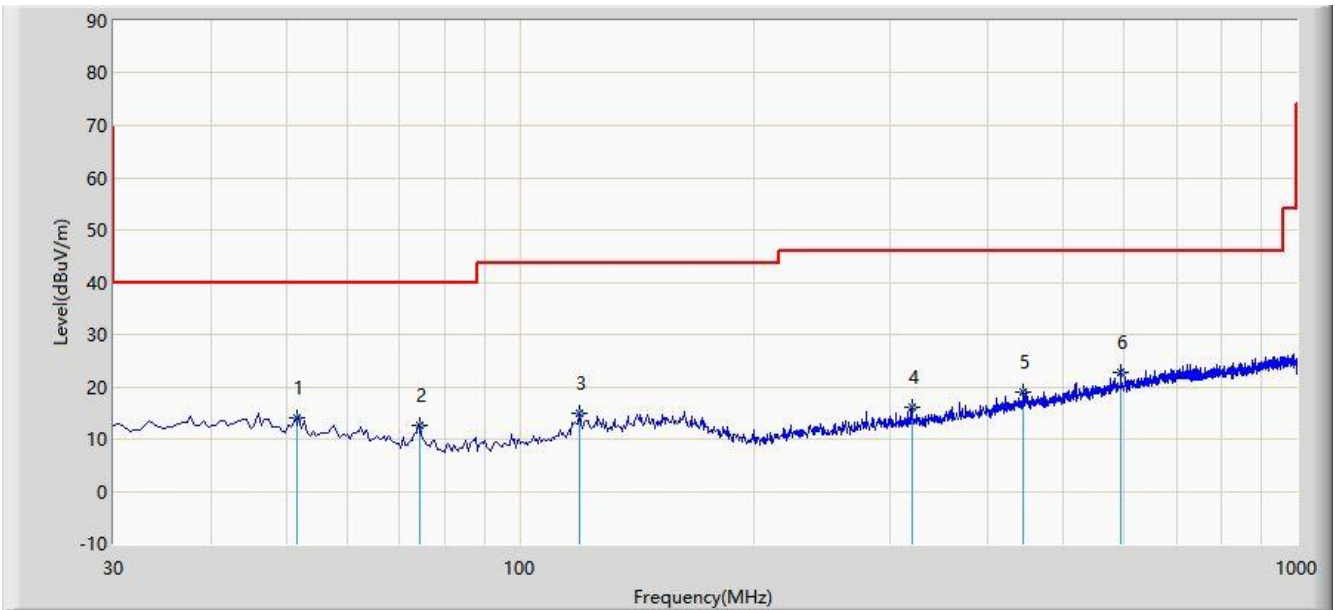

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			51.641	14.183	0.045	-25.817	40.000	14.138	QP
2			74.254	12.563	1.521	-27.437	40.000	11.042	QP
3			119.564	14.812	1.540	-28.688	43.500	13.272	QP
4			319.640	15.948	0.870	-30.052	46.000	15.078	QP
5			445.350	19.024	1.058	-26.976	46.000	17.966	QP
6		*	594.124	22.648	1.860	-23.352	46.000	20.787	QP

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

Product	AirFinder Location Beacon AC Power	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC1	Test Date	2019/08/06
Model No.	WF-402CB	Test Channel	00
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4808.0	37.1	5.6	42.7	74.0	-31.3	Peak	Horizontal
	7511.0	36.0	11.9	47.9	74.0	-26.1	Peak	Horizontal
*	8641.5	36.4	13.1	49.5	74.3	-24.8	Peak	Horizontal
*	9653.0	35.6	15.3	50.9	74.3	-23.4	Peak	Horizontal
	4935.5	37.3	5.8	43.1	74.0	-30.9	Peak	Vertical
	8242.0	36.3	12.3	48.6	74.0	-25.4	Peak	Vertical
*	8718.0	36.0	13.2	49.2	74.3	-25.1	Peak	Vertical
*	9772.0	35.1	15.9	51.0	74.3	-23.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (94.3dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AirFinder Location Beacon AC Power	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC1	Test Date	2019/08/06
Model No.	WF-402CB	Test Channel	19
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4587.0	37.7	4.5	42.2	74.0	-31.8	Peak	Horizontal
	7528.0	36.7	11.8	48.5	74.0	-25.5	Peak	Horizontal
*	8828.5	35.5	13.4	48.9	74.0	-25.1	Peak	Horizontal
*	10018.5	35.5	16.1	51.6	74.0	-22.4	Peak	Horizontal
	4349.0	38.3	3.7	42.0	74.0	-32.0	Peak	Vertical
	5454.0	35.7	6.6	42.3	74.0	-31.7	Peak	Vertical
*	7120.0	35.6	11.4	47.0	74.0	-27.0	Peak	Vertical
*	8624.5	36.1	13.0	49.1	74.0	-24.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (92.7dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AirFinder Location Beacon AC Power	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC1	Test Date	2019/08/06
Model No.	WF-402CB	Test Channel	39
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4961.0	38.6	5.9	44.5	74.0	-29.5	Peak	Horizontal
	7460.0	36.1	11.8	47.9	74.0	-26.1	Peak	Horizontal
*	8888.0	36.4	13.4	49.8	74.0	-24.2	Peak	Horizontal
*	9772.0	35.0	15.9	50.9	74.0	-23.1	Peak	Horizontal
	4323.5	37.9	3.6	41.5	74.0	-32.5	Peak	Vertical
	5088.5	37.1	6.4	43.5	74.0	-30.5	Peak	Vertical
*	6584.5	35.4	9.7	45.1	74.0	-28.9	Peak	Vertical
*	8735.0	35.7	13.2	48.9	74.0	-25.1	Peak	Vertical


Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (90.9dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The worst case of Radiated Emission below 1GHz:

Site: AC1	Time: 2019/08/16 - 11:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: VULB 9168_20-2000MHz	Polarity: Horizontal
EUT: AirFinder Location Beacon AC Power	Power: AC 120V/60Hz
Worse Case Mode: Transmit by BLE at channel 2402MHz	

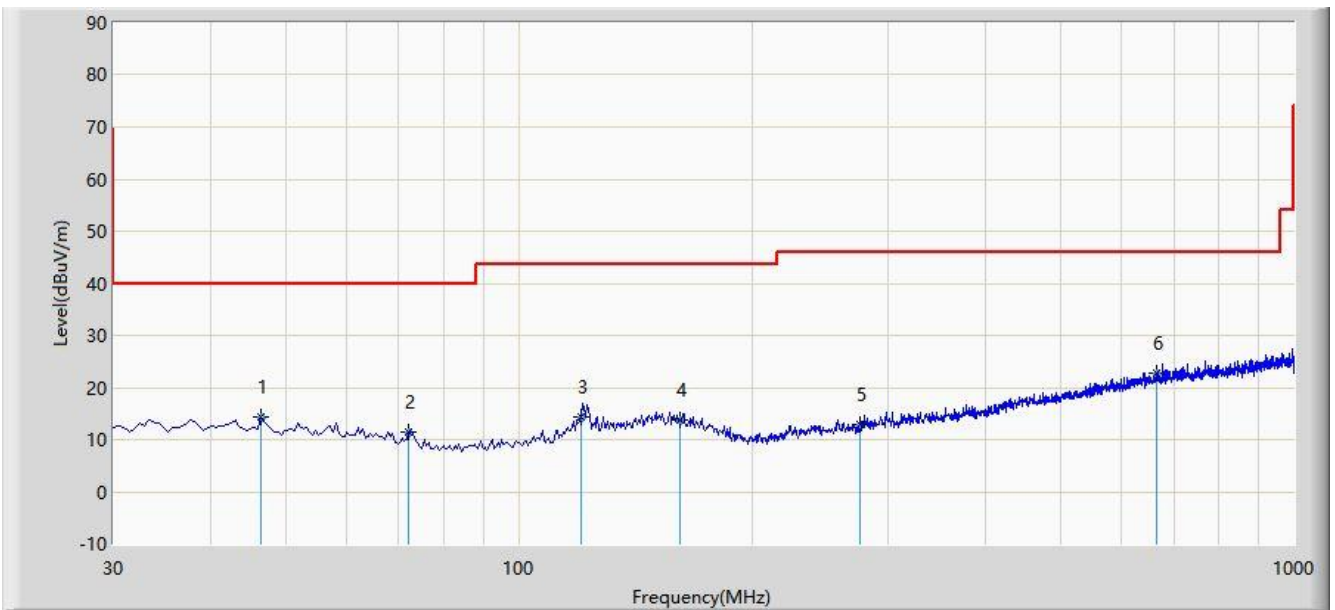


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			46.490	14.438	0.128	-25.562	40.000	14.310	QP
2			72.195	11.455	0.110	-28.545	40.000	11.345	QP
3			120.210	14.453	1.124	-29.047	43.500	13.329	QP
4			161.435	13.699	-1.579	-29.801	43.500	15.278	QP
5			275.410	12.964	-0.930	-33.036	46.000	13.894	QP
6		*	663.895	22.718	0.751	-23.282	46.000	21.967	QP

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

Site: AC1	Time: 2019/08/16 - 11:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: VULB 9168_20-2000MHz	Polarity: Vertical
EUT: AirFinder Location Beacon AC Power	Power: AC 120V/60Hz
Worse Case Mode: Transmit by BLE at channel 2402MHz	

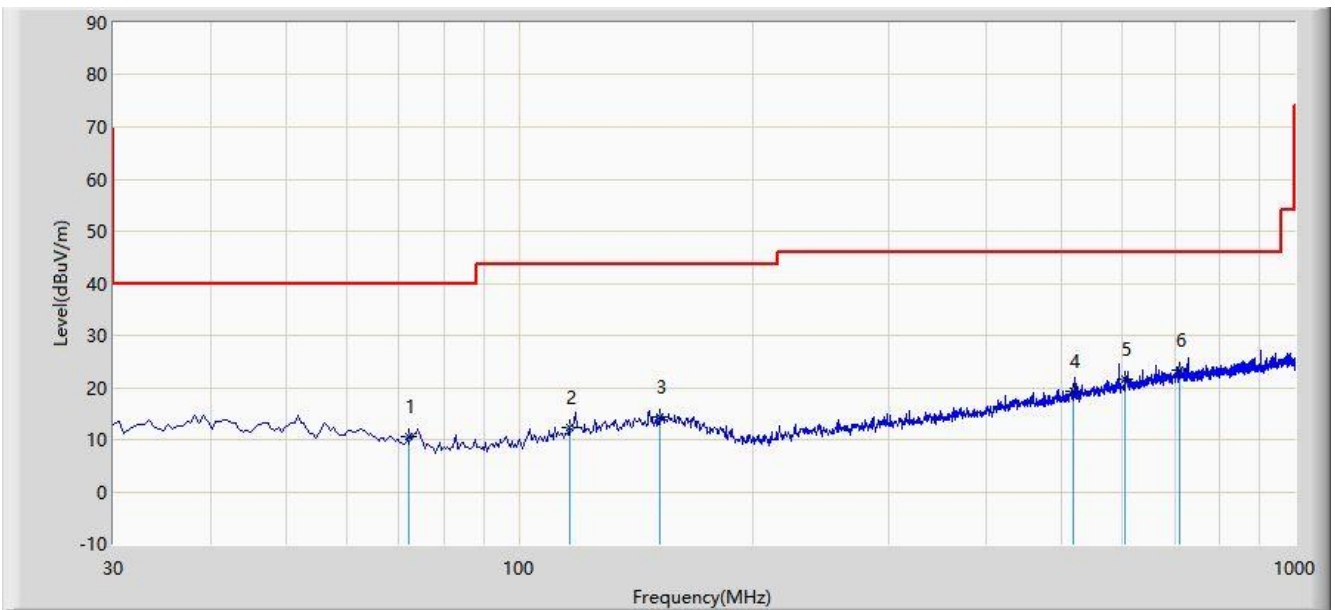

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			72.195	10.580	-0.765	-29.420	40.000	11.345	QP
2			116.330	12.405	-0.517	-31.095	43.500	12.922	QP
3			151.735	14.340	-1.062	-29.160	43.500	15.402	QP
4			517.425	19.270	0.033	-26.730	46.000	19.237	QP
5			605.210	21.603	0.589	-24.397	46.000	21.014	QP
6		*	710.455	23.328	0.753	-22.672	46.000	22.576	QP

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.25 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency (MHz)	Field Strength (uV/m)	Measured Distance (Meters)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2.Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.7.3.Test Setting


Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW $\geq 1/T$
4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces


7.7.4.Test Setup

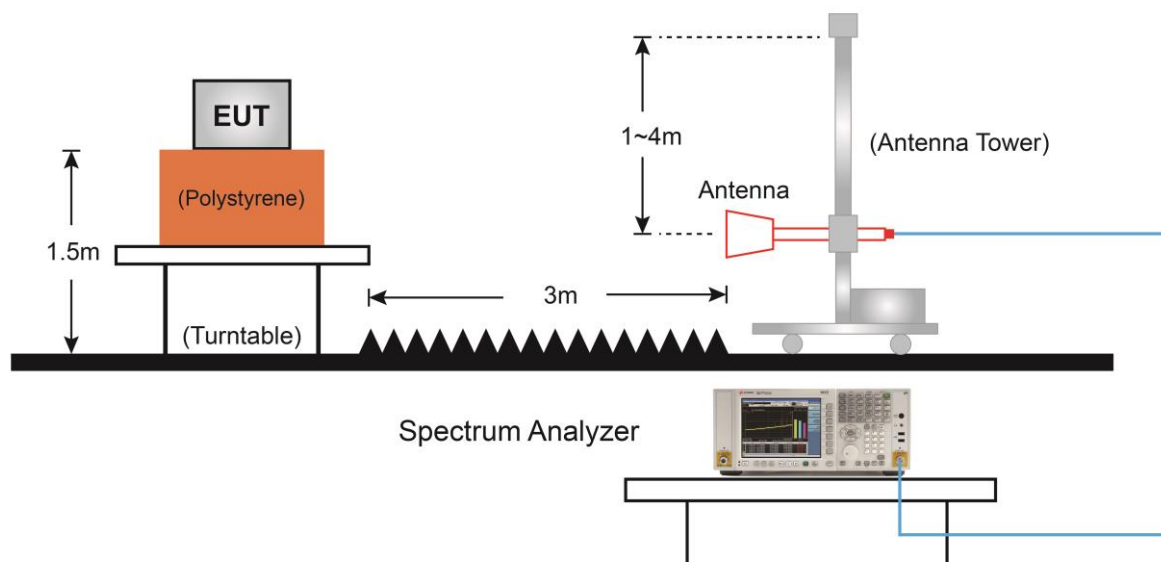

7.7.5.Test Result

For WF-402B

Site: AC1	Time: 2019/08/06 - 18:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AirFinder Location Beacon	Power: By Battery
Note: Transmit by BLE at channel 2402MHz	

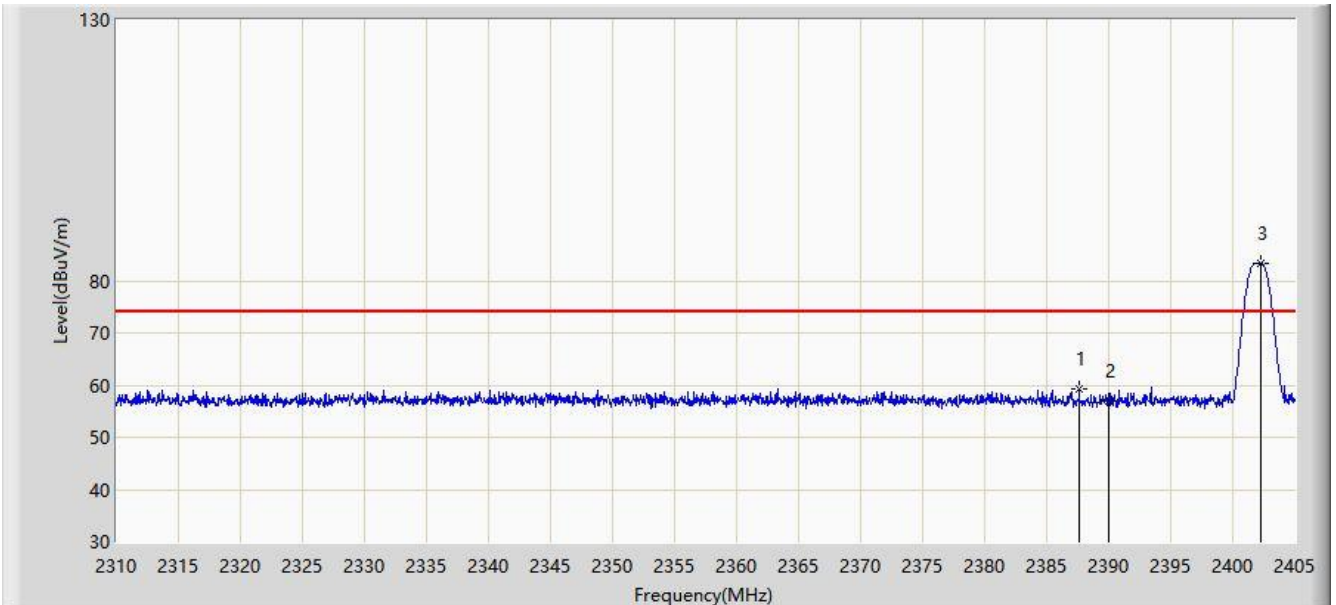


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.615	59.370	26.953	-14.630	74.000	32.417	PK
2			2390.000	56.980	24.567	-17.020	74.000	32.413	PK
3		*	2402.245	83.333	50.937	N/A	N/A	32.396	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/08/06 - 18:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AirFinder Location Beacon	Power: By Battery
Note: Transmit by BLE at channel 2402MHz	

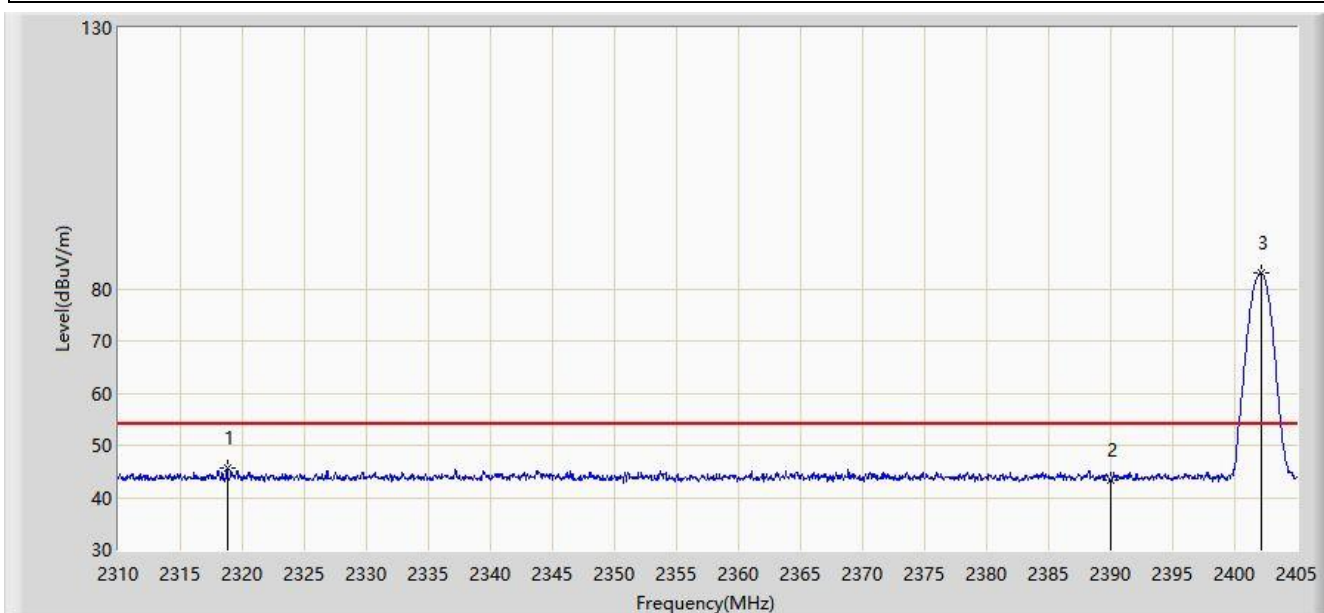


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2318.788	45.619	12.983	-8.381	54.000	32.636	AV
2			2390.000	43.238	10.825	-10.762	54.000	32.413	AV
3		*	2402.102	82.999	50.603	N/A	N/A	32.395	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/08/06 - 18:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AirFinder Location Beacon	Power: By Battery
Note: Transmit by BLE at channel 2402MHz	

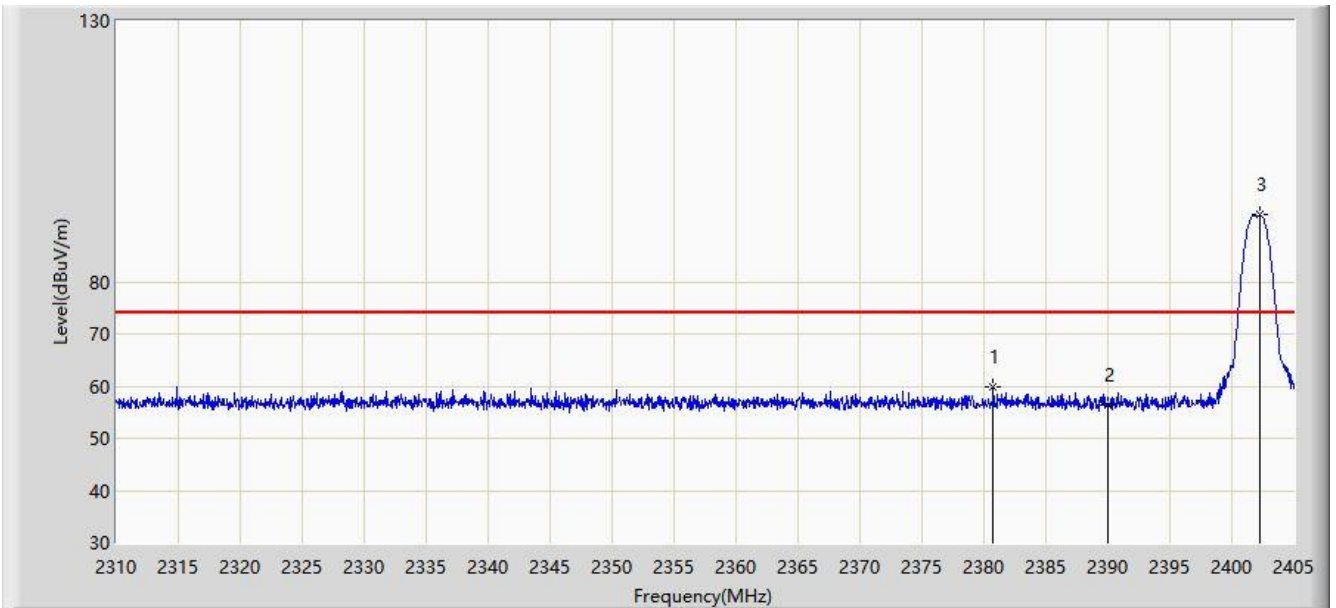


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2380.728	59.890	27.460	-14.110	74.000	32.430	PK
2			2390.000	56.232	23.819	-17.768	74.000	32.413	PK
3		*	2402.293	92.764	60.368	N/A	N/A	32.396	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/08/06 - 18:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AirFinder Location Beacon	Power: By Battery
Note: Transmit by BLE at channel 2402MHz	

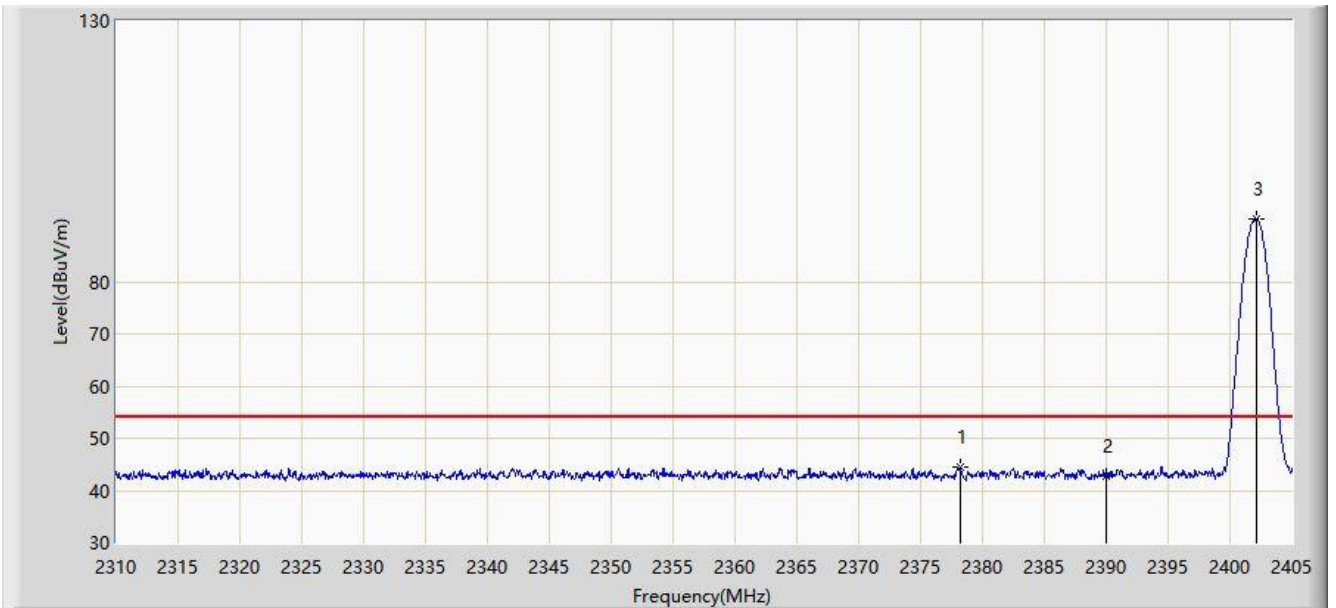


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2378.210	44.373	11.939	-9.627	54.000	32.434	AV
2			2390.000	42.719	10.306	-11.281	54.000	32.413	AV
3		*	2402.102	92.132	59.736	N/A	N/A	32.395	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/08/06 - 18:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AirFinder Location Beacon	Power: By Battery
Note: Transmit by BLE at channel 2480MHz	

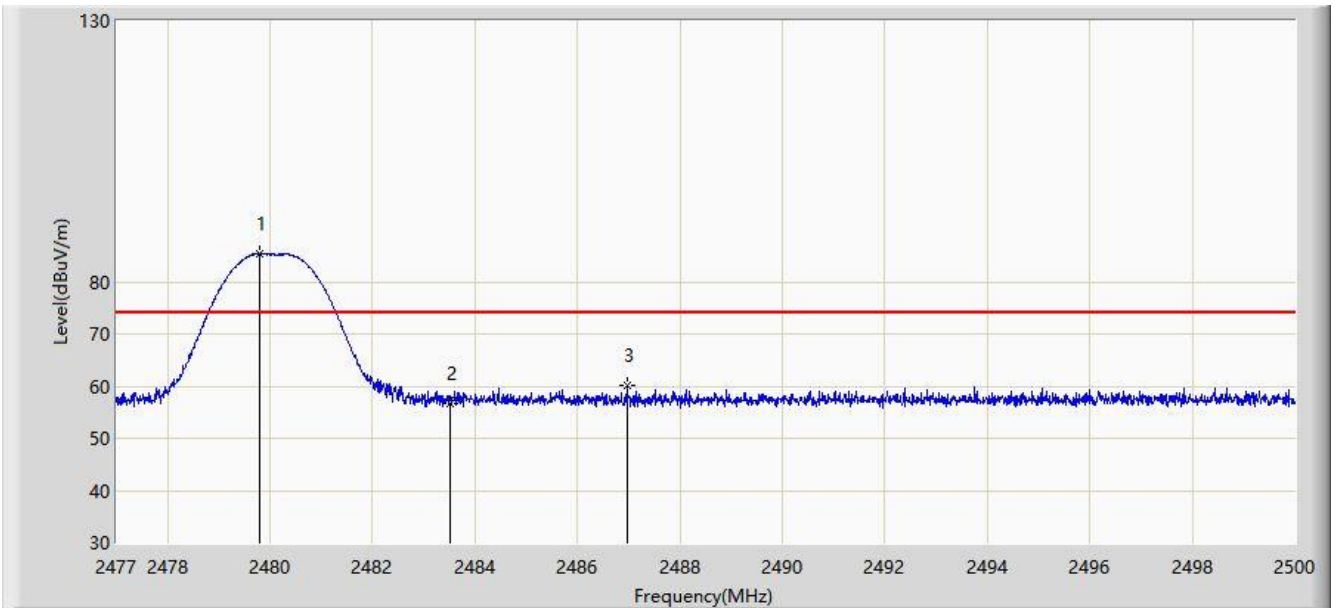


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.783	85.357	52.949	N/A	N/A	32.408	PK
2			2483.500	56.641	24.226	-17.359	74.000	32.416	PK
3			2486.959	60.076	27.654	-13.924	74.000	32.422	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/08/06 - 18:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AirFinder Location Beacon	Power: By Battery
Note: Transmit by BLE at channel 2480MHz	

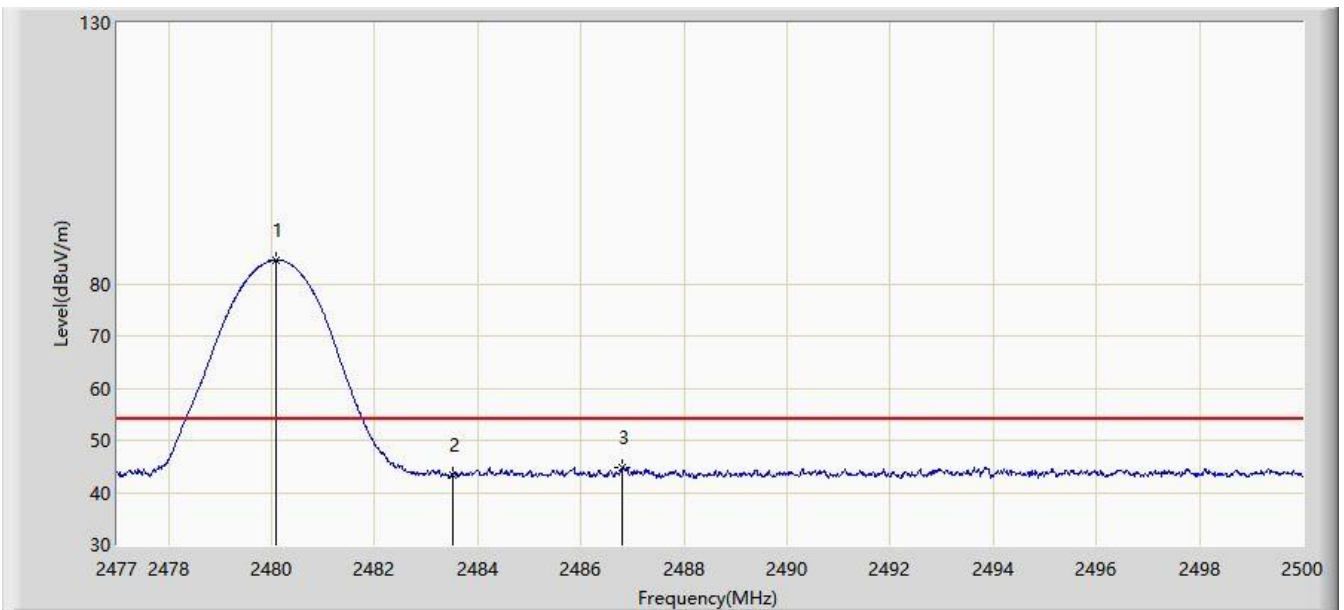


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.094	84.553	52.144	N/A	N/A	32.408	AV
2			2483.500	43.376	10.961	-10.624	54.000	32.416	AV
3			2486.810	44.819	12.397	-9.181	54.000	32.422	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/08/06 - 18:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AirFinder Location Beacon	Power: By Battery
Note: Transmit by BLE at channel 2480MHz	

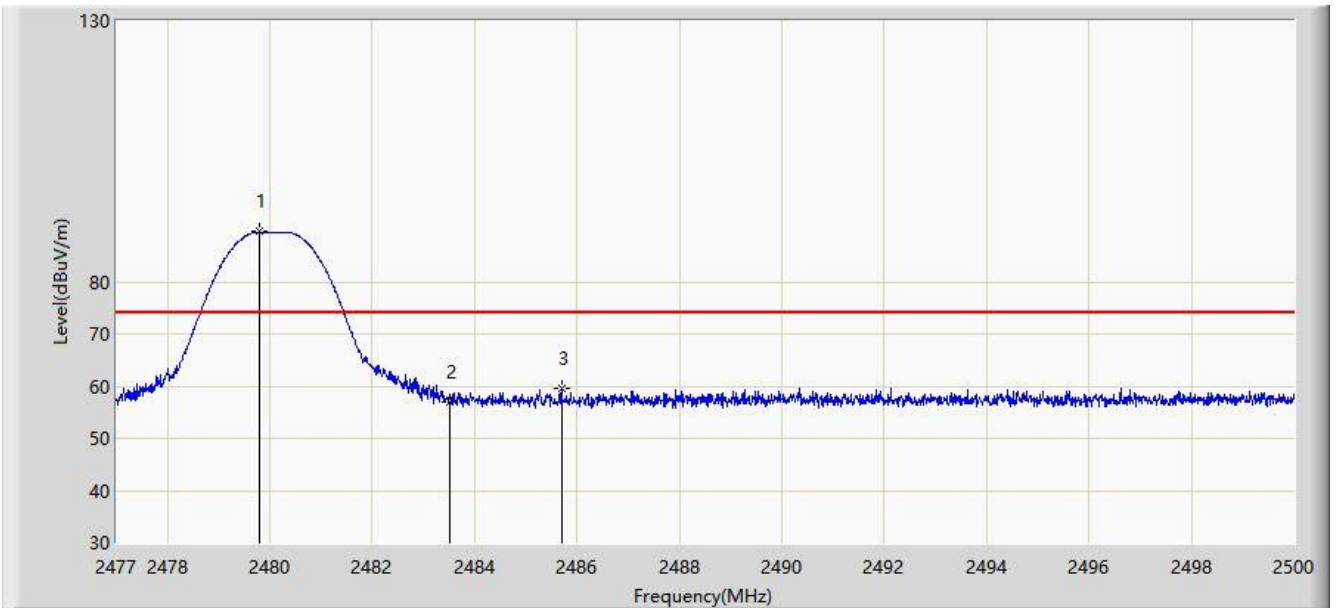


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.806	89.575	57.167	N/A	N/A	32.408	PK
2			2483.500	56.992	24.577	-17.008	74.000	32.416	PK
3			2485.694	59.702	27.282	-14.298	74.000	32.420	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/08/06 - 19:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AirFinder Location Beacon	Power: By Battery
Note: Transmit by BLE at channel 2480MHz	

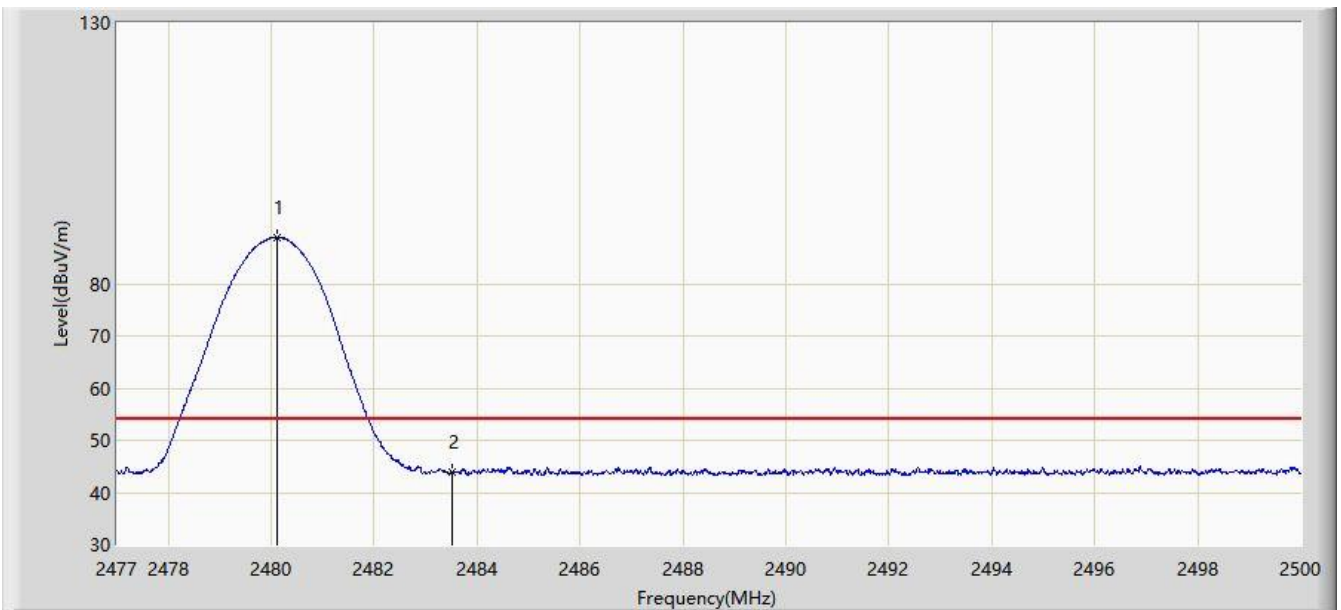


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.105	88.862	56.453	N/A	N/A	32.408	AV
2			2483.500	43.931	11.516	-10.069	54.000	32.416	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

For WF-402CB

Site: AC1	Time: 2019/08/06 - 18:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AirFinder Location Beacon AC Power	Power: AC 120V/60Hz
Note: Transmit by BLE at channel 2402MHz	

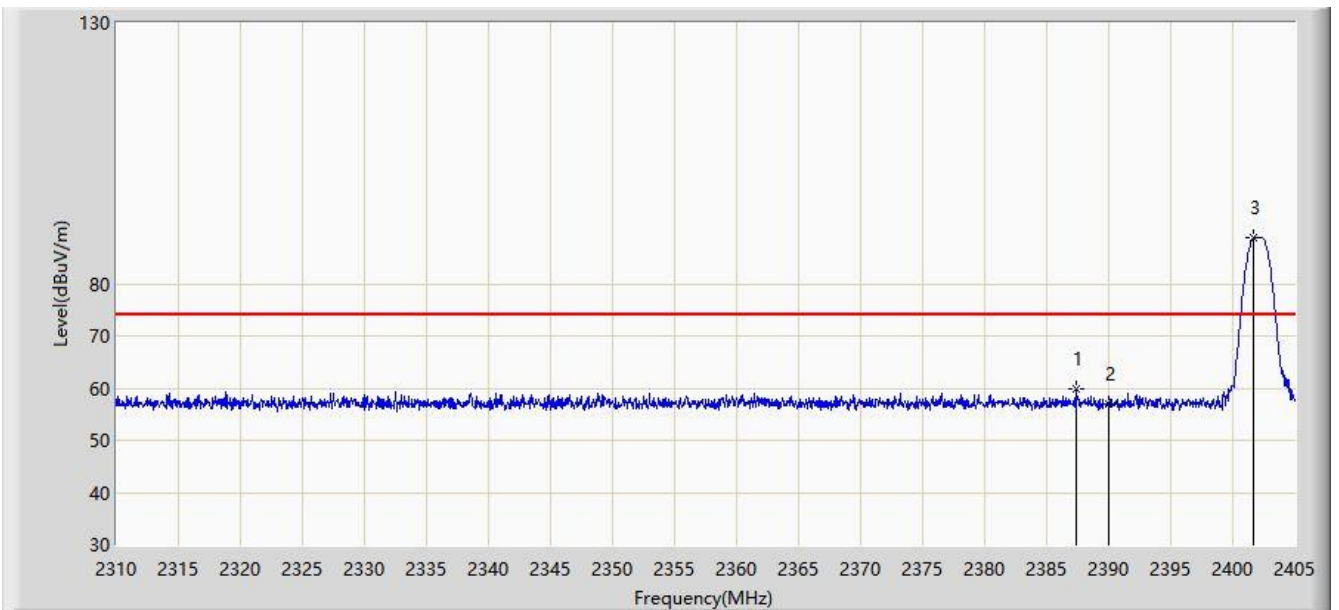


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.330	59.834	27.416	-14.166	74.000	32.418	PK
2			2390.000	56.821	24.408	-17.179	74.000	32.413	PK
3		*	2401.722	88.868	56.472	N/A	N/A	32.396	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/08/06 - 18:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AirFinder Location Beacon AC Power	Power: AC 120V/60Hz
Note: Transmit by BLE at channel 2402MHz	

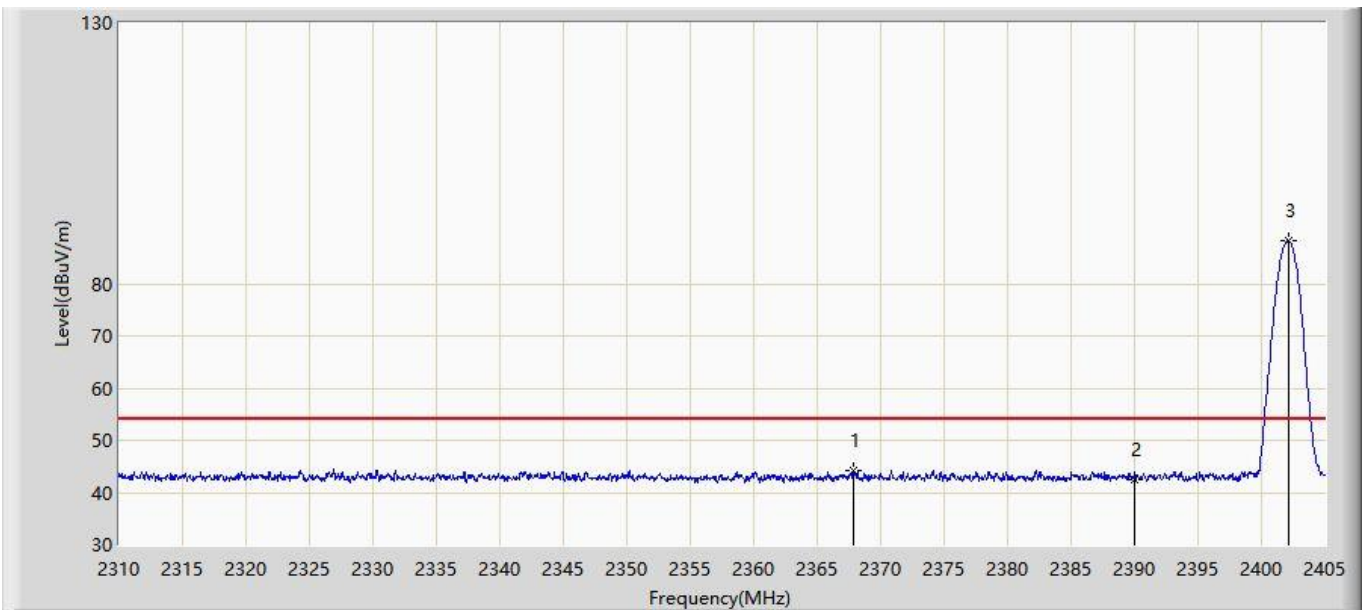


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2367.903	44.174	11.717	-9.826	54.000	32.457	AV
2			2390.000	42.415	10.002	-11.585	54.000	32.413	AV
3		*	2402.102	88.220	55.824	N/A	N/A	32.395	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/08/06 - 18:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AirFinder Location Beacon AC Power	Power: AC 120V/60Hz
Note: Transmit by BLE at channel 2402MHz	

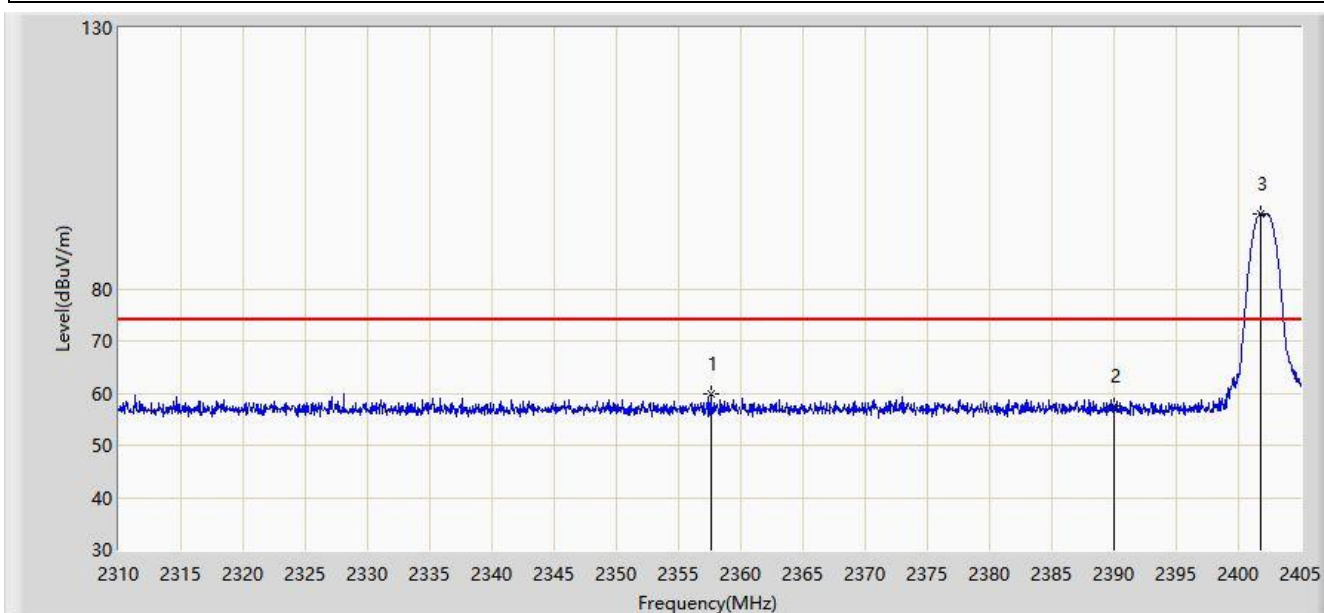


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2357.595	59.851	27.370	-14.149	74.000	32.481	PK
2			2390.000	57.438	25.025	-16.562	74.000	32.413	PK
3		*	2401.818	94.302	61.906	N/A	N/A	32.396	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/08/06 - 18:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AirFinder Location Beacon AC Power	Power: AC 120V/60Hz
Note: Transmit by BLE at channel 2402MHz	

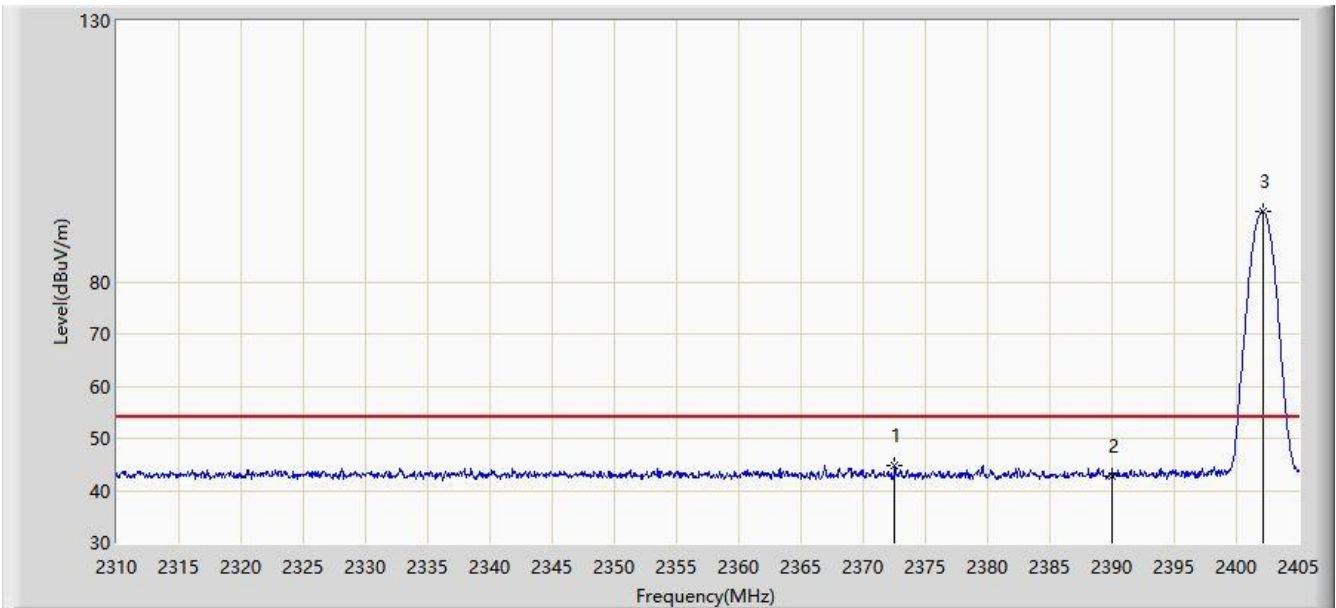


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2372.558	44.786	12.339	-9.214	54.000	32.446	AV
2			2390.000	42.849	10.436	-11.151	54.000	32.413	AV
3		*	2402.102	93.477	61.081	N/A	N/A	32.395	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/08/06 - 18:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AirFinder Location Beacon AC Power	Power: AC 120V/60Hz
Note: Transmit by BLE at channel 2480MHz	

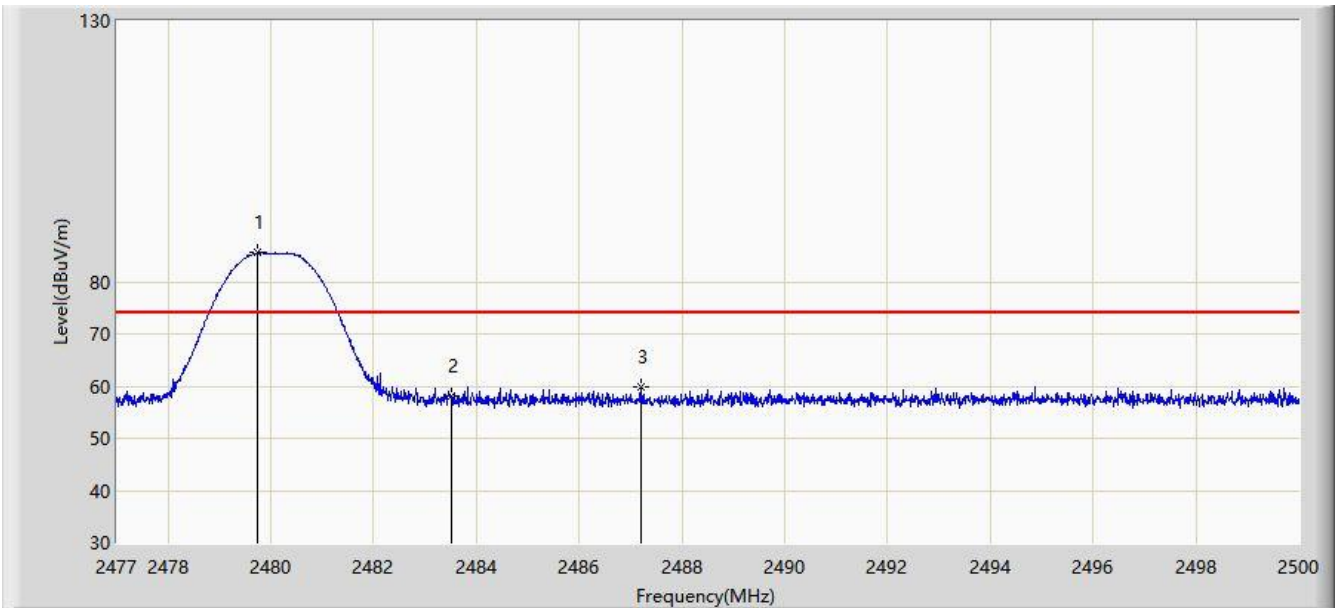


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.749	85.596	53.188	N/A	N/A	32.408	PK
2			2483.500	58.077	25.662	-15.923	74.000	32.416	PK
3			2487.189	59.802	27.379	-14.198	74.000	32.422	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/08/06 - 18:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AirFinder Location Beacon AC Power	Power: AC 120V/60Hz
Note: Transmit by BLE at channel 2480MHz	

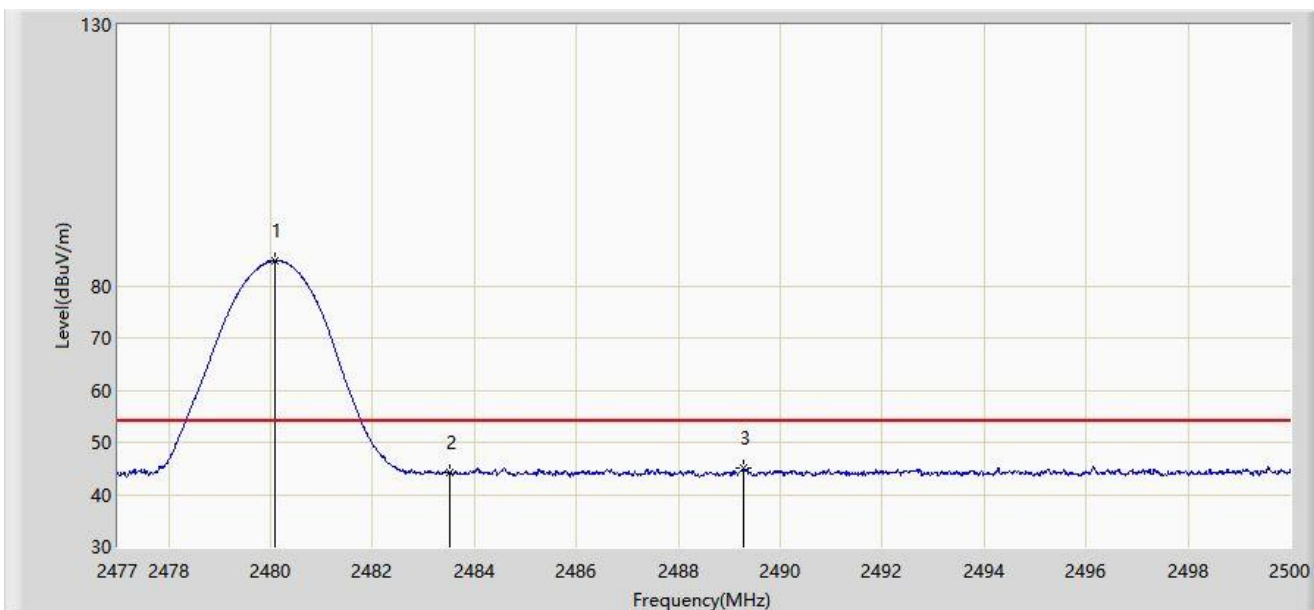


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.094	84.805	52.396	N/A	N/A	32.408	AV
2			2483.500	44.285	11.870	-9.715	54.000	32.416	AV
3			2489.271	45.119	12.692	-8.881	54.000	32.427	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/08/06 - 18:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AirFinder Location Beacon AC Power	Power: AC 120V/60Hz
Note: Transmit by BLE at channel 2480MHz	

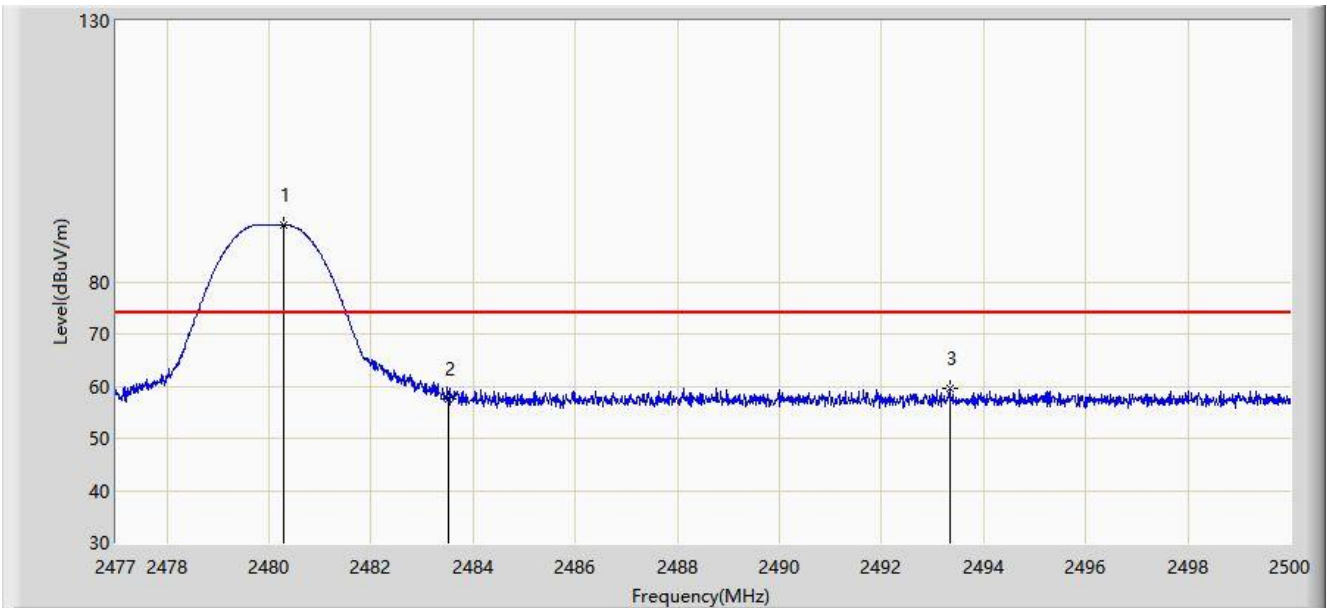


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.289	90.879	58.470	N/A	N/A	32.409	PK
2			2483.500	57.526	25.111	-16.474	74.000	32.416	PK
3			2493.330	59.671	27.236	-14.329	74.000	32.435	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/08/06 - 18:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AirFinder Location Beacon AC Power	Power: AC 120V/60Hz
Note: Transmit by BLE at channel 2480MHz	

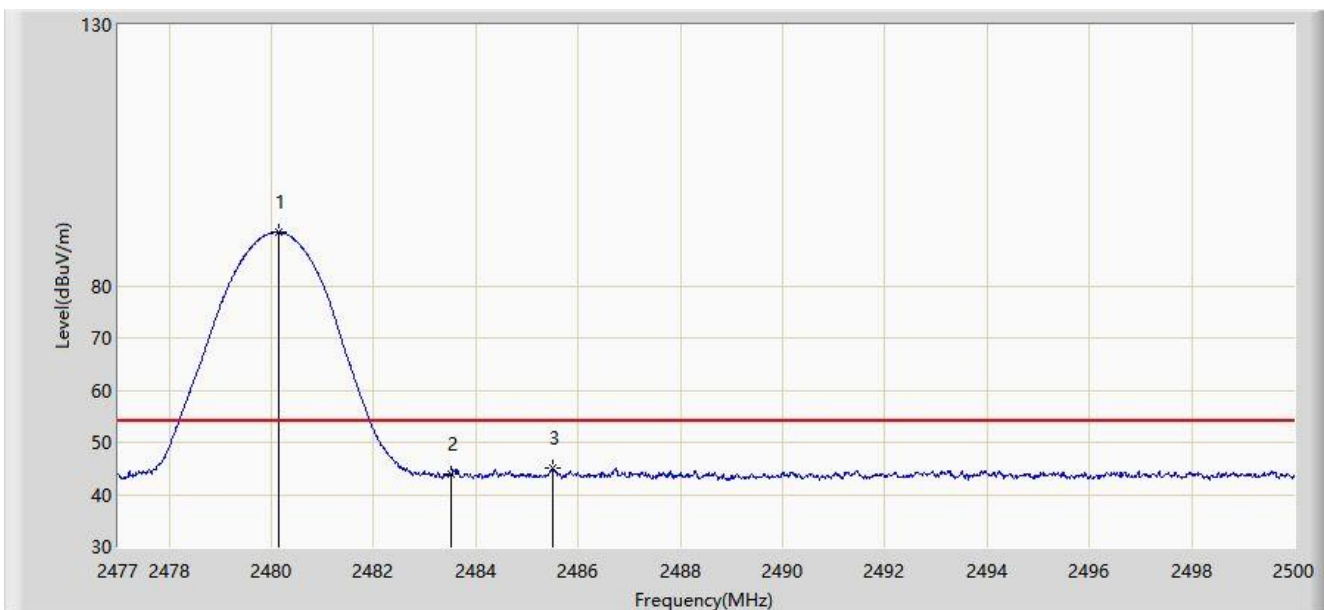

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.128	90.247	57.838	N/A	N/A	32.409	AV
2			2483.500	43.958	11.543	-10.042	54.000	32.416	AV
3			2485.499	44.947	12.528	-9.053	54.000	32.419	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15.107		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 ~ 0.50	66 ~ 56	56 ~ 46
0.50 ~ 5.0	56	46
5.0 ~ 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

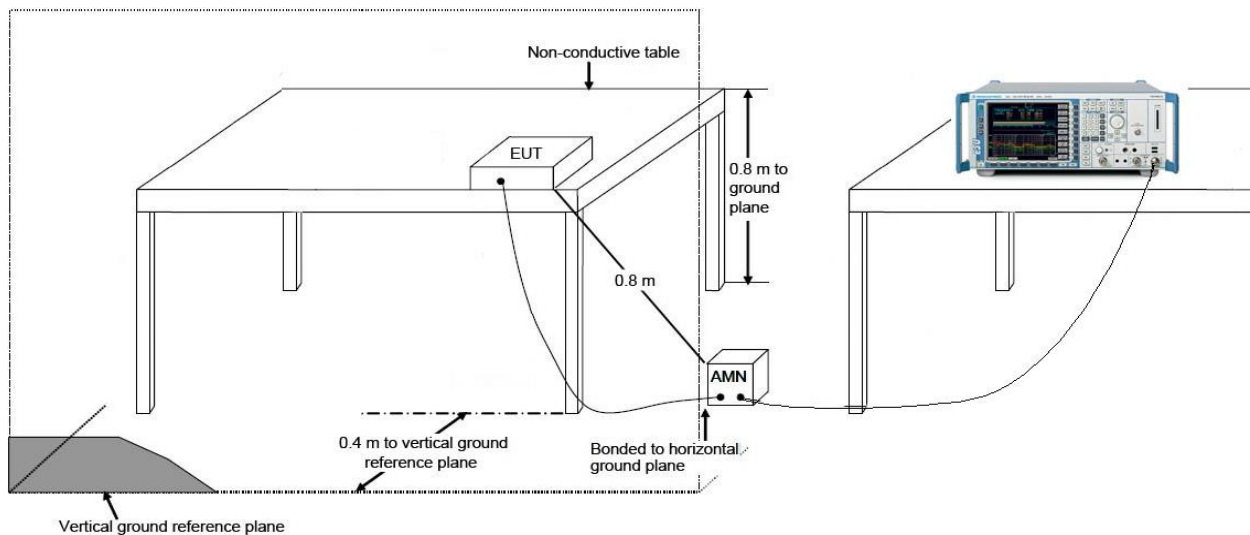

7.8.3.Test Result

Site: SR2	Time: 2019/08/16 - 13:06
Limit: FCC_Part15.207_CE	Engineer: Liz Yuan
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: AirFinder Location Beacon AC Power	Power: AC 120V/60Hz
Test Mode: Transmit by BLE at channel 2402MHz	

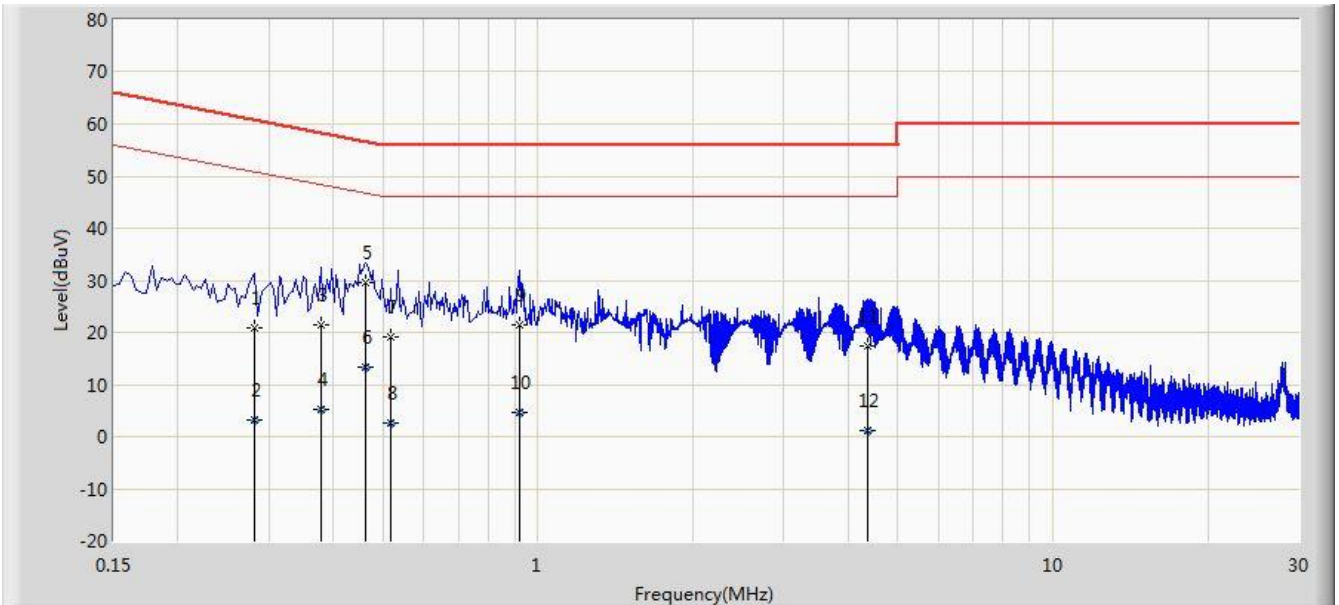


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.282	20.922	10.933	-39.834	60.757	9.990	QP
2			0.282	3.243	-6.747	-47.514	50.757	9.990	AV
3			0.378	21.542	11.475	-36.781	58.323	10.067	QP
4			0.378	5.289	-4.779	-43.034	48.323	10.067	AV
5		*	0.463	29.637	19.500	-27.002	56.639	10.137	QP
6			0.463	13.237	3.100	-33.402	46.639	10.137	AV
7			0.518	19.256	9.100	-36.744	56.000	10.156	QP
8			0.518	2.656	-7.500	-43.344	46.000	10.156	AV
9			0.918	21.389	11.438	-34.611	56.000	9.951	QP
10			0.918	4.622	-5.328	-41.378	46.000	9.951	AV
11			4.362	17.481	7.501	-38.519	56.000	9.980	QP
12			4.362	1.117	-8.863	-44.883	46.000	9.980	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SR2	Time: 2019/08/16 - 13:22
Limit: FCC_Part15.207_CE	Engineer: Liz Yuan
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: AirFinder Location Beacon AC Power	Power: AC 120V/60Hz
Test Mode: Transmit by BLE at channel 2402MHz	

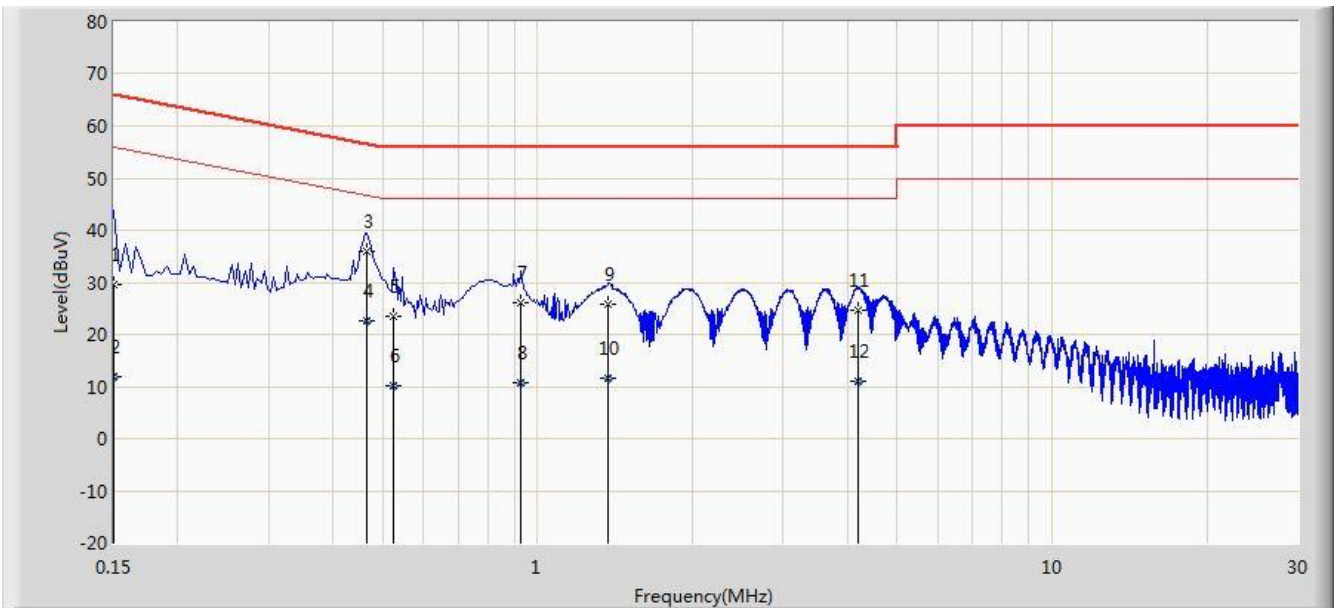

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.150	29.558	18.416	-36.442	66.000	11.142	QP
2			0.150	11.942	0.800	-44.058	56.000	11.142	AV
3		*	0.464	36.060	25.900	-20.561	56.621	10.160	QP
4			0.464	22.660	12.500	-23.961	46.621	10.160	AV
5			0.526	23.471	13.300	-32.529	56.000	10.172	QP
6			0.526	10.242	0.070	-35.758	46.000	10.172	AV
7			0.930	26.142	16.194	-29.858	56.000	9.947	QP
8			0.930	10.863	0.915	-35.137	46.000	9.947	AV
9			1.374	25.784	15.889	-30.216	56.000	9.895	QP
10			1.374	11.466	1.571	-34.534	46.000	9.895	AV
11			4.206	24.571	14.586	-31.429	56.000	9.985	QP
12			4.206	11.033	1.048	-34.967	46.000	9.985	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

8. CONCLUSION

The data collected relate only the item(s) tested and show that the unit is compliance with Part 15C of the FCC rules.

The End

Appendix A – Test Setup Photograph

Refer to “1907RSU054-UT” file.

Appendix B – EUT Photograph

Refer to “1907RSU054-UE” file.