

MEASUREMENT REPORT

of

Wireless LAN Ethernet Adapter

Applicant : SmartAnt Telecom Co., Ltd.

EUT : Range Extension WLAN Adapter

Model : SAA04-052240

FCC ID : SFMSAA04052240

Tested by :

Training Research Co., Ltd.

TEL : 886-2-26935155 FAX : 886-2-26934440

No. 255, Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C.

CERTIFICATION

We here by verify that:

The test data, data evaluation, test procedures and equipment configurations shown in this report were made mainly in accordance with the procedures given in ANSI C63.4 (2003) as a reference. All test were conducted by **Training Research Co., Ltd.**, 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Also, we attest to the accuracy of each.

We further submit that the energy emitted by the sample EUT tested as described in the report is **in compliance with** the technical requirements set forth in the FCC Rules Part 15 Subpart B (Declaration of Conformity) and C Section 15.247.

Applicant : SmartAnt Telecom Co., Ltd.

Applicant Address : 6F, No.12, Li-Hsin Road, Science-Based Industrial Park, Hsinchu, Taiwan


Product Name : Range Extension WLAN Adapter

Model : SAA04-052240

Report No. : A5415050224

Test Date : March 25, 2005

Prepared by:


Jack Tsai

Approved by:


Frank Tsai**Conditions of issue :**

- (1) This test report shall not be reproduced except in full, without written approval of TRC. And the test result contained within this report only relate to the sample submitted for testing.
- (2) This report must not be used by the client to claim product endorsement by NVLAP or any agency of U.S. Government.
- (3) This test report, measurements made by TRC are traceable to the NIST only Conducted and Radiated Method.

★ NVLAP LAB CODE: 200174-0

Federal Communications Commission

Declaration of Conformity

for the following equipment:

Product name : Range Extension WLAN Adapter
 Model name : SAA04-052240
 Trade name : SmartAnt

Is herewith confirmed and found to comply with the requirements of CFR 47 part15 Subpart B - Unintentional Radiators regulation. The results of electromagnetic mission evaluation are shown in the report number : A5415050224

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received,
 including interference that may cause undesired operation

<i>Manufacturer</i>	<i>USA local representative</i>
Company name: SmartAnt Telecom Co., Ltd.	To be determined
Computer address: No.49, Lane 206, Wen-Te Road, Shang-Shan Village, Chiunglin, Hsinchu, Taiwan	
ZIP / Postal code 307	
Contact person: Bear Yang	
Title: Product Engineering Manager	
Email: bear@smartant.com	
Tel / Fax: 886-3-5120869 / 886-3-5120898	

Tables of Contents

I.	GENERAL	6
1.1	Introduction	6
1.2	Description of EUT	6
1.3	Test method	7
1.4	Description of Support Equipment	7
1.5	Configuration of System Under Test	10
1.6	Verify the Frequency and Channel	12
1.7	Test Procedure	13
1.8	Location of the Test Site	13
1.9	General Test Condition	13
II.	Section 15.101(a) : Equipment Authorization of Unintentional Radiators	14
III.	Section 15.203 : Antenna Requirement	15
IV.	Section 15.207 : Power Line Conducted Emissions for AC Powered Units	16
4.1	Test Condition & Setup	16
4.2	List of Test Instruments	17
4.3	Test Result of Conducted Emissions	18
	Powered by Adapter	19
	Powered by USB	22
V.	Section 15.247(a) : Technical Description of the EUT	26
VI.	Section 15.247(a)(2) : Bandwidth for Direct Sequence System	27
6.1	Test Condition & Setup	27
6.2	Test Instruments Configuration	27
6.3	List of Test Instruments	27
6.4	Test Result of Bandwidth	27
	Channel 01	28
	Channel 06	29
	Channel 11	30

VII. Section 15.247(b) : Power Output	31
7.1 Test Condition & Setup	31
7.2 List of Test Instruments	31
7.3 Test Result	31
VIII. Section 15.247(c) : Spurious Emissions (Radiated)	32
8.1 Test Condition & Setup	32
8.2 List of Test Instruments	34
8.3 Test Result of Spurious Radiated Emissions	35
RX mode, Powered by USB	35
RX mode, Powered by Adapter	37
IEEE 802.11b CH 01	39
IEEE 802.11b CH 06	41
IEEE 802.11b CH 11	43
IEEE 802.11g CH 01	45
IEEE 802.11g CH 06	47
IEEE 802.11g CH 11	49
8.4 Test Result of Bandedge	51
IEEE 802.11b CH 01	52
IEEE 802.11b CH 11	53
IEEE 802.11g CH 01	54
IEEE 802.11g CH 11	55
IX. Section 15.247(d) : Power Spectral Density	56
9.1 Test Condition & Setup	56
9.2 Test Instruments Configuration	56
9.3 List of Test Instruments	56
9.4 Test Result of Power Spectral Density	56
Channel 01	57
Channel 06	58
Channel 11	59

I . GENERAL

1.1 Introduction

The following measurement report is submitted on behalf of applicant in support that the certification in accordance with Part 2 Subpart J and Part 15 Subpart A, B and C of the Commission's Rules and Regulations.

1.2 Description of EUT

FCC ID	:	SFMSAA04052240
Product Name	:	Range Extension WLAN Adapter
Model Name	:	SAA04-052240
Frequency Range	:	2.412GHz ~ 2.462GHz
Support Channel	:	11 Channels
Modulation Skill	:	DBPSK, DQPSK, CCK, OFDM
Power Type	:	Powered by USB interface, or AC-DC adapter, Model: DSA-0051-03 FUS 40100F I/P: 100-240VAC, 50/60Hz, 0.2A O/P: 4VDC, 1A 185cm length, non-shielded, with ferrite core
Data Cable	:	USB cable x1, 30cm length, shielded, with ferrite core RJ45 cable x1, 30cm length, non-shielded, no ferrite core

1.3 Test method

- 1.3.1 The POWER port connected to AC source by power adapter. (or the POWER port connected the USB port of PC.)
- 1.3.2 Connected the LAN port of EUT with the LAN card of PC. Using PC and software provided by the manufacturer to control EUT, the test is performed under the specific conditions.
- 1.3.3 Set different data rate and channel (CH01/CH06/CH11) being tested
 - (a) Radiated for Intentional test:
making EUT to the mode of continuous transmission
 - (b) Conducted test and Radiated for unintentional test:
making EUT to the linking (Rx/Tx) mode with far support equipments
- 1.3.4 Deviation: No deviation.

1.4 Description of Support Equipment

In order to construct the minimum testing, following equipment were used as the support units.

PC : **IBM 8434**
Model No. : IVG
Serial No. : 99CCZG9
FCC ID : DoC (Declaration of Confirmation) Approved
BSMI : R33026
Power type : 100 ~ 127VAC/200 ~ 240VAC, 6A/3A, 50 ~ 60Hz, Switching
Power cord : Non-shielded, 1.8m length, Plastic hood, No ferrite core

Monitor : **HP 15' Color Monitor**
Model No. : D8894A
Serial No. : CN02364355
FCC ID : ARSCM356N
BSMI : 3882A031
Power type : 100 ~ 240 VAC / 1.5A, 50 ~ 60 Hz, Switching
Power cord : Non-shielded, 1.80m length, Plastic hood, No ferrite core
Data cable : Shielded, 1.50m length, Plastic hood, with ferrite core

Printer : **EPSON**
Model No. : B241A
Serial No. : FAPY155090
FCC ID : N/A, DoC Approved
BSMI : R33126
Power type : Switching adaptor
Power cord : Non-shielded, 198cm length, No ferrite core
Data cable : Shielded, 1.50m length, No ferrite core

PS/2 Mouse : **HP**
Model No. : M-S69
Serial No. : 334684-002 323614-001
FCC ID : DoC Approved
BSMI : R41126
Power type : By PC
Power cord : Shielded, 1.90m length, No ferrite core

PS/2 Keyboard : **HP**
Model No. : 5181
Serial No. : BE21700405
FCC ID : DoC Approved
BSMI : 3892C981
Power type : By PC
Data cable : Shielded, 1.73m length, no ferrite core

Modem : **ACEEX**
Model No. : DM-1414
Serial No. : 9010583
FCC ID : IFAXDM1414
Power type : Linear
Power cord : Non-shielded, 1.9m length, No ferrite cord
Data cable : RS232, Shielded, 1.2m length, No ferrite core
RJ11C x 2, 7' length non-shielded, No ferrite core

USB Game pad : **Logitech**
Model No. : G-UC3B
Serial No. : AE3500500
FCC ID : DoC Approved
BSMI : 4902A047
Power type : Powered by PC
Power Cable : Shielded, 187cm length, Plastic hood, No ferrite core.


LAN Card : **D-Link**
Model No. : DFE-530TX
Serial No. : 0050BAE32FF3
FCC ID : N/A, DoC Approved

Notebook PC : **Twinhead**
Model No. : N222S
Serial No. : SY3261000988
FCC ID : DoC (Declaration of Confirmation) Approved
BSMI : 71001018
Power adaptor : **LI Shin International Enterprise Corp.**
Model No. : LSE9802A2060
Serial No. : A20231065818
BSMI : 3882B381
Power type : 100 ~ 240VAC / 50 ~ 60Hz, 1.5A, Switching
Power cord : Non-shielded, 1.0m length, Plastic hood, No ferrite core
(Main power to adaptor)
Shielded, 1.5m length, Plastic hood, ferrite core
(DC plug to adaptor)

WLAN Card : **Gemtek Technology Co., Ltd.**
Model No. : C911003
FCC ID : MXF-C911003

1.5 Configuration of System Under Test

1.5.1 Conducted and Radiated for Unintentional

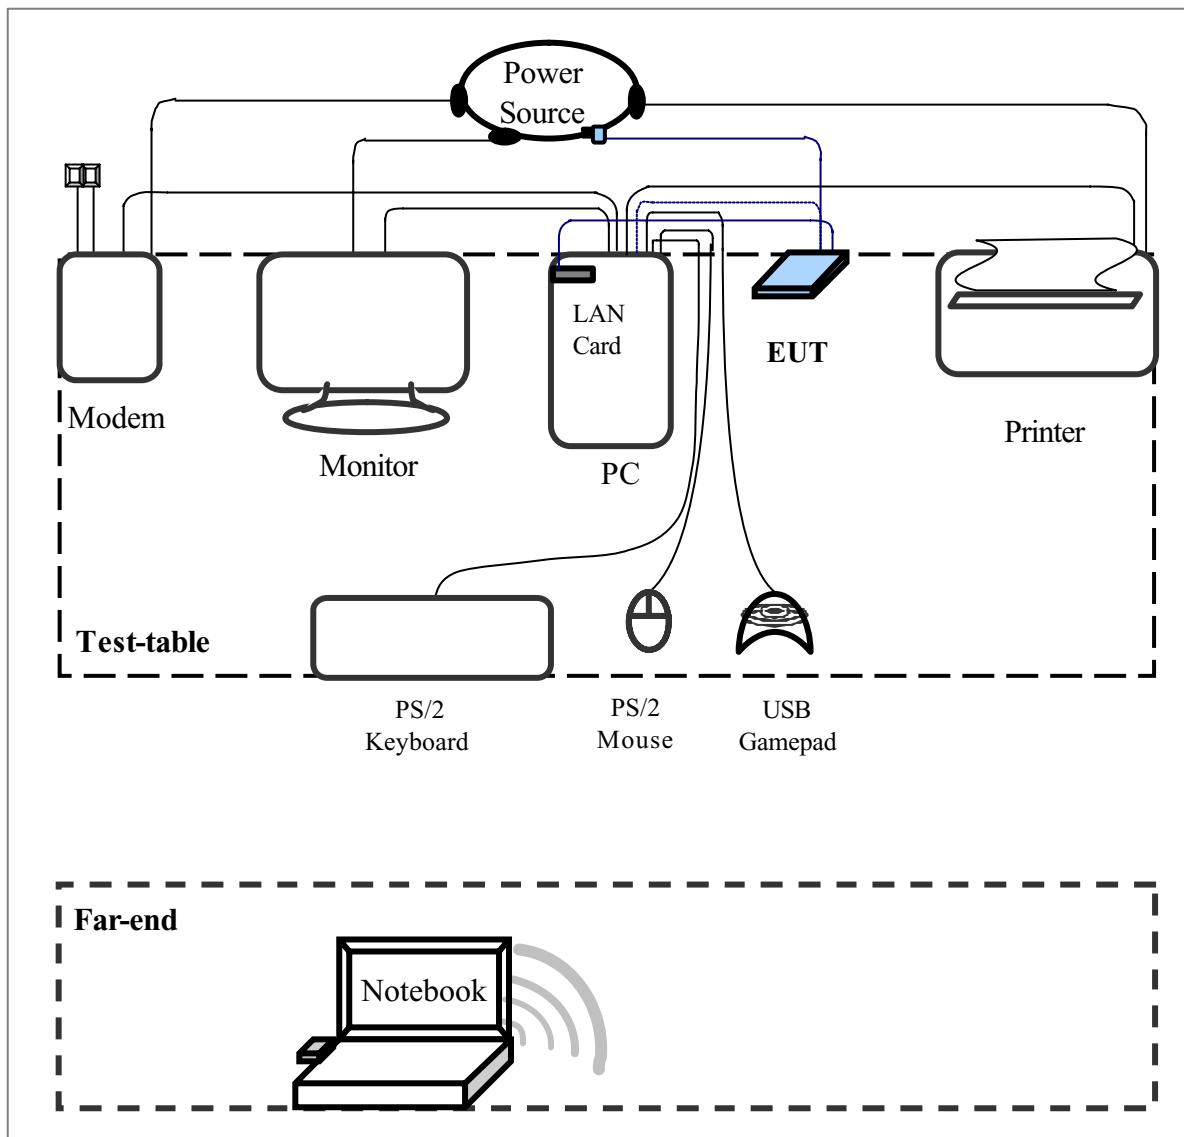


Connections of Equipment

PC:

- *Parallel Port --- a printer
- *VGA Port --- a monitor
- *Serial Port --- an external modem
- *USB-A Port --- a USB gamepad
- *USB-B Port --- EUT (when EUT powered by USB interface)
- *LAN Interface --- EUT
- *PS/2-key Port --- a PS/2 keyboard
- *PS/2-mouse Port --- a PS/2 mouse

1.5.2 Radiated of Intentional

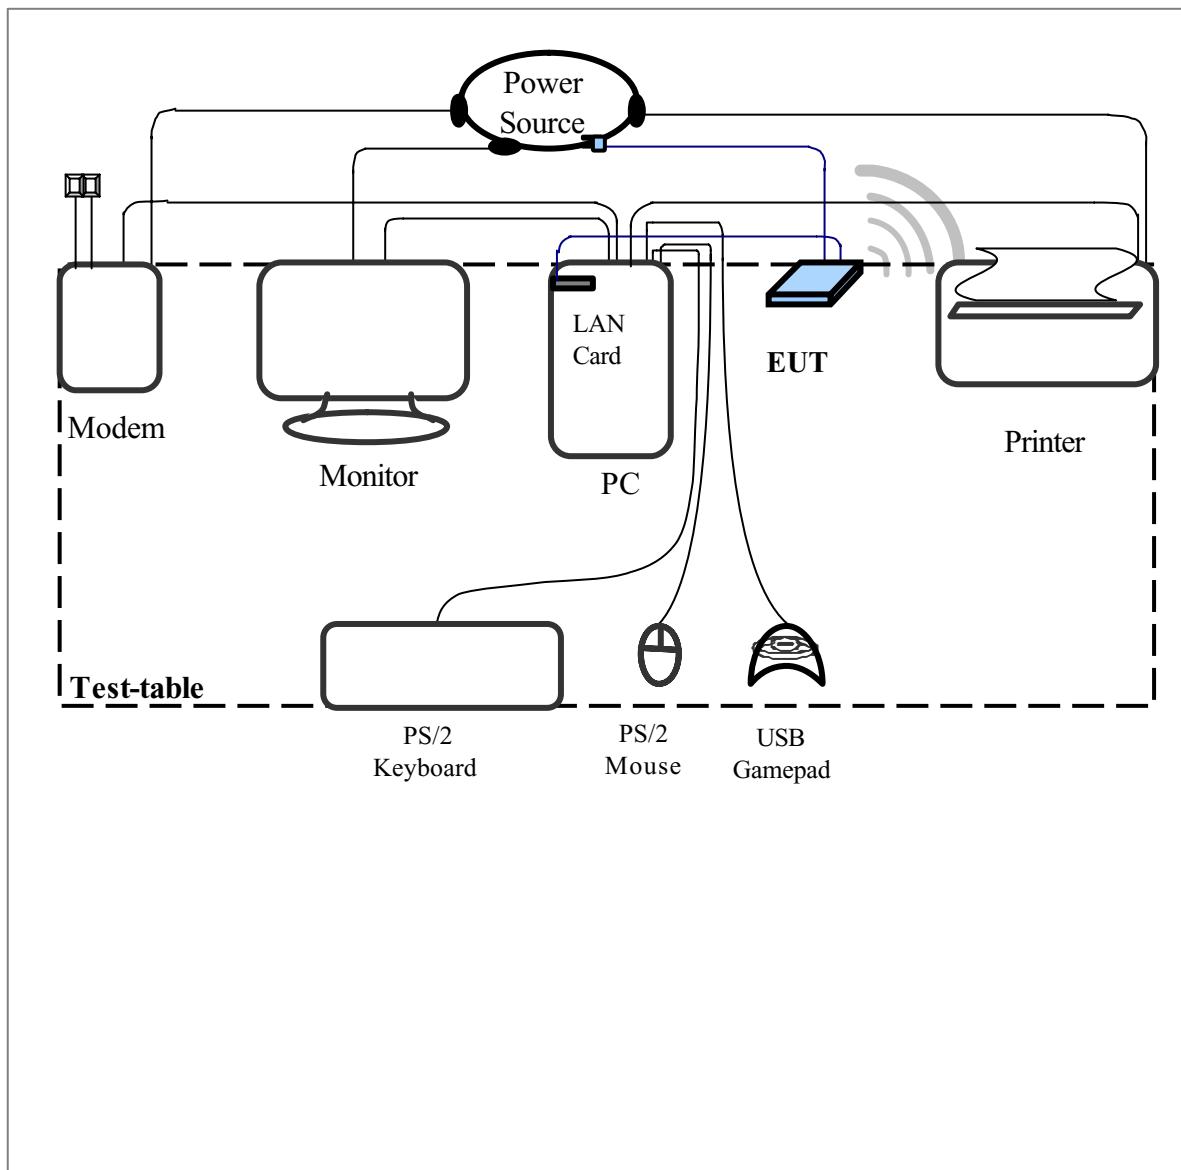

The tests below are carried with the EUT transmitter set at high power in TDD mode. The EUT is forced to select of output power level and channel number by LAN port.

The setting up procedure was recorded in 1.3 test method.

1.6 Verify the Frequency and Channel

Channel	Frequency (GHz)
1	2.412
2	2.417
3	2.422
4	2.427
5	2.432
6	2.437
7	2.442
8	2.447
9	2.452
10	2.457
11	2.462

Note:

1. This is for confirming that all frequencies are in 2.412GHz to 2.462GHz.
2. Section 15.31(m): Measurements on intentional radiators or receivers shall be performed at three frequencies for operating frequency range over 10 MHz
(The locations of these frequencies one near the top, one near the middle and one near the bottom.)
3. After test, the EUT operating frequencies are in 2.412GHz to 2.462GHz. So all the items as followed in testing report are need to test these three frequencies:
Top: Channel – 1; Middle: Channel – 6; Bottom: Channel – 11.

1.7 Test Procedure

All measurements contained in this report were performed mainly according to the techniques described in ANSI C63.4 (2003) and the pre-setup was written on 1.3 test method, the detail setup was written on each test item.

1.8 Location of the Test Site

The radiated emissions measurements required by the rules were performed on the **three-meter, Anechoic Chamber (FCC Registration Number: 93906)** maintained by *Training Research Co., Ltd.* 1F, No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Complete description and measurement data have been placed on file with the commission. The conducted power line emissions tests and other test items were performed in a anechoic chamber also located at Training Research Co., Ltd.

No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. *Training Research Co., Ltd.* is listed by the FCC as a facility available to do measurement work for others on a contract basis.

1.9 General Test Condition

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests were chosen as that which produced the highest emission levels. However, only those conditions, which the EUT was considered likely to encounter in normal use were investigated.

In test, they were set in high power and continuously transmitting mode that controlled by computer. The CH01, CH06 and CH11 of EUT were all tested. The setting up procedure is recorded on 1.3 test method.

II. Section 15.101(a): Equipment authorization of unintentional radiators

The EUT equipped with a LAN interface and should be operated with the computer. It was categorized to *Class B personal computers and peripherals* as cannot be operated stand-alone. The authorization requires **Declaration of Conformity (DoC)** and the items required such as Section15.107 (Conducted limits) and Section15.109 (Radiated emission limits) is same as Section15.207 and 15.247(C).

III. Section 15.203: Antenna requirement

The EUT has an integrated antenna permanently attached on the PCB, which inside the housing. In addition, there is no external antenna or connector employed. The antenna requirement stated in Section15.203 is inapplicable to this EUT.

The antenna specification of list as below:

Antenna Type : Patch Antenna

Antenna Gain : 6dBi (Max.)

VI. Section 15.207: Power Line Conducted Emissions for AC Powered Units

4.1 Test Condition & Setup

The power line conducted emission measurements were performed in an anechoic chamber. The EUT was assembled on a wooden table, which is 80 centimeters high, was placed 40 centimeters from the backwall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and Line Impedance Stabilization Networks (LISNs). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer (or EMI receiver) was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak and average detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.3

There is a test condition apply in this test item, the test procedure description as <1.3>. Three channels were tested, one in the top (CH01), one in the middle (CH06) and the other in bottom (CH11).

4.2 List of Test Instruments

Instrument Name	Model	Brand	Serial No.	Calibration Date
EMI Receiver	8546A	HP	3520A00242	08/05/05
RF Filter Section	85460A	HP	3448A00217	08/05/05
LISN (EUT)	LISN-01	TRC	99-05	10/07/05
LISN (Support E.)	LISN-01	TRC	9912-03, 04	11/04/05
Pre-amplifier	15542 ZFL-500	Mini – Circuits	0 0117	05/20/05
6dB Attenuator	MCL BW-S6W2	Mini – Circuits	9915 – Conducted	05/20/05
10dB Attenuator	A5542 VAT010	Mini – Circuits	0215 – Conducted	05/20/05
Coaxial Cable (2 meter)	A30A30-0058-50FS-2M	Jyebao	SMA-08	05/20/05
Coaxial Cable (1.1 meter)	A30A30-0058-50FS-1M	Jyebao	SMA-09	05/20/05
Coaxial Cable (20 meter)	RG-214/U	Jyebao	NP-01	05/20/05
Coaxial Cable (20 meter)	RG-214/U	Jyebao	NP-02	05/20/05
Auto Switch Box (< 30MHz)	ASB-01	TRC	9904-01	05/20/05

4.3 Test Result of Power Line Conducted Emissions

The following table shows a summary of the highest emissions of power line conducted emissions on the LIVE and NETURAL conductors of the EUT power cord. Show as follows.

Test Conditions: Temperature : 25 °C Humidity : 73 % RH

Test mode: RX mode, Powered by Adapter

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dB μ V)	QP (dB μ V)	Average (dB μ V)	QP-limit (dB μ V)	AVG-limit (dB μ V)	Margin (dB)
Line 1	210.000	48.37	---	---	64.29	54.29	-5.92
	1256.000	40.99	---	---	56.00	46.00	-5.01
	1477.000	41.13	---	---	56.00	46.00	-4.87
	1783.000	42.23	---	---	56.00	46.00	-3.77
	1871.000	40.59	---	---	56.00	46.00	-5.41
	1959.000	41.29	---	---	56.00	46.00	-4.71
Line 2	552.000	40.80	---	---	56.00	46.00	-5.20
	963.000	41.59	---	---	56.00	46.00	-4.41
	1269.000	40.94	---	---	56.00	46.00	-5.06
	1464.000	42.26	---	---	56.00	46.00	-3.74
	1550.000	41.85	---	---	56.00	46.00	-4.15
	1645.000	41.08	---	---	56.00	46.00	-4.92

NOTE:

- (1)Margin = Peak Amplitude – Limit, *The reading amplitudes are all under limit.*
- (2)A "+" sign in the margin column means the emission is OVER the Class B Limit and "–" sign of means UNDER the Class B limit

Test mode: IEEE 802.11b Channel 1, Powered by Adapter

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dB μ V)	QP (dB μ V)	Average (dB μ V)	QP-limit (dB μ V)	AVG-limit (dB μ V)	Margin (dB)
Line 1	523.000	39.67	---	---	56.00	46.00	-6.33
	703.000	40.31	---	---	56.00	46.00	-5.69
	963.000	40.02	---	---	56.00	46.00	-5.98
	1187.000	41.78	---	---	56.00	46.00	-4.22
	1613.000	38.93	---	---	56.00	46.00	-7.07
	2201.000	39.74	---	---	56.00	46.00	-6.26
Line 2	434.000	42.19	---	---	57.89	47.89	-5.70
	627.000	42.10	---	---	56.00	46.00	-3.90
	809.000	41.31	---	---	56.00	46.00	-4.69
	1282.000	42.13	---	---	56.00	46.00	-3.87
	1464.000	41.92	---	---	56.00	46.00	-4.08
	2094.000	40.68	---	---	56.00	46.00	-5.32

Test mode: IEEE 802.11b Channel 6, Powered by Adapter

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dB μ V)	QP (dB μ V)	Average (dB μ V)	QP-limit (dB μ V)	AVG-limit (dB μ V)	Margin (dB)
Line 1	509.000	39.76	---	---	56.00	46.00	-6.24
	902.000	39.88	---	---	56.00	46.00	-6.12
	963.000	40.20	---	---	56.00	46.00	-5.80
	1059.000	40.66	---	---	56.00	46.00	-5.34
	1166.000	40.87	---	---	56.00	46.00	-5.13
	1464.000	39.90	---	---	56.00	46.00	-6.10
Line 2	434.000	41.64	---	---	57.89	47.89	-6.25
	616.000	42.21	---	---	56.00	46.00	-3.79
	695.000	42.30	---	---	56.00	46.00	-3.70
	1713.000	40.84	---	---	56.00	46.00	-5.16
	2415.000	38.77	---	---	56.00	46.00	-7.23
	4762.000	40.68	---	---	56.00	46.00	-5.32

Test mode: IEEE 802.11b Channel 11, Powered by Adapter

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dB μ V)	QP (dB μ V)	Average (dB μ V)	QP-limit (dB μ V)	AVG-limit (dB μ V)	Margin (dB)
Line 1	523.000	39.76	---	---	56.00	46.00	-6.24
	902.000	39.41	---	---	56.00	46.00	-6.59
	1187.000	40.54	---	---	56.00	46.00	-5.46
	1477.000	39.76	---	---	56.00	46.00	-6.24
	2012.000	38.70	---	---	56.00	46.00	-7.30
	2480.000	39.83	---	---	56.00	46.00	-6.17
Line 2	430.000	41.47	---	---	58.00	48.00	-6.53
	616.000	42.16	---	---	56.00	46.00	-3.84
	893.000	42.08	---	---	56.00	46.00	-3.92
	1269.000	42.49	---	---	56.00	46.00	-3.51
	1871.000	40.77	---	---	56.00	46.00	-5.23
	4762.000	40.89	---	---	56.00	46.00	-5.11

Test mode: IEEE 802.11g Channel 1, Powered by Adapter

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dB μ V)	QP (dB μ V)	Average (dB μ V)	QP-limit (dB μ V)	AVG-limit (dB μ V)	Margin (dB)
Line 1	518.000	39.83	---	---	56.00	46.00	-6.17
	703.000	39.22	---	---	56.00	46.00	-6.78
	1166.000	41.29	---	---	56.00	46.00	-4.71
	1477.000	41.50	---	---	56.00	46.00	-4.50
	1836.000	40.99	---	---	56.00	46.00	-5.01
	2351.000	39.62	---	---	56.00	46.00	-6.38
Line 2	633.000	41.71	---	---	56.00	46.00	-4.29
	1144.000	41.50	---	---	56.00	46.00	-4.50
	1477.000	41.33	---	---	56.00	46.00	-4.67
	1696.000	40.77	---	---	56.00	46.00	-5.23
	2222.000	40.02	---	---	56.00	46.00	-5.98
	4809.000	40.33	---	---	56.00	46.00	-5.67

Test mode: IEEE 802.11g Channel 6, Powered by Adapter

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dB μ V)	QP (dB μ V)	Average (dB μ V)	QP-limit (dB μ V)	AVG-limit (dB μ V)	Margin (dB)
Line 1	518.000	39.99	---	---	56.00	46.00	-6.01
	902.000	39.36	---	---	56.00	46.00	-6.64
	1091.000	39.55	---	---	56.00	46.00	-6.45
	1176.000	41.08	---	---	56.00	46.00	-4.92
	1477.000	39.62	---	---	56.00	46.00	-6.38
	1977.000	40.24	---	---	56.00	46.00	-5.76
Line 2	507.000	43.23	42.00	28.24	56.00	46.00	-14.00
	633.000	40.96	---	---	56.00	46.00	-5.04
	884.000	42.21	---	---	56.00	46.00	-3.79
	1269.000	42.10	---	---	56.00	46.00	-3.90
	1477.000	42.72	---	---	56.00	46.00	-3.28
	1696.000	40.87	---	---	56.00	46.00	-5.13

Test mode: IEEE 802.11g Channel 11, Powered by Adapter

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dB μ V)	QP (dB μ V)	Average (dB μ V)	QP-limit (dB μ V)	AVG-limit (dB μ V)	Margin (dB)
Line 1	518.000	39.95	---	---	56.00	46.00	-6.05
	717.000	39.36	---	---	56.00	46.00	-6.64
	1102.000	41.66	---	---	56.00	46.00	-4.34
	1256.000	40.66	---	---	56.00	46.00	-5.34
	1464.000	39.08	---	---	56.00	46.00	-6.92
	1994.000	39.13	---	---	56.00	46.00	-6.87
Line 2	499.000	42.39	---	---	56.03	46.03	-3.64
	633.000	41.78	---	---	56.00	46.00	-4.22
	1256.000	42.39	---	---	56.00	46.00	-3.61
	1477.000	42.19	---	---	56.00	46.00	-3.81
	1696.000	41.36	---	---	56.00	46.00	-4.64
	2286.000	40.35	---	---	56.00	46.00	-5.65

Test mode: RX mode, Powered by USB

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dB μ V)	QP (dB μ V)	Average (dB μ V)	QP-limit (dB μ V)	AVG-limit (dB μ V)	Margin (dB)
Line 1	166.000	43.96	---	---	65.54	55.54	-11.58
	320.000	38.32	---	---	61.14	51.14	-12.82
	409.000	41.43	---	---	58.60	48.60	-7.17
	795.000	31.64	---	---	56.00	46.00	-14.36
	1113.000	35.15	---	---	56.00	46.00	-10.85
	1437.000	35.57	---	---	56.00	46.00	-10.43
Line 2	183.000	45.16	---	---	65.06	55.06	-9.90
	231.000	40.35	---	---	63.69	53.69	-13.34
	314.000	41.64	---	---	61.31	51.31	-9.67
	377.000	38.28	---	---	59.51	49.51	-11.23
	657.000	41.43	---	---	56.00	46.00	-4.57
	998.000	31.40	---	---	56.00	46.00	-14.60

Test mode: IEEE 802.11b Channel 1, Powered by USB

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dB μ V)	QP (dB μ V)	Average (dB μ V)	QP-limit (dB μ V)	AVG-limit (dB μ V)	Margin (dB)
Line 1	201.000	47.97	---	---	64.54	54.54	-6.57
	314.000	44.57	---	---	61.31	51.31	-6.74
	598.000	39.20	---	---	56.00	46.00	-6.80
	919.000	41.94	---	---	56.00	46.00	-4.06
	1818.000	39.71	---	---	56.00	46.00	-6.29
	2329.000	39.83	---	---	56.00	46.00	-6.17
Line 2	216.000	42.95	---	---	64.11	54.11	-11.16
	243.000	44.47	---	---	63.34	53.34	-8.87
	302.000	40.38	---	---	61.66	51.66	-11.28
	443.000	39.06	---	---	57.63	47.63	-8.57
	513.000	41.54	---	---	56.00	46.00	-4.46
	752.000	34.30	---	---	56.00	46.00	-11.70

Test mode: IEEE 802.11b Channel 6, Powered by USB

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	172.000	42.32	---	---	65.37	55.37	-13.05
	291.000	43.92	---	---	61.97	51.97	-8.05
	326.000	43.66	---	---	60.97	50.97	-7.31
	552.000	35.36	---	---	56.00	46.00	-10.64
	824.000	36.10	---	---	56.00	46.00	-9.90
	2437.000	38.53	---	---	56.00	46.00	-7.47
Line 2	267.000	40.87	---	---	62.66	52.66	-11.79
	348.000	38.63	---	---	60.34	50.34	-11.71
	401.000	38.93	---	---	58.83	48.83	-9.90
	485.000	37.36	---	---	56.43	46.43	-9.07
	759.000	34.04	---	---	56.00	46.00	-11.96
	928.000	36.76	---	---	56.00	46.00	-9.24

Test mode: IEEE 802.11b Channel 11, Powered by USB

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	182.000	48.50	---	---	65.09	55.09	-6.59
	208.000	40.09	---	---	64.34	54.34	-14.25
	352.000	36.65	---	---	60.23	50.23	-13.58
	461.000	39.52	---	---	57.11	47.11	-7.59
	651.000	32.58	---	---	56.00	46.00	-13.42
	2437.000	33.26	---	---	56.00	46.00	-12.74
Line 2	164.000	43.37	---	---	65.60	55.60	-12.23
	195.000	39.45	---	---	64.71	54.71	-15.26
	294.000	37.19	---	---	61.89	51.89	-14.70
	533.000	34.59	---	---	56.00	46.00	-11.41
	795.000	32.47	---	---	56.00	46.00	-13.53
	998.000	31.38	---	---	56.00	46.00	-14.62

Test mode: IEEE 802.11g Channel 1, Powered by USB

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	201.000	40.18	---	---	64.54	54.54	-14.36
	255.000	37.52	---	---	63.00	53.00	-15.48
	334.000	36.28	---	---	60.74	50.74	-14.46
	788.000	30.21	---	---	56.00	46.00	-15.79
	3510.000	29.72	---	---	56.00	46.00	-16.28
	4762.000	30.89	---	---	56.00	46.00	-15.11
Line 2	175.000	45.87	---	---	65.29	55.29	-9.42
	236.000	41.75	---	---	63.54	53.54	-11.79
	345.000	37.36	---	---	60.43	50.43	-13.07
	533.000	34.02	---	---	56.00	46.00	-11.98
	998.000	31.57	---	---	56.00	46.00	-14.43
	4762.000	28.33	---	---	56.00	46.00	-17.67

Test mode: IEEE 802.11g Channel 6, Powered by USB

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	175.000	43.82	---	---	65.29	55.29	-11.47
	277.000	41.36	---	---	62.37	52.37	-11.01
	384.000	40.40	---	---	59.31	49.31	-8.91
	604.000	32.54	---	---	56.00	46.00	-13.46
	1134.000	35.69	---	---	56.00	46.00	-10.31
	1783.000	36.38	---	---	56.00	46.00	-9.62
Line 2	195.000	42.06	---	---	64.71	54.71	-12.65
	245.000	44.50	---	---	63.29	53.29	-8.79
	320.000	42.46	---	---	61.14	51.14	-8.68
	439.000	40.42	---	---	57.74	47.74	-7.32
	592.000	40.47	---	---	56.00	46.00	-5.53
	824.000	38.44	---	---	56.00	46.00	-7.56

Test mode: IEEE 802.11g Channel 11, Powered by USB

Conductor	Power	Connected	Emissions		FCC	Class	B
	Frequency (KHz)	Peak (dB μ V)	QP (dB μ V)	Average (dB μ V)	QP-limit (dB μ V)	AVG-limit (dB μ V)	Margin (dB)
Line 1	167.000	46.87	---	---	65.51	55.51	-8.64
	233.000	45.45	---	---	63.63	53.63	-8.18
	285.000	40.20	---	---	62.14	52.14	-11.94
	345.000	38.42	---	---	60.43	50.43	-12.01
	466.000	36.74	---	---	56.97	46.97	-10.23
	5310.000	40.06	---	---	60.00	50.00	-9.94
Line 2	179.000	45.25	---	---	65.17	55.17	-9.92
	240.000	42.84	---	---	63.43	53.43	-10.59
	409.000	40.35	---	---	58.60	48.60	-8.25
	480.000	37.95	---	---	56.57	46.57	-8.62
	587.000	36.88	---	---	56.00	46.00	-9.12
	788.000	34.49	---	---	56.00	46.00	-11.51

V. Section 15.247 (a): Technical description of the EUT


Direct Sequence System is a spread spectrum system in which the carrier has been modulated by a high speed spreading code and an information data stream. The high speed code sequence dominates the “modulating function” and is the direct cause of the wide spreading of the transmitted signal. In the operational description demonstrates the operation principles of the Baseband processor employed by the EUT, shows that which is a complete DSSS baseband processor and meets the definition of the direct sequence spread spectrum system.

VI. Section 15.247(a)(2): Bandwidth for Direct Sequence System.

6.1 Test Condition & Setup

The transmitter bandwidth measurements were performed by the contact manner. The EUT was set to transmit continuously, also various channels were investigated to find the maximum occupied bandwidth. The output of the EUT was connected to the spectrum analyzer. The bandwidth of the fundamental frequency is observed by the spectrum analyzer with 100kHz RBW and 100kHz VBW.

6.2 Test Instruments Configuration

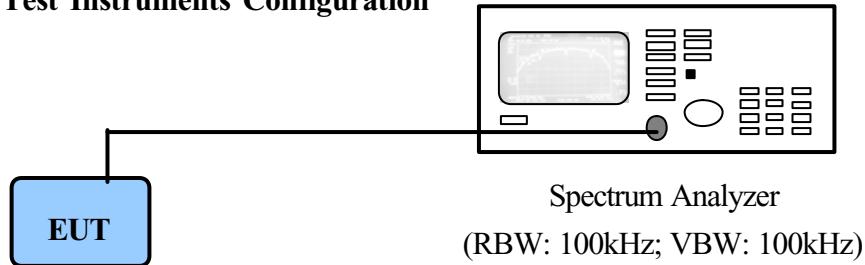

PC to control the EUT at maximal power output and channel number and set antenna kit

6.3 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	11/02/05


6.4 Test Result of Bandwidth

Channel	802.11b	802.11g
01	10.04 MHz	16.64 MHz
06	10.00 MHz	16.60 MHz
11	10.00 MHz	16.60 MHz


Note: 1. The data in the above table are summarizing the following attachment spectrum analyzer hard copy. According to the guidance, we'd made the measurement with the spectrum analyzer's resolution bandwidth ($RBW=100kHz$) and set the $span>>RBW$. The results show the measured 6dB bandwidth comply with the minimum 500kHz requirement.
 2. The attachments show these on the following pages.

6dB Bandwidth of Channel 1 (The minimum 6dB BW at least 500kHz)

IEEE 802.11b

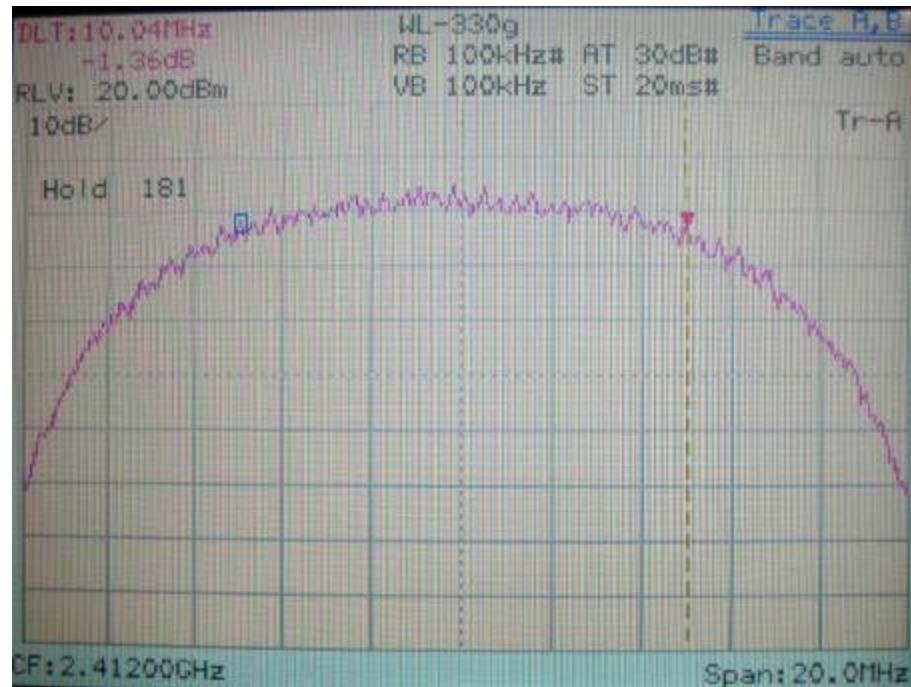


IEEE 802.11g

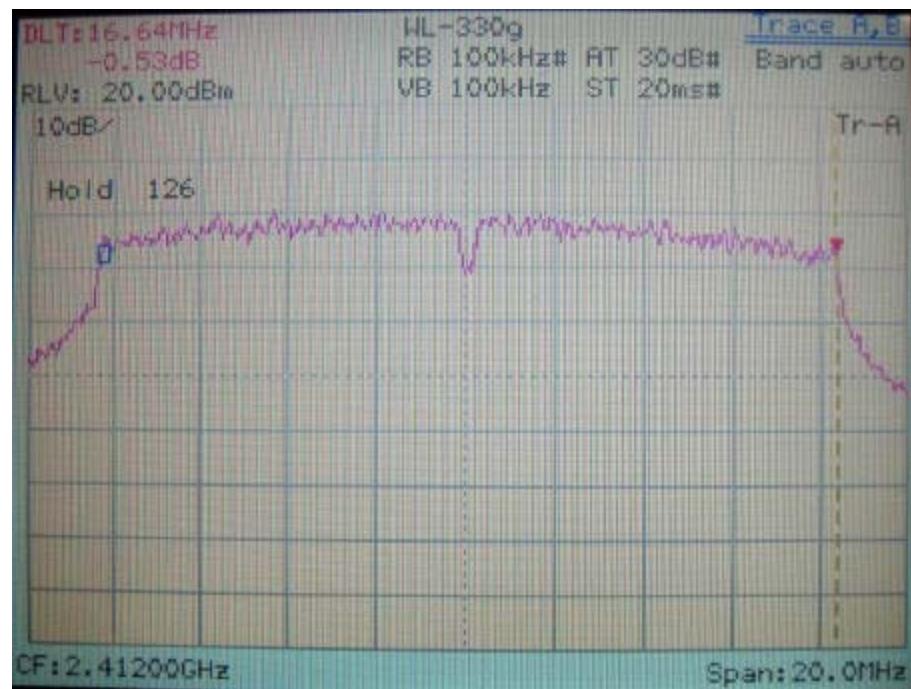


6dB Bandwidth of Channel 6 (The minimum 6dB BW at least 500kHz)

IEEE 802.11b

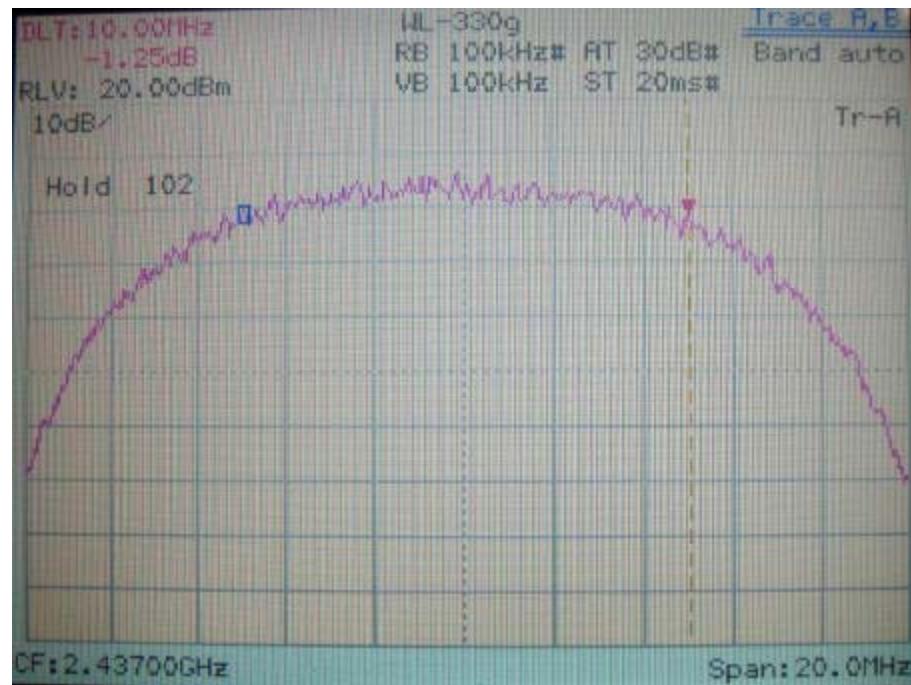


IEEE 802.11g

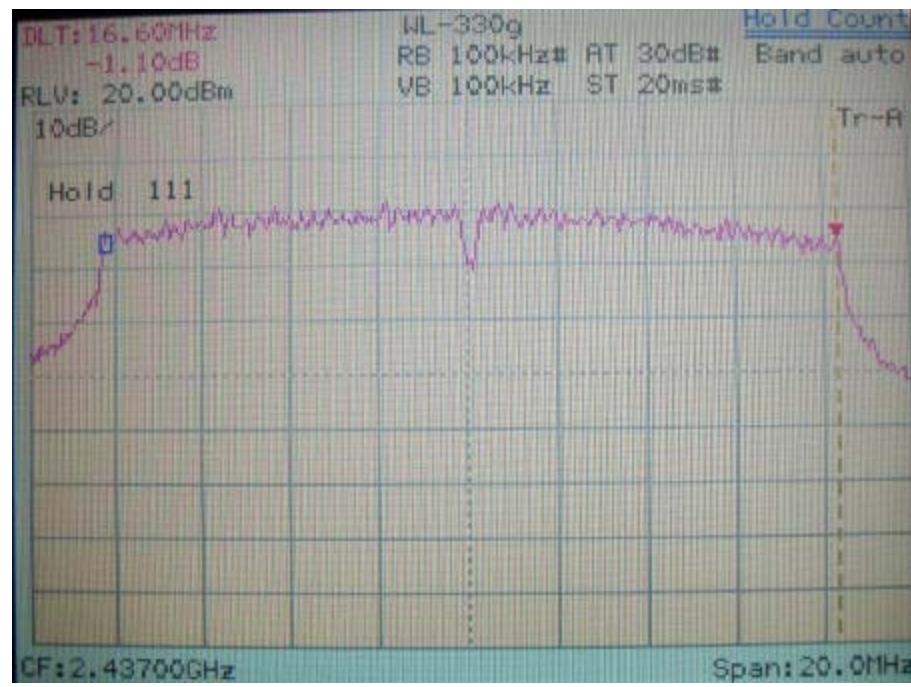


6dB Bandwidth of Channel 11 (The minimum 6dB BW at least 500kHz)

IEEE 802.11b

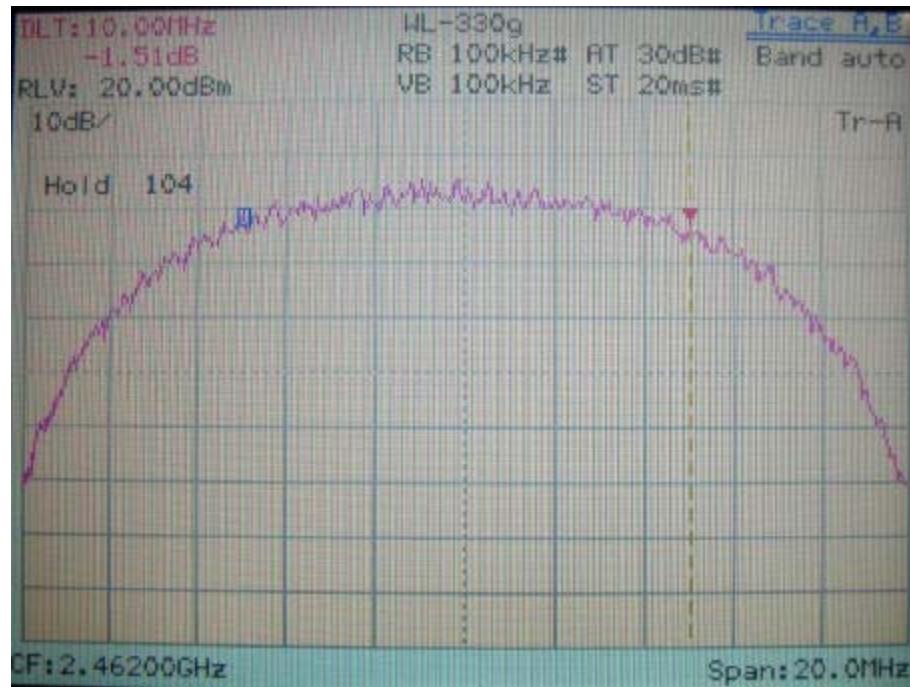


IEEE 802.11g

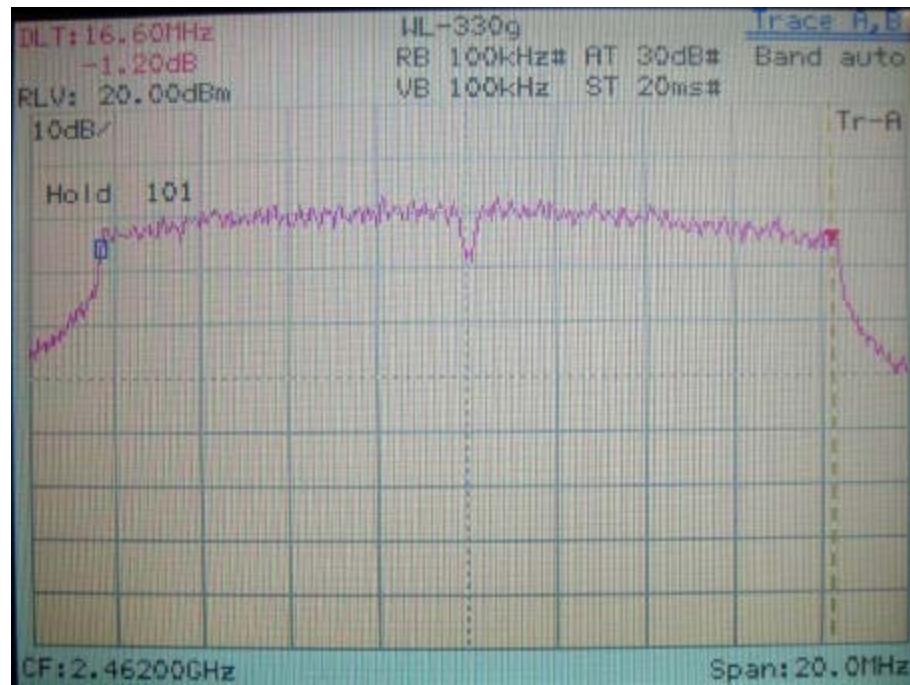

VII. Section 15.247(b): Power Output

7.1 Test Condition & Setup

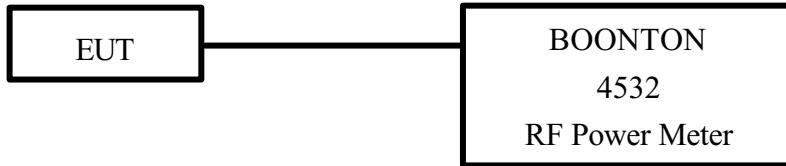

1. The output of the transmitter is connected to the BOONTON RF Power Meter.
2. The calibration is performed before every test. The values of the output power of the EUT will be shown in the dBm directly are the transmitter output peak power. Recording as follows.

7.2 List of Test Instruments

Instrument Name	Model	Brand	Serial No.	Next time
RF Power Meter	4532	BOONTON	117501	04/16/05
Peak Power Sensor	57340	BOONTON	2696	04/16/05

7.3 Test Result

Formula:

$$\text{RF Output of EUT} + |\text{Cable Loss}| = \text{Output Peak Power}$$

Channel	RF Output dBm	Cable Loss dBm	Output Peak Power	
			dBm	mW
802.11b CH01	20.25	0.70	20.95	124.45
802.11b CH06	21.35	0.70	22.05	160.32
802.11b CH11	20.50	0.70	21.20	131.83
802.11g CH01	25.84	0.70	26.54	450.82
802.11g CH06	26.87	0.70	27.57	571.48
802.11g CH11	25.72	0.70	26.42	438.53

VIII. Section 15.247 (C): Spurious Emissions (Radiated)

8.1 Test Condition & Setup

We'd performed the test by the *radiated emission* skill: The EUT was placed in an anechoic chamber, and set the EUT transmitting continuously and scanned at 3-meter distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration, which produced the highest emissions was noted so it could be reproduced later during the final tests. For the measurement above 1GHz, according to the guidance we'd set the spectrum analyzer's 6dB bandwidth RBW to 1MHz.

This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT.

Final radiation measurements were made on a three-meter, anechoic chamber. The EUT system was placed on a nonconductive turntable, which is 0.8 meters height, top surface 1.0 x 1.5 meter.

The spectrum was examined from 30MHz to 1000MHz using an Hewlett Packard 85460A EMI Receiver, SCHWARZECK whole range Small Biconical Antenna (Model No.: UBAA9114 & BBVU9135) is used to measure frequency from 30 MHz to 1GHz. The final test is used the HP 85460A spectrum and 8564E spectrum was examined from 1GHz to 25GHz using an Hewlett Packard Spectrum Analyzer, EMCO/HP Horn Antenna (Model 3115 / 84125-80008) for 1G - 25GHz.

At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. There are two spectrum analyzers use on this testing, HP 85460A for frequency 30MHz to 1000MHz, and 8564E for frequency 1GHz to 25GHz. No post-detector video filters were used in the test. The spectrum analyzer's 6dB bandwidth was set to 120KHz (spectrum was examined from 30 MHz to 1000 MHz), the spectrum analyzer's 6 dB bandwidth was set to 1 MHz (spectrum was examined from 1GHz to 25GHz) and the analyzer was operated in the maximum hold mode. There is a test condition applies in this test item, the test procedure description as the following:

Three channels were tested, one in the top (CH01), one in the middle (CH06) and the other in bottom (CH11). The setting up procedure is recorded on <1.3>

With the transmitter operating from a AC source and using the internal of EUT, radiates spurious emissions falling within the restricted bands of 15.209 were measured at operating frequencies corresponding to upper, middle and bottom channels in the 2400 ~ 2483.5 MHz band.

The actual field intensity in decibels referenced to 1 microvolt per meter (dB μ V/m) is determined by algebraically adding the measured reading in dB μ V, the antenna factor (dB), and cable loss (dB) at the appropriate frequency. Since the EUT was set to transmit continuously, no *duty cycle* is present.

For frequency between 30MHz to 1000MHz

FIa (dB μ V/m) = FIr (dB μ V) + Correction Factors

FIa : Actual Field Intensity

FIr : Reading of the Field Intensity

Correction Factors = Antenna Factor + (Cable Loss – Amplifier Gain) + Switching Box Loss

For frequency between 1GHz to 25GHz

FIa (dB μ V/m) = FIr (dB μ V) + Correction Factor

FIa : Actual Field Intensity

FIr : Reading of the Field Intensity

Correction Factors = Antenna Factor + (Cable Loss – Amplifier Gain) + Switching Box Loss

8.2 List of Test Instruments

Instrument Name	Model	Brand	Serial No.	Calibration Date
EMI Receiver	8546A	HP	3520A00242	08/05/05
RF Filter Section	85460A	HP	3448A00217	08/05/05
Small Biconical Antenna	UBAA9114 & BBVU9135	SCHWARZECK	127	10/11/05
Pre-amplifier	PA1F	TRC	1FAC	05/20/05
Auto Switch Box (>30MHz)	ASB-01	TRC	9904-01	05/20/05
Coaxial Cable (Double shielded, 15 meter)	A30A30-0058-50FS-15M	JYEBAO	SMA-01	05/20/05
Coaxial Cable (1.1 meter)	A30A30-0058-50FS-1M	JYEBAO	SMA-02	05/20/05
Spectrum Analyzer	8564E	HP	3720A00840	08/13/05
Microwave Preamplifier	84125C	HP	US36433002	08/13/05
Horn Antenna	3115	EMCO	9104-3668	12/27/05
Standard Guide Horn Antenna	84125-80008	HP	18-26.5GHz	10/15/05
Standard Guide Horn Antenna	84125-80001	HP	26.5-40GHz	10/15/05
Horn Antenna	1196E (3115)	HP (EMCO)	9704-5178	01/11/06
Pre-amplifier	PA2F	TRC	2F1GZ	06/20/05
Coaxial Cable (3 miter)	A30A30-0058-50FST118	JYEBAO	MSA-05	06/20/05
Coaxial Cable (1 meter)	A30A30-0058-50FST118	JYEBAO	MSA-04	06/20/05

8.3 Test Result of Spurious Radiated Emissions

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarizations, EUT orientation, etc. are recorded on the following.

Test Conditions: Temperature : 25 ° C Humidity : 73 % RH

Test mode: Powered by USB, RX mode for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table (°)			Limit (dB μ V/m)	Margin (dB)
125.79	38.28	1.00	202	-2.43	35.85	43.50	-7.65
151.25	38.80	1.00	199	-3.18	35.62	43.50	-7.88
325.85	42.09	1.00	142	-3.20	38.89	46.00	-7.11
350.03	43.58	1.00	262	-2.73	40.85	46.00	-5.15
800.06	29.11	1.00	199	11.61	40.72	46.00	-5.28
850.07	26.66	1.00	199	13.19	39.85	46.00	-6.15

Test mode: Powered by USB, RX mode for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table (°)			Limit (dB μ V/m)	Margin (dB)
123.36	36.57	1.00	262	-2.31	34.26	43.50	-9.24
327.06	40.63	1.00	176	-3.18	37.45	46.00	-8.55
376.77	36.39	1.00	199	-1.80	34.59	46.00	-11.41
501.66	35.12	1.00	128	2.97	38.09	46.00	-7.91
664.14	25.73	1.00	195	8.78	34.51	46.00	-11.49
801.15	25.45	1.00	56	11.65	37.10	46.00	-8.90

Note:

1. Margin = Amplitude – limit, if margin is minus means under limit.
2. Corrected Amplitude = Reading Amplitude + Correction Factors
3. Correction factor = Antenna factor + (Cable Loss – Amplitude gain) + Switching Box Loss

Test mode: Powered by USB, RX mode for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude	Correction Factor	Corrected Amplitude	Limit	Margin
MHz	m	degree	dB μ V	dB/m	dB μ V/m	dB μ V/m	dB
1595.00	1.00	247	37.41	---	0.30	37.71	---
2558.33	1.00	299	32.24	---	7.32	39.56	---
4173.33	1.00	187	30.57	---	12.78	43.35	---
8727.92	1.00	360	23.57	---	23.15	46.72	---
2442.29	1.00	181	46.50	---	2.88	49.38	---

Test mode: Powered by USB, RX mode for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude	Correction Factor	Corrected Amplitude	Limit	Margin
MHz	m	degree	dB μ V	dB/m	dB μ V/m	dB μ V/m	dB
1595.00	1.00	264	39.41	---	0.30	39.71	---
3103.75	1.00	251	31.07	---	9.45	40.52	---
5363.33	1.00	211	26.24	---	16.65	42.89	---
8586.25	1.00	11	24.24	---	22.84	47.08	---
24527.29	1.00	202	47.67	---	2.39	50.06	---

Note:

1. Margin = Corrected - Limit.
2. The EUT utilizes a *permanently attached antenna*. In addition the spurious RF radiated emissions levels do comply with the *20dBc limit* both at its bandedges and other spurious emissions.
3. As stated in Section 15.35(b), for any frequencies above 1000MHz, radiated limits shown are based upon the use of measurement instrumentation employing an average detector function. As the results of our test, the peak amplitudes are already below the FCC limit. Thus the average amplitudes of the rest are omitted.

Test mode: Powered by adapter, RX mode for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table (°)			Limit (dB μ V/m)	Margin (dB)
150.01	36.06	1.00	218	-3.14	32.92	43.50	-10.58
327.06	42.04	1.00	172	-3.18	38.86	46.00	-7.14
350.03	42.77	1.00	278	-2.73	40.04	46.00	-5.96
800.07	30.17	1.00	199	11.61	41.78	46.00	-4.22
850.07	26.25	1.00	244	13.19	39.44	46.00	-6.56
901.79	23.69	1.00	244	14.75	38.44	46.00	-7.56

Test mode: Powered by adapter, RX mode for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table (°)			Limit (dB μ V/m)	Margin (dB)
123.36	35.16	1.00	221	-2.31	32.85	43.50	-10.65
151.25	35.98	1.00	218	-3.18	32.80	43.50	-10.70
327.06	40.11	1.00	34	-3.18	36.93	46.00	-9.07
376.77	34.36	1.00	214	-1.80	32.56	46.00	-13.44
501.66	34.39	1.00	128	2.97	37.36	46.00	-8.64
801.15	25.57	1.00	300	11.65	37.22	46.00	-8.78

Test mode: Powered by adapter, RX mode for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude	Correction Factor	Corrected Amplitude	Limit	Margin
MHz	m	degree	dB μ V	dB/m	dB μ V/m	dB μ V/m	dB
1828.75	1.00	87	34.24	---	1.96	36.20	---
2756.67	1.00	174	29.57	---	8.43	38.00	---
3897.08	1.00	216	30.40	---	12.01	42.41	---
6645.42	1.00	60	24.57	---	19.30	43.87	---
24095.21	1.00	168	46.83	---	3.40	50.23	---

Test mode: Powered by adapter, RX mode for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude	Correction Factor	Corrected Amplitude	Limit	Margin
MHz	m	degree	dB μ V	dB/m	dB μ V/m	dB μ V/m	dB
1595.00	1.00	73	38.24	---	0.30	38.54	---
2558.33	1.00	317	31.91	---	7.32	39.23	---
5547.50	1.00	253	26.74	---	17.05	43.79	---
9471.67	1.00	19	22.74	---	23.26	46.00	---
24095.21	1.00	316	45.33	---	3.40	48.73	---

Test mode: IEEE 802.11b CH01 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table (°)			Limit (dB μ V/m)	Margin (dB)
151.25	36.90	1.00	180	-3.18	33.72	43.50	-9.78
350.03	41.82	1.00	100	-2.73	39.09	46.00	-6.91
701.73	29.11	1.00	214	9.61	38.72	46.00	-7.28
800.07	30.50	1.00	202	11.61	42.11	46.00	-3.89
850.07	26.59	1.00	244	13.19	39.78	46.00	-6.22
900.07	24.53	1.00	248	14.69	39.22	46.00	-6.78

Test mode: IEEE 802.11b CH01 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table (°)			Limit (dB μ V/m)	Margin (dB)
123.36	35.39	1.00	218	-2.31	33.08	43.50	-10.42
151.25	36.23	1.00	251	-3.18	33.05	43.50	-10.45
261.59	32.91	1.00	52	-4.22	28.69	46.00	-17.31
327.06	39.20	1.00	26	-3.18	36.02	46.00	-9.98
481.05	34.72	1.00	248	2.18	36.90	46.00	-9.10
801.15	25.59	1.00	356	11.65	37.24	46.00	-8.76

Test mode: IEEE 802.11b CH01 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude	Correction Factor	Corrected Amplitude	Limit	Margin
MHz	m	degree	dB μ V	dB/m	dB μ V/m	dB μ V/m	dB
2718.75	1.00	44	35.50	---	9.90	45.40	---
4823.12	1.00	220	43.77	---	3.76	47.53	---
7233.75	1.00	31	35.94	---	10.07	46.01	---
9650.42	1.00	360	34.77	---	11.47	46.24	---
12061.04	1.00	262	37.27	---	9.81	47.08	---
21708.12	1.00	117	46.96	---	2.87	49.83	---

Test mode: IEEE 802.11b CH01 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude	Correction Factor	Corrected Amplitude	Limit	Margin
MHz	m	degree	dB μ V	dB/m	dB μ V/m	dB μ V/m	dB
1599.85	1.00	302	38.00	32.33	14.33	52.33	46.66
2239.96	1.00	194	45.83	43.83	8.76	54.59	52.59
2319.97	1.00	78	46.16	38.67	8.99	55.15	47.66
2485.95	1.00	78	45.50	38.83	9.45	54.95	48.28
2617.95	1.00	97	43.50	36.50	9.71	53.21	46.21
2719.95	1.00	88	44.00	42.00	9.90	53.90	51.90
4821.10	1.00	206	50.78	38.11	3.75	54.53	41.86

Test mode: IEEE 802.11b CH06 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table (°)			Limit (dB μ V/m)	Margin (dB)
151.25	37.68	1.00	221	-3.18	34.50	43.50	-9.00
325.85	40.50	1.00	172	-3.20	37.30	46.00	-8.70
350.03	44.37	1.00	259	-2.73	41.64	46.00	-4.36
701.73	27.96	1.00	218	9.61	37.57	46.00	-8.43
800.07	29.72	1.00	199	11.61	41.33	46.00	-4.67
850.07	27.24	1.00	248	13.19	40.43	46.00	-5.57

Test mode: IEEE 802.11b CH06 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table (°)			Limit (dB μ V/m)	Margin (dB)
123.36	36.02	1.00	218	-2.31	33.71	43.50	-9.79
151.25	36.69	1.00	259	-3.18	33.51	43.50	-9.99
261.59	34.34	1.00	49	-4.22	30.12	46.00	-15.88
327.06	40.23	1.00	191	-3.18	37.05	46.00	-8.95
482.26	34.78	1.00	244	2.23	37.01	46.00	-8.99
801.15	25.68	1.00	319	11.65	37.33	46.00	-8.67

Test mode: IEEE 802.11b CH06 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude	Correction Factor	Corrected Amplitude	Limit	Margin
MHz	m	degree	dB μ V	dB/m	dB μ V/m	dB μ V/m	dB
1600.00	1.00	244	35.67	---	14.33	50.00	---
2239.58	1.00	336	38.17	---	8.76	46.93	---
2718.75	1.00	108	34.50	---	9.90	44.40	---
4871.46	1.00	238	43.60	---	3.95	47.55	---
12187.92	1.00	304	39.77	---	9.74	49.51	---
21934.79	1.00	162	47.31	---	3.09	50.40	---

Test mode: IEEE 802.11b CH06 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude	Correction Factor	Corrected Amplitude	Limit	Margin
MHz	m	degree	dB μ V	dB/m	dB μ V/m	dB μ V/m	dB
2239.95	1.00	180	44.83	43.33	8.76	53.59	52.09
2319.97	1.00	89	43.83	38.50	8.99	52.82	47.49
2485.96	1.00	89	46.33	38.50	9.45	55.78	47.95
2529.94	1.00	88	45.33	39.00	9.55	54.88	48.55
2617.94	1.00	111	43.33	36.50	9.71	53.04	46.21
2719.95	1.00	100	44.50	41.83	9.90	54.40	51.73
4873.20	1.00	207	52.77	42.27	3.95	56.72	46.22

Test mode: IEEE 802.11b CH11 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table (°)			Limit (dB μ V/m)	Margin (dB)
261.59	41.16	1.00	112	-4.22	36.94	46.00	-9.06
327.06	39.92	1.00	150	-3.18	36.74	46.00	-9.26
350.03	41.70	1.00	116	-2.73	38.97	46.00	-7.03
712.55	28.42	1.00	202	9.79	38.21	46.00	-7.79
800.07	29.93	1.00	202	11.61	41.54	46.00	-4.46
900.07	24.84	1.00	244	14.69	39.53	46.00	-6.47

Test mode: IEEE 802.11b CH11 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table (°)			Limit (dB μ V/m)	Margin (dB)
151.25	36.48	1.00	259	-3.18	33.30	43.50	-10.20
325.85	40.59	1.00	34	-3.20	37.39	46.00	-8.61
351.31	36.90	1.00	214	-2.68	34.22	46.00	-11.78
482.26	34.57	1.00	248	2.23	36.80	46.00	-9.20
501.66	33.69	1.00	135	2.97	36.66	46.00	-9.34
801.15	25.94	1.00	315	11.65	37.59	46.00	-8.41

Test mode: IEEE 802.11b CH11 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude	Correction Factor	Corrected	Limit	Margin
			Peak / Ave.		Amplitude		
MHz	m	degree	dB μ V	dB/m	dB μ V/m	dB μ V/m	dB
2239.58	1.00	279	35.50	---	8.76	44.26	---
2720.83	1.00	360	35.66	---	9.91	45.57	---
4925.83	1.00	221	44.61	---	4.13	48.74	---
9849.79	1.00	20	36.28	---	11.93	48.21	---
12308.75	1.00	294	39.61	---	9.56	49.17	---
24619.37	1.00	152	46.07	---	3.01	49.08	---

Test mode: IEEE 802.11b CH11 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude	Correction Factor	Corrected	Limit	Margin
			Peak / Ave.		Amplitude		
MHz	m	degree	dB μ V	dB/m	dB μ V/m	dB μ V/m	dB
1599.96	1.00	309	39.67	34.17	14.33	54.00	48.50
2087.95	1.00	204	44.83	43.50	8.34	53.17	51.84
2239.95	1.00	213	47.50	43.67	8.76	56.26	52.43
2309.95	1.00	103	45.69	35.83	8.96	54.65	44.79
2353.95	1.00	103	43.99	35.33	9.08	53.07	44.41
2617.94	1.00	103	45.17	37.17	9.71	54.88	46.88
2719.95	1.00	116	45.83	42.50	9.90	55.73	52.40
4921.10	1.00	190	53.29	40.94	4.11	57.40	45.05

Test mode: IEEE 802.11g CH01 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table (°)			Limit (dB μ V/m)	Margin (dB)
325.03	42.30	1.00	139	-3.22	39.08	46.00	-6.92
350.03	43.58	1.00	273	-2.73	40.85	46.00	-5.15
476.20	33.45	1.00	293	2.00	35.45	46.00	-10.55
700.06	28.48	1.00	206	9.58	38.06	46.00	-7.94
800.07	30.80	1.00	203	11.61	42.41	46.00	-3.59
850.07	26.29	1.00	250	13.19	39.48	46.00	-6.52

Test mode: IEEE 802.11g CH01 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table (°)			Limit (dB μ V/m)	Margin (dB)
123.36	36.14	1.00	232	-2.31	33.83	43.50	-9.67
151.25	36.55	1.00	266	-3.18	33.37	43.50	-10.13
327.06	40.32	1.00	4	-3.18	37.14	46.00	-8.86
482.26	35.06	1.00	244	2.23	37.29	46.00	-8.71
534.40	30.09	1.00	15	4.35	34.44	46.00	-11.56
801.15	26.01	1.00	349	11.65	37.66	46.00	-8.34

Test mode: IEEE 802.11g CH01 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude	Correction Factor	Corrected Amplitude	Limit	Margin
MHz	m	degree	dB μ V	dB/m	dB μ V/m	dB μ V/m	dB
2239.58	1.00	48	34.83	---	8.76	43.59	---
2718.75	1.00	58	36.17	---	9.90	46.07	---
4817.08	1.00	249	47.61	---	3.73	51.34	---
7233.75	1.00	105	35.94	---	10.07	46.01	---
9650.42	1.00	218	35.94	---	11.47	47.41	---
12061.04	1.00	275	38.27	---	9.81	48.08	---

Test mode: IEEE 802.11g CH01 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude	Correction Factor	Corrected Amplitude	Limit	Margin
MHz	m	degree	dB μ V	dB/m	dB μ V/m	dB μ V/m	dB
1600.00	1.00	298	36.67	---	14.33	51.00	---
2239.95	1.00	163	46.17	43.17	8.76	54.93	51.93
2319.96	1.00	57	45.66	38.33	8.99	54.65	47.32
2485.96	1.00	67	46.65	39.17	9.45	56.10	48.62
2719.95	1.00	56	42.83	41.33	9.90	52.73	51.23
4825.75	1.00	195	57.93	42.44	3.77	61.70	46.21
7233.75	1.00	105	41.78	---	10.07	51.85	---

Test mode: IEEE 802.11g CH06 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table (°)			Limit (dB μ V/m)	Margin (dB)
261.59	41.21	1.00	158	-4.22	36.99	46.00	-9.01
325.03	42.13	1.00	165	-3.22	38.91	46.00	-7.09
351.31	38.22	1.00	262	-2.68	35.54	46.00	-10.46
700.06	28.67	1.00	202	9.58	38.25	46.00	-7.75
800.07	30.78	1.00	202	11.61	42.39	46.00	-3.61
850.07	26.49	1.00	244	13.19	39.68	46.00	-6.32

Test mode: IEEE 802.11g CH06 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table (°)			Limit (dB μ V/m)	Margin (dB)
123.36	35.77	1.00	240	-2.31	33.46	43.50	-10.04
151.25	37.25	1.00	214	-3.18	34.07	43.50	-9.43
325.85	39.71	1.00	11	-3.20	36.51	46.00	-9.49
376.77	35.97	1.00	206	-1.80	34.17	46.00	-11.83
482.26	34.57	1.00	236	2.23	36.80	46.00	-9.20
801.15	26.68	1.00	308	11.65	38.33	46.00	-7.67

Test mode: IEEE 802.11g CH06 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude	Correction Factor	Corrected Amplitude	Limit	Margin
MHz	m	degree	dB μ V	dB/m	dB μ V/m	dB μ V/m	dB
2239.58	1.00	56	35.17	---	8.76	43.93	---
2718.75	1.00	67	35.17	---	9.90	45.07	---
4871.46	1.00	238	45.27	---	3.95	49.22	---
9747.08	1.00	104	35.60	---	11.89	47.49	---
12187.92	1.00	313	39.10	---	9.74	48.84	---
19494.58	1.00	349	47.48	---	1.69	49.17	---

Test mode: IEEE 802.11g CH06 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude	Correction Factor	Corrected Amplitude	Limit	Margin
MHz	m	degree	dB μ V	dB/m	dB μ V/m	dB μ V/m	dB
1600.00	1.00	325	37.17	---	14.33	51.50	---
2239.96	1.00	174	45.16	43.83	8.76	53.92	52.59
2319.96	1.00	96	44.83	37.00	8.99	53.82	45.99
2370.95	1.00	96	46.66	37.17	9.13	55.79	46.30
2485.93	1.00	96	45.67	38.67	9.45	55.12	48.12
2719.96	1.00	95	44.17	42.50	9.90	54.07	52.40
4869.64	1.00	198	53.78	39.11	3.94	57.72	43.05

Test mode: IEEE 802.11g CH11 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table (°)			Limit (dB μ V/m)	Margin (dB)
261.59	41.53	1.00	146	-4.22	37.31	46.00	-8.69
351.31	40.47	1.00	135	-2.68	37.79	46.00	-8.21
391.32	38.47	1.00	274	-1.30	37.17	46.00	-8.83
700.06	28.41	1.00	210	9.58	37.99	46.00	-8.01
800.07	30.38	1.00	202	11.61	41.99	46.00	-4.01
850.07	26.94	1.00	199	13.19	40.13	46.00	-5.87

Test mode: IEEE 802.11g CH11 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table (°)			Limit (dB μ V/m)	Margin (dB)
123.36	35.16	1.00	244	-2.31	32.85	43.50	-10.65
151.25	37.73	1.00	296	-3.18	34.55	43.50	-8.95
325.85	39.04	1.00	19	-3.20	35.84	46.00	-10.16
482.26	34.57	1.00	248	2.23	36.80	46.00	-9.20
534.40	29.92	1.00	221	4.35	34.27	46.00	-11.73
801.15	25.73	1.00	326	11.65	37.38	46.00	-8.62

Test mode: IEEE 802.11g CH11 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude	Correction Factor	Corrected	Limit	Margin
			Peak / Ave.		Amplitude		
MHz	m	degree	dB μ V	dB/m	dB μ V/m	dB μ V/m	dB
2087.50	1.00	247	35.83	---	8.34	44.17	---
2718.75	1.00	66	35.17	---	9.90	45.07	---
7384.79	1.00	243	36.28	---	10.42	46.70	---
9849.79	1.00	273	36.28	---	11.93	48.21	---
12308.75	1.00	293	38.11	---	9.56	47.67	---
24619.37	1.00	195	46.65	---	3.01	49.66	---

Test mode: IEEE 802.11g CH11 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude	Correction Factor	Corrected	Limit	Margin
			Peak / Ave.		Amplitude		
MHz	m	degree	dB μ V	dB/m	dB μ V/m	dB μ V/m	dB
1600.00	1.00	42	37.50	---	14.33	51.83	---
2087.96	1.00	198	44.16	42.67	8.34	52.50	51.01
2239.96	1.00	195	45.67	43.33	8.76	54.43	52.09
2319.95	1.00	92	45.83	39.83	8.99	54.82	48.82
2719.96	1.00	115	43.50	42.17	9.90	53.40	52.07
4925.83	1.00	201	47.44	---	4.13	51.57	---

8.4 Test Result of the Bandedge


If any 100kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either *at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in §15.209(a)*,

We perform this section by the *radiated manner*, the RBW is set to 100kHz and $VBW > RBW$. We'd made the observation *up to 10th harmonics and the criterion is all the harmonic/spurious emissions must be 20dB below the highest emission level measured*. If the emissions fall in the restricted bands stated in the Part 15.205(a) must also *comply with the radiated emission limits specified in Part 15.209(a)*. (*Peak mode: $RBW=VBW=1MHz$, Average mode: $RBW=1MHz$; $VBW=10Hz$*)

The following pages show our observations referring to the channel 1 and 11 respectively.

Test Condition & Setup: same as < 8.1 >

Channel 1 of IEEE 802.11b

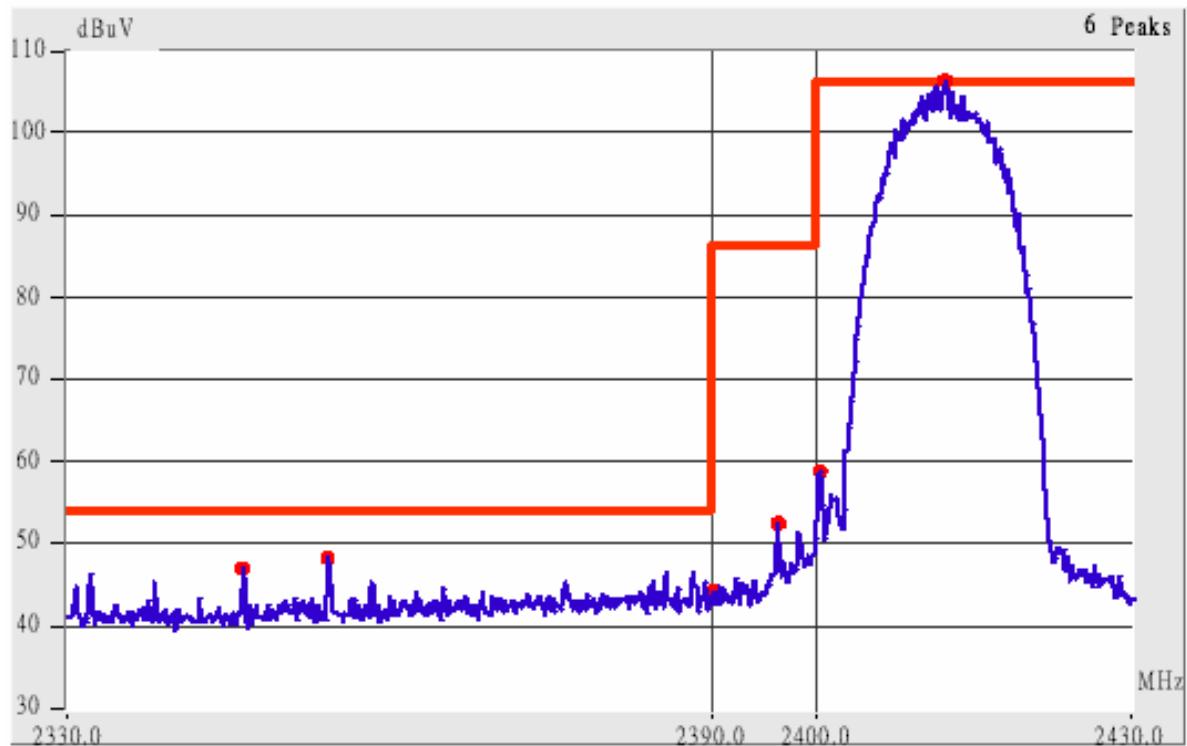


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

1. The lobe left by the fundamental side is already 20dB below the highest emission level.
2. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

Radiated Emission					Corrected Amplitude		Class B (3m)			
Frequency (MHz)	Ant. P.	Ant. H. (m)	Table (°)	Factors (dB)	(dB μ V/m)		Limit (dB μ V/m)		Margin (dB)	
					Peak	Average	Peak	Ave.		
2361.47	Hor	1.00	280	9.10	45.60	---	73.96	53.96	-8.36	
2390.02	Hor	1.00	291	9.18	44.85	---	73.96	53.96	-9.11	
2375.97	Ver	1.00	90	9.14	55.31	44.81	73.96	53.96	-9.15	
2387.96	Ver	1.00	96	9.18	55.84	45.18	73.96	53.96	-8.78	
2389.92	Ver	1.00	86	9.18	55.52	43.68	73.96	53.96	-10.28	

Channel 11 of IEEE 802.11b

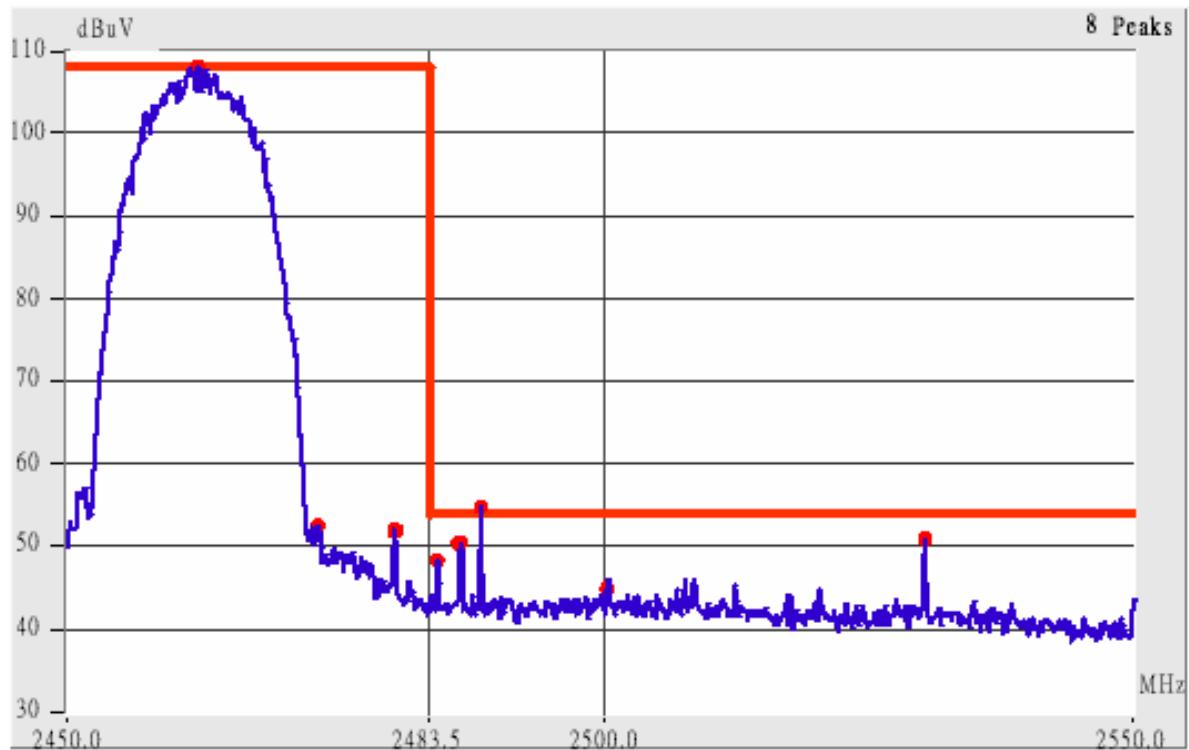


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

3. The lobe right by the fundamental side is already 20dB below the highest emission level.
4. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below

Radiated Emission					Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Table (°)	Factors (dB)	(dB μ V/m)		Limit (dB μ V/m)		Margin (dB)
					Peak	Average	Peak	Ave.	
2485.78	Hor	1.00	201	9.45	46.12	---	73.96	53.96	-7.84
2506.02	Hor	1.00	303	9.50	46.33	---	73.96	53.96	-7.63
2483.95	Ver	1.00	193	9.45	52.94	43.28	73.96	53.96	-10.68
2485.95	Ver	1.00	187	9.45	56.12	48.12	73.96	53.96	-5.84
2487.94	Ver	1.00	172	9.46	55.79	47.79	73.96	53.96	-6.17
2499.95	Ver	1.00	195	9.49	54.66	43.99	73.96	53.96	-9.97
2529.94	Ver	1.00	83	9.55	55.88	49.22	73.96	53.96	-4.74

Channel 1 of IEEE 802.11g

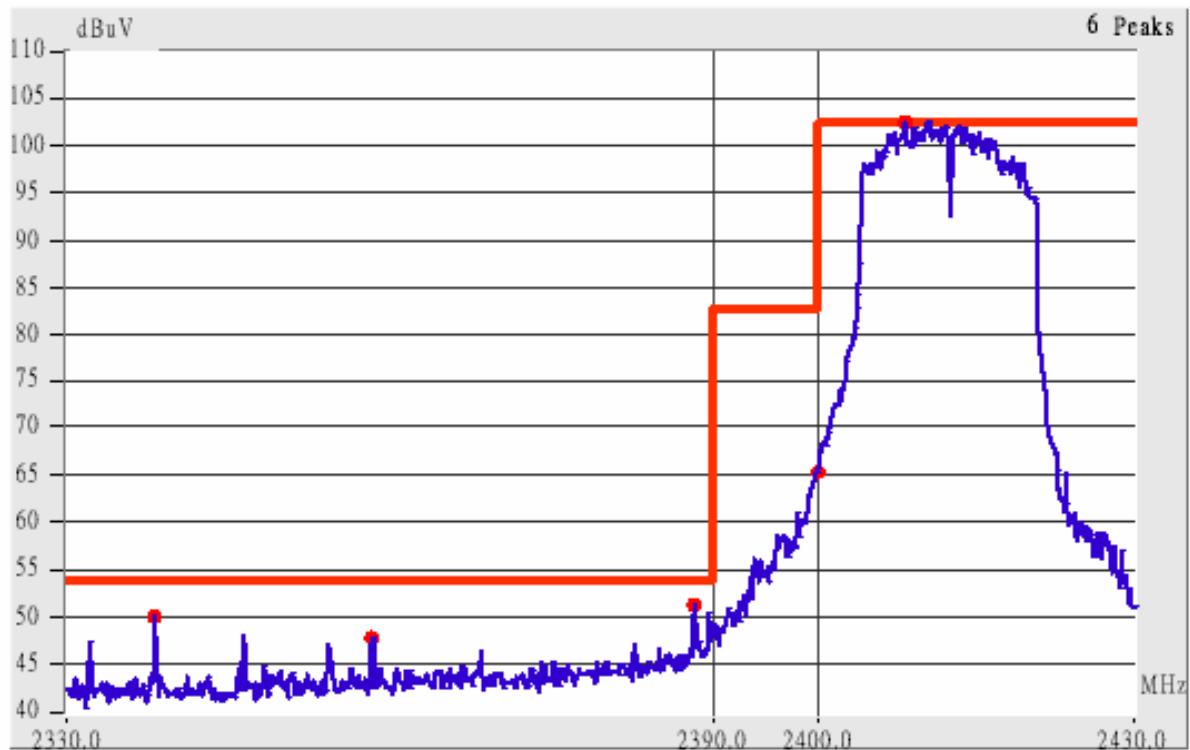


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

5. The lobe left by the fundamental side is already 20dB below the highest emission level.
6. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

Radiated Emission					Corrected Amplitude		Class B (3m)			
Frequency (MHz)	Ant. P.	Ant. H. (m)	Table (°)	Factors (dB)	(dB μ V/m)		Limit (dB μ V/m)	Peak	Ave.	Margin (dB)
					Peak	Average				
2365.15	Hor	1.00	227	9.11	45.45	---	73.96	53.96	-8.51	
2390.02	Hor	1.00	112	9.18	44.35	---	73.96	53.96	-9.61	
2375.91	Ver	1.00	101	9.14	56.98	44.47	73.96	53.96	-9.49	
2387.95	Ver	1.00	88	9.18	59.18	47.35	73.96	53.96	-6.61	
2389.98	Ver	1.00	111	9.18	58.68	45.85	73.96	53.96	-8.11	

Channel 11 of IEEE 802.11g

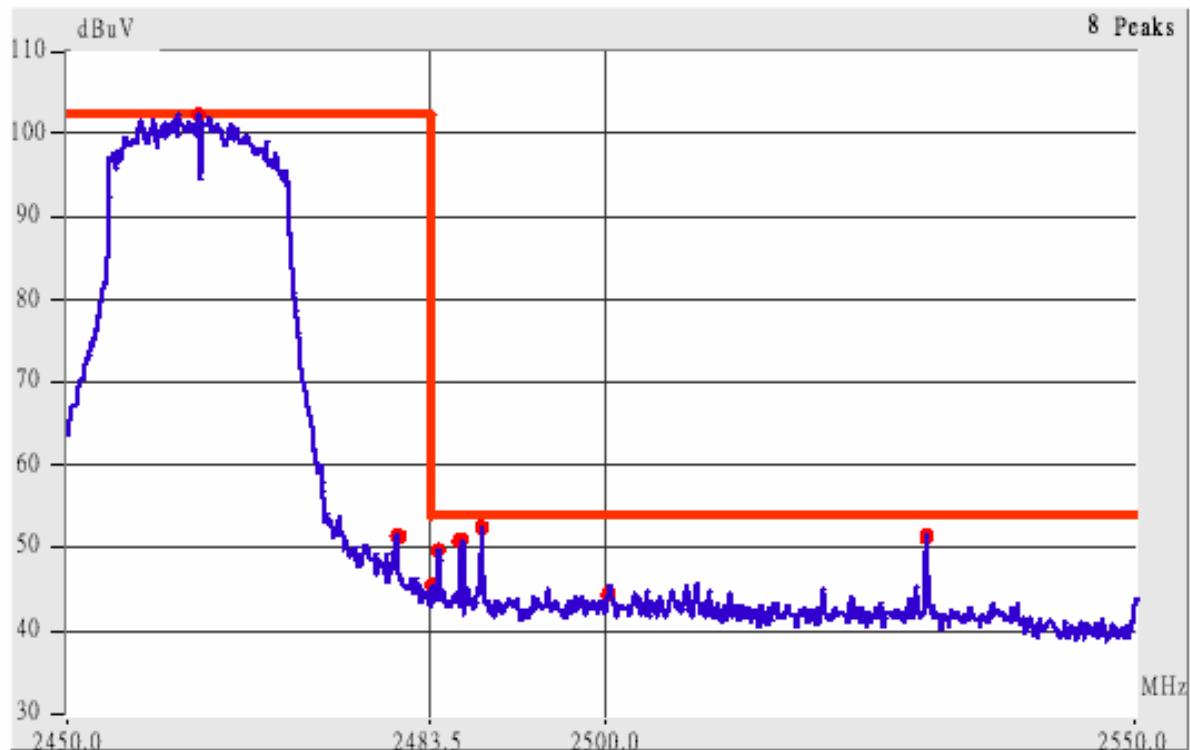

This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

7. The lobe right by the fundamental side is already 20dB below the highest emission level.
8. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below


Frequency (MHz)	Ant. P.	Radiated Emission			Factors (dB)	Corrected Amplitude		Class B (3m)			
		Ant. H. (m)	Table (°)	(dBμV/m)		Peak	Average	Limit (dBμV/m)		Margin (dB)	
								Peak	Ave.		
2486.12	Hor	1.00	179	9.45	46.28	---	46.28	73.96	53.96	-7.68	
2530.57	Hor	1.00	217	9.55	46.05	---	46.05	73.96	53.96	-7.91	
2483.96	Ver	1.00	185	9.45	55.78	46.95	55.78	73.96	53.96	-7.01	
2485.97	Ver	1.00	189	9.45	57.62	48.62	57.62	73.96	53.96	-5.34	
2487.95	Ver	1.00	181	9.46	58.29	50.46	58.29	73.96	53.96	-3.50	
2499.95	Ver	1.00	179	9.49	54.66	44.16	54.66	73.96	53.96	-9.80	
2524.68	Ver	1.00	100	9.54	56.20	41.87	56.20	73.96	53.96	-12.09	
2529.94	Ver	1.00	104	9.55	56.88	49.72	56.88	73.96	53.96	-4.24	

IX. Section 15.247(d): Power Spectral Density

9.1 Test Condition & Setup

The tests below are running with the EUT transmitter set at high power in TDD mode. The EUT is needed to force selection of output power level and channel number. While testing, the EUT was set to transmit continuously and to be tested by the contact manner with the spectrum analyzer.

9.2 Test Instruments Configuration

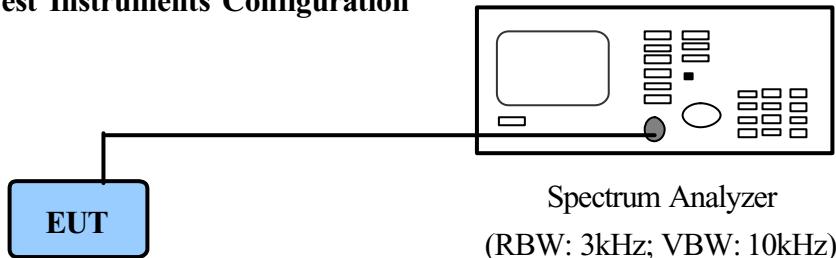

PC to control the EUT at maximal power output and channel number and set antenna kit

9.3 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	11/02/05



9.4 Test Result of Power spectral density



The following table shows a summary of the test results of the Power Spectral Density.

Channel	Ppr (dBm)	Cable Loss (dB)	Ppq (dBm)	Limit (dB)	Margin (dB)
802.11b CH01	-9.52	0.70	-8.82	8.00	-16.82
802.11b CH06	-8.10	0.70	-7.40	8.00	-15.40
802.11b CH11	-8.68	0.70	-7.98	8.00	-15.98
802.11g CH01	-14.51	0.70	-13.81	8.00	-21.81
802.11g CH06	-14.93	0.70	-14.23	8.00	-22.23
802.11g CH11	-14.83	0.70	-14.13	8.00	-22.13

Note:

1. The following pages show the results of spectrum reading.
2. Ppr: spectrum read power density (using peak search mode),
Ppq: actual peak power density in the spread spectrum band.
3. Ppq = Ppr + |Cable Loss|

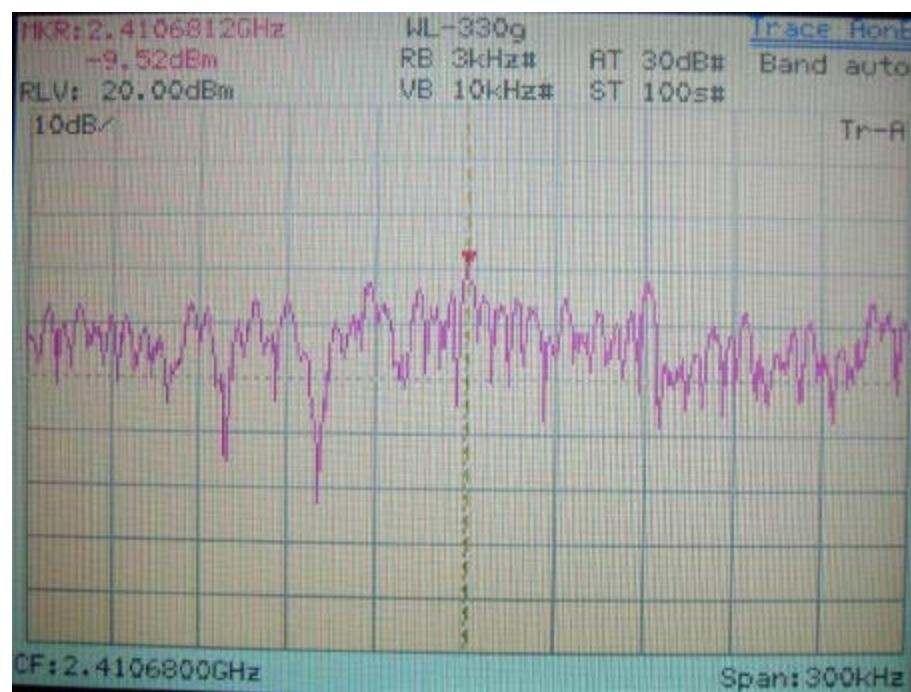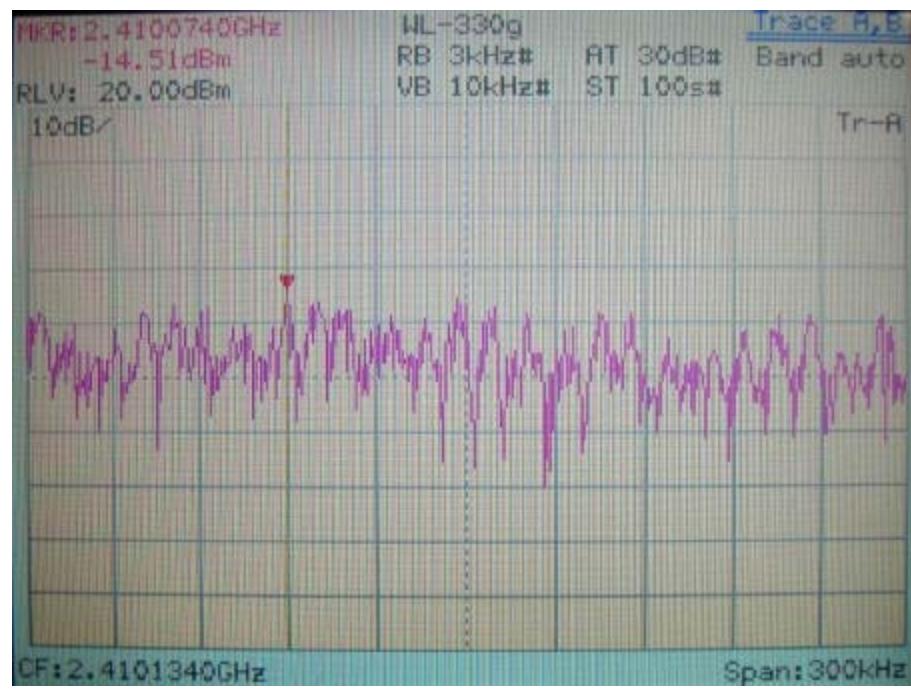Power Spectral Density for Channel 01**IEEE 802.11b****IEEE 802.11g**

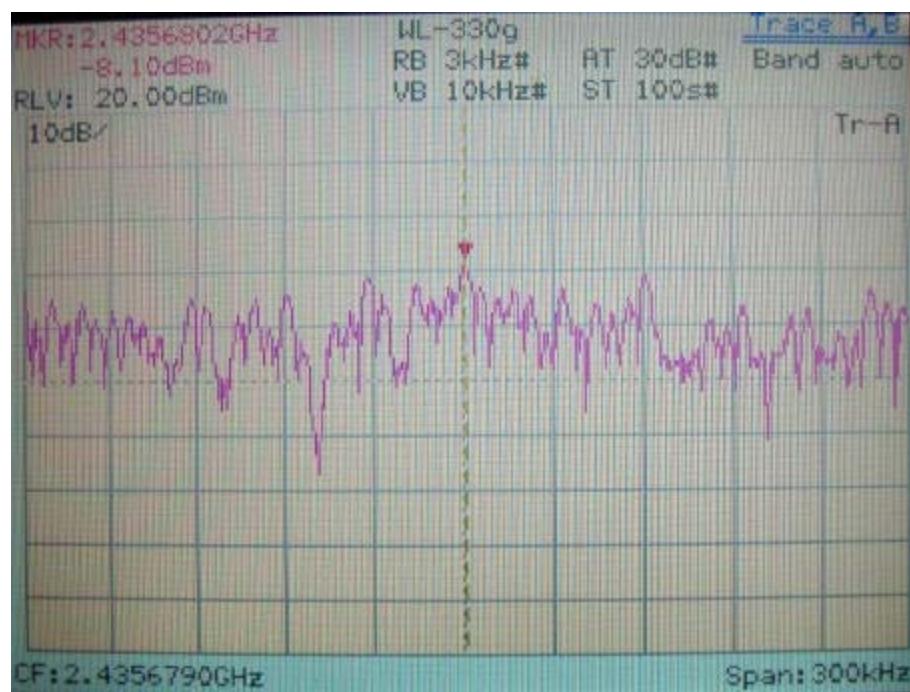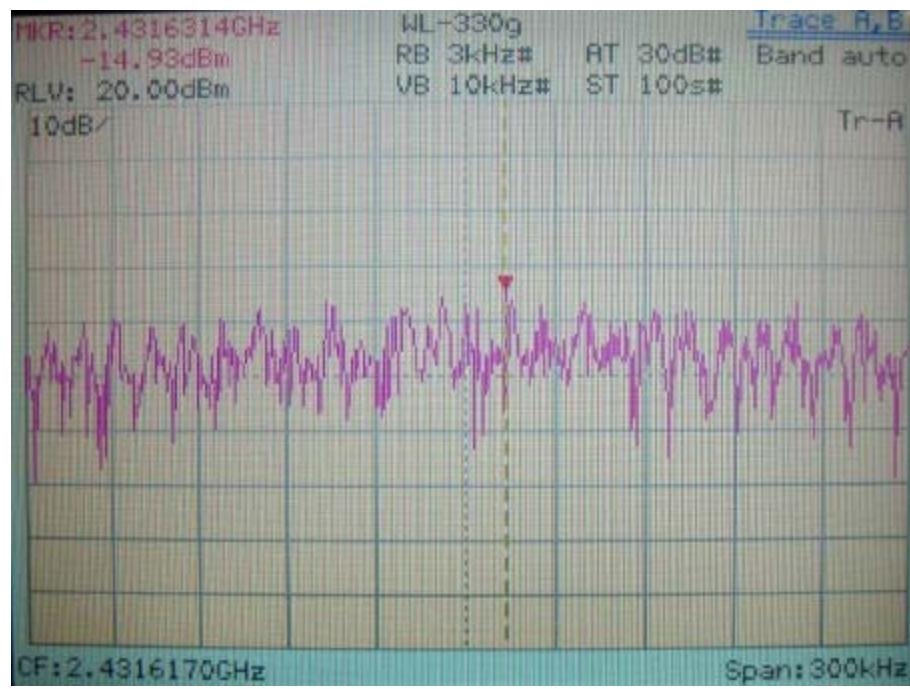Power Spectral Density for Channel 06**IEEE 802.11b****IEEE 802.11g**

Power Spectral Density for Channel 11**IEEE 802.11b****IEEE 802.11g**