

RADIO TEST REPORT – 433532-1R2TRFWL

Type of assessment:

Transmitters' co-location

Applicant:

Astus

Product:

Telematic device for vehicle

Model:

Astus QC25 NA1 BLE

FCC ID:

SFPASTUS-QC25

Contains FCC ID's:

2AA9B04 (BLE)

R17LE910NAV2 (LTE)

Specifications:

- ◆ FCC 47 CFR Part 15 Subpart C, §15.247
- ◆ FCC 47 CFR Part 27
- ◆ FCC 47 CFR Part 22 Subpart H

Date of issue: September 27, 2021

Redwanul Rasel, EMC/RF Specialist

Tested by



Signature

Abdoulaye Ndiaye, EMC/RF Specialist

Tested by



Signature

Andrey Adelberg, Senior EMC/RF Specialist

Reviewed by



Signature

Nemko Canada Inc., a testing laboratory, is accredited by the Standards Council of Canada.
The tests included in this report are within the scope of this accreditation.
The SCC Accreditation Symbol is an official symbol of the Standards Council of Canada, used under licence.

FCC File Number: 15064 (Ottawa/Almonte); 151100 (Montreal); 151097 (Cambridge)

FCC 15.247 and RSS-247; Date: February 2021

www.nemko.com



Lab locations

Company name	Nemko Canada Inc.			
Facilities	<i>Ottawa site:</i> 303 River Road Ottawa, Ontario Canada K1V 1H2	<i>Montréal site:</i> 292 Labrosse Avenue Pointe-Claire, Québec Canada H9R 5L8	<i>Cambridge site:</i> 1-130 Saltsman Drive Cambridge, Ontario Canada N3E 0B2	<i>Almonte site:</i> 1500 Peter Robinson Road West Carleton, Ontario Canada K0A 1L0
	Tel: +1 613 737 9680 Fax: +1 613 737 9691	Tel: +1 514 694 2684 Fax: +1 514 694 3528	Tel: +1 519 650 4811	Tel: +1 613 256-9117
Test site identifier	Organization	Ottawa/Almonte	Montreal	Cambridge
	FCC: ISED:	CA2040 2040A-4	CA2041 2040G-5	CA0101 24676
Website	www.nemko.com			

Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contained in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

Copyright notification

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

© Nemko Canada Inc.

Table of Contents

Table of Contents	3
Section 1 Report summary	4
1.1 Test specifications	4
1.2 Test methods	4
1.3 Exclusions	4
1.4 Statement of compliance	5
1.5 Test report revision history	5
Section 2 Engineering considerations	6
2.1 Modifications incorporated in the EUT for compliance	6
2.2 Technical judgment	6
2.3 Model variant declaration	6
2.4 Deviations from laboratory tests procedures	6
Section 3 Test conditions	7
3.1 Atmospheric conditions	7
3.2 Power supply range	7
Section 4 Measurement uncertainty	8
4.1 Uncertainty of measurement	8
Section 5 Information provided by the applicant	9
5.1 Disclaimer	9
5.2 Applicant/Manufacture	9
5.3 EUT information	9
5.4 Radio technical information	9
5.5 EUT setup details	10
Section 6 Summary of test results	12
6.1 Testing location	12
6.2 Testing period	12
6.3 Sample information	12
6.4 FCC test results	12
Section 7 Test equipment	13
7.1 Test equipment list	13
Section 8 Testing data	14
8.1 Spurious (out-of-band) unwanted emissions	14
Section 9 EUT photos	26
9.1 External photos	26

Section 1 Report summary

1.1 Test specifications

FCC 47 CFR Part 15, Subpart C, Clause 15.247	Operation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–585 MHz
FCC 47 CFR Part 27	Miscellaneous Wireless Communications Services
FCC 47 CFR Part 22 Subpart H	Public Mobile Services, Cellular Radiotelephone Service

1.2 Test methods

558074 D01 15.247 Meas Guidance v05r02 (April 2, 2019)	Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules.
ANSI C63.10 v2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
ANSI C63.26 v2015	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

1.3 Exclusions

As per quotation (Q102176118r3), the purpose of this report is verification of transmitters colocation. Only inter-modulation products within restricted bands were assessed, other requirements were excluded from the scope of this report.

Partial testing was performed on the product with the transmitter operating to confirm that the host product meets the FCC requirements. This investigation of the final product was done by spot checking emissions from the device while operating the host as a composite system. This testing was performed with the host product configured in typical operational modes to check the spurious emissions for compliance with all the applicable rules.

The evaluation was done to ensure there are no additional radiated spurious emissions generated due to simultaneous-transmission operations compared to single transmitter operations testing, and to ensure compliance with the applicable FCC rules for the transmitters operating individually and simultaneously. This includes compliance for the summation of all emissions from all outputs occupying the same or overlapping frequency ranges, as defined by the applicable rules. All other requirements are excluded from the scope of this report.

1.4 Statement of compliance

In the configuration tested, the EUT was found compliant.

Testing was performed against all relevant requirements of the test standard except as noted in section 1.3 above. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

Determining compliance is based on the results of the compliance measurement, not taking into account measurement uncertainty, in accordance with section 1.3 of ANSI C63.10 v2013.

See "Summary of test results" for full details.

1.5 Test report revision history

Table 1.5-1: Test report revision history

Revision #	Date of issue	Details of changes made to test report
TRF	June 14, 2021	Original report issued
R1TRF	June 14, 2021	Section 5.5.1 (Radio exercise details: Operating conditions), BLE Tx Mid channel updated as 2438 MHz as per customer request.
R2TRF	September 27, 2021	Removed ISED specification and updated FCC ID and model name.

Section 2 Engineering considerations

2.1 Modifications incorporated in the EUT for compliance

There were no modifications performed to the EUT during this assessment.

2.2 Technical judgment

None

2.3 Model variant declaration

As declared by the applicant, the EUT model Astus QC25 NA1 BLE has been chosen to be representative for all other models in the model family. The model family, and the description of the variations, are as follows:

1. The power output and CAN #2 (let's call them "optional features") are available on the Auxiliary connector.
2. If the customer does not require the optional features, the product will be shipped in its case which does not contain the opening to access the connector. This helps to better protect the product against dust and liquids.
3. If the customer wishes to use the optional features, the product will be shipped in its case which contains the opening to access and plug into the connector.

2.4 Deviations from laboratory tests procedures

No deviations were made from laboratory procedures.

Section 3 Test conditions

3.1 Atmospheric conditions

Temperature	15 °C – 35 °C
Relative humidity	20 % – 75 %
Air pressure	86 kPa (860 mbar) – 106 kPa (1060 mbar)

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

3.2 Power supply range

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages $\pm 5\%$, for which the equipment was designed.

Section 4 Measurement uncertainty

4.1 Uncertainty of measurement

UKAS Lab 34 and TIA-603-B have been used as guidance for measurement uncertainty reasonable estimations with regards to previous experience and validation of data. Nemko Canada, Inc. follows these test methods in order to satisfy ISO/IEC 17025 requirements for estimation of uncertainty of measurement for wireless products.

Measurement uncertainty budgets for the tests are detailed below. Measurement uncertainty calculations assume a coverage factor of $K = 2$ with 95% certainty.

Table 4.1-1: Measurement uncertainty calculations

Test name	Measurement uncertainty, \pm dB
All antenna port measurements	0.55
Occupied bandwidth	4.45
Conducted spurious emissions	1.13
Radiated spurious emissions	3.78
AC power line conducted emissions	3.55

Section 5 Information provided by the applicant

5.1 Disclaimer

This section contains information provided by the applicant and has been utilized to support the test plan. Inaccurate information provided by the applicant can affect the validity of the results contained within this test report. Nemko accepts no responsibility for the information contained within this section and the impact it may have on the test plan and resulting measurements.

5.2 Applicant/Manufacture

Applicant name	Astus
Applicant address	101 boulevard Roland-Therrien (suite 500), Longueuil, Quebec, Canada, J4H 4B9
Manufacturer	Same as applicant

5.3 EUT information

Product	Telematic device for vehicle
Model	Astus QC25 NA1 BLE
Serial number	NA-3600117
Part number	QC25-NA
Power supply requirements	DC: 12.5 V
Product description and theory of operation	Collect telematic data from the vehicle, including CAN bus data and GPS positions. Transmit the data to a remote server with its embedded cellular radio. The QC25 is also equipped with a BLE module.

5.4 Radio technical information

Category of Wideband Data	<input type="checkbox"/> Frequency Hopping Spread Spectrum (FHSS) equipment
Transmission equipment	<input checked="" type="checkbox"/> Other types of Wideband Data Transmission equipment (e.g., DSSS, OFDM, etc.).
Frequency band	2400–2483.5 MHz (BLE) 4G LTE: B2 (1850–1910 MHz), B4 (1710–1755 MHz), B5 (824–849 MHz), B12 (669–716 MHz) and B13 (777–787 MHz) 3G LTE: B2 (1850–1910 MHz) and B5 (824–849 MHz)
Frequency Min (MHz)	2402 (BLE)
Frequency Max (MHz)	2480 (BLE)
Type of modulation	3G LTE: 8PSK/QPSK BLE (GFSK) 4G LTE: QPSK/16QAM BLE (GFSK)
Emission classification	3G LTE: F9W, G7D 4G LTE: W7D BLE: F1D
Antenna information	LTE : Abracon ACAR4008-S698, Gain: -1.55 dBi @ 700 MHz to 1.75 dBi @ 2700 MHz (max 4.10 dBi @ 1710 MHz) BLE : The EUT uses non-detachable antenna to the intentional radiator. Internal to the Rigado module BMD-300 (FCC approved), GPS: Taoglass GP.1575.18.2.A.02

5.5 EUT setup details

5.5.1 Radio exercise details

Operating conditions	<ul style="list-style-type: none">- Astus QC25 NA1 BLE (the EUT) powered through a 6 meters harness- 12.5 VDC power is applied to the EUT- I/O set as an input (to simulate the vehicle's ignition)- 85mA resistive load is installed on the power output at the auxiliary connector. On a 2 meters harness.- CAN bus #1 terminated with a 120 ohms resistor. Used as the command and status port for the test operator. Wired outside the semi anechoic chamber.- CAN bus #2 from the auxiliary connector. Set in loopback mode. On a 2 meters unterminated wire pair.- CAN bus #2 from the main OBD2 connector. Set in loopback mode. The wire pair is 2 meters long. Terminated with a 120 ohms resistor.- GPS enabled- BLE transmission forced to low (2402 MHz), mid (2438 MHz) and high (2480 MHz) frequency. Under control of the test operator. The BLE is not paired while in test.- Cellular radio transmission forced to 3G 849 MHz (band 5), 3G 1850 MHz (band 2), 4G 716 MHz (band 12) and 4G 787 MHz (band 13). Under control of the test operator. The EUT is not connected to the cell operator nor the remote Astus server while in test.	
Tx Combination	BLE Tx	LTE Tx Frequency
Scenario 1	2438 MHz (Mid Channel)	849 MHz
Scenario 2	2438 MHz (Mid Channel)	1850 MHz
Scenario 3	2480 MHz (High Channel)	716 MHz
Scenario 4	2480 MHz (High Channel)	787 MHz
EUT details:		
SN: NA-36000117, PN: QC25-NA, Main board RL: 7, Mezzanine board RL: 5		
Software details:		
EUT Bootloader: 2.15.116		
EUT Firmware: 2.16.15.1		
Telit LE910-NA1 cellular radio: 20.00.527		
uBlox BMD-300 BLE radio: 2.14.243.0		
Transmitter state	BLE Transmitter set into continuous mode during testing time. LTE Transmitter set into 'AT#TESTMODE' during testing time.	

5.5.2 EUT setup configuration
Table 5.5-1: EUT sub assemblies

Description	Brand name	Model, Part number, Serial number, Revision level
Astus QC25 NA1 BLE	ASTUS	SN: NA-3600117

Table 5.5-2: EUT interface ports

Description	Qty.
CAN Bus port	2
I/O port	1
Power Output	1
Auxiliary connector port	1


Table 5.5-3: Support equipment

Description	Brand name	Model, Part number, Serial number, Revision level
Laptop	Vostro	SN 34735277773
CAN to USB adaptor (PEAK)	GridConnect	MN: EH-002021-303499
0-30 Vdc power supply	BK Precision 1550	SN: 1150083307

Table 5.5-4: Inter-connection cables

Cable description	From	To	Length (m)
Twisted pair non shielded cable CAN	EUT Can Bus port 2 on OBD2 connector.	Terminated with a 120 ohms resistor.	2
Twisted pair non shielded cable CAN	EUT Can Bus port 2 on Auxiliary connector	Terminated with a 120 ohms load	2
Single non shielded wire	DC power supply	EUT I/O* on OBD2 connector	6
Pair non shielded cable	EUT Power output port on Auxiliary connector	ohms load	2
Non shielded power (12 Vdc typical) and GND	DC power supply	EUT power input port on OBD2 connector	6

Note: (*) Used as an input.

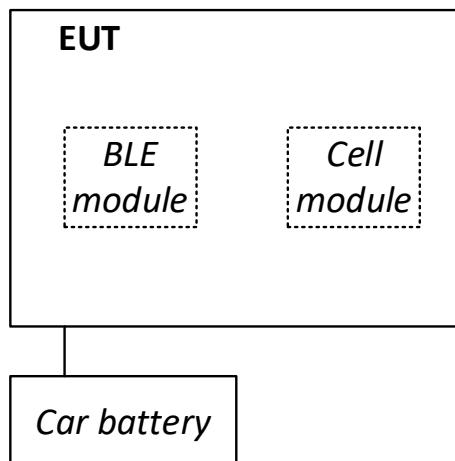
Figure 5.5-1: Radiated testing block diagram

Note: All supporting equipment was outside of the test chamber.

Section 6 Summary of test results

6.1 Testing location

Test location (s)	Montreal
Test start date	May 17, 2021

6.2 Testing period

Test start date	May 17, 2021	Test end date	May 25, 2021
-----------------	--------------	---------------	--------------

6.3 Sample information

Receipt date	May 10, 2021	Nemko sample ID number(s)	2
--------------	--------------	---------------------------	---

6.4 FCC test results

Table 6.4-1: FCC requirements results

Test description	Verdict
Spurious emissions, various standards	Pass

Section 7 Test equipment

7.1 Test equipment list

Table 7.1-1: Equipment list

Equipment	Manufacturer	Model no.	Asset no.	Cal cycle	Next cal.
3 m EMI test chamber (Emissions)	TDK	SAC-3	FA002532e	2 year	February 25, 2022
Flush mount turntable	Sunol	FM2022	FA002550	—	NCR
Controller	Sunol	SC104V	FA002551	—	NCR
Antenna mast	Sunol	TLT2	FA002552	—	NCR
Receiver/spectrum analyzer	Rohde & Schwarz	ESU 40	FA002071	1 year	March 16, 2022
Bilog antenna (20–2000 MHz)	Sunol	JB1	FA002517	1 year	March 3, 2022
Receiver/spectrum analyzer	Rohde & Schwarz	ESU 40	FA002071	1 year	March 16, 2022
Horn antenna (18–40 GHz)	EMCO	3116	FA002487	2 year	March 4, 2023
Horn antenna (1–18 GHz)	EMCO	3115	FA001451	1 year	February 16, 2022
Pre-amplifier (0.5–18 GHz)	Com-Power	PAM-118A	FA002561	1 year	September 22, 2021
Pre-amplifier (18–40 GHz)	Com-Power	PAM-840	FA002508	1 year	September 24, 2021
Spectrum analyzer	Rohde & Schwarz	FSV 40	FA002731	1 year	March 23, 2022
50 Ω coax cable	C.C.A.	None	FA002605	—	VOU
50 Ω coax cable	C.C.A.	None	FA002831	—	VOU

Notes: NCR - no calibration required, VOU - verify on use

Section 8 Testing data

8.1 Spurious (out-of-band) unwanted emissions

8.1.1 References, definitions and limits

FCC §15.247:

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

FCC §22.917:

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

FCC §27.53:

On any frequency outside the authorized bands, the power of any emission shall be attenuated outside the band below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB;

Table 8.1-1: FCC §15.209 – Radiated emission limits

Frequency, MHz	Field strength of emissions		Measurement distance, m
	µV/m	dBµV/m	
30–88	100	40.0	3
88–216	150	43.5	3
216–960	200	46.0	3
above 960	500	54.0	3

Notes: In the emission table above, the tighter limit applies at the band edges.

For frequencies above 1 GHz the limit on peak RF emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

Table 8.1-2: FCC restricted frequency bands

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2690–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	Above 38.6
13.36–13.41			



8.1.2 Test summary

Verdict	Pass
Tested by	Redwanul Rasel
Test date	May 17 - May 25, 2021

8.1.3 Observations, settings and special notes

- As part of the current assessment, the test range of 9 kHz to 10th harmonic has been fully considered and compared to the actual frequencies utilized within the EUT. Since the EUT contains a transmitter in the GHz range, the EUT has been deemed compliant without formal testing in the 9 kHz to 30 MHz test range, therefore formal test results (tabular data and/or plots) are not provided within this test report.
- EUT was set to transmit with 100 % duty cycle.
- Radiated measurements were performed 30 MHz to 18 GHz at a distance of 3 m.
- Radiated measurements were performed 18 GHz to 25 GHz at a distance of 1 m.
- DTS emissions in restricted frequency bands test was performed as per KDB 558074, section 8.6 with reference to ANSI C63.10 subclause 11.12.
- DTS band-edge emission measurements test was performed as per KDB 558074, section 8.7 with reference to ANSI C63.10 subclause 11.13.

Spectrum analyser settings for radiated measurements within restricted bands below 1 GHz:

Resolution bandwidth:	100 kHz
Video bandwidth:	300 kHz
Detector mode:	Peak
Trace mode:	Max Hold

Spectrum analyser settings for peak radiated measurements within restricted bands above 1 GHz:

Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Detector mode:	Peak
Trace mode:	Max Hold

Spectrum analyser settings for average radiated measurements within restricted bands above 1 GHz:

Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Detector mode:	Average
Trace mode:	Max Hold

8.1.4 Test data

Table 8.1-3: Radiated field strength measurement results

Frequency, MHz	Frequency, MHz	Peak Field strength, dB μ V/m		Margin, dB	Average Field strength, dB μ V/m		Margin, dB
		Measured	Limit		Measured	Limit	
LTE (1850) & BLE (2402)	2390.0	57.13	74.00	16.87	48.75	54.00	5.25
LTE (849) & BLE (2402)	2390.0	57.04	74.00	16.96	48.84	54.00	5.16
LTE (716) & BLE (2480)	2483.5	56.70	74.00	17.30	49.20	54.00	4.80
LTE (787) & BLE (2480)	2483.5	56.63	74.00	17.37	48.71	54.00	5.29

Notes: Field strength includes correction factor of antenna, cable loss, amplifier, and attenuators where applicable.

Test data, continued

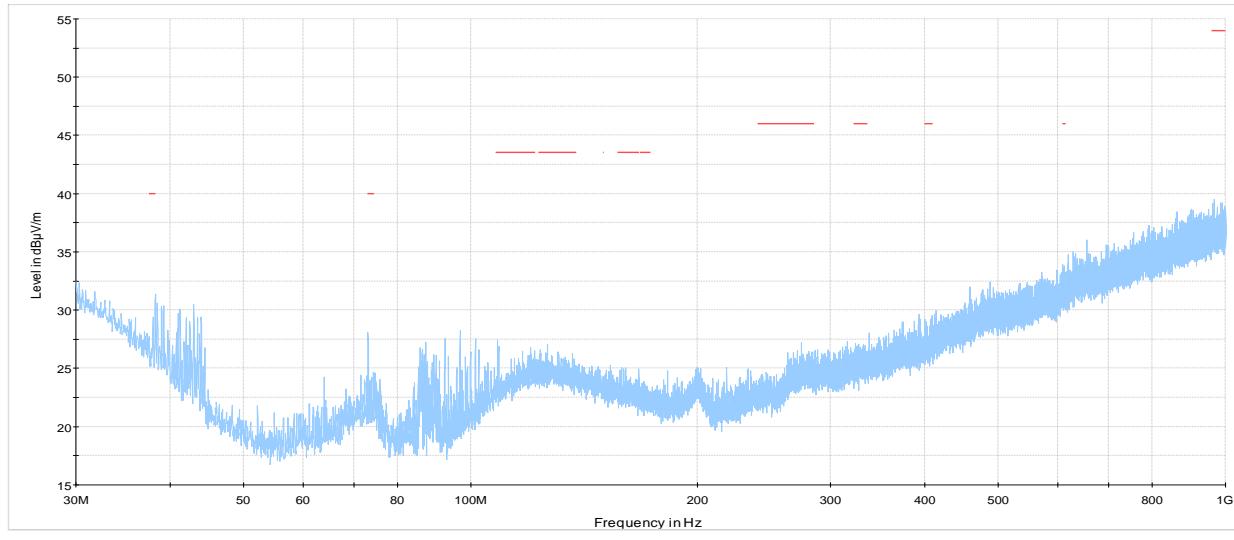


Figure 8.1-1: Radiated spurious emissions for 30 MHz to 1 GHz for Tx @ BLE (Mid channel, frequency 2438 MHz) and LTE (frequency 1850 MHz)


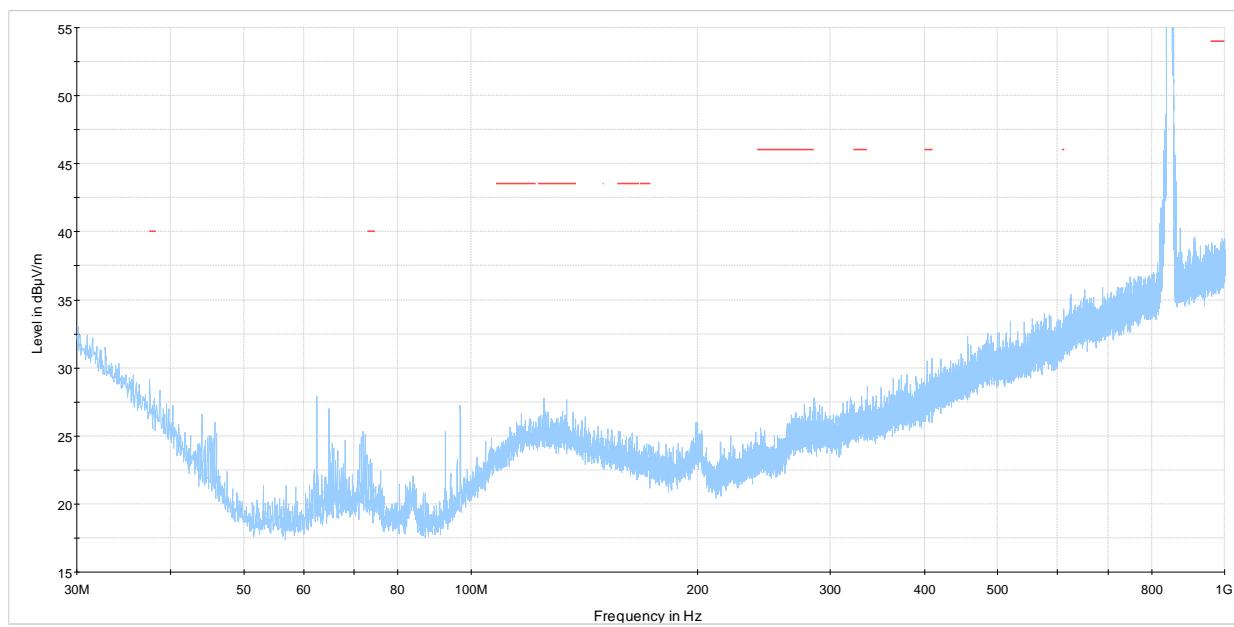


Figure 8.1-2: Radiated spurious emissions for 30 MHz to 1 GHz for Tx @ BLE (Mid channel, frequency 2438 MHz) and LTE (frequency 849 MHz)


Test data, continued

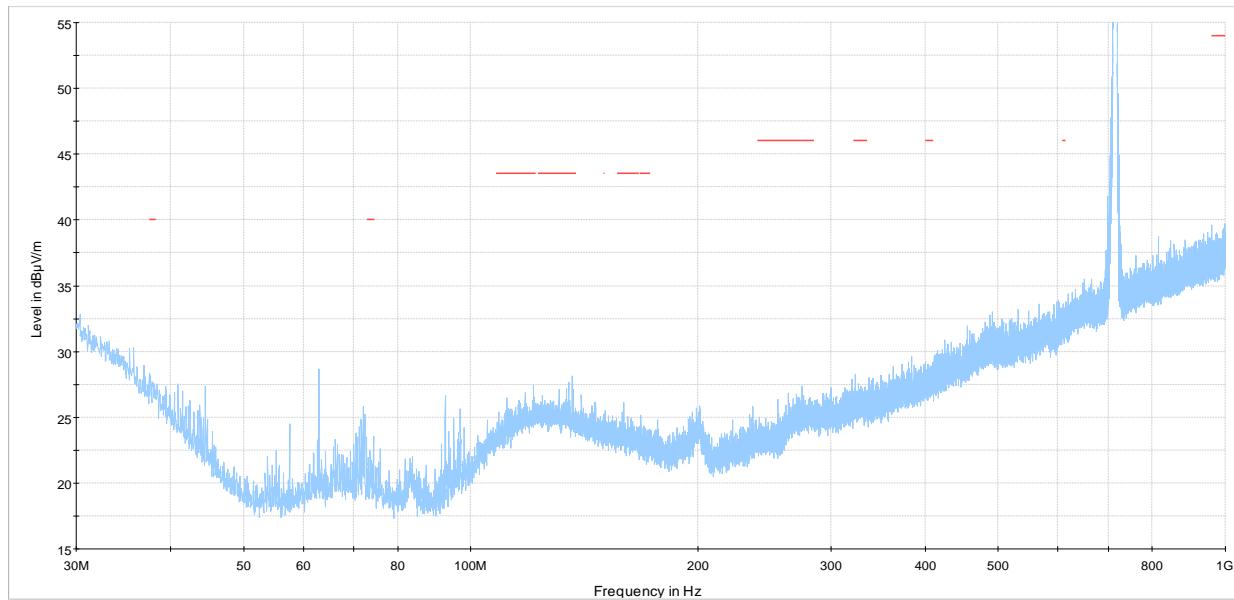

NEX-433532, May 17, 2021 channel 12

— Preview Result 1-PK+
— FCC 15.209 and RSS-210 limit line RstrB

Figure 8.1-3: Radiated spurious emissions for 30 MHz to 1 GHz for Tx @ BLE (High channel, frequency 2480 MHz) and LTE (frequency 716 MHz)

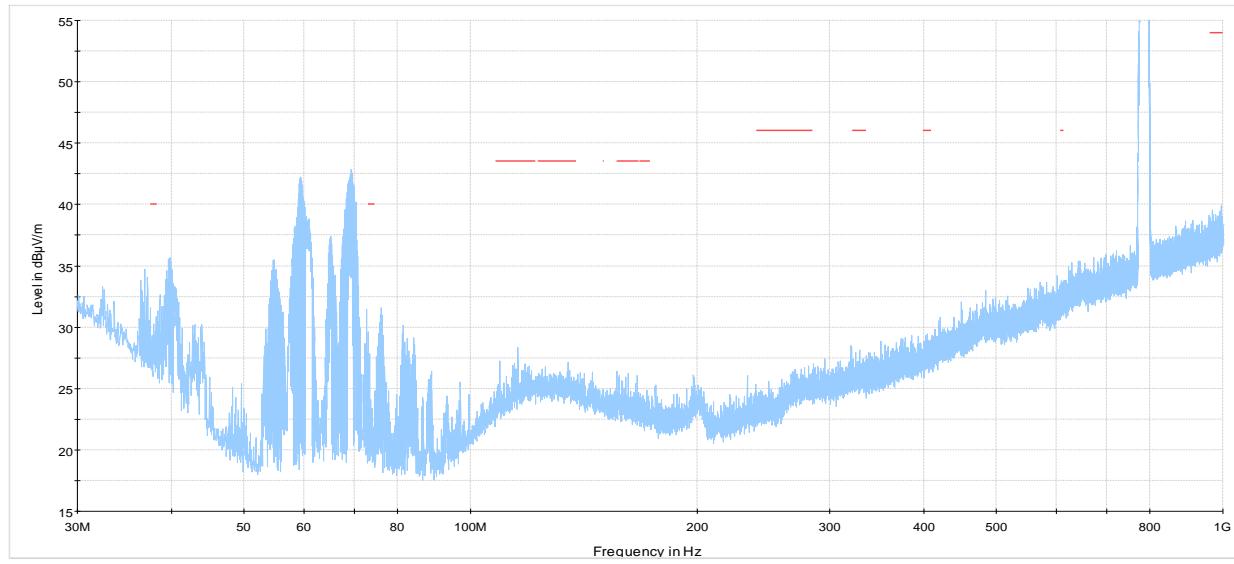

NEX-433532, May 17, 2021 channel 13

— Preview Result 1-PK+
— FCC 15.209 and RSS-210 limit line RstrB

Figure 8.1-4: Radiated spurious emissions for 30 MHz to 1 GHz for Tx @ BLE (High channel, frequency 2480 MHz) and LTE (frequency 787 MHz)

Test data, continued

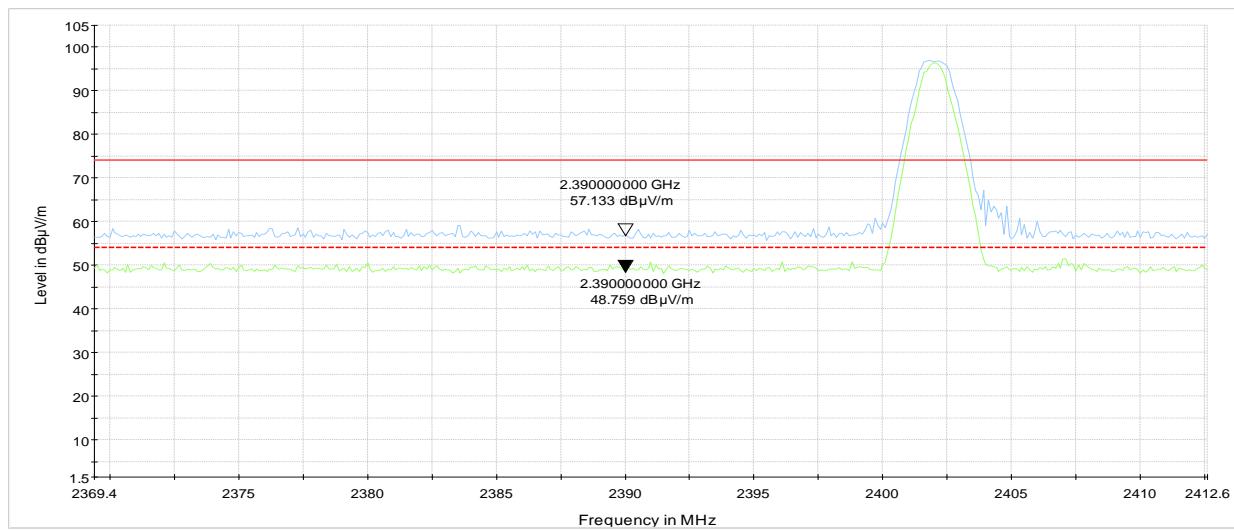


Figure 8.1-5: Band edge for 1 GHz to 3 GHz for Tx @ BLE (Low channel, frequency 2438 MHz) and LTE (frequency 1850 MHz)


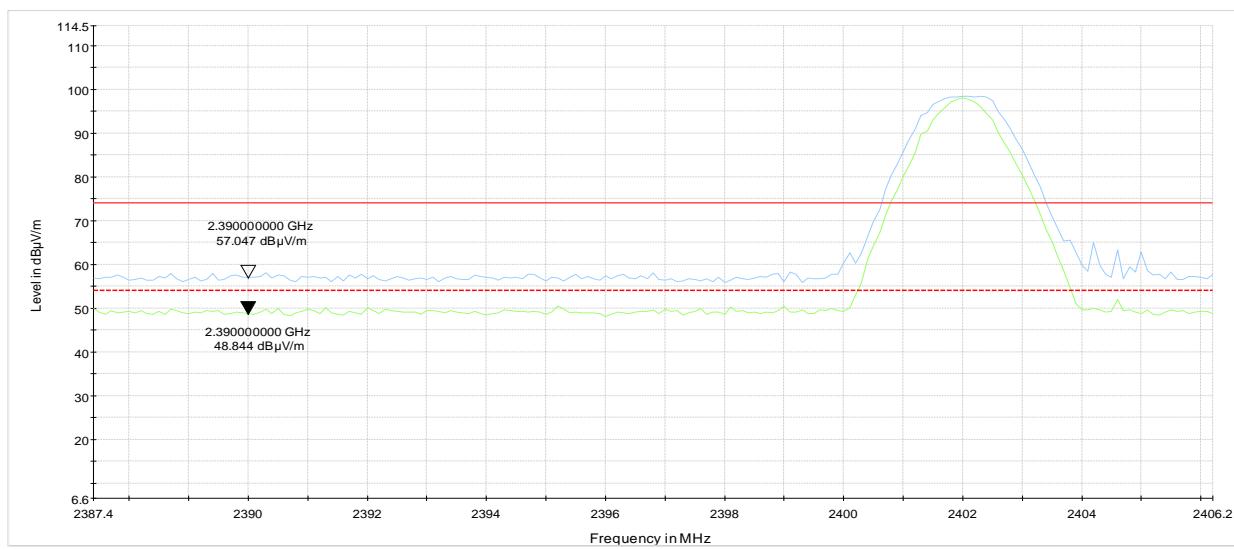


Figure 8.1-6: Band edge for 1 GHz to 3 GHz for Tx @ BLE (Low channel, frequency 2438 MHz) and LTE (frequency 849 MHz)


Test data, continued

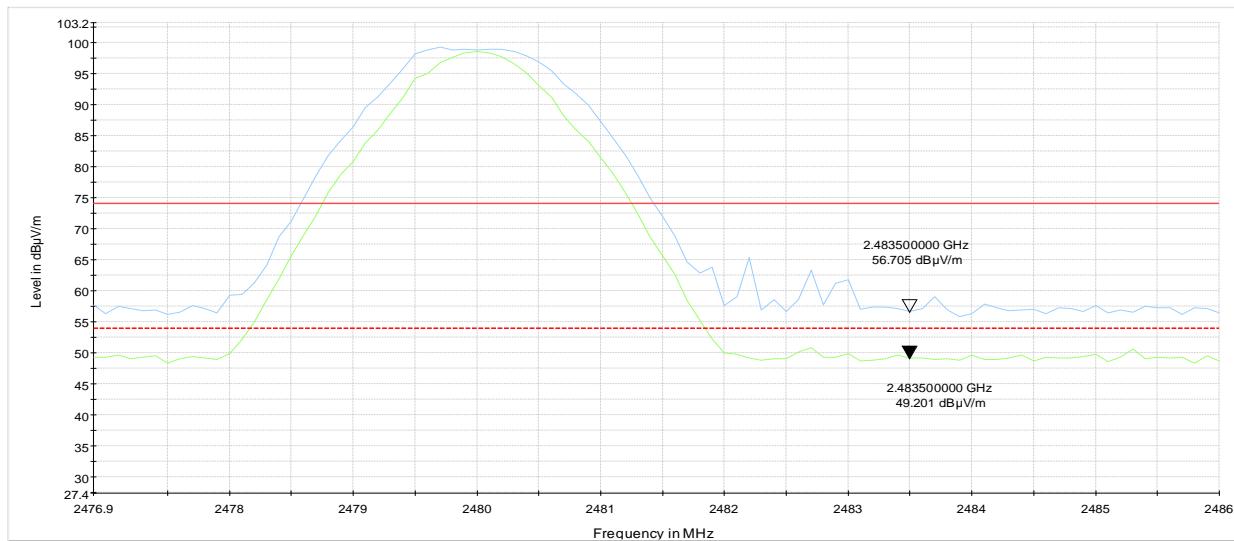

NEX-433532 - May 20, 2021 - Channel 12 and BLE (High channel)

— Preview Result 2-AVG
— Preview Result 1-PK+
— FCC Part 15 and ICES-003 Limit - Class B (PK), 3 m
- - - FCC Part 15 and ICES-003 Limit - Class B (Avg), 3 m

Figure 8.1-7: Band edge for 1 GHz to 3 GHz for Tx @ BLE (High channel, frequency 2480 MHz) and LTE (frequency 716 MHz)

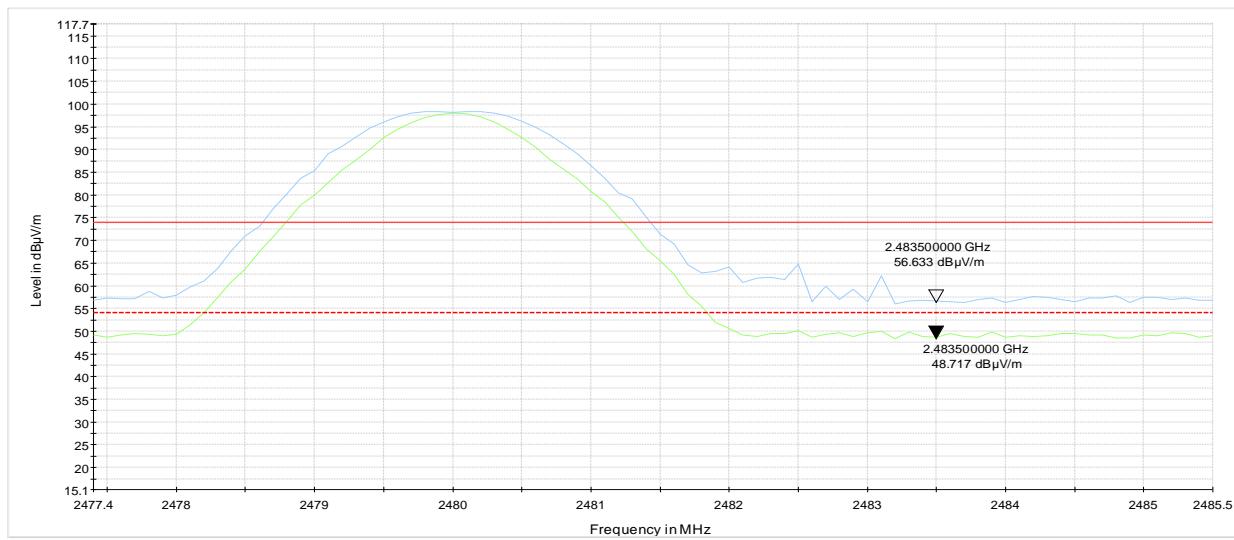

NEX-433532 - May 20, 2021 - Channel 13 and BLE (High channel)

— Preview Result 2-AVG
— Preview Result 1-PK+
— FCC Part 15 and ICES-003 Limit - Class B (PK), 3 m
- - - FCC Part 15 and ICES-003 Limit - Class B (Avg), 3 m

Figure 8.1-8: Band edge for 1 GHz to 3 GHz for Tx @ BLE (High channel, frequency 2480 MHz) and LTE (frequency 787 MHz)

Test data, continued

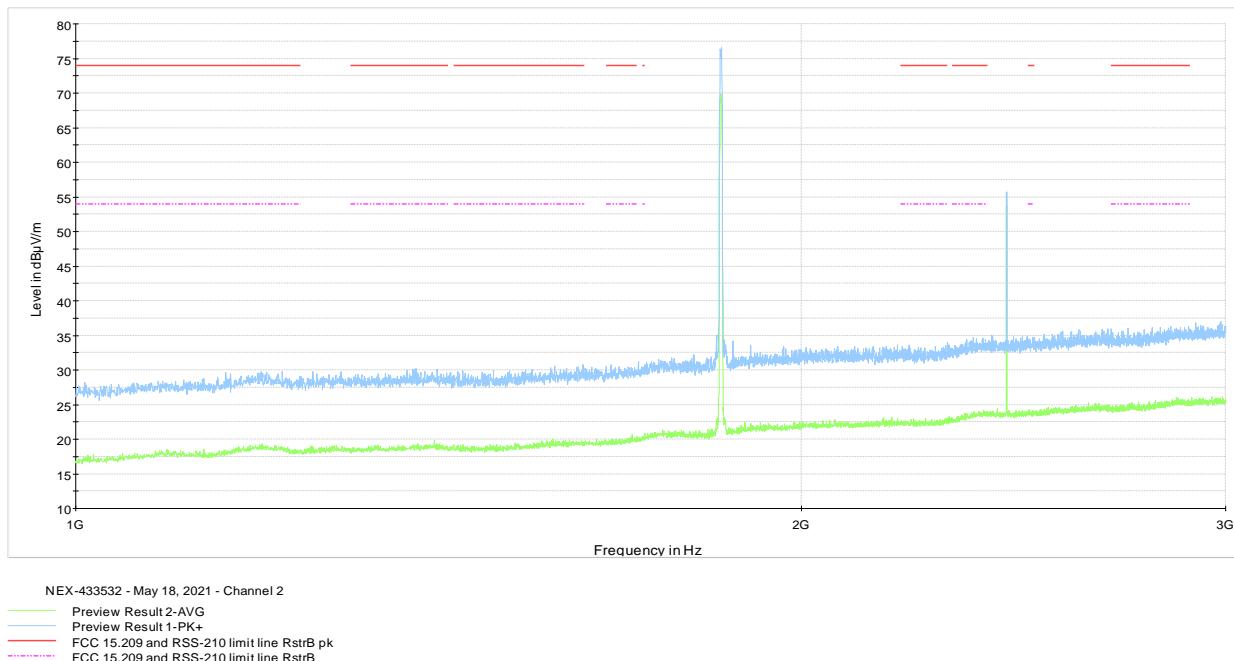


Figure 8.1-9: Radiated spurious emissions for 1 GHz to 3 GHz for Tx @ BLE (Mid channel, frequency 2438 MHz) and LTE (frequency 1850 MHz)

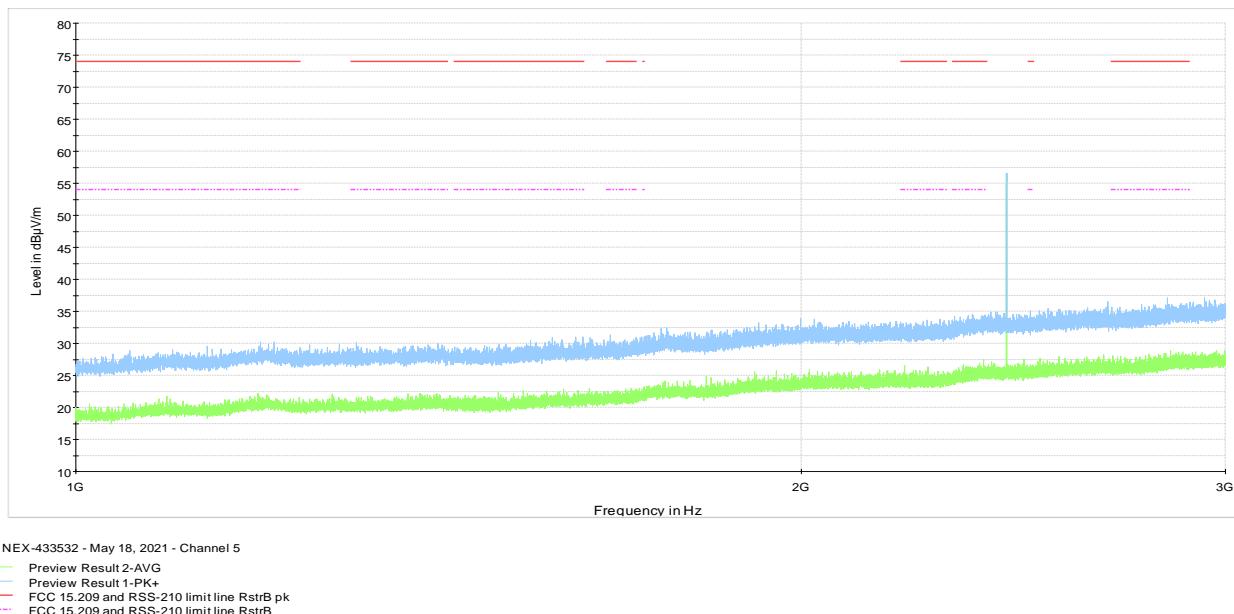


Figure 8.1-10: Radiated spurious emissions for 1 GHz to 3 GHz for Tx @ BLE (Mid channel, frequency 2438 MHz) and LTE (frequency 849 MHz)

Test data, continued

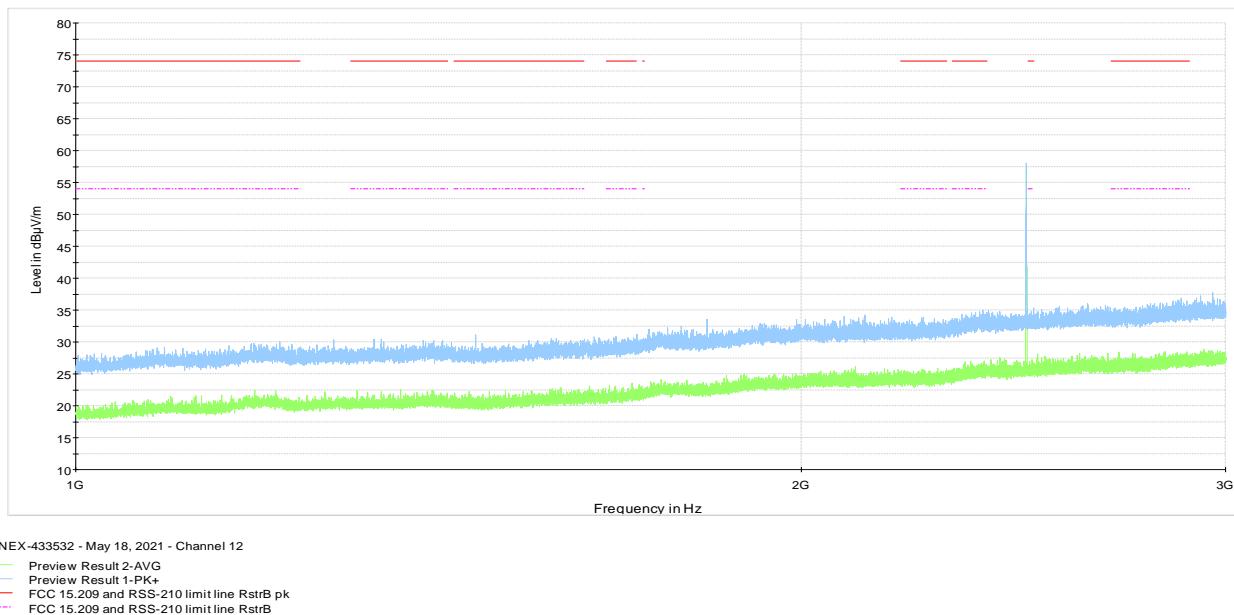


Figure 8.1-11: Radiated spurious emissions for 1 GHz to 3 GHz for Tx @ BLE (High channel, frequency 2480 MHz) and LTE (frequency 716 MHz)

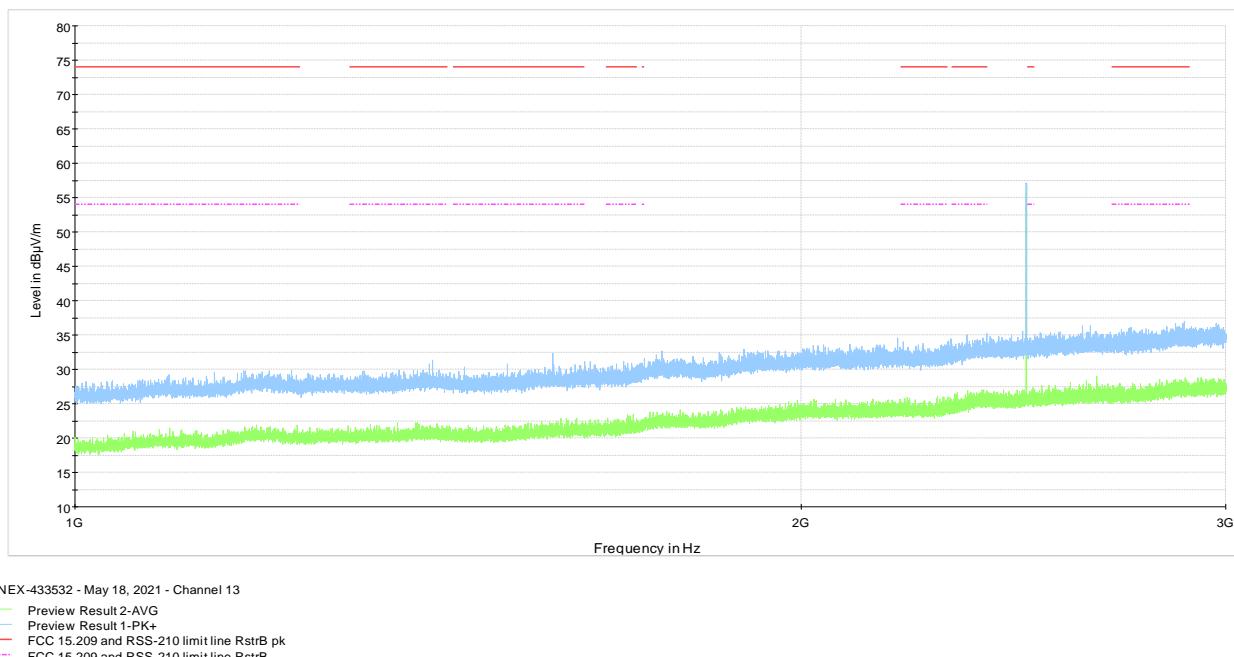


Figure 8.1-12: Radiated spurious emissions for 1 GHz to 3 GHz for Tx @ BLE (High channel, frequency 2480 MHz) and LTE (frequency 787 MHz)

Test data, continued

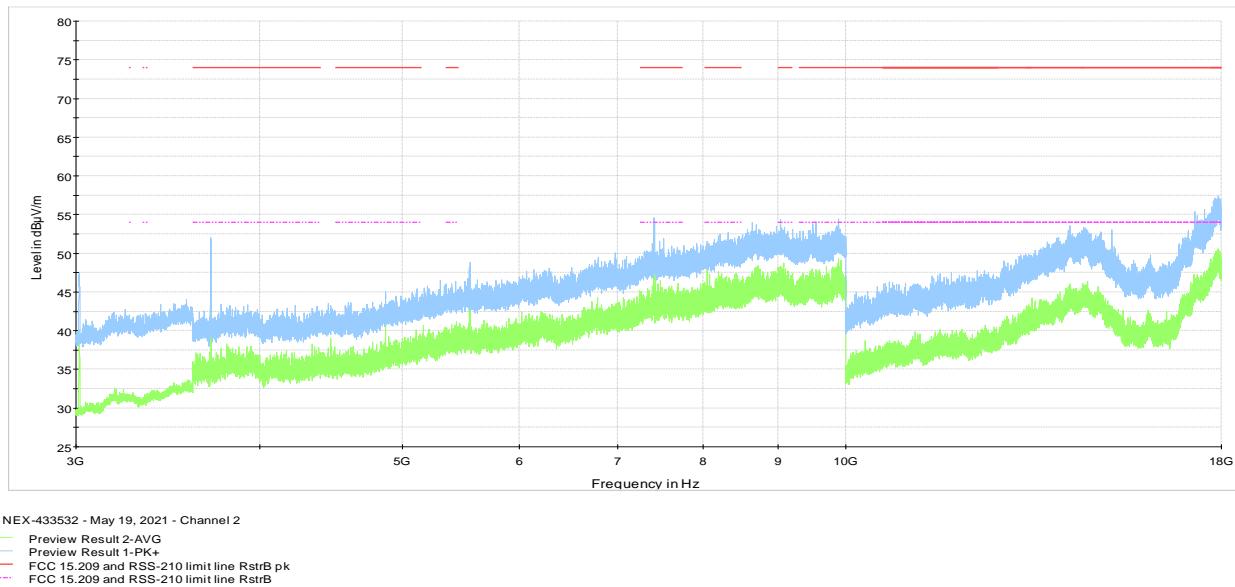


Figure 8.1-13: Radiated spurious emissions for 3 GHz to 18 GHz for Tx @ BLE (Mid channel, frequency 2438 MHz) and LTE (frequency 1850 MHz)


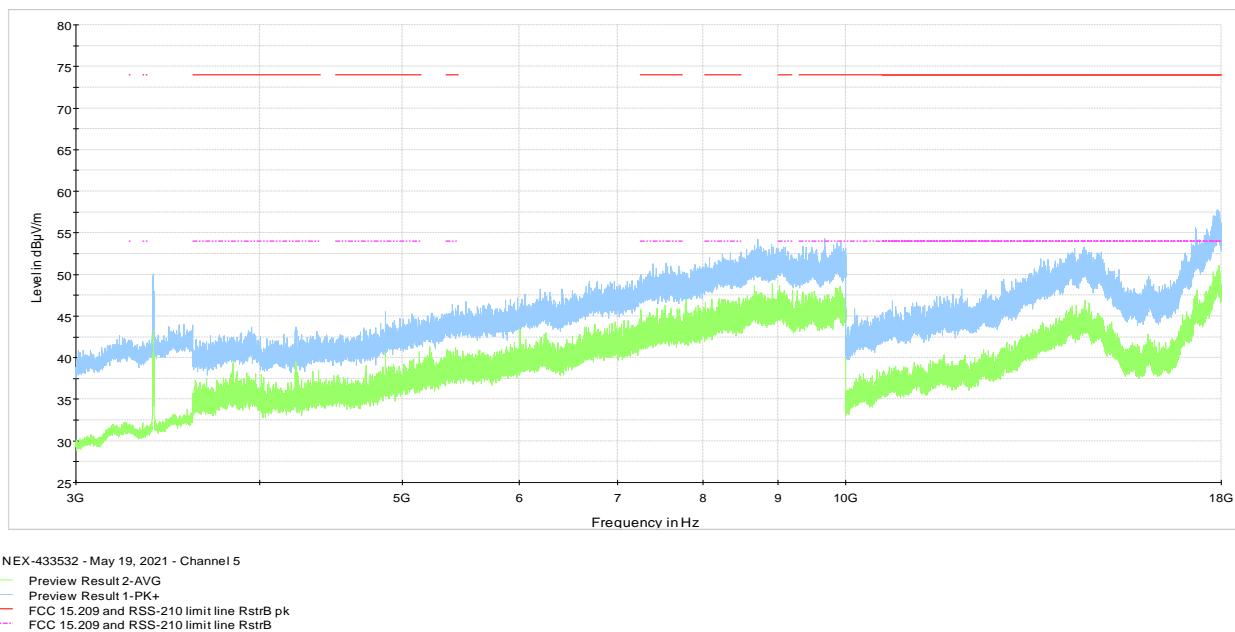


Figure 8.1-14: Radiated spurious emissions for 3 GHz to 18 GHz for Tx @ BLE (Mid channel, frequency 2438 MHz) and LTE (frequency 849 MHz)


Test data, continued

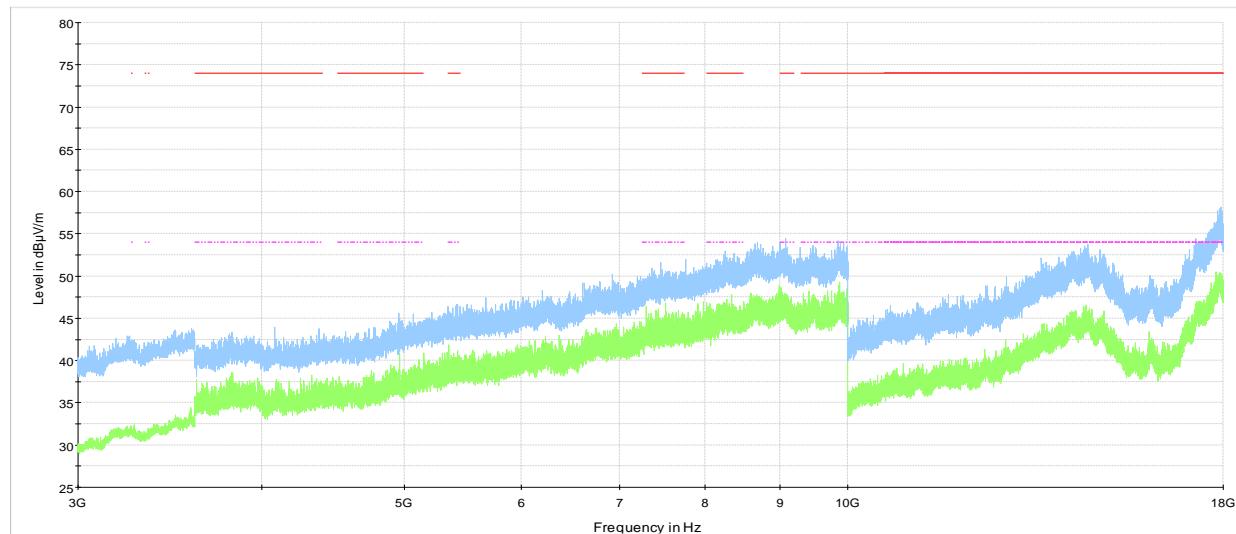

NEX-433532 - May 20, 2021 - Channel 12

— Preview Result 2-AVG
— Preview Result 1-PK+
— FCC 15.209 and RSS-210 limit line RstrB pk
— FCC 15.209 and RSS-210 limit line RstrB

Figure 8.1-15: Radiated spurious emissions for 3 GHz to 18 GHz for Tx @ BLE (High channel, frequency 2480 MHz) and LTE (frequency 716 MHz)

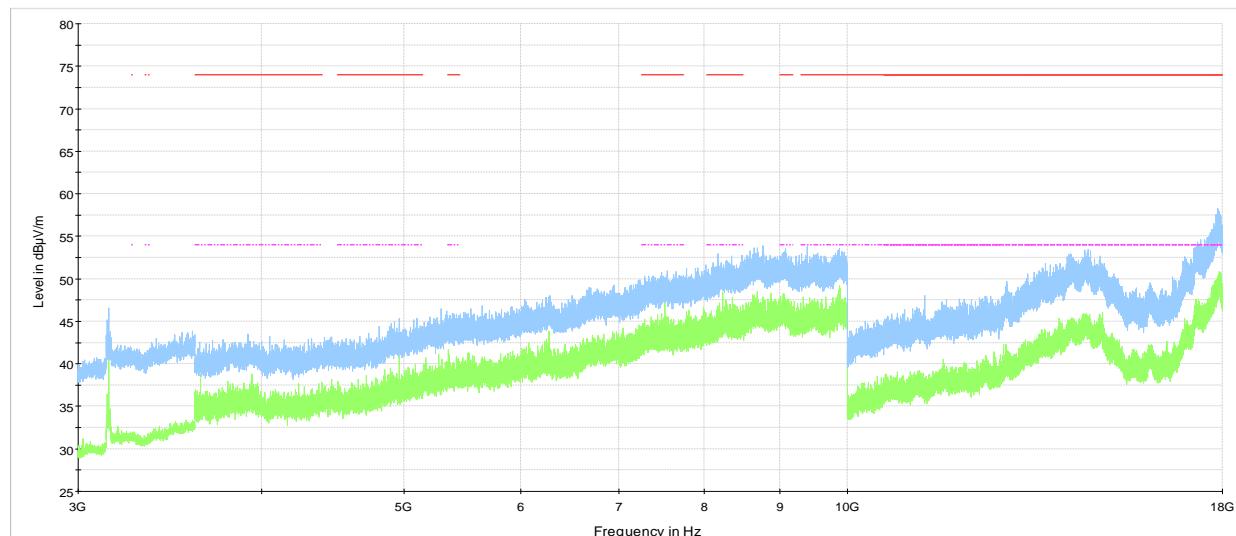

NEX-433532 - May 20, 2021 - Channel 13

— Preview Result 2-AVG
— Preview Result 1-PK+
— FCC 15.209 and RSS-210 limit line RstrB pk
— FCC 15.209 and RSS-210 limit line RstrB

Figure 8.1-16: Radiated spurious emissions for 3 GHz to 18 GHz for Tx @ BLE (High channel, frequency 2480 MHz) and LTE (frequency 787 MHz)

Test data, continued

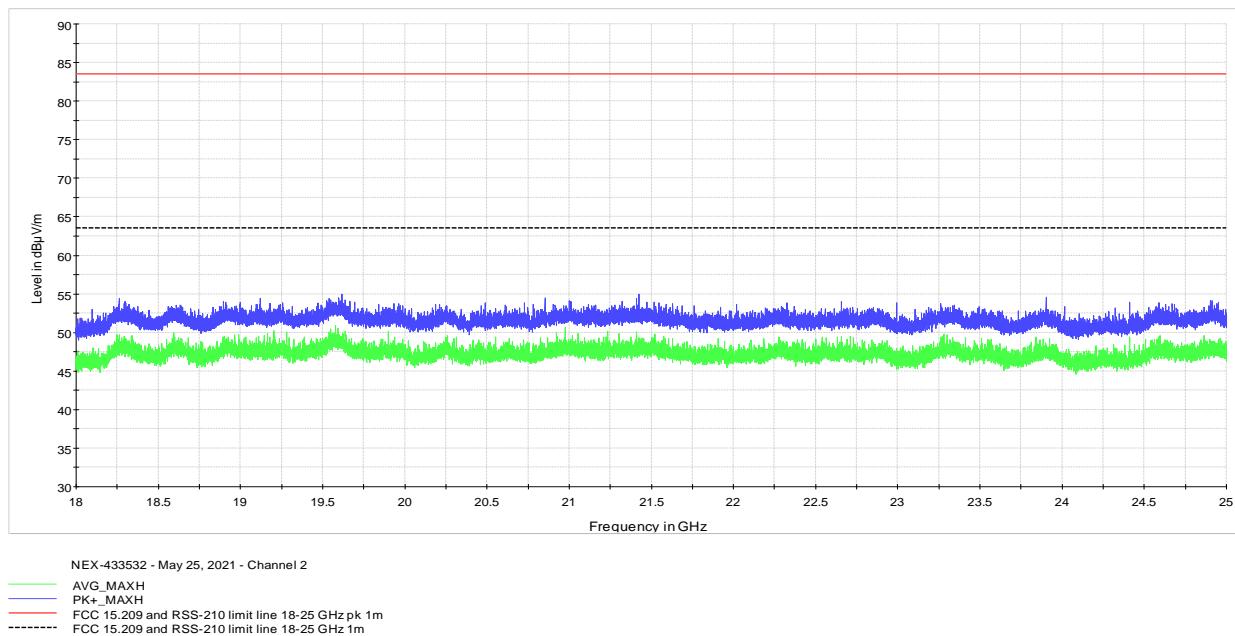


Figure 8.1-17: Radiated spurious emissions for 18 GHz to 25 GHz for Tx @ BLE (Mid channel, frequency 2438 MHz) and LTE (frequency 1850 MHz)

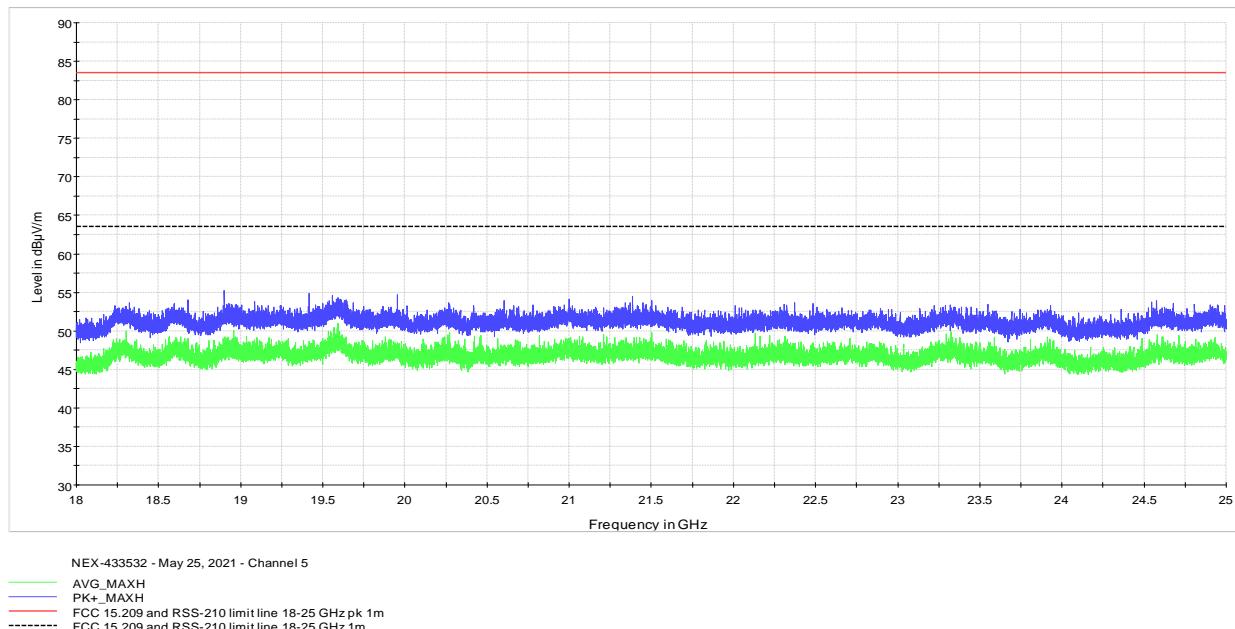


Figure 8.1-18: Radiated spurious emissions for 18 GHz to 25 GHz for Tx @ BLE (Mid channel, frequency 2438 MHz) and LTE (frequency 849 MHz)

Test data, continued

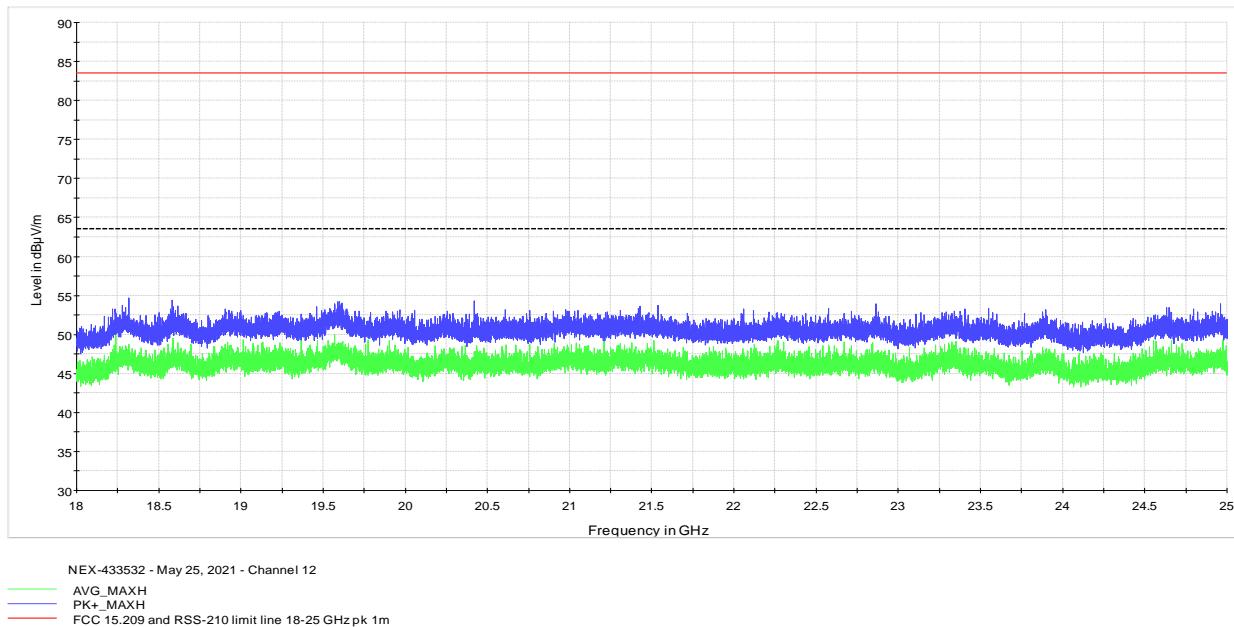


Figure 8.1-19: Radiated spurious emissions for 18 GHz to 25 GHz for Tx @ BLE (High channel, frequency 2480 MHz) and LTE (frequency 716 MHz)

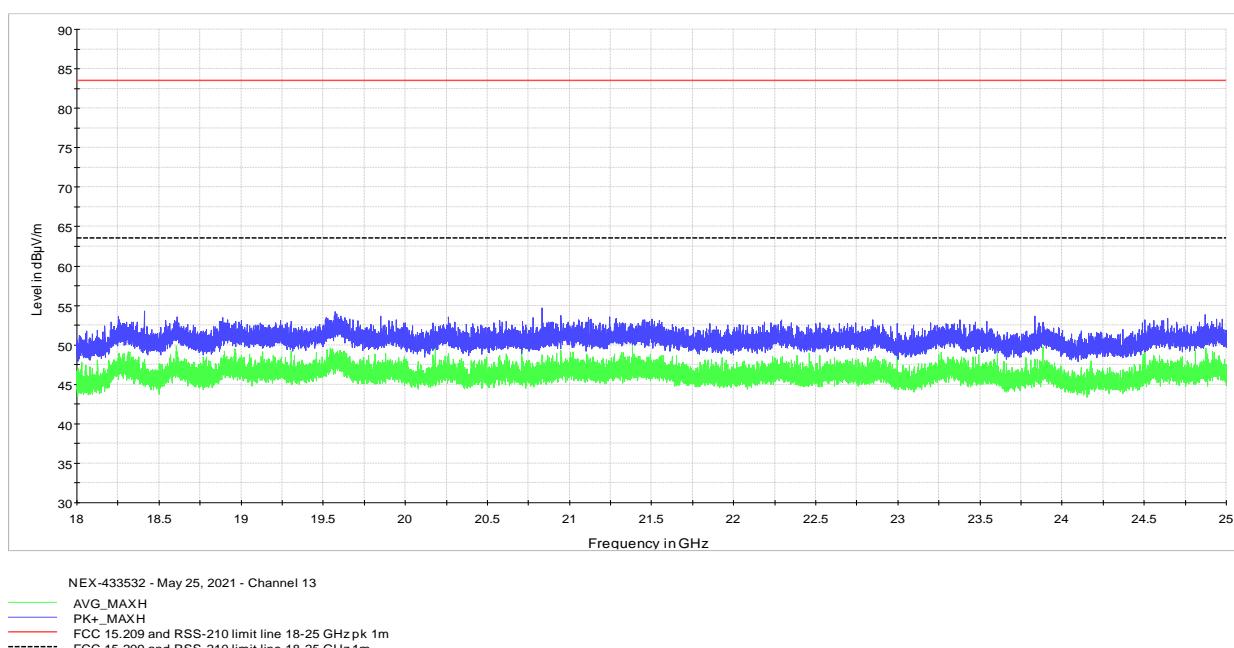


Figure 8.1-20: Radiated spurious emissions for 18 GHz to 25 GHz for Tx @ BLE (High channel, frequency 2480 MHz) and LTE (frequency 787 MHz)

Section 9 EUT photos

9.1 External photos



Figure 9.1-1: Front view photo



Figure 9.1-2: Rear view photo



Figure 9.1-3: Side view photo



Figure 9.1-4: Side view photo



Figure 9.1-5: Top view photo



Figure 9.1-6: Bottom view photo



Figure 9.1-7: Label location



Figure 9.1-8: Label example

(End of the test report)