



Part 15B

TEST REPORT

Product Name	WCDMA/GSM Dual band mobile phone
Model Name	W716S
Brand Name	Haier
FCC ID	SG71408W716S
Applicant	Haier Telecom (Qingdao) Co., Ltd.
Manufacturer	Haier Telecom (Qingdao) Co., Ltd.
Date of issue	August 22, 2014

TA Technology (Shanghai) Co., Ltd.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RXA1407-0191EMC01R1

Page 2 of 22

GENERAL SUMMARY

Reference Standard(s)	FCC Code CFR47 Part15B (2013) Radio frequency device. ANSI C63.4 (2009) Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9 KHz to 40GHz.
Conclusion	This portable wireless equipment has been measured in all cases requested by the relevant standards. Test results in Chapter 2 of this test report are below limits specified in the relevant standards. General Judgment : Pass
Comment	The test result only responds to the measured sample.

Approved by Weizhong Yang

Weizhong Yang
Director

Revised by Guangchang Fan

Guangchang Fan
EMC Manager

Performed by Jiangpeng Lan

Jiangpeng Lan
EMC Engineer

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RXA1407-0191EMC01R1

Page 3 of 22

TABLE OF CONTENT

1. General Information	4
1.1. Notes of the test report	4
1.2. Testing laboratory	5
1.3. Applicant Information	5
1.4. Manufacturer Information	5
1.5. Information of EUT	6
1.6. Test Date	7
2. Test Information	8
2.1. Summary of test results	8
2.2. Radiated Emission	9
2.3. Conducted Emission	15
3. Main Test Instruments	18
ANNEX A: The EUT Appearance and Test Setup	19
A.1 EUT Appearance	19
A.2 Test Setup	21

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1407-0191EMC01R1

Page 4 of 22

1. General Information

1.1. Notes of the test report

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L2264.

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 428261.

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 8510A.

TA Technology (Shanghai) Co., Ltd. guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at TA Technology (Shanghai) Co., Ltd. at the time of execution of the test.

TA Technology (Shanghai) Co., Ltd. is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test. The sample under test was selected by the Client. This report only refers to the item that has undergone the test.

This report alone does not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities. This report can not be used partially or in full for publicity and/or promotional purposes without previous written approval of **TA Technology (Shanghai) Co., Ltd.** and the Accreditation Bodies, if it applies.

If the electronic report is inconsistent with the printed one, it should be subject to the latter.

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1407-0191EMC01R1

Page 5 of 22

1.2. Testing laboratory

Company: TA Technology (Shanghai) Co., Ltd.

Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong

City: Shanghai

Post code: 201201

Country: P. R. China

Contact: Yang Weizhong

Telephone: +86-021-50791141/2/3

Fax: +86-021-50791141/2/3-8000

Website: <http://www.ta-shanghai.com>

E-mail: yangweizhong@ta-shanghai.com

1.3. Applicant Information

Company: Haier Telecom (Qingdao) Co., Ltd.

Address: No1. Haier Road , Hi-tech Zone
Qingdao
P.R. China
266101

1.4. Manufacturer Information

Company: Haier Telecom (Qingdao) Co., Ltd.

Address: No1. Haier Road , Hi-tech Zone
Qingdao
P.R. China
266101

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1407-0191EMC01R1

Page 6 of 22

1.5. Information of EUT

General information

Product IMEI:	862259021475719	
Hardware Version:	H01	
Software Version:	HW-W716S-H01-S001-VE	
Antenna Type:	Internal Antenna	
Test Mode:	USB Mode	
Used Host Product:	Name	Model
	Notebook PC	Lenovo X61
	Adaptor	45N0119

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1407-0191EMC01R1

Page 7 of 22

Auxiliary equipment details

Name	Model	Manufacturer	Capacity	S/N
Battery	H11277	Zhongshan TIANMAO Battery Co.,Ltd	1400mAh	EB094300000E0000315T

Name	Model	Manufacturer	S/N
Earphone 1	MY-M6295	ZheJiang MEEYON technology Co.,Ltd	/
Earphone 2	PY-1353001-01KB42	HETONG	/

1.6. Test Date

The test is performed from August 10, 2014 to August 12, 2014.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RXA1407-0191EMC01R1

Page 8 of 22

2. Test Information

2.1. Summary of test results

Number	Test Case	Clause in FCC Rules	conclusion
1	Radiated Emission	15.109, ANSI C63.4-2009	PASS
2	Conducted Emission	15.107, ANSI C63.4-2009	PASS

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1407-0191EMC01R1

Page 9 of 22

2.2. Radiated Emission

Ambient condition

Temperature	Relative humidity	Pressure
24°C~26°C	45%~50%	102.5kPa

Methods of Measurement

The EUT is placed on a non-metallic table 0.8m above the horizontal metal reference ground plane. The distance between EUT and receive antenna should be 3 meters. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2009. Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier. During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated signal level. During the test, EUT is connected to a laptop via a USB cable in the case of USB mode. The EUT is used as the peripheral equipment of the PC. The model of laptop is Lenovo X61 and the serial number of laptop is L3-D1224

The data is transferred from EUT to PC; PC is connected to server via a long LAN cable.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. During the test, the EUT is worked at maximum output power.

Set the spectrum analyzer in the following:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO


TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1407-0191EMC01R1


Page 10 of 22

Test Setup

Below 1GHz

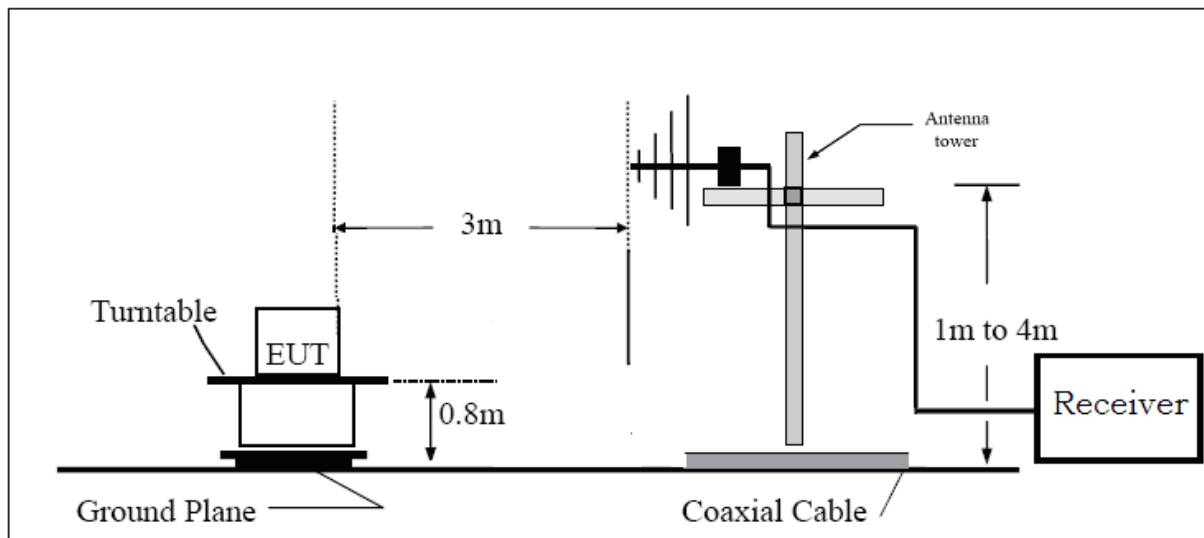

Above 1GHz

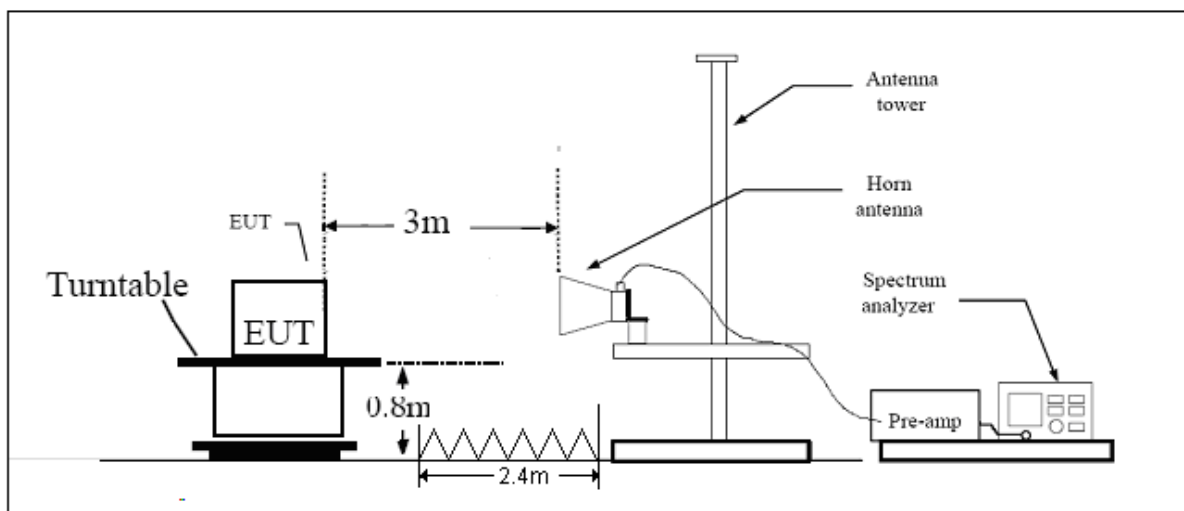

Note: Area side: 2.4mX3.6m

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1407-0191EMC01R1

Page 11 of 22

Limits

Frequency (MHz)	Field Strength (dB μ V/m)	Detector
30 -88	40.0	Quasi-peak
88-216	43.5	Quasi-peak
216 – 960	46.0	Quasi-peak
960-1000	54.0	Quasi-peak
1000-5 th harmonic of the highest frequency or 40GHz, which is lower	54 74	Average Peak

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$. $U = 3.92$ dB.

TA Technology (Shanghai) Co., Ltd.


Test Report

Report No.: RXA1407-0191EMC01R1

Page 12 of 22

Test Results

USB Mode

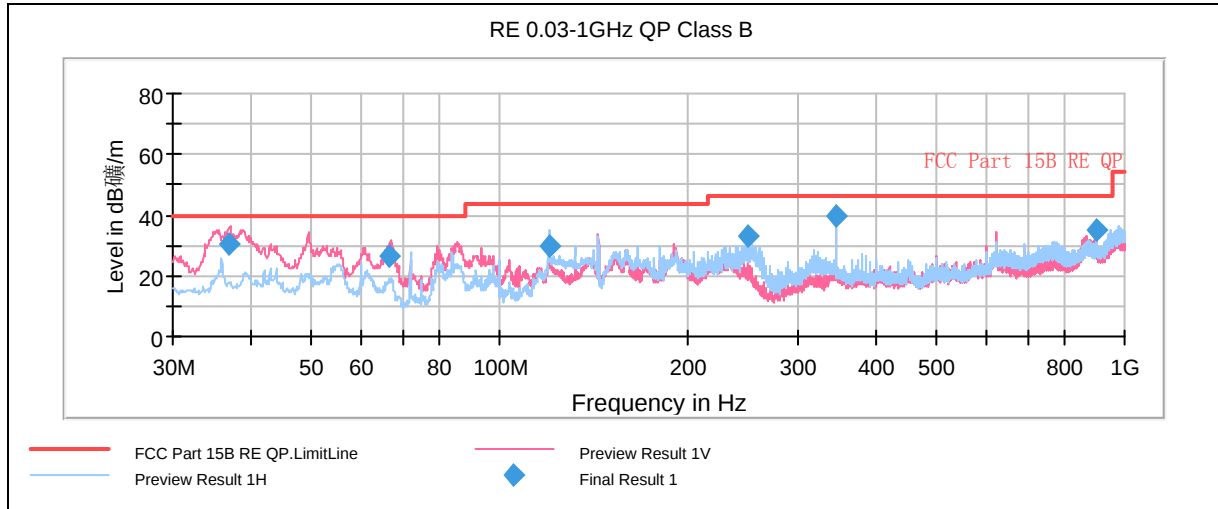

Note: This graph displays the maximum values of horizontal and vertical by software.

Radiated Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBμV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBμV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBμV/m)
36.872500	30.7	123.0	V	126.0	53.3	-22.6	9.3	40.0
66.740000	26.4	201.0	V	94.0	54.6	-28.2	13.6	40.0
120.007500	29.7	297.0	H	0.0	58.7	-29.0	13.8	43.5
249.987500	32.9	101.0	H	97.0	59.4	-26.5	13.1	46.0
345.007500	39.4	127.0	V	109.0	63.9	-24.5	6.6	46.0
900.010000	34.9	126.0	H	105.0	49.6	-14.7	11.1	46.0

Remark: 1. Quasi-Peak = Reading value + Correction factor

2. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)


3. Margin = Limit – Quasi-Peak

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1407-0191EMC01R1

Page 13 of 22

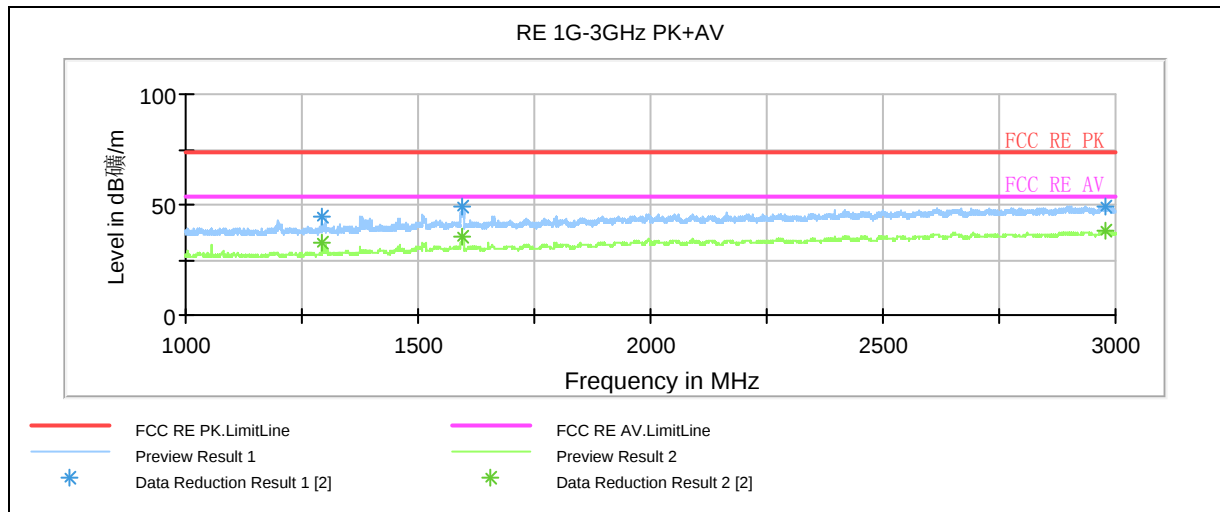

Note: Blue trace uses the peak detection Green trace uses the average detection
This graph displays the maximum values of horizontal and vertical by software.

Radiated Emission from 1GHz to 3GHz

Frequency (MHz)	Peak (dBuV/m)	Reading value (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1294.750000	44.6	53.8	100.0	V	156.0	-9.2	29.4	74
1593.250000	48.7	55.4	200.0	V	112.0	-6.7	25.3	74
2979.000000	49.5	48.2	100.0	V	349.0	1.3	24.5	74


Frequency (MHz)	Average (dBuV/m)	Reading value (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1294.750000	32.6	41.8	100.0	V	156.0	-9.2	21.4	54
1596.000000	35.7	42.4	200.0	V	97.0	-6.7	18.3	54
2977.500000	38.3	37.0	100.0	H	156.0	1.3	15.7	54

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1407-0191EMC01R1

Page 14 of 22

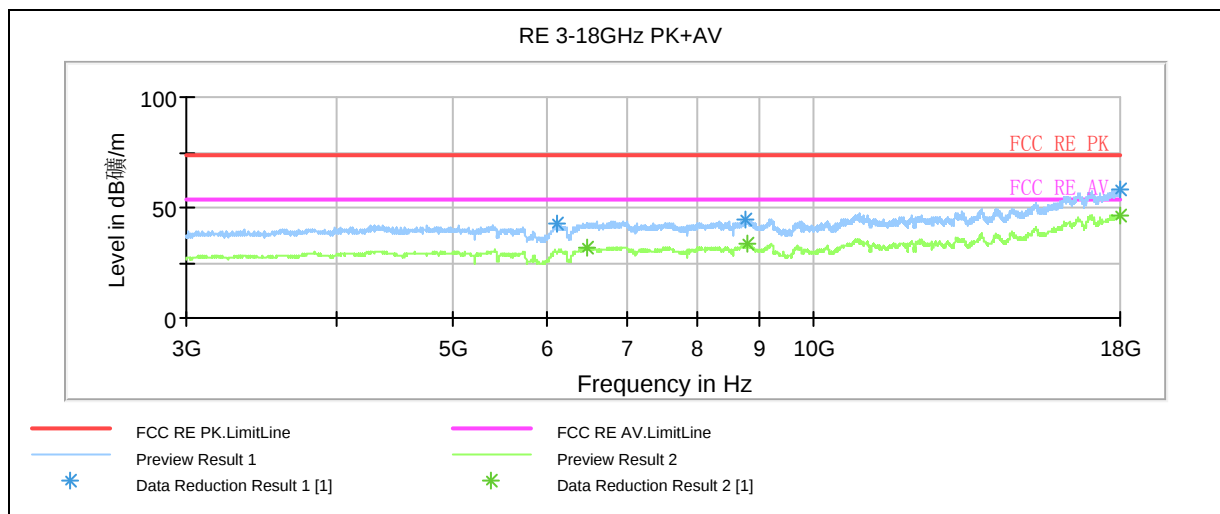

Note: Blue trace uses the peak detection Green trace uses the average detection
This graph displays the maximum values of horizontal and vertical by software.

Radiated Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dB μ V/m)	Reading value (dB μ V/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dB μ V/m)
6105.000000	42.4	38.7	200.0	H	0.0	3.7	31.6	74
8775.000000	44.9	36.8	200.0	H	0.0	8.1	29.1	74
17985.000000	58.6	35.2	200.0	H	0.0	23.4	15.4	74

Frequency (MHz)	Average (dB μ V/m)	Reading value (dB μ V/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dB μ V/m)
6461.250000	31.8	27.1	200.0	V	160.0	4.7	22.2	54
8788.125000	33.2	25.1	100.0	H	93.0	8.1	20.8	54
17994.375000	46.7	23.2	200.0	H	316.0	23.5	7.3	54

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1407-0191EMC01R1

Page 15 of 22

2.3. Conducted Emission


Ambient condition

Temperature	Relative humidity	Pressure
24°C ~26°C	50%~55%	102.5kPa

Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2009. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line. During the test, EUT is connected to a laptop via a USB cable in the case of USB mode. The EUT is used as the peripheral equipment of the PC. The model of laptop is Lenovo X61 and the serial number of laptop is L3-D1224

Test Setup

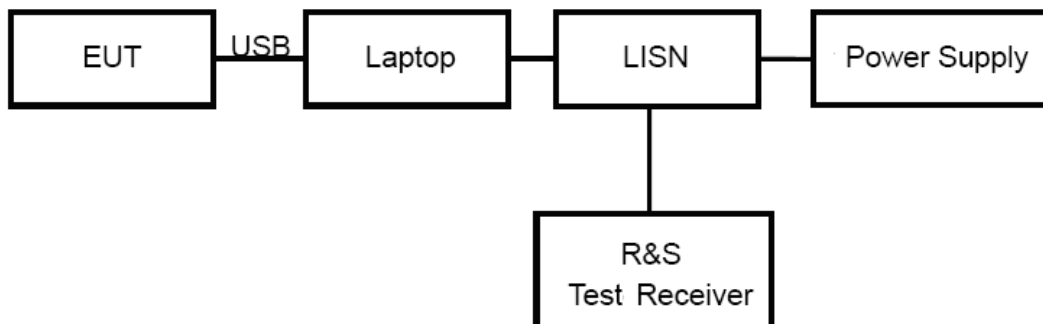

Note: Power Supply is AC Power source and it is used to change the voltage from 230V/50Hz to 120V/60Hz.

Limits

Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50
*: Decreases with the logarithm of the frequency.		

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$. $U = 2.69$ dB.

TA Technology (Shanghai) Co., Ltd.


Test Report

Report No.: RXA1407-0191EMC01R1

Page 16 of 22

Test Results

USB Mode

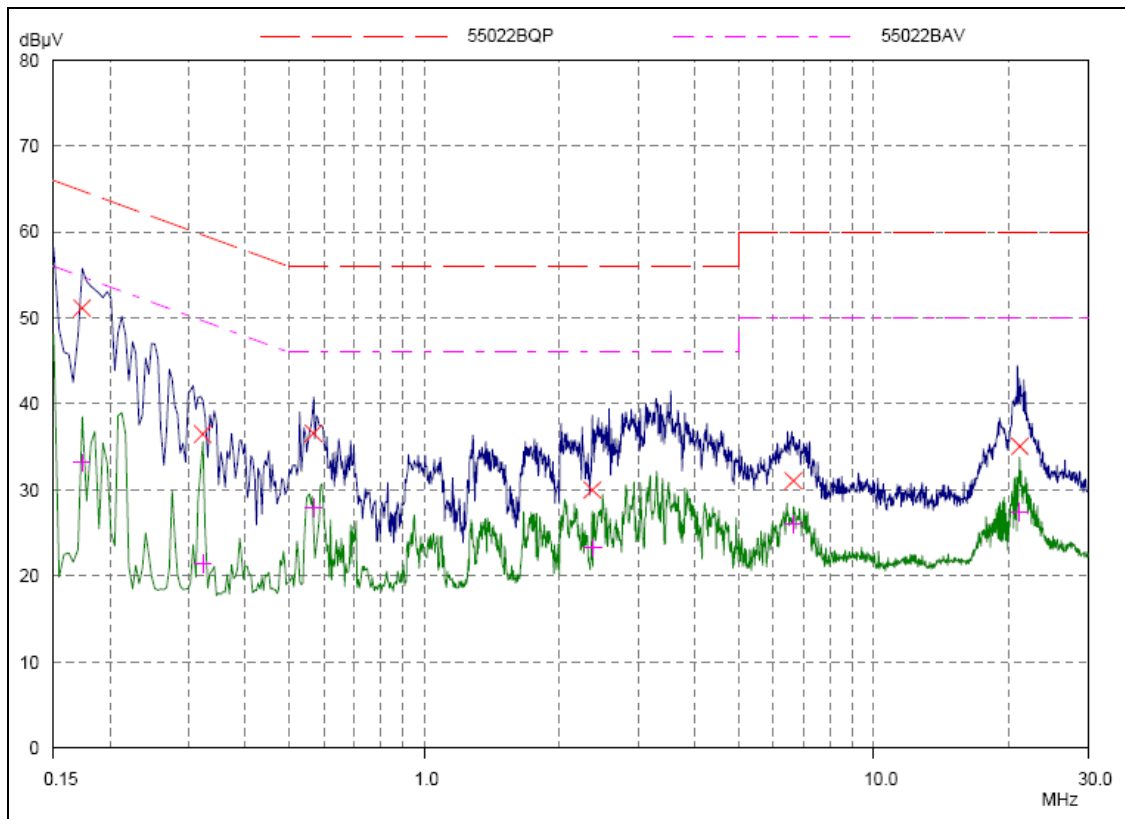

Note: Blue trace uses the peak detection Green trace uses the average detection

L line


Conducted Emission from 150 KHz to 30 MHz

Final Measurement Results				
Frequency MHz	QP Level dBμV	QP Limit dBμV	QP Delta dB	Phase -
0.17343	51.12	64.79	13.67	L1
0.32187	36.48	59.66	23.18	L1
0.56796	36.56	56.00	19.44	L1
2.36875	29.97	56.00	26.03	L1
6.63437	31.07	60.00	28.93	L1
21.13046	35.09	60.00	24.91	L1
Frequency MHz	AV Level dBμV	AV Limit dBμV	AV Delta dB	Phase -
0.17343	33.20	54.79	21.59	L1
0.32187	21.46	49.66	28.20	L1
0.56796	27.93	46.00	18.07	L1
2.36875	23.25	46.00	22.75	L1
6.63437	26.00	50.00	24.00	L1
21.13046	27.43	50.00	22.57	L1

TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1407-0191EMC01R1

Page 17 of 22

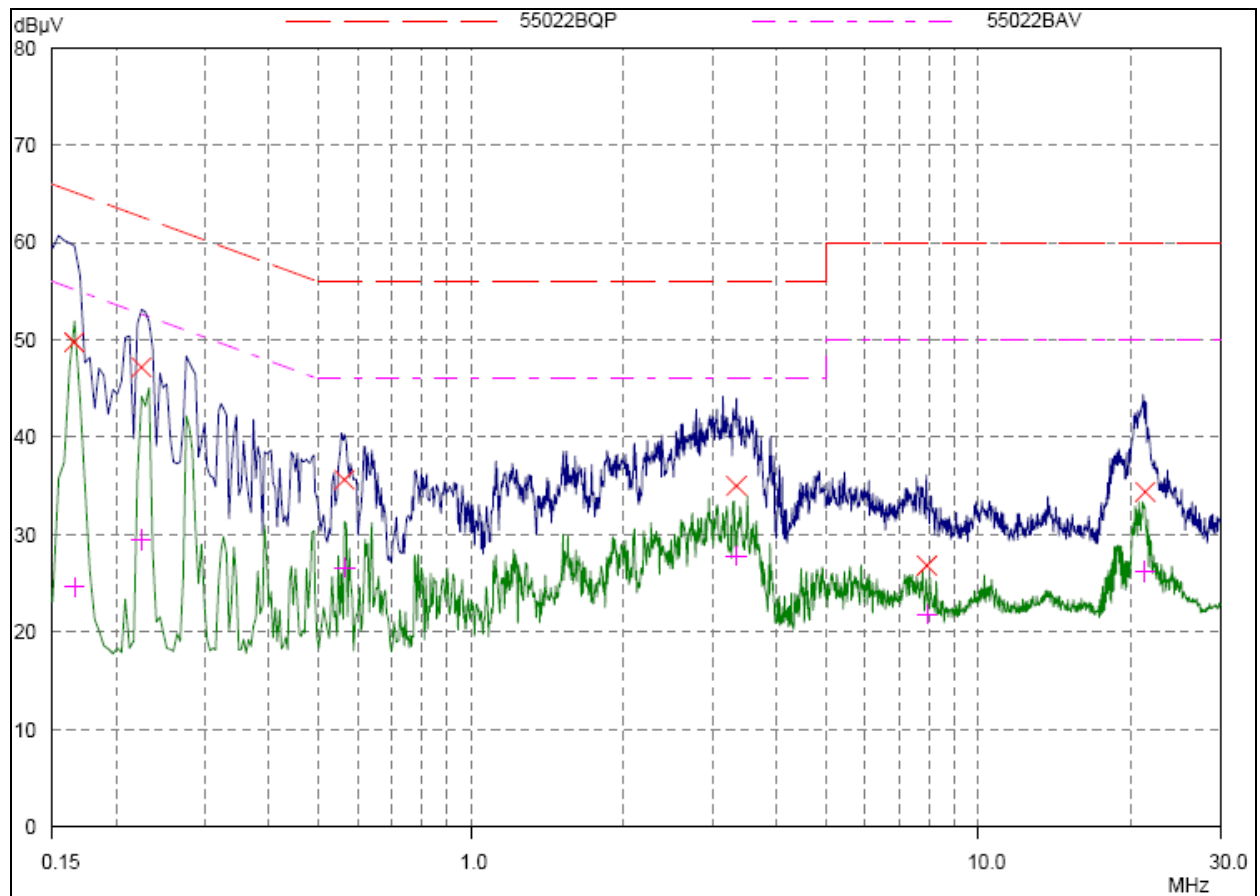

Note: Blue trace uses the peak detection Green trace uses the average detection
N line

Conducted Emission from 150 KHz to 30 MHz

Final Measurement Results				
Frequency MHz	QP Level dBμV	QP Limit dBμV	QP Delta dB	Phase -
0.16562	49.78	65.18	15.40	N
0.22421	47.16	62.66	15.50	N
0.56406	35.66	56.00	20.34	N
3.33359	35.01	56.00	20.99	N
7.92343	26.82	60.00	33.18	N
21.32187	34.37	60.00	25.63	N
Frequency MHz	AV Level dBμV	AV Limit dBμV	AV Delta dB	Phase -
0.16562	24.62	55.18	30.56	N
0.22421	29.49	52.66	23.17	N
0.56406	26.63	46.00	19.37	N
3.33359	27.83	46.00	18.17	N
7.92343	21.82	50.00	28.18	N
21.32187	26.19	50.00	23.81	N

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RXA1407-0191EMC01R1

Page 18 of 22

3. Main Test Instruments

No.	Name	Type	Manufacturer	Serial Number	Calibration Date	Valid Period
01	EMI Test Receiver	ESCI	R&S	100948	2014-06-28	One year
02	Trilog Antenna	VULB 9163	SCHWARZB ECK	9163-201	2014-06-18	Three years
03	Signal Analyzer	FSV30	R&S	100815	2014-06-28	One year
04	Horn Antenna	HF907	R&S	100126	2012-07-01	Three years
05	Horn Antenna	3160-09	ETS-Lindgren	00102643	2012-07-01	Three years
06	EMI Test Receiver	ESCS30	R&S	100138	2014-01-14	One year
07	LISN	ENV216	R&S	101171	2014-04-12	One year

*******END OF REPORT *******

TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1407-0191EMC01R1

Page 19 of 22

ANNEX A: The EUT Appearance and Test Setup

A.1 EUT Appearance



a: EUT



b: Battery

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RXA1407-0191EMC01R1

Page 20 of 22




c: Adapter
Picture 1 EUT

TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1407-0191EMC01R1

Page 21 of 22

A.2 Test Setup

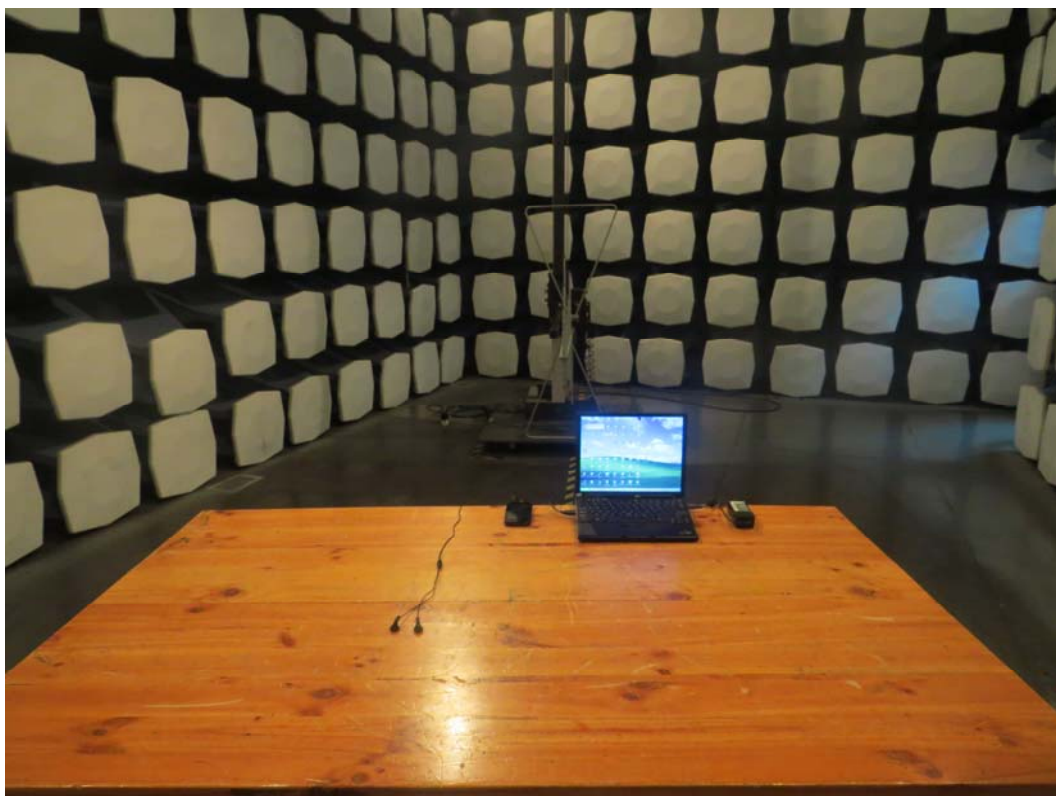

a: Below 1GHz



b: Above 1GHz


Picture 2 Radiated Emission Test Setup

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RXA1407-0191EMC01R1

Page 22 of 22

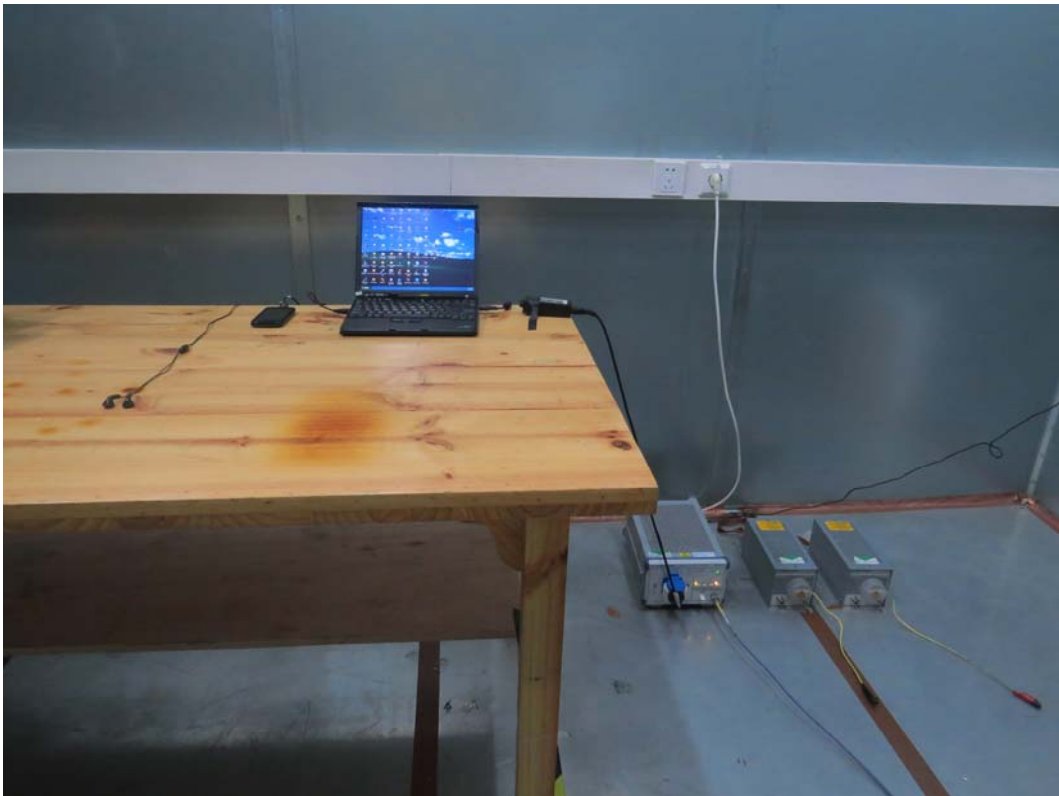

Picture 3 Conducted Emission Test Setup