



REPORT No. : SZ15010119S01

FCC SAR TEST REPORT

APPLICANT : Haier Telecom (Qingdao) Co., Ltd.

PRODUCT NAME : GSM digital mobile phone

MODEL NAME : Q330

TRADE NAME : Haier

BRAND NAME : Haier

FCC ID : SG720150128Q330

STANDARD(S) : 47CFR 2.1093
IEEE 1528-2013

ISSUE DATE : 2015-07-16



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555
Http://www.morlab.com

Fax: 86-755-36698525
E-mail: service@morlab.cn



DIRECTORY

TEST REPORT DECLARATION	4
1. TECHNICAL INFORMATION	5
1.1 IDENTIFICATION OF APPLICANT	5
1.2 IDENTIFICATION OF MANUFACTURER	5
1.3 EQUIPMENT UNDER TEST (EUT)	5
1.3.1 PHOTOGRAPHS OF THE EUT	5
1.3.2 IDENTIFICATION OF ALL USED EUT	6
1.4 APPLIED REFERENCE DOCUMENTS	6
1.5 DEVICE CATEGORY AND SAR LIMITS	6
2. SPECIFIC ABSORPTION RATE (SAR)	7
2.1 INTRODUCTION	7
2.2 SAR DEFINITION	7
3. SAR MEASUREMENT SETUP	8
3.1 THE MEASUREMENT SYSTEM	8
3.2 PROBE	8
3.3 PROBE CALIBRATION PROCESS	10
3.3.1 DOSIMETRIC ASSESSMENT PROCEDURE	10
3.3.2 FREE SPACE ASSESSMENT PROCEDURE	10
3.3.3 TEMPERATURE ASSESSMENT PROCEDURE	10
3.4 PHANTOM	11
3.5 DEVICE HOLDER	11
4. TISSUE SIMULATING LIQUIDS	12
5. UNCERTAINTY ASSESSMENT	14
5.1 UNCERTAINTY EVALUATION FOR EUT SAR TEST	14
5.2 UNCERTAINTY FOR SYSTEM PERFORMANCE CHECK	15



6. SAR MEASUREMENT EVALUATION	17
6.1 SYSTEM SETUP	17
6.2 VALIDATION RESULTS.....	18
7. OPERATIONAL CONDITIONS DURING TEST	19
7.1 INFORMATION ON THE TESTING	19
7.2 BODY-WORN CONFIGURATIONS	20
7.3 MEASUREMENT PROCEDURE	20
7.4 DESCRIPTION OF INTERPOLATION/EXTRAPOLATION SCHEME	21
8. MEASUREMENT OF CONDUCTED OUTPUT POWER.....	22
9. TEST RESULTS LIST	24
10. REPEATED SAR MEASUREMENT	27
11. MULTIPLE TRANSMITTERS EVALUATION	28
ANNEX A GRAPH TEST RESULTS	30
ANNEX B GENERAL INFORMATION	92

Change History		
Issue	Date	Reason for change
1.0	2015-07-16	First edition



REPORT No. : SZ15010119S01

TEST REPORT DECLARATION

Applicant	Haier Telecom (Qingdao) Co., Ltd.		
Applicant Address	No1. Haier Road , Hi-tech Zone, Qingdao, Shangdong		
Manufacturer	Haier Telecom CO., Ltd		
Manufacturer Address	Haier Information Park,Laoshan District, Qingdao China		
Product Name	GSM digital mobile phone		
Model Name	Q330		
Brand Name	Haier		
HW Version	2201M-V0.1		
SW Version	UT_2201_UTIME_F09_61D_11C_32M_V0.2		
Test Standards	47CFR 2.1093; IEEE 1528-2013		
Test Date	2015-02-03		
The Highest Reported 1g-SAR(W/kg)	Head	1.311W/kg	Limit(W/kg): 1.6W/kg
	Body	1.310W/kg	
	Simultaneous	1.437W/kg	

Tested by : Liu Jun
Liu Jun

Reviewed by : Zhu Zhan
Zhu Zhan

Approved by : Zeng Dexin
Zeng Dexin



1. TECHNICAL INFORMATION

Note: the Following data is based on the information by the applicant.

1.1 Identification of Applicant

Company Name:	Haier Telecom (Qingdao) Co., Ltd.
Address:	No1. Haier Road , Hi-tech Zone, Qingdao, Shangdong

1.2 Identification of Manufacturer

Company Name:	Haier Telecom CO., Ltd
Address:	Haier Information Park, Laoshan District, Qingdao China

1.3 Equipment Under Test (EUT)

Model Name:	Q330
Trade Name:	Haier
Brand Name:	Haier
Hardware Version:	2201M-V0.1
Software Version:	UT_2201_UTIME_F09_61D_11C_32M_V0.2
Tx Frequency Bands:	GSM 850: 824-849MHz; GSM 1900: 1850-1910MHz; Bluetooth;
Uplink Modulations:	GSM/GPRS: GSMK; GPRS: GMSK/8PSK; Bluetooth: GFSK/ π /4-DQPSK/8-DPSK;
Multislot Class:	GPRS: Class 12; EGPRS: Class 12;
GPRS Class:	Class B
DTM:	Not support
Antenna type:	Fixed Internal Antenna
Development Stage:	Identical prototype
Hotspot function:	No

1.3.1 Photographs of the EUT

Please refer to the External Photos for the Photos of the EUT



1.3.2 Identification of all used EUT

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the Following two numerical characters indicate the software version of the test sample.

EUT Identity	Hardware Version	Software Version
1#	2201M-V0.1	UT_2201_UTIME_F09_61D_11C_32M_V0.2

1.4 Applied Reference Documents

Leading reference documents for testing:

No.	Identity	Document Title
1	47 CFR§2.1093	Radiofrequency Radiation Exposure Evaluation: Portable Devices
2	IEEE 1528-2013	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
3	KDB 447498 D01v05r02	General RF Exposure Guidance
4	KDB 941225 D03v01	SAR Test Reduction GSM GPRS EGPRS
5	KDB 865664 D01v01r02	SAR Measurement 100 MHz to 6 GHz
6	KDB 865664 D02v01r01	SAR Reporting
7	KDB 648474 D04v01r02	Handset SAR

1.5 Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.



2. SPECIFIC ABSORPTION RATE (SAR)

2.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are Middle than the limits for general population/uncontrolled.

2.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density. (p). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by,

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

Where C is the specific head capacity, δT is the temperature rise and δt the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where σ is the conductivity of the tissue, ρ is the mass density of the tissue and $|E|$ is the rms electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

3. SAR MEASUREMENT SETUP

3.1 The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the Following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The Following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.

3.2 Probe


For the measurements the Specific Dosimetric E-Field Probe SN 37/08 EP80 with Following specifications is used

- Dynamic range: 0.01-100 W/kg
- Tip Diameter: 6.5 mm

- Distance between probe tip and sensor center: 2.5mm
- Distance between sensor center and the inner phantom surface: 4 mm
(repeatability better than +/- 1mm)
- Probe linearity: <0.25 dB
- Axial Isotropy: <0.25 dB
- Spherical Isotropy: <0.25 dB
- Calibration range: 835to 2500MHz for head & body simulating liquid.

Angle between probe axis (evaluation axis) and surface normal line: less than 30°

Probe calibration is realized, in compliance with CENELEC EN 62209 and IEEE 1528 std, with CALISAR, Antennessa proprietary calibration system. The calibration is performed with the EN 622091 annex technique using reference guide at the five frequencies.

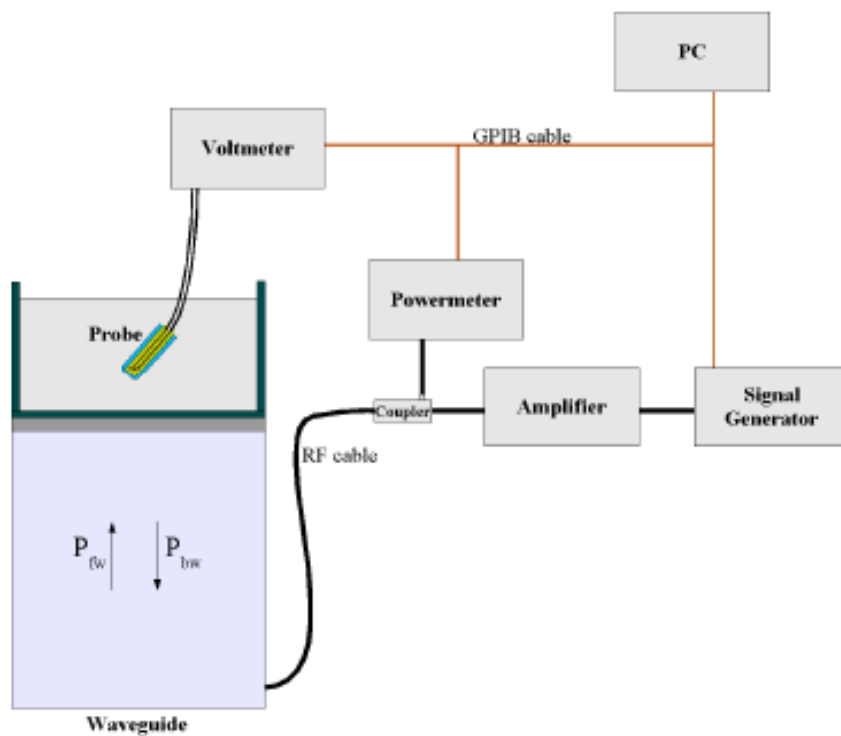

$$SAR = \frac{4(P_{fw} - P_{bw})}{ab\delta} \cos^2\left(\pi \frac{y}{a}\right) e^{-(2z/\delta)}$$

Where :

P_{fw} = Forward Power

P_{bw} = Backward Power

a and b = Waveguide dimensions

l = Skin depth



Keithley configuration:

Rate = Medium; Filter =ON; RDGS=10; FILTER TYPE =MOVING AVERAGE; RANGE AUTO

After each calibration, a SAR measurement is performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

The calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N)=SAR(N)/V_{lin}(N) \quad (N=1,2,3)$$

The linearised output voltage $V_{lin}(N)$ is obtained from the displayed output voltage $V(N)$ using

$$V_{lin}(N)=V(N)*(1+V(N)/DCP(N)) \quad (N=1,2,3)$$

Where DCP is the diode compression point in mV.

3.3 Probe Calibration Process

3.3.1 Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. SATIMO Probe calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm^2) using an with CALISAR, Antenna proprietary calibration system.

3.3.2 Free Space Assessment Procedure

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/cm^2 .

3.3.3 Temperature Assessment Procedure

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulating head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

Where:

δt = exposure time (30 seconds),



$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

C = heat capacity of tissue (brain or muscle),

δT = temperature increase due to RF exposure.

SAR is proportional to $\Delta T/\Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. The electric field in the simulated tissue can be used to estimate SAR by equating the thermally derived SAR to that with the E- field component.

Where:

$$SAR = \frac{\sigma |E|^2}{\rho}$$

σ = simulated tissue conductivity,


ρ = Tissue density (1.25 g/cm³ for brain tissue)

3.4 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

3.5 Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is Middle than 1°.

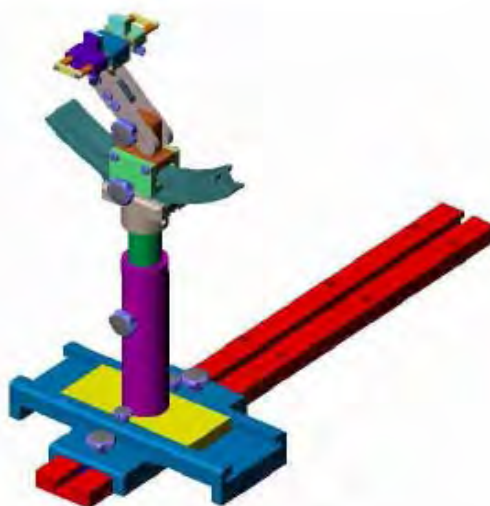

Device holder

System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005



4. TISSUE SIMULATING LIQUIDS

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in below table.

The following table gives the recipes for tissue simulating liquids

Frequency Band (MHz)	835.00		1900.00	
Tissue Type	Head	Body	Head	Body
Ingredients (% by weight)				
Deionised Water	50.36	50.20	54.90	40.40
Salt(NaCl)	1.25	0.90	0.18	0.50
Sugar	0.00	48.50	0.00	58.00
Tween 20	48.39	0.00	0.00	0.00
HEC	0.00	0.20	0.00	1.00
Bactericide	0.00	0.20	0.00	0.10
Triton X-100	0.00	0.00	0.00	0.00
DGBE	0.00	0.00	44.92.	0.00
Diethylenglycol monohexylether	0.00	0.00	0.00	0.00
Measured dielectric parameters				
Dielectric Constant	41.50	56.10	39.90	53.30
Conductivity (S/m)	0.90	0.95	1.42	1.52

Note: Please refer to the validation results for dielectric parameters of each frequency band.

The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using an Agilent 85033E Dielectric Probe Kit and an Agilent Network Analyzer.



Table 1: Dielectric Performance of Tissue Simulating Liquid

Temperature: 22.0~23.8°C, humidity: 54~60%.						
Date	Freq.(MHz)	Liquid Parameters	Meas.	Target	Delta(%)	Limit±(%)
2015-02-03	Head 835	Relative Permittivity(ϵ_r):	41.37	41.50	-0.31	5
		Conductivity(σ):	0.91	0.90	1.11	5
	Body 835	Relative Permittivity(ϵ_r):	56.12	56.10	0.04	5
		Conductivity(σ):	0.93	0.95	-2.11	5
2015-02-03	Head 1900	Relative Permittivity(ϵ_r):	39.87	39.90	-0.08	5
		Conductivity(σ):	1.43	1.42	0.70	5
	Body 1900	Relative Permittivity(ϵ_r):	53.31	53.30	0.02	5
		Conductivity(σ):	1.50	1.52	-1.32	5



5. UNCERTAINTY ASSESSMENT

The Following table includes the uncertainty table of the IEEE 1528. The values are determined by Antennessa.

5.1 UNCERTAINTY EVALUATION FOR EUT SAR TEST

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/ e	k
Uncertainty Component	Sec.	Tol (+-%)	Prob . Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
Measurement System									
Probe calibration	E.2.1	4.76	N	1	1	1	4.76	4.7	∞
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	0.7	0.7	1.01	1.0	∞
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	0.7	0.7	1.62	1.6	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.5	∞
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.8	∞
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.5	∞
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.0	∞
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.7	∞
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.1	∞
RF ambient Conditions	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.7	∞
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.1 5	∞
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.0 3	∞
Extrapolation, interpolation and integration Algoritms for Max. SAR Evaluation	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.8 9	∞
Test sample Related									
Test sample positioning	E.4.2. 1	0.03	N	1	1	1	0.03	0.0 3	N- 1
Device Holder Uncertainty	E.4.1.	5.00	N	1	1	1	5.00	5.0	N-



	1							0	1
Output power Power drift - SAR drift measurement	6.6.2	4.04	R	$\sqrt{3}$	1	1	2.33	2.3 3	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.0 3	∞
Liquid conductivity - deviation from target value	E.3.2	4.57	R	$\sqrt{3}$	0.64	0.43	1.69	1.1 3	∞
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	1	0.64	0.43	3.20	2.1 5	M
Liquid permittivity - deviation from target value	E.3.2	3.69	R	$\sqrt{3}$	0.6	0.49	1.28	1.0 4	∞
Liquid permittivity - measurement uncertainty	E.3.3	10.0 0	N	1	0.6	0.49	6.00	4.9 0	M
Combined Standard Uncertainty			RSS				11.55	10. 67	
Expanded Uncertainty (95% Confidence interval)			K=2				23.11	21. 33	

5.2 UNCERTAINTY FOR SYSTEM PERFORMANCE CHECK

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/ e	k
Uncertainty Component	Sec.	Tol (+-%)	Prob Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
Measurement System									
Probe calibration	E.2.1	4.76	N	1	1	1	4.76	4.7	∞
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	0.7	0.7	1.01	1.0	∞
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	0.7	0.7	1.62	1.6	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.5	∞
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.8	∞
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.5	∞
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.0	∞




Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.7	∞
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.1	∞
RF ambient Conditions	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.7	∞
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.1 5	∞
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.0 3	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.8 9	∞
Dipole									
Dipole axis to liquid Distance	8,E.4. 2	1.00	N	$\sqrt{3}$	1	1	0.58	0.5 8	∞
Input power and SAR drift measurement	8,6.6. 2	4.04	R	$\sqrt{3}$	1	1	2.33	2.3 3	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.0 3	∞
Liquid conductivity - deviation from target value	E.3.2	4.57	R	$\sqrt{3}$	0.64	0.43	1.69	1.1 3	∞
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	$\sqrt{3}$	0.64	0.43	1.85	1.2 4	M
Liquid permittivity - deviation from target value	E.3.2	3.69	R	$\sqrt{3}$	0.6	0.49	1.28	1.0 4	∞
Liquid permittivity - measurement uncertainty	E.3.3	10.0 0	N	$\sqrt{3}$	0.6	0.49	3.46	2.8 3	M
Combined Standard Uncertainty			RSS				8.83	8.3 7	
Expanded Uncertainty (95% Confidence interval)			K=2				17.66	16. 73	

6. SAR MEASUREMENT EVALUATION

6.1 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below

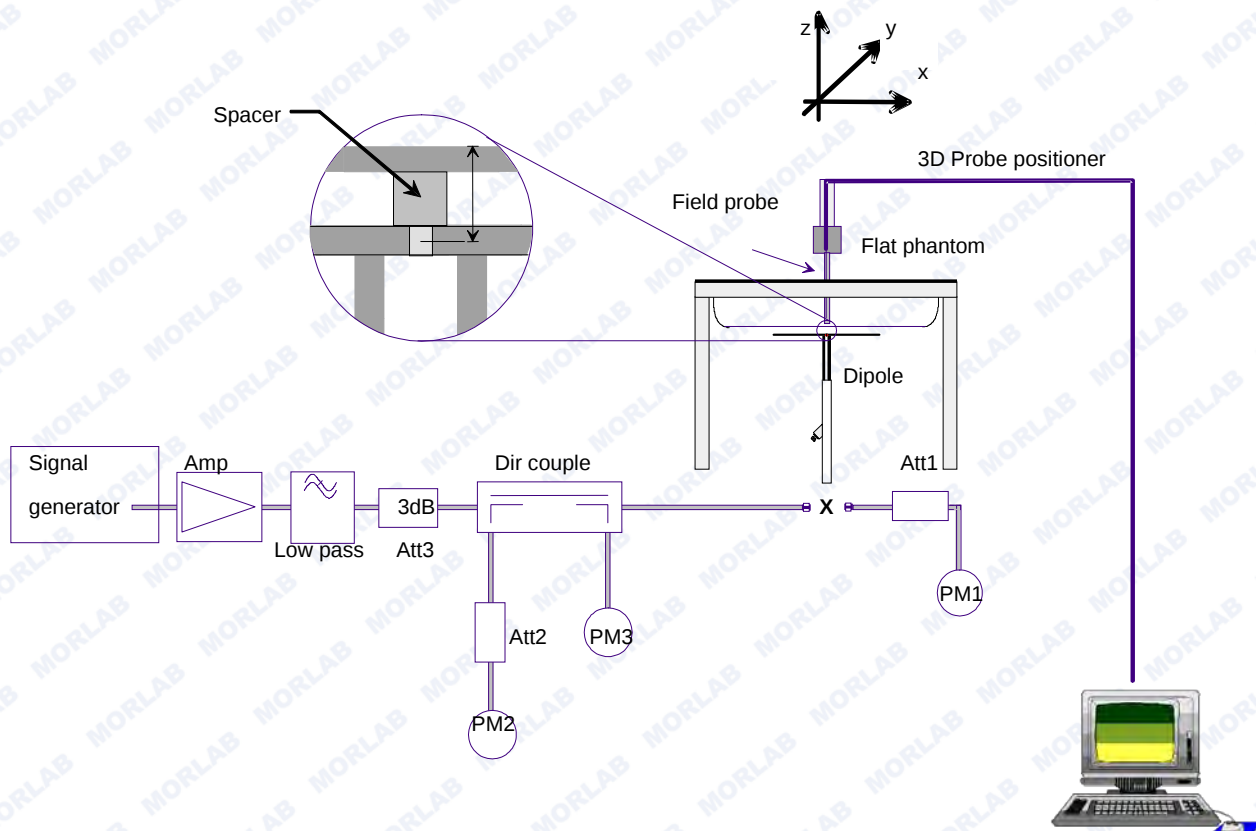

The validation dipole is placed beneath the flat phantom with the specific spacer in place. The distance spacer is touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The power meter PM1 measures the forward power at the location of the system check dipole connector. The signal generator is adjusted for the desired forward power (250 mW is used for 700 MHz to 3 GHz, 100 mW is used for 3.5 GHz to



6 GHz) at the dipole connector and the power meter PM2 is read at that level. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2.

6.2 Validation Results

After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10 %.

Frequency	835MHz(H)	835MHz(B)	1900MHz(H)	1900MHz(B)
Target value (1g)	9.680 W/Kg	10.040 W/Kg	39.360 W/Kg	42.360 W/Kg
Test value (1g 250 mW input)	2.446 W/Kg (02.03)	2.489 W/Kg (02.03)	9.653 W/Kg (02.03)	9.921 W/Kg (02.03)
Normalized value (1g)	9.784 W/Kg	9.956 W/Kg	38.612 W/Kg	39.684 W/Kg

Note: System checks the specific test data please see 84-91.

7. OPERATIONAL CONDITIONS DURING TEST

7.1 Information on the testing

The mobile phone antenna and battery are those specified by the manufacturer. The battery is fully charged before each measurement. The output power and frequency are controlled using a base station simulator. The mobile phone is set to transmit at its highest output peak power level.

The mobile phone is test in the “cheek” and “tilted” positions on the left and right sides of the phantom. The mobile phone is placed with the vertical centre line of the body of the mobile phone and the horizontal line crossing the centre of the earpiece in a plane parallel to the sagittal plane of the phantom.

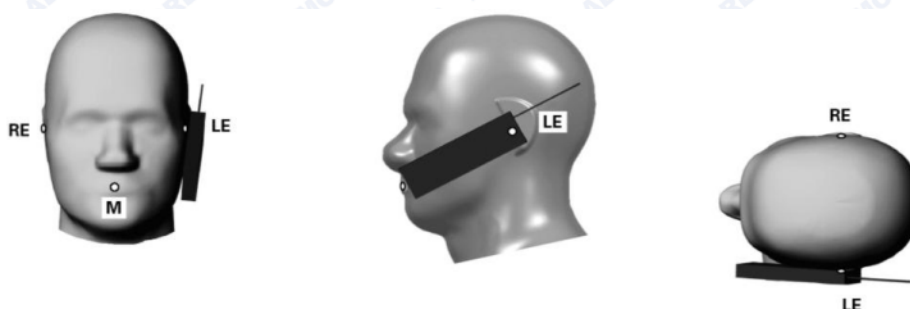


Illustration for Cheek Position

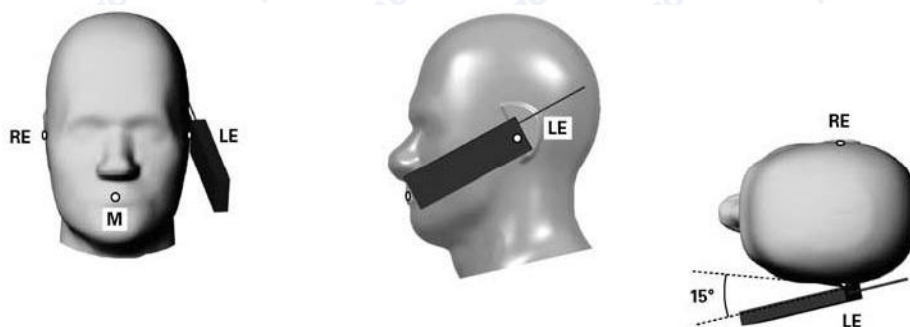


Illustration for Tilted Position

Description of the “cheek” position:

The mobile phone is well placed in the reference plane and the earpiece is in contact with the ear. Then the mobile phone is moved until any point on the front side get in contact with the cheek of the phantom or until contact with the ear is lost.

Description of the “tilted” position:

The mobile phone is well placed in the “cheek” position as described above. Then the mobile phone is moved outward away from the mouth by an angle of 15 degrees or until contact with the ear lost.

Remark: Please refer to Appendix B for the test setup photos.

7.2 Body-worn Configurations

The body-worn configurations shall be tested with the supplied accessories (belt-clips, holsters, etc.) attached to the device in normal use configuration.

For body-worn and other configurations a flat phantom shall be used which is comprised of material with electrical properties similar to the corresponding tissues.

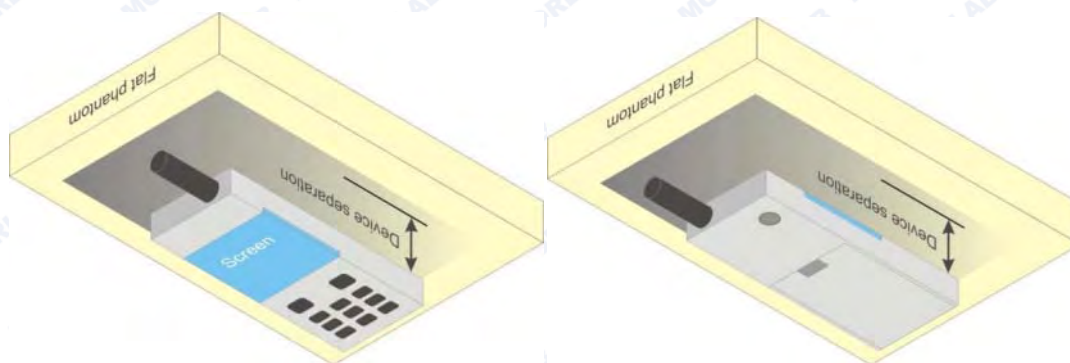


Illustration for Body Worn Position

7.3 Measurement procedure

The Following steps are used for each test position

1. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface.
2. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
3. Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
4. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or



8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

7.4 Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.



8. MEASUREMENT OF CONDUCTED OUTPUT POWER

1. GSM Conducted peak output power

Band	Channel	Frequency (MHz)	Output Power (dBm)
GSM 850	128	824.2	33.85
	190	836.6	33.89
	251	848.8	33.84
PCS 1900	512	1850.2	30.99
	661	1880.0	30.96
	810	1909.8	30.68

2. GPRS Mode Conducted peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	30.99	29.91	28.95	28.14
	190	836.6	31.06	29.98	29.08	28.18
	251	848.8	31.07	30.03	29.04	28.23
PCS 1900	512	1850.2	28.04	26.95	26.00	25.15
	661	1880.0	27.81	26.80	25.83	24.95
	810	1909.8	27.56	26.50	25.57	24.69

GPRS Time-based Average Power

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	21.96	23.89	24.69	25.13
	190	836.6	22.03	23.96	24.82	25.17
	251	848.8	22.04	24.01	24.78	25.22
PCS 1900	512	1850.2	19.01	20.93	21.74	22.14
	661	1880.0	18.78	20.78	21.57	21.94
	810	1909.8	18.53	20.48	21.31	21.68



3. EGPRS Mode Conducted peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	30.84	29.75	28.85	28.00
	190	836.6	31.01	29.95	28.98	28.10
	251	848.8	31.03	29.94	29.01	28.17
PCS 1900	512	1850.2	27.67	26.62	25.65	24.84
	661	1880.0	27.55	26.54	25.60	24.74
	810	1909.8	27.47	26.39	25.41	24.54

EGPRS Time-based Average Power

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	21.81	23.73	24.59	24.99
	190	836.6	21.98	23.93	24.72	25.09
	251	848.8	22.00	23.92	24.75	25.16
PCS 1900	512	1850.2	18.64	20.60	21.39	21.83
	661	1880.0	18.52	20.52	21.34	21.73
	810	1909.8	18.44	20.37	21.15	21.53

Timeslot consignations:

No. Of Slots	Slot 1	Slot 2	Slot 3	Slot 4
Slot Consignation	1Up4Down	2Up2Down	3Up2Down	4Up1Down
Duty Cycle	1:8	1:2	1:2.67	1:2
Correct Factor	-9.03dB	-6.02dB	-4.26dB	-3.01dB

5. Bluetooth peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)		
			GFSK	$\pi/4$ -DQPSK	8-DPSK
BT	0	2402	7.68	6.19	6.47
	39	2441	7.87	6.40	6.71
	78	2480	6.42	4.94	5.25



9. TEST RESULTS LIST

Summary of Measurement Results (GSM 850MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.						
Phantom Configurations		Device Test Positions	Device Test channel	SAR(W/Kg), 1g Peak	Scaling Factor	Scaled SAR (W/Kg), 1g
Right Side Of Head		Cheek/Touch	190	0.645	1.026	0.662
		Ear/Tilt		0.501		0.514
Left Side Of Head		Cheek/Touch		0.566		0.581
		Ear/Tilt		0.530		0.544
Body (15mm Separation)	GSM	Back upward		0.572		0.587
		Front upward		0.384		
	GPRS	Back upward	128	0.810	1.086	0.880
			190	1.006	1.076	1.082
			251	1.231	1.064	1.310
		Front upward	251	0.565	1.064	0.601



Summary of Measurement Results (GSM 1900MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.					
Phantom Configurations	Device Test Positions	Device Test channel	SAR(W/Kg), 1g Peak	Scaling Factor	Scaled SAR (W/Kg), 1g
Right Side Of Head	Cheek/Touch	512	1.307	1.002	1.310
		661	0.978	1.009	0.987
		810	0.736	1.076	0.792
	Ear/Tilt	512	1.197	1.002	1.199
		661	1.027	1.009	1.036
		810	0.829	1.076	0.892
Left Side Of Head	Cheek/Touch	512	1.308	1.002	1.311
		661	1.159	1.009	1.169
		810	0.789	1.076	0.849
	Ear/Tilt	512	1.306	1.002	1.309
		661	1.114	1.009	1.124
		810	0.852	1.076	0.917
Body (15mm Separation)	GSM	Back upward	512	1.002	0.478
		Front upward			0.327
	GPRS	Back upward	512	1.084	0.491
		Front upward			0.395

Note:

1. GPRS test Scenario(Based on the Max. Time-based Average Power)

Band	Channel	Slots	Power level	Duty Cycle
GPRS850	251	4	5	1:2
GPRS1900	512	4	0	1:2

Note:

- When the 1-g SAR for the mid-band channel or the channel with the Highest output power satisfy the following conditions, testing of the other channels in the band is not required. (Per KDB 447498 D01 General RF Exposure Guidance v05r01)
 - ≤ 0.8 W/kg and transmission band ≤ 100 MHz
 - ≤ 0.6 W/kg and, 100 MHz $<$ transmission bandwidth ≤ 200 MHz
 - ≤ 0.4 W/kg and transmission band > 200 MHz



2. BT SAR test is conducted according to section 12 stand-alone SAR evaluation of this report.

3. Scaling Factor calculation

Band	Tune-up power tolerance (dBm)	SAR test channel Power (dBm)	Scaling Factor
GSM 850	PCL = 5, PWR = 33.5+-0.5	33.89	1.026
GPRS 850	PCL = 5, PWR = 28+-0.5(4 slots)	28.14	1.086
		28.18	1.076
		28.23	1.064
PCS 1900	PCL = 0, PWR = 30.5+-0.5	30.99	1.002
		30.96	1.009
		30.68	1.076
GPRS 1900	PCL=0, PWR= 25 +-0.5(4 slots)	25.15	1.084



10. REPEATED SAR MEASUREMENT


In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Band	Test Position	Test Channel	Meas.SAR(W/kg)		Largest to Smallest SAR Ratio
			Original	Repeated	
GPRS850	Body	251	1.231	1.235	1.009
GSM1900	Head	512	1.308	1.299	1.007

11. MULTIPLE TRANSMITTERS EVALUATION

The are two transmitters build in EUT, as following:

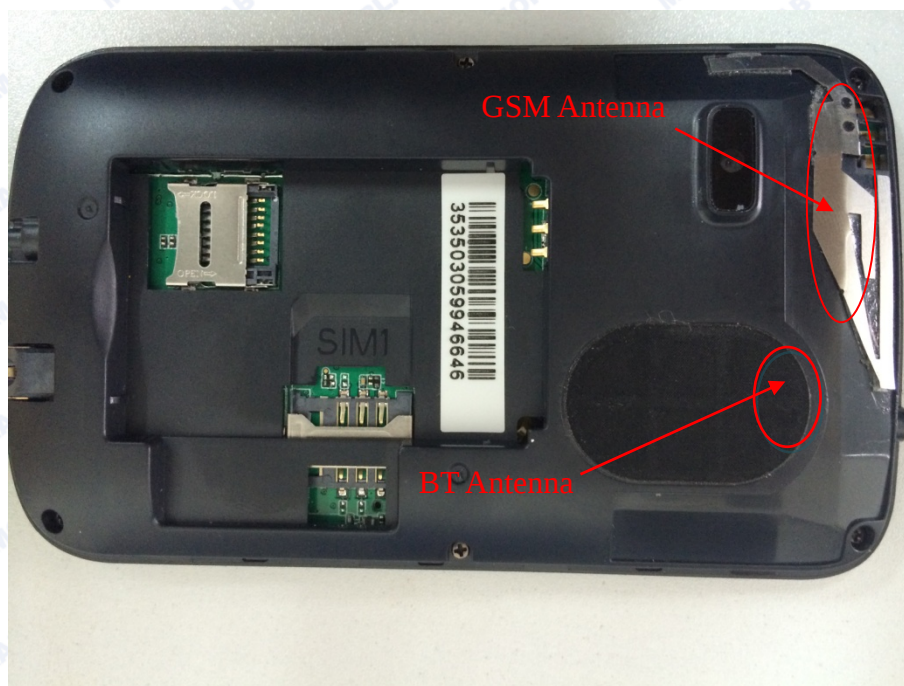

Stand-alone SAR

Test distance: 5mm		
Band	SAR Test Exclusion Threshold(mW) Per KDB 447498 D01v05r01	Highest power(mW)
BT	10	6.310

According to the chart above, BT SAR is not required.

The SAR test for BT is not required for highest power is not exceed the power threshold for 2450MHz at the test distance of 5mm.

The BT stand-alone SAR is not required, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance,mm)] · [√f(GHz)/x] W/kg for test separation distances ≤ 50 mm;

where x = 7.5 for 1-g SAR, and x = 18.75 for 10-g SAR.

(Max power= 6.123 mW ; min. test separation distance=5mm for head, 10mm for body; f=2.4GHz)

BT estimated Head SAR = 0.126 W/Kg (1g); BT estimated Body SAR = 0.063W/Kg (1g)

**Simultaneous SAR**

Description of Simultaneous Transmit Capabilities				
No.	Transmitter Combinations	Scenario Supported?	Supported for Mobile Hotspot?	Explanation
1	GSM(Voice)+GSM(Data)	No	No	Note 1
2	GSM(Voice)+BT	Yes	No	Note 2

Not applicable	Applicable	Head	Body-worn	Hotspot
1	2	2	2	/

Note:

1. EUT system architecture does not support simultaneous voice and data, multiple voice channels, or multiple data channels during a single session on the cellular net work.
2. Supported for voice plus background data.
3. When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the BT transmitter and another licensed transmitter. Both transmitter often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions.
4. GSM supports voice and data transmission, though not simultaneously.
5. Simultaneous Transmission SAR evaluation is not required for BT, because the software mechanism have been incorporated to guarantee that the Bluetooth transmitters would not simultaneously operate.
6. For Scenario **No.2**, GSM is tested separately, the GSM mode do not supports voice and data transmission simultaneously, voice (GSM) and data (GPRS/EDGE) is tested separately.

Annex A. Applicable Multiple Scenario Evaluation

Test Position	GSM SARMax (W/Kg)	Bluetooth SAR(W/Kg)	Σ 1-g SARMax(W/Kg)
			BT&Main Ant
Head SAR	1.311	0.126	1.437
Body SAR	1.310	0.063	1.373

Simultaneous Transmission SAR evaluation is not required for BT and GSM, because the sum of 1g SARMax is **1.437W/Kg** < 1.6W/Kg for BT and GSM.

(According to KDB 447498D01v05, the sum of the Highest reported SAR of each antenna does not exceed the limit, simultaneous transmission SAR evaluation is not required.)

**ANNEX A GRAPH TEST RESULTS**

BAND	PARAMETERS
<u>GSM850</u>	<u>Measurement 1:</u> Right Head with Cheek device position on Middle Channel in GSM mode <u>Measurement 2:</u> Right Head with Tilt device position on Middle Channel in GSM mode <u>Measurement 3:</u> Left Head with Cheek device position on Middle Channel in GSM mode <u>Measurement 4:</u> Left Head with Tilt device position on Middle Channel in GSM mode <u>Measurement 5:</u> Flat Plane with Body device position on Middle Channel in GSM mode <u>Measurement 6:</u> Flat Plane with Body device position on Middle Channel in GSM mode <u>Measurement 7:</u> Flat Plane with Body device position on Low Channel in GPRS mode <u>Measurement 8:</u> Flat Plane with Body device position Middle Channel in GPRS mode <u>Measurement 9:</u> Flat Plane with Body device position on High Channel in GPRS mode <u>Measurement 10:</u> Flat Plane with Body device position on High Channel in GPRS mode
<u>GSM1900</u>	<u>Measurement 11:</u> Right Head with Cheek device position on Low Channel in GSM mode <u>Measurement 12:</u> Right Head with Cheek device position on Middle Channel in GSM mode <u>Measurement 13:</u> Right Head with Cheek device position on High Channel in GSM mode <u>Measurement 14:</u> Right Head with Tilt device position on Low Channel in GSM mode <u>Measurement 15:</u> Right Head with Tilt device position on Middle Channel in GSM mode <u>Measurement 16:</u> Right Head with Tilt device position on High Channel in GSM mode <u>Measurement 17:</u> Left Head with Cheek device position on Low Channel in GSM mode <u>Measurement 18:</u> Left Head with Cheek device position on Middle



	Channel in GSM mode <u>Measurement 19:</u> Left Head with Cheek device position on High
	Channel in GSM mode <u>Measurement 20:</u> Left Head with Tilt device position on Low
	Channel in GSM mode <u>Measurement 21:</u> Left Head with Tilt device position on Middle
	Channel in GSM mode <u>Measurement 22:</u> Left Head with Tilt device position on High
	Channel in GSM mode <u>Measurement 23:</u> Flat Plane with Body device position on Low
	Channel in GSM mode <u>Measurement 24:</u> Flat Plane with Body device position on Low
	Channel in GSM mode <u>Measurement 25:</u> Flat Plane with Body device position on Low
	Channel in GPRS mode <u>Measurement 26:</u> Flat Plane with Body device position on Low
	Channel in GPRS mode

**MEASUREMENT 1**

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2014.02.03

Measurement duration: 9 minutes 1 second



A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	GSM850
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 190):

Frequency (MHz)	836.600000
Relative permittivity (real part)	41.375586
Conductivity (S/m)	0.908954
Power drift (%)	1.270000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.73
Crest factor:	1:8

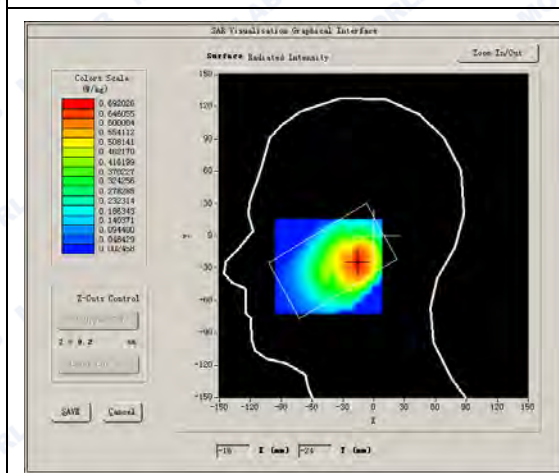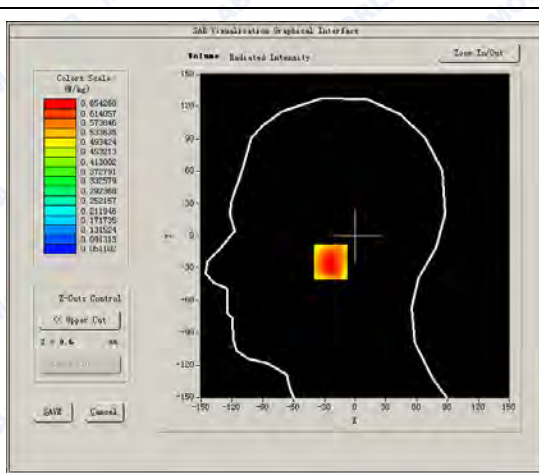SURFACE SAR**VOLUME SAR**




REPORT No. : SZ15010119S01

Maximum location: X=-16.00, Y=-24.00


SAR Peak: 0.94 W/kg

SAR 10g (W/Kg)	0.440912
SAR 1g (W/Kg)	0.644780


Z axis scan

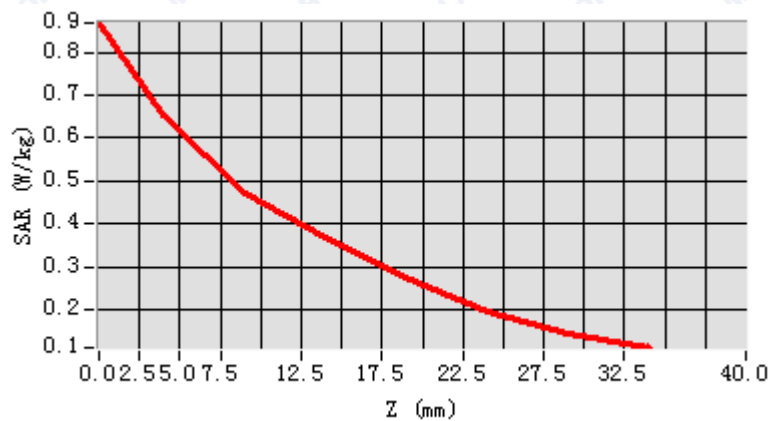

3D screen shot

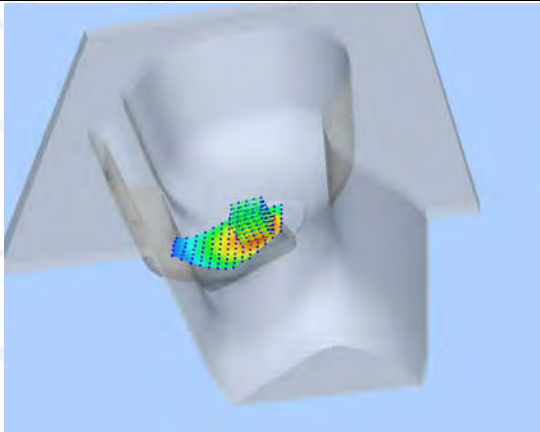

Hot spot position

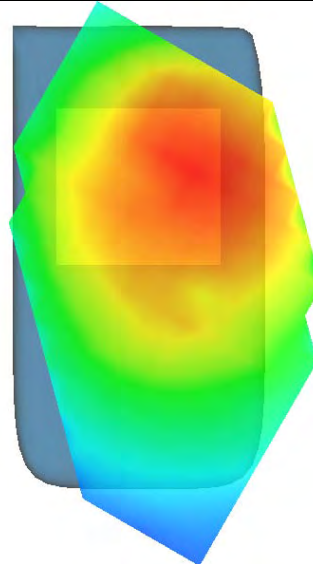

**MEASUREMENT 2**

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2014.02.03

Measurement duration: 8 minutes 24 seconds



A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	GSM850
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 190):

Frequency (MHz)	836.600000
Relative permittivity (real part)	41.375586
Conductivity (S/m)	0.908954
Power drift(%)	3.100000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.73
Crest factor:	1:8

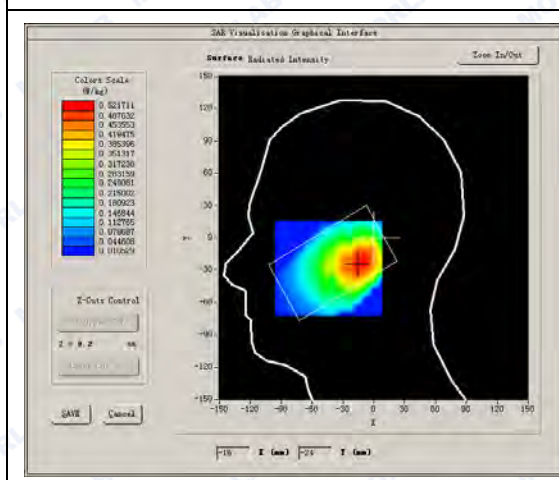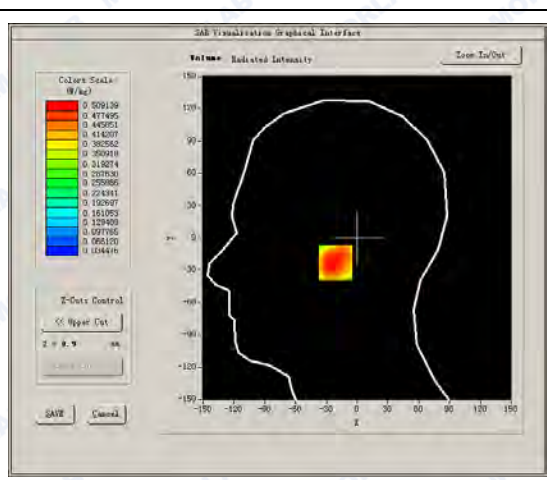SURFACE SAR**VOLUME SAR**




REPORT No. : SZ15010119S01

Maximum location: X=-13.00, Y=-23.00


SAR Peak: 0.69 W/kg

SAR 10g (W/Kg)	0.339412
SAR 1g (W/Kg)	0.500545


Z axis scan

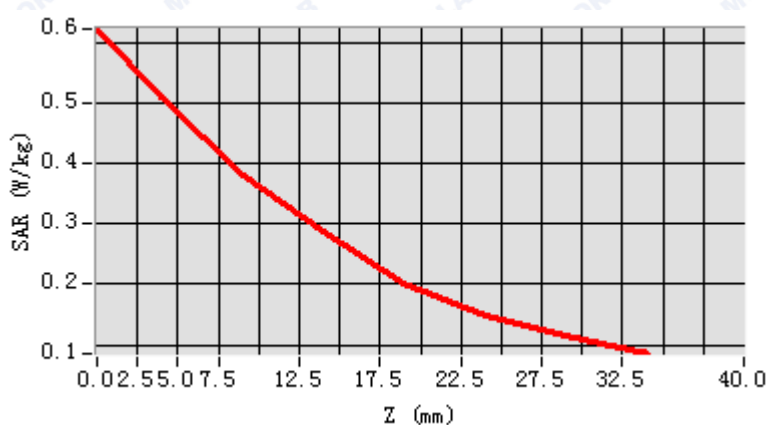

3D screen shot

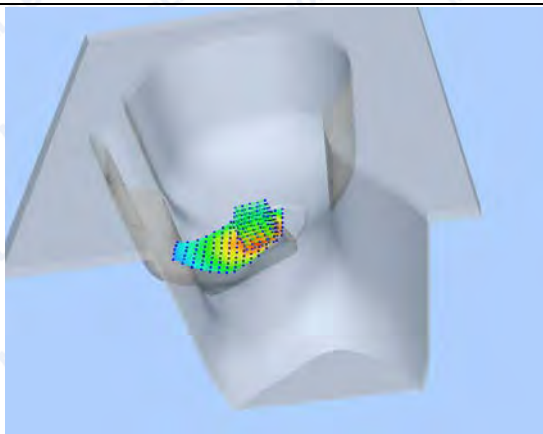

Hot spot position

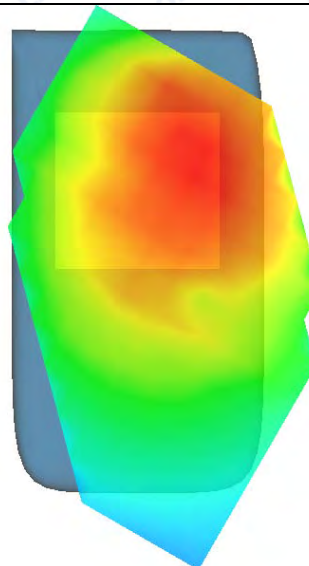



MEASUREMENT 3

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2014.02.03

Measurement duration: 8 minutes 56 seconds

A. Experimental conditions.


Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	GSM850
Channels	Middle
Signal	GSM

B. SAR Measurement Results


Middle Band SAR (Channel 190):

Frequency (MHz)	836.600000
Relative permittivity (real part)	41.375586
Conductivity (S/m)	0.908954
Power drift (%)	2.550000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.73
Crest factor:	1:8

SURFACE SAR

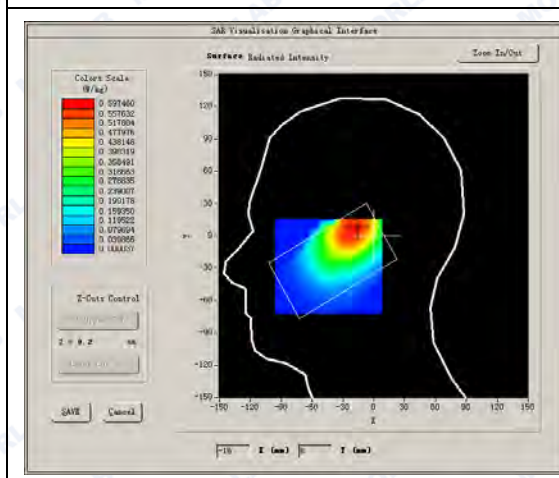

VOLUME SAR

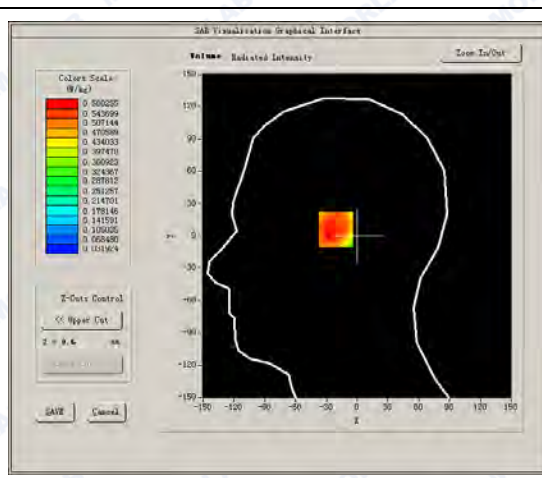




REPORT No. : SZ15010119S01

Maximum location: X=-17.00, Y=7.00


SAR Peak: 0.82 W/kg

SAR 10g (W/Kg)	0.392373
SAR 1g (W/Kg)	0.566199


Z axis scan

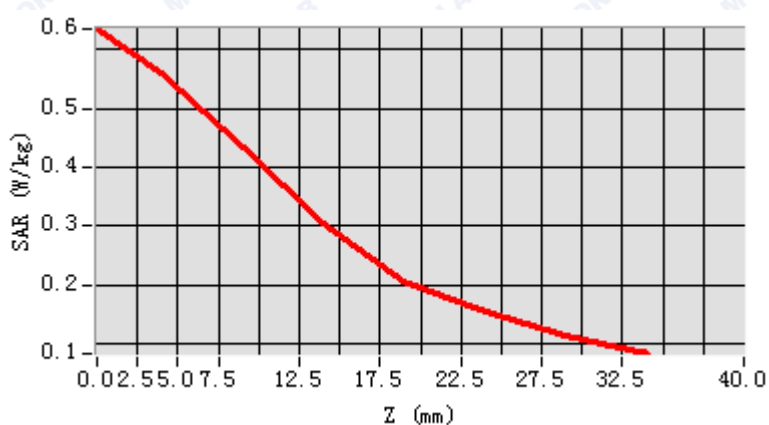

3D screen shot

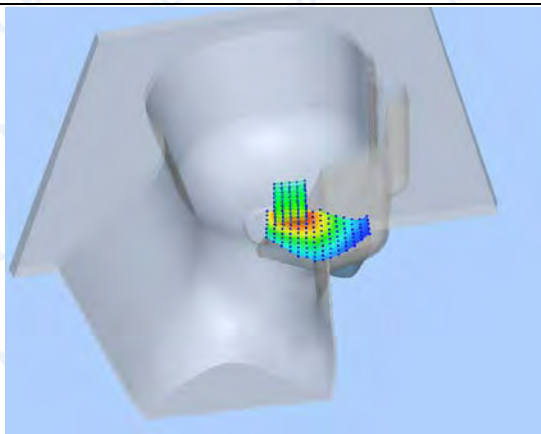

Hot spot position

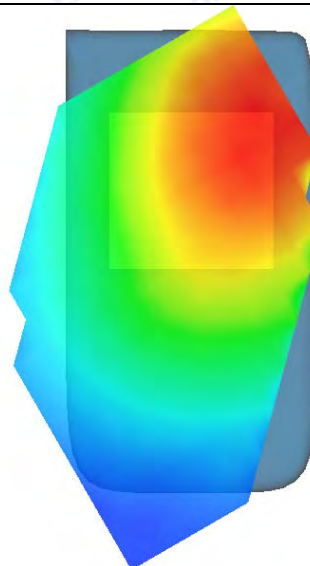

**MEASUREMENT 4**

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2014.02.03

Measurement duration: 8 minutes 18 seconds



A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Tilt
Band	GSM850
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 190):

Frequency (MHz)	836.600000
Relative permittivity (real part)	41.375586
Conductivity (S/m)	0.908954
Power drift(%)	0.510000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.73
Crest factor:	1:8

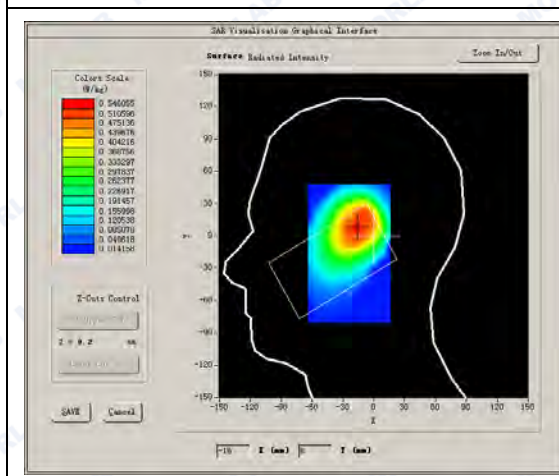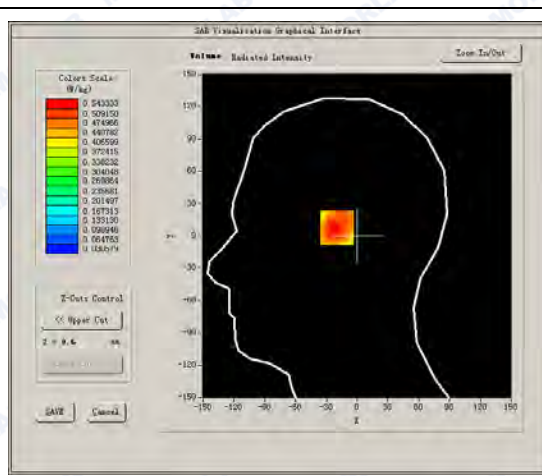SURFACE SAR**VOLUME SAR**




REPORT No. : SZ15010119S01

Maximum location: X=-16.00, Y=8.00


SAR Peak: 0.76 W/kg

SAR 10g (W/Kg)	0.360662
SAR 1g (W/Kg)	0.530115


Z axis scan

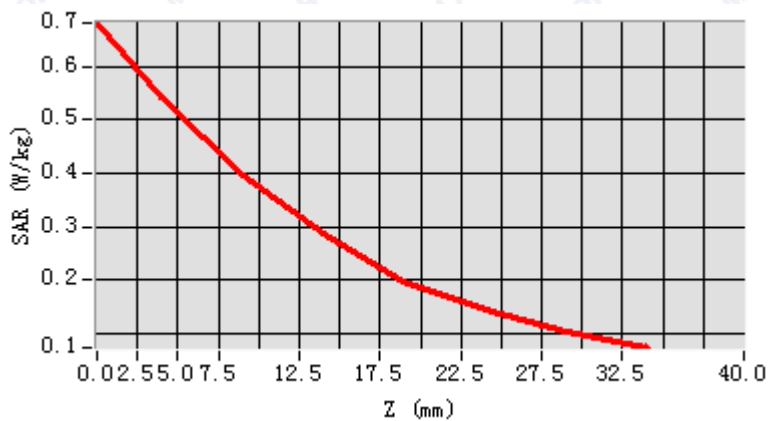

3D screen shot

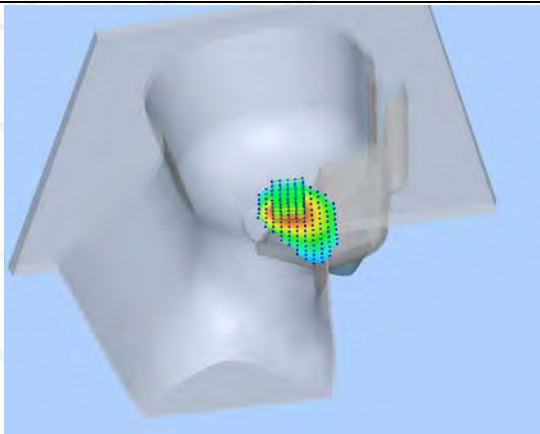

Hot spot position

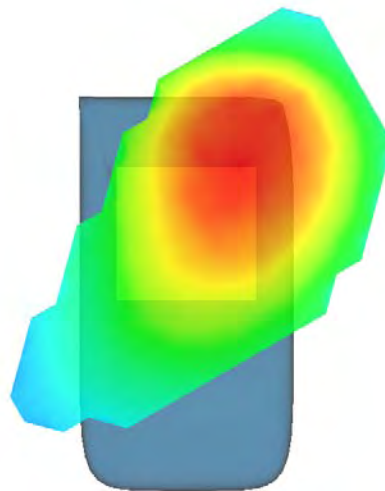

**MEASUREMENT 5**

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2014.02.03

Measurement duration: 9 minutes 37 seconds



A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM850
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 190):

Frequency (MHz)	836.600000
Relative permittivity (real part)	56.118595
Conductivity (S/m)	0.933824
Power drift (%)	2.210000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.99
Crest factor:	1:8

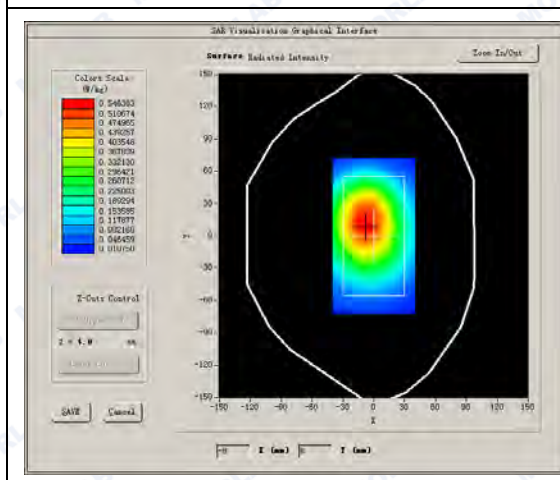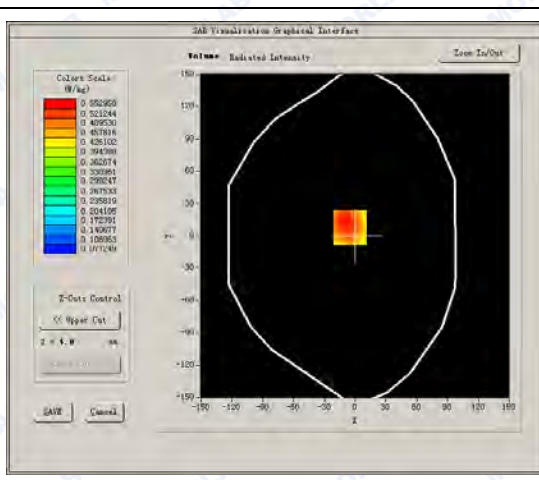SURFACE SAR**VOLUME SAR**




REPORT No. : SZ15010119S01

Maximum location: X=-5.00, Y=8.00


SAR Peak: 0.78 W/kg

SAR 10g (W/Kg)	0.413301
SAR 1g (W/Kg)	0.572420


Z axis scan

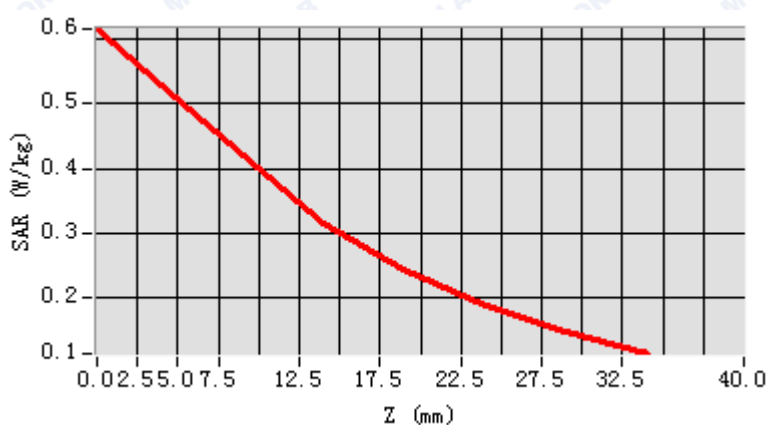

3D screen shot

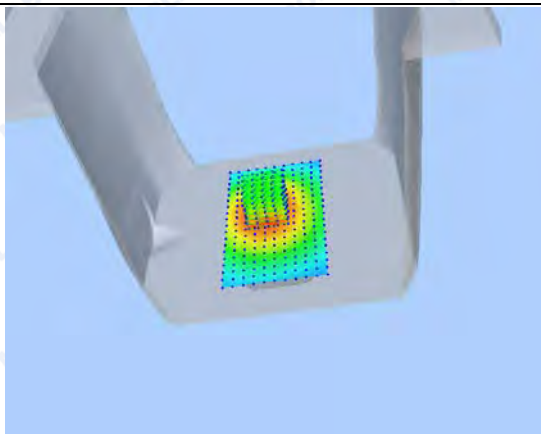

Hot spot position

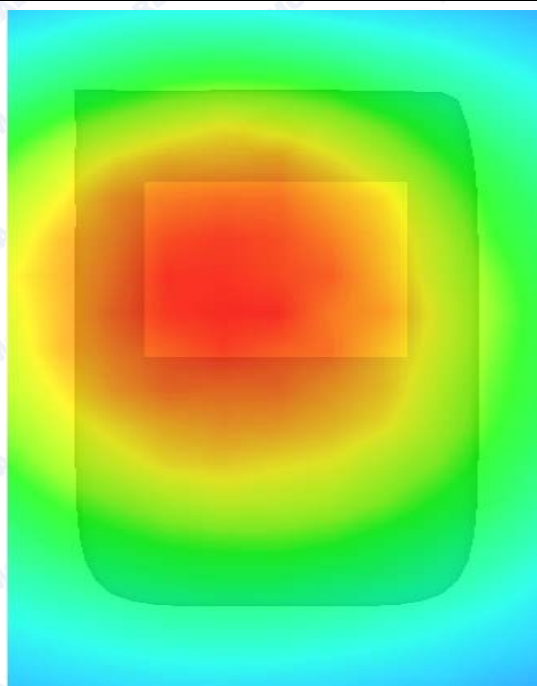

**MEASUREMENT 6**

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2014.02.03

Measurement duration: 9 minutes 28 seconds



A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM850
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 190):

Frequency (MHz)	836.600000
Relative permittivity (real part)	56.118595
Conductivity (S/m)	0.933824
Power drift(%)	-2.390000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.99
Crest factor:	1:8

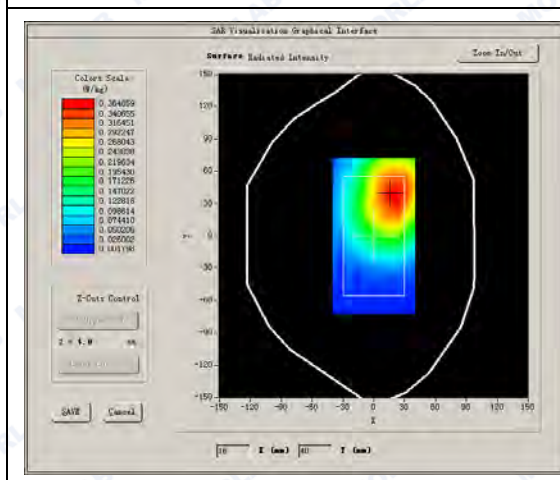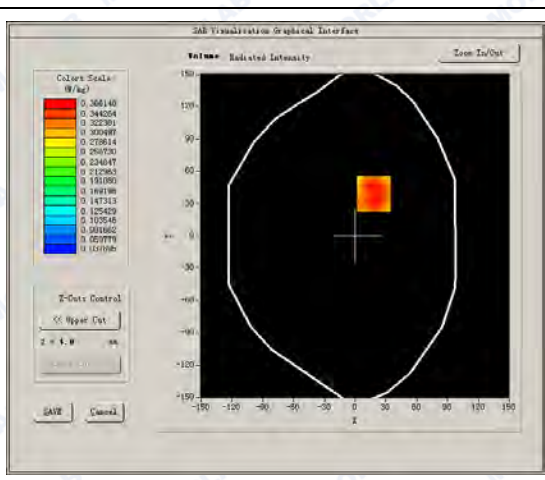SURFACE SAR**VOLUME SAR**




REPORT No. : SZ15010119S01

Maximum location: X=18.00, Y=39.00


SAR Peak: 0.53 W/kg

SAR 10g (W/Kg)	0.272753
SAR 1g (W/Kg)	0.383820


Z axis scan

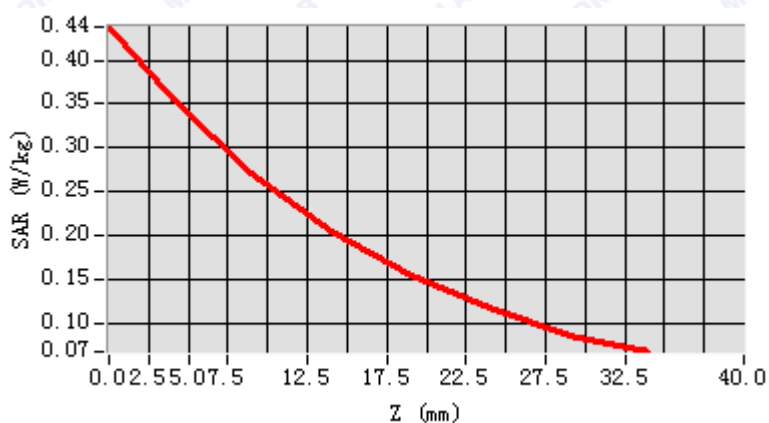

3D screen shot

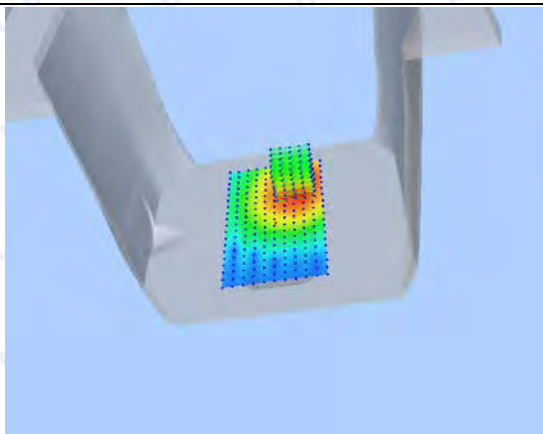

Hot spot position

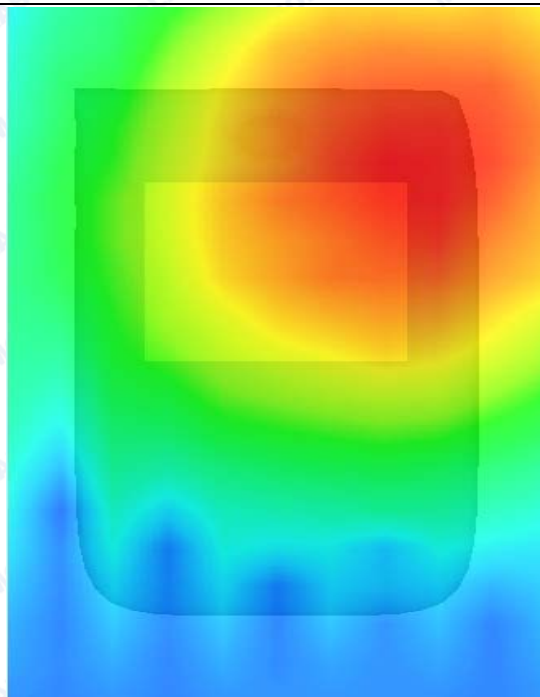

**MEASUREMENT 7**

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2015.02.03

Measurement duration: 9 minutes 33 seconds



A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM850
Channels	Low
Signal	GPRS

B. SAR Measurement Results

Low Band SAR (Channel 128):

Frequency (MHz)	824.200000
Relative permittivity (real part)	56.118595
Conductivity (S/m)	0.933824
Power drift(%)	-0.530000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.99
Crest factor:	1:2

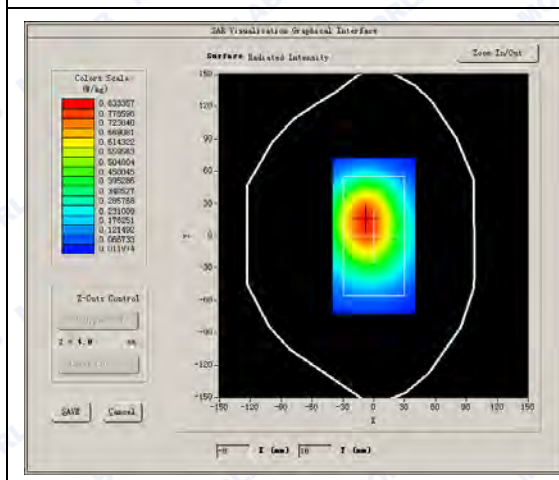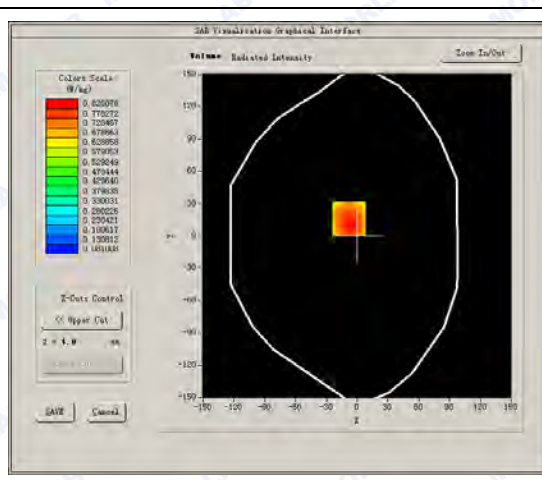SURFACE SAR**VOLUME SAR**




REPORT No. : SZ15010119S01

Maximum location: X=-8.00, Y=16.00


SAR Peak: 1.08 W/kg

SAR 10g (W/Kg)	0.570324
SAR 1g (W/Kg)	0.809904


Z axis scan

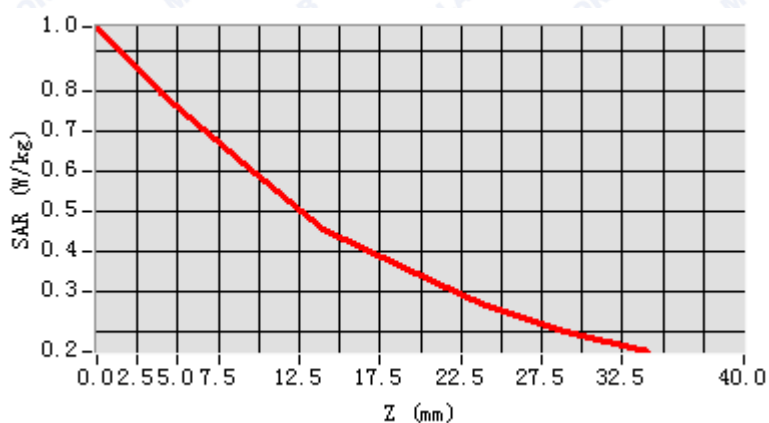

3D screen shot

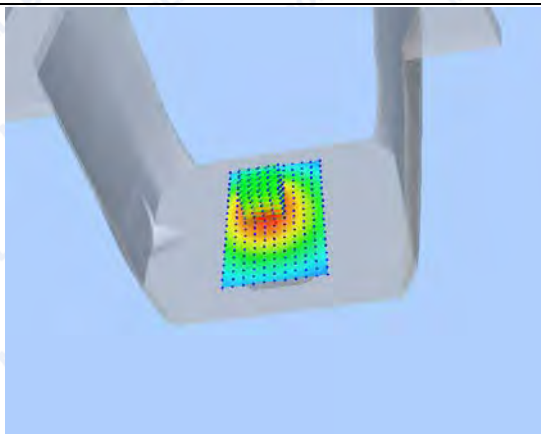

Hot spot position

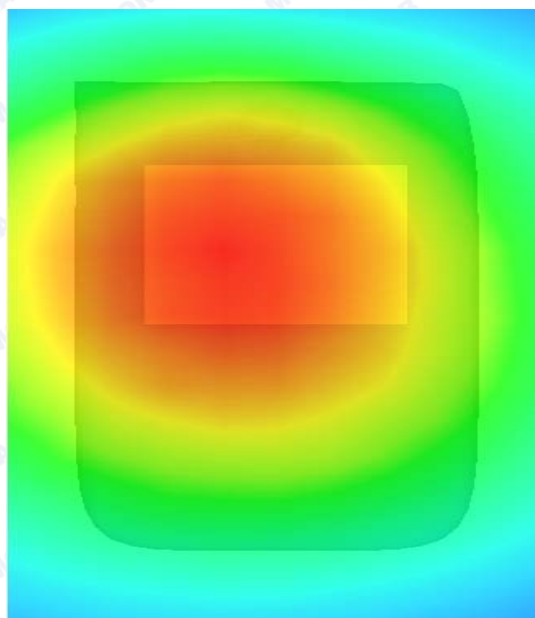

**MEASUREMENT 8**

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2015.02.03

Measurement duration: 9 minutes 32 seconds



A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM850
Channels	Middle
Signal	GPRS

B. SAR Measurement Results

Middle Band SAR (Channel 190):

Frequency (MHz)	836.600000
Relative permittivity (real part)	56.118595
Conductivity (S/m)	0.933824
Power drift(%)	-2.620000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.99
Crest factor:	1:2

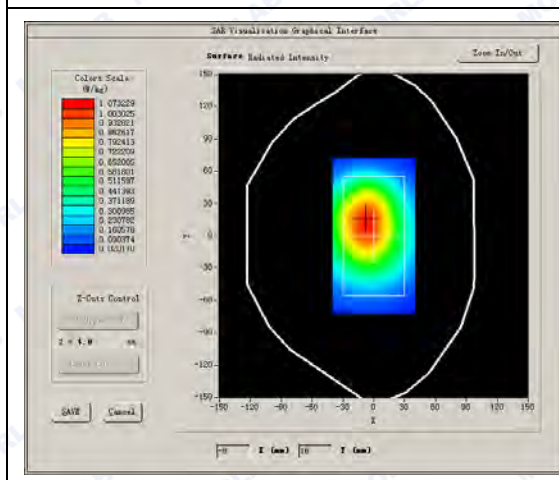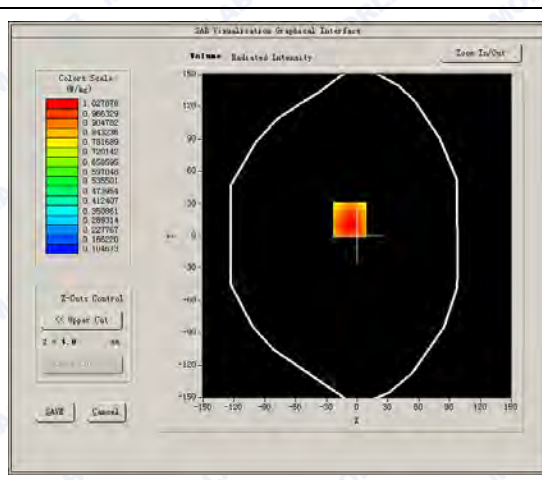SURFACE SAR**VOLUME SAR**




REPORT No. : SZ15010119S01

Maximum location: X=-7.00, Y=15.00


SAR Peak: 1.31 W/kg

SAR 10g (W/Kg)	0.712338
SAR 1g (W/Kg)	1.005960


Z axis scan

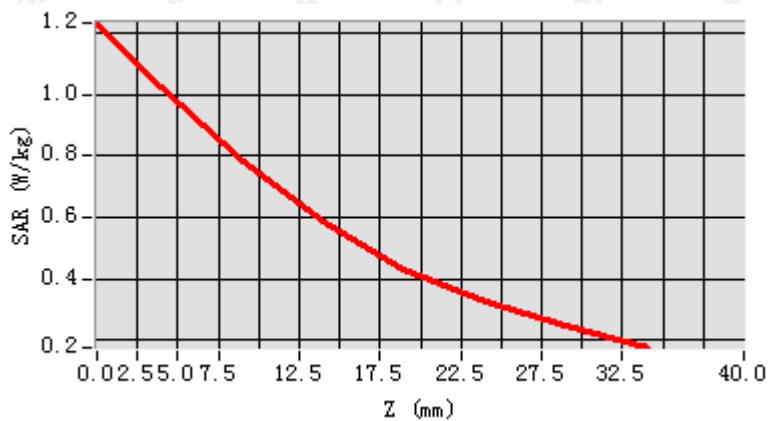

3D screen shot

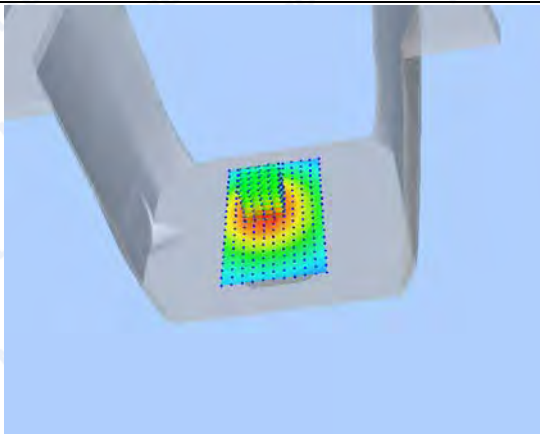

Hot spot position

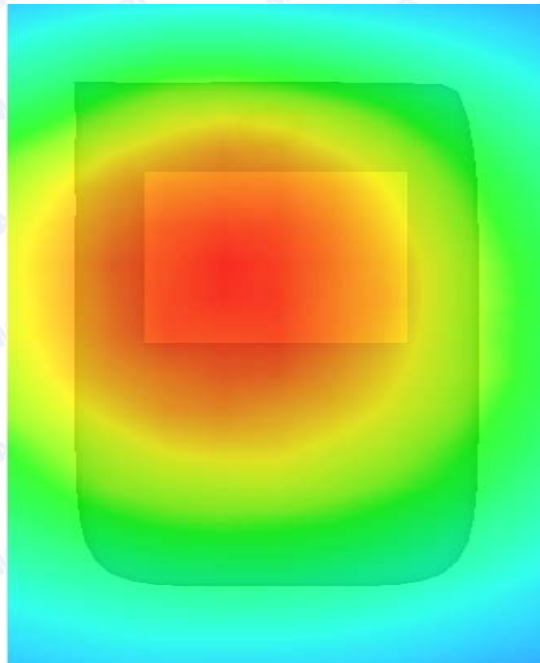

**MEASUREMENT 9**

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2015.02.03

Measurement duration: 9 minutes 36 seconds



A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM850
Channels	High
Signal	GPRS

B. SAR Measurement Results

High Band SAR (Channel 251):

Frequency (MHz)	848.800000
Relative permittivity (real part)	56.118595
Conductivity (S/m)	0.933824
Power drift(%)	0.250000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.99
Crest factor:	1:2

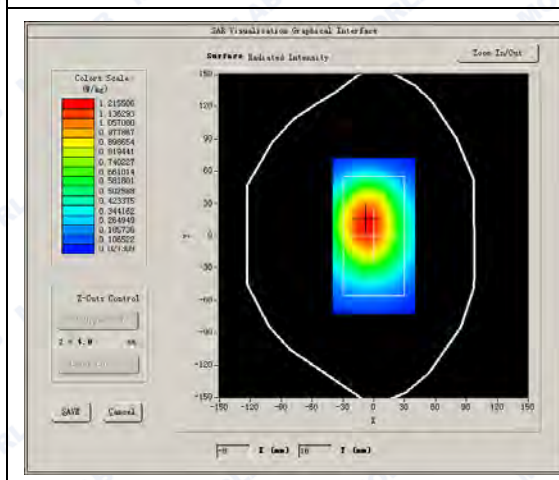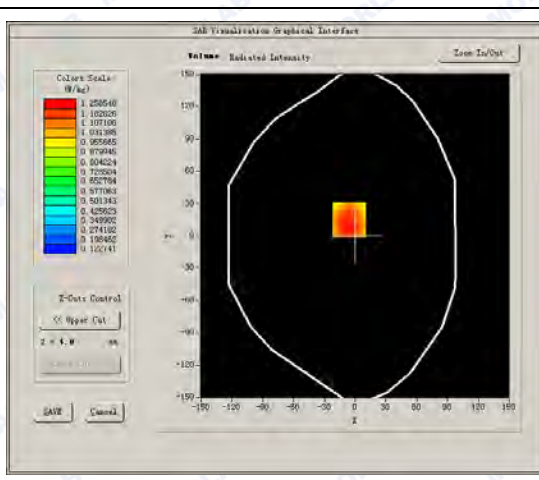SURFACE SAR**VOLUME SAR**




REPORT No. : SZ15010119S01

Maximum location: X=-6.00, Y=15.00


SAR Peak: 1.65 W/kg

SAR 10g (W/Kg)	0.863565
SAR 1g (W/Kg)	1.230778


Z axis scan

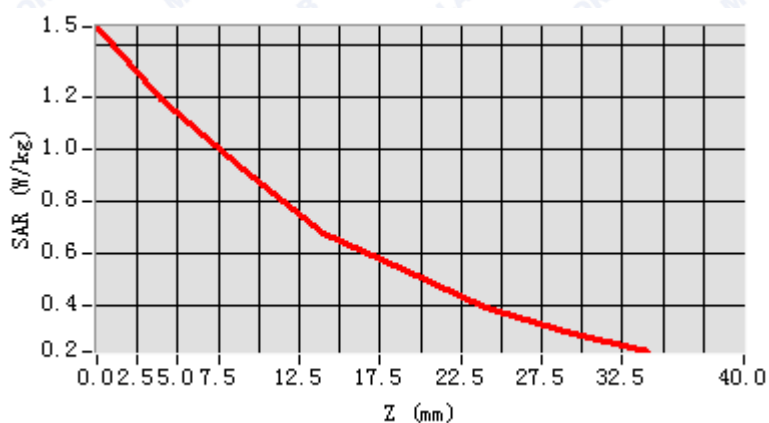

3D screen shot

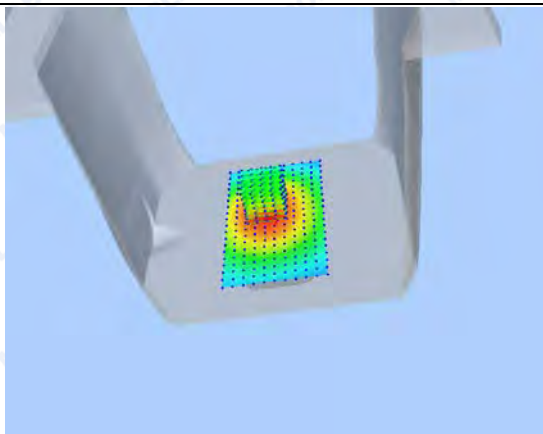

Hot spot position

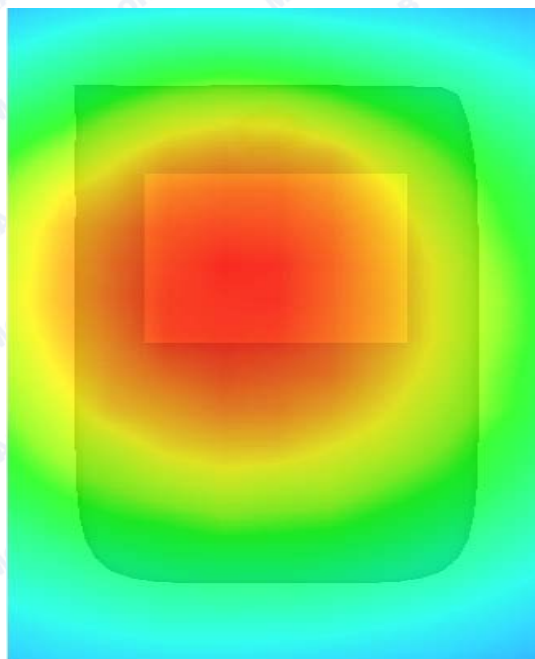

**MEASUREMENT 10**

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2015.02.03

Measurement duration: 9 minutes 36 seconds



A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM850
Channels	High
Signal	GPRS

B. SAR Measurement Results

High Band SAR (Channel 251):

Frequency (MHz)	836.600000
Relative permittivity (real part)	56.118595
Conductivity (S/m)	0.933824
Power drift(%)	0.730000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.99
Crest factor:	1:2

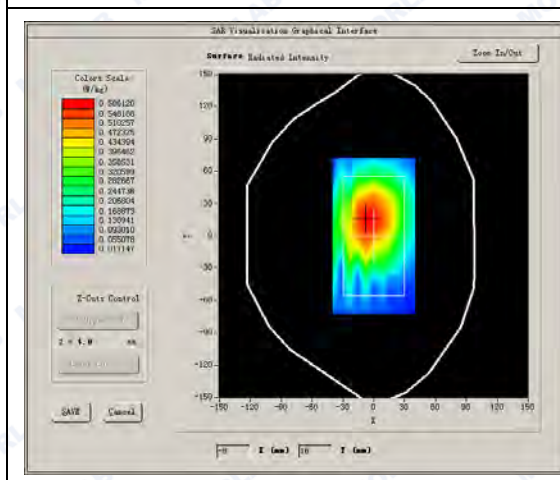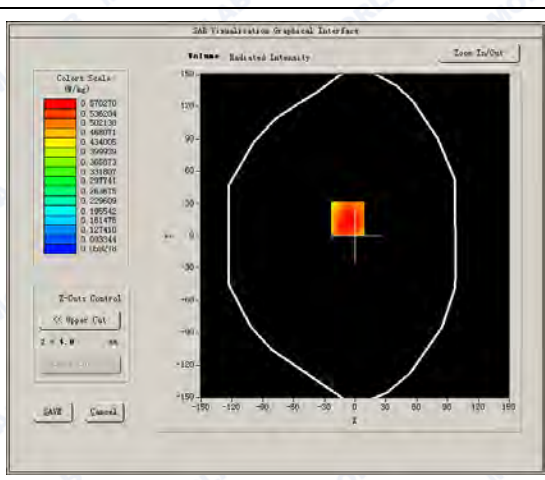SURFACE SAR**VOLUME SAR**




REPORT No. : SZ15010119S01

Maximum location: X=-7.00, Y=16.00


SAR Peak: 0.77 W/kg

SAR 10g (W/Kg)	0.392707
SAR 1g (W/Kg)	0.564953


Z axis scan

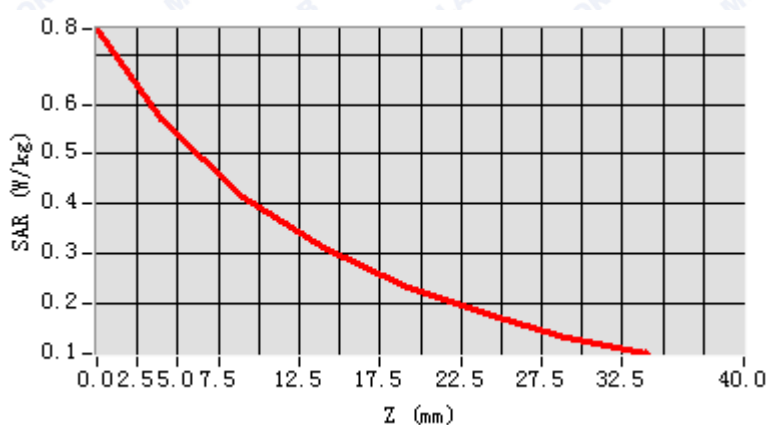

3D screen shot

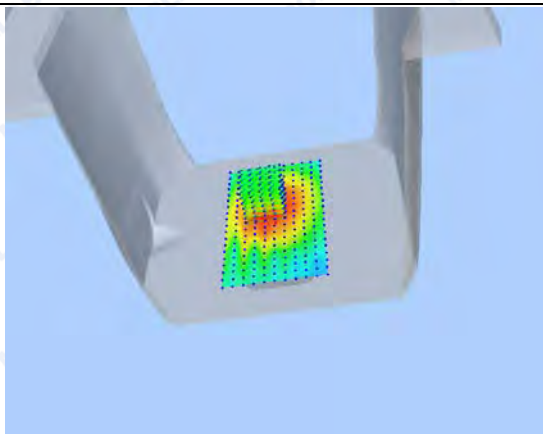

Hot spot position

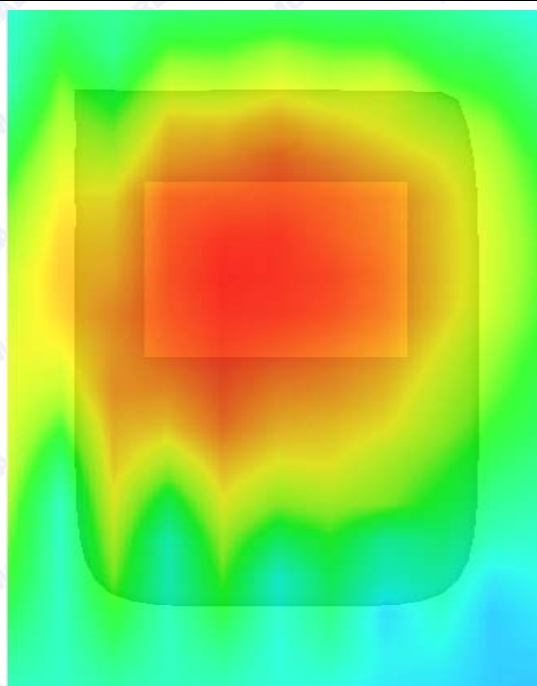

**MEASUREMENT 11**

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2015.02.03

Measurement duration: 9 minutes 34 seconds



A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Right Head
Device Position	Cheek
Band	GSM1900
Channels	Low
Signal	GSM

B. SAR Measurement Results

Low Band SAR (Channel 512):

Frequency (MHz)	1850.200000
Relative permittivity (real part)	39.868595
Conductivity (S/m)	1.433824
Power drift(%)	0.030000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.99
Crest factor:	1:2

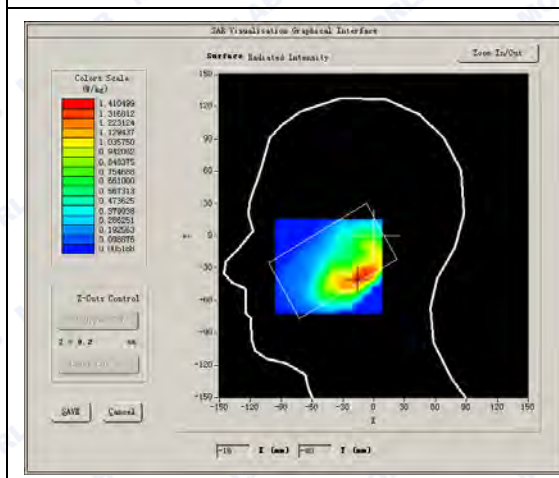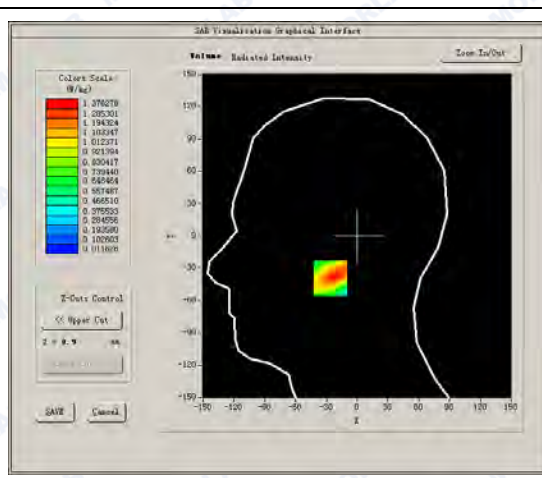SURFACE SAR**VOLUME SAR**




REPORT No. : SZ15010119S01

Maximum location: X=-15.00, Y=-39.00


SAR Peak: 2.38 W/kg

SAR 10g (W/Kg)	0.680300
SAR 1g (W/Kg)	1.307191


Z axis scan

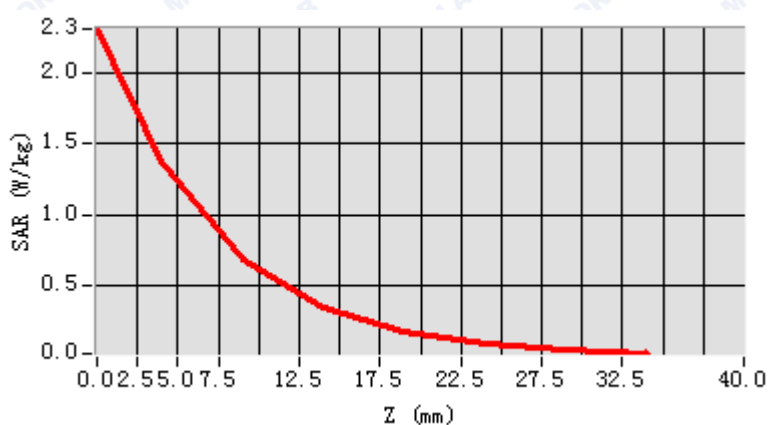

3D screen shot

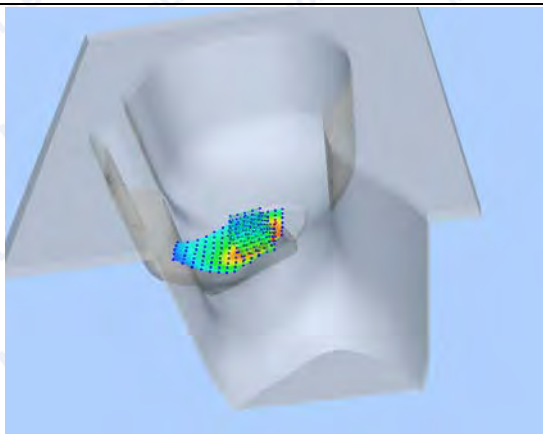

Hot spot position

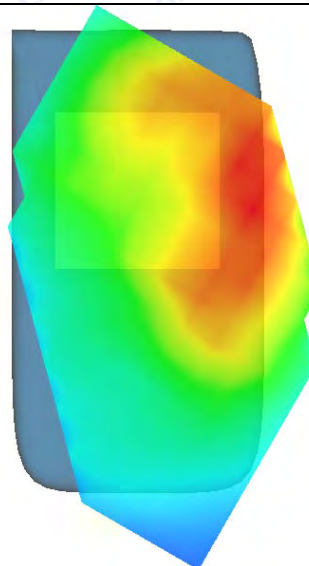



REPORT No. : SZ15010119S01

MEASUREMENT 12

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2015.02.03

Measurement duration: 9 minutes 34 seconds



A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Right Head
Device Position	Cheek
Band	GSM1900
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 661):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	39.868595
Conductivity (S/m)	1.433824
Power drift(%)	-0.160000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.99
Crest factor:	1:2

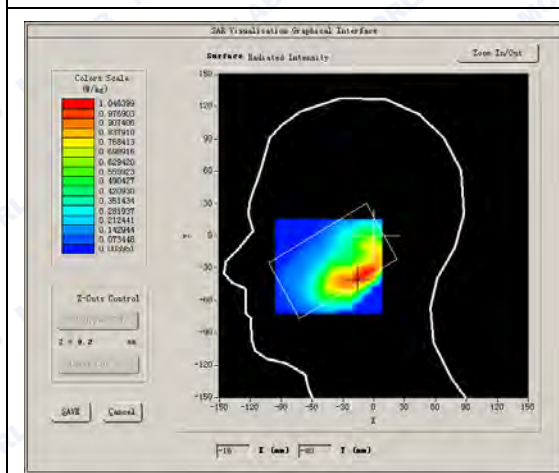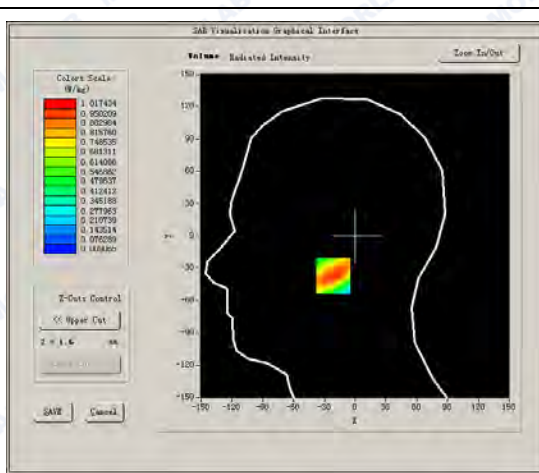SURFACE SAR**VOLUME SAR**




REPORT No. : SZ15010119S01

Maximum location: X=-10.00, Y=-37.00


SAR Peak: 1.74 W/kg

SAR 10g (W/Kg)	0.501762
SAR 1g (W/Kg)	0.978366


Z axis scan

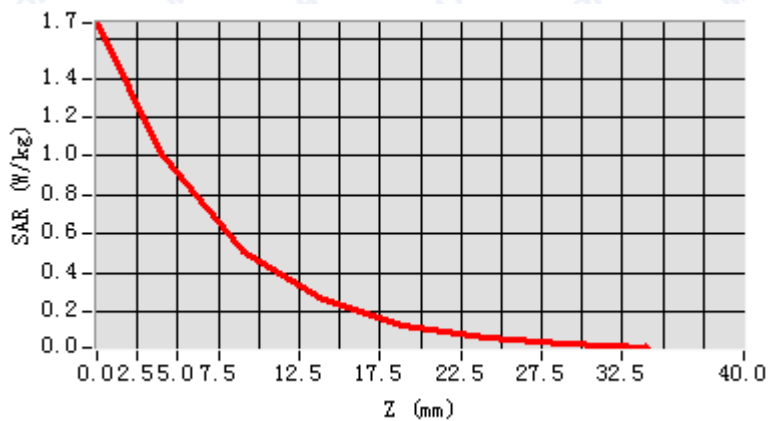

3D screen shot

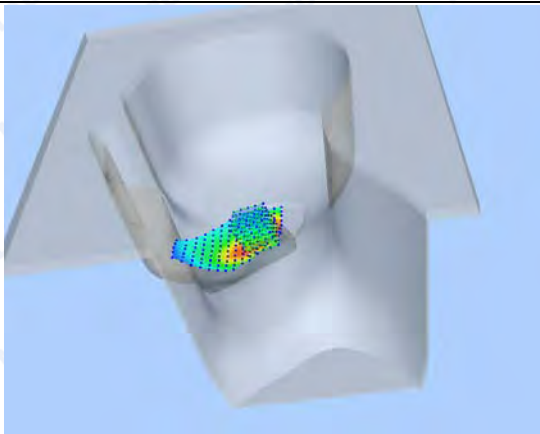

Hot spot position

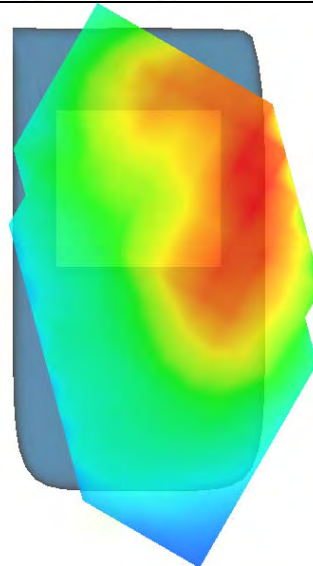

**MEASUREMENT 13**

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2015.02.03

Measurement duration: 9 minutes 34 seconds



A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Right Head
Device Position	Cheek
Band	GSM1900
Channels	High
Signal	GSM

B. SAR Measurement Results

High Band SAR (Channel 810):

Frequency (MHz)	1909.800000
Relative permittivity (real part)	39.868595
Conductivity (S/m)	1.433824
Power drift(%)	-2.470000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.99
Crest factor:	1:2

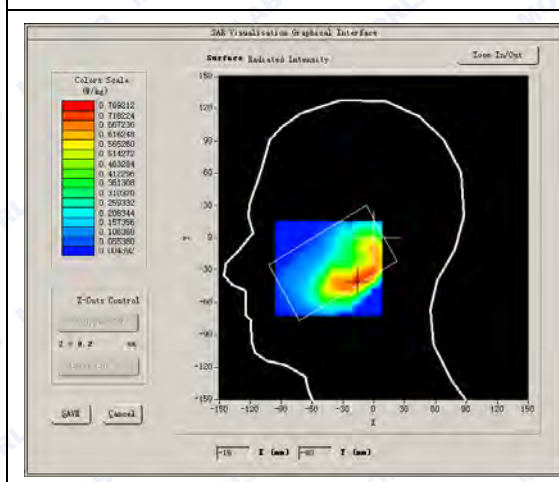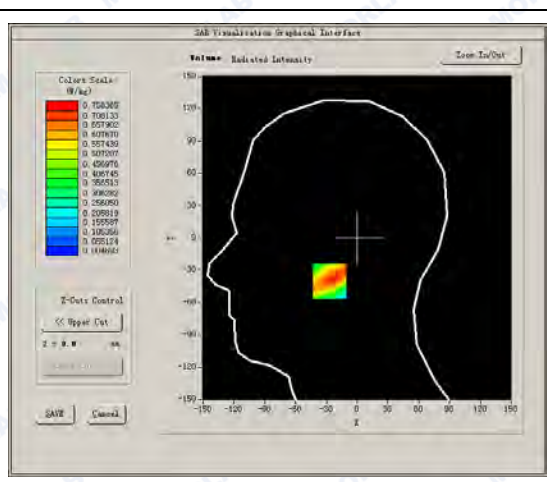SURFACE SAR**VOLUME SAR**




REPORT No. : SZ15010119S01

Maximum location: X=-16.00, Y=-40.00


SAR Peak: 1.34 W/kg

SAR 10g (W/Kg)	0.370329
SAR 1g (W/Kg)	0.735714


Z axis scan

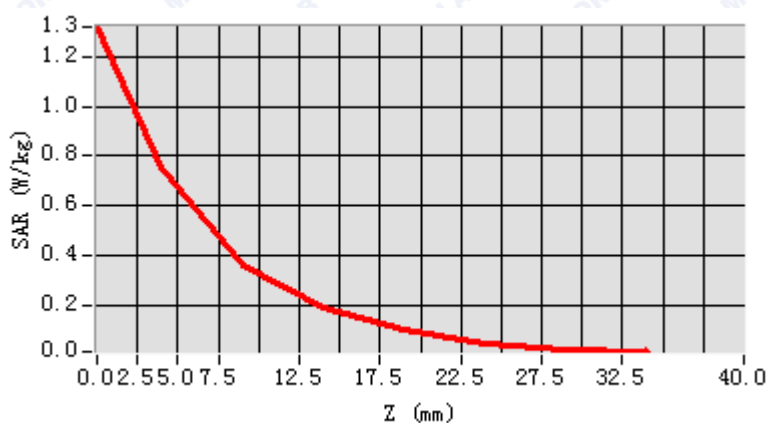

3D screen shot

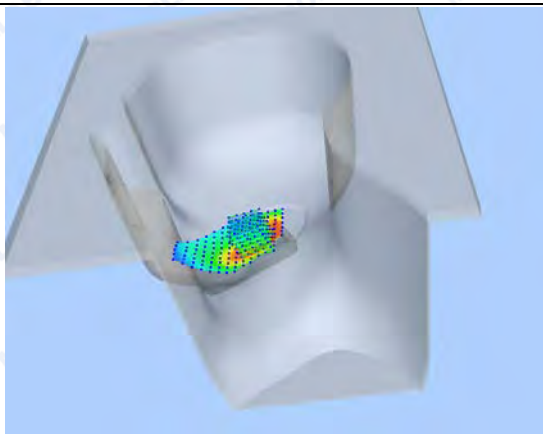

Hot spot position

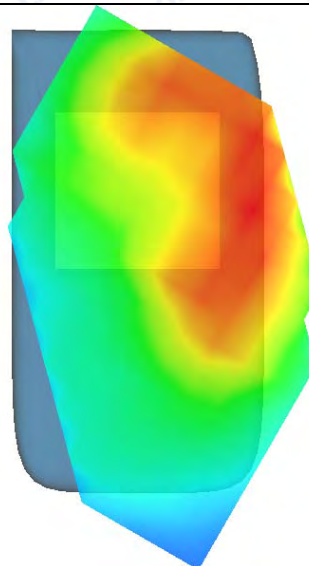

**MEASUREMENT 14**

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2015.02.03

Measurement duration: 9 minutes 24 seconds



A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	GSM1900
Channels	Low
Signal	GSM

B. SAR Measurement Results

Low Band SAR (Channel 512):

Frequency (MHz)	1850.200000
Relative permittivity (real part)	39.868595
Conductivity (S/m)	1.433824
Power drift(%)	1.390000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.00
Crest factor:	1:8

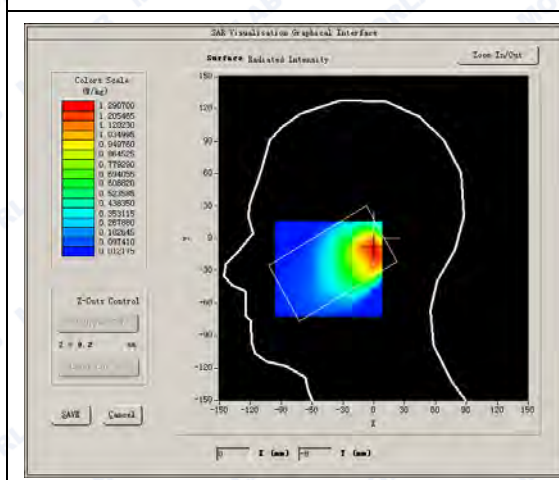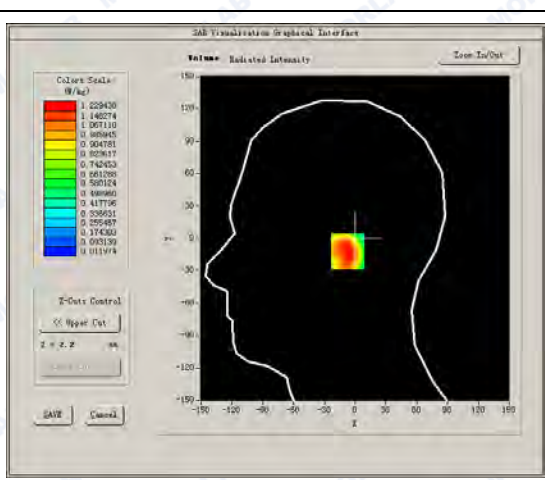SURFACE SAR**VOLUME SAR**




REPORT No. : SZ15010119S01

Maximum location: X=1.00, Y=-12.00


SAR Peak: 2.07 W/kg

SAR 10g (W/Kg)	0.641446
SAR 1g (W/Kg)	1.197338


Z axis scan

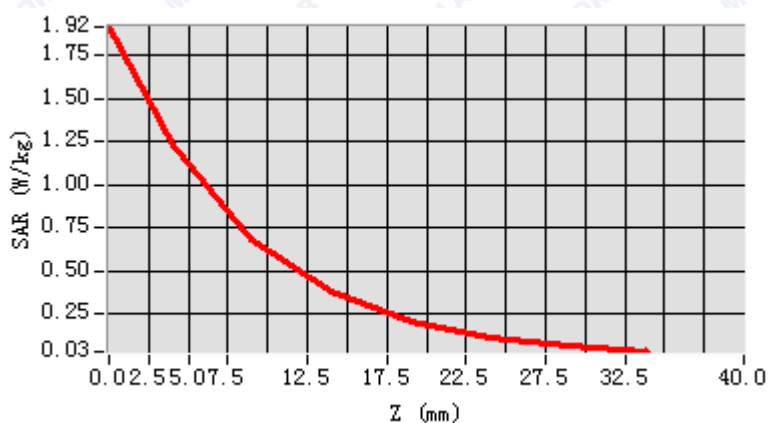

3D screen shot

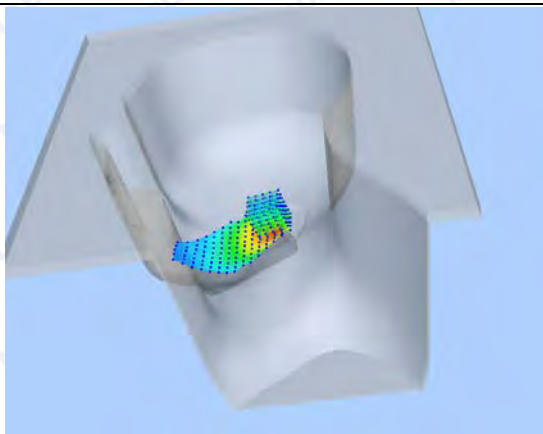

Hot spot position

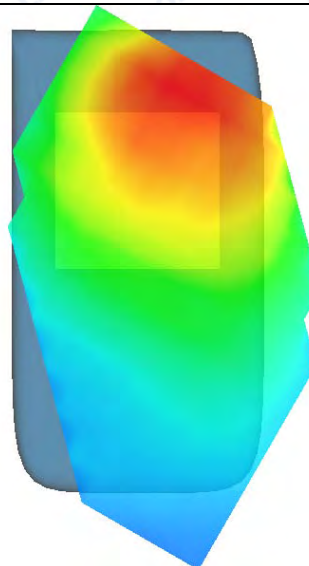

**MEASUREMENT 15**

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2015.02.03

Measurement duration: 8 minutes 7 seconds



A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	GSM1900
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 661):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	39.868595
Conductivity (S/m)	1.433824
Power drift(%)	-3.540000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.00
Crest factor:	1:8

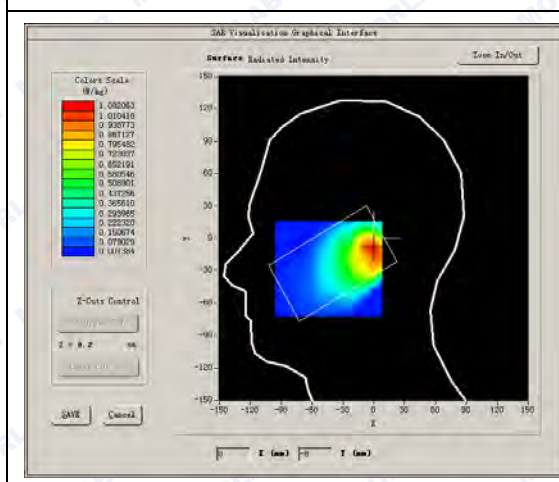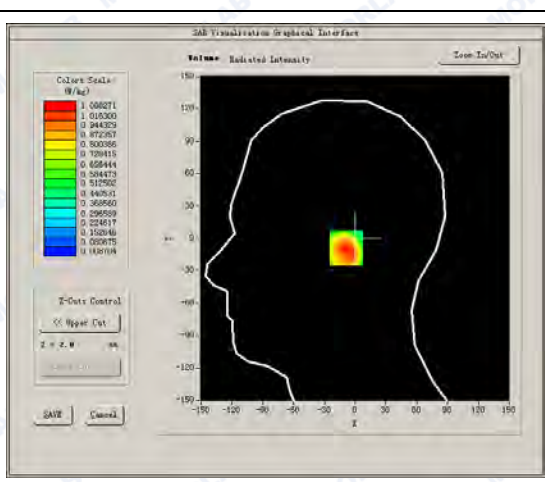SURFACE SAR**VOLUME SAR**




REPORT No. : SZ15010119S01

Maximum location: X=-1.00, Y=-9.00


SAR Peak: 1.72 W/kg

SAR 10g (W/Kg)	0.545166
SAR 1g (W/Kg)	1.026785


Z axis scan

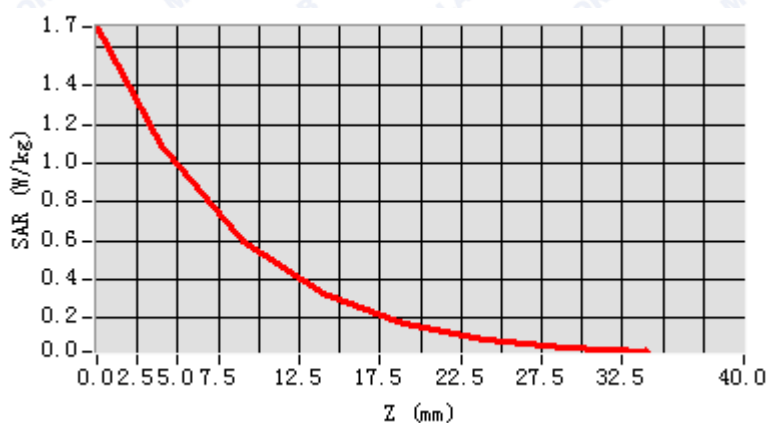

3D screen shot

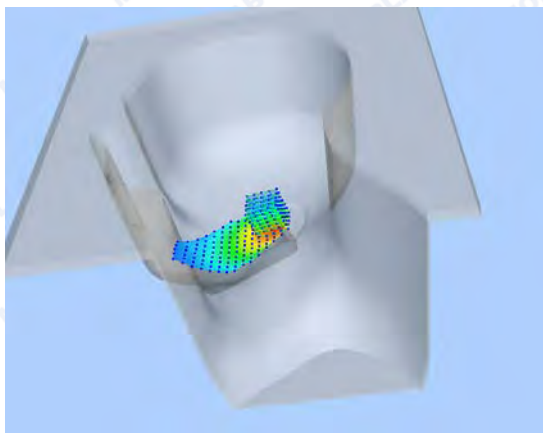

Hot spot position

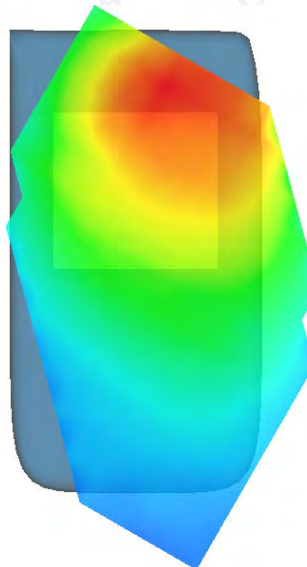

**MEASUREMENT 16**

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2015.02.03

Measurement duration: 9 minutes 13 seconds



A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	GSM1900
Channels	High
Signal	GSM

B. SAR Measurement Results

High Band SAR (Channel 810):

Frequency (MHz)	1909.800000
Relative permittivity (real part)	39.868595
Conductivity (S/m)	1.433824
Power drift(%)	-1.730000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.00
Crest factor:	1:8

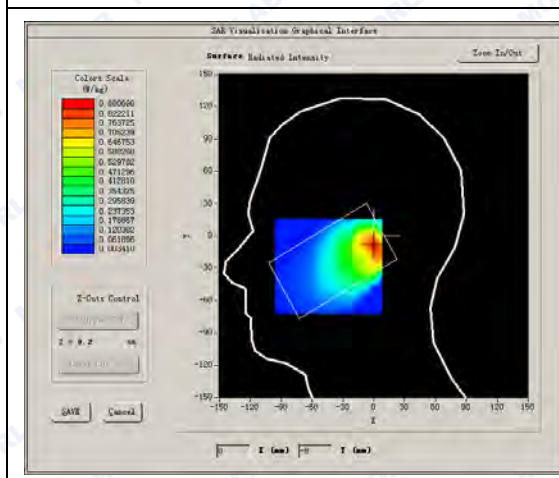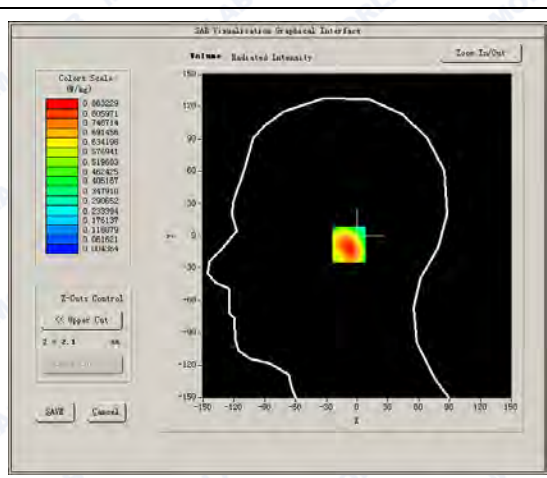SURFACE SAR**VOLUME SAR**




REPORT No. : SZ15010119S01

Maximum location: X=0.00, Y=-8.00


SAR Peak: 1.44 W/kg

SAR 10g (W/Kg)	0.431873
SAR 1g (W/Kg)	0.828750


Z axis scan

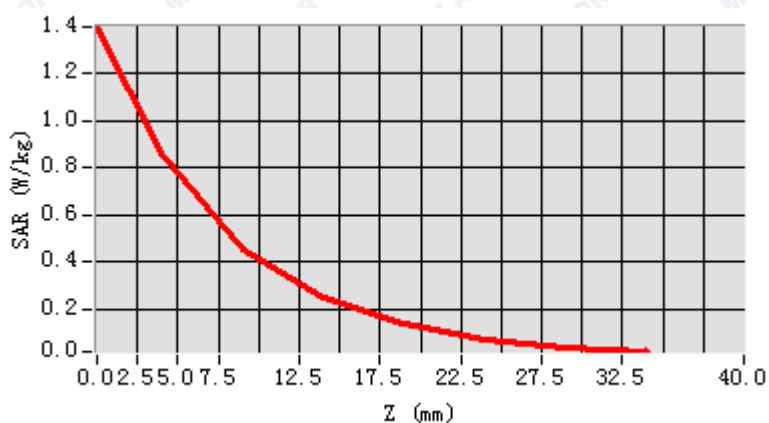

3D screen shot

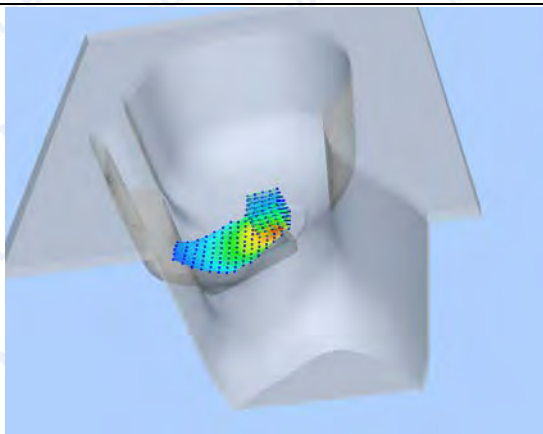

Hot spot position

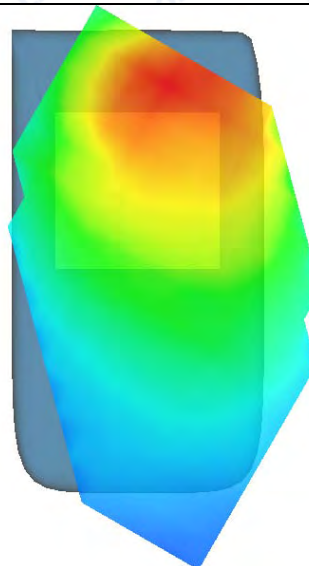

**MEASUREMENT 17**

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2015.02.03

Measurement duration: 7 minutes 47 seconds



A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	GSM1900
Channels	Low
Signal	GSM

B. SAR Measurement Results

Low Band SAR (Channel 512):

Frequency (MHz)	1850.200000
Relative permittivity (real part)	39.868595
Conductivity (S/m)	1.433824
Power drift(%)	2.000000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.00
Crest factor:	1:8

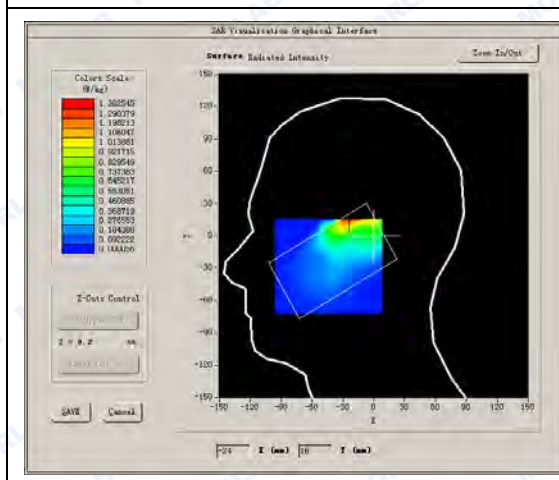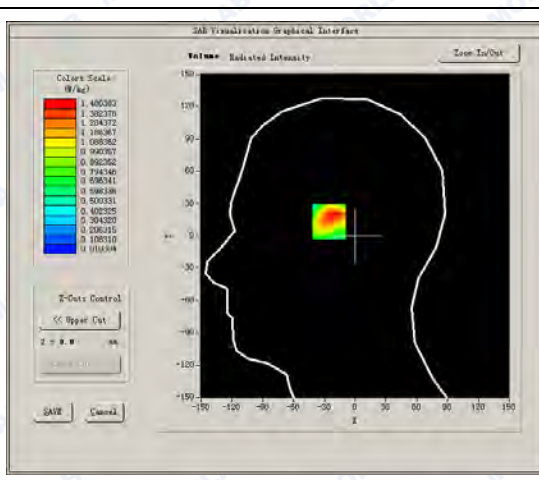SURFACE SAR**VOLUME SAR**




REPORT No. : SZ15010119S01

Maximum location: X=-24.00, Y=16.00


SAR Peak: 2.47 W/kg

SAR 10g (W/Kg)	0.711017
SAR 1g (W/Kg)	1.308132


Z axis scan

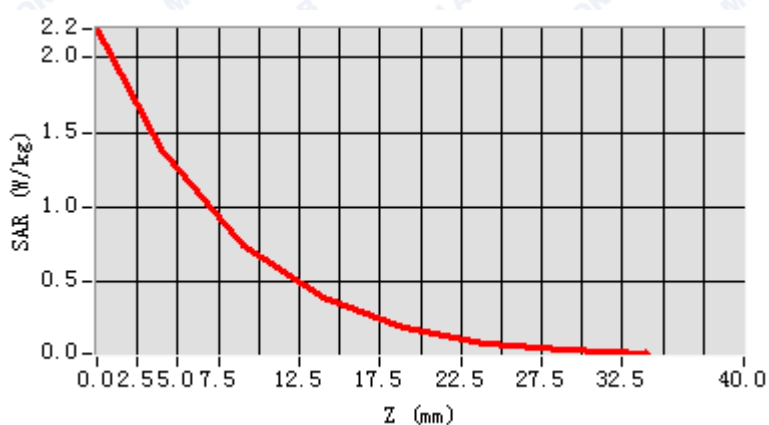

3D screen shot

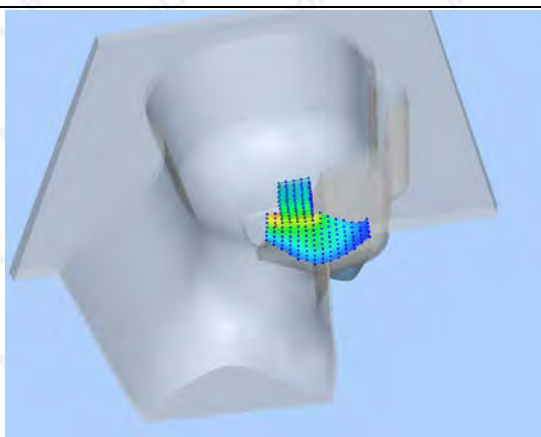

Hot spot position

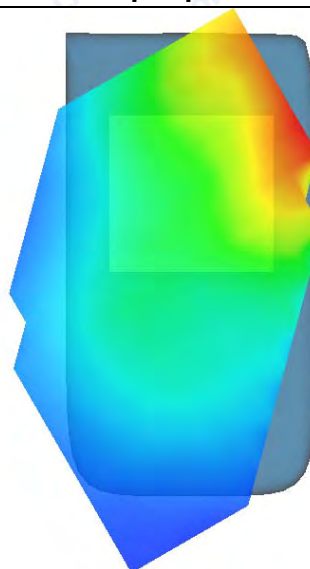

**MEASUREMENT 18**

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2015.02.03

Measurement duration: 9 minutes 32 seconds



A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Left head
Device Position	Cheek
Band	GSM1900
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 661):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	39.868595
Conductivity (S/m)	1.433824
Power drift(%)	3.550000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.17
Crest factor:	1:8

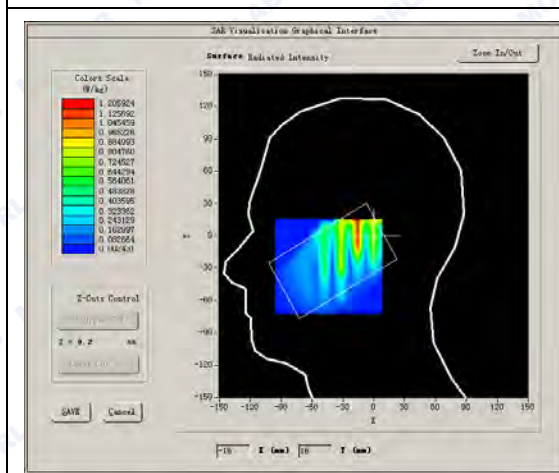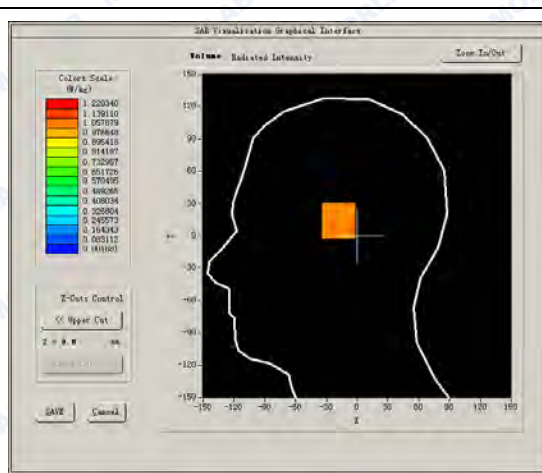SURFACE SAR**VOLUME SAR**




REPORT No. : SZ15010119S01

Maximum location: X=-16.00, Y=16.00


SAR Peak: 2.16 W/kg

SAR 10g (W/Kg)	0.739475
SAR 1g (W/Kg)	1.158623


Z axis scan

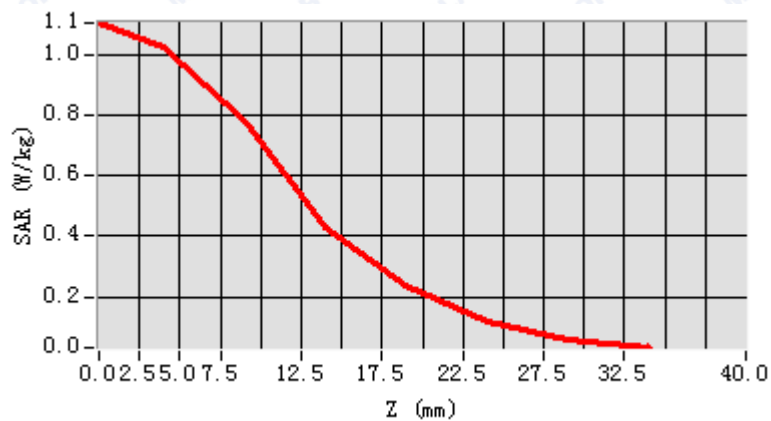

3D screen shot

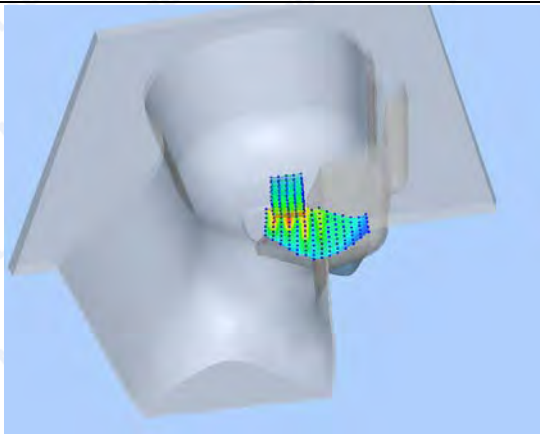

Hot spot position

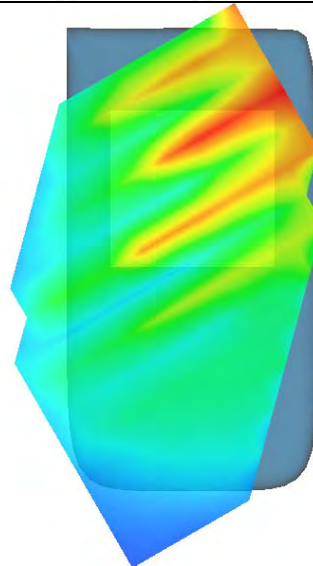

**MEASUREMENT 19**

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2015.02.03

Measurement duration: 9 minutes 30 seconds



A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Left head
Device Position	Cheek
Band	GSM1900
Channels	High
Signal	GSM

B. SAR Measurement Results

High Band SAR (Channel 810):

Frequency (MHz)	1909.800000
Relative permittivity (real part)	39.868595
Conductivity (S/m)	1.433824
Power drift(%)	-1.370000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.17
Crest factor:	1:2

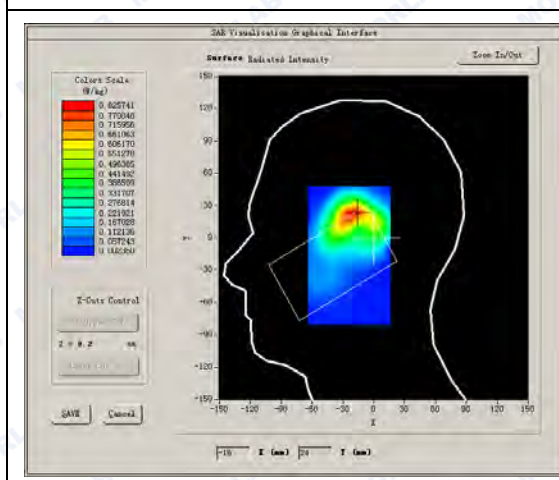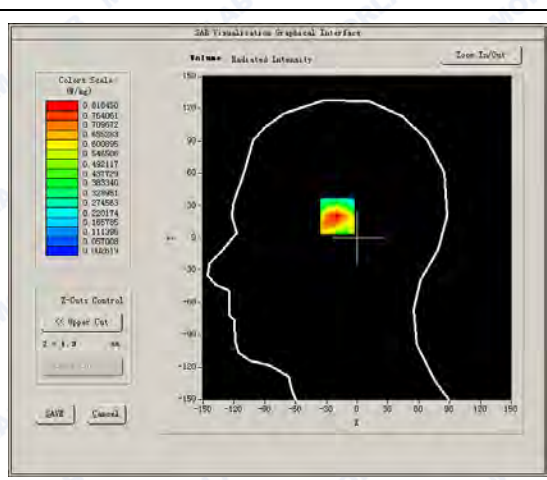SURFACE SAR**VOLUME SAR**




REPORT No. : SZ15010119S01

Maximum location: X=-18.00, Y=24.00


SAR Peak: 1.45 W/kg

SAR 10g (W/Kg)	0.378446
SAR 1g (W/Kg)	0.789240


Z axis scan

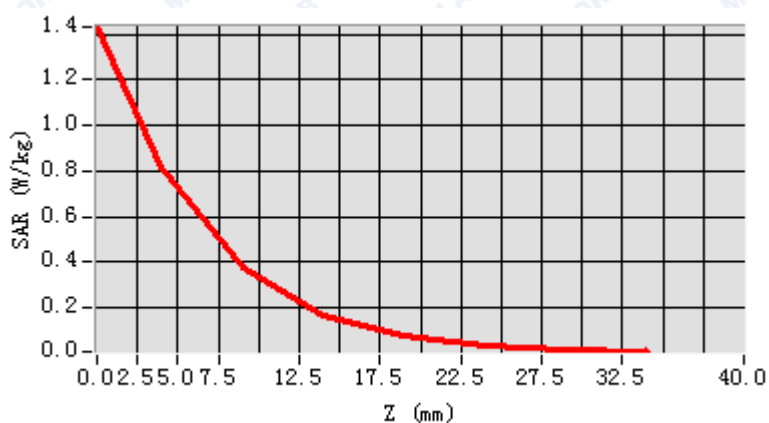

3D screen shot

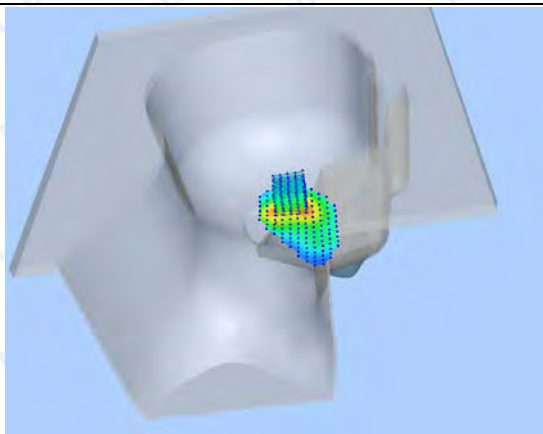

Hot spot position

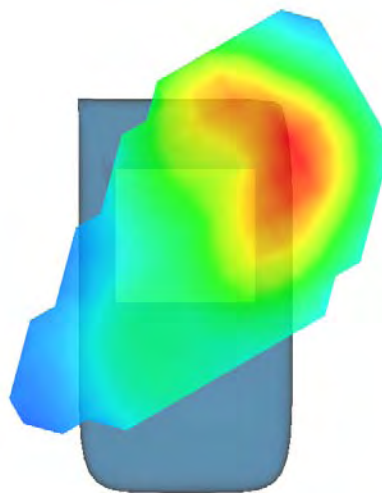

**MEASUREMENT 20**

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2015.02.03

Measurement duration: 9 minutes 30 seconds



A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Left head
Device Position	Tilt
Band	GSM1900
Channels	Low
Signal	GSM

B. SAR Measurement Results

Low Band SAR (Channel 512):

Frequency (MHz)	1850.200000
Relative permittivity (real part)	39.868595
Conductivity (S/m)	1.433824
Power drift(%)	0.520000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.17
Crest factor:	1:2

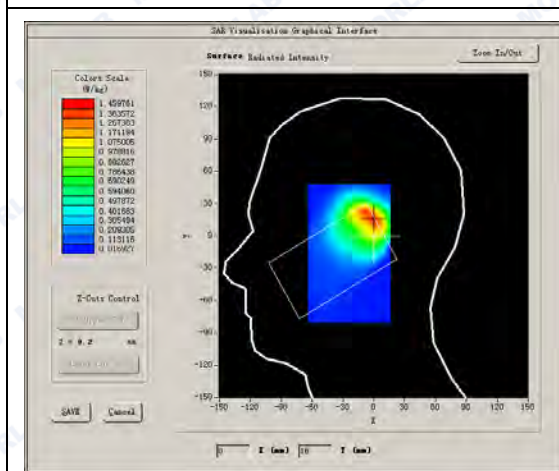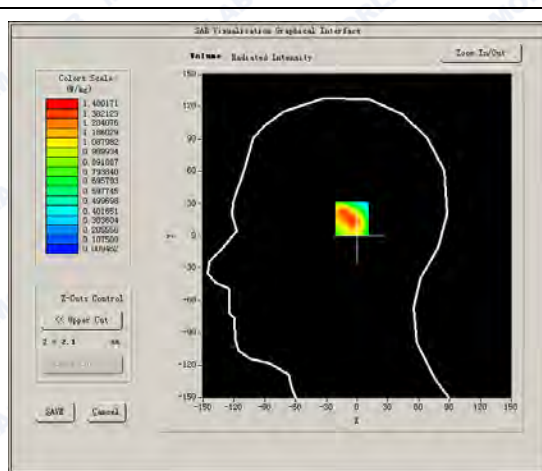SURFACE SAR**VOLUME SAR**




REPORT No. : SZ15010119S01

Maximum location: X=0.00, Y=16.00


SAR Peak: 2.65 W/kg

SAR 10g (W/Kg)	0.690977
SAR 1g (W/Kg)	1.305799


Z axis scan

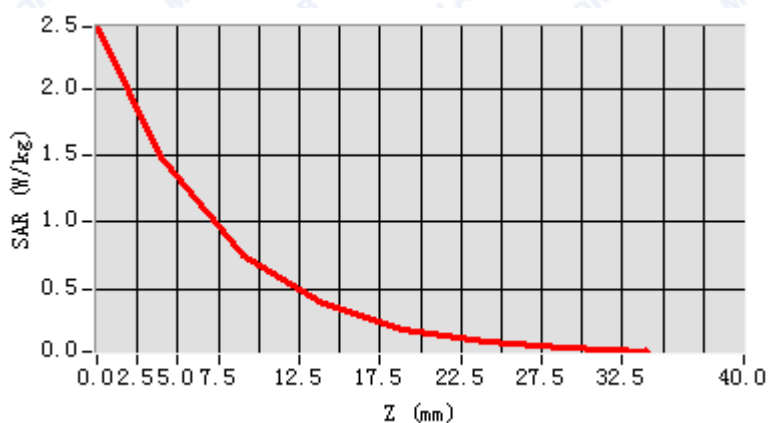

3D screen shot

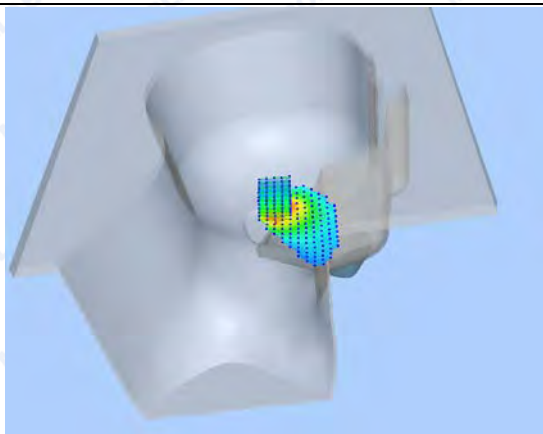

Hot spot position

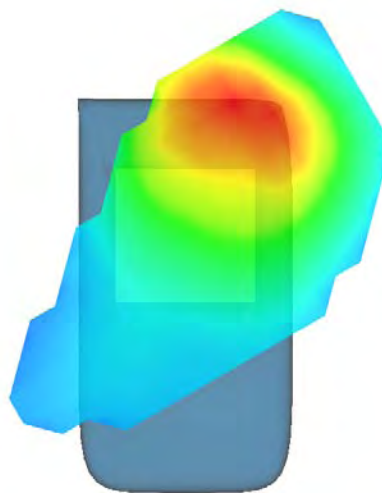



REPORT No. : SZ15010119S01

MEASUREMENT 21

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2015.02.03

Measurement duration: 9 minutes 30 seconds



A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Left head
Device Position	Tilt
Band	GSM1900
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 661):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	39.868595
Conductivity (S/m)	1.433824
Power drift(%)	-3.770000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.17
Crest factor:	1:2

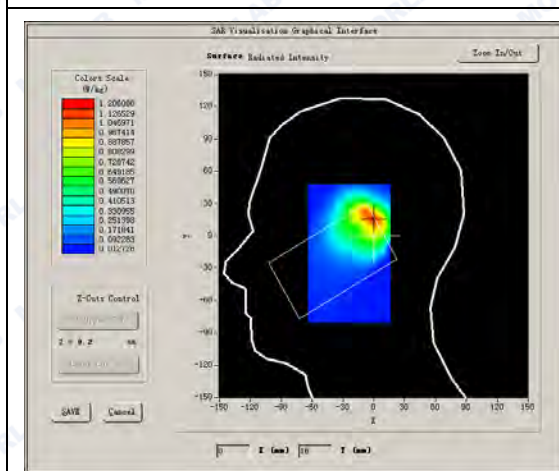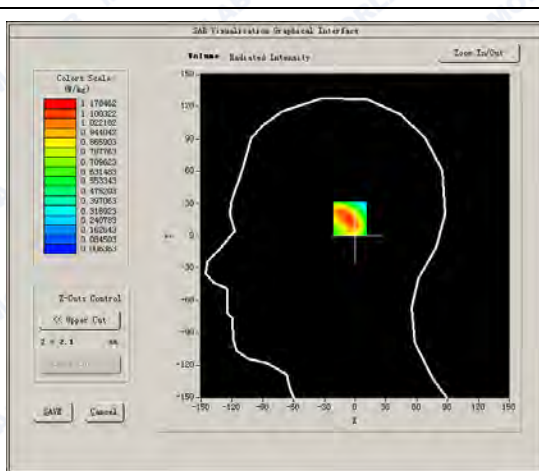SURFACE SAR**VOLUME SAR**




REPORT No. : SZ15010119S01

Maximum location: X=0.00, Y=16.00


SAR Peak: 2.03 W/kg

SAR 10g (W/Kg)	0.565057
SAR 1g (W/Kg)	1.114465


Z axis scan

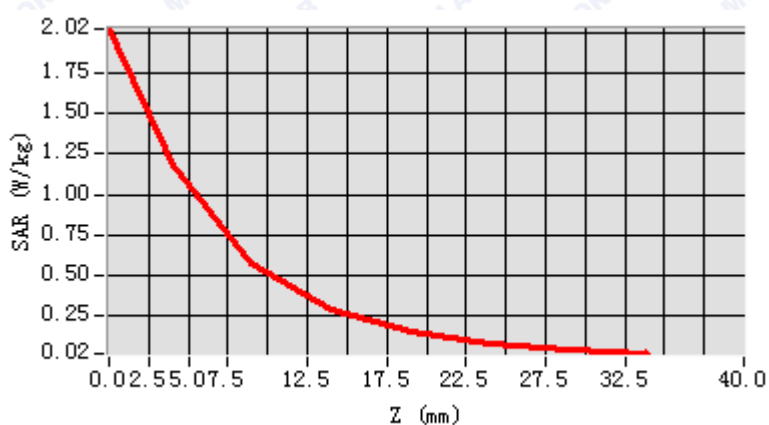

3D screen shot

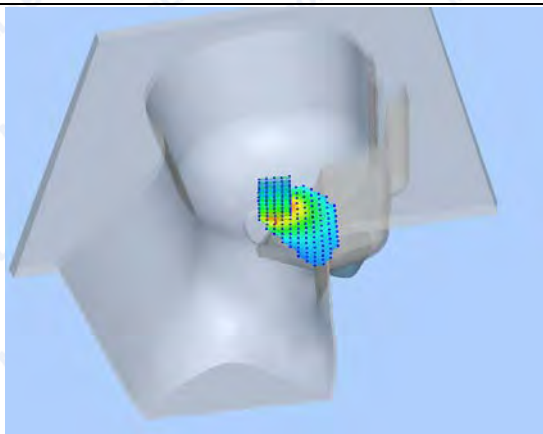

Hot spot position

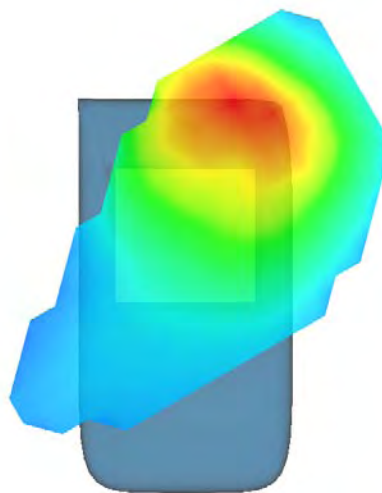

**MEASUREMENT 22**

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2015.02.03

Measurement duration: 9 minutes 31 seconds



A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Left head
Device Position	Tilt
Band	GSM1900
Channels	High
Signal	GSM

B. SAR Measurement Result

High Band SAR (Channel 810):

Frequency (MHz)	1880.800000
Relative permittivity (real part)	39.868595
Conductivity (S/m)	1.433824
Power drift(%)	0.260000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.17
Crest factor:	1:2

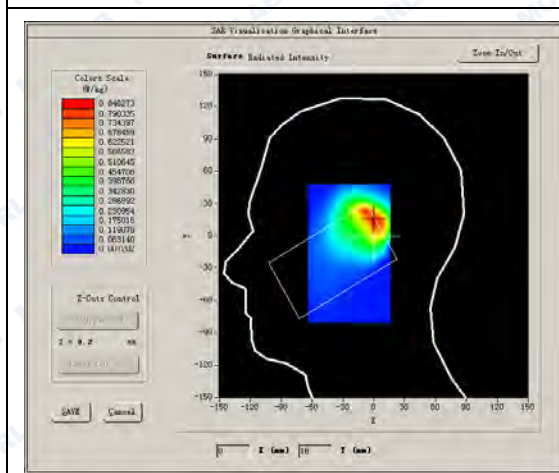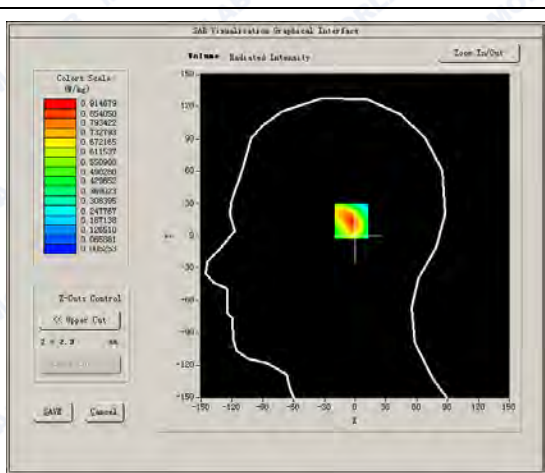SURFACE SAR**VOLUME SAR**




REPORT No. : SZ15010119S01

Maximum location: X=2.00, Y=14.00


SAR Peak: 1.53 W/kg

SAR 10g (W/Kg)	0.422243
SAR 1g (W/Kg)	0.852131


Z axis scan

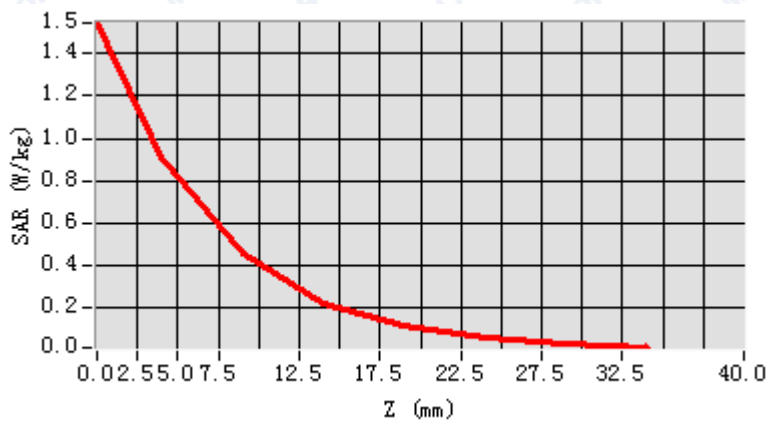

3D screen shot

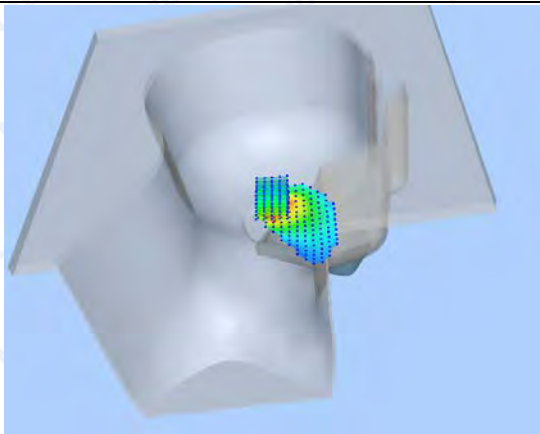

Hot spot position

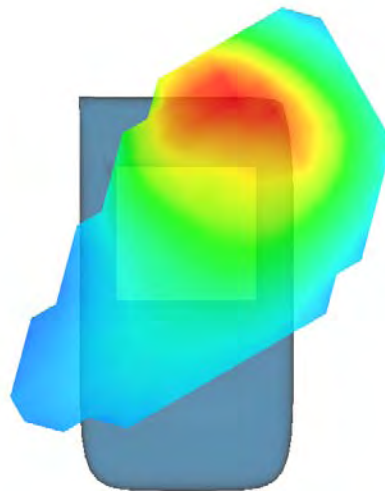

**MEASUREMENT 23**

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2015.02.03

Measurement duration: 9 minutes 30 seconds



A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM1900
Channels	Low
Signal	GSM

B. SAR Measurement Results

Low Band SAR (Channel 512):

Frequency (MHz)	1850.200000
Relative permittivity (real part)	53.312514
Conductivity (S/m)	1.503025
Power drift(%)	0.520000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.17
Crest factor:	1:2

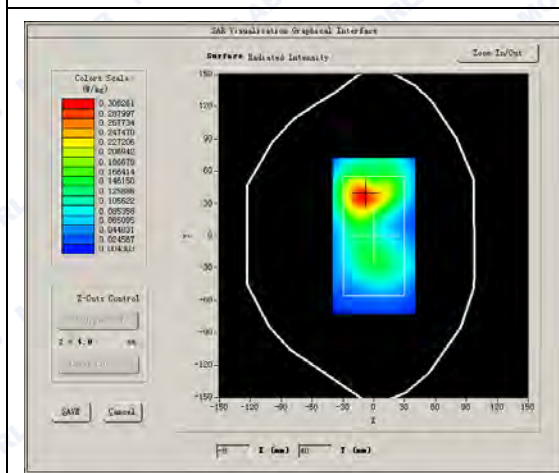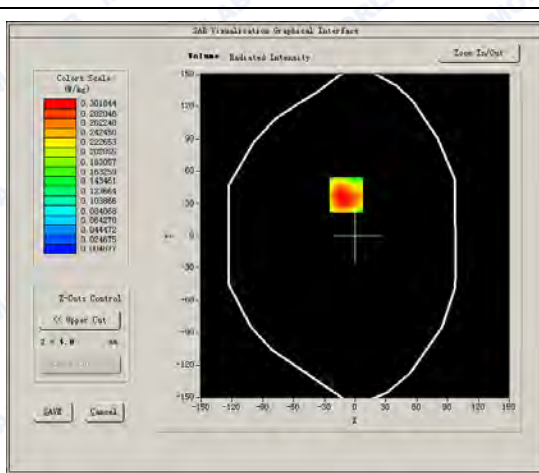SURFACE SAR**VOLUME SAR**




REPORT No. : SZ15010119S01

Maximum location: X=-9.00, Y=38.00


SAR Peak: 0.55 W/kg

SAR 10g (W/Kg)	0.177291
SAR 1g (W/Kg)	0.326969


Z axis scan

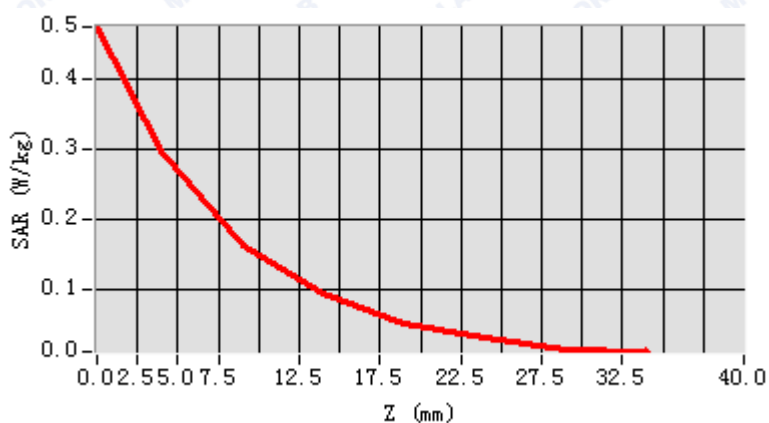

3D screen shot

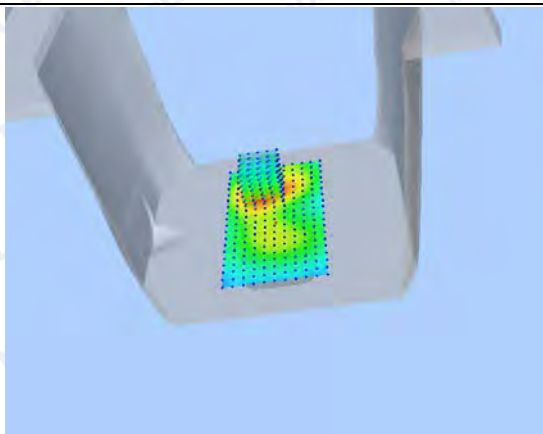

Hot spot position

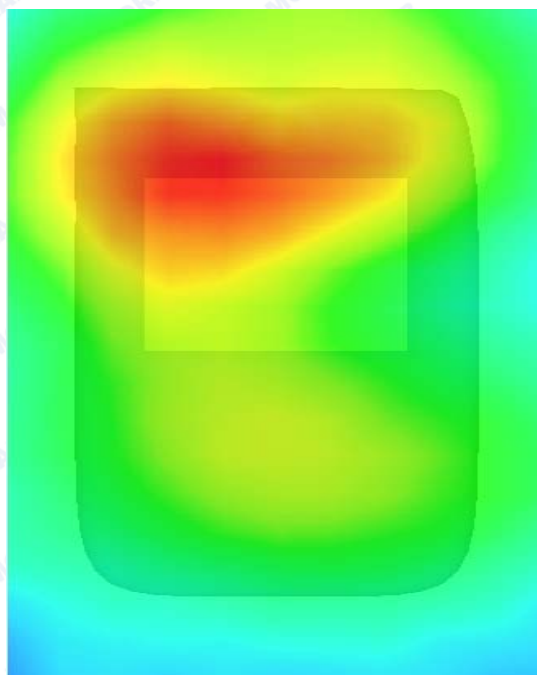

**MEASUREMENT 24**

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2015.02.03

Measurement duration: 9 minutes 16 seconds



A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM1900
Channels	Low
Signal	GSM

B. SAR Measurement Results

Low Band SAR (Channel 512):

Frequency (MHz)	1850.200000
Relative permittivity (real part)	53.312514
Conductivity (S/m)	1.503025
Power drift (%)	-1.700000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.3°C
ConvF:	6.73
Crest factor:	1:1

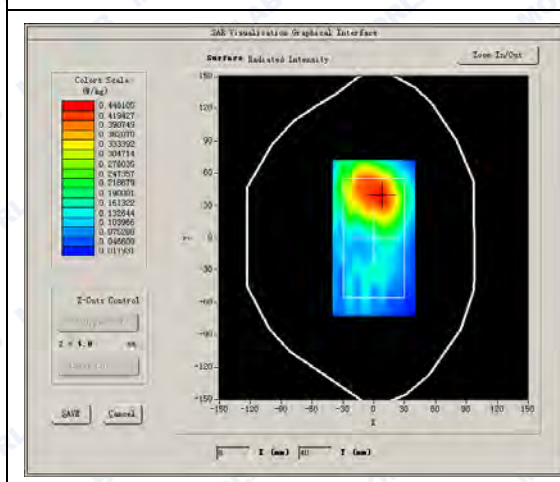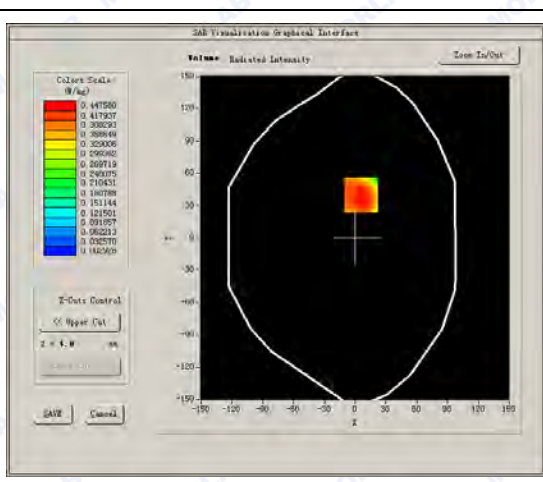SURFACE SAR**VOLUME SAR**




REPORT No. : SZ15010119S01

Maximum location: X=6.00, Y=40.00


SAR Peak: 0.85 W/kg

SAR 10g (W/Kg)	0.256178
SAR 1g (W/Kg)	0.477921


Z axis scan

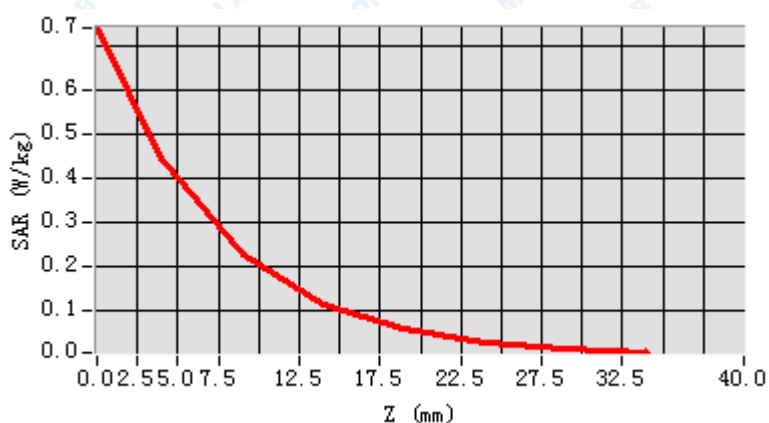

3D screen shot

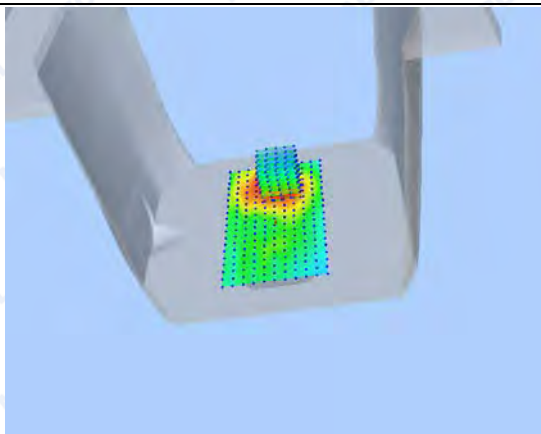

Hot spot position

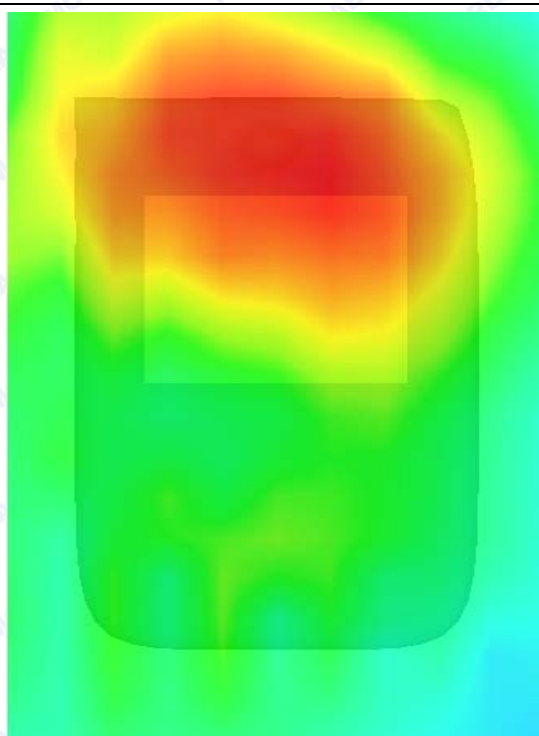

**MEASUREMENT 25**

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2015.02.03

Measurement duration: 8 minutes 13 seconds



A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM1900
Channels	Low
Signal	GPRS

B. SAR Measurement Results

Low Band SAR (Channel 512):

Frequency (MHz)	1850.200000
Relative permittivity (real part)	53.312514
Conductivity (S/m)	1.503025
Power drift (%)	-3.430000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.3°C
ConvF:	6.73
Crest factor:	1:1

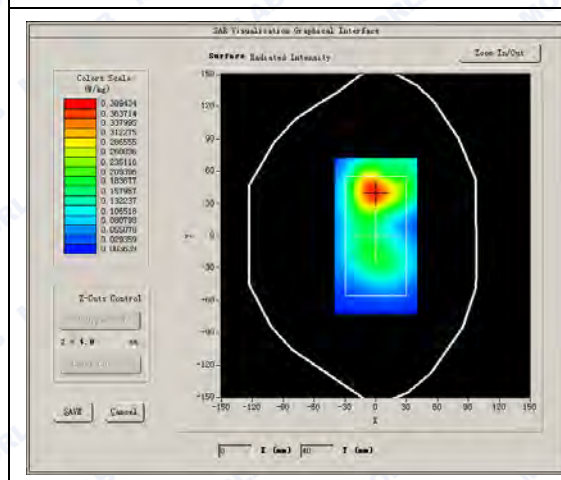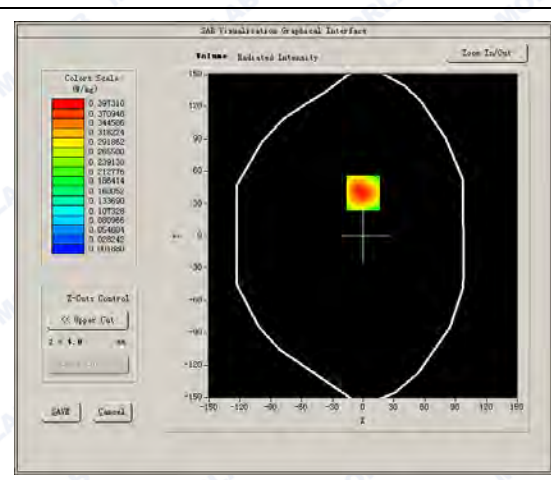SURFACE SAR**VOLUME SAR**




REPORT No. : SZ15010119S01

Maximum location: X=0.00, Y=40.00


SAR Peak: 0.64 W/kg

SAR 10g (W/Kg)	0.210691
SAR 1g (W/Kg)	0.394921


Z axis scan

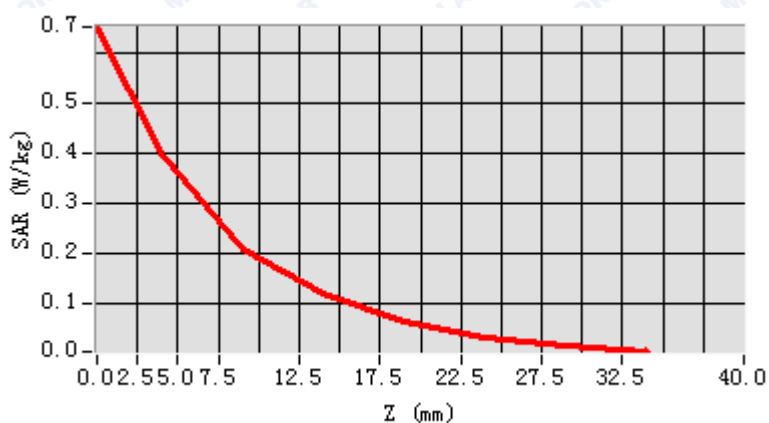

3D screen shot

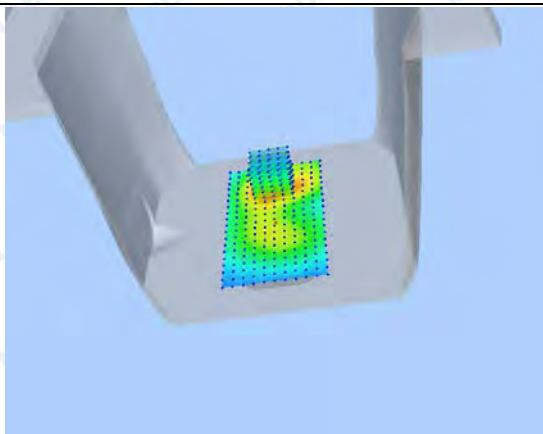

Hot spot position

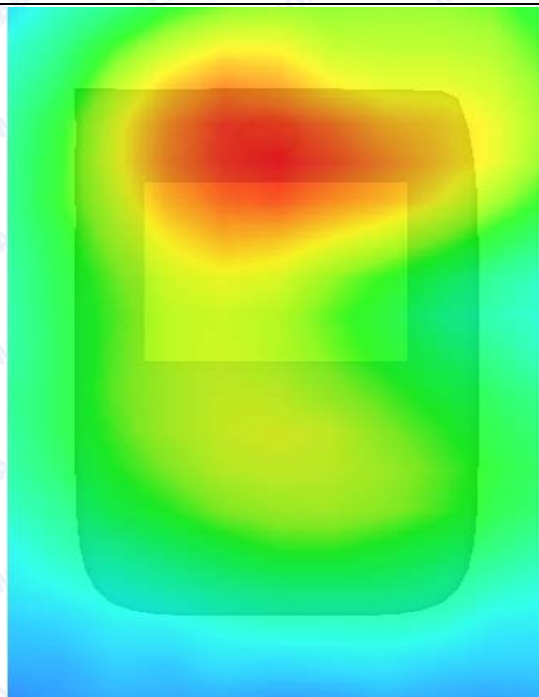

**MEASUREMENT 26**

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2015.02.03

Measurement duration: 8 minutes 59 seconds



A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM1900
Channels	Low
Signal	GPRS

B. SAR Measurement Results

Low Band SAR (Channel 512):

Frequency (MHz)	1850.200000
Relative permittivity (real part)	53.312514
Conductivity (S/m)	1.503025
Power drift (%)	3.940000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.3°C
ConvF:	6.73
Crest factor:	1:1

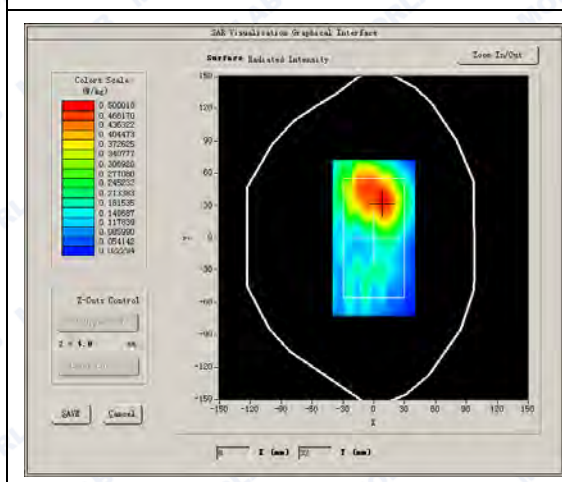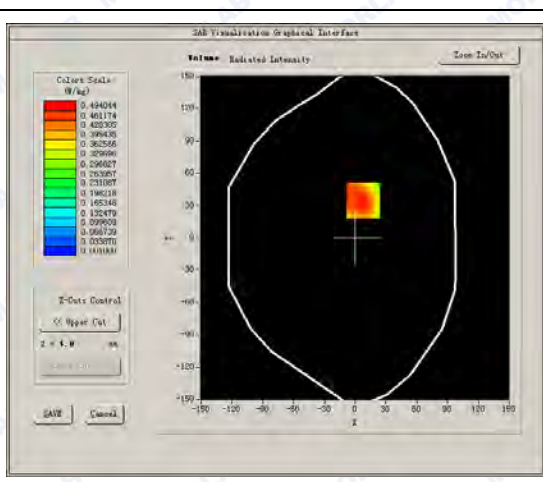SURFACE SAR**VOLUME SAR**




REPORT No. : SZ15010119S01

Maximum location: X=8.00, Y=35.00


SAR Peak: 0.83 W/kg

SAR 10g (W/Kg)	0.263282
SAR 1g (W/Kg)	0.490700


Z axis scan

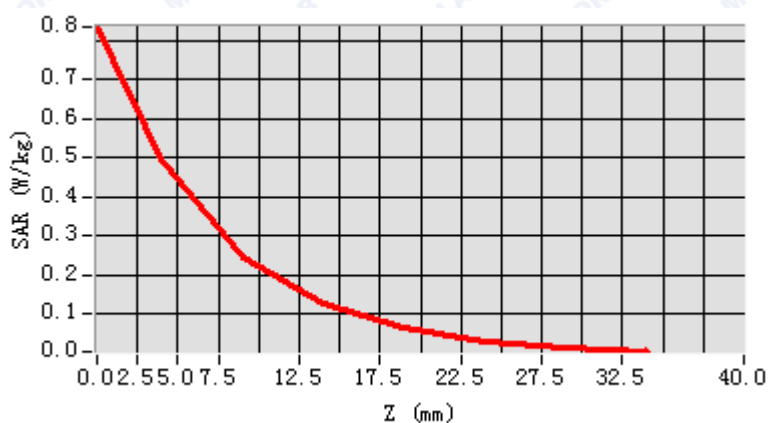

3D screen shot

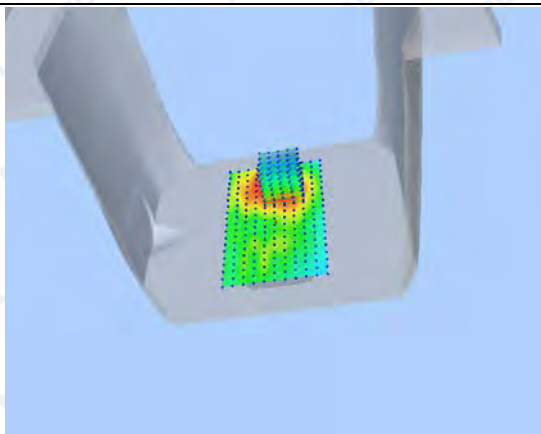

Hot spot position

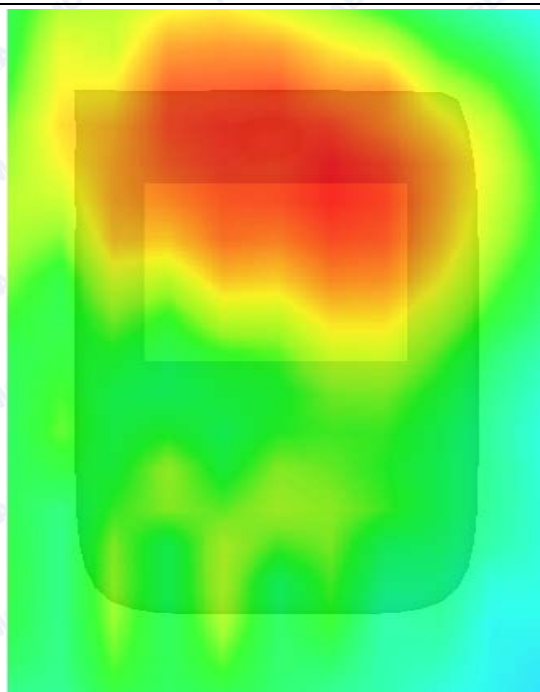



REPORT No. : SZ15010119S01

System Performance Check Data(Head)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2015.02.03

Measurement duration: 13 minutes 27 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	
Band	835MHz
Channels	
Signal	CW

B. SAR Measurement Results


Band SAR

Frequency (MHz)	826.400000
Relative permittivity (real part)	41.371485
Conductivity (S/m)	0.907374
Power drift (%)	-0.310000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.73
Crest factor:	1:1

SURFACE SAR

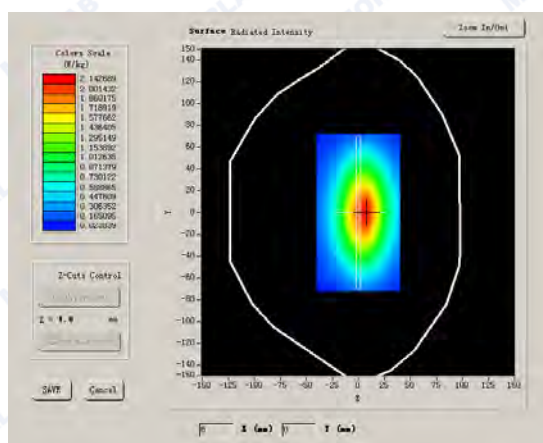

VOLUME SAR

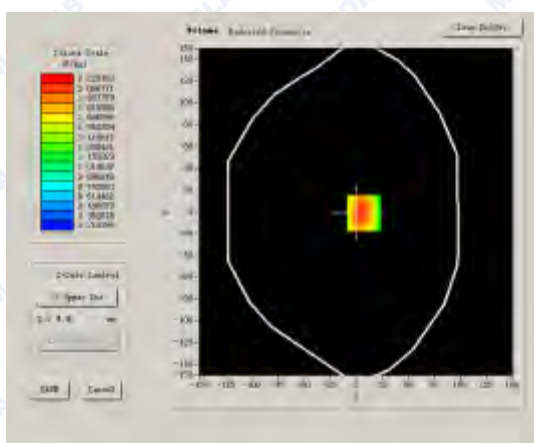



REPORT No. : SZ15010119S01


Maximum location: X=7.00, Y=-1.00

SAR 10g (W/Kg)	1.556481
SAR 1g (W/Kg)	2.446424


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	2.5209	1.6629	1.1437	0.8075	0.5889	0.4143


SAR, Z Axis Scan (X = 7, Y = -1)

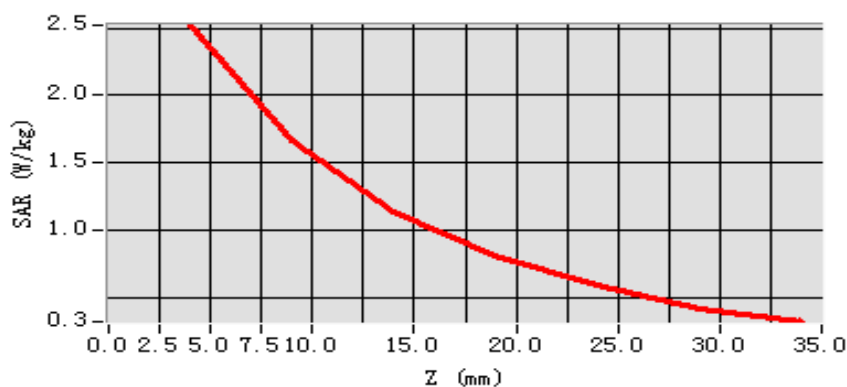

3D scene shot

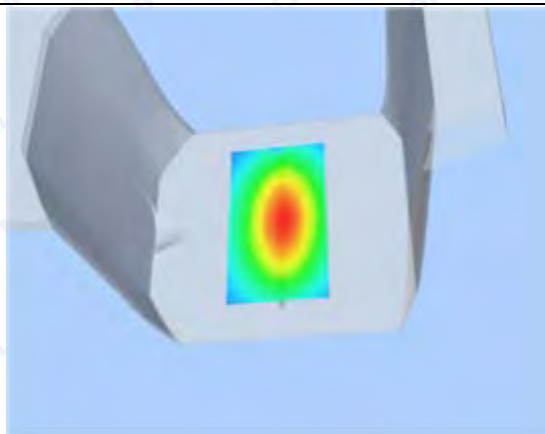

Hot spot position

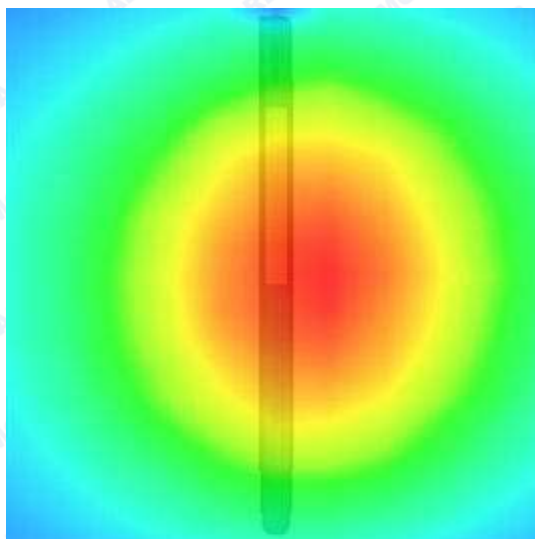



System Performance Check Data(Body)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2015.02.03

Measurement duration: 13 minutes 27 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	
Band	835MHz
Channels	
Signal	CW

B. SAR Measurement Results


Band SAR

Frequency (MHz)	826.400000
Relative permittivity (real part)	56.123528
Conductivity (S/m)	0.931684
Power drift (%)	-1.430000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.99
Crest factor:	1:1

SURFACE SAR

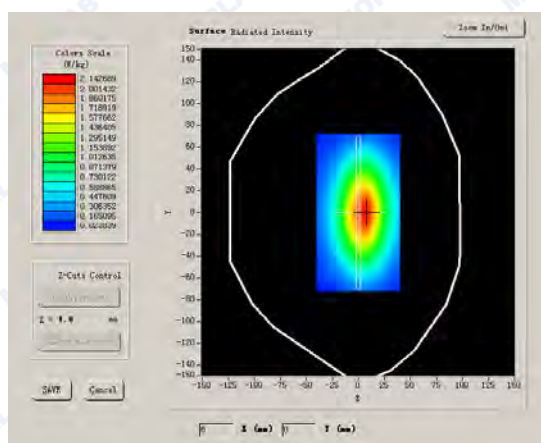

VOLUME SAR

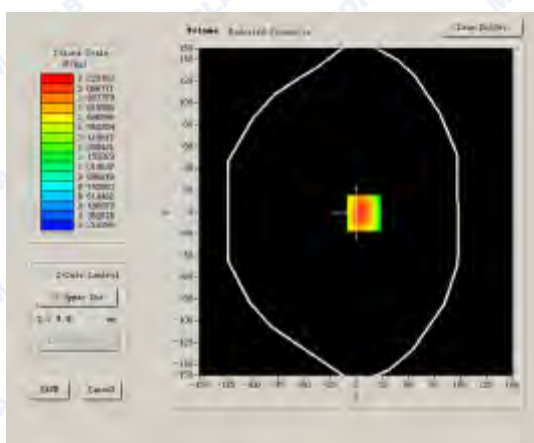



REPORT No. : SZ15010119S01


Maximum location: X=7.00, Y=-1.00

SAR 10g (W/Kg)	1.514694
SAR 1g (W/Kg)	2.488727


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	2.5209	1.6629	1.1437	0.8075	0.5889	0.4143


SAR, Z Axis Scan (X = 7, Y = -1)

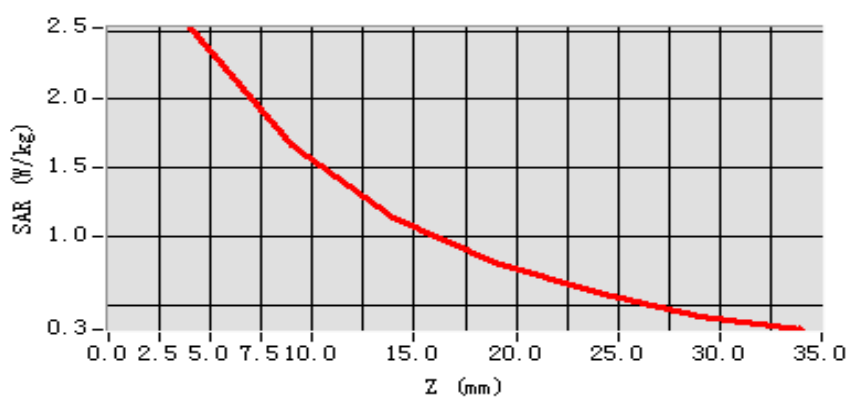

3D scene shot

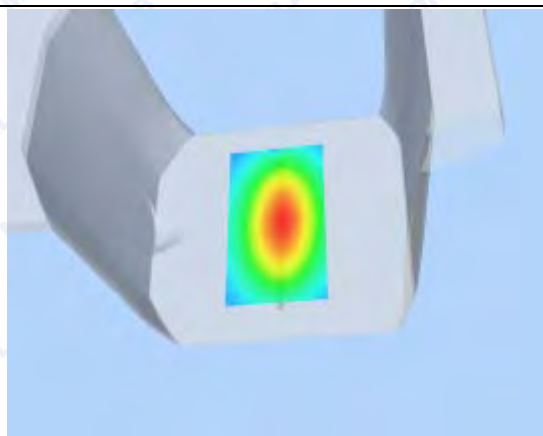

Hot spot position

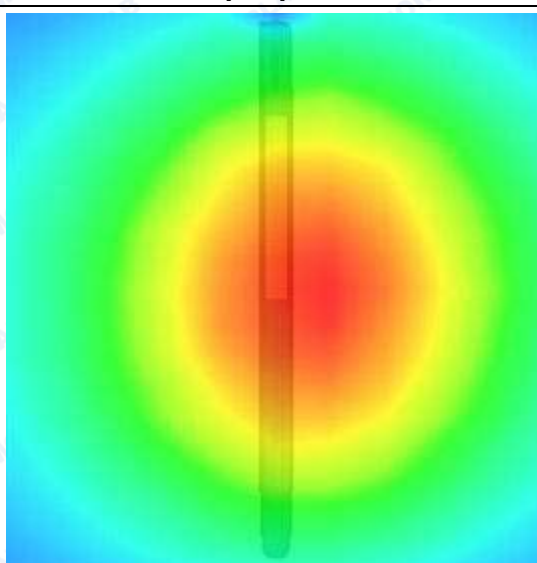



System Performance Check Data(Head)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2015.02.03

Measurement duration: 13 minutes 27 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	
Band	1900MHz
Channels	
Signal	CW

B. SAR Measurement Results


Band SAR

Frequency (MHz)	1900.000000
Relative permittivity (real part)	39.874286
Conductivity (S/m)	1.432495
Power drift (%)	-1.290000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.00
Crest factor:	1:1

SURFACE SAR

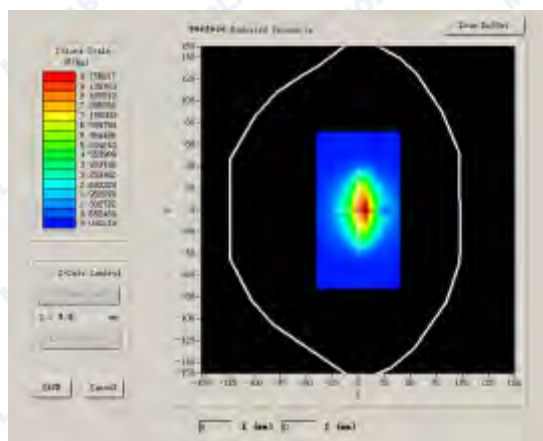

VOLUME SAR

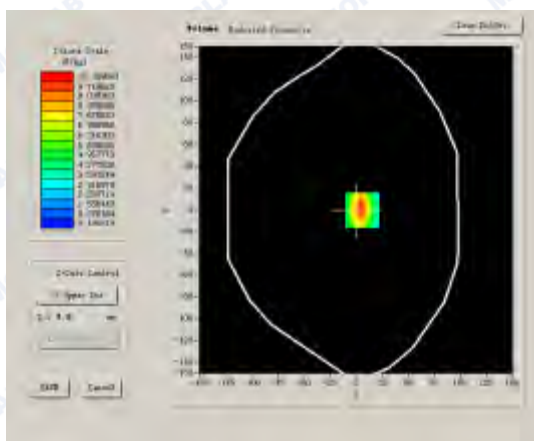



REPORT No. : SZ15010119S01


Maximum location: X=6.00, Y=0.00

SAR 10g (W/Kg)	6.312481
SAR 1g (W/Kg)	9.653057


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	10.6419	6.0043	3.7297	2.2606	1.5119	0.9792


SAR, Z Axis Scan (X = 6, Y = 0)

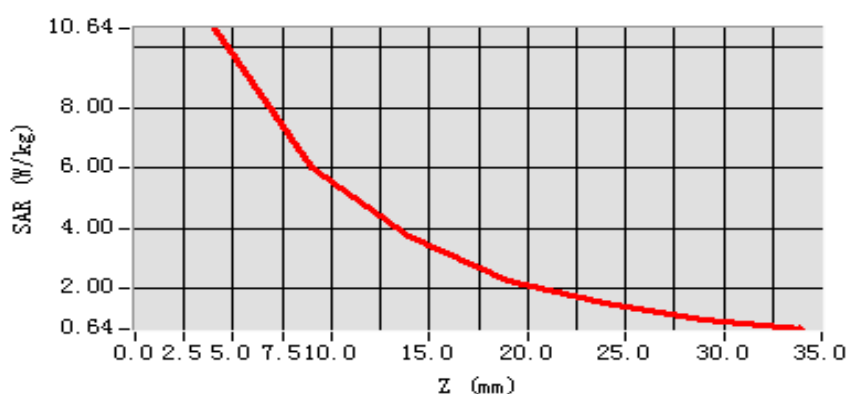

3D scene shot

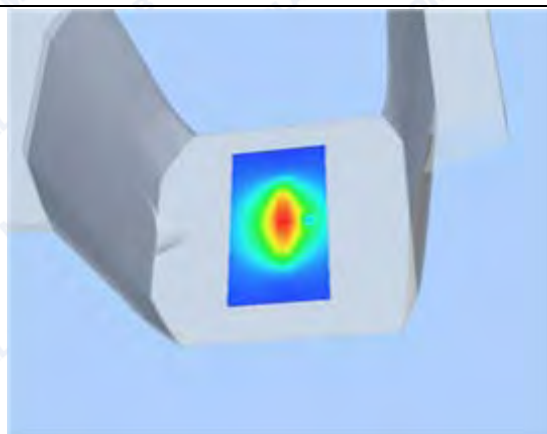

Hot spot position

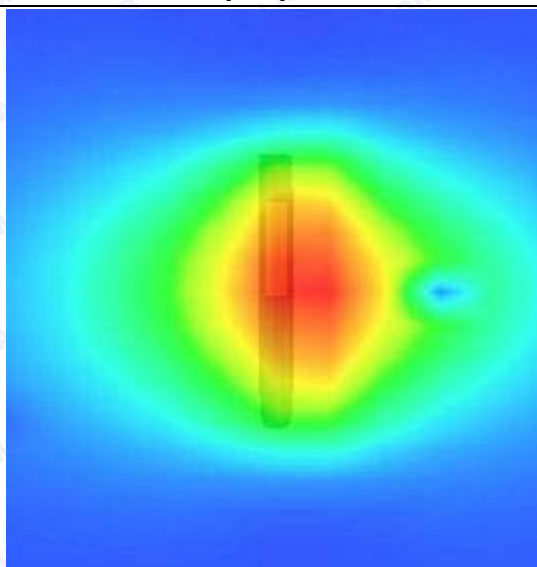

**System Performance Check Data(Body)**

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2015.02.03



Measurement duration: 13 minutes 26 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	
Band	1900MHz
Channels	
Signal	CW

B. SAR Measurement Results**Band SAR**

Frequency (MHz)	1900.000000
Relative permittivity (real part)	53.314962
Conductivity (S/m)	1.496849
Power drift (%)	-0.920000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.17
Crest factor:	1:1

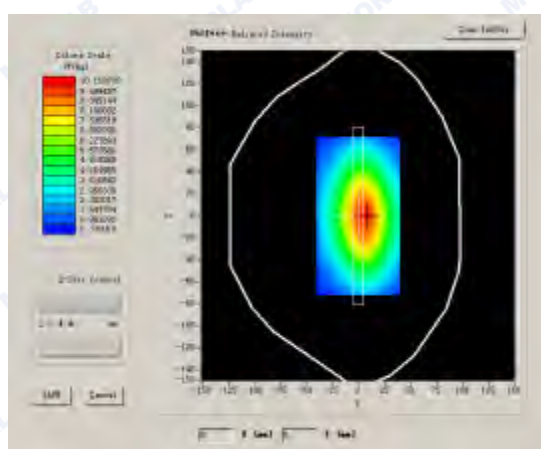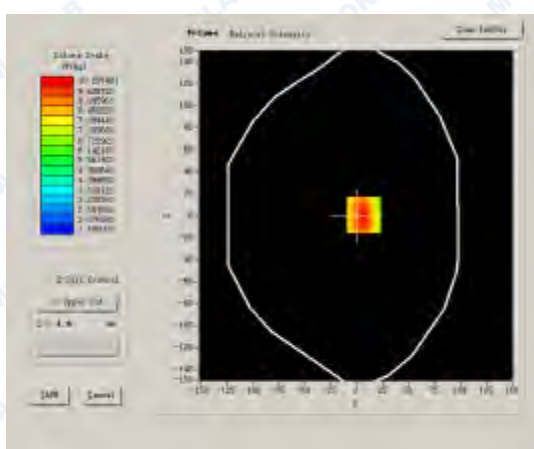SURFACE SAR**VOLUME SAR**



REPORT No. : SZ15010119S01


Maximum location: X=7.00, Y=1.00

SAR 10g (W/Kg)	6.474628
SAR 1g (W/Kg)	9.920623


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	10.2075	7.3996	5.4654	4.1101	3.1286	2.4128


SAR, Z Axis Scan (X = 7, Y = 1)

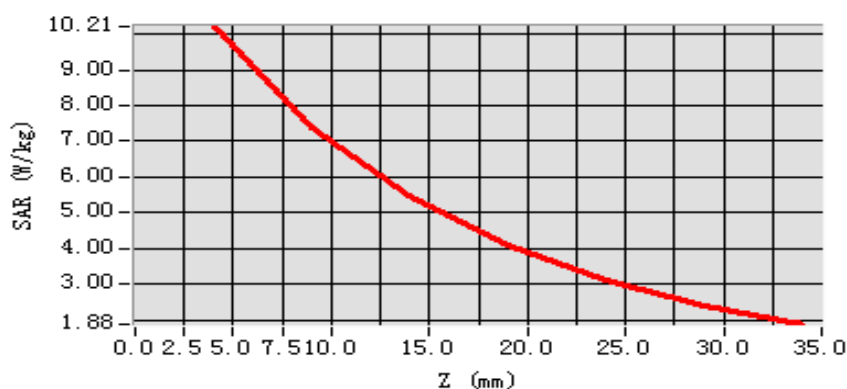

3D scene shot

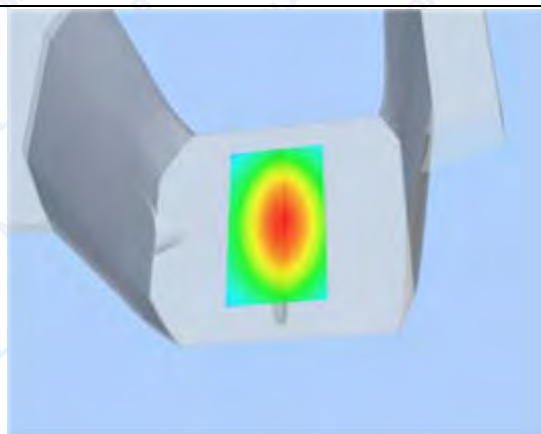

Hot spot position

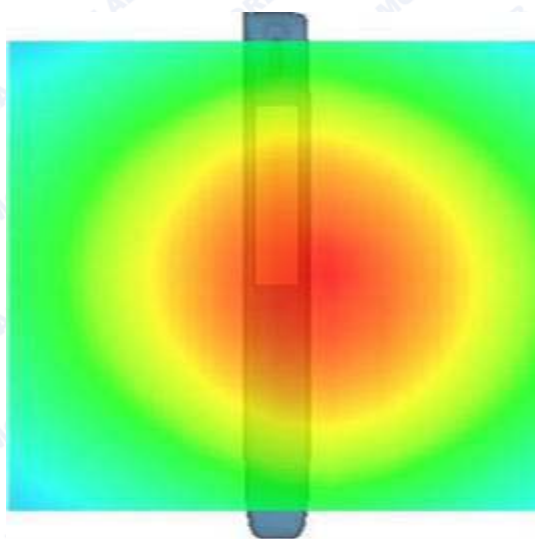



REPORT No. : SZ15010119S01

ANNEX B GENERAL INFORMATION

1. Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

**4. List of Test Equipments**

No.	Instrument	Type	Cal. Date	Cal. Due
1	PC	Dell (Pentium IV 2.4GHz, SN:X10-23533)	(n.a)	(n.a)
2	Network Emulator	Aglient (8960, SN:10752)	2014-2-21	1year
3	Network Analyzer	Agilent(E5071B ,SN:MY42404762)	2014-9-24	1year
4	Voltmeter	Keithley (2000, SN:1000572)	2014-9-24	1year
5	Signal Generator	Rohde&Schwarz (SMP_02)	2014-9-24	1year
6	Power Amplifier	PRANA (Ap32 SV125AZ)	2014-9-24	1year
7	Power Meter	Agilent (E4416A, SN:MY45102093)	2014-5-07	1year
8	Power Sensor	Agilent (N8482A, SN:MY41091706)	2014-5-07	1year
9	Directional coupler	Giga-tronics(SN:1829112)	2014-9-24	1year
10	Probe	Satimo (SN:SN 37/08 EP80)	2014-9-22	1year
11	Dielectric Probe Kit	Agilent (85033E)	2014-9-24	1year
12	Phantom	Satimo (SN:SN_36_08_SAM62)	2014-9-24	1year
13	Liquid	Satimo(Last Calibration: 2015-02-03)	N/A	N/A
14	Dipole 835MHz	Satimo (SN 20/08 DIPC 99)	2014-9-22	1year
15	Dipole 1900MHz	Satimo (SN 30/13 DIP1G900-261)	2014-9-22	1year

***** END OF REPORT *****