



*Full*

# TEST REPORT

**No. I16D00097-WLA**

*For*

**Client : Haier Telecom (Qingdao)Co.,Ltd**

**Production : GSM/WCDMA/LTE handset**

**Model Name : L30**

**FCC ID: SG7201605L30**

**Hardware Version: V1.01**

**Software Version: L30-H02-S021-Tigo**

**Issued date: 2016-06-15**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of ECIT Shanghai.

**Test Laboratory:**

ECIT Shanghai, East China Institute of Telecommunications

Add: 7-8F, G Area, No.668, Beijing East Road, Huangpu District, Shanghai, P. R. China

Tel: (+86)-021-63843300, E-Mail: [welcome@ecit.org.cn](mailto:welcome@ecit.org.cn)



# RF Test Report

Report No.: I16D00097-WLA

## Revision Version

Report Number	Revision	Date	Memo
I16D00097-WLA	00	2016-06-15	Initial creation of test report

**CONTENTS**

<b>1.</b>	<b>TEST LABORATORY .....</b>	<b>5</b>
<b>1.1.</b>	<b>TESTING LOCATION .....</b>	<b>5</b>
<b>1.2.</b>	<b>TESTING ENVIRONMENT .....</b>	<b>5</b>
<b>1.3.</b>	<b>PROJECT DATA .....</b>	<b>5</b>
<b>1.4.</b>	<b>SIGNATURE .....</b>	<b>5</b>
<b>2.</b>	<b>CLIENT INFORMATION .....</b>	<b>6</b>
<b>2.1.</b>	<b>APPLICANT INFORMATION .....</b>	<b>6</b>
<b>2.2.</b>	<b>MANUFACTURER INFORMATION .....</b>	<b>6</b>
<b>3.</b>	<b>EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>7</b>
<b>3.1.</b>	<b>ABOUT EUT .....</b>	<b>7</b>
<b>3.2.</b>	<b>INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....</b>	<b>7</b>
<b>3.3.</b>	<b>INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....</b>	<b>7</b>
<b>4.</b>	<b>REFERENCE DOCUMENTS .....</b>	<b>8</b>
<b>4.1.</b>	<b>REFERENCE DOCUMENTS FOR TESTING .....</b>	<b>8</b>
<b>5.</b>	<b>SUMMARY OF TEST RESULTS .....</b>	<b>9</b>
<b>5.1.</b>	<b>NOTES .....</b>	<b>10</b>
<b>5.2.</b>	<b>STATEMENTS .....</b>	<b>10</b>
<b>6.</b>	<b>TEST RESULT .....</b>	<b>11</b>
<b>6.1.</b>	<b>MAXIMUM OUTPUT POWER .....</b>	<b>11</b>
<b>6.2.</b>	<b>PEAK POWER SPECTRAL DENSITY .....</b>	<b>13</b>
<b>6.3.</b>	<b>OCCUPIED 6DB BANDWIDTH .....</b>	<b>18</b>
<b>6.4.</b>	<b>BAND EDGES COMPLIANCE .....</b>	<b>24</b>
<b>6.5.</b>	<b>TRANSMITTER SPURIOUS EMISSION-CONDUCTED .....</b>	<b>28</b>
<b>6.6.</b>	<b>TRANSMITTER SPURIOUS EMISSION-RADIATED .....</b>	<b>39</b>
<b>7.</b>	<b>TEST EQUIPMENTS AND ANCILLARIES USED FOR TESTS .....</b>	<b>54</b>



# ***RF Test Report***

Report No.: I16D00097-WLA

---

<b>8.</b>	<b>TEST ENVIRONMENT .....</b>	<b>55</b>
<b>ANNEX A.</b>	<b>DEVIATIONS FROM PRESCRIBED TEST METHODS .....</b>	<b>56</b>

## 1. Test Laboratory

### 1.1. Testing Location

Company Name:	ECIT Shanghai, East China Institute of Telecommunications
Address:	7-8F, G Area, No. 668, Beijing East Road, Huangpu District, Shanghai, P. R. China
Postal Code:	200001
Telephone:	(+86)-021-63843300
Fax:	(+86)-021-63843301

### 1.2. Testing Environment

Normal Temperature:	15-35°C
Extreme Temperature:	-10/+55°C
Relative Humidity:	20-75%

### 1.3. Project data

Project Leader:	Xu Yuting
Testing Start Date:	2016-05-28
Testing End Date:	2016-06-14


### 1.4. Signature



**Wang Changqing**  
(Prepared this test report)



**Liu Jianquan**  
(Reviewed this test report)



**Zheng Zhongbin**  
Director of the laboratory  
(Approved this test report)

## 2. Client Information

### 2.1. Applicant Information

Company Name: Haier Telecom (Qingdao)Co.,Ltd  
Address: No1,Haier Road,Hi-tech Zone,Qingdao, China  
Telephone: 0532-88937273  
Postcode: 266101

### 2.2. Manufacturer Information

Company Name: Haier Telecom (Qingdao)Co.,Ltd  
Address: No1,Haier Road,Hi-tech Zone,Qingdao, China  
Telephone: 0532-88937273  
Postcode: 266101

### 3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

#### 3.1. About EUT

EUT Description	GSM/WCDMA/LTE handset
Model name	L30
WLAN Frequency	2412MHz-2462MHz
WLAN Channel	Channel1-Channel11
WLAN type of modulation	802.11b:DSSS 802.11g/n: OFDM
Extreme Temperature	-10/+55°C
Nominal Voltage	3.8V
Extreme High Voltage	4.35V
Extreme Low Voltage	3.6V

Note: Photographs of EUT are shown in ANNEX A of this test report.

#### 3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
N01	861864030000217	V1.01	L30-H02-S021-Tigo	2016-05-27

\*EUT ID: is used to identify the test sample in the lab internally.

#### 3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	RF cable	---
AE2	---	---

\*AE ID: is used to identify the test sample in the lab internally.

## 4. Reference Documents

### 4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15,Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.	June 13, 2016
ANSI 63.10	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9KHz to 40GHz	2013



## 5. Summary of Test Results

A brief summary of the tests carried out is shown as following.

Measurement Items	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.247(a)	/	P
Peak Power Spectral Density	15.247(e)	/	P
Occupied 6dB Bandwidth	15.247(d)	/	P
Band Edges Compliance	15.247(b)	/	P
Transmitter Spurious Emission-Conducted	15.247	/	P
Transmitter Spurious Emission-Radiated	15.247,15.209,	/	P
AC Powerline Conducted Emission	15.107,15.207	/	P

Please refer to part 5 for detail.

The measurements are according to Public notice KDB558074 and ANSI C63.4.

Terms used in Verdict column

P	Pass, the EUT complies with the essential requirements in the standard.
NP	Not Perform, the test was not performed by ECIT.
NA	Not Applicable, the test was not applicable.
F	Fail, the EUT does not comply with the essential requirements in the standard.

Test Conditions

Tnom	Normal temperature
Tmin	Low Temperature
Tmax	High Temperature
Vnom	Normal Voltage
Vmin	Low Voltage
Vmax	High Voltage
Hnom	Norm Humidity
Anom	Norm Air Pressure

For this report, all the test case listed above are tested under Normal Temperature and Normal Voltage, and also under norm humidity, the specific conditions as following:

Temperature	Tnom	22°C
Voltage	Vnom	3.7V
Humidity	Hnom	32%
Air Pressure	Anom	1010hPa

**5.1. Notes**

All reported tests were carried out on a sample equipment to demonstrate limited compliance with section 3.

The test results of this test report relate exclusively to the item(s) tested as specified in section 5.

The following deviation from, additions to, or exclusions from the test specifications have been made. See section 3.

**5.2. Statements**

The product name L30, supporting GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/HSPA+/LTE/WLAN/BT/BLE, manufactured by Haier Telecom (Qingdao)Co.,Ltd is a new product for testing.

ECIT has verified that the compliance of the tested device specified in section 5 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 5 of this test report.

## 6. Test result

### 6.1. Maximum Output Power

#### 6.1.1 Measurement Limit and method:

Standard	Limit(dBm)
FCC CRF 15.247(b)	< 30

#### 6.1.2 Test procedure

The measurement is according to ANSI C63.10 clause 11.2

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set RBW  $\geq$  OBW, VBW  $\geq$  3RBW.
4. Detector : Peak.
5. Trace mode: Max Hold

#### 6.1.3 Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

#### 6.1.4 Maximum Peak Output Power-conducted

##### Measurement Results:

##### 802.11b/g mode

Mode	Data Rate(Mbps)	Teat Result(dBm)		
		2412MHz(Ch1)	2437MHz(Ch6)	2462MHz(Ch11)
802.11b	1	15.07	14.82	17.18
	2	15.14	15.18	17.47
	5.5	15.39	15.42	17.73
	11	15.52	15.61	17.97
802.11g	6	14.18	14.07	16.03
	9	14.12	14.24	15.76
	12	14.50	13.72	15.88
	18	14.10	14.22	15.88

	24	14.59	14.43	16.37
	36	14.62	14.78	16.46
	48	14.74	14.80	15.51
	54	14.87	14.81	16.55

The data rate 11Mbps and 54Mbps are selected as worse condition, and the following cases are performed with this condition.

**802.11n mode**

Mode	Data Rate(Index)	Teat Result(dBm)		
		2412MHz(Ch1)	2437MHz(Ch6)	2462MHz(Ch11)
802.11n(20MHz)	MCS0	12.78	12.83	14.52
	MCS1	12.87	12.72	14.71
	MCS2	13.06	12.86	14.92
	MCS3	13.69	13.60	14.96
	MCS4	13.98	13.43	15.15
	MCS5	13.49	14.02	15.50
	MCS6	13.54	13.66	15.39
	MCS7	14.00	13.76	15.42

The data rate MCS7 is selected as worse condition, and the following case are performed with this condition.

**6.1.5 Maximum Average Output Power-conducted**
**802.11b/g mode**

Mode	Test Result(dBm)		
	2412MHz(Ch1)	2437MHz(Ch6)	2462MHz(Ch11)
802.11b	12.02	12.11	14.47
802.11g	11.37	11.31	13.05

**802.11n mode**

Mode	Test Result(dBm)		
	2412MHz(Ch1)	2437MHz(Ch6)	2462MHz(Ch11)
802.11n(20MHz)	10.50	10.26	11.92

**Conclusion: PASS**

## 6.2. Peak Power Spectral Density

### 6.2.1 Measurement Limit:

Standard	Limit
FCC CFR Part 15.247(e)	< 8dBm/3 KHz

### 6.2.2 Test procedures

The measurement is according to ANSI C63.10 clause 11.10.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set analyzer center frequency to DTS channel center frequency.
4. Set the span to 1.5 times the DTS bandwidth.
5. Set the RBW to  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
6. Set the VBW  $\geq [3 \times \text{RBW}]$ .
7. Detector = peak.
8. Sweep time = auto couple.
9. Trace mode = max hold.
10. Allow trace to fully stabilize.
11. Use the peak marker function to determine the maximum amplitude level within the RBW.
12. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

### 6.2.3 Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

### 6.2.4 Measurement Results:

#### 802.11b/g mode

Mode	Channel	Power Spectral Density(dBm/3kHz)		Conclusion
		Fig.1		
802.11b	1	Fig.1	-10.769	P


	6	Fig.2	-12.419	P
	11	Fig.3	-10.971	P
802.11g	1	Fig.4	-15.791	P
	6	Fig.5	-17.469	P
	11	Fig.6	-15.342	P

**802.11n mode**

Mode	Channel	Power Spectral Density(dBm/3kHz)		Conclusion
802.11n(20MHz)	1	Fig.7	-17.211	P
	6	Fig.8	-17.631	P
	11	Fig.9	-16.541	P


**Conclusion: PASS**

**Test graphs as below:**

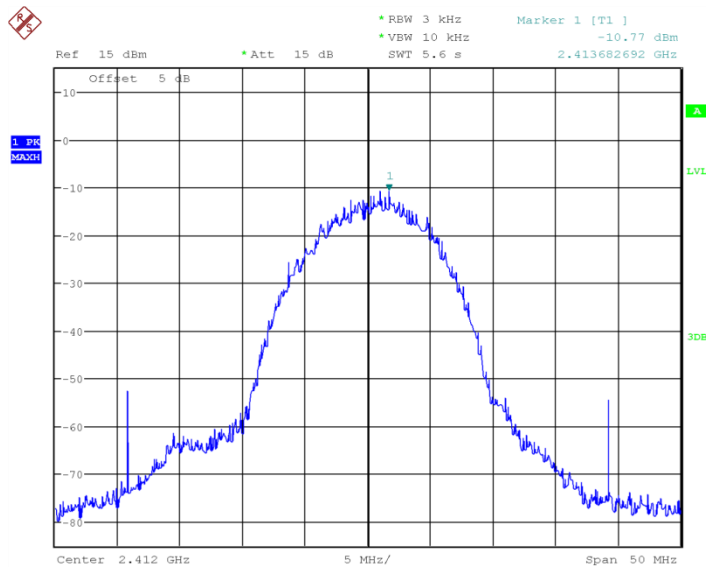


Date: 3.JUN.2016 15:21:59

**Fig.1 Power Spectral Density (802.1b,Ch1)**

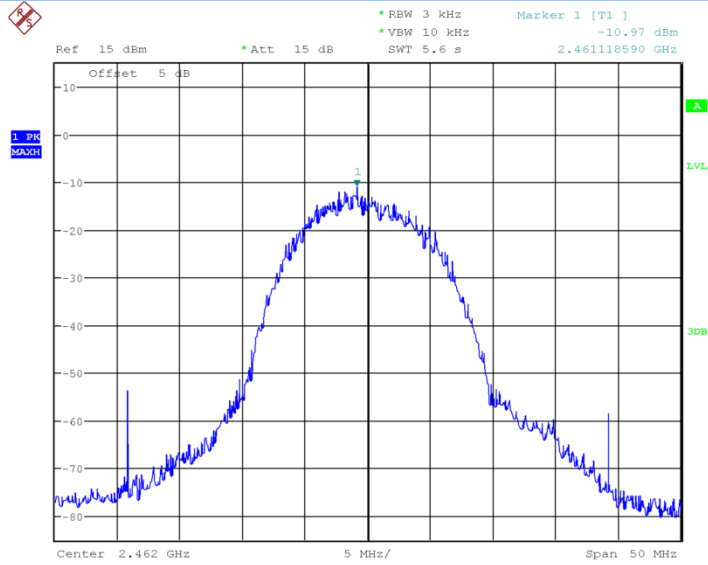


Date: 3.JUN.2016 15:22:50

**Fig.2 Power Spectral Density (802.1b,Ch6)**

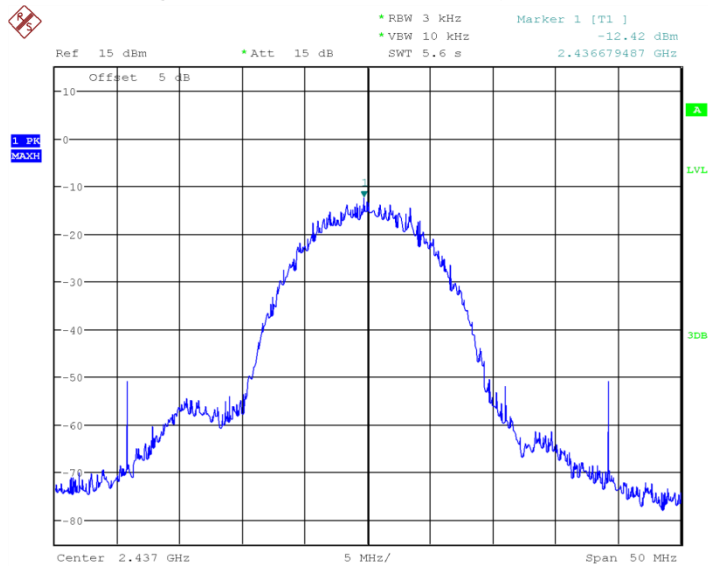


Date: 3.JUN.2016 15:22:28

**Fig.3 Power Spectral Density (802.1b,Ch11)**

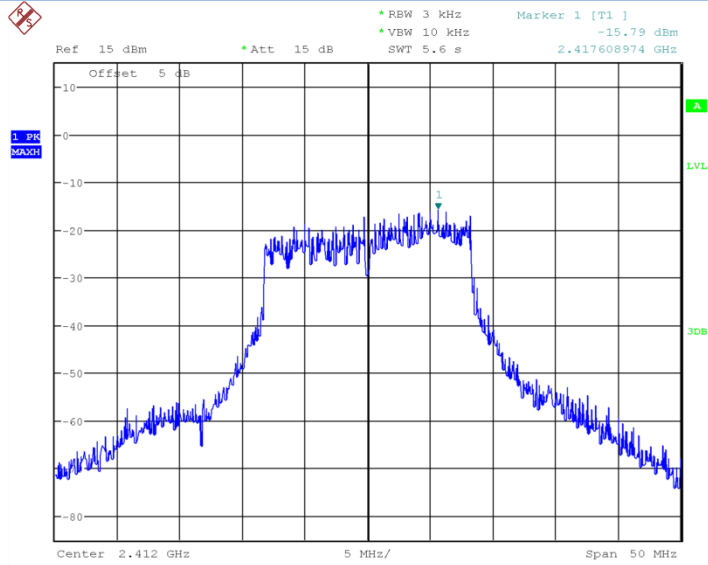

Date: 3.JUN.2016 15:27:33


**Fig.4 Power Spectral Density (802.1g,Ch1)**

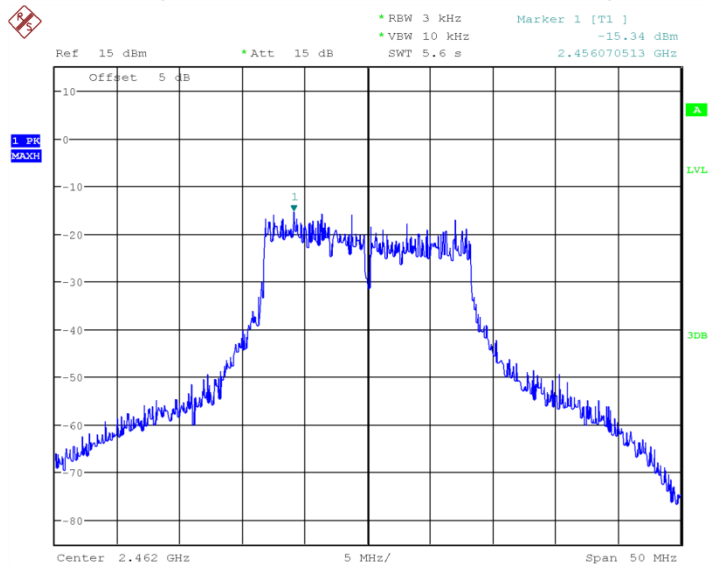

Date: 3.JUN.2016 15:29:19


**Fig.5 Power Spectral Density (802.1g,Ch6)**



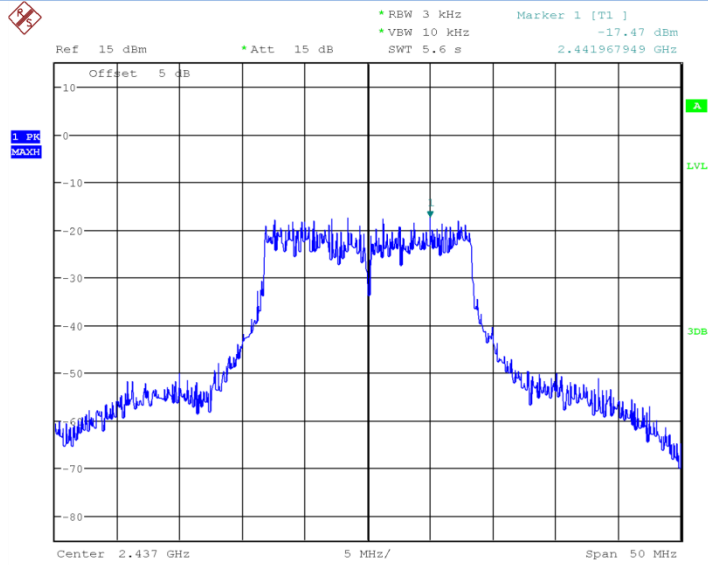


Date: 3.JUN.2016 15:28:23

**Fig.6 Power Spectral Density (802.1g,Ch11)**

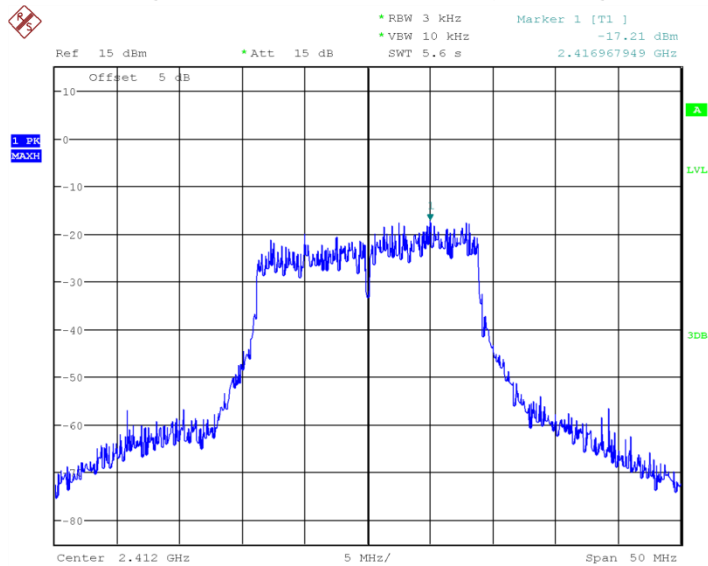


Date: 3.JUN.2016 15:30:11

**Fig.7 Power Spectral Density (802.1n-20MHz,Ch1)**

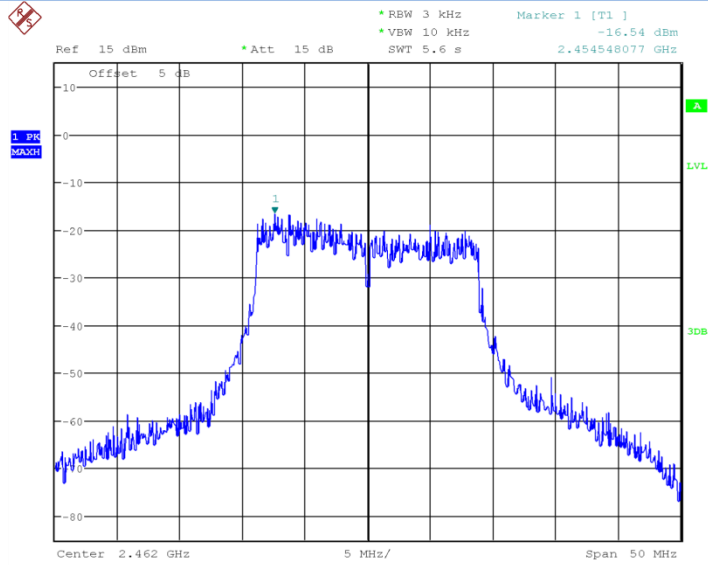

Date: 3.JUN.2016 15:31:00

**Fig.8 Power Spectral Density (802.1n-20MHz,Ch6)**

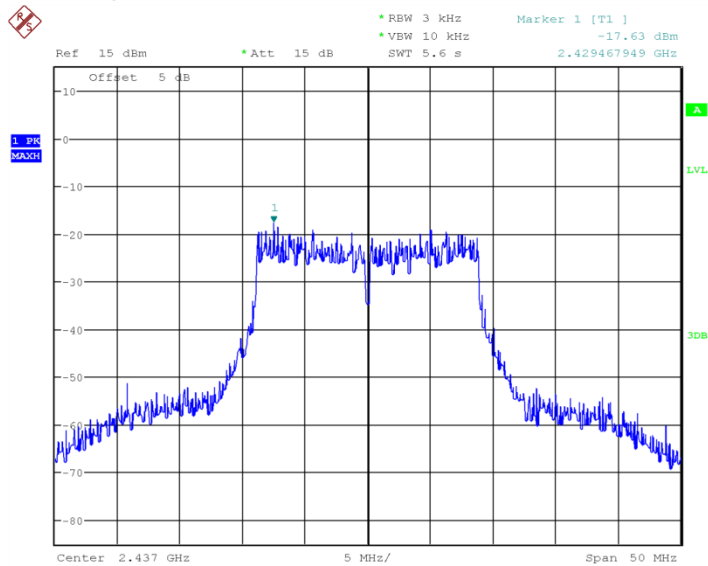

Date: 3.JUN.2016 15:30:32

**Fig.9 Power Spectral Density (802.1n-20MHz,Ch11)**

## 6.3. Occupied 6dB Bandwidth

### 6.3.1 Measurement Limit:

Standard	Limit(KHz)
FCC 47 CFR Part 15.247(a)	≥500

**6.3.2 Test procedure**

The measurement is according to ANSI C63.10 clause 11.8.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set RBW = 100 kHz.
4. Set the VBW  $\geq [3 \times \text{RBW}]$ .
5. Detector = peak.
6. Trace mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize.
9. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

**6.3.4 Measurement Uncertainty:**

Measurement Uncertainty	60.80Hz
-------------------------	---------

**6.3.5 Measurement Result:**
**802.11b/g mode**


Mode	Channel	Occupied 6dB Bandwidth(MHz)		Conclusion
802.11b	1	Fig.10	7.612	P
	6	Fig.11	9.215	P
	11	Fig.12	8.894	P
802.11g	1	Fig.13	15.785	P
	6	Fig.14	16.506	P
	11	Fig.15	16.426	P

**802.11n mode**

Mode	Channel	Occupied 6dB Bandwidth(MHz)		Conclusion
802.11n(20MHz)	1	Fig.16	16.346	P
	6	Fig.17	17.788	P
	11	Fig.18	17.708	P


**Conclusion: PASS**

**Test graphs as below:**

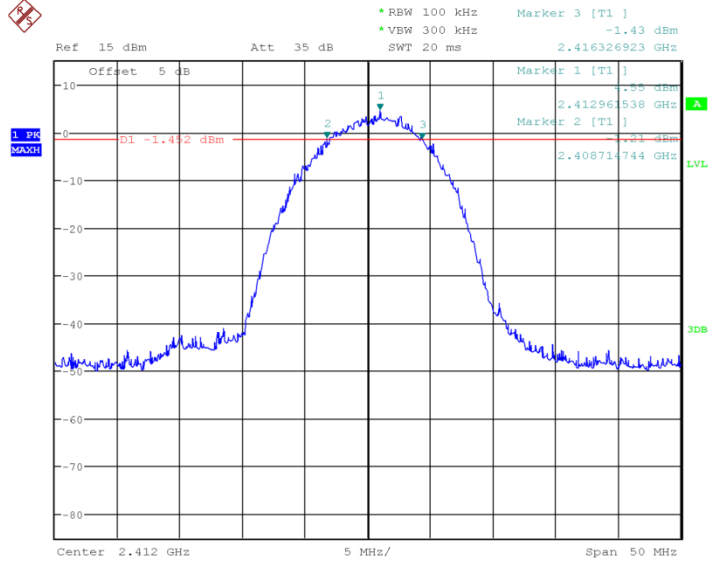


Date: 3.JUN.2016 15:31:37

**Fig.10 Occupied 6dB Bandwidth (802.11b, Ch1)**

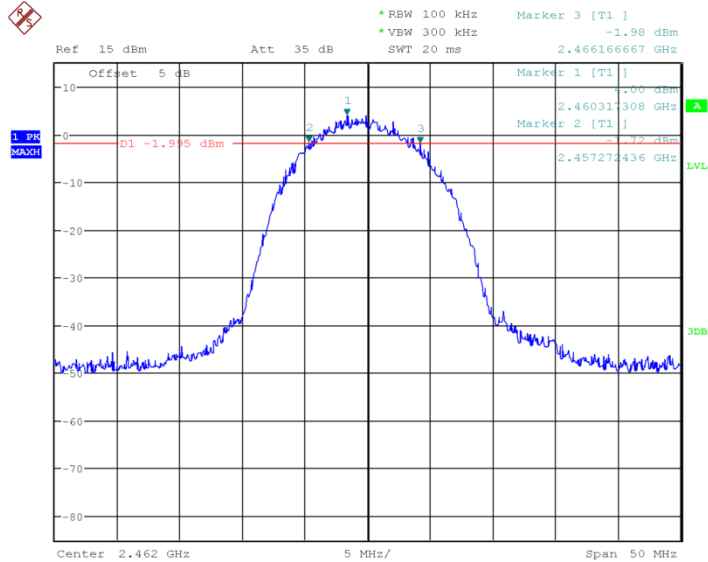


Date: 3.JUN.2016 15:32:19

**Fig.11 Occupied 6dB Bandwidth (802.11b, Ch6)**

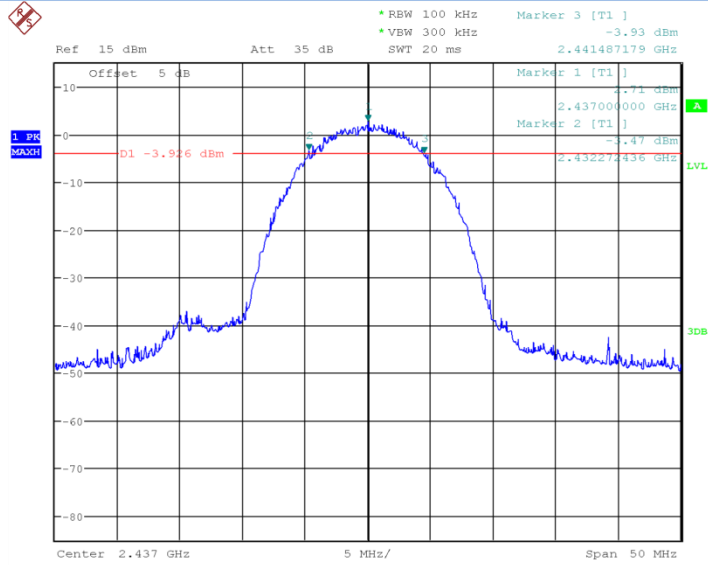


Date: 3.JUN.2016 15:31:59

**Fig.12 Occupied 6dB Bandwidth (802.11b, Ch11)**

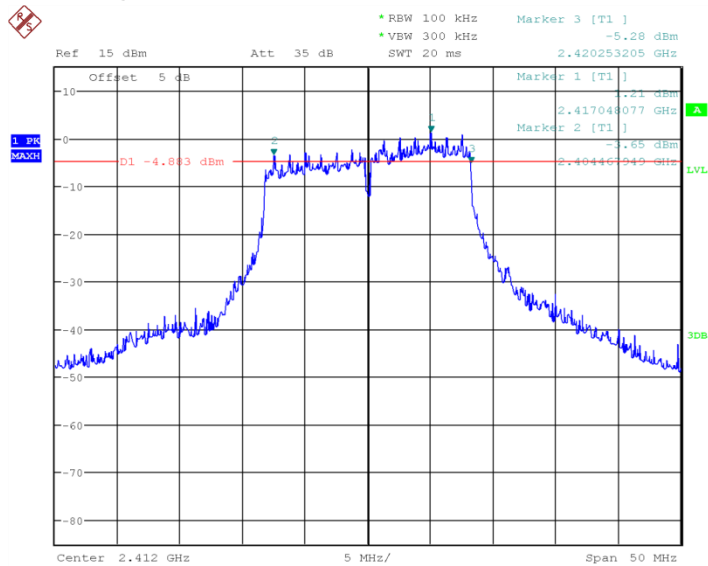


Date: 3.JUN.2016 15:32:42

**Fig.13 Occupied 6dB Bandwidth (802.11g, Ch11)**

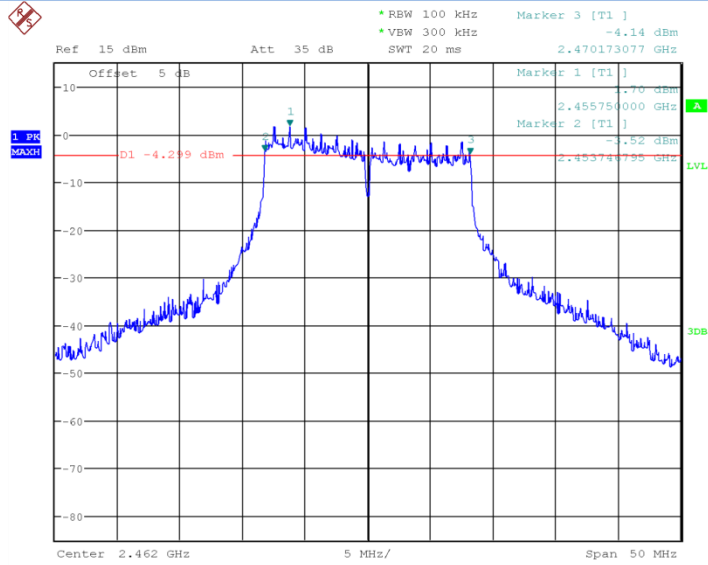


Date: 3.JUN.2016 15:33:42

**Fig.14 Occupied 6dB Bandwidth (802.11g, Ch6)**

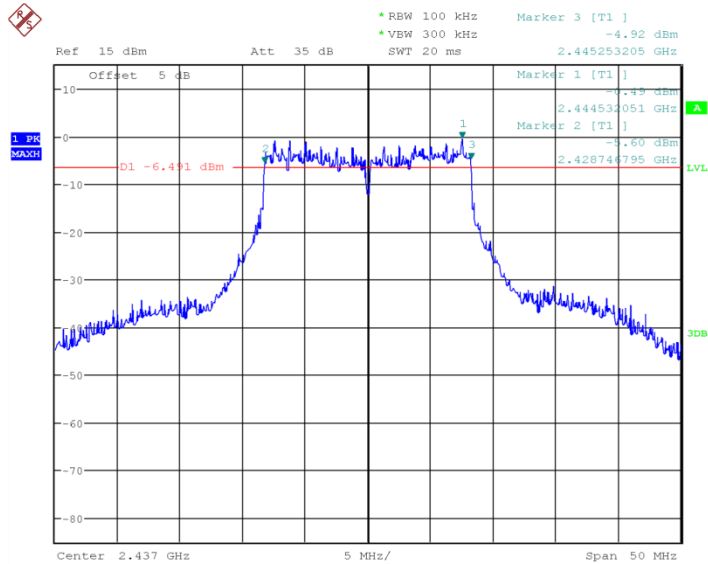


Date: 3.JUN.2016 15:33:04

**Fig.15 Occupied 6dB Bandwidth (802.11g, Ch11)**

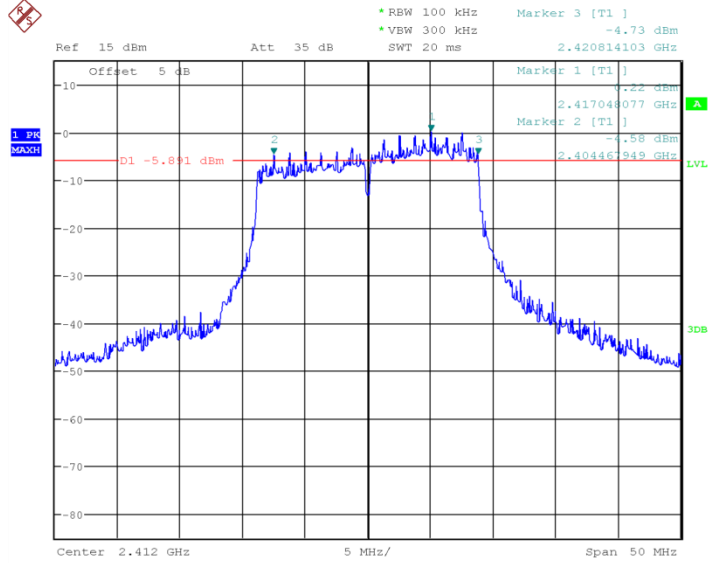


Date: 3.JUN.2016 15:34:10

**Fig.16 Occupied 6dB Bandwidth (802.11n-20MHz, Ch1)**

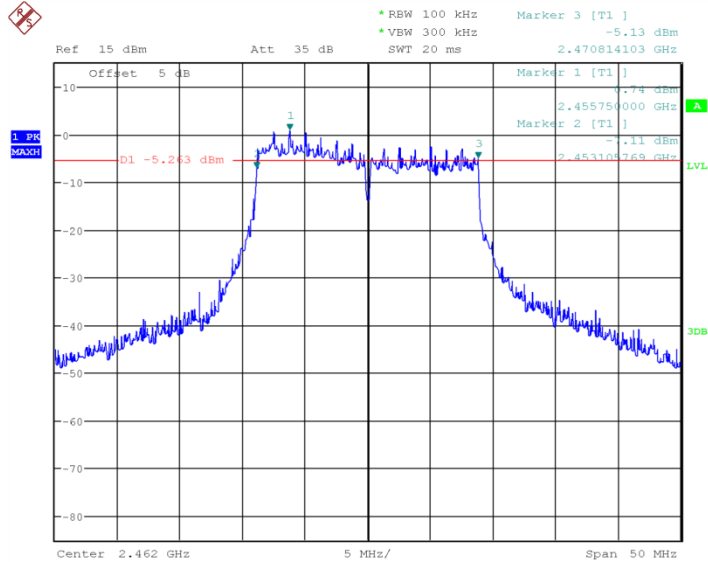

Date: 3.JUN.2016 15:34:52

**Fig.17 Occupied 6dB Bandwidth (802.11n-20MHz, Ch6)**

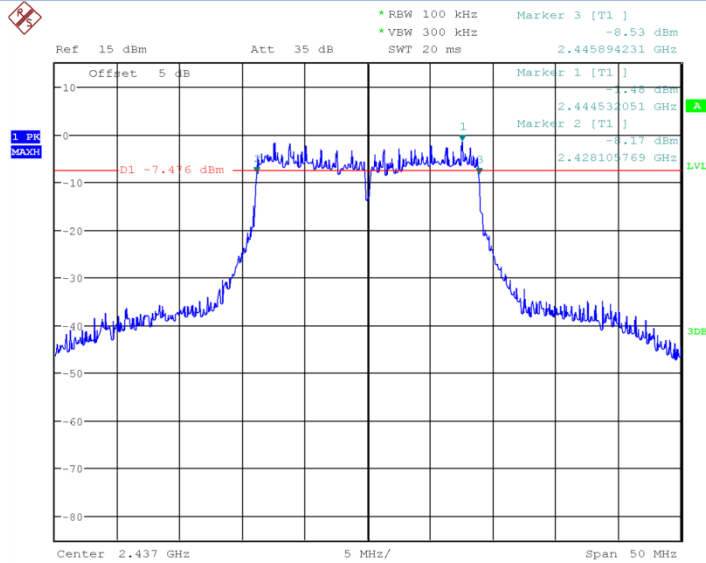

Date: 3.JUN.2016 15:34:31

**Fig.18 Occupied 6dB Bandwidth (802.11n-20MHz, Ch11)**

## 6.4. Band Edges Compliance

### 6.4.1 Measurement Limit:

Standard	Limited(dBc)
FCC 47 CFR Part 15.247(d)	>20

### 6.4.2 Test procedures

The measurement is according to ANSI C63.10 clause 11.13.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set instrument center frequency to the frequency of the emission to be measured (must be within 2MHz of the authorized band edge).
4. Set span to 2 MHz.
5. RBW = 100 kHz.
6.  $VBW \geq [3 \times RBW]$ .
7. Detector = peak.
8. Sweep time = auto.
9. Trace mode = max hold.
10. Allow sweep to continue until the trace stabilizes

### 6.4.3 Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------



## 6.4.4 Measurement results

### 802.11b/g mode


Mode	Channel	Test Results	Conclusion
802.11b	1	Fig.19	P
	11	Fig.20	P
802.11g	1	Fig.21	P
	11	Fig.22	P

### 802.11n mode

Mode	Channel	Test Results	Conclusion
802.11n(20MHz)	1	Fig.23	P
	11	Fig.24	P


**Conclusion: PASS**

Test graphs as blew:

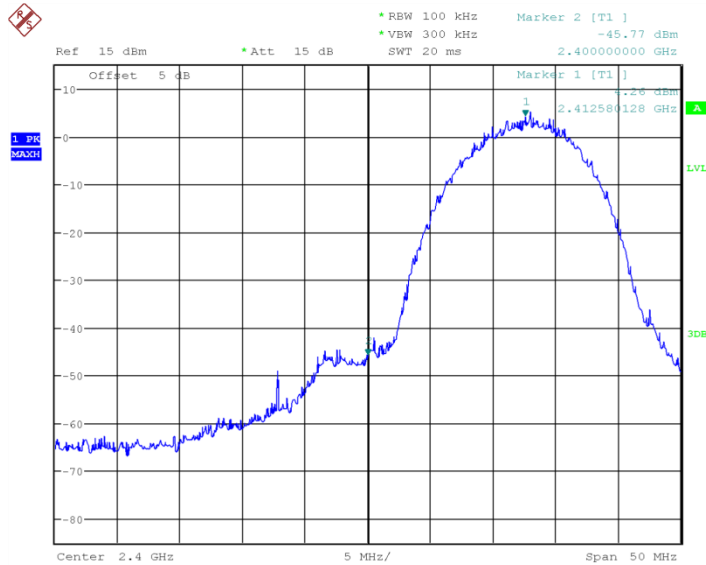


Date: 3.JUN.2016 15:35:27

**Fig.19 Band Edges (802.11b, Ch1)**

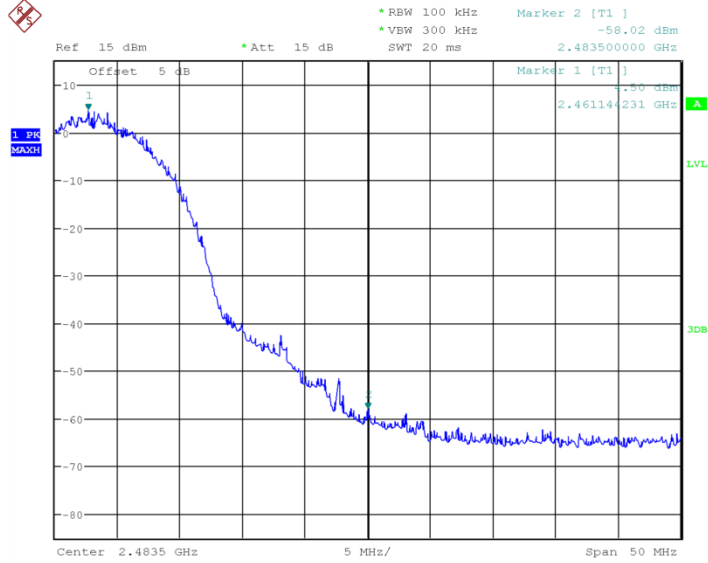


Date: 3.JUN.2016 15:36:13

**Fig.20 Band Edges (802.11b, Ch11)**

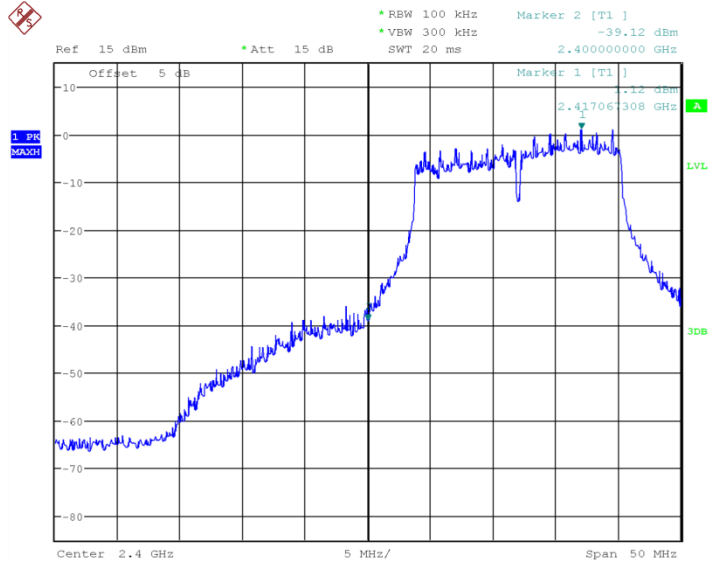


Date: 3.JUN.2016 15:36:37

**Fig.21 Band Edges (802.11g, Ch1)**

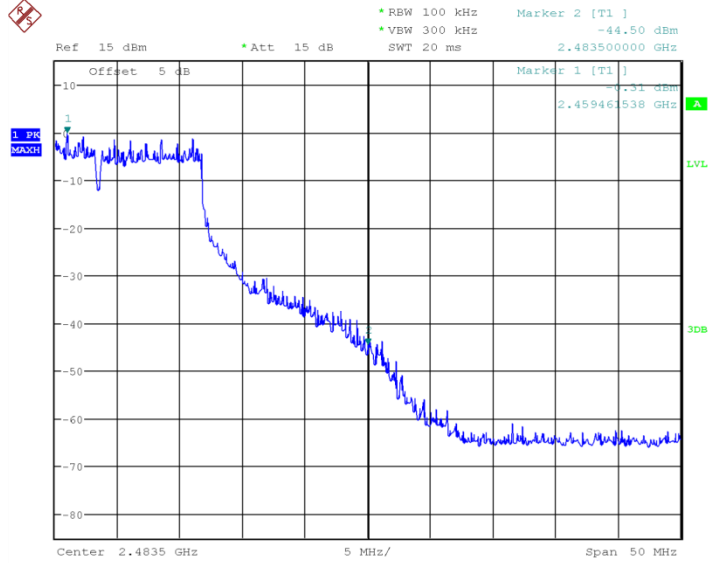


Date: 3.JUN.2016 15:37:15

**Fig.22 Band Edges (802.11g, Ch11)**

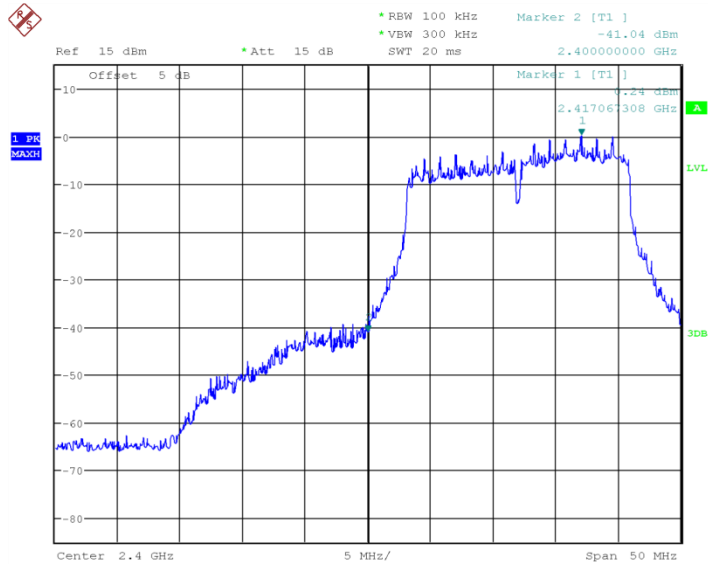

Date: 3.JUN.2016 15:37:54

**Fig.23 Band Edges (802.11n-20MHz, Ch1)**

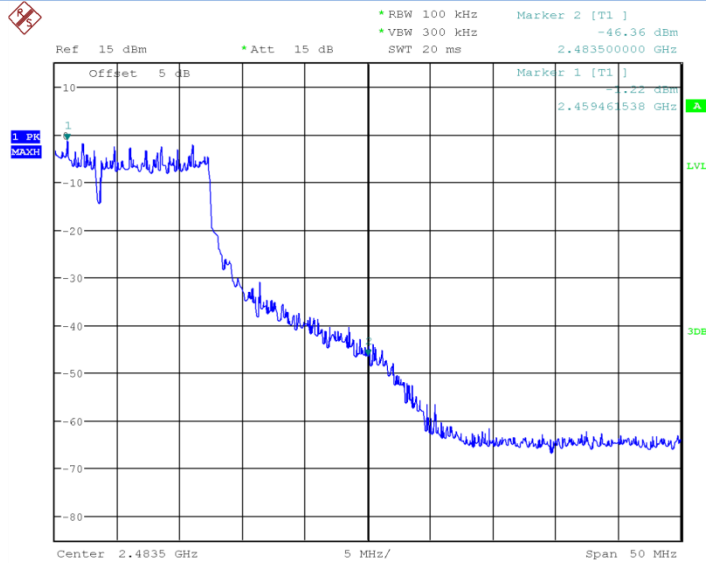

Date: 3.JUN.2016 15:38:20

**Fig.24 Band Edges (802.11b-20MHz, Ch11)**

## 6.5. Transmitter Spurious Emission-conducted

### 6.5.1 Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(d)	20dB below peak output power in 100KHz bandwidth

### 6.5.2 Test procedures

This measurement is according to ANSI C63.10 clause 11.11.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.

Reference level measurement

3. Set instrument center frequency to DTS channel center frequency.
4. Set the span to  $\geq 1.5$  times the DTS bandwidth.
5. Set the RBW = 100 kHz.
6. Set the VBW  $\geq [3 \times \text{RBW}]$ .
7. Detector = peak.
8. Sweep time = auto couple.
9. Trace mode = max hold.
10. Allow trace to fully stabilize.
11. Use the peak marker function to determine the maximum PSD level.

Emission level measurement

12. Set the center frequency and span to encompass frequency range to be measured.

13. Set the RBW = 100 kHz.
14. Set the VBW  $\geq [3 \times \text{RBW}]$ .
15. Detector = peak.
16. Sweep time = auto couple.
17. Trace mode = max hold.
18. Allow trace to fully stabilize.
19. Use the peak marker function to determine the maximum amplitude level.

**6.5.3 Measurement Uncertainty:**

Frequency Range	Uncertainty
$30\text{MHz} \leq f \leq 2\text{GHz}$	0.63
$2\text{GHz} \leq f \leq 3.6\text{GHz}$	0.82
$3.6\text{GHz} \leq f \leq 8\text{GHz}$	1.55
$8\text{GHz} \leq f \leq 20\text{GHz}$	1.86
$20\text{GHz} \leq f \leq 22\text{GHz}$	1.90
$22\text{GHz} \leq f \leq 26\text{GHz}$	2.20

**6.5.4 Measurement Result:**
**802.11b/g mode**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	1	2.412GHz	Fig.25	P
		30MHz~26GHz	Fig.26	P
	6	2.437GHz	Fig.27	P
		30MHz~26GHz	Fig.28	P
	11	2.472GHz	Fig.29	P
		30MHz~26GHz	Fig.30	P
802.11g	1	2.412GHz	Fig.31	P
		30MHz~26GHz	Fig.32	P
	6	2.437GHz	Fig.33	P
		30MHz~26GHz	Fig.34	P
	11	2.472GHz	Fig.35	P


		30MHz~26GHz	Fig.36	P
--	--	-------------	--------	---

### 802.11n mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n(20MHz)	1	2.412GHz	Fig.37	P
		30MHz~26GHz	Fig.38	P
	6	2.437GHz	Fig.39	P
		30MHz~26GHz	Fig.40	P
	11	2.472GHz	Fig.41	P
		30MHz~26GHz	Fig.42	P


**Conclusion: PASS**

**Test graphs as below:**

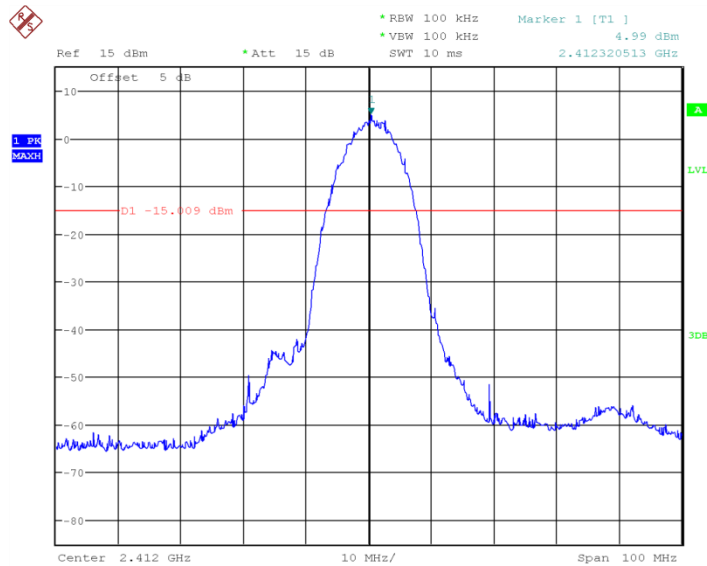


Date: 3.JUN.2016 15:41:21

**Fig.25 Conducted Spurious Emission (802.11b, Ch1)**

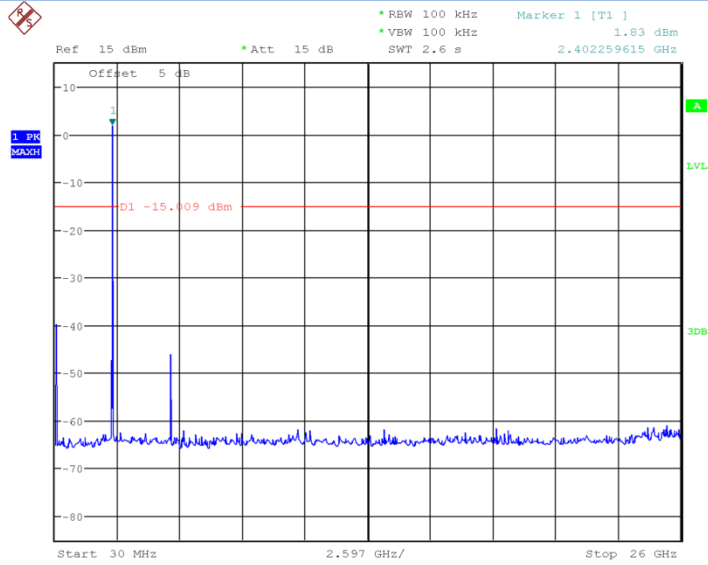


Date: 3.JUN.2016 15:41:42

**Fig.26 Conducted Spurious Emission (802.11b, Ch1, 30MHz~26GHz)**

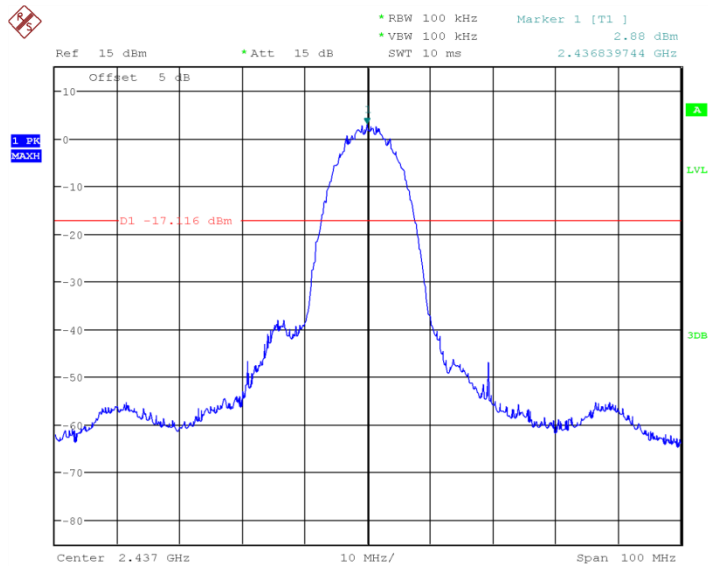


Date: 3.JUN.2016 15:42:08

**Fig.27 Conducted Spurious Emission (802.11b, Ch6)**

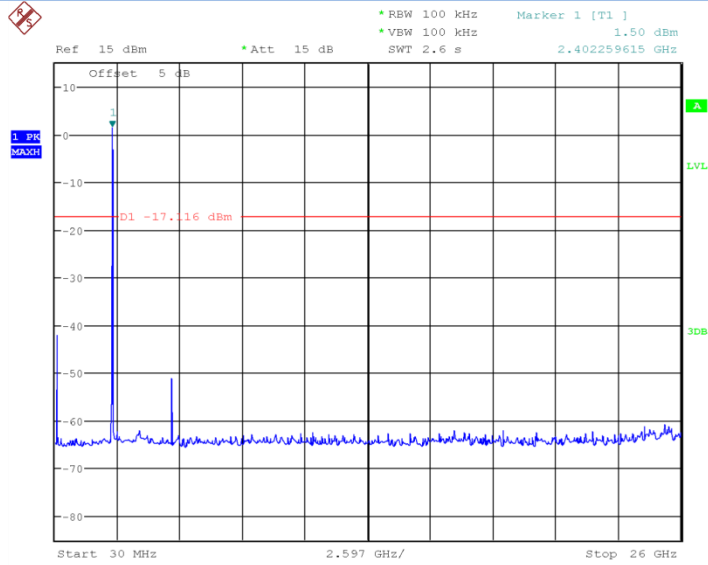

Date: 3.JUN.2016 15:42:28


**Fig.28 Conducted Spurious Emission (802.11b, Ch6, 30MHz~26GHz)**

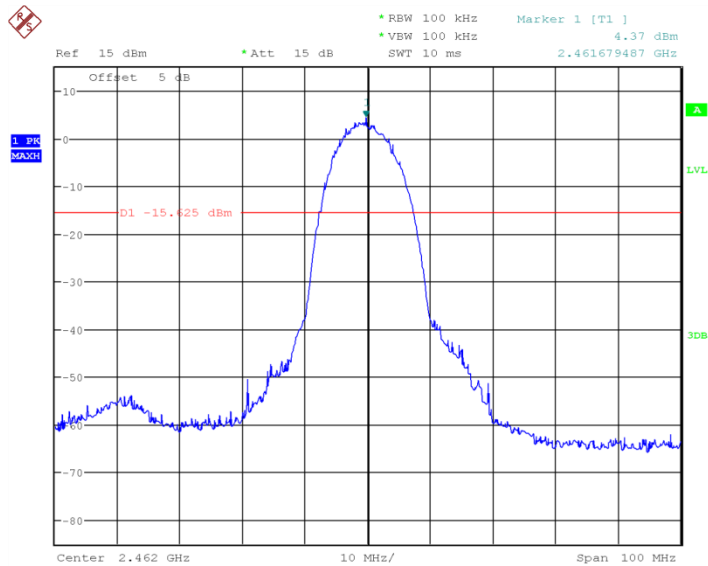

Date: 3.JUN.2016 15:43:32


**Fig.29 Conducted Spurious Emission (802.11b, Ch11)**



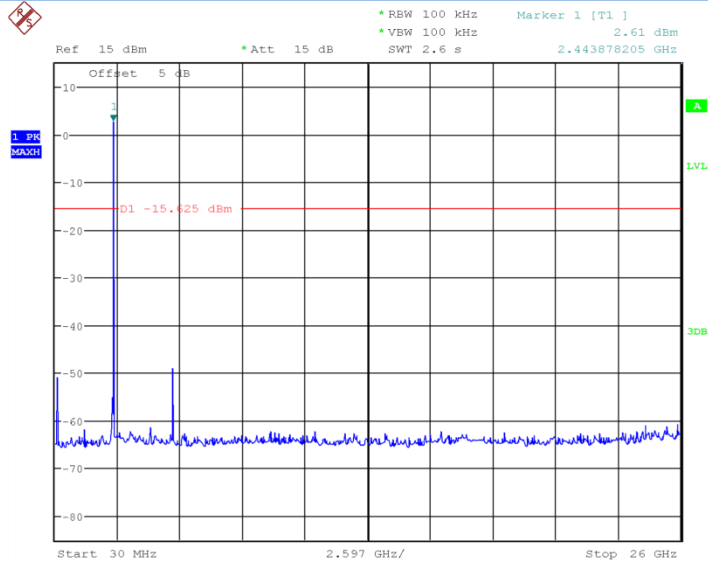


Date: 3.JUN.2016 15:43:54

**Fig.30 Conducted Spurious Emission (802.11b, Ch11, 30MHz~26GHz)**

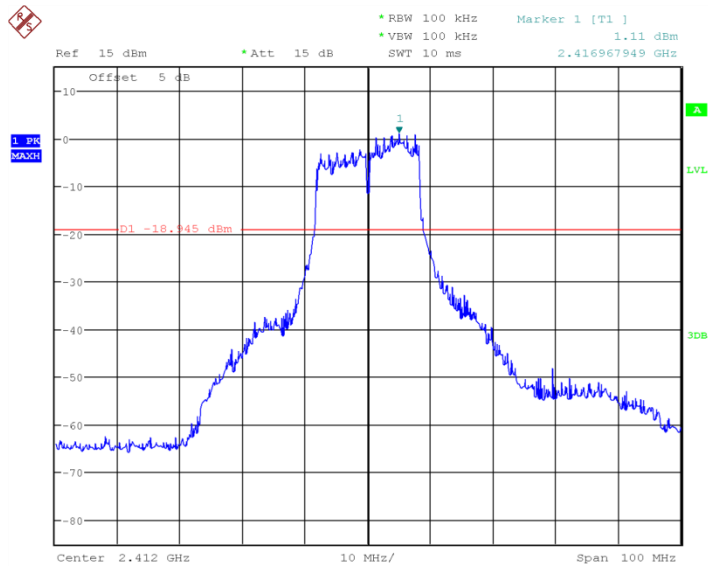


Date: 3.JUN.2016 15:45:55

**Fig.31 Conducted Spurious Emission (802.11g, Ch1)**

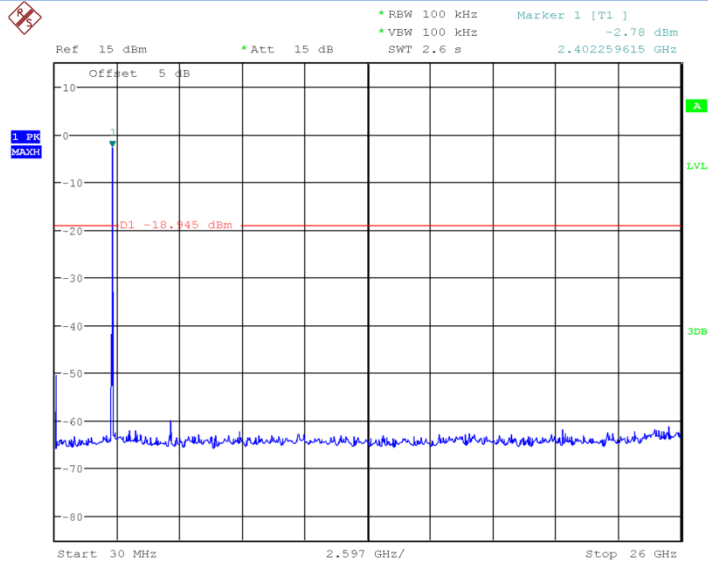


Date: 3.JUN.2016 15:46:15

**Fig.32 Conducted Spurious Emission (802.11g, Ch1, 30MHz~26GHz)**

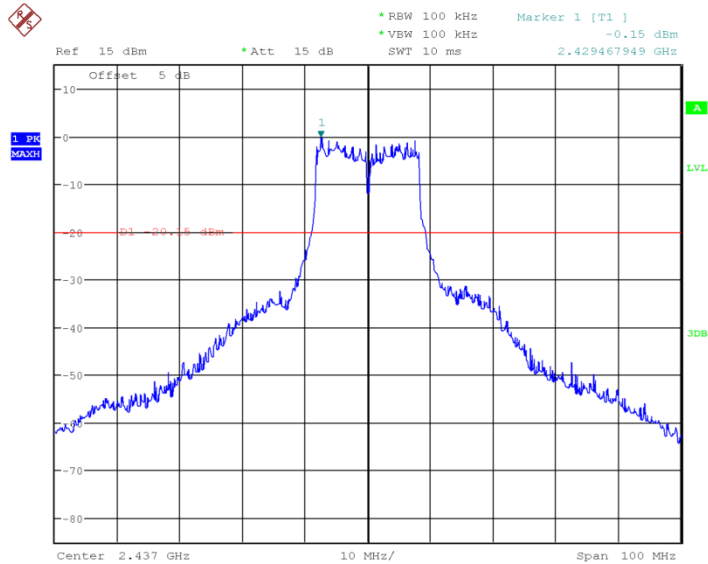


Date: 3.JUN.2016 15:58:53

**Fig.33 Conducted Spurious Emission (802.11g, Ch6)**

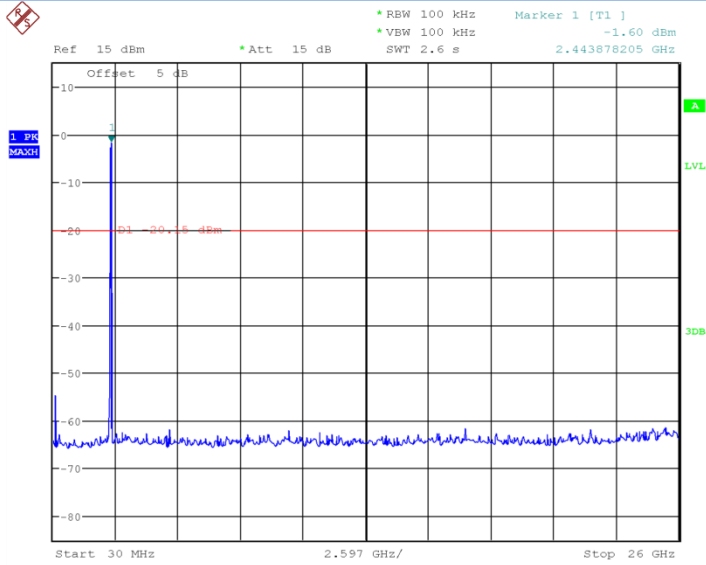


Date: 3.JUN.2016 15:59:14

**Fig.34 Conducted Spurious Emission (802.11g, Ch6, 30MHz~26GHz)**

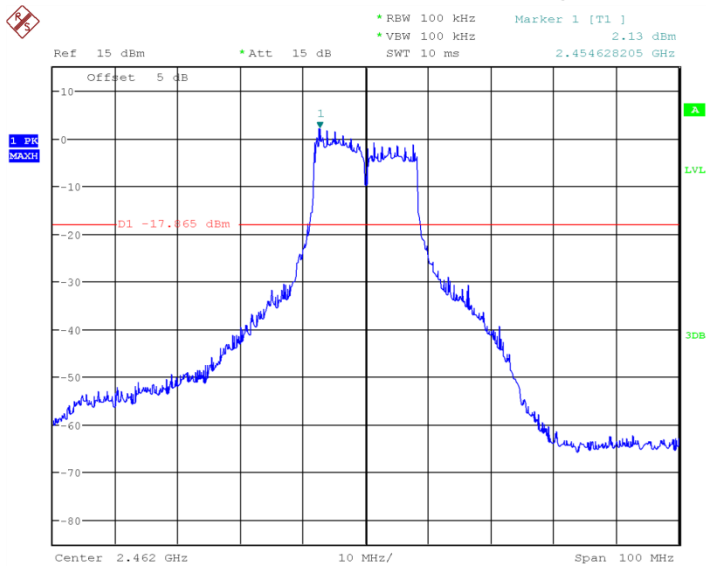


Date: 3.JUN.2016 16:18:02

**Fig.35 Conducted Spurious Emission (802.11g, Ch11)**

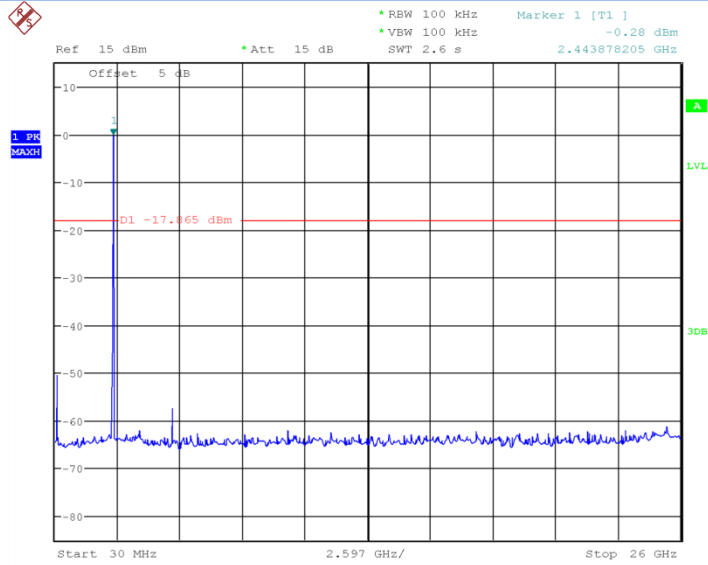


Date: 3.JUN.2016 16:18:22

**Fig.36 Conducted Spurious Emission (802.11g, Ch11, 30MHz~26GHz)**

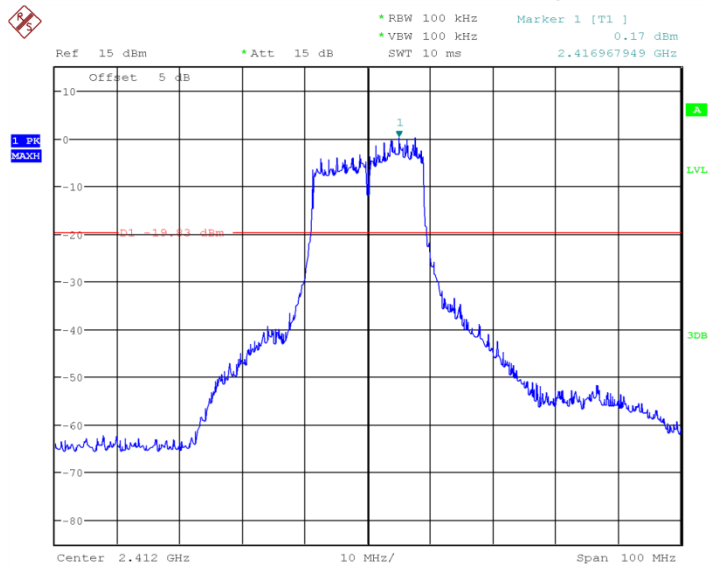


Date: 3.JUN.2016 16:19:06

**Fig.37 Conducted Spurious Emission (802.11n-20MHz, Ch1)**

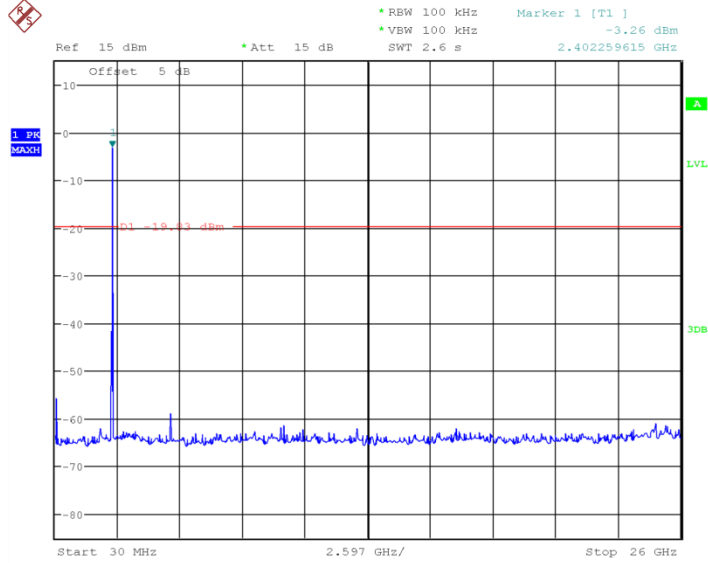


Date: 3.JUN.2016 16:19:26

**Fig.38 Conducted Spurious Emission (802.11n-20MHz, Ch1, 30MHz~26GHz)**

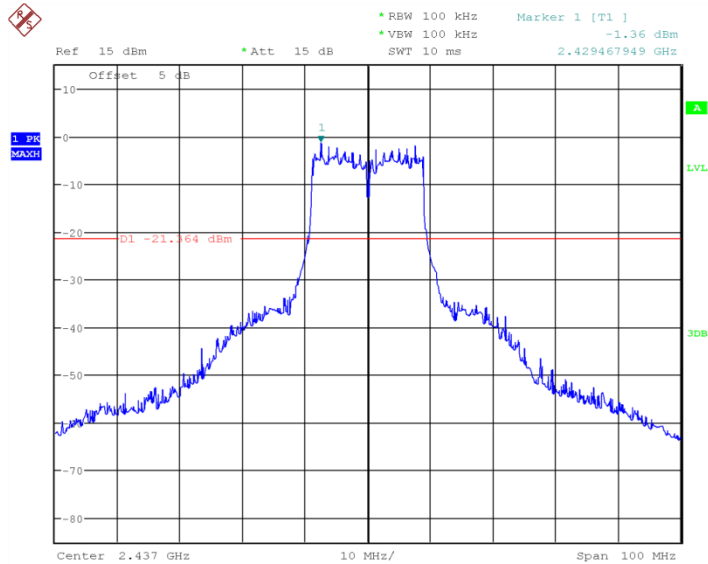


Date: 3.JUN.2016 16:22:23

**Fig.39 Conducted Spurious Emission (802.11n-20MHz, Ch6)**

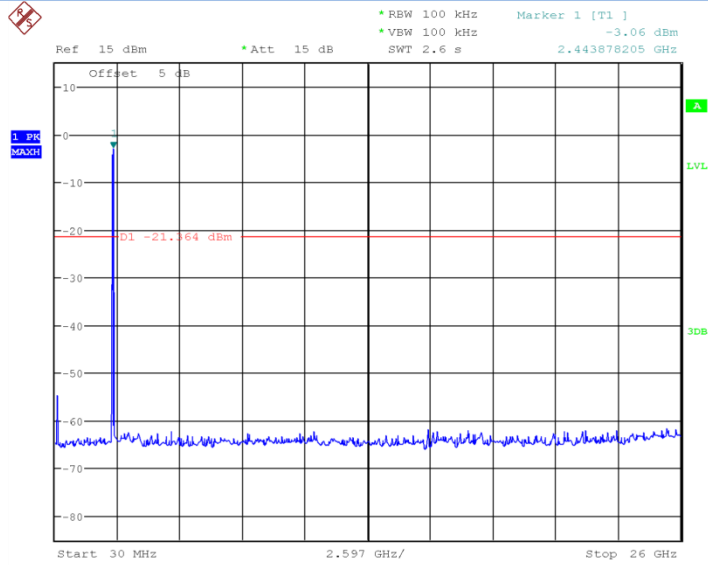


Date: 3.JUN.2016 16:22:44

**Fig.40 Conducted Spurious Emission (802.11n-20MHz, Ch6, 30MHz~26GHz)**

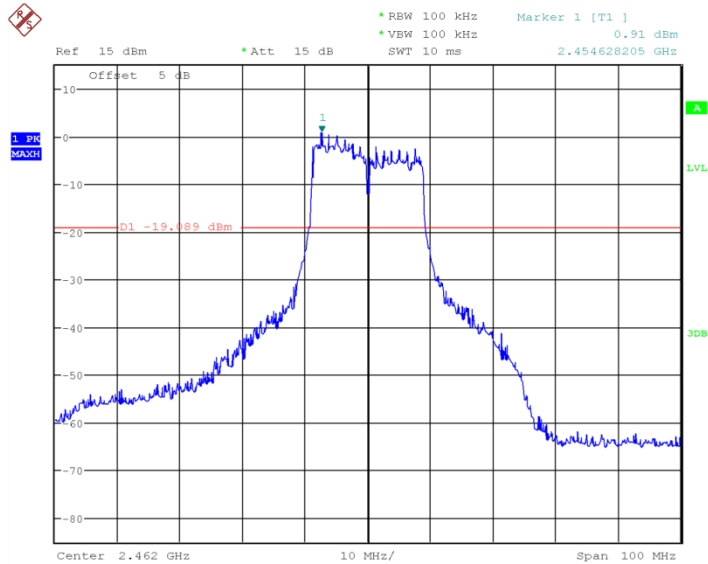

Date: 3.JUN.2016 16:23:21

**Fig.41 Conducted Spurious Emission (802.11n-20MHz, Ch11)**

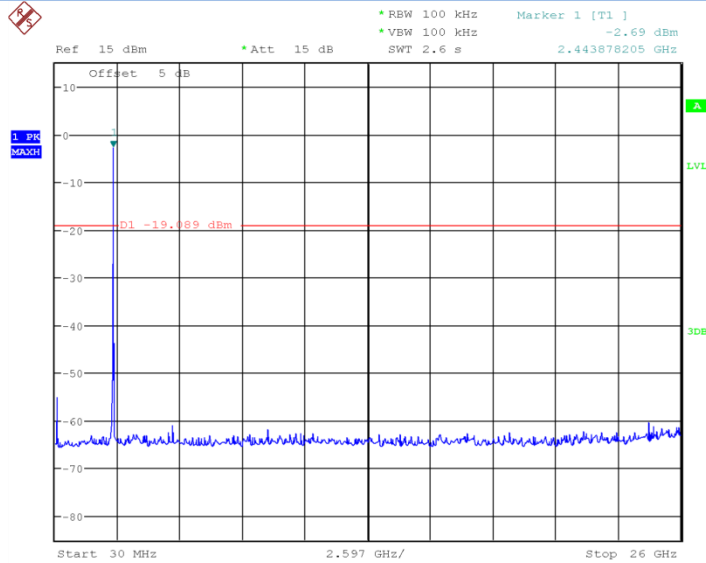

Date: 3.JUN.2016 16:23:42

**Fig.42 Conducted Spurious Emission (802.11n-20MHz, Ch11, 30MHz~26GHz)**

## 6.6. Transmitter Spurious Emission-Radiated

### 6.6.1 Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247,15.205,15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in 25.205(a), must also comply with the radiated emission limits specified in 15.209(a)(see 15.205(c)). The measurement is according to ANSI C63.10 clause 11.11 and 11.12.

### 6.6.2 Limit in restricted band:

Frequency of emission(MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30~88	100	40
88~216	150	43.5
216~960	200	46
Above 960	500	54

### 6.6.3 Test procedures

Portable, small, lightweight, or modular devices that may be handheld, worn on the body, or placed on a table during operation shall be positioned on a nonconducting platform, the top of which is 80 cm above the reference ground plane. The preferred area occupied by

the EUT arrangement is 1 m by 1.5 m, but it may be larger or smaller to accommodate various sized EUTs. For testing purposes, ceiling- and wall-mounted devices also shall be positioned on a tabletop (see also ANSI C63.4-2014 section 6.3.4 and 6.3.5). In making any tests involving handheld, body-worn, or ceiling-mounted equipment, it is essential to recognize that the measured levels may be dependent on the orientation (attitude) of the three orthogonal axes of the EUT. Thus, exploratory tests as specified in 8.3.1 shall be carried out for various axes orientations to determine the attitude having maximum or near-maximum emission level.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During testing, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emission from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Times (s)
30~1000	100KHz/300KHz	5
1000~4000	1MHz/1MHz	15
4000~18000	1MHz/1MHz	40
18000~26500	1MHz/1MHz	20

### 802.11b/g mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	Power	2.38GHz~2.45GHz	Fig.44	P
	Power	2.45GHz~2.5GHz	Fig.45	P
	11	30MHz~1GHz	Fig.46	P
		1GHz~3GHz	Fig.47	P
		3GHz~18GHz	Fig.48	P
802.11g	Power	2.38GHz~2.45GHz	Fig.49	P
	Power	2.45GHz~2.5GHz	Fig.50	P
	11	30MHz~1GHz	Fig.51	P
		1GHz~3GHz	Fig.52	P
		3GHz~18GHz	Fig.53	P

### 802.11n mode



Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n(20MHz)	Power	2.38GHz~2.45GHz	Fig.54	P
	Power	2.45GHz~2.5GHz	Fig.55	P
	11	30MHz~1GHz	Fig.56	P
		1GHz~3GHz	Fig.57	P
		3GHz~18GHz	Fig.58	P
/	All channels	18GHz~26.5GHz	Fig.59	P

**Conclusion: PASS**

**Note:**

A "reference path loss" is established and  $AR_{pi}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

$P_{Mea}$  is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$AR_{pi} = \text{Cable loss} + \text{Antenna Gain} - \text{Preamplifier gain}$

$\text{Result} = P_{Mea} + \text{Cable loss} + \text{Antenna Gain} - \text{Preamplifier gain} = P_{Mea} + AR_{pi}$

**802.11b mode**

**Ch11 30MHz~1GHz**

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
34.430272	13.78	-25.9	13.17	V
35.182160	12.38	-25.9	10.47	V
42.140884	8.48	-24.9	5.82	V
68.286756	18.57	-27.7	15.3	V
110.019788	7.13	-23.6	2.84	H

**Ch11 1GHz~3GHz**

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2594.761730	52.80	9.3	52.19	V
2660.374808	53.14	10.0	51.23	V
2753.498269	52.51	10.1	49.85	V
2835.355577	53.02	10.7	49.75	H

2913.197692	53.69	11.3	49.4	H
2967.045192	53.56	11.4	52.19	V

**Ch11 3GHz~18GHz**

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
4923.991667	59.00	0.9	58.39	V
12767.170867	51.49	16.7	49.58	H
14233.177867	54.19	19.8	51.53	H
14590.480133	53.86	20.4	50.59	H
16227.785267	58.54	25.6	57.93	H
17555.123867	63.21	29.4	61.3	H

**802.11g**
**Ch11 30MHz~1GHz**

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
33.949748	14.24	-25.9	13.63	V
35.158008	16.70	-25.9	14.79	V
67.636836	14.97	-27.5	12.31	V
73.697992	10.85	-28.2	7.58	H
117.471060	10.81	-25.0	6.52	H
864.121200	20.51	-8.3	15.35	V

**Ch11 1GHz~3GHz**

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2670.594616	53.84	10.0	53.23	V
2788.670577	53.53	10.3	51.62	V
2856.710000	52.70	11.0	50.04	V
2907.828270	53.28	11.3	50.01	H
2949.392500	55.53	11.2	51.24	H

2995.196731	54.19	11.8	49.03	V
-------------	-------	------	-------	---

**Ch11 3GHz~18GHz**

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
4936.774133	60.91	1.0	60.3	V
14305.503067	55.07	20.7	53.16	V
15415.303600	56.07	23.2	53.41	V
15961.441467	58.78	25.1	55.51	H
16807.687000	60.54	27.4	56.25	H
17614.433867	62.68	29.4	57.52	V

**802.11n-20MHz**
**Ch11 30MHz~1GHz**

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
34.484432	9.78	-25.9	9.17	V
38.720616	7.91	-25.1	6	V
68.384892	9.64	-27.7	6.98	V
73.585044	13.55	-28.2	10.28	H
117.142720	10.49	-25.0	6.2	H
913.302336	21.34	-7.3	16.18	V

**Ch11 1GHz~3GHz**

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2586.275962	51.47	9.2	50.86	V
2666.621154	53.19	10.0	51.28	V
2750.667500	52.54	10.1	49.88	V
2846.977500	53.49	10.9	50.22	H
2905.616346	53.90	11.3	49.61	H
2996.541730	54.69	11.8	49.53	V


## Ch11 3GHz~18GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
4926.202533	58.66	0.9	58.05	V
15716.740400	57.33	24.0	55.42	V
16476.341000	59.10	26.6	56.44	V
16996.660000	60.85	27.1	57.58	H
17531.180667	61.68	29.3	57.39	H
17963.082400	62.63	30.0	57.47	V


## All Ch 18GHz~26.5GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
21179.000000	45.48	6.97	38.51	V
22748.950000	41.63	3.05	38.58	H
23684.800000	41.59	3.05	38.54	H
24633.400000	40.05	3.05	37.00	V
25567.550000	43.01	2.90	40.11	H
26066.500000	42.06	2.90	39.16	V


Test graphs as below:

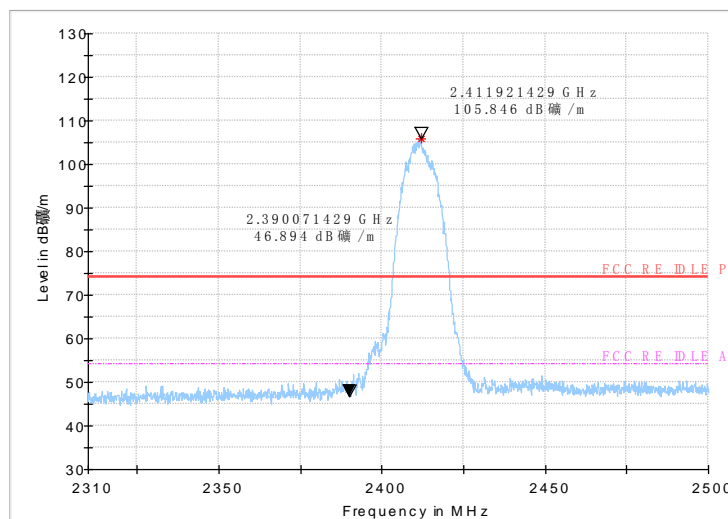


**Fig.44 Radiated emission (Power): 802.11b, low channel**

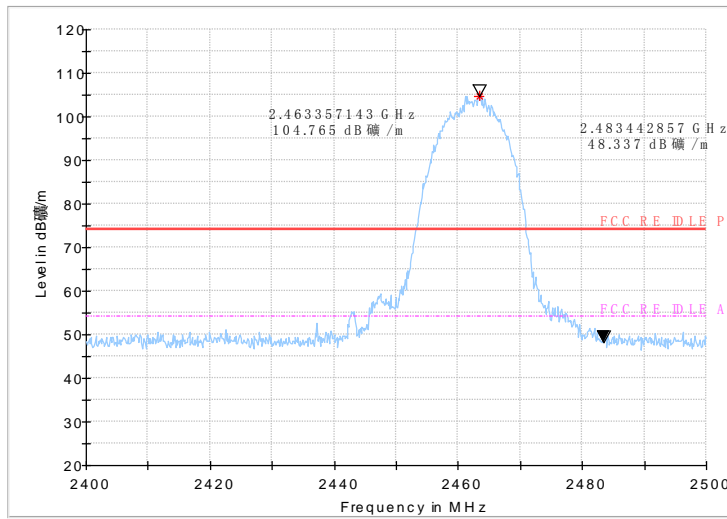


**Fig.45 Radiated emission (Power): 802.11b, high channel**

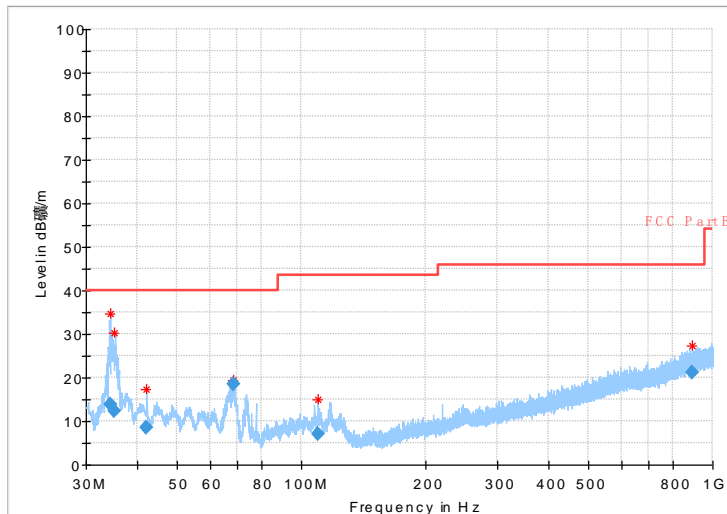


**Fig.46 Radiated Spurious Emission (802.11b,Ch1,30MHz~1GHz)**

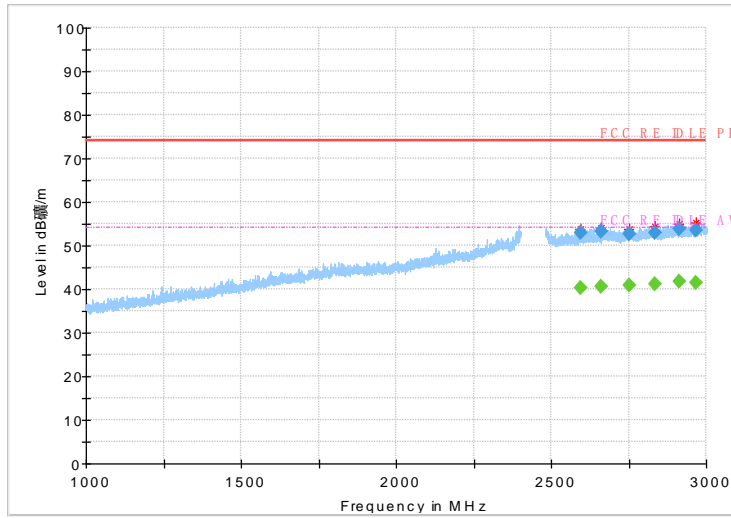


**Fig.47 Radiated Spurious Emission (802.11b,Ch1,1GHz~3GHz)**

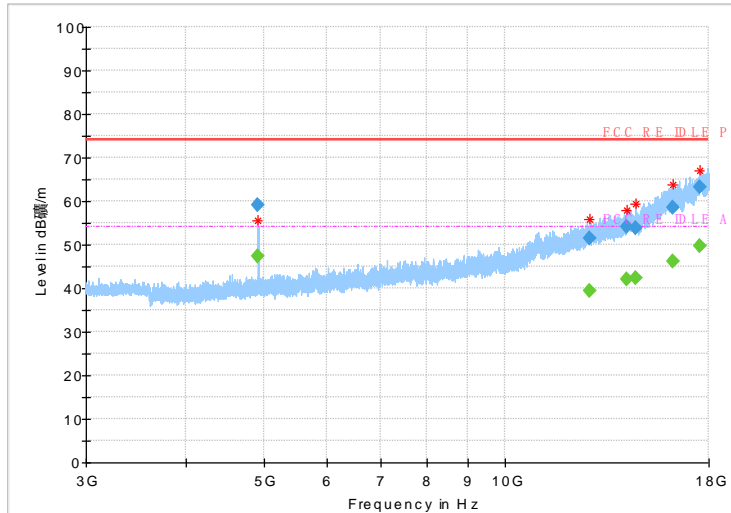

**Fig.48 Radiated Spurious Emission (802.11b,Ch1,3GHz~18GHz)**

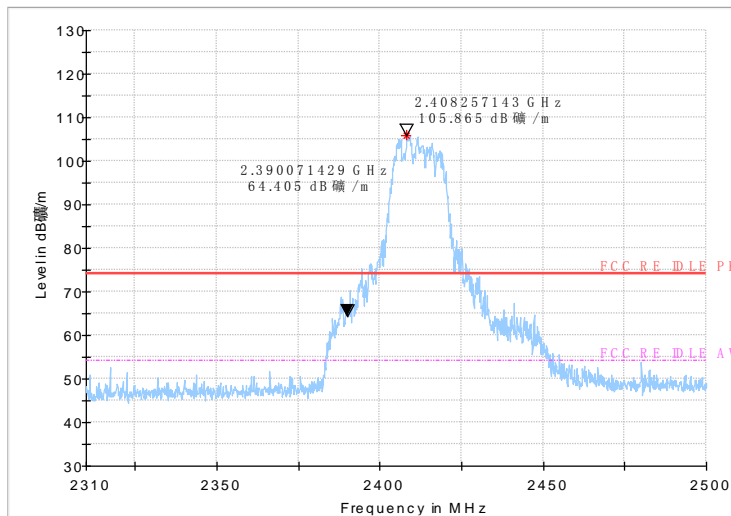


**Peak detector**

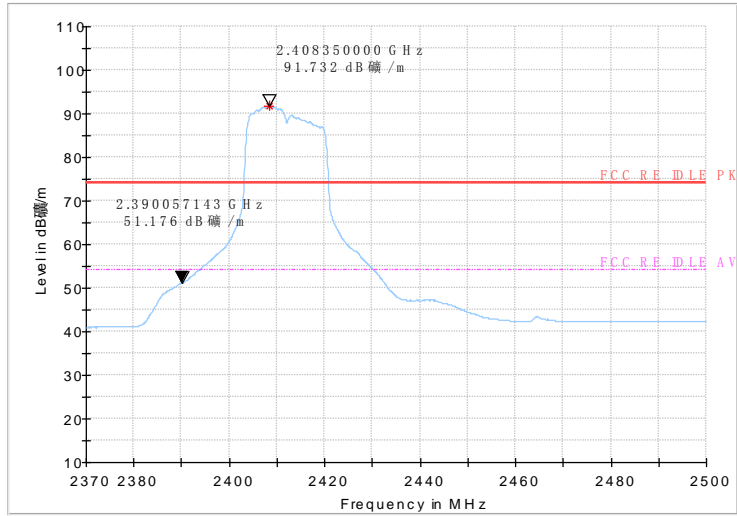


**AV detector**

**Fig.49 Radiated emission (Power): 802.11g, low channel**

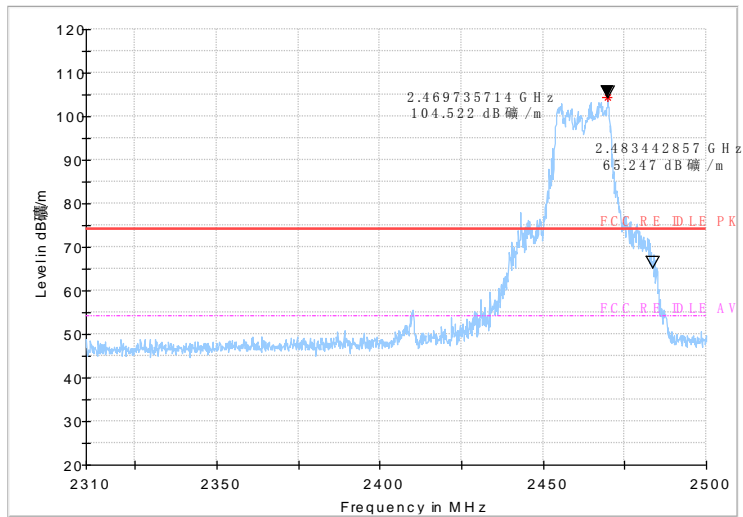


**Peak detector**

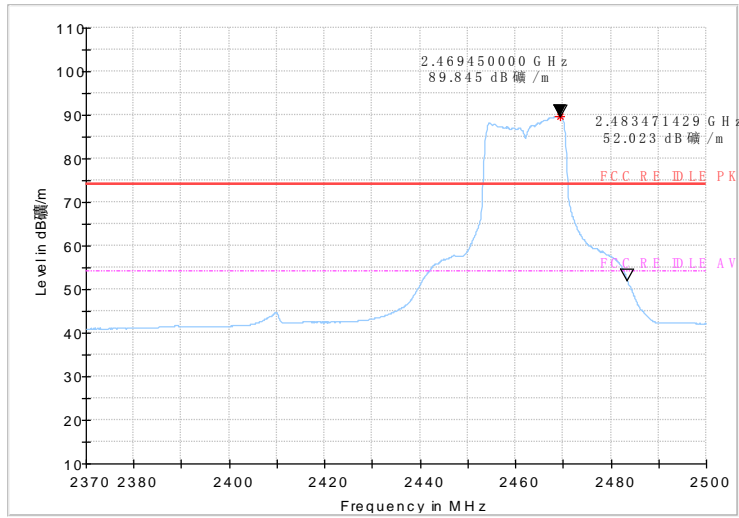


**AV detector**

**Fig.50 Radiated emission (Power): 802.11g, high channel**

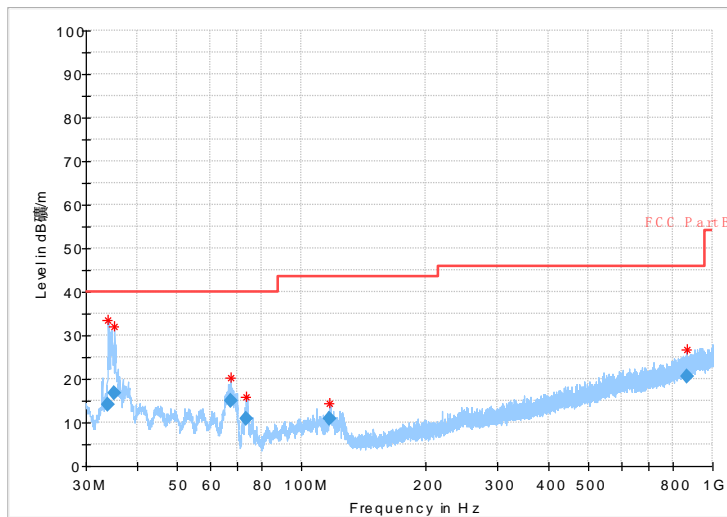


**Fig.51 Radiated Spurious Emission (802.11g,Ch11,30MHz~1GHz)**




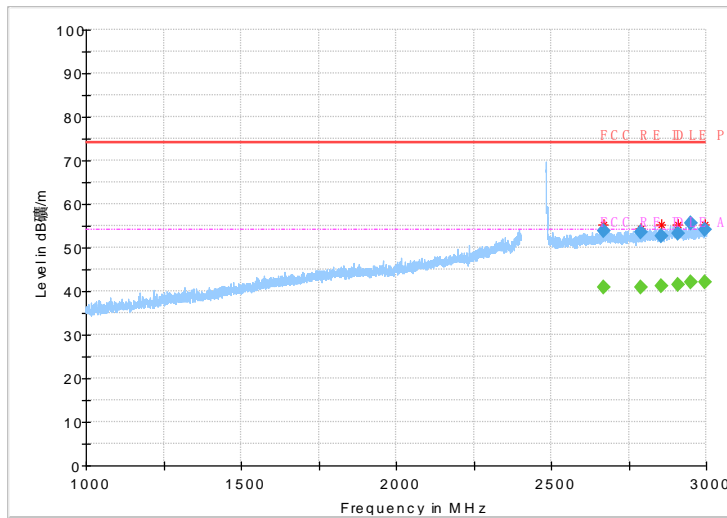


**Fig.52 Radiated Spurious Emission (802.11g,Ch11,1GHz~3GHz)**

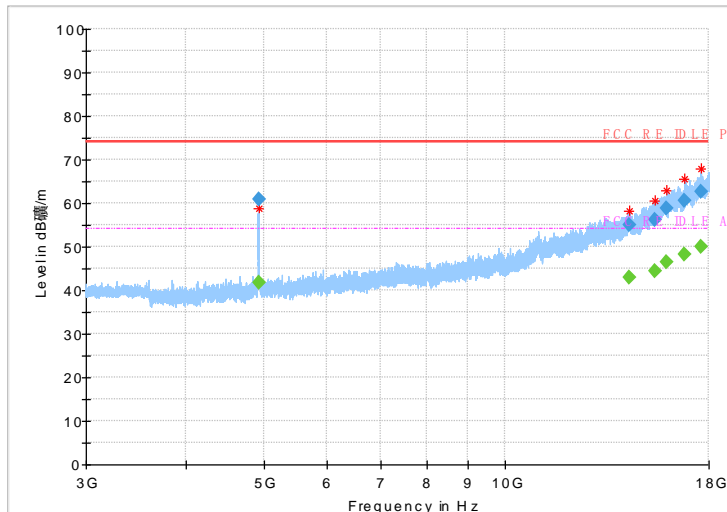

**Fig.53 Radiated Spurious Emission (802.11g,Ch11,3GHz~18GHz)**

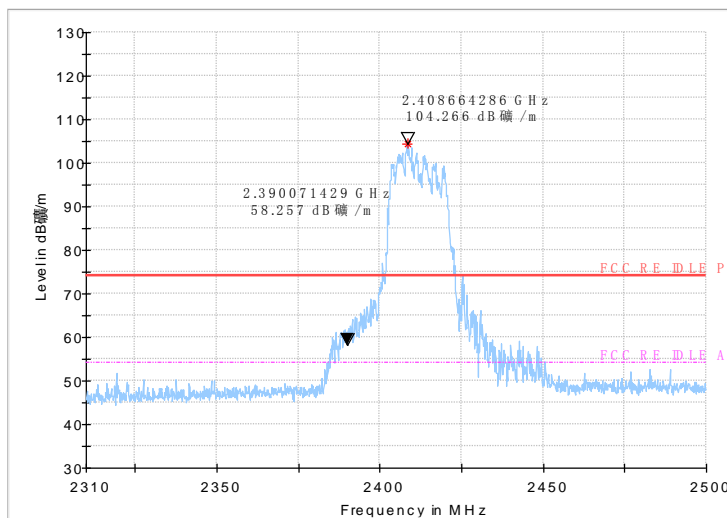


**Peak detector**

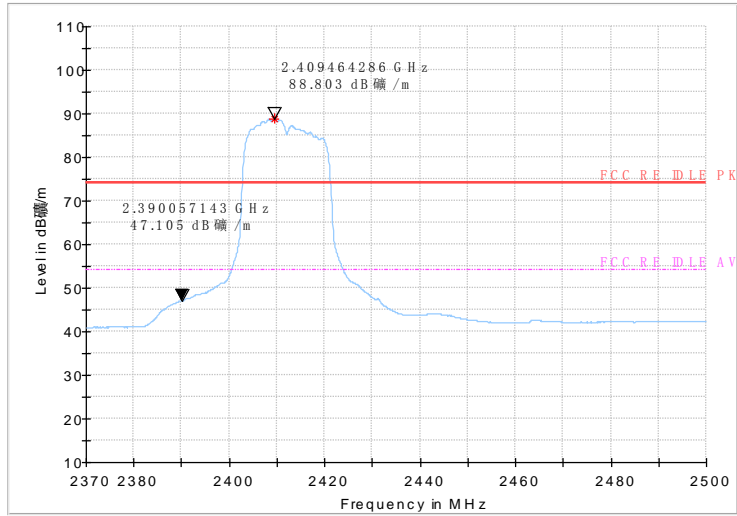


**AV detector**

**Fig.54 Radiated emission (Power): 802.11n, low channel**

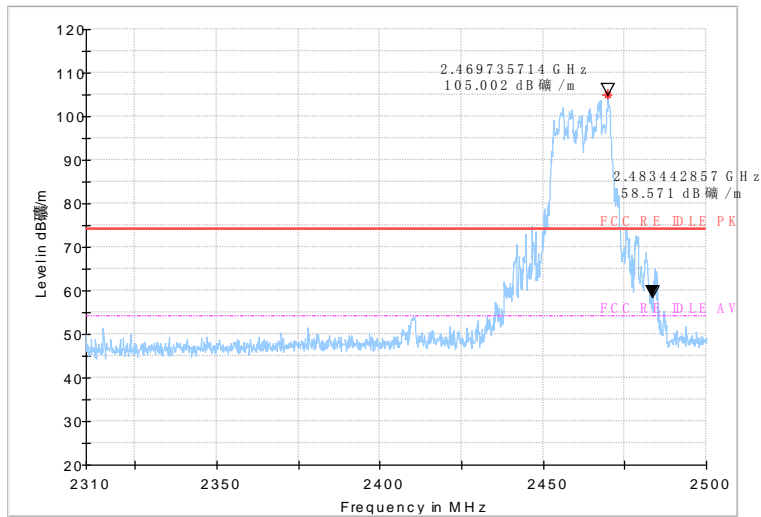


**Peak detector**

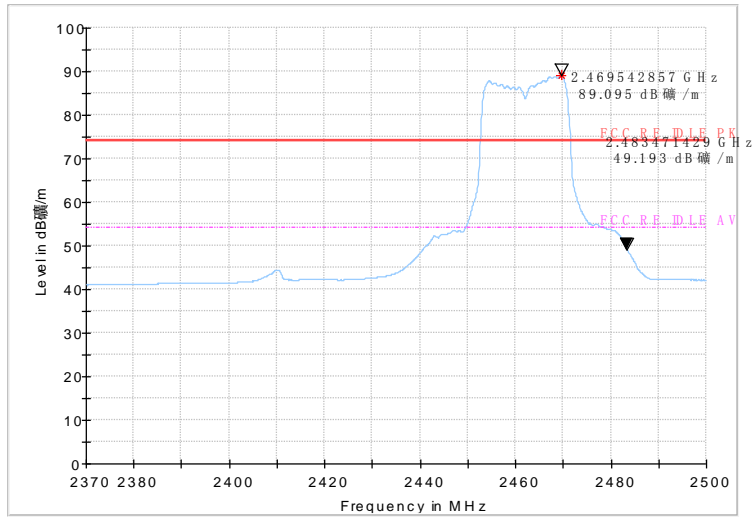


**AV detector**


**Fig.55 Radiated emission (Power): 802.11n, high channel**

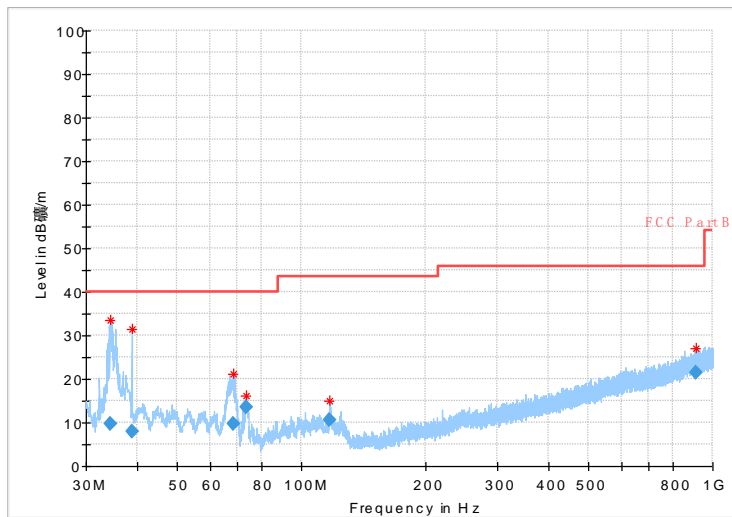


**Fig.56 Radiated Spurious Emission (802.11 n-20MHz,Ch1,30MHz~1GHz)**

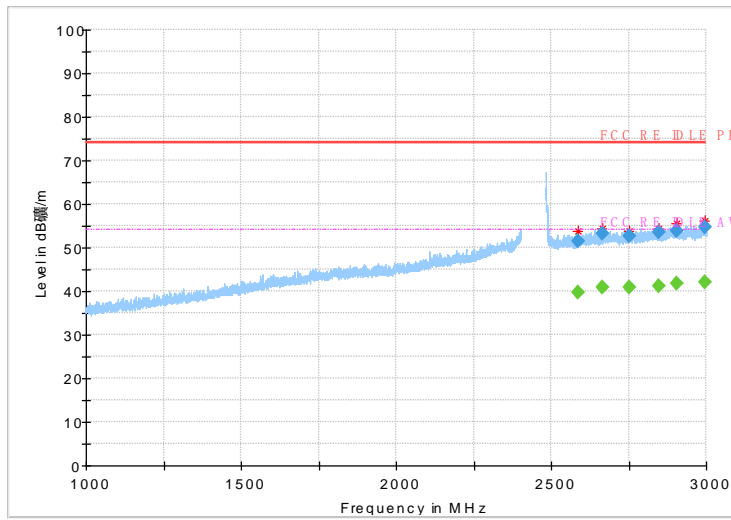

**Fig.57 Radiated Spurious Emission (802.11 n-20MHz,Ch1,1GHz~3GHz)**

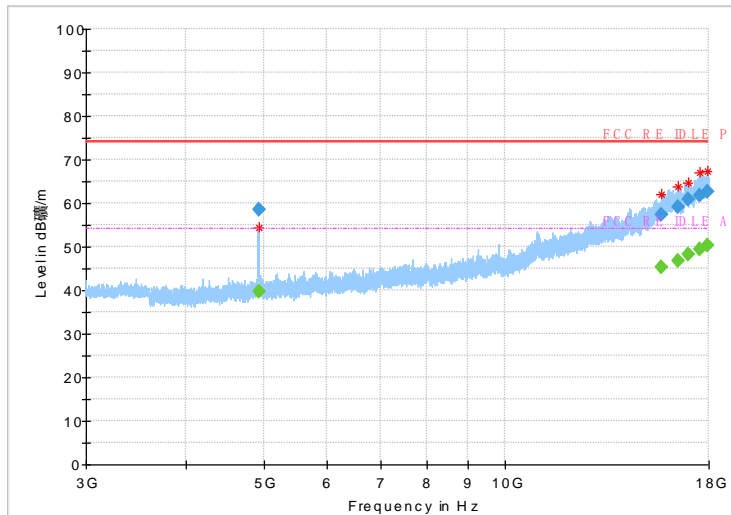

**Fig.58 Radiated Spurious Emission (802.11 n-20MHz,Ch1,3GHz~18GHz)**

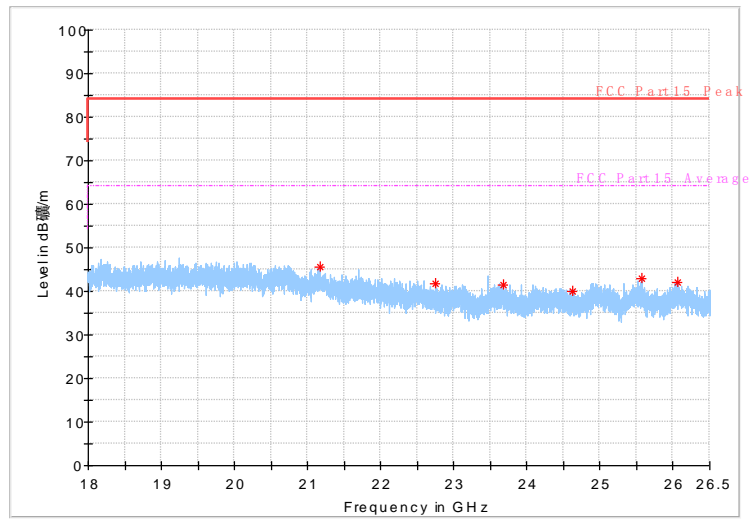

**Fig.59 Radiated emission: GFSK, 18 GHz – 26.5 GHz**

## 7. Test Equipments and Ancillaries Used For Tests

The test equipments and ancillaries used are as follows.

### Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Date	Cal.interval
1	Vector Signal Analyser	FSQ26	101096	Rohde&Schwarz	2016-05-12	1
2	DC Power Supply	ZUP60-14	LOC-220Z006-0007	TDL-Lambda	2016-05-12	1

### Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Date	Cal.interval
1	Universal Radio Communicati	CMU200	123126	R&S	2016-05-12	1
2	Test Receiver	ESU40	100307	R&S	2016-05-12	1
3	Trilog Antenna	VULB9163	VULB9163-515	Schwarzbeck	2014-11-05	3
4	Double Ridged Guide Antenna	ETS-3117	00135885	ETS	2014-05-06	3
5	2-Line V-Network	ENV216	101380	R&S	2016-05-12	1

### Anechoic chamber

Fully anechoic chamber by Frankonia German.

## 8. Test Environment

**Shielding Room1** (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

**Control room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

**Fully-anechoic chamber1** (6.8 meters×3.08 meters×3.53 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

**Fully-anechoic chamber2** (Tapered Section: 8.75 meters×3.66 meters×3.66 meters, Rectangular Section: 7.32 meters×3.97 meters×3.66 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %

Shielding effectiveness	> 110 dB
Electrical insulation	> 10 k $\Omega$
Ground system resistance	< 0.5 $\Omega$
Uniformity of field strength	Between 0 and 6 dB, from 30MHz to 40000MHz

## ANNEX A. Deviations from Prescribed Test Methods

No deviation from Prescribed Test Methods.

\*\*\*\*\*End The Report\*\*\*\*\*