



RF TEST REPORT

Product Name : Bluetooth USB Dongle

Model Number : UBTB1

Brand Name : Cadmus Micro

FCC ID : SGE-UBTB1

Applicant : Cadmus Micro Inc.

Address : 1840 Carlos Ave., Ontario CA 91761

Received Date : October 28, 2004

Tested Date : November 02 ~ 22, 2004

Notes :

1. This report will be invalid if duplicated or photocopied in part.
2. This report refers only to the specimen(s) submitted to testing, and be invalid as separately used.
3. This report is invalid without examination stamp and signature of this institute.
4. The tested specimen(s) will be preserved for thirty days from the data issued.
5. The report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.



**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing
Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : SGE-UBTB1

Report No. : ER04-10-076FRF

Page 2 of 53

Test Report Certification

Product Name : Bluetooth USB Dongle**Model Number** : UBTB1**Brand Name** : Cadmus Micro**FCC ID** : SGE-UBTB1**Applicant** : Cadmus Micro Inc.**Measurement Standard :**

FCC 47 C.F.R. Part 15, Subpart B and Subpart C (2004)
ANSI C63.4 (2003)

Tested By :Chris Huang

(Chris Huang)

Date November 25, 2004**Approved By** :Chieh-De Tsai

(Chieh-De Tsai, Manager)

Date November 25, 2004

WE HEREBY CERTIFY THAT: The measurements shown in the attachment were made in accordance with the procedures indicated, and the energy emitted by the equipment was found to be within the limits applicable. We assume full responsibility for the accuracy and completeness of these measurements and vouch for the qualifications of all persons taking them.



TABLE OF CONTENTS

TITLE	PAGE NO.
1. GENERAL INFORMATION	5
1.1 General Statement	5
1.2 General Description of EUT & Power	5
1.3 Description of Peripherals.....	6
1.4 EUT & Peripherals Setup Diagram.....	6
1.5 EUT Operating Condition	6
1.6 Description of Test Site.....	7
1.7 Summary of Test Results	8
2. CONDUCTED POWERLINE TEST	9
2.1 Test Equipments.....	9
2.2 Test Setup.....	9
2.3 Conducted Power Line Emission Limit	10
2.4 Test Procedure.....	10
2.5 Uncertainty of Conducted Emission	10
2.6 Conducted RF Voltage Measurement	11-12
2.7 Photos of Conduction Test	13
3. 20dB BANDWIDTH FOR HOPPING	14
3.1 Test Equipments.....	14
3.2 Test Setup.....	14
3.3 Limits of 20db Bandwidth Measurement.....	14
3.4 Test Procedure.....	14
3.5 Uncertainty of Conducted Emission	15
3.6 Test Results	15
3.7 Photo of 20db Bandwidth Measurement.....	16
4. MAXIMUM PEAK OUTPUT POWER	17
4.1 Test Equipments.....	17
4.2 Test Setup.....	17
4.3 Limits of Maximum Peak Output Power	17
4.4 Test Procedure.....	18
4.5 Uncertainty of Conducted Emission	18
4.6 Test Results	18
4.7 Photo of Maximum Peak Output Power	19
5. HOPPING CHANNEL SEPARATION.....	20
5.1 Test Equipments.....	20
5.2 Test Setup.....	20
5.3 Limits of Hopping Channel Separation.....	20
5.4 Test Procedure.....	21
5.5 Uncertainty of Conducted Emission	21
5.6 Test Results	21
5.7 Photo of Hopping Channel Separation.....	21



TABLE OF CONTENTS

TITLE	PAGE NO.
6. NUMBER OF HOPPING FREQUENCY USED.....	22
6.1 Test Equipments.....	22
6.2 Test Setup.....	22
6.3 Limits of Number of Hopping Frequency Used.....	22
6.4 Test Procedure.....	23
6.5 Uncertainty of Conducted Emission	23
6.6 Test Results	23
6.7 Photo of Number of Hopping Frequency Used.....	23
7. DWELL TIME ON EACH CHANNEL	24
7.1 Test Equipments.....	24
7.2 Test Setup.....	24
7.3 Limits of Dwell Time on Each Channel	24
7.4 Test Procedure.....	25
7.5 Uncertainty of Conducted Emission	25
7.6 Test Results	25
7.7 Photo of Dwell Time on Each Channel.....	26
8. BAND EDGE MEASUREMENT	27
8.1 Test Equipments.....	27
8.2 Test Setup.....	27
8.3 Limits of Band edge Measurements.....	27
8.4 Test Procedure.....	28
8.5 Uncertainty of Conducted Emission	28
8.6 Test Results	28
8.7 Photo of Band Edge Measurement.....	29-31
9. OUT OF BAND SPURIOUS EMISSIONS -RADIATED MEASUREMENTS.....	32
9.1 Test Equipments.....	32
9.2 Test Setup.....	32
9.3 Radiation Limit	33
9.4 Test Procedures	34
9.5 Uncertainty of Radiated Emission	34
9.6 Radiated RF Noise Measurement.....	35-47
9.7 Photos of Open Site.....	48-49
10. ANTENNA REQUIREMENT	50
10.1 Standard Applicable	50
10.2 Antenna Connected Construction	50
11. APPENDIX A	A1-A3



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : SGE-UBTB1

Report No. : ER04-10-076FRF

Page 5 of 53

1. GENERAL INFORMATION

1.1 General Statement

MEASUREMENT DEVIATION : Comply with standard in full

TRACEABILITY : This test result is traceable to National or International std.

1.2 General Description of EUT & Power

Product Name	Bluetooth USB Dongle
Model Number	UBTB1
Frequency Range	2402MHz to 2480MHz $f = 2402 + n\text{MHz}$, $n = 0, \dots, 78$
Channel Spacing	1MHz
Channel Number	79
Air Data Rate	723Kbps
Type of Modulation	Frequency Hopping Spread Spectrum
Frequency Selection	by software / firmware
Transmitter Classification	portable device
Antenna Type	Dipole Antenna, Antenna Gain : 1.2dBi
Power Source	5VDC (From USB interface of Notebook)

Multiple List :

Company	Address	Product Name	Model Name
Billionton Systems Inc.	No. 21, Sui-Lih Rd, Hsin-Chu, 300, Taiwan	Bluetooth USB Dongle	UBTB1
Billionton Systems Inc.	No. 21, Sui-Lih Rd, Hsin-Chu, 300, Taiwan	Bluetooth USB Dongle	UBTB1-N
Billionton Systems Inc.	No. 21, Sui-Lih Rd, Hsin-Chu, 300, Taiwan	Bluetooth USB Dongle	UBTB1-B
Cadmus Mirco Inc.	1840 Carlos Ave., Ontario CA 91761	Bluetooth USB Dongle	UBTB1-C
Ziga	1840 Carlos Ave., Ontario CA 91761	Bluetooth USB Dongle	UBTB1-Z
DSG Retail Ltd.	Dixons House, 200 The Campus, Maylands Avenue, Hemel Hempstead, Hertfordshire, HP2 71G, United Kingdom	Bluetooth USB Dongle	UBTB1-N-DX
Cables Direct Limited	Unit C Heage RD, Industrial Estate, Heage RD, Ripley, Derbyshire, DE5 3GH, United Kingdom	Bluetooth USB Dongle	UBTB1-N-CDL
MEDION AKTIEGESELLSCHAFT-GERMANY	GANSEMARKT 16-18 ESSEN GM 45127 GERMANY	Bluetooth USB Dongle	UBTB1-N-MD (MEDION)
DATAMATIC S.P.A	VIA AGORDAT, 34 MILANO MI 20124 ITALY	Bluetooth USB Dongle	UBTB1-N-DM (MEDIACOM)
MAXDATA SYSTEME GMBH	CAROL-SCHMID-STR. 12, WUERSELEN 52146 GERMANY	Bluetooth USB Dongle	UBTB1-N-MAX (MAXDATA)
SITECOM EUROPE B.V.	LICHTENAUERLAAN 222, BRAINPARK 2, ROTTERDAM, 3062ME NETHERLANDS	Bluetooth USB Dongle	CN502 (SITECOM)
2L INTERNATIONAL	DATABANKWEG 7-3821 AL AMERSFOORT PO BOX 150-3800 AD AMERSFOORT, NE	Bluetooth USB Dongle	CBT100U (CONCEPTRONIC)
CityCom Corp.	3F, NO. 532, SEC. 2, JHONGSHAN RD., JHONGHE CITY, TAIPEI HSIEN, TAIWAN, R.O.C.	Bluetooth USB Dongle	UBTB1-N-CTC (CUBIX)
CARECA ITALIA S.P.A.	VIA BORSELLINO, 14 42010 ARCETO DI SCANDIANO REGGIO EMILIA 42019 IT	Bluetooth USB Dongle	XBTUS100 (HAMLET)
ANUBIS ELECTRONIC GMBH	Am Langfeld 38 Saarbruecken 66130 GERMANY	Bluetooth USB Dongle	20007 (TYPHOON)
ASBISC ENTERPRISES LIMITED	63 KOLONAKIOU STREET, CY-4013 LIMASSOL, CYPRUS 4013 CYPRUS	Bluetooth USB Dongle	UBTB1-N-CYT (CANYON)



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : SGE-UBTB1


Report No. : ER04-10-076FRF

Page 6 of 53

1.3 Description of Peripherals

No.	Product	Manufacturer	Model No.	Serial No.	Input Power	Output Power
1	Notebook PC	COMPAQ	N800V	5Y33KSQZM0YV 1YR	18.5VDC, 65W, 3.5A	-----
	Adapter	COMPAQ	PPP009H	2Y18650504	100~240VAC, 50/60, 1.6A	18.5VDC, 65W, 3.5A
2	Printer	HP	C6431D	CN19T6S011	100~240VAC, 50/60Hz, 0.7A	-----

1.4 EUT & Peripherals Setup Diagram

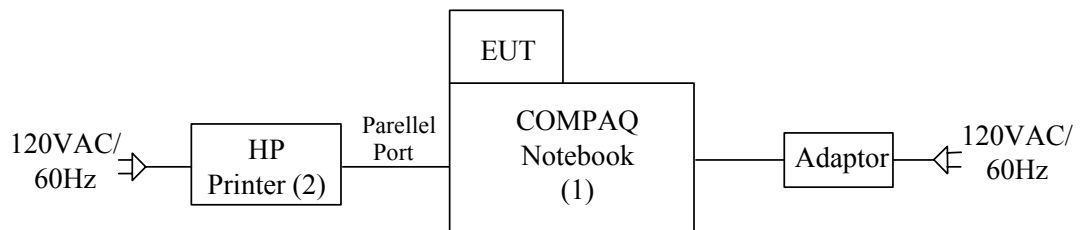

The indicated numbers (1)(2), please refer to item 1.3

1.5 EUT Operating Condition

1. Run Broadcom Blue Tool → Blue Tool.
2. Choice Transport → HCI Control → USB and press ok.
3. Choice Enable USB HID Emulation, and press ok.
4. Start Tx mode test :
 - (a) Choice Set_Tx_Carrier_Frequency, key in channel MHz, and choice Modulatel PRBS9, press ok.
5. Start RX mode test :
 - (a) Choice Write_Receive Only, key in channel MHz, press ok.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : SGE-UBTB1

Report No. : ER04-10-076FRF

Page 7 of 53

1.6 Description of Test Site

SITE DESCRIPTION :

FCC Certificate NO. : 90585
BSMI Certificate NO. : SL2-IN-E-0002
NVLAP Lab Code : 200118-0
CNLA Certificate NO. : CNLA-ZL97018
VCCI Certificate NO. : R-1229, C-1250
TÜV Rheinland Certificate NO. : 10008375

NAME OF SITE : Ecom Sertech Corp. Hsin-Chu Lab.
(Spin-off from ITRI / ERSO on Apr. 01, 2003)

SITE LOCATION : Rm.258, Bldg.17, NO.195 , Sec. 4, Chung Hsing Rd.,
Chu-Tung Chen. Hsin-Chu, Taiwan 310 R.O.C.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : SGE-UBTB1

Report No. : ER04-10-076FRF

Page 8 of 53

1.7 Summary of Test Results

The EUT has been tested according to the following specifications : (1 ~ 79 Channel)

APPLIED STANDARD : FCC 47 C.F.R. Part 15, Subpart B and Subpart C			
Standard Section	Test Item and Limit	Result	REMARK
15.107 15.207	AC Power Conducted Emission Limit: Sec1.5.107	PASS	Meet the requirement of limit
15.109 15.205 15.209	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit
15.247(a)(1)	Transmitter 20dB Bandwidth	N/A	Meet the requirement of limit
15.247(b)(1)	Maximum Peak Output Power Limit: max. 125mW	PASS	Meet the requirement of limit
15.247(a)(1)	Carrier Frequency Separation Limit: 2/3 of the 20dB bandwidth	PASS	Meet the requirement of limit
15.247(a)(1)(iii)	Number of Hopping Frequency Limit: at least 15 channels	PASS	Meet the requirement of limit
15.247(a)(1)(iii)	Time of Occupancy (dwell time) Limit: 0.4sec within 31.6sec	PASS	Meet the requirement of limit
15.247(d)	Band Edge Compliance	PASS	Meet the requirement of limit
15.247(d)	Out of Band Measurements	PASS	Meet the requirement of limit



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : SGE-UBTB1

Report No. : ER04-10-076FRF

Page 9 of 53


2. CONDUCTED POWERLINE TEST

2.1 Test Equipments

The following test equipments are used during the conducted powerline tests :

Manufacturer or Type	Model No.	Serial No.	Date of Calibration	Calibration Period	Remark
HP QUASI-PEAK ADAPTER	8594E	3801A05627	April 26, 2004	1 Year	PRETEST
SOLAR ISOLATION TRANSFORMER	7032-1	N/A	N/A	N/A	FINAL
EMCO L.I.S.N.	3850/2	9311-1025 9401-1028	January 08, 2004 For Characteristic impedance	1 Year	FINAL
			May 18, 2004 For Insertion loss		
R & S TEST RECEIVER	ESHS30	838550/003	February 11, 2004	1 Year	FINAL
KEENE SHIELDED ROOM	5983	No.1	N/A	N/A	FINAL
R & S PULSE LIMIT	EHS3Z2	357.8810.52	July 10, 2004	1 Year	FINAL
N TYPE COAXIAL CABLE	-----	-----	July 10, 2004	1 Year	FINAL
50Ω TERMINATOR	-----	-----	July 10, 2004	1 Year	FINAL

2.2 Test Setup

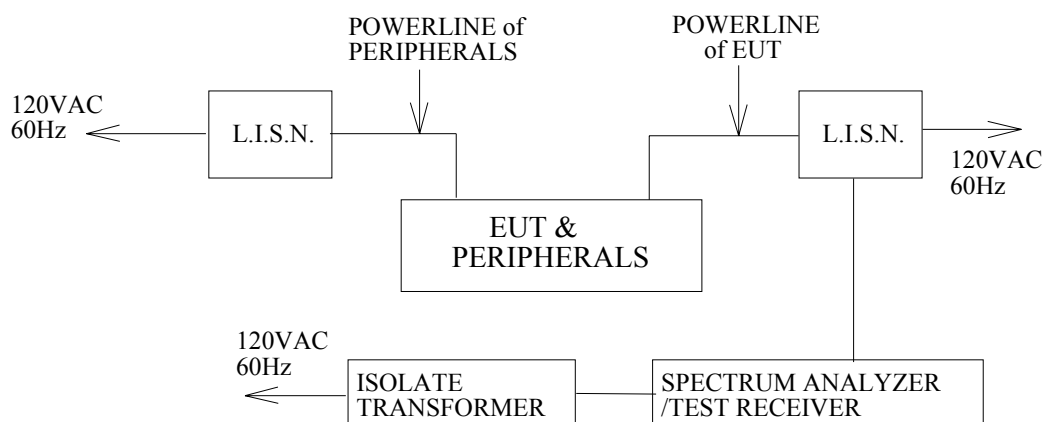

2.3 Conducted Power Line Emission Limit

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following :

Frequency (MHz)	Maximum RF Line Voltage (dB μ v)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency

For intentional device, according to § 15.207(a) Line Conducted Emission Limit is same as above table.

2.4 Test Procedure

The test procedure is performed in a 12ft×12ft×8ft(L×W×H) shielded room.

The EUT along with its peripherals were placed on a 1.0m(W)× 1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chasis ground was bounded to the horizontal ground plane of shielded room. All peripherals were connected to the second LISN and the chasis ground also bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

2.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is ± 1.36 dB.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : SGE-UBTB1

Report No. : ER04-10-076FRF


Page 11 of 53

2.6 Conducted RF Voltage Measurement

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

Company	Cadmus Micro Inc.	Test Date	2004/11/02
Product Name	Bluetooth USB Dongle	Test By	Chris Huang
Model Name	UBTB1	TEMP&Humidity	25°C, 60%

LINE

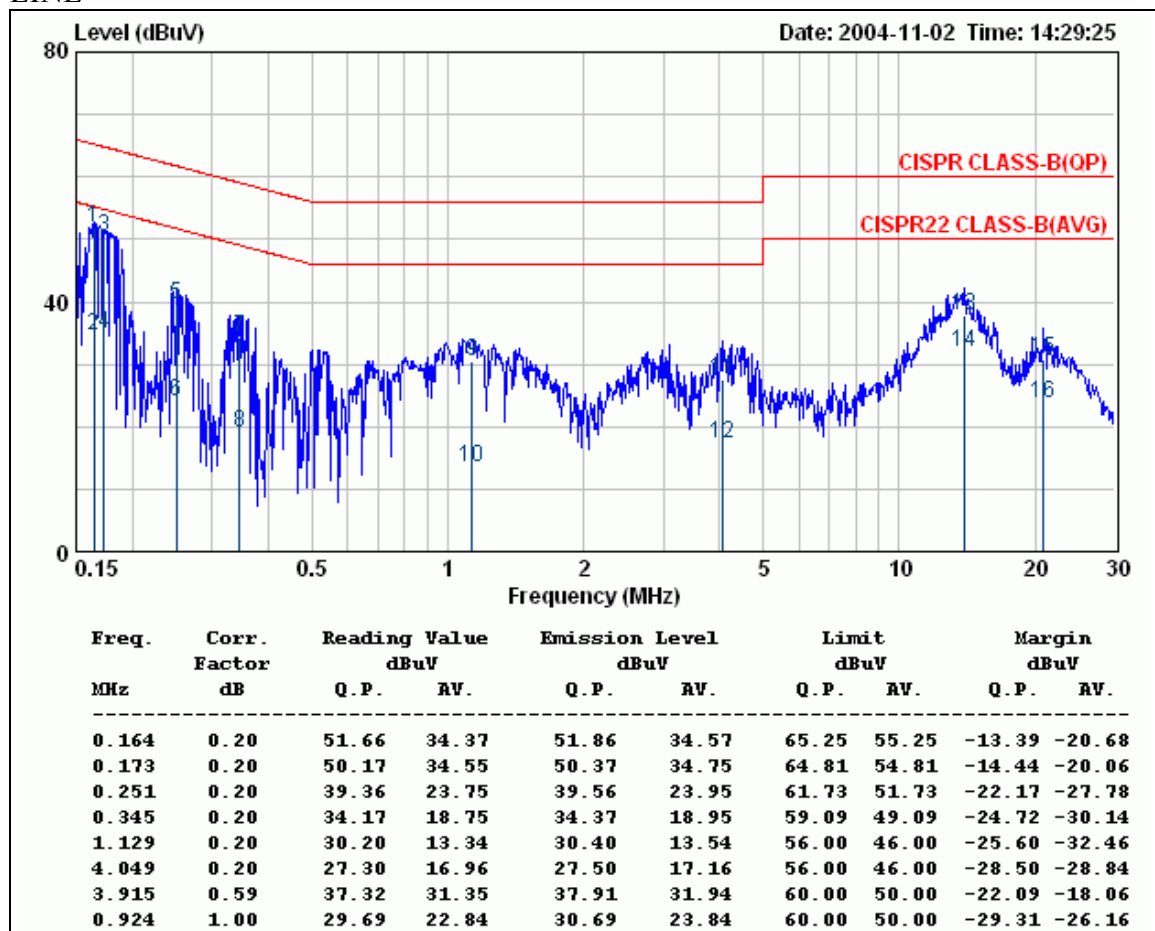

REMARKS :
1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level – Limit value
3. The EUT can be operated in transmitting, stand-by and receiving mode. After preliminary scan, EUT in transmitting mode has highest emission.
The EUT was set in transmitting mode at final test to get the worst case test results.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : SGE-UBTB1


Report No. : ER04-10-076FRF

Page 12 of 53

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

Company	Cadmus Micro Inc.	Test Date	2004/11/02
Product Name	Bluetooth USB Dongle	Test By	Chris Huang
Model Name	UBTB1	TEMP&Humidity	25°C, 60%

NEUTRAL

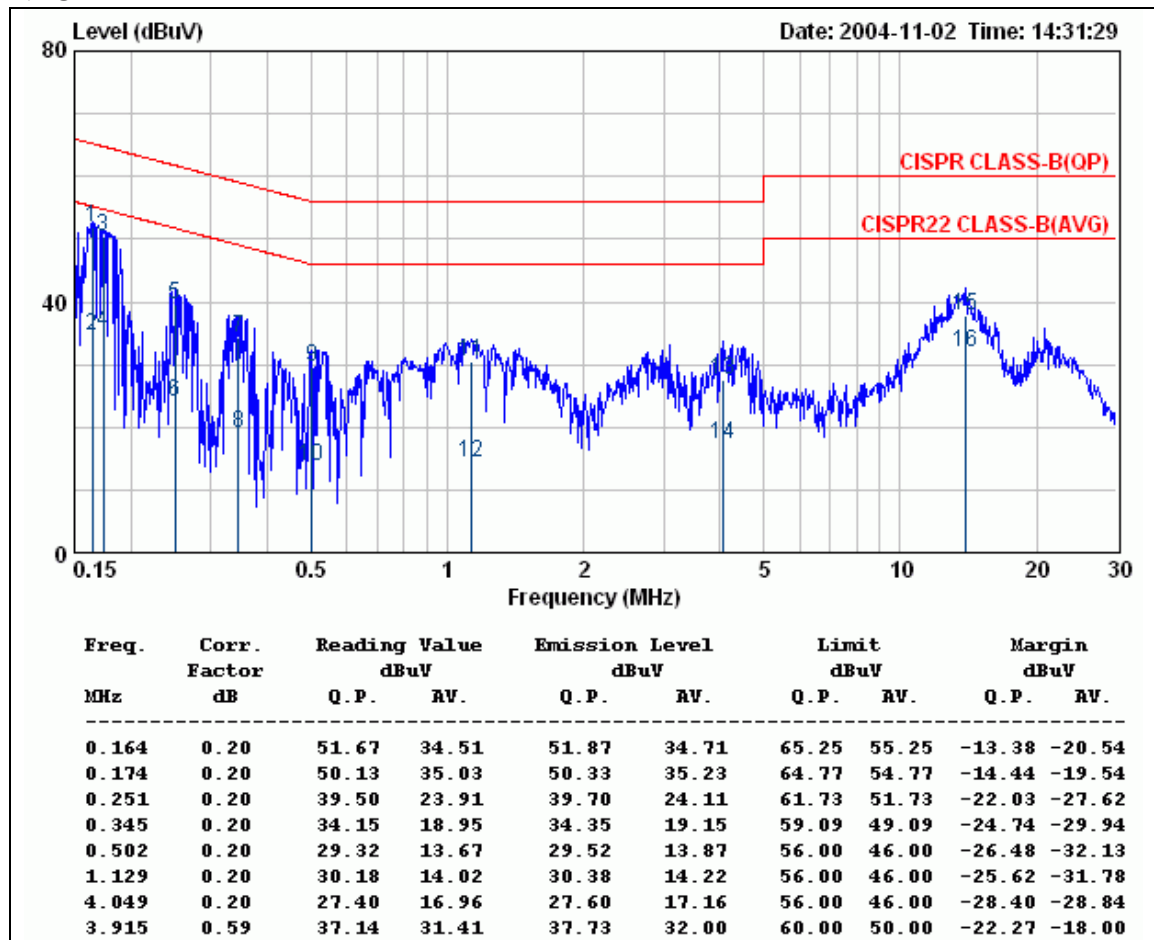

REMARKS :
1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level – Limit value
3. The EUT can be operated in transmitting, stand-by and receiving mode. After preliminary scan, EUT in transmitting mode has highest emission.
The EUT was set in transmitting mode at final test to get the worst case test results.

2.7 Photos of Conduction Test





3. 20dB BANDWIDTH FOR HOPPING

Test Requirement: 15.247(a)(1)

3.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	September 06, 2004

NOTE :

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA

3.2 Test Setup



3.3 Limits of 20db Bandwidth Measurement

Limit : N/A

3.4 Test Procedure

The 20dB band width was measured with a spectrum analyzer connected to RF antenna connector(conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency. The analyzer center frequency was set to the EUT carrier frequency, using the analyzer. Display Line and Marker Delta functions, the 20dB band width of the emission was determined.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : SGE-UBTB1

Report No. : ER04-10-076FRF

Page 15 of 53

3.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is $\pm 10\text{KHz}$.

3.6 Test Results

Refer to attached spectrum analyzer data chart.

Input Power (System)	5VDC (From USB interface of PC)	Environmental Conditions	26°C, 48%RH
Tested By	Chris Huang		

Channel	Channel Frequency (MHz)	20dB Bandwidth (MHz)	Pass / Fail
01 (Low)	2402	1.052	N/A
40 (Mid)	2441	1.042	N/A
79 (High)	2480	1.042	N/A



Ecom Sertech Corp.


Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : SGE-UBTB1


Report No. : ER04-10-076FRF

Page 16 of 53


3.7 Photo of 20db Bandwidth Measurement

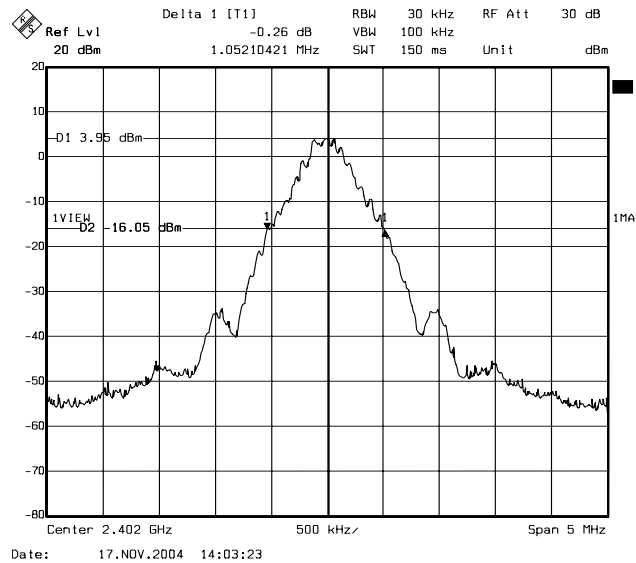

Channel Low

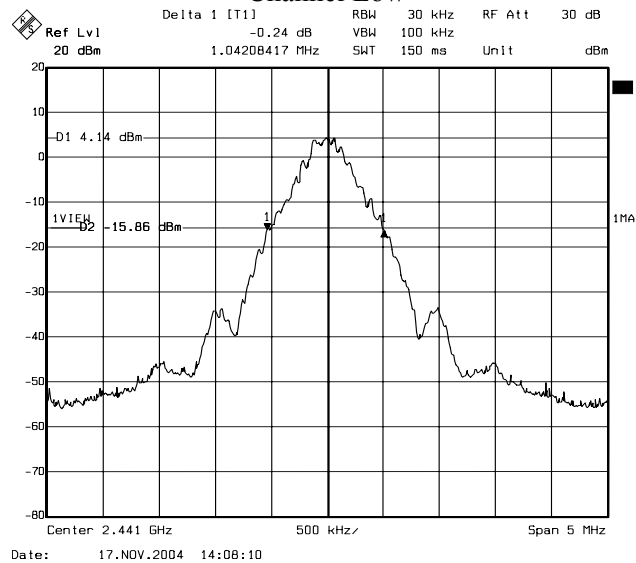

Channel Middle

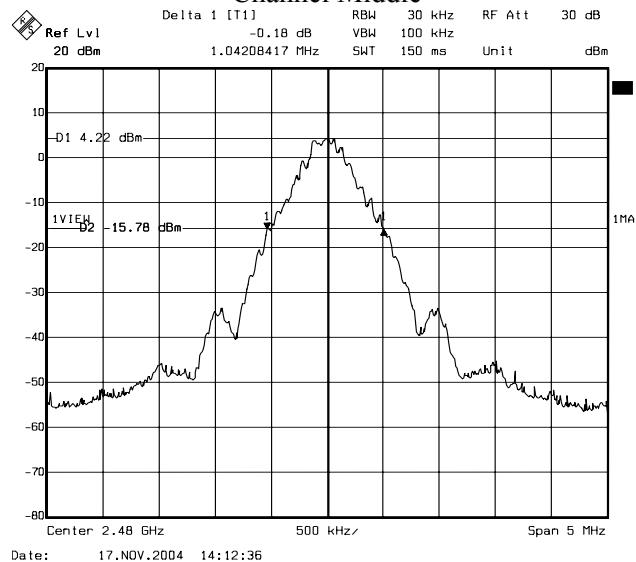

Channel High

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : SGE-UBTB1

Report No. : ER04-10-076FRF

Page 17 of 53

4. MAXIMUM PEAK OUTPUT POWER

Test Requirement: 15.247(b)(1)


4.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	September 06, 2004

Note :

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.2 Test Setup



4.3 Limits of Maximum Peak Output Power

The Maximum Peak Output Power Measurement is 125mW for frequency hopping systems operating in 2400~2483.5 MHz employing at least 15 hopping channels.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : SGE-UBTB1

Report No. : ER04-10-076FRF

Page 18 of 53

4.4 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency, A spectrum analyzer was used to record the shape of the transmit signal see 4.7 for the measurement set up.

4.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is $\pm 1.82\text{dB}$.

4.6 Test Results

Input Power (System)	5VDC (From USB interface of PC)	Environmental Conditions	26°C, 48%RH
Tested By	Chris Huang		

Cable loss = 0.5dB

Channel	Channel Frequency (MHz)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass / Fail
01 (Low)	2402	7.50	20.97	PASS
40 (Mid)	2441	7.72	20.97	PASS
79 (High)	2480	7.78	20.97	PASS

- Note :
1. At final test to get the worst-case emission at 1Mbps.
 2. The result basic equation calculation as follow :
Peak Power Output = Peak Power Reading + Cable loss
 3. The EUT is a portable device.



Ecom Sertech Corp.


Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : SGE-UBTB1

Report No. : ER04-10-076FRF


Page 19 of 53

4.7 Photo of Maximum Peak Output Power

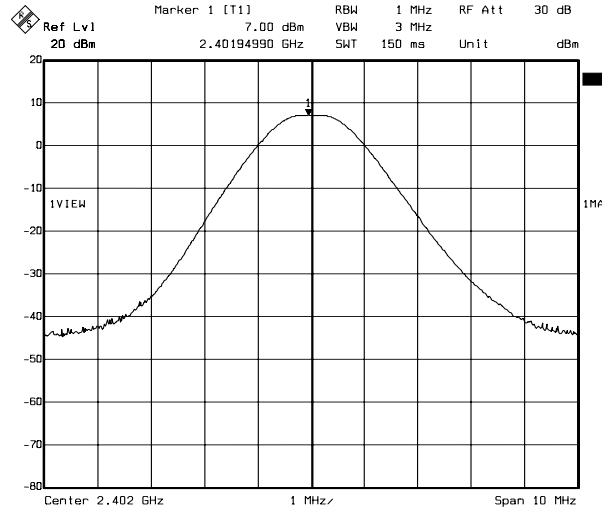


Date: 17.NOV.2004 14:23:16

Channel Low

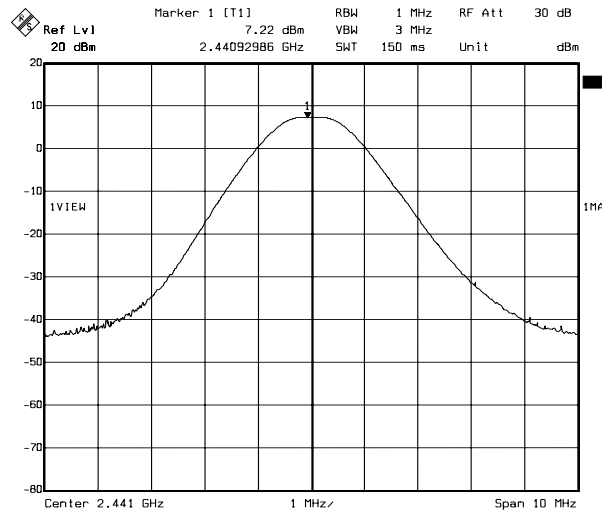

Date: 17.NOV.2004 14:21:34

Channel Middle

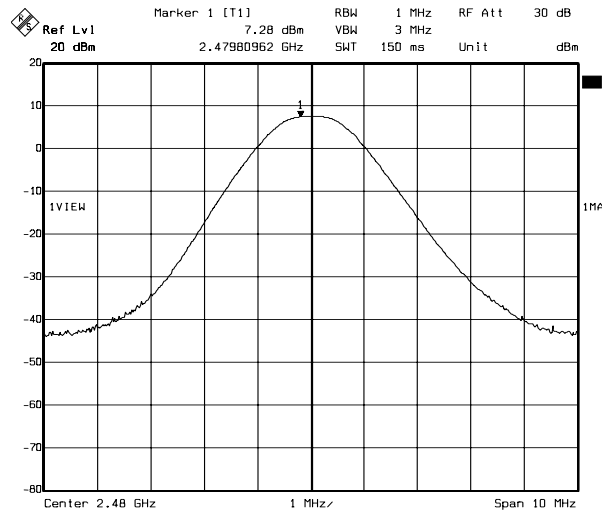

Date: 17.NOV.2004 14:15:49

Channel High



5. HOPPING CHANNEL SEPARATION

Test Requirement: 15.247(a)(1)


5.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	September 06, 2004

Note :

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.2 Test Setup



5.3 Limits of Hopping Channel Separation

According to 15.247(a) (1), frequency hopping system operating in 2400-2483.5MHz Band may have hopping channel carrier frequencies that are separated by 25kHz or two-third of 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

5.4 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in test setup without connection to measurement instrument.
Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of adjacent channels.
4. Measure the frequency difference of these two adjacent channels by spectrum analyzer MARK function. And then plot the result on spectrum analyzer screen.

Repeat above procedures until all frequencies measured were complete.

5.5 Uncertainty of Conducted Emission


The uncertainty of conducted emission is $\pm 10\text{KHz}$.

5.6 Test Results

Refer to section 3, 20dB bandwidth measurement, the measured channel separation should be greater than two-third of 20dB bandwidth or Minimum bandwidth.

Channel	Adjacent Hopping Channel Separation (kHz)	Two –third of 20dB bandwidth (kHz)	Minimum Bandwidth	Result
2441MHz (Mid)	1005.5 kHz	1052 kHz	25 kHz	PASS

5.7 Photo of Hopping Channel Separation

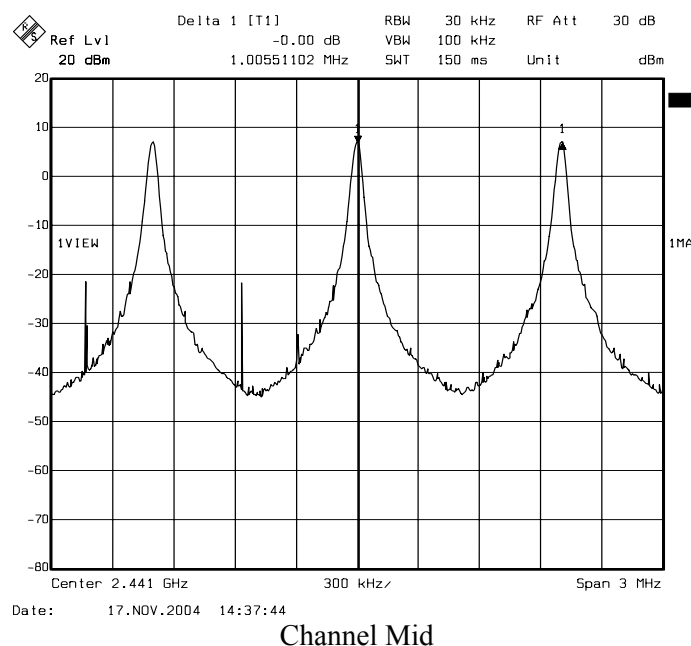



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : SGE-UBTB1

Report No. : ER04-10-076FRF

Page 22 of 53

6. NUMBER OF HOPPING FREQUENCY USED

Test Requirement: 15.247(a)(1)(iii)


6.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	September 06, 2004

Note :

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

6.2 Test Setup



6.3 Limits of Number of Hopping Frequency Used

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2400-2483.5MHz bands shall use at least 15 hopping frequencies

6.4 Test Procedure

- 1 Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2 Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- 3 Set the spectrum analyzer on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- 4 Set the spectrum analyzer on View mode and then plot the result on spectrum analyzer screen.
- 5 Repeat above procedures until all frequencies measured were complete.

6.5 Uncertainty of Conducted Emission


The uncertainty is not applicable.

6.6 Test Results

Refer to the attached plot.

There are 79 hopping frequencies in a hopping sequence.

6.7 Photo of Number of Hopping Frequency Used

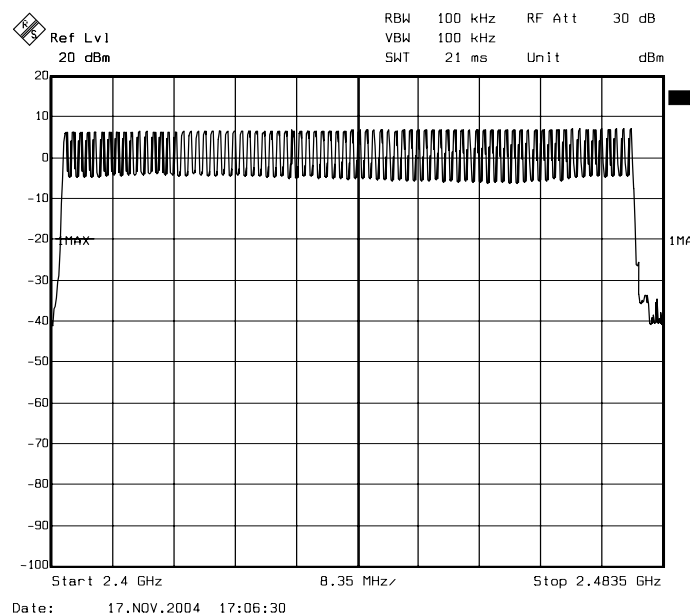



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : SGE-UBTB1

Report No. : ER04-10-076FRF

Page 24 of 53

7. DWELL TIME ON EACH CHANNEL

Test Requirement: 15.247(a)(1)(iii)


7.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration
ANRITSU SPECTRUM ANALYZER	MS2683A	6200133323	September 06, 2004

Note :

1. The measurement uncertainty is less than $\pm 2.6\text{dB}$, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

7.2 Test Setup



7.3 Limits of Dwell Time on Each Channel

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2400-2483.5MHz band, the average time of occupancy on any frequency shall not be greater than 0.4 second within a 31.6 second period.

7.4 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of spectrum analyzer on any frequency be measured and set spectrum analyzer to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.
6. The Bluetooth USB Dongle has 3 type of payload, DH1. The hopping rate is 1600 per second. The longer the payload is, the slower the hopping rate is.

7.5 Uncertainty of Conducted Emission

The uncertainty of time is $\pm 5.25\text{ms}$.

7.6 Test Results

Time of occupancy on the TX channel in 31.6sec = time domain slot length $\times$ hop rate $\div$ number of hop per channel $\times 31.6$

Refer to the attached graph.

The hopping rates of Bluetooth devices change with different types of payload. The longer the payload is, the slower the hopping rate. The hopping rate scenario is defined in Bluetooth core specification.

Transmitting Frequency	Packet type	Dwell time (ms)	Time of occupancy on the TX channel in 31.6sec (ms)	Limit for Time of occupancy on the TX channel in 31.6sec (ms)	Resultts
2441MHz	DH1	0.42	134.40	400	PASS
2441MHz	DH3	1.67	267.20	400	PASS
2441MHz	DH5	2.92	311.47	400	PASS

DH1 Dwell time = $0.42\text{ms} \times (1600 \div 2) \div 79 \times 31.6 = 134.40 \text{ (ms)}$

DH3 Dwell time = $1.67 \text{ ms} \times (1600 \div 4) \div 79 \times 31.6 = 267.20 \text{ (ms)}$

DH5 Dwell time = $2.92 \text{ ms} \times (1600 \div 6) \div 79 \times 31.6 = 311.47 \text{ (ms)}$



Ecom Sertech Corp.


Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : SGE-UBTB1


Report No. : ER04-10-076FRF

Page 26 of 53


7.7 Photo of Dwell Time on Each Channel

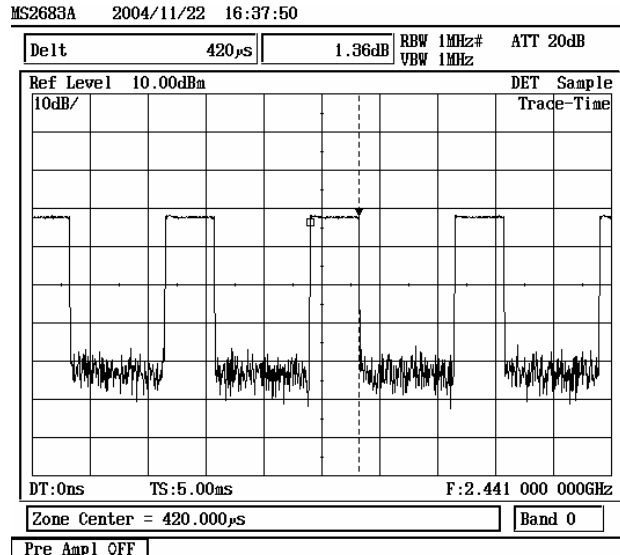

DH1 2441MHz

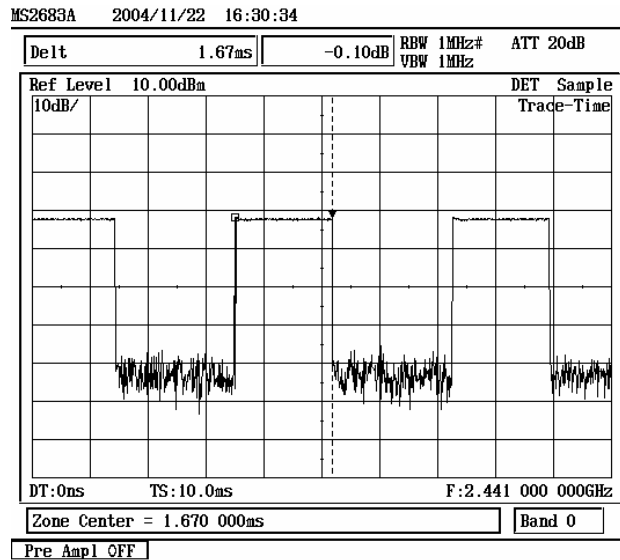

DH3 2441MHz

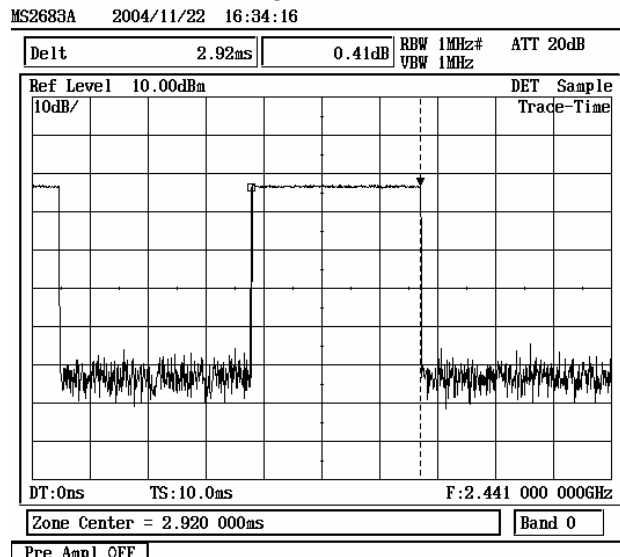

DH5 2441MHz



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : SGE-UBTB1

Report No. : ER04-10-076FRF

Page 27 of 53

8. BAND EDGE MEASUREMENT

Test Requirement: 15.247(d)


8.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	September 06, 2004

Note :

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

8.2 Test Setup



8.3 Limits of Band edge Measurements

The emission not fallen in restricted bands should be 20dB below the highest emission level of operating band.

For the emissions fallen in the restricted bands listed in section 15.205, the maximum permitted average field strength should meet the requirement listed in section 15.209.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : SGE-UBTB1

Report No. : ER04-10-076FRF

Page 28 of 53

8.4 Test Procedure

The band edge compliance of RF radiated emission should be measured by following the guidance in ANSI C63.4 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW and VBM to 1MHz to measure the peak field strength and set RBW to 1MHz and VBW to 10Hz to measure the average radiated field strength.

The spurious RF conducted emissions was measured by using a spectrum analyzer. Set span wide enough to capture the peak level of the in-band emission and all spurious emissions from 30MHz to 10th harmonic, set RBW and VBW to 100kHz, set trace max hold and allow the trace to stabilize. Several plots are plotted to cover the entire span.

8.5 Uncertainty of Conducted Emission

The uncertainty of Frequency : $\pm 100\text{kHz}$.

The uncertainty of Amplitude : $\pm 2\text{dB}$.

8.6 Test Results


Input Power (System)	5VDC (From USB interface of PC)	Environmental Conditions	26°C, 48%RH
Tested By	Chris Huang		

Band edge Frequency (MHz)		Measured radiated band edge field strength (dBuV/m)		Radiated band edge field strength limit (dBuV/m)		Test result
		Horizontal	Vertical	Horizontal	Vertical	
2399.90	PK	50.58	61.88	77.31	87.63	PASS
	AV	38.88	50.48	76.97	87.20	
2483.50	PK	53.77	57.62	74.00	74.00	PASS
	AV	45.26	53.48	54.00	54.00	


Note : 1. Radiated band edge field strength is measured with is measured with measurement procedure ANSI C63.4-2003

8.7 Photo of Band Edge Measurement

Band edge Compliance of RF Conducted Emissions

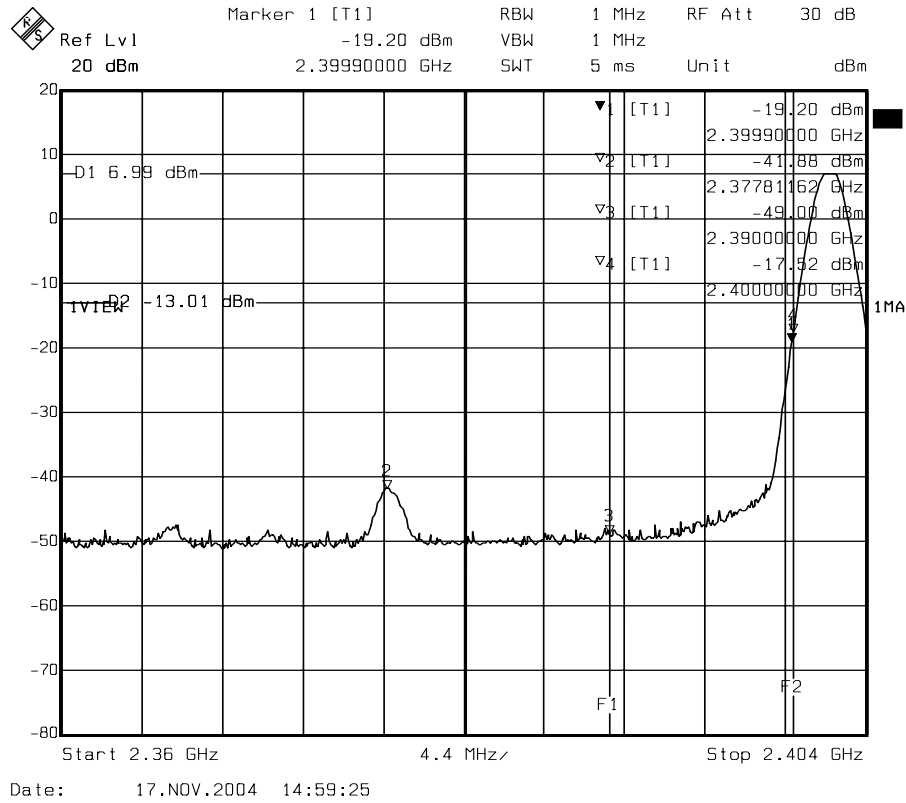

FRONT

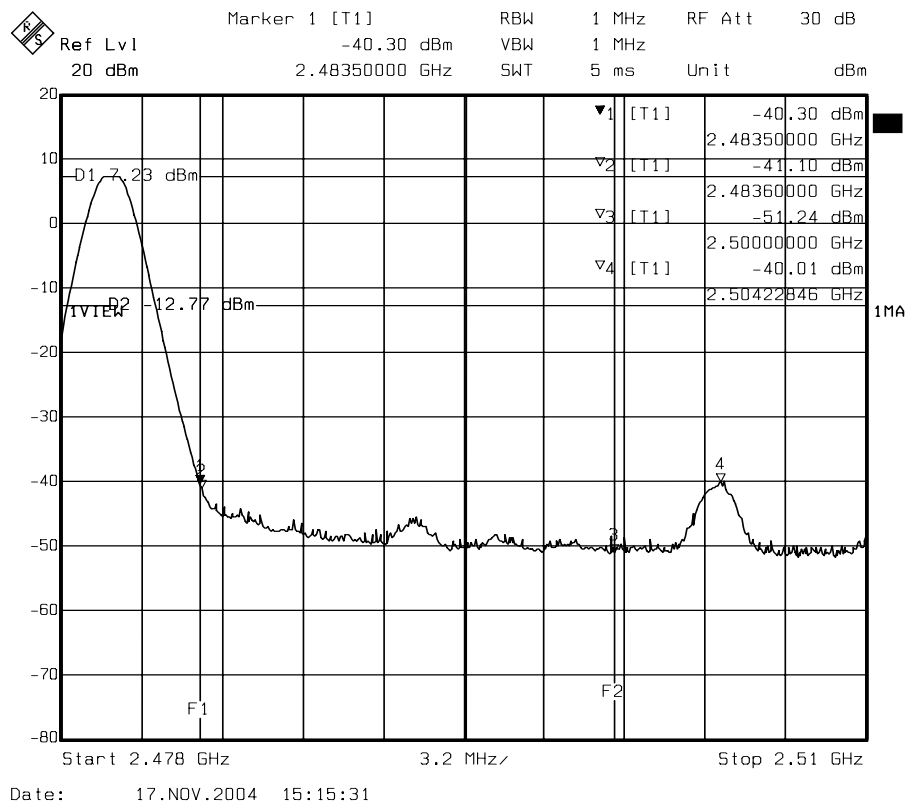

REAR



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720


FCC ID : SGE-UBTB1

Report No. : ER04-10-076FRF

Page 30 of 53


Out-of-band Spurious Emissions-conducted measurement

1. 30MHz~10GHz

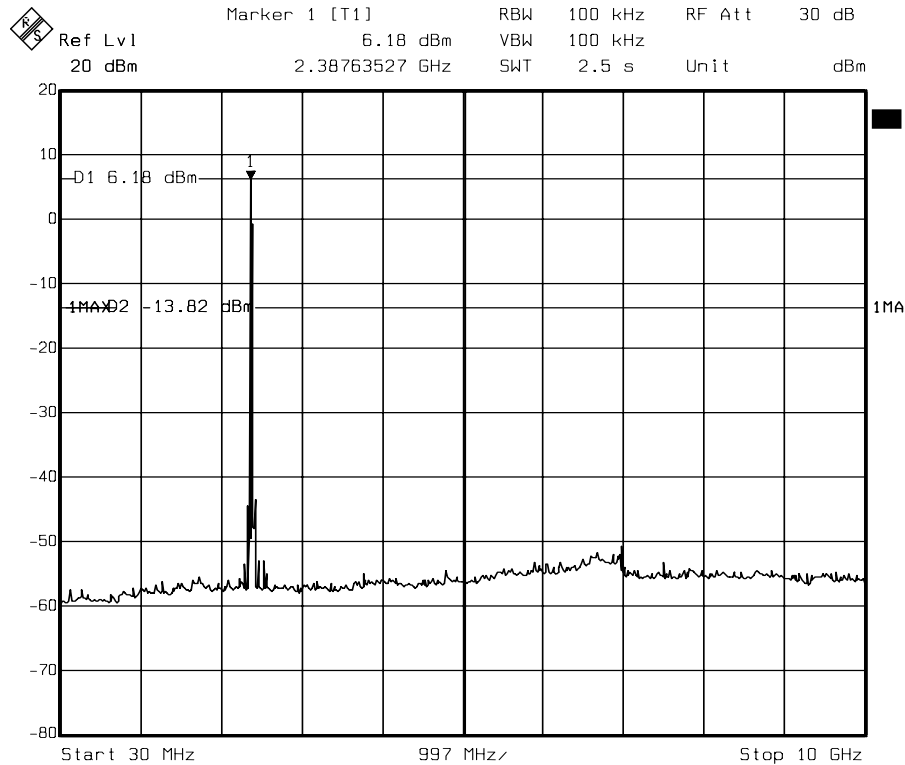

Date: 17.NOV.2004 15:38:12

2. 10GHz~26GHz

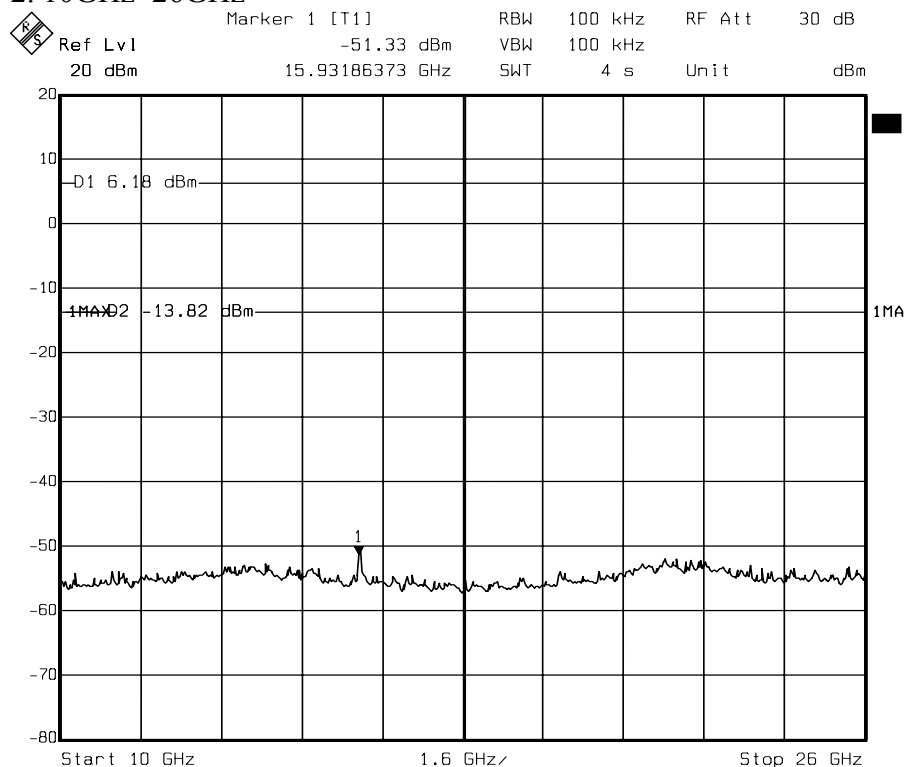

Date: 17.NOV.2004 15:39:59



Ecom Sertech Corp.


Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : SGE-UBTB1

Report No. : ER04-10-076FRF

Page 31 of 53

3. 2.31GHz~2.5GHz

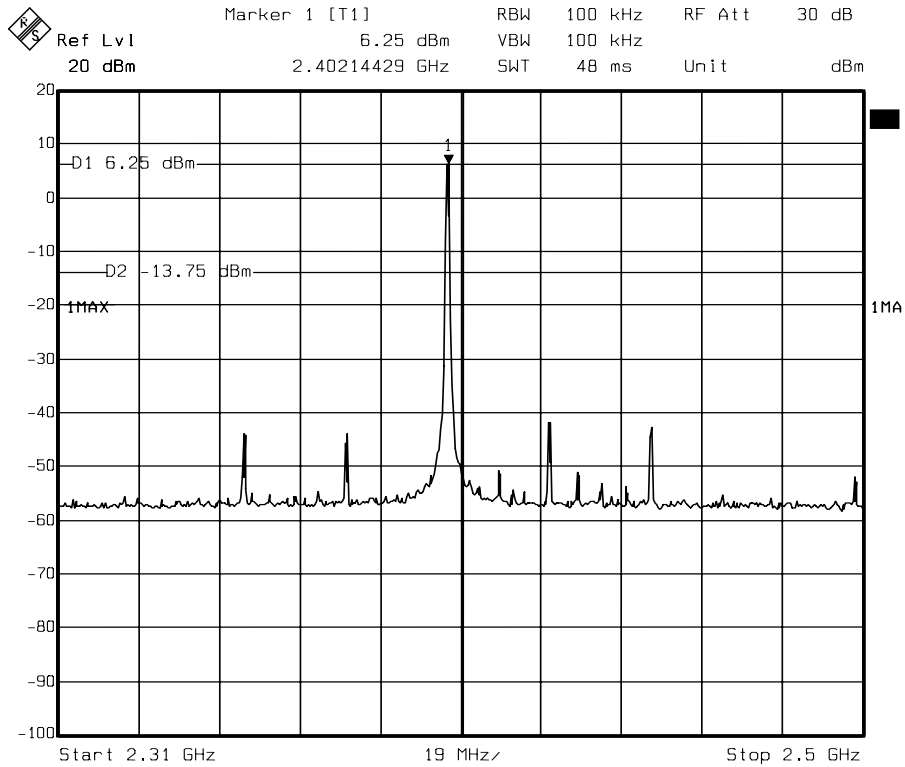

Date: 17.NOV.2004 16:29:35

9. OUT OF BAND SPURIOUS EMISSIONS -RADIATED MEASUREMENTS

Test Requirement: 15.247(d)


9.1 Test Equipments

The following test equipments are utilized in making the measurements contained in this report.


Manufacturer or Type	Model No.	Serial No.	Date of Calibration	Calibration Period	Remark
CHASE BI-LOG ANTENNA	CBL6112B	2421	June 15, 2004	1 Year	FINAL
OPEN SITE	-----	No.2	May 07, 2004	1 Year	FINAL
N TYPE COAXIAL CABLE	CHA9525	4	June 08, 2004	1 Year	FINAL
Horn Antenna	AH-118	10089	April 09, 2004	1 Year	FINAL
HP Pre-amplifier	8449B	3008A01471	November 18, 2003	1 Year	FINAL
HP High pass filter	84300/80038	011	cal. on use	1 Year	FINAL
Horn Antenna	AH-840	03077	February 25, 2004	1 Year	FINAL

9.2 Test Setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 to 1GHz.

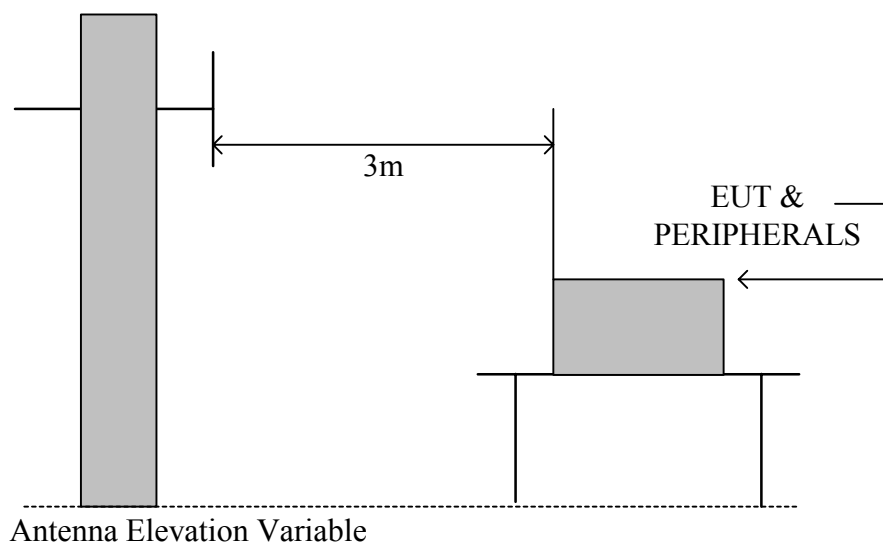

The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

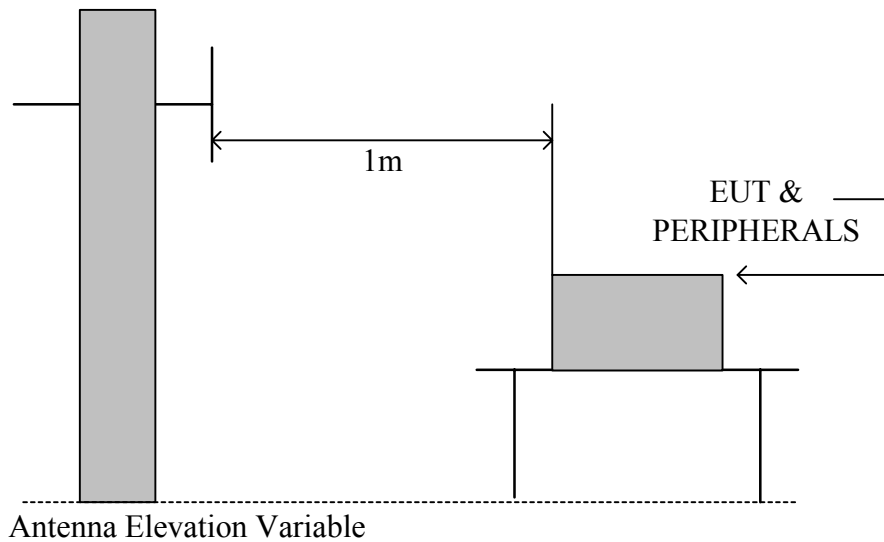

9.3 Radiation Limit

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

9.4 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. While measuring the radiated emission below 1GHz, the EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. While measuring the radiated emission above 1GHz, the EUT was set 1 meters away from the interference-receiving antenna
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Note :

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

9.5 Uncertainty of Radiated Emission

The uncertainty of radiated emission is $\pm 2.72\text{dB}$.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : SGE-UBTB1

Report No. : ER04-10-076FRF

Page 35 of 53

9.6 Radiated RF Noise Measurement

Test Requirement: 15.109, 15.209

The frequency spectrum from 30 MHz to 1000 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

All readings are quasi-peak values.

Company	Cadmus Micro Inc.	Test Date	2004/11/08
Product Name	Bluetooth USB Dongle	Test By	Chris Huang
Model Name	UBTB1	TEMP&Humidity	22.6°C, 73%

Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading at 3m(dBμV)		Limits (dBμV/m)	Emission Level at 3m(dBμV/m)	
			Horizontal	Vertical		Horizontal	Vertical
30.00	17.01	0.97	*	*	40.00	*	*
159.99	11.73	2.64	7.90	13.10	43.50	22.27	27.47
200.00	9.80	3.14	9.40	6.90	43.50	22.34	19.84
239.84	12.13	3.83	6.20	5.60	46.00	22.16	21.56
252.03	12.75	4.02	1.40	2.50	46.00	18.17	19.27
359.98	16.45	4.63	7.60	4.50	46.00	28.68	25.58
400.00	18.41	4.85	6.60	8.30	46.00	29.86	31.56
479.98	17.95	5.12	12.70	9.70	46.00	35.77	32.77
1000.00	27.43	7.66	*	*	54.00	*	*

- REMARKS :
1. * Undetectable
 2. Emission level (dBμV/M) = Antenna Factor (dB/m) + Cable loss (dB) + Meter Reading (dBμV).
 3. According to technical experience, all spurious emission at channel 1, 40 and 79 are almost the same below 1GHz, so the spurious emission test result of the channel 1 was chosen as representative in final test.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : SGE-UBTB1

Report No. : ER04-10-076FRF

Page 36 of 53

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Cadmus Micro Inc.	Test Date	2004/11/04
Product Name	Bluetooth USB Dongle	Test By	Chris Huang
Model Name	UBTB1	TEMP&Humidity	21.3°C, 73%

CH01 (2402 MHz) RX (Low)				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2437.13	46.68	31.76	3.59	35.30	9.50	0.00	37.24	74	-36.76	P	1.0
2437.13	38.21	31.76	3.59	35.30	9.50	0.00	28.77	54	-25.23	A	1.0
4804.00	42.54	34.31	5.08	35.14	9.50	0.00	37.28	74	-36.72	P	1.0
4804.00	31.65	34.31	5.08	35.14	9.50	0.00	26.39	54	-27.61	A	1.0
9608.00	44.23	38.54	8.28	36.37	9.50	0.00	45.18	74	-28.82	P	1.0
9608.00	33.47	38.54	8.28	36.37	9.50	0.00	34.42	54	-19.58	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : SGE-UBTB1

Report No. : ER04-10-076FRF

Page 37 of 53

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Cadmus Micro Inc.	Test Date	2004/11/04
Product Name	Bluetooth USB Dongle	Test By	Chris Huang
Model Name	UBTB1	TEMP&Humidity	21.3°C, 73%

CH01 (2402 MHz) RX (Low)				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2436.95	50.97	31.76	3.59	35.30	9.50	0.00	41.53	74	-32.47	P	1.0
2436.95	46.44	31.76	3.59	35.30	9.50	0.00	37.00	54	-17.00	A	1.0
4804.00	42.69	34.31	5.08	35.14	9.50	0.00	37.43	74	-36.57	P	1.0
4804.00	31.25	34.31	5.08	35.14	9.50	0.00	25.99	54	-28.01	A	1.0
9608.00	44.62	38.54	8.28	36.37	9.50	0.00	45.57	74	-28.43	P	1.0
9608.00	33.84	38.54	8.28	36.37	9.50	0.00	34.79	54	-19.21	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : SGE-UBTB1

Report No. : ER04-10-076FRF

Page 38 of 53

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Cadmus Micro Inc.	Test Date	2004/11/04
Product Name	Bluetooth USB Dongle	Test By	Chris Huang
Model Name	UBTB1	TEMP&Humidity	21.3°C, 73%

CH40 (2441 MHz) RX (Mid)				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2437.02	46.25	31.76	3.59	35.30	9.50	0.00	36.81	74	-37.19	P	1.0
2437.02	38.66	31.76	3.59	35.30	9.50	0.00	29.22	54	-24.78	A	1.0
4882.00	42.15	34.82	5.10	35.21	9.50	0.00	37.37	74	-36.63	P	1.0
4882.00	32.06	34.82	5.10	35.21	9.50	0.00	27.28	54	-26.72	A	1.0
9764.00	44.51	38.52	8.34	36.62	9.50	0.00	45.25	74	-28.75	P	1.0
9764.00	34.11	38.52	8.34	36.62	9.50	0.00	34.85	54	-19.15	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : SGE-UBTB1

Report No. : ER04-10-076FRF

Page 39 of 53

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Cadmus Micro Inc.	Test Date	2004/11/04
Product Name	Bluetooth USB Dongle	Test By	Chris Huang
Model Name	UBTB1	TEMP&Humidity	21.3°C, 73%

CH40 (2441 MHz) RX (Mid)				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2437.02	50.94	31.76	3.59	35.30	9.50	0.00	41.50	74	-32.50	P	1.0
2437.02	46.68	31.76	3.59	35.30	9.50	0.00	37.24	54	-16.76	A	1.0
4882.00	42.06	34.82	5.10	35.21	9.50	0.00	37.28	74	-36.72	P	1.0
4882.00	31.84	34.82	5.10	35.21	9.50	0.00	27.06	54	-26.94	A	1.0
9764.00	44.47	38.52	8.34	36.62	9.50	0.00	45.21	74	-28.79	P	1.0
9764.00	34.15	38.52	8.34	36.62	9.50	0.00	34.89	54	-19.11	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : SGE-UBTB1

Report No. : ER04-10-076FRF

Page 40 of 53

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Cadmus Micro Inc.	Test Date	2004/11/04
Product Name	Bluetooth USB Dongle	Test By	Chris Huang
Model Name	UBTB1	TEMP&Humidity	21.3°C, 73%

CH79 (2480 MHz) RX (High)				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2437.01	46.11	31.76	3.59	35.30	9.50	0.00	36.67	74	-37.33	P	1.0
2437.01	38.41	31.76	3.59	35.30	9.50	0.00	28.97	54	-25.03	A	1.0
4960.00	41.56	35.34	5.13	35.27	9.50	0.00	37.26	74	-36.74	P	1.0
4960.00	32.06	35.34	5.13	35.27	9.50	0.00	27.76	54	-26.24	A	1.0
9920.00	44.81	38.51	8.39	36.87	9.50	0.00	45.34	74	-28.66	P	1.0
9920.00	33.21	38.51	8.39	36.87	9.50	0.00	33.74	54	-20.26	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : SGE-UBTB1

Report No. : ER04-10-076FRF

Page 41 of 53

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Cadmus Micro Inc.	Test Date	2004/11/04
Product Name	Bluetooth USB Dongle	Test By	Chris Huang
Model Name	UBTB1	TEMP&Humidity	21.3°C, 73%

CH79 (2480 MHz) RX (High)				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2437.05	51.02	31.76	3.59	35.30	9.50	0.00	41.58	74	-32.42	P	1.0
2437.05	46.81	31.76	3.59	35.30	9.50	0.00	37.37	54	-16.63	A	1.0
4960.00	42.26	35.34	5.13	35.27	9.50	0.00	37.96	74	-36.04	P	1.0
4960.00	32.41	35.34	5.13	35.27	9.50	0.00	28.11	54	-25.89	A	1.0
9920.00	45.06	38.51	8.39	36.87	9.50	0.00	45.59	74	-28.41	P	1.0
9920.00	33.89	38.51	8.39	36.87	9.50	0.00	34.42	54	-19.58	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : SGE-UBTB1

Report No. : ER04-10-076FRF

Page 42 of 53

The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Cadmus Micro Inc.	Test Date	2004/11/04
Product Name	Bluetooth USB Dongle	Test By	Chris Huang
Model Name	UBTB1	TEMP&Humidity	21.3°C, 73%

CH01 (2402 MHz) TX (Low)				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
* 2353.94	22.40	31.85	3.56	0.00	9.50	0.00	48.30	74	-25.70	P	1.00
* 2353.94	17.80	31.85	3.56	0.00	9.50	0.00	43.70	54	-10.30	A	1.00
2399.90	24.70	31.80	3.58	0.00	9.50	0.00	50.58	77.31	-26.74	P	1.00
2399.90	13.00	31.80	3.58	0.00	9.50	0.00	38.88	76.97	-38.10	A	1.00
2402.12	71.44	31.80	3.58	0.00	9.50	0.00	97.31	Fundamental Frequency		P	1.00
2402.12	71.10	31.80	3.58	0.00	9.50	0.00	96.97			A	1.00
* 4804.36	52.17	34.31	5.08	35.14	9.50	2.08	49.00	74	-25.00	P	1.00
* 4804.36	48.17	34.31	5.08	35.14	9.50	2.08	45.00	54	-9.00	A	1.00
7206.12	45.79	39.82	6.72	35.66	9.50	2.00	49.17	77.31	-28.15	P	1.00
7206.12	36.08	39.82	6.72	35.66	9.50	2.00	39.46	76.97	-37.52	A	1.00
9608.04	46.09	38.54	8.28	36.37	9.50	0.64	47.67	77.31	-29.64	P	1.00
9608.04	34.10	38.54	8.28	36.37	9.50	0.64	35.68	76.97	-41.29	A	1.00
* 12010.60	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14412.72	-----	-----	-----	-----	0.00	0.60	-----	-----	-----	-----	1.00
16814.84	-----	-----	-----	-----	0.00	0.39	-----	-----	-----	-----	1.00
* 19216.96	-----	-----	-----	-----	0.00	1.86	-----	-----	-----	-----	1.00
21619.08	-----	-----	-----	-----	0.00	0.85	-----	-----	-----	-----	1.00
24021.20	-----	-----	-----	-----	0.00	3.07	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "---" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level=Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : SGE-UBTB1

Report No. : ER04-10-076FRF

Page 43 of 53

The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Cadmus Micro Inc.	Test Date	2004/11/04
Product Name	Bluetooth USB Dongle	Test By	Chris Huang
Model Name	UBTB1	TEMP&Humidity	21.3°C, 73%

CH01 (2402 MHz) TX (Low)				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
* 2353.95	29.80	31.85	3.56	0.00	9.50	0.00	55.70	74	-18.30	P	1.00
* 2353.95	27.90	31.85	3.56	0.00	9.50	0.00	53.80	54	-0.20	A	1.00
2399.90	36.00	31.80	3.58	0.00	9.50	0.00	61.88	87.63	-25.76	P	1.00
2399.90	24.60	31.80	3.58	0.00	9.50	0.00	50.48	87.20	-36.73	A	1.00
2402.12	81.76	31.80	3.58	0.00	9.50	0.00	107.63	Fundamental Frequency		P	1.00
2402.12	81.33	31.80	3.58	0.00	9.50	0.00	107.20			A	1.00
* 4803.72	53.31	34.30	5.08	35.14	9.50	2.09	50.13	74	-23.87	P	1.00
* 4803.72	49.50	34.30	5.08	35.14	9.50	2.09	46.32	54	-7.68	A	1.00
7206.21	47.03	39.82	6.72	35.66	9.50	2.00	50.41	87.63	-37.22	P	1.00
7206.21	38.28	39.82	6.72	35.66	9.50	2.00	41.66	87.20	-45.54	A	1.00
9608.00	47.69	38.54	8.28	36.37	9.50	0.64	49.27	87.63	-38.36	P	1.00
9608.00	34.36	38.54	8.28	36.37	9.50	0.64	35.94	87.20	-51.26	A	1.00
* 12010.60	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14412.72	-----	-----	-----	-----	0.00	0.60	-----	-----	-----	-----	1.00
16814.84	-----	-----	-----	-----	0.00	0.39	-----	-----	-----	-----	1.00
* 19216.96	-----	-----	-----	-----	0.00	1.86	-----	-----	-----	-----	1.00
21619.08	-----	-----	-----	-----	0.00	0.85	-----	-----	-----	-----	1.00
24021.20	-----	-----	-----	-----	0.00	3.07	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "---" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. The test data marked in gray background means the EUT emission data is located in the margin uncertainty range of emission limits.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : SGE-UBTB1

Report No. : ER04-10-076FRF

Page 44 of 53

The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Cadmus Micro Inc.	Test Date	2004/11/04
Product Name	Bluetooth USB Dongle	Test By	Chris Huang
Model Name	UBTB1	TEMP&Humidity	21.3°C, 73%

CH40 (2441 MHz) TX (Mid)				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
* 2297.16	47.41	31.90	3.53	35.30	9.50	0.00	38.04	74	-35.96	P	1.00
* 2297.16	38.67	31.90	3.53	35.30	9.50	0.00	29.30	54	-24.70	A	1.00
* 2345.08	48.19	31.85	3.55	35.30	9.50	0.00	38.80	74	-35.20	P	1.00
* 2345.08	41.54	31.85	3.55	35.30	9.50	0.00	32.15	54	-21.85	A	1.00
2441.15	70.58	31.76	3.59	0.00	9.50	0.00	96.43	Fundamental Frequency		P	1.00
2441.15	70.31	31.76	3.59	0.00	9.50	0.00	96.16			A	1.00
* 4881.78	53.56	34.82	5.10	35.21	9.50	1.77	50.55	74	-23.45	P	1.00
* 4881.78	49.82	34.82	5.10	35.21	9.50	1.77	46.81	54	-7.19	A	1.00
* 7323.25	48.49	39.77	6.80	35.64	9.50	2.00	51.93	74	-22.07	P	1.00
* 7323.25	39.39	39.77	6.80	35.64	9.50	2.00	42.83	54	-11.17	A	1.00
9764.70	50.19	38.52	8.34	36.62	9.50	0.54	51.47	76.43	-24.96	P	1.00
9764.70	39.73	38.52	8.34	36.62	9.50	0.54	41.01	76.16	-35.15	A	1.00
* 12205.75	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14646.90	-----	-----	-----	-----	0.00	0.58	-----	-----	-----	-----	1.00
17088.05	-----	-----	-----	-----	0.00	0.54	-----	-----	-----	-----	1.00
* 19529.20	-----	-----	-----	-----	0.00	2.23	-----	-----	-----	-----	1.00
21970.35	-----	-----	-----	-----	0.00	0.71	-----	-----	-----	-----	1.00
24411.50	-----	-----	-----	-----	0.00	2.44	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : SGE-UBTB1

Report No. : ER04-10-076FRF

Page 45 of 53

The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Cadmus Micro Inc.	Test Date	2004/11/04
Product Name	Bluetooth USB Dongle	Test By	Chris Huang
Model Name	UBTB1	TEMP&Humidity	21.3°C, 73%

CH40 (2441 MHz) TX (Mid)				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
* 2296.79	54.11	31.90	3.53	35.30	9.50	0.00	44.74	74	-29.26	P	1.00
* 2296.79	50.02	31.90	3.53	35.30	9.50	0.00	40.65	54	-13.35	A	1.00
* 2345.25	53.49	31.85	3.55	35.30	9.50	0.00	44.10	74	-29.90	P	1.00
* 2345.25	48.21	31.85	3.55	35.30	9.50	0.00	38.82	54	-15.18	A	1.00
2441.65	80.91	31.76	3.59	0.00	9.50	0.00	106.76	Fundamental Frequency		P	1.00
2441.65	80.67	31.76	3.59	0.00	9.50	0.00	106.52			A	1.00
* 4881.98	53.22	34.82	5.10	35.21	9.50	1.77	50.21	74	-23.79	P	1.00
* 4881.98	49.60	34.82	5.10	35.21	9.50	1.77	46.59	54	-7.41	A	1.00
* 7323.27	49.96	39.77	6.80	35.64	9.50	2.00	53.40	74	-20.60	P	1.00
* 7323.27	42.56	39.77	6.80	35.64	9.50	2.00	46.00	54	-8.00	A	1.00
9763.53	47.94	38.52	8.33	36.62	9.50	0.54	49.22	86.76	-37.54	P	1.00
9763.53	37.88	38.52	8.33	36.62	9.50	0.54	39.16	86.52	-47.36	A	1.00
* 12208.25	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14649.90	-----	-----	-----	-----	0.00	0.58	-----	-----	-----	-----	1.00
17091.55	-----	-----	-----	-----	0.00	0.54	-----	-----	-----	-----	1.00
* 19533.20	-----	-----	-----	-----	0.00	2.23	-----	-----	-----	-----	1.00
21974.85	-----	-----	-----	-----	0.00	0.71	-----	-----	-----	-----	1.00
24416.50	-----	-----	-----	-----	0.00	2.43	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "---" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : SGE-UBTB1

Report No. : ER04-10-076FRF

Page 46 of 53

The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Cadmus Micro Inc.	Test Date	2004/11/04
Product Name	Bluetooth USB Dongle	Test By	Chris Huang
Model Name	UBTB1	TEMP&Humidity	21.3°C, 73%

CH79 (2480 MHz) TX (High)				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2480.16	70.20	31.72	3.61	0.00	9.50	0.00	96.03	Fundamental Frequency		P	1.00
2480.16	69.73	31.72	3.61	0.00	9.50	0.00	95.56			A	1.00
* 2483.50	27.94	31.72	3.61	0.00	9.50	0.00	53.77	74	-20.23	P	1.00
* 2483.50	19.43	31.72	3.61	0.00	9.50	0.00	45.26	54	-8.74	A	1.00
* 2483.60	27.04	31.72	3.61	0.00	9.50	0.00	52.87	74	-21.13	P	1.00
* 2483.60	18.38	31.72	3.61	0.00	9.50	0.00	44.21	54	-9.79	A	1.00
* 4960.14	53.16	35.34	5.13	35.27	9.50	1.46	50.32	74	-23.68	P	1.00
* 4960.14	49.93	35.34	5.13	35.27	9.50	1.46	47.09	54	-6.91	A	1.00
* 7440.12	47.82	39.72	6.88	35.61	9.50	2.00	51.31	74	-22.69	P	1.00
* 7440.12	40.42	39.72	6.88	35.61	9.50	2.00	43.91	54	-10.09	A	1.00
9919.89	47.53	38.51	8.39	36.87	9.50	0.45	48.51	76.03	-27.52	P	1.00
9919.89	39.16	38.51	8.39	36.87	9.50	0.45	40.14	75.56	-35.42	A	1.00
* 12400.80	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14880.96	-----	-----	-----	-----	0.00	0.40	-----	-----	-----	-----	1.00
17361.12	-----	-----	-----	-----	0.00	0.64	-----	-----	-----	-----	1.00
* 19841.28	-----	-----	-----	-----	0.00	2.54	-----	-----	-----	-----	1.00
* 22321.44	-----	-----	-----	-----	0.00	0.70	-----	-----	-----	-----	1.00
24801.60	-----	-----	-----	-----	0.00	1.88	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : SGE-UBTB1

Report No. : ER04-10-076FRF

Page 47 of 53

The frequency spectrum above 1 GHz for Transmitter was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Cadmus Micro Inc.	Test Date	2004/11/04
Product Name	Bluetooth USB Dongle	Test By	Chris Huang
Model Name	UBTB1	TEMP&Humidity	21.3°C, 73%

CH79 (2480 MHz) TX (High)				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2479.81	79.39	31.72	3.61	0.00	9.50	0.00	105.22	Fundamental Frequency		P	1.00
2479.81	78.88	31.72	3.61	0.00	9.50	0.00	104.71			A	1.00
* 2483.50	31.79	31.72	3.61	0.00	9.50	0.00	57.62	74	-16.38	P	1.00
* 2483.50	27.65	31.72	3.61	0.00	9.50	0.00	53.48	54	-0.52	A	1.00
* 2483.60	32.10	31.72	3.61	0.00	9.50	0.00	57.93	74	-16.07	P	1.00
* 2483.60	26.15	31.72	3.61	0.00	9.50	0.00	51.98	54	-2.02	A	1.00
* 4960.18	53.73	35.34	5.13	35.27	9.50	1.46	50.89	74	-23.11	P	1.00
* 4960.18	49.73	35.34	5.13	35.27	9.50	1.46	46.89	54	-7.11	A	1.00
* 7439.96	48.02	39.72	6.88	35.61	9.50	2.00	51.51	74	-22.49	P	1.00
* 7439.96	38.56	39.72	6.88	35.61	9.50	2.00	42.05	54	-11.95	A	1.00
9920.22	46.05	38.51	8.39	36.87	9.50	0.45	47.02	85.22	-38.20	P	1.00
9920.22	36.08	38.51	8.39	36.87	9.50	0.45	37.05	84.71	-47.66	A	1.00
* 12399.05	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14878.86	-----	-----	-----	-----	0.00	0.40	-----	-----	-----	-----	1.00
17358.67	-----	-----	-----	-----	0.00	0.64	-----	-----	-----	-----	1.00
* 19838.48	-----	-----	-----	-----	0.00	2.54	-----	-----	-----	-----	1.00
* 22318.29	-----	-----	-----	-----	0.00	0.70	-----	-----	-----	-----	1.00
24798.10	-----	-----	-----	-----	0.00	1.88	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. The test data marked in gray background means the EUT emission data is located in the margin uncertainty range of emission limits.

9.7 Photos of Open Site







10. ANTENNA REQUIREMENT

10.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

10.2 Antenna Connected Construction

The antenna used in this product is Dipole antenna. The maximum Gain of the antenna only 1.2dBi

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

Report No. : ER04-10-076FRF

Page A3 of A1

Appendix A

A. POWER SPECTRAL DENSITY MEASUREMENT


A.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration	Calibration Period
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	September 06, 2004	1 Year

Note :

1. The measurement uncertainty is less than $\pm 2.6\text{dB}$, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

A.2 Test Setup



A.3 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm/3KHz.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

Report No. : ER04-10-076FRF

Page A3 of A2

A.4 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3KHz RBW and 30KHz VBW, set sweep time=span / 3KHz.

The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span / 3KHz for a full response of the mixer in the spectrum analyzer.

A.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is $\pm 1.82\text{dB}$.

A.6 Test Results

Company	Billionton Systems Inc.	Test Date	2004/12/21
Product Name	Bluetooth USB Dongle	Test By	Chris Huang
Model Name	UBTB1	TEMP & Humidity	22.3°C, 73%

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Maximum Limit (dBm)	Pass / Fail
01(Low)	2402	-1.45	8	PASS
40(Mid)	2441	-1.28	8	PASS
79(High)	2480	-1.55	8	PASS




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720


Report No. : ER04-10-076FRF

Page A3 of A3


A.7 Photo of Power Spectral Density Measurement

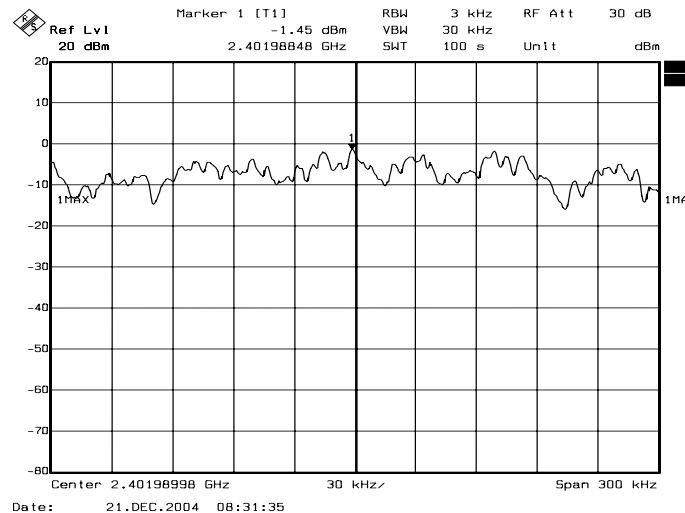

Channel Low

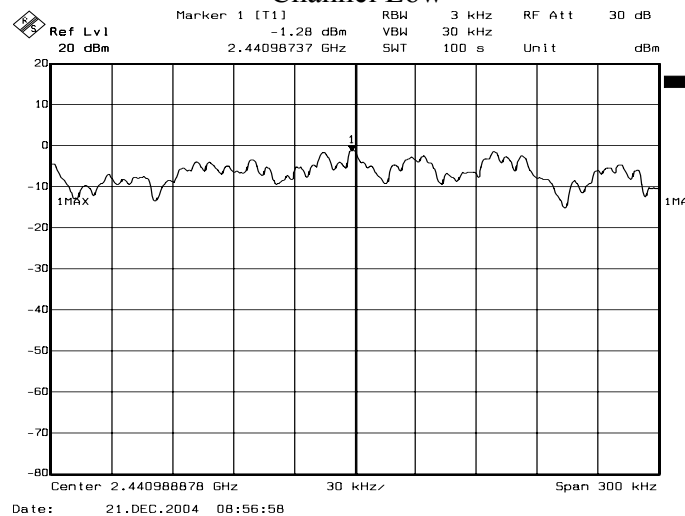

Channel Middle

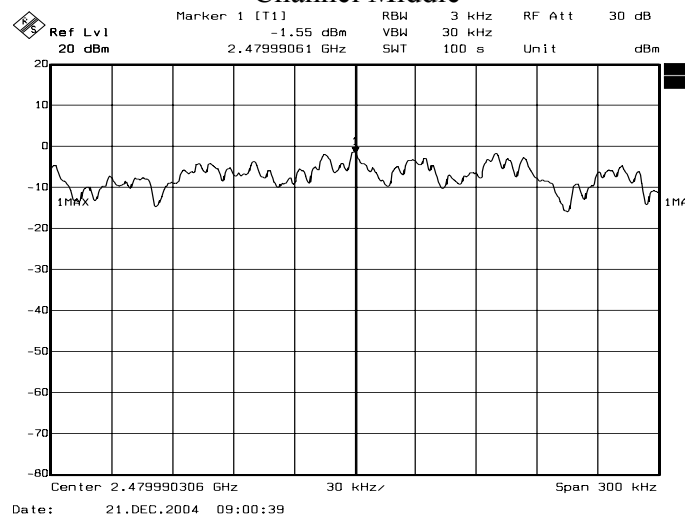

Channel High