



FCC15.247 Test Report

Applicant : SHENZHEN TENA ELECTRONIC CO., LTD.
Product : Multi-Screen Interactive Device
Model No. : S313
FCC ID : SGRS3130001
Standards : FCC CFR Title 47 Part 15 Subpart C: 2013
ANSI C63.4: 2009
ANSI C63.10: 2009
Test Date : September 30, 2013 ~ November 19, 2013

Reviewed By : *Sunny Sun*
(Engineer: Sunny Sun)
Approved By : *Marlinchen*
(Manager: Marlin Chen)

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standards through the calibration of the equipment and evaluated measurement uncertainty herein.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date
1311RSU00701	Rev. 01	Initial report	2013-11-19
1311RSU00701	Rev. 02	Add the equipment calibration interval	2013-11-23

Test Summary

FCC Part Section(s)	Test Description	Test Result (Pass/Fail)	Reference
15.207	Conducted Emission	Pass	Section 3
15.205 15.209	Radiated Emission	Pass	Section 4
15.247(d)	RF Antenna Conducted Spurious	Pass	Section 5
15.247(d)	Radiated Emission Band Edge	Pass	Section 6
15.215(c)	Operation Frequency Range of 20dB Bandwidth	Pass	Section 7
15.247(a)(2)	Occupied Bandwidth	Pass	Section 8
15.247(b)(3)	Power Output	Pass	Section 9
15.247(e)	Power Spectral Density	Pass	Section 10

CONTENTS

Description	Page
1. General Information.....	6
1.1. Applicant.....	6
1.2. Manufacturer	6
1.3. Feature of Product.....	6
1.4. Testing Facility	7
2. Test Configuration of Equipment Under Test.....	8
2.1. Test Mode	8
2.2. Configuration of Tested System	8
2.3. Test System Details	9
2.4. Test Software	9
3. Conducted Emission	10
3.1. Limit of Conducted Emission.....	10
3.2. Test Setup	10
3.3. Test Procedure	11
3.4. Test Result.....	12
4. Radiated Emission.....	14
4.1. Limit.....	14
4.2. Test Setup	15
4.3. Test Procedure	17
4.4. Test Result.....	18
5. RF Antenna Conducted Spurious	24
5.1. Limit.....	24
5.2. Test Setup	24
5.3. Test Procedure	24
5.4. Test Result.....	25
6. Radiated Emission Band Edge.....	33
6.1. Limit.....	33
6.2. Test Setup	33
6.3. Test Procedure	33
6.4. Test Result.....	34
7. Operation Frequency Range of 20dB Bandwidth	66

7.1.	Limit.....	66
7.2.	Test Setup	66
7.3.	Test Procedure	66
7.4.	Test Result.....	67
8.	Occupied Bandwidth	71
8.1.	Limit.....	71
8.2.	Test Setup	71
8.3.	Test Procedure	71
8.4.	Test Result.....	72
9.	Power Output	80
9.1.	Limit.....	80
9.2.	Test Setup	80
9.3.	Test Procedure	80
9.4.	Test Result.....	81
10.	Power Spectral Density	84
10.1.	Limit.....	84
10.2.	Test Setup	84
10.3.	Test Procedure	84
10.4.	Test Result.....	85
11.	Measurement Uncertainty	93
12.	List of Measuring Instrument	94

1. General Information

1.1. Applicant

SHENZHEN TENA ELECTRONIC CO., LTD.

9 Floor IER Building, South Area, Hi-Tech Industrial Park, Shenzhen, China

1.2. Manufacturer

SHENZHEN TENA ELECTRONIC CO., LTD.

9 Floor IER Building, South Area, Hi-Tech Industrial Park, Shenzhen, China

1.3. Feature of Product

Product Name	Multi-Screen Interactive Device
Model No.	S313
Frequency Range	802.11b/g/n(20MHz): 2412 ~ 2462 MHz 802.11n(40MHz): 2422 ~ 2452MHz
Channel Number	802.11b/g/n(20MHz): 11 802.11 n(40MHz): 7
Type of Modulation	802.11b: DSSS 802.11g/n: OFDM
Data Rate	802.11g: 6/9/12/18/24/36/48/54 Mbps 802.11b: 1/2/5.5/11 Mbps 802.11n: up to 150 Mbps
Channel Control	Auto
Antenna Type	Internal
Peak Antenna Gain	-3.0dBi

Note:

1: This report based on the FCC ID: SGRS311A0001.

2: SGRS3130001 was different antenna and appearance with SGRS311A0001, and assessed the Radiated Emission & Radiated Emission Band Edge test, the other test data was referenced to the SGRS311A0001.

Channel List for 802.11b/g/n(20MHz)

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	N/A	N/A

Channel List for 802.11n(40MHz)

Channel	Frequency	Channel	Frequency	Channel	Frequency
03	2422 MHz	04	2427 MHz	05	2432 MHz
06	2437 MHz	07	2442 MHz	08	2447 MHz
09	2452 MHz	N/A	N/A	N/A	N/A

1.4. Testing Facility


Test Site	MRT Technology (Suzhou) Co., Ltd
Test Site Location	D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
Registration No.	809388

2. Test Configuration of Equipment Under Test

2.1. Test Mode

Test Mode
Mode 1: Transmit by 802.11b
Mode 2: Transmit by 802.11g
Mode 3: Transmit by 802.11n(20MHz)
Mode 4: Transmit by 802.11n(40MHz)

2.2. Configuration of Tested System

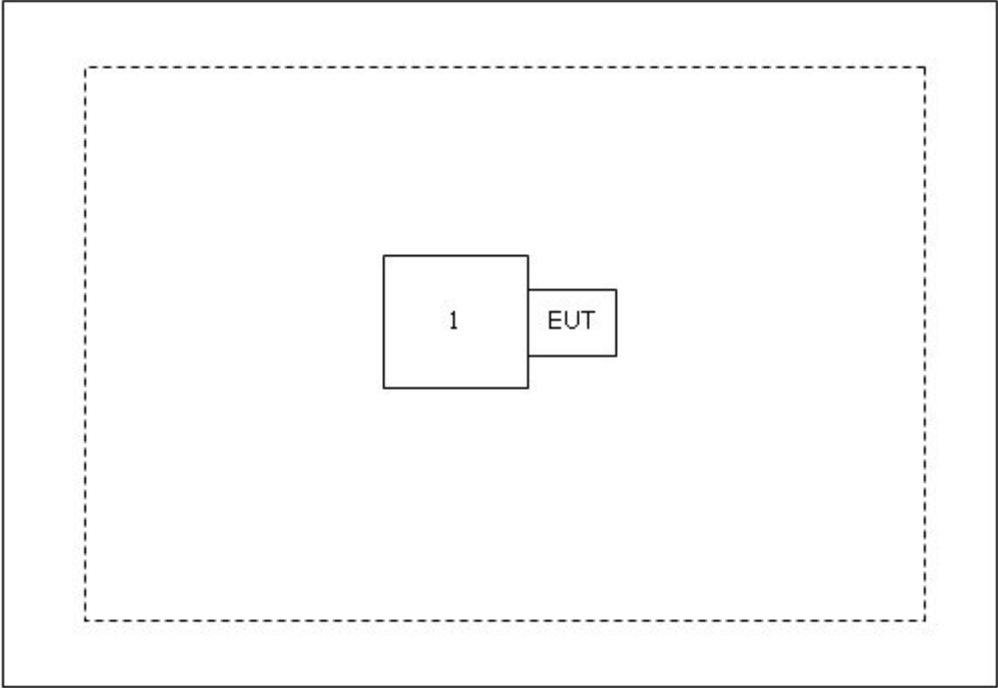Connection Diagram		
		
Signal Cable Type		Signal cable Description
A	N/A	N/A

2.3. Test System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product		Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook	HP	HP 520	CND7480N5S	Non-Shielded, 1.8m

2.4. Test Software

Turn on the power of all equipment, then run the RF test software “Secure CRT 4.1” provided by applicant, and set the test mode and channel, then press OK to start continue transmit.
--

3. Conducted Emission


3.1. Limit of Conducted Emission

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 – 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

3.2. Test Setup

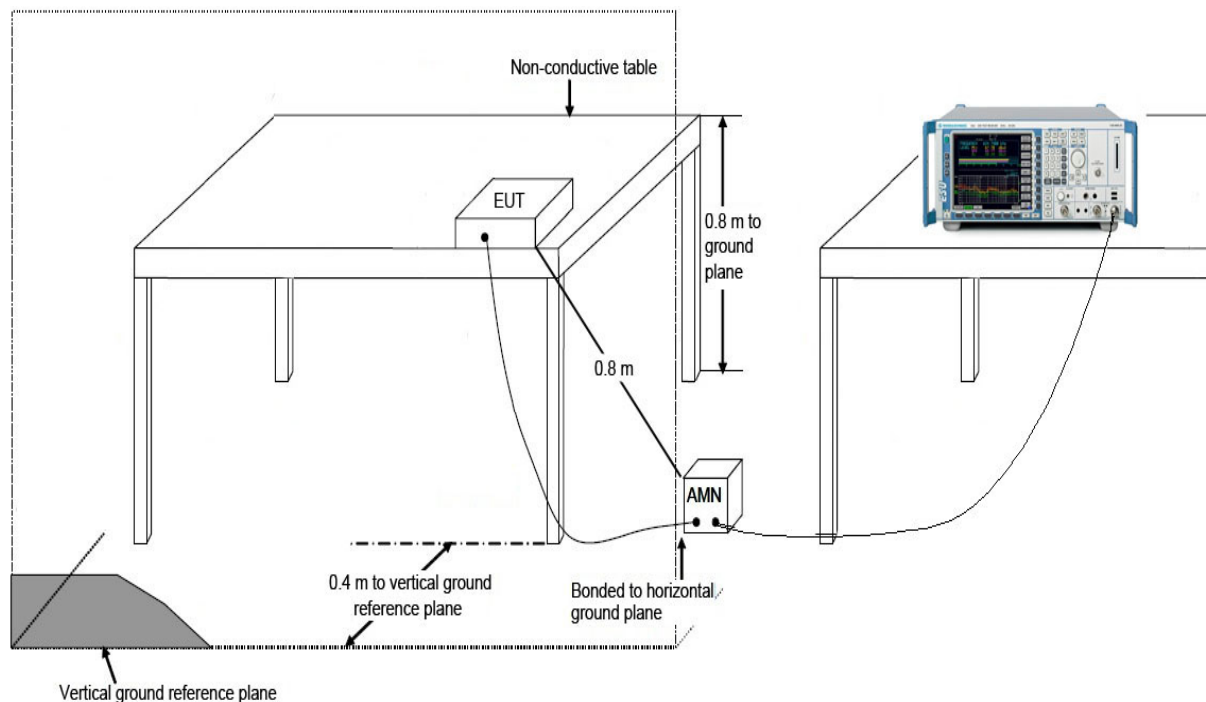

3.3. Test Procedure


The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

3.4. Test Result


Tested by	Roy	Test Data	2013-10-18- 17:44:12
Site	SR2	Power	AC 120V/60Hz
Limit	FCC_PART15B_MAIN_CLASS B	Polarity	Line
AMN	LISN_101683-FILTER ON	Test Mode	Mode 1
EUT	Multi-Screen Interactive Device		

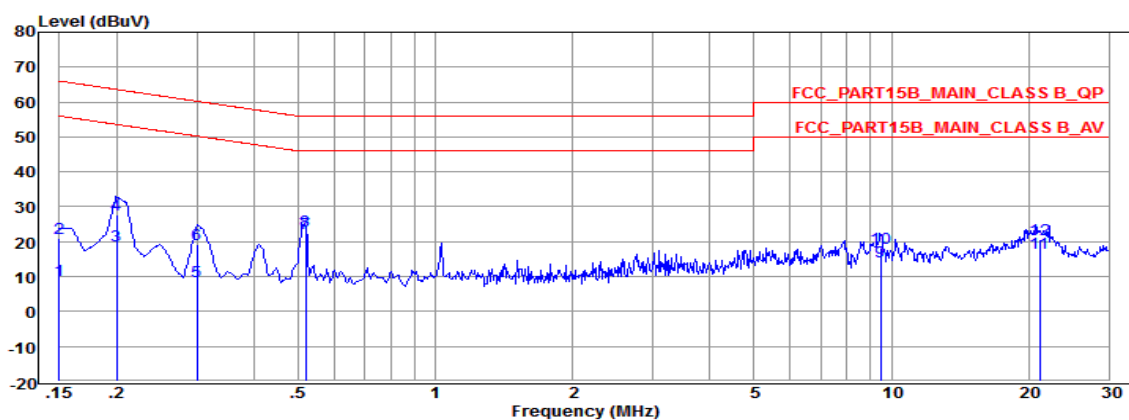

Freq (MHz)	Level (dBuV)	Reading (dBuV)	Detector	AMN Factor (dB)	Cable Loss (dB)	Limit (dBuV)	Over Limit (dB)
0.15	8.83	-7.00	AV	9.82	6.01	56.00	-47.17
0.15	21.03	5.20	QP	9.82	6.01	66.00	-44.97
0.20	18.92	3.00	AV	9.91	6.01	53.61	-34.69
0.20	27.82	11.90	QP	9.91	6.01	63.61	-35.79
0.30	8.73	-7.30	AV	10.02	6.01	50.24	-41.51
0.30	19.13	3.10	QP	10.02	6.01	60.24	-41.11
0.52	22.55	6.39	AV	10.14	6.02	46.00	-23.45
0.52	23.05	6.89	QP	10.14	6.02	56.00	-32.95
9.48	14.35	-1.80	AV	9.75	6.40	50.00	-35.65
9.48	18.25	2.10	QP	9.75	6.40	60.00	-41.75
21.15	16.84	0.70	AV	9.81	6.33	50.00	-33.16
21.15	20.54	4.40	QP	9.81	6.33	60.00	-39.46

Remarks: Level = Reading + AMN Factor + Cable Loss

Tested by	Roy	Test Data	2013-10-18- 17:51:16
Site	SR2	Power	AC 120V/60Hz
Limit	FCC_PART15B_MAIN_CLASS B	Polarity	Neutral
AMN	LISN_101683-FILTER ON	Test Mode	Mode 1
EUT	Multi-Screen Interactive Device		

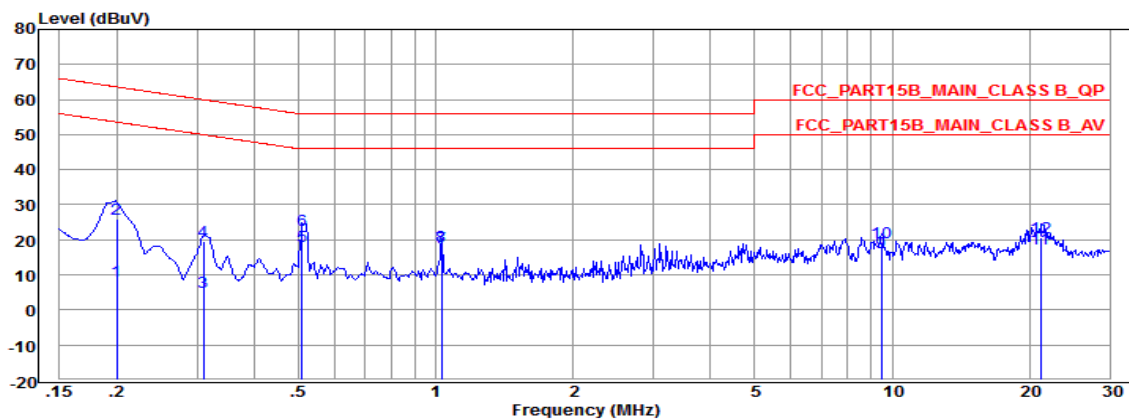

Freq (MHz)	Level (dBUV)	Reading (dBUV)	Detector	AMN Factor (dB)	Cable Loss (dB)	Limit (dBUV)	Over Limit (dB)
0.20	8.16	-7.80	AV	9.95	6.01	53.61	-45.45
0.20	25.76	9.80	QP	9.95	6.01	63.61	-37.85
0.31	4.97	-11.10	AV	10.06	6.01	49.97	-45.00
0.31	19.57	3.50	QP	10.06	6.01	59.97	-40.40
0.51	18.18	2.00	AV	10.16	6.02	46.00	-27.82
0.51	22.88	6.70	QP	10.16	6.02	56.00	-33.12
1.03	17.71	1.80	AV	9.89	6.02	46.00	-28.29
1.03	18.01	2.10	QP	9.89	6.02	56.00	-37.99
9.48	16.37	0.20	AV	9.77	6.40	50.00	-33.63
9.48	19.37	3.20	QP	9.77	6.40	60.00	-40.63
21.15	17.59	1.40	AV	9.86	6.33	50.00	-32.41
21.15	20.59	4.40	QP	9.86	6.33	60.00	-39.41

Remarks: Level = Reading + AMN Factor + Cable Loss

4. Radiated Emission

4.1. Limit

FCC Part 15 Subpart C Paragraph 15.209		
Frequency (MHz)	Distance (m)	Level (dBuV/m)
30 - 88	3	40
88 - 216	3	43.5
216 - 960	3	46
Above 960	3	54


Note 1: The lower limit shall apply at the transition frequency.

Note 2: Distance refers to the distance in meters between the measuring instrument Antenna and the closed point of any part of the device or system.


Note 3: $E \text{ field strength (dBuV/m)} = 20 \log E \text{ field strength (uV/m)}$

4.2. Test Setup


Below 30MHz Test Setup:

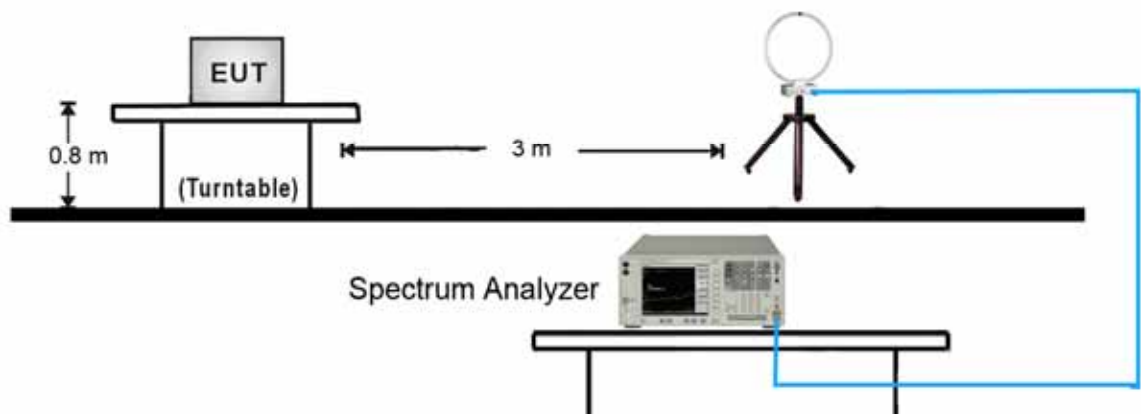

Below 1GHz Test Setup:

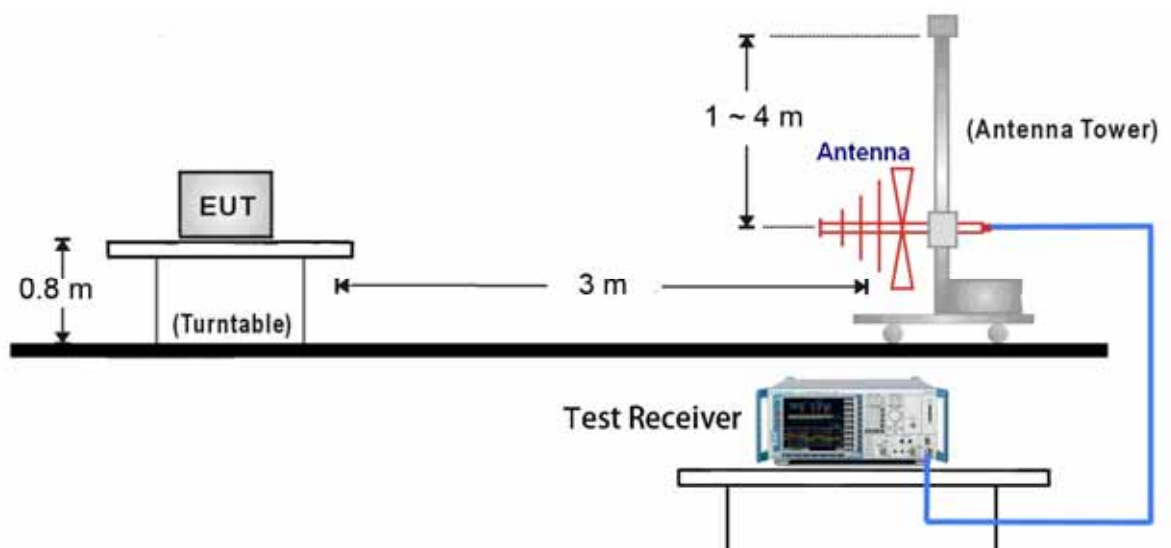

Above 1GHz Test Setup:

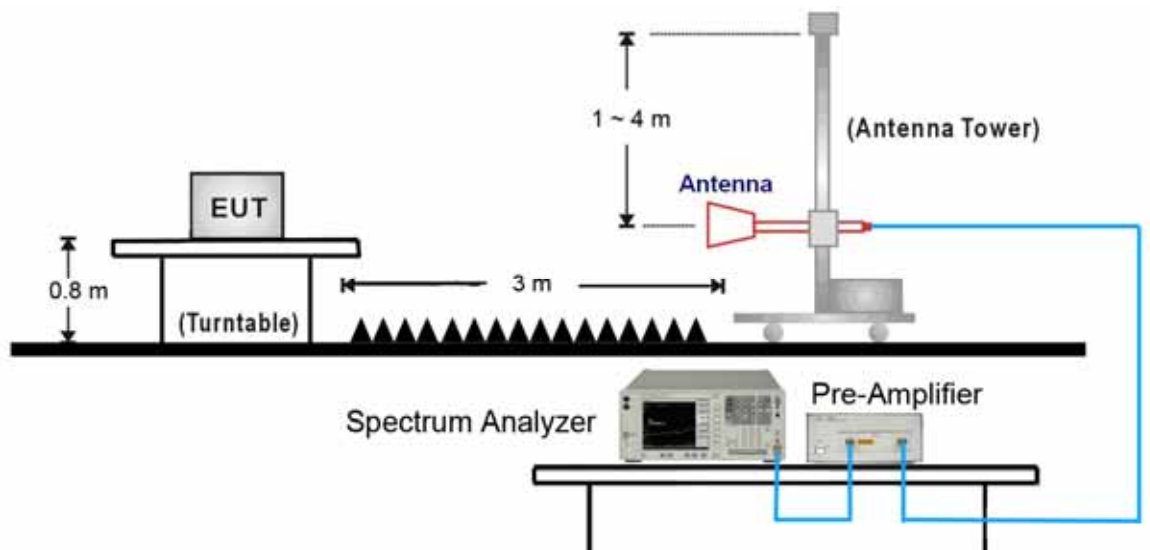

4.3. Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from Antenna to the EUT was 3 meters.

The Antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the Antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4:2009 on radiated measurement.

The resolution bandwidth below 1GHz setting on the field strength meter is 120 kHz and above 1GHz is 1MHz. The frequency range from 30MHz to 10th harmonic is checked.

Note: When doing emission measurement above 1GHz, the horn Antenna will be bended down a little (as horn Antenna has the narrow beamwidth) in order to keeping the Antenna in the “cone of radiation” of EUT. The 3dB beamwidth is 10~60 degrees for H-plane and 10~90 degrees for E-plane.

4.4. Test Result

All of the test result shown indicates the worst case, and spectrum analyzer parameters setting as shown below:

Peak detector: RBW = 1MHz, VBW = 3MHz, sweep time = 200ms;

Average detector: RBW = 1MHz, VBW = 10Hz, sweep time = auto.

Measure Level = Reading Level + Cable Loss + Antenna Factor - Preamplifier Gain

Mode1: Transmit by 802.11b

CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	H	3278.0	36.1	3.3	39.4	54(Note3)	-14.6	PK
	V	3210.0	38.4	3.5	41.9	54(Note3)	-12.1	PK
	H	4825.0	45.7	6.4	52.1	54(Note3)	-1.9	PK
	H	4825.0	47.2	6.4	53.6	54(Note3)	-0.4	PK
	V	7236.0	33.2	13.8	47.0	54(Note3)	-7.0	PK
	V	7236.0	33.4	13.8	47.2	54(Note3)	-6.8	PK
	H	9648.0	34.1	15.5	49.6	54(Note3)	-4.4	PK
	V	9648.0	34.3	15.5	49.8	54(Note3)	-4.2	PK
6	H	3158.9	36.4	3.6	40.0	54(Note3)	-14.0	PK
	V	3107.6	37.8	3.5	41.3	54(Note3)	-12.7	PK
	H	4876.0	39.4	6.6	46.0	54(Note3)	-8.0	PK
	H	4876.0	41.4	6.6	48.0	54(Note3)	-6.0	PK
	V	7311.0	33.7	14.0	47.7	54(Note3)	-6.3	PK
	V	7311.0	34.7	14.0	48.7	54(Note3)	-5.3	PK
	H	9748.0	34.8	16.2	51.0	54(Note3)	-3.0	PK
	V	9748.0	34.6	16.2	50.8	54(Note3)	-3.2	AV
11	H	3278.2	42.3	3.3	45.6	54(Note3)	-8.4	PK
	V	3278.6	42.9	3.3	46.2	54(Note3)	-7.8	PK
	H	4927.0	42.6	6.7	49.3	54(Note3)	-4.7	PK
	V	4927.0	40.2	6.7	46.9	54(Note3)	-7.1	PK
	V	7386.0	35.4	14.1	49.5	54(Note3)	-4.5	AV
	H	7392.0	36.8	14.1	50.9	54(Note3)	-3.1	PK
	V	9848.0	34.9	16.4	51.3	54(Note3)	-2.7	PK

	H	9848.0	35.1	16.4	51.5	54(Note3)	-2.5	PK
--	---	--------	------	------	------	-----------	------	----

Note: 1. Measure Level = Reading Level + Factor.

2. The test trace is same as the ambient noise (the test frequency range: 9kHz~30MHz, 18GHz~25GHz), therefore no data appear in the report.

3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

Mode2: Transmit by 802.11g

CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	H	3108.1	36.8	3.5	40.3	54(Note3)	-13.7	PK
	V	3210.5	38.5	3.5	42.0	54(Note3)	-12.0	PK
	H	4825.0	44.2	6.4	50.6	54(Note3)	-3.4	PK
	V	4825.0	40.3	6.4	46.7	54(Note3)	-7.3	PK
	V	7236.0	34.9	13.8	48.7	54(Note3)	-5.3	PK
	H	7236.0	34.5	13.8	48.3	54(Note3)	-5.7	PK
	V	9648.0	34.8	15.5	50.3	54(Note3)	-3.7	PK
	H	9648.0	35.1	15.5	50.6	54(Note3)	-3.4	PK
6	H	3243.5	38.6	3.4	42.0	54(Note3)	-12.0	PK
	V	3023.6	35.4	3.4	38.8	54(Note3)	-15.2	PK
	H	4876.0	38.1	6.6	44.7	54(Note3)	-9.3	PK
	V	4876.0	39.2	6.6	45.8	54(Note3)	-8.2	PK
	V	7311.0	35.5	14.0	49.5	54(Note3)	-4.5	PK
	H	7311.0	35.4	14.0	49.4	54(Note3)	-4.6	PK
	V	9748.0	36.4	16.2	52.6	54(Note3)	-1.4	PK
	H	9748.0	35.9	16.2	52.1	54(Note3)	-1.9	PK
11	H	3226.4	37.6	3.5	41.1	54(Note3)	-12.9	PK
	V	3401.0	37.4	3.3	40.7	54(Note3)	-13.3	PK
	H	4927.0	38.9	6.7	45.6	54(Note3)	-8.4	PK
	V	4876.0	37.6	6.6	44.2	54(Note3)	-9.8	PK
	V	7386.0	35.1	14.1	49.2	54(Note3)	-4.8	AV
	H	7386.0	35.2	14.1	49.3	54(Note3)	-4.7	PK
	V	9848.0	34.9	16.4	51.3	54(Note3)	-2.7	PK
	H	9848.0	35.1	16.4	51.5	54(Note3)	-2.5	PK

Note: 1. Measure Level = Reading Level + Factor.

2. The test trace is same as the ambient noise (the test frequency range: 9kHz~30MHz, 18GHz~25GHz), therefore no data appear in the report.
3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

Mode3: Transmit by 802.11n (20MHz)

CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	H	3211.2	36.8	3.5	40.3	54(Note3)	-13.7	PK
	V	3074.9	37.2	3.5	40.7	54(Note3)	-13.3	PK
	H	4825.0	46.8	6.4	53.2	54(Note3)	-0.8	PK
	V	4825.0	44.5	6.4	50.9	54(Note3)	-3.1	PK
	V	7236.0	34.2	13.8	48.0	54(Note3)	-6.0	PK
	H	7236.0	35.2	13.8	49.0	54(Note3)	-5.0	PK
	V	9648.0	35.1	15.5	50.6	54(Note3)	-3.4	PK
	H	9648.0	34.7	15.5	50.2	54(Note3)	-3.8	PK
6	H	3244.5	39.8	3.4	43.2	54(Note3)	-10.8	PK
	V	3380.4	35.7	3.2	38.9	54(Note3)	-15.1	PK
	H	4876.0	38.4	6.6	45.0	54(Note3)	-9.0	PK
	H	4876.0	38.2	6.6	44.8	54(Note3)	-9.2	PK
	V	7311.0	34.9	14.0	48.9	54(Note3)	-5.1	PK
	V	7311.0	35.4	14.0	49.4	54(Note3)	-4.6	PK
	H	9748.0	36.1	16.2	52.3	54(Note3)	-1.7	PK
	V	9748.0	35.8	16.2	52.0	54(Note3)	-2.0	PK
11	H	3550.5	37.2	4.1	41.3	54(Note3)	-10.8	PK
	V	3210.4	38.4	3.5	41.9	54(Note3)	-12.7	PK
	H	4927.0	38.2	6.7	44.9	54(Note3)	-12.1	PK
	H	4927.0	40.2	6.7	46.9	54(Note3)	-9.1	PK
	V	7386.0	36.8	14.1	50.9	54(Note3)	-7.1	PK
	V	7386.0	36.5	14.1	50.6	54(Note3)	-3.1	PK
	H	9848.0	35.9	16.4	52.3	54(Note3)	-3.4	PK
	V	9848.0	34.7	16.4	51.1	54(Note3)	-1.7	PK

Note: 1. Measure Level = Reading Level + Factor.

2. The test trace is same as the ambient noise (the test frequency range: 9kHz~30MHz, 18GHz~25GHz), therefore no data appear in the report.

3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

Mode4: Transmit by 802.11n (40MHz)

CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
3	H	3193.2	38.2	3.6	41.8	54(Note3)	-12.2	PK
	V	3448.6	37.6	3.5	41.1	54(Note3)	-12.9	PK
	H	4842.0	40.3	6.5	46.7	54(Note3)	-7.3	PK
	V	4842.0	36.9	6.5	43.4	54(Note3)	-10.6	PK
	H	7266.0	35.4	13.9	49.3	54(Note3)	-4.7	PK
	V	7266.0	34.6	13.9	48.5	54(Note3)	-5.5	PK
	H	9688.0	36.4	15.6	52.0	54(Note3)	-2.0	PK
	V	9688.0	36.5	15.6	52.1	54(Note3)	-1.9	PK
6	H	3244.0	37.2	3.4	40.6	54(Note3)	-13.4	PK
	V	3244.0	37.9	3.4	41.3	54(Note3)	-12.7	PK
	H	4874.0	36.5	6.6	43.1	54(Note3)	-10.9	PK
	V	4874.0	36.4	6.6	43.0	54(Note3)	-11.0	PK
	H	7311.0	35.4	14.0	49.4	54(Note3)	-4.6	PK
	V	7311.0	34.6	14.0	48.6	54(Note3)	-5.4	PK
	H	9748.0	36.5	16.2	52.7	54(Note3)	-1.3	PK
	V	9748.0	35.1	16.2	51.3	54(Note3)	-2.7	PK
9	H	3210.1	37.4	3.5	40.9	54(Note3)	-13.1	PK
	V	3278.2	38.4	3.3	41.7	54(Note3)	-12.3	PK
	H	4904.0	36.5	6.7	43.2	54(Note3)	-10.8	PK
	V	4904.0	34.5	6.7	41.2	54(Note3)	-12.8	PK
	H	7356.0	35.1	14.0	49.1	54(Note3)	-4.9	PK
	V	7356.0	36.2	14.0	50.2	54(Note3)	-3.8	PK
	H	9808.0	35.4	16.4	51.8	54(Note3)	-2.2	PK
	V	9808.0	34.1	16.4	50.5	54(Note3)	-3.5	PK


Note: 1. Measure Level = Reading Level + Factor.

2. The test trace is same as the ambient noise (the test frequency range: 9kHz~30MHz, 18GHz~25GHz), therefore no data appear in the report.

3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.


The worst case of Radiated Emission below 1GHz:

Tested by	Roy	Test Data	2013-11-19- 17:40:07
Site	AC1	Power	AC 120V/60Hz
Limit	FCC_PART15.209_RE	Polarity	Horizontal
Antenna	VULB_9162	Test Mode	Mode 1
EUT	Multi-Screen Interactive Device		

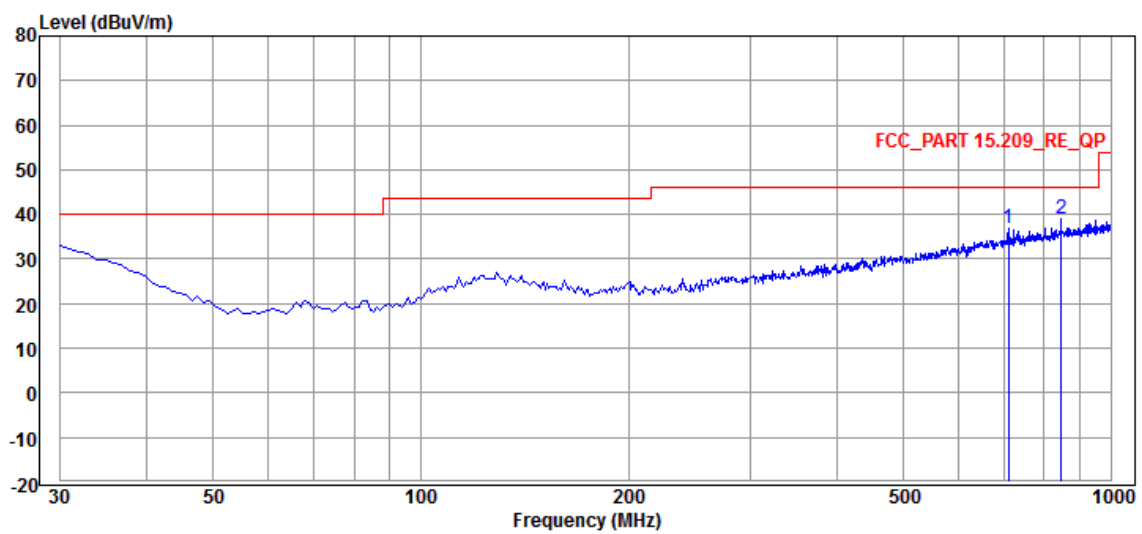

Freq (MHz)	Level (dBuV/m)	Reading (dBuV)	C.F (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector
709.97	36.82	35.16	1.66	46.00	-9.18	QP
846.74	39.06	37.25	1.81	46.00	-6.94	QP

Tested by	Roy	Test Data	2013-11-19- 19:02:50
Site	AC1	Power	AC 120V/60Hz
Limit	FCC_PART15.209_RE	Polarity	Vertical
Antenna	VULB_9162	Test Mode	Mode 1
EUT	Multi-Screen Interactive Device		

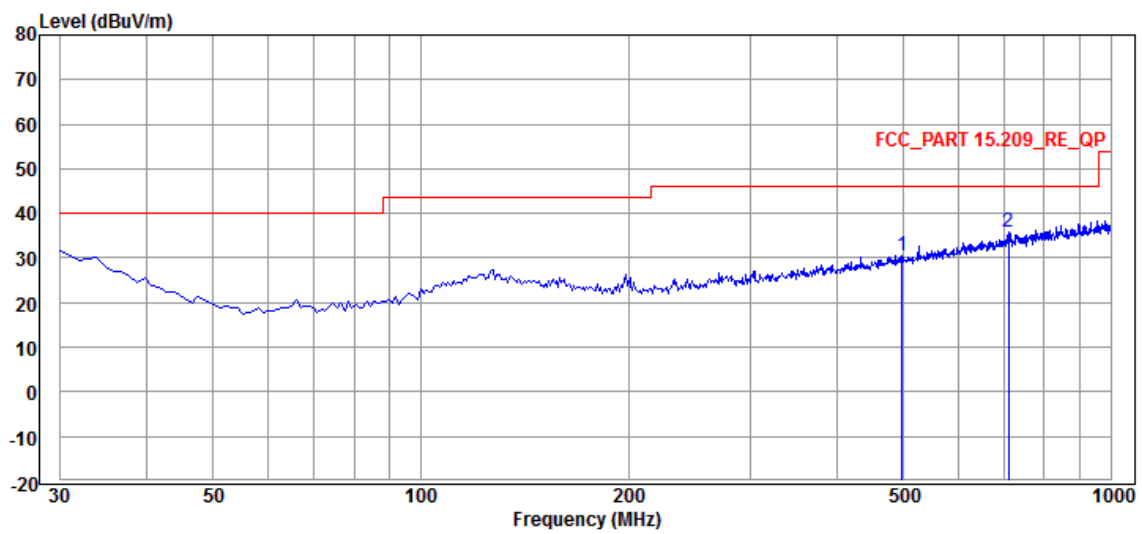


Freq (MHz)	Level (dBμV/m)	Reading (dBuV)	C.F (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector
498.51	30.51	29.12	1.39	46.00	-15.49	QP
709.97	35.82	34.16	1.66	46.00	-10.18	QP

5. RF Antenna Conducted Spurious

5.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.2. Test Setup

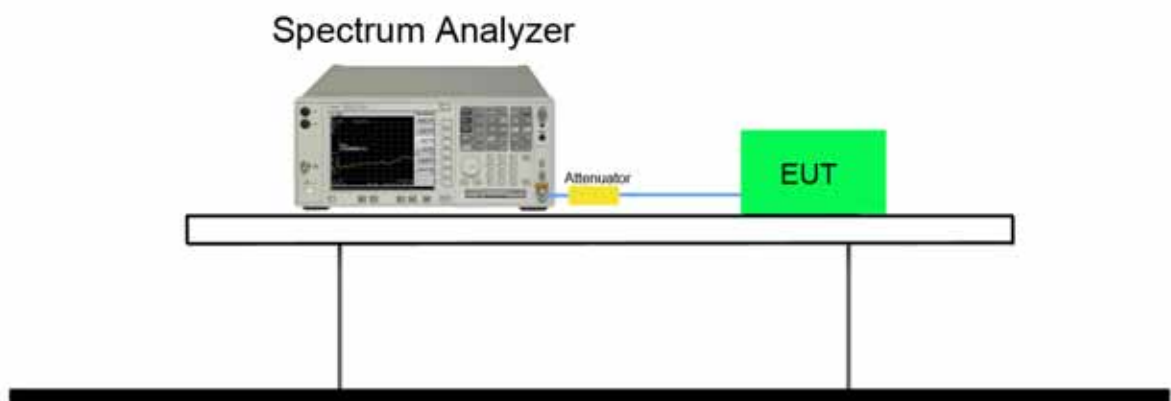

5.3. Test Procedure


The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Set VBW > RBW, scan up through 10th harmonic.


5.4. Test Result

Product	:	Multi-Screen Interactive Device
Test Item	:	RF Antenna Conducted Spurious
Test Site	:	TR3
Test Mode	:	Mode 1: Transmit by 802.11b


Channel 01 (2412MHz)

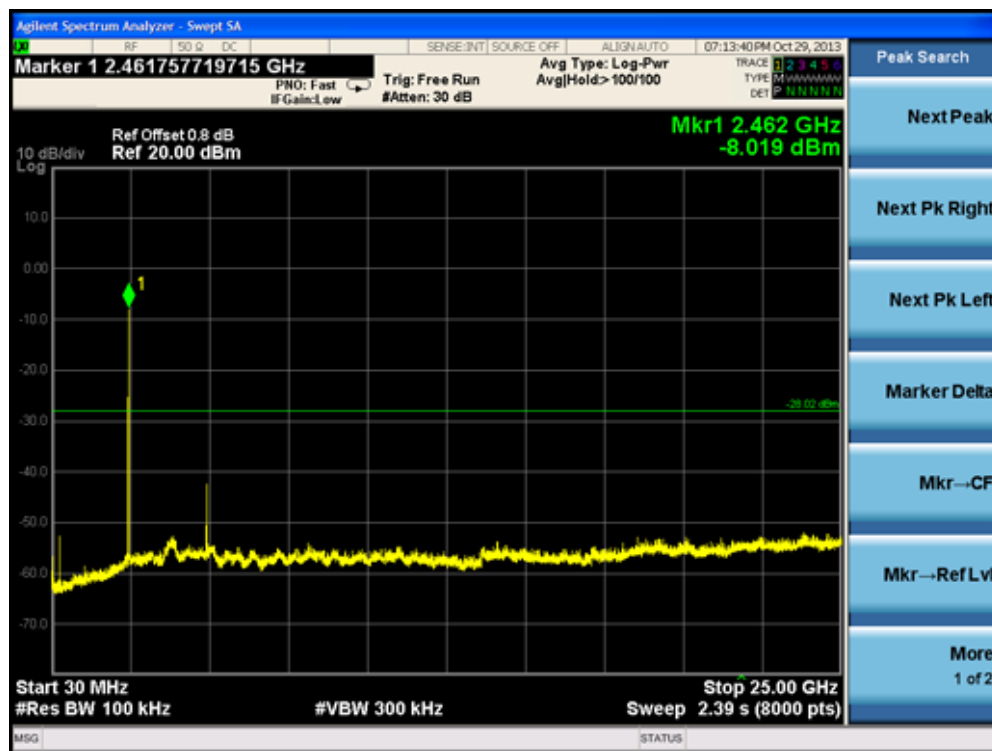

Channel 06 (2437MHz)

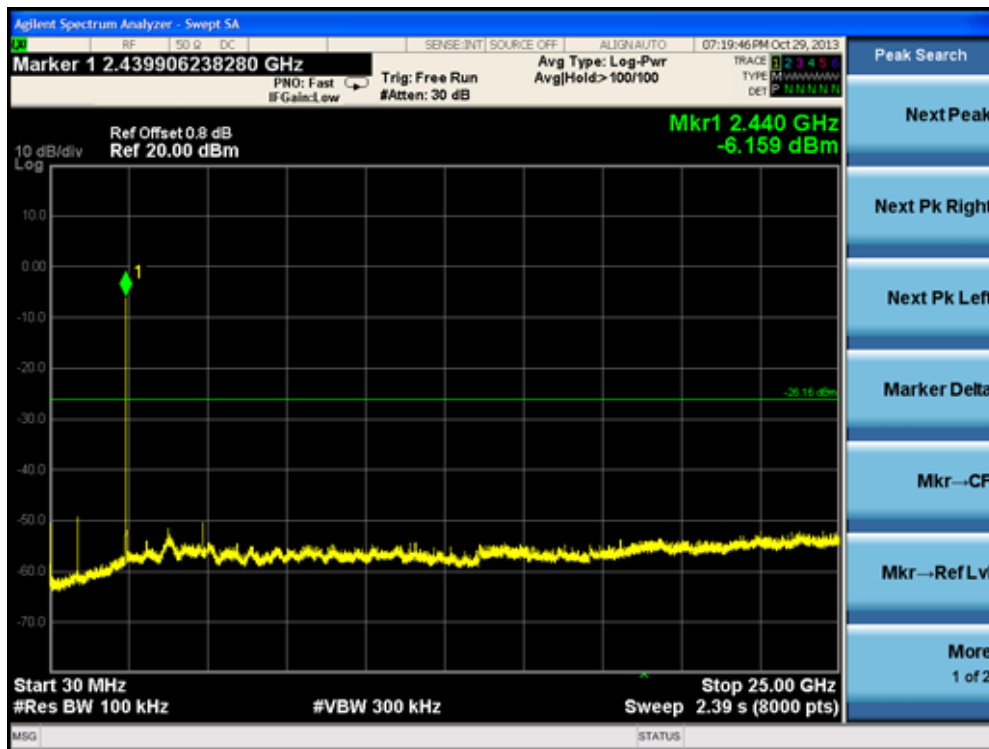


Channel 11 (2462MHz)

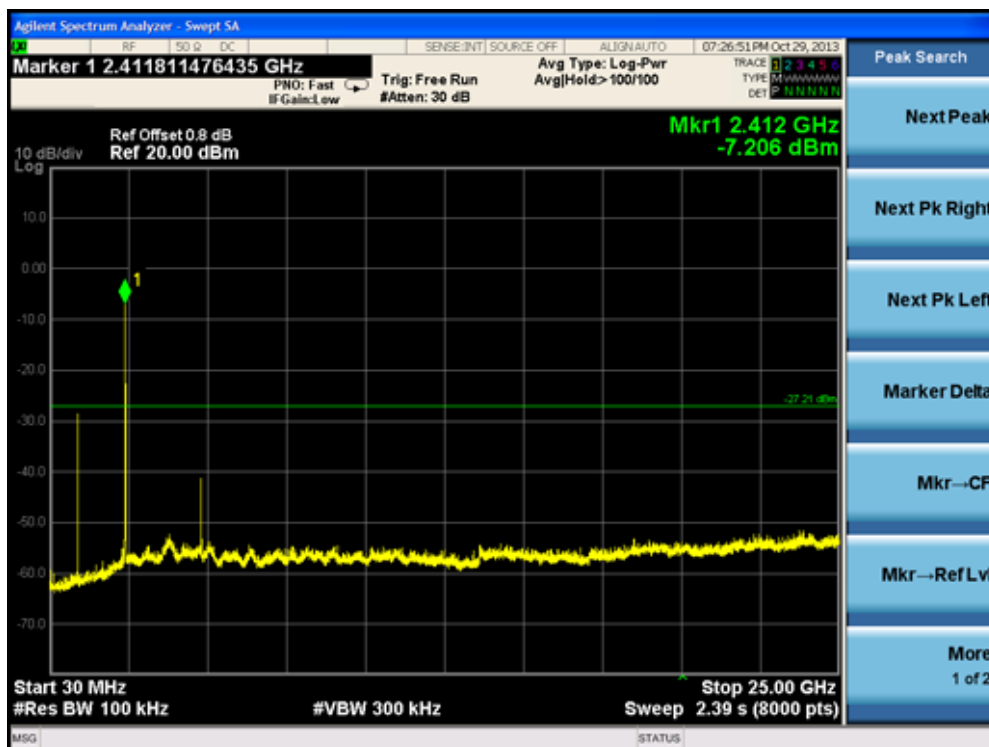


Product	:	Multi-Screen Interactive Device
Test Item	:	RF Antenna Conducted Spurious
Test Site	:	TR3
Test Mode	:	Mode 2: Transmit by 802.11g


Channel 01 (2412MHz)

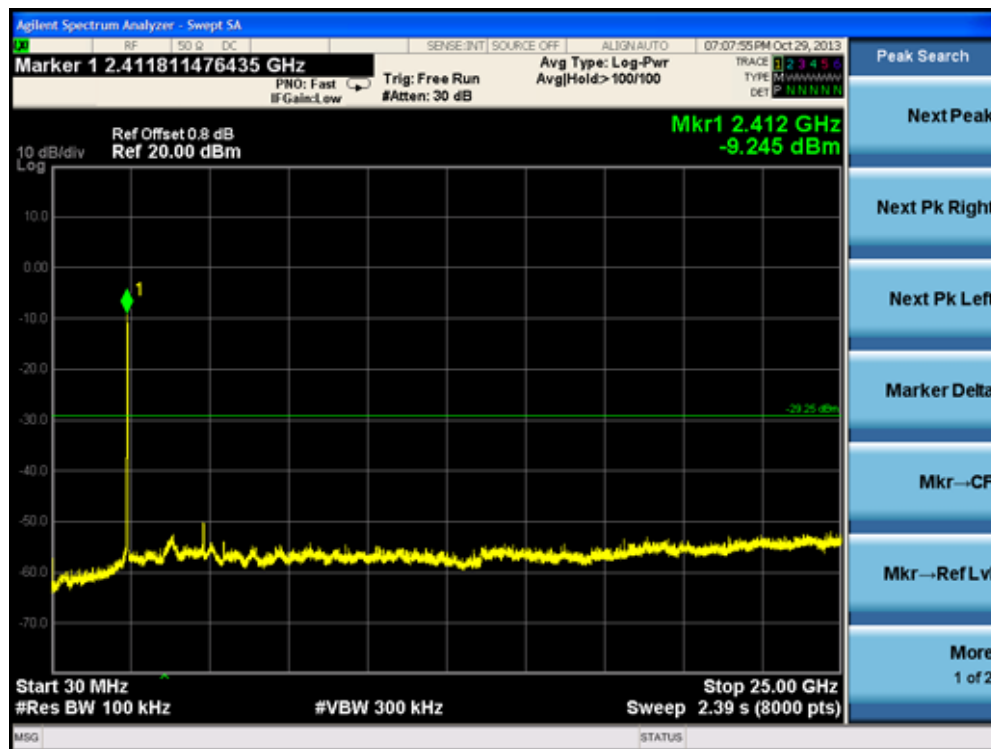

Channel 06 (2437MHz)

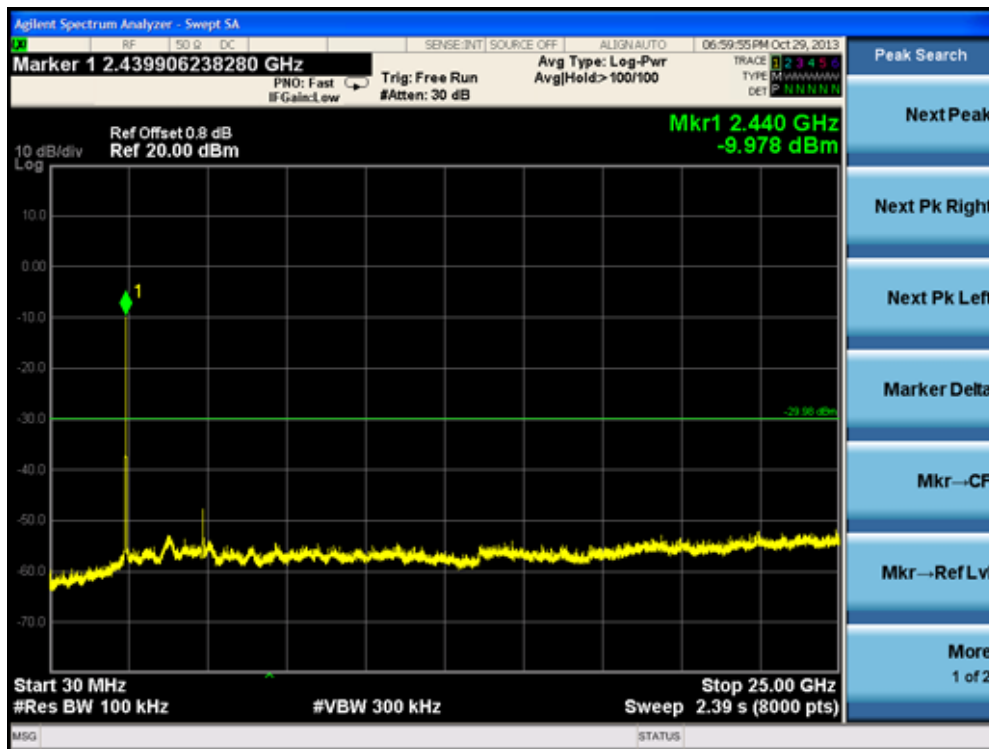


Channel 11 (2462MHz)

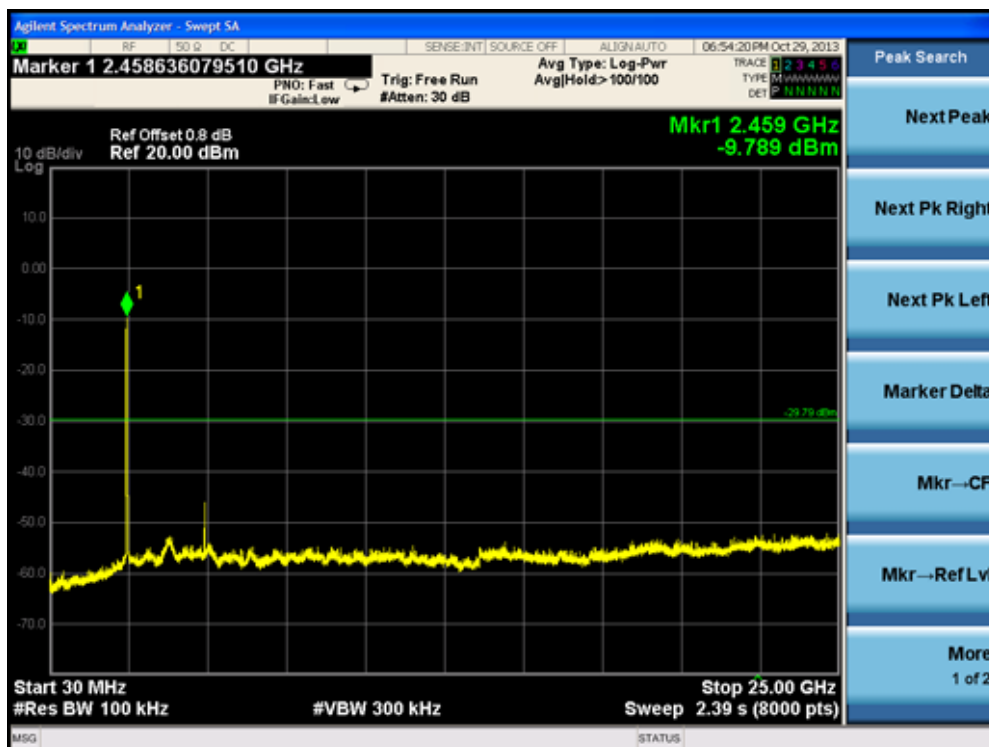


Product	:	Multi-Screen Interactive Device
Test Item	:	RF Antenna Conducted Spurious
Test Site	:	TR3
Test Mode	:	Mode 3: Transmit by 802.11n(20MHz)


Channel 01 (2412MHz)

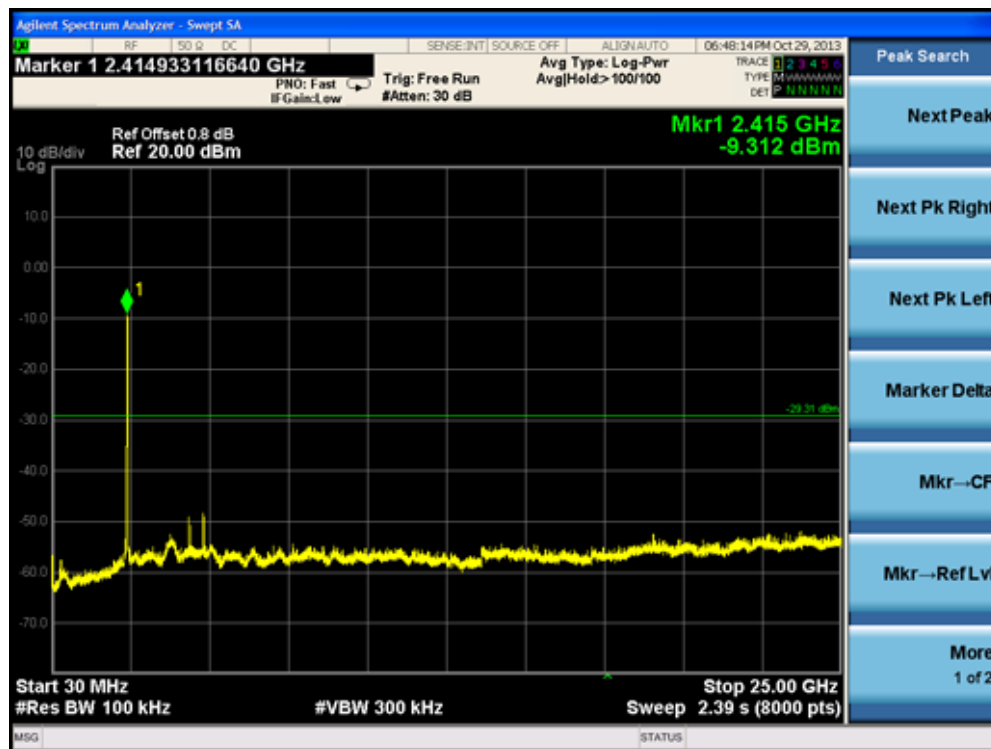

Channel 06 (2437MHz)

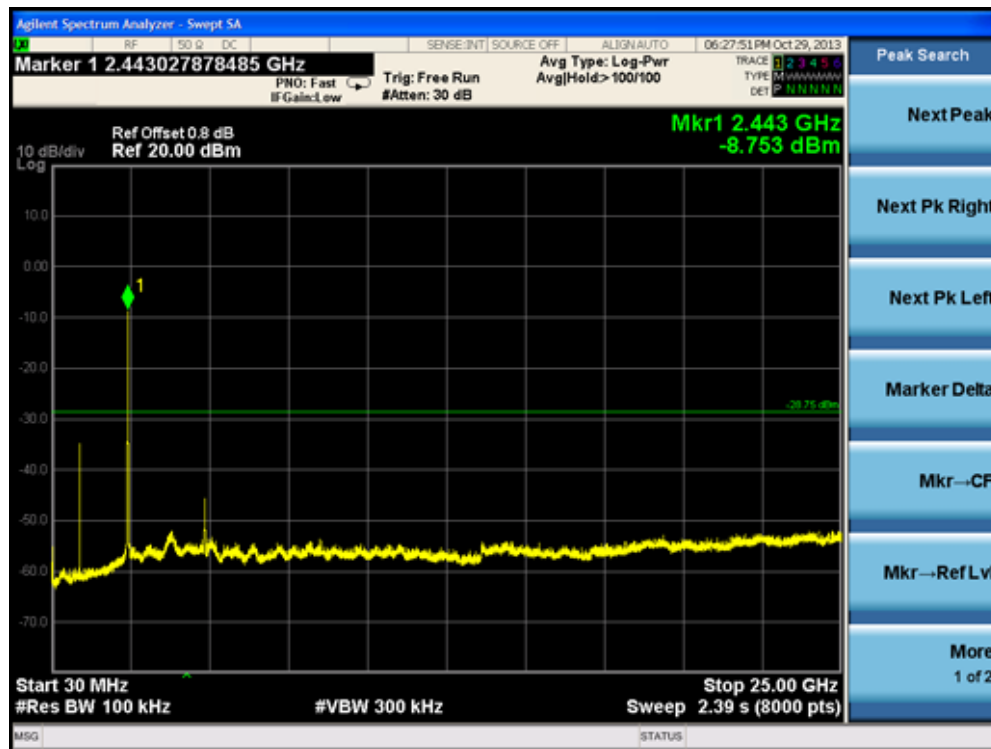


Channel 11 (2462MHz)

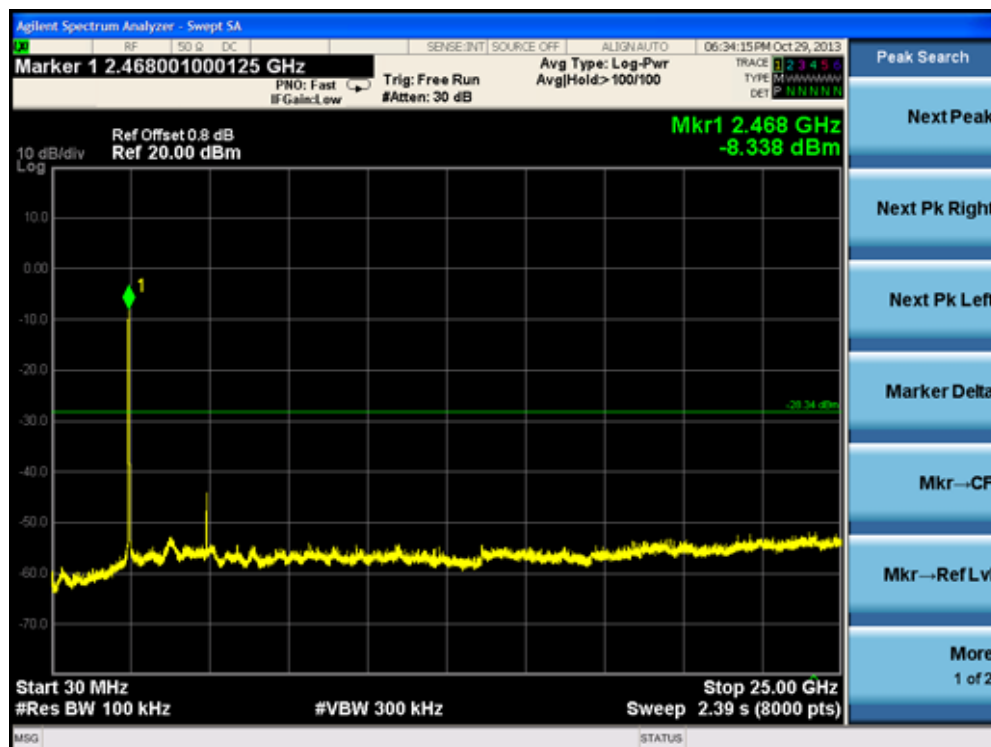


Product	:	Multi-Screen Interactive Device
Test Item	:	RF Antenna Conducted Spurious
Test Site	:	TR3
Test Mode	:	Mode 4: Transmit by 802.11n(40MHz)


Channel 03 (2422MHz)

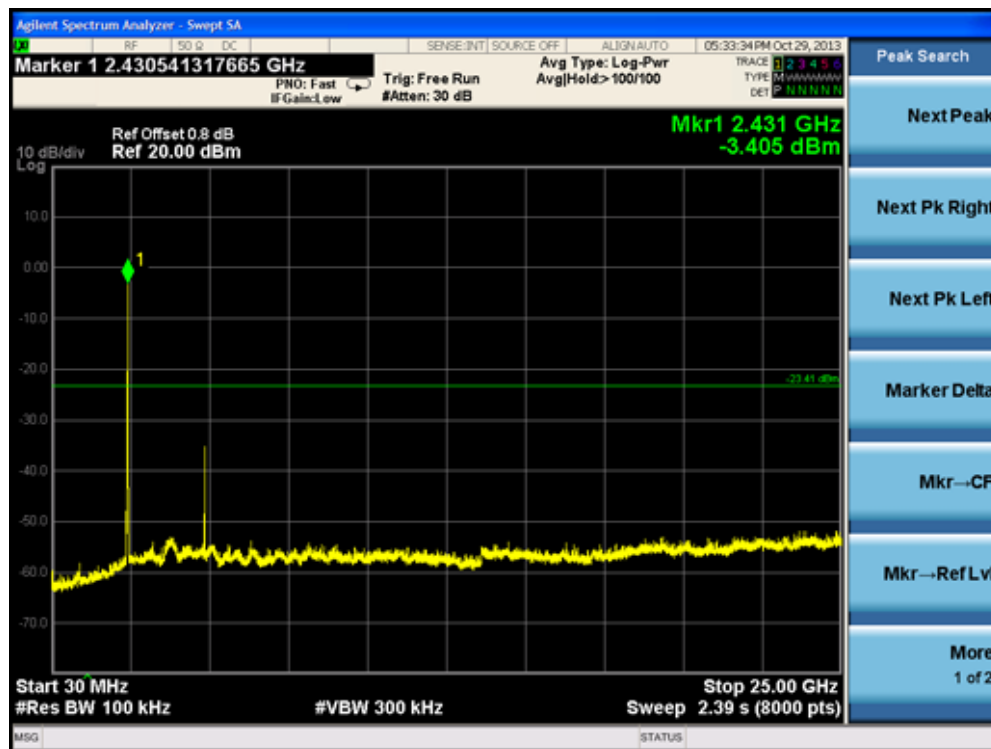

Channel 06 (2437MHz)

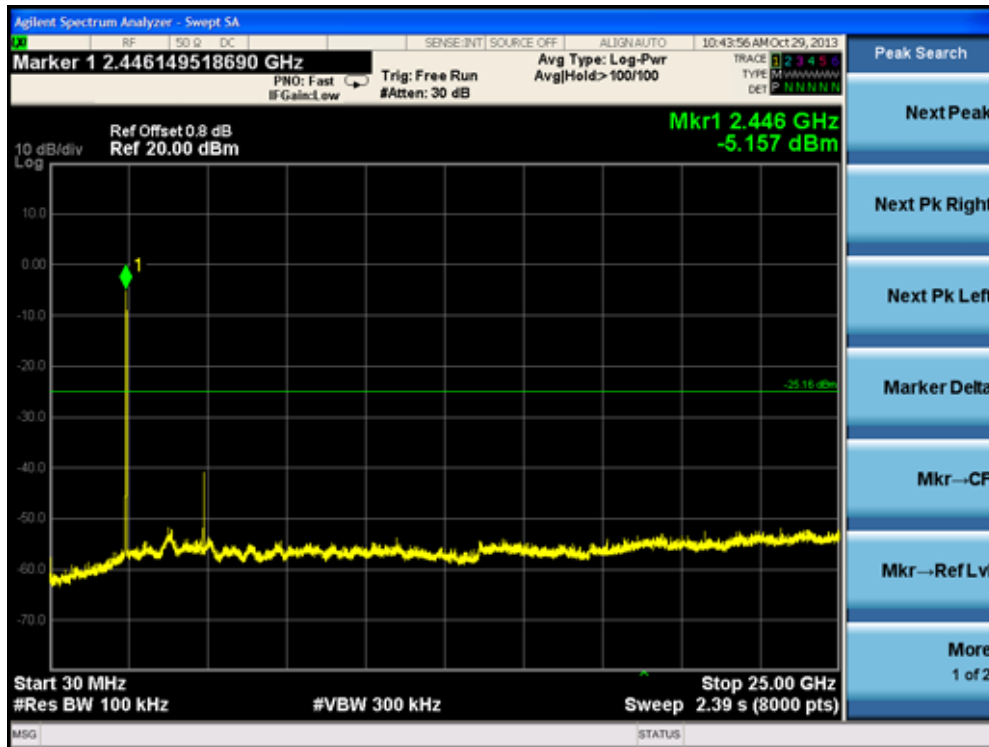

Channel 09 (2452MHz)

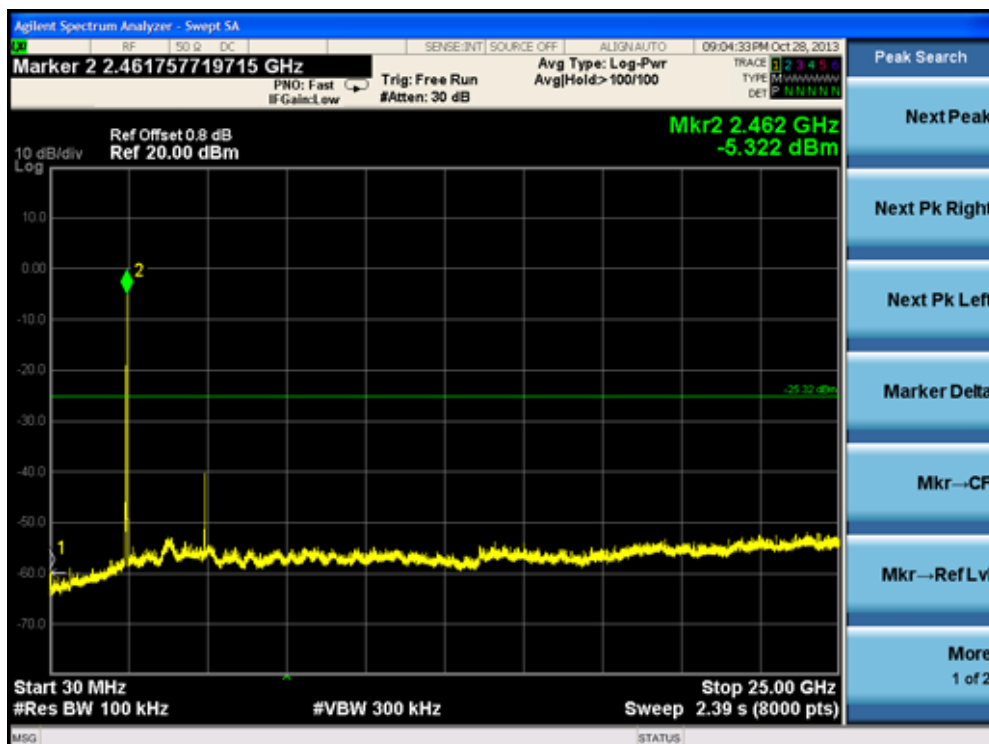


6. Radiated Emission Band Edge

6.1. Limit

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.2. Test Setup

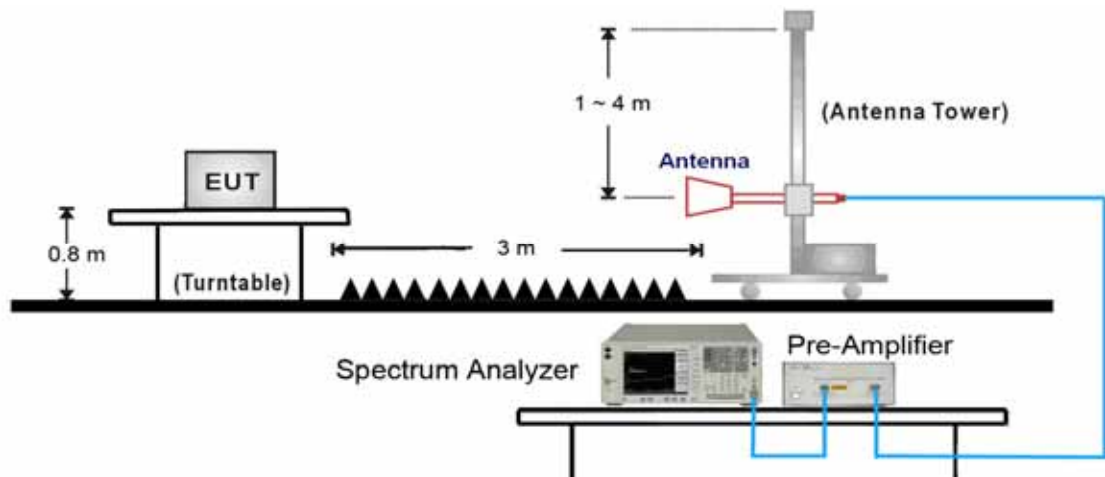

6.3. Test Procedure


The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from Antenna to the EUT was 3 meters.

The Antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the Antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4: 2009 on radiated measurement.


6.4. Test Result

Engineer: Roy	
Site: AC1	Time: 2013/11/16 - 10:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Multi-Screen Interactive Device	Power: AC 120V/60Hz
Note: Mode 1:Transmit at Channel 2412MHz by 802.11b	

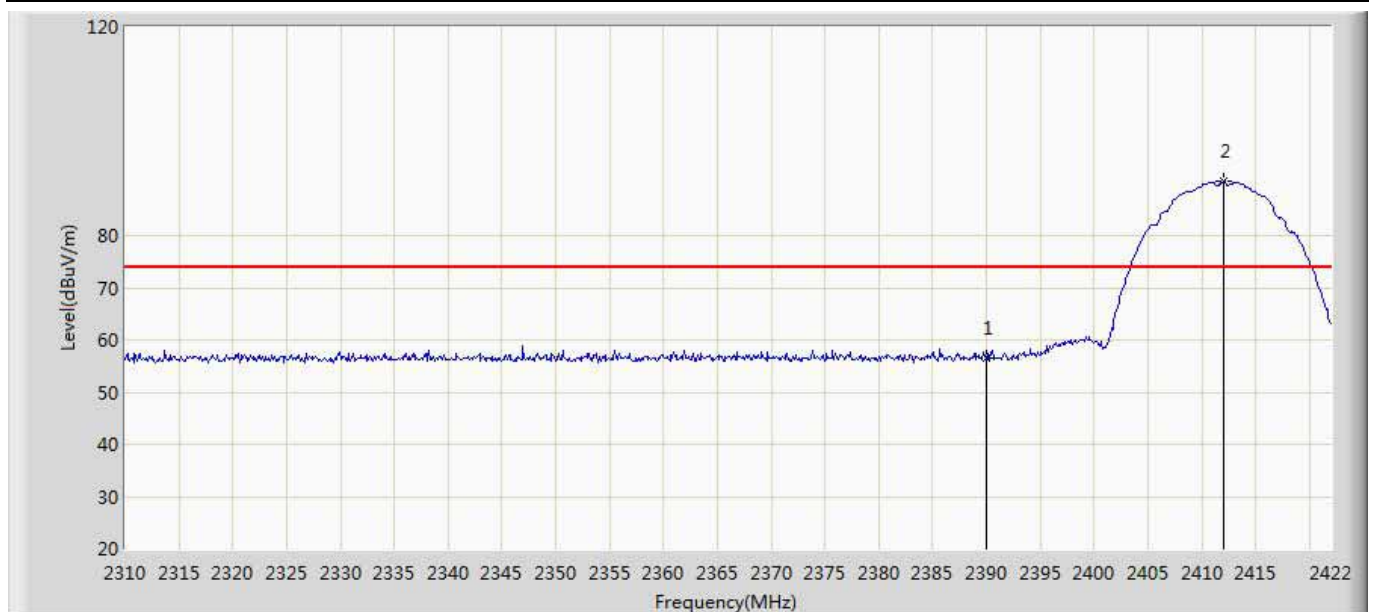


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	56.557	25.873	-17.443	74.000	30.684	PK
2		*	2412.032	90.536	59.891	N/A	N/A	30.645	PK

Engineer: Roy	
Site: AC1	Time: 2013/11/16 - 10:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Multi-Screen Interactive Device	Power: AC 120V/60Hz
Note: Mode 1:Transmit at Channel 2412MHz by 802.11b	

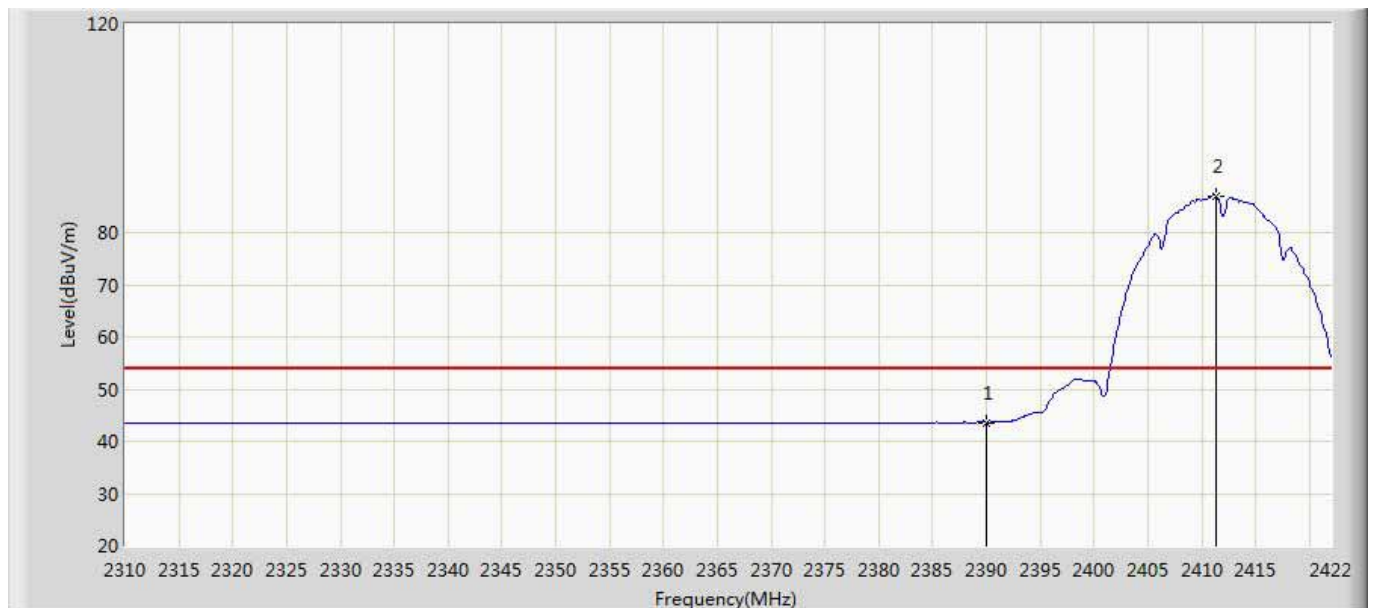


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	43.608	12.924	-10.392	54.000	30.684	AV
2		*	2411.360	87.099	56.453	N/A	N/A	30.645	AV

Engineer: Roy	
Site: AC1	Time: 2013/11/16 - 10:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Multi-Screen Interactive Device	Power: AC 120V/60Hz
Note: Mode 1:Transmit at Channel 2412MHz by 802.11b	

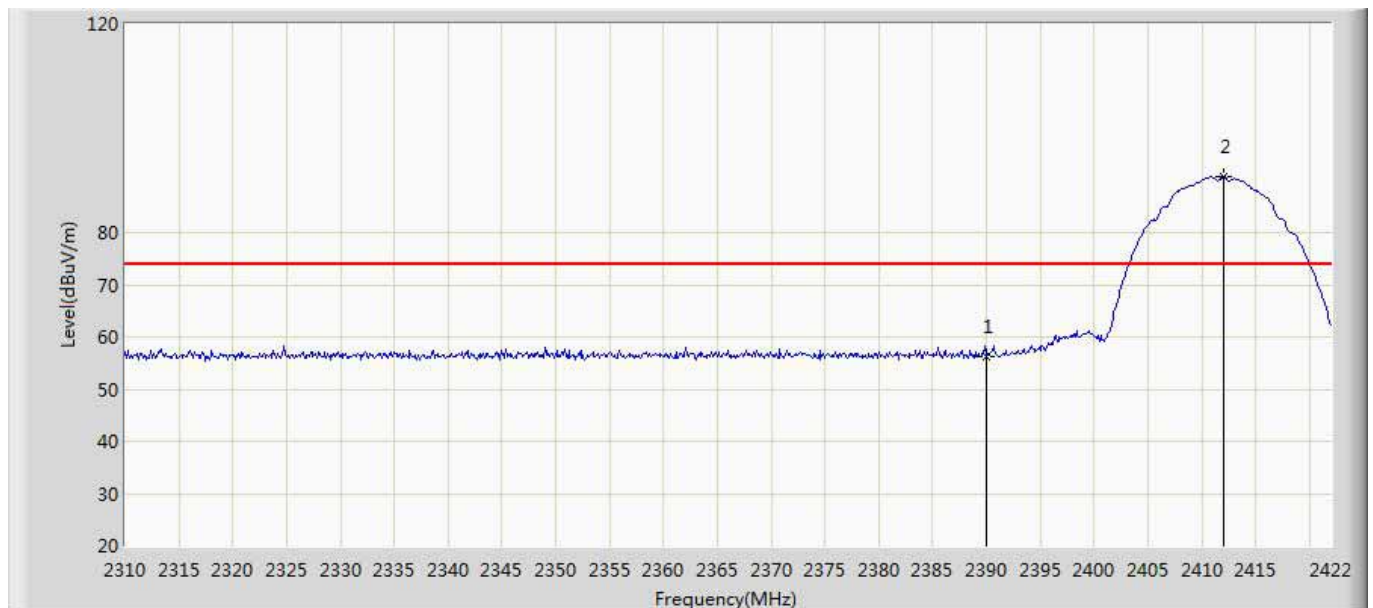


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	56.375	25.691	-17.625	74.000	30.684	PK
2		*	2412.032	90.844	60.199	N/A	N/A	30.645	PK

Engineer: Roy	
Site: AC1	Time: 2013/11/16 - 10:55
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Multi-Screen Interactive Device	Power: AC 120V/60Hz
Note: Mode 1:Transmit at Channel 2412MHz by 802.11b	

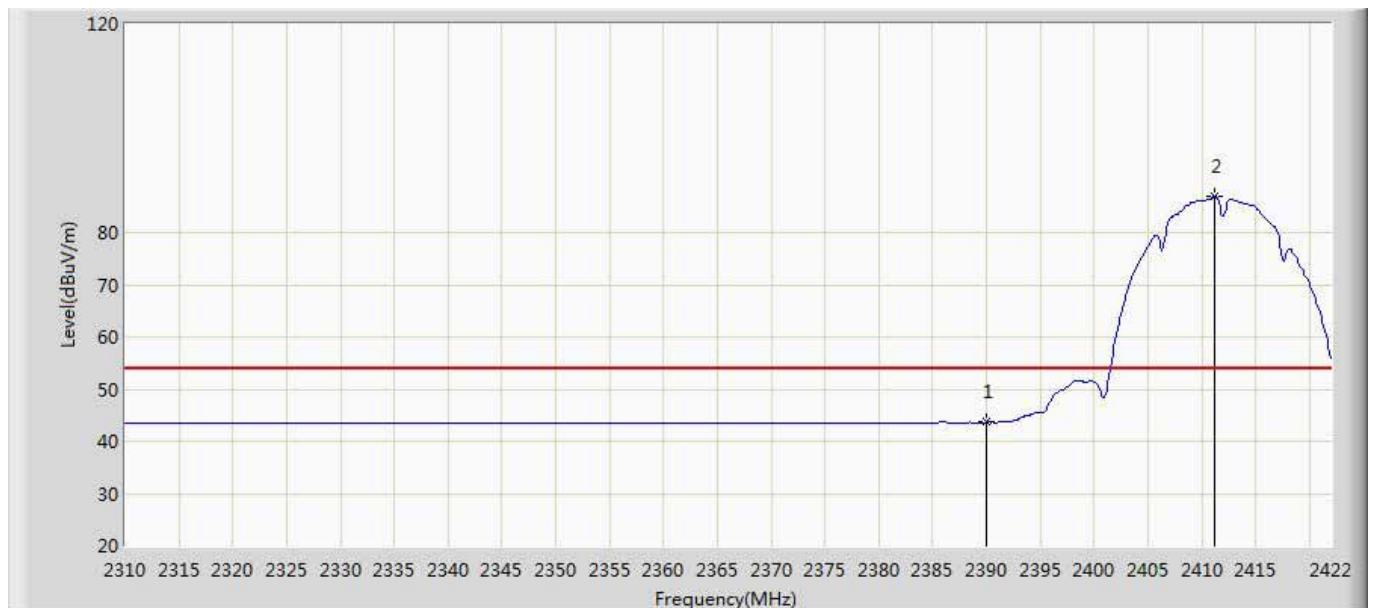


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	43.641	12.957	-10.359	54.000	30.684	AV
2		*	2411.136	87.021	56.375	N/A	N/A	30.646	AV

Engineer: Roy	
Site: AC1	Time: 2013/11/16 - 10:56
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Multi-Screen Interactive Device	Power: AC 120V/60Hz
Note: Mode 1:Transmit at Channel 2462MHz by 802.11b	

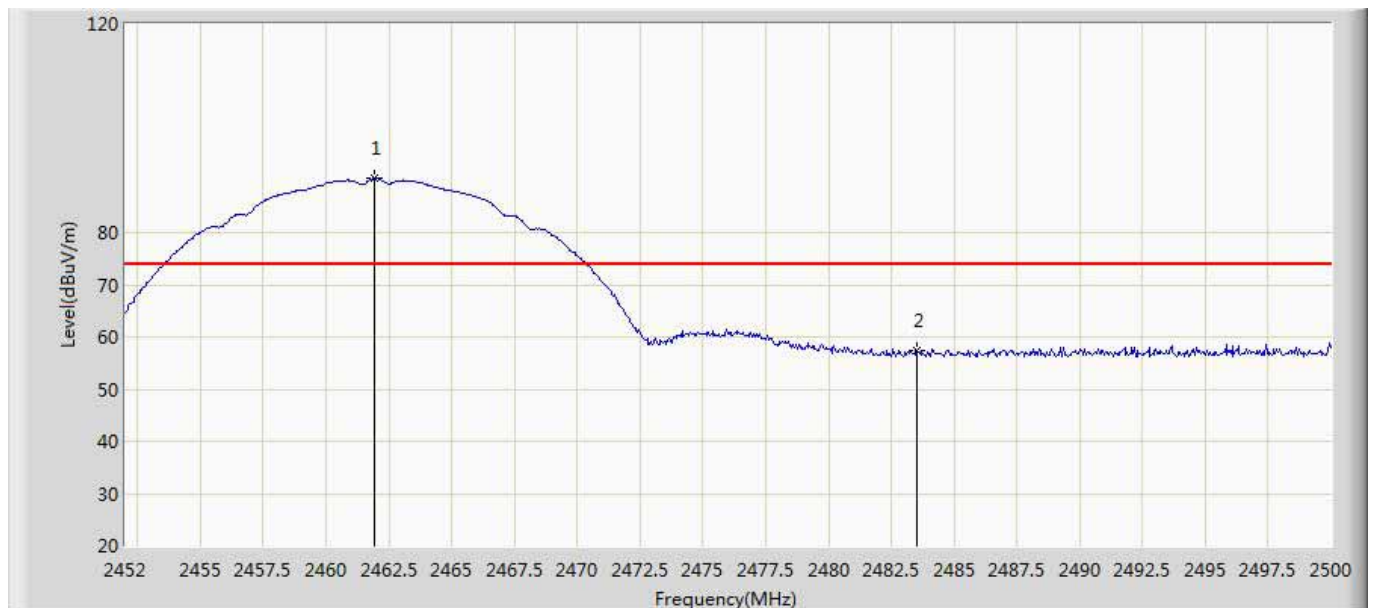


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2461.936	90.364	59.753	N/A	N/A	30.611	PK
2			2483.500	57.356	26.683	-16.644	74.000	30.673	PK

Engineer: Roy	
Site: AC1	Time: 2013/11/16 - 10:58
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Multi-Screen Interactive Device	Power: AC 120V/60Hz
Note: Mode 1:Transmit at Channel 2462MHz by 802.11b	

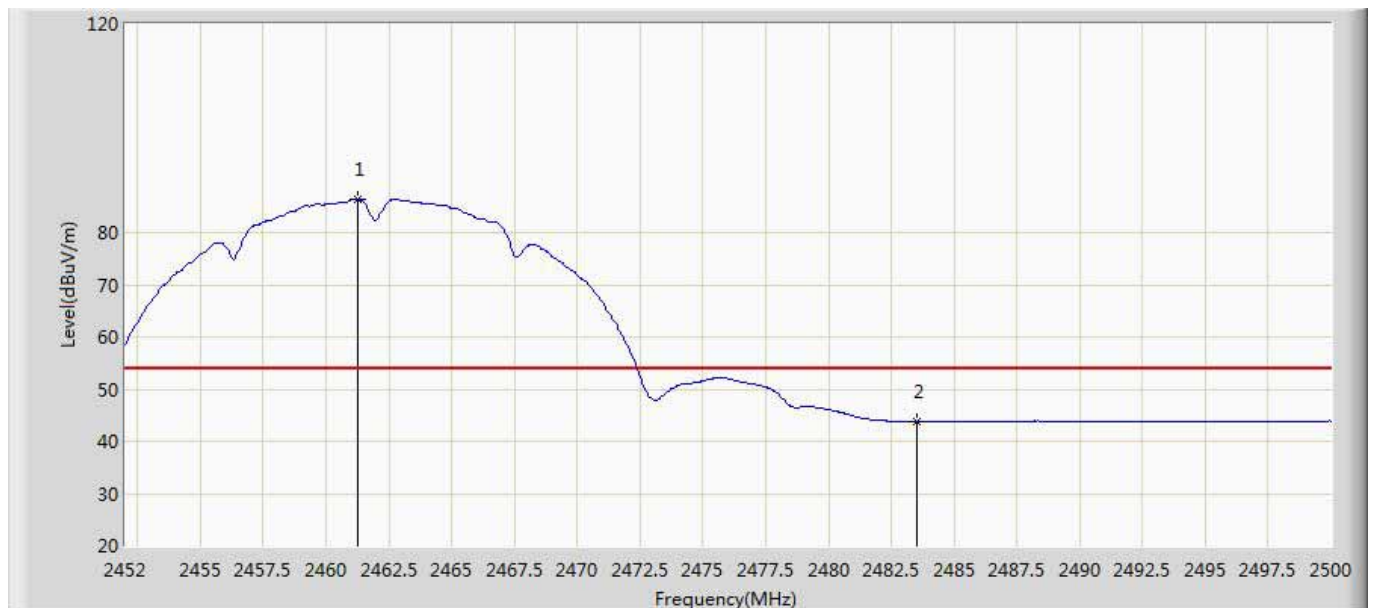


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2461.264	86.503	55.893	N/A	N/A	30.611	AV
2			2483.500	43.711	13.038	-10.289	54.000	30.673	AV

Engineer: Roy	
Site: AC1	Time: 2013/11/16 - 10:59
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Multi-Screen Interactive Device	Power: AC 120V/60Hz
Note: Mode 1:Transmit at Channel 2462MHz by 802.11b	

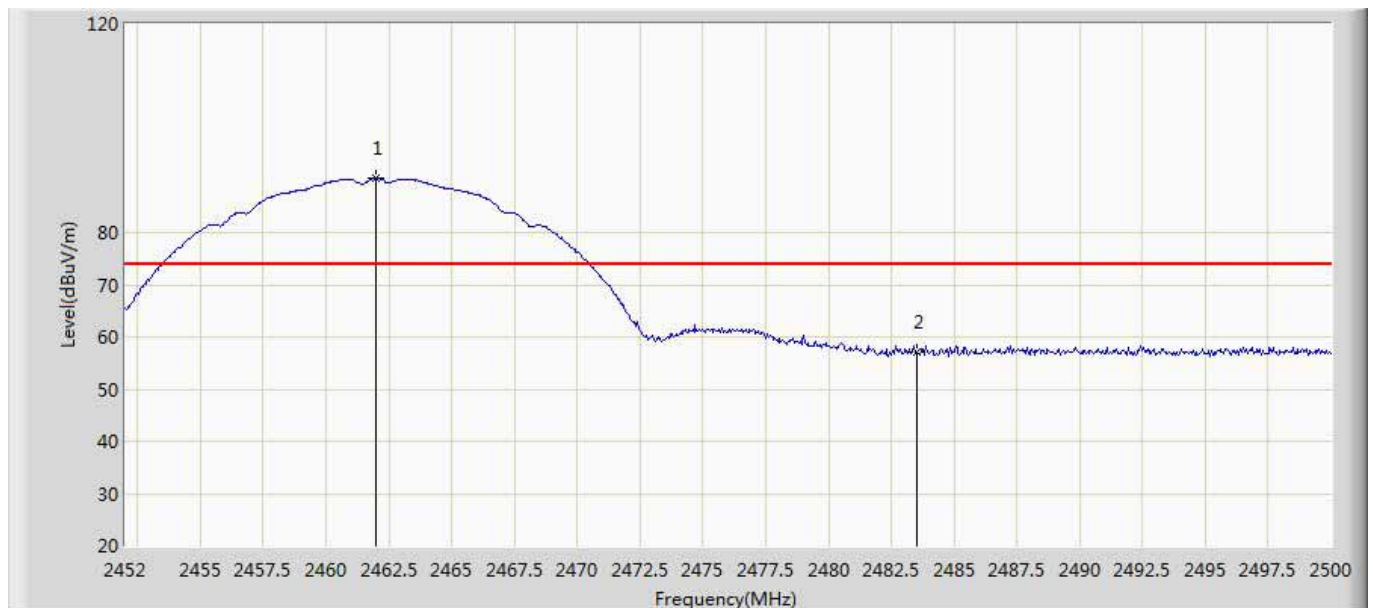

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2461.984	90.525	59.914	N/A	N/A	30.611	PK
2			2483.500	57.067	26.394	-16.933	74.000	30.673	PK

Engineer: Roy	
Site: AC1	Time: 2013/11/16 - 11:01
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Multi-Screen Interactive Device	Power: AC 120V/60Hz
Note: Mode 1:Transmit at Channel 2462MHz by 802.11b	

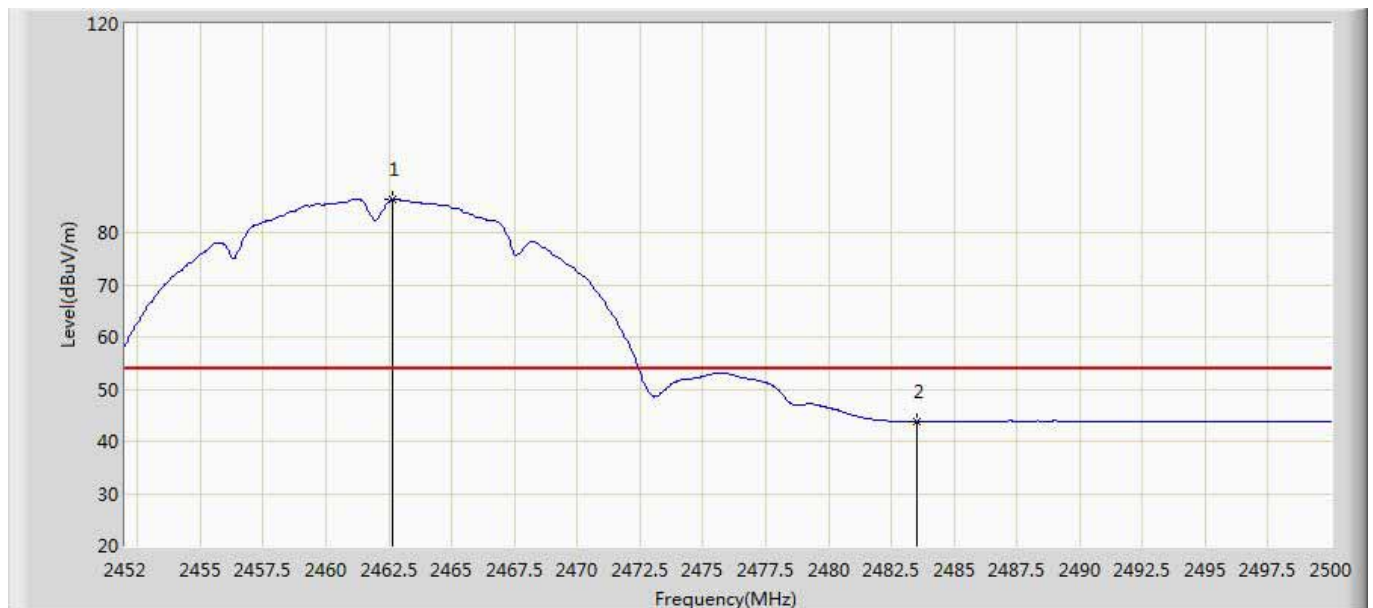


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2462.656	86.389	55.776	N/A	N/A	30.613	AV
2			2483.500	43.758	13.085	-10.242	54.000	30.673	AV

Engineer: Roy	
Site: AC1	Time: 2013/11/16 - 11:02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Multi-Screen Interactive Device	Power: AC 120V/60Hz
Note: Mode 2:Transmit at Channel 2412MHz by 802.11g	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	64.980	34.296	-9.020	74.000	30.684	PK
2		*	2419.312	92.456	61.823	N/A	N/A	30.634	PK

Engineer: Roy	
Site: AC1	Time: 2013/11/16 - 11:05
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Multi-Screen Interactive Device	Power: AC 120V/60Hz
Note: Mode 2:Transmit at Channel 2412MHz by 802.11g	

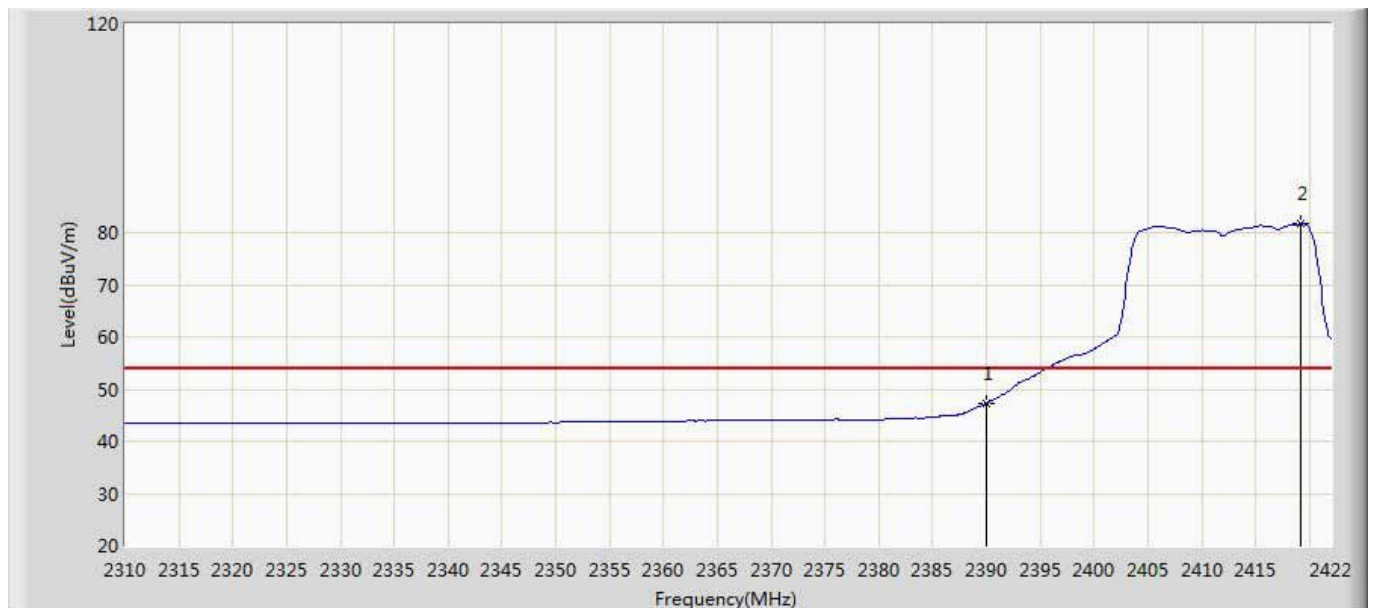


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	47.305	16.621	-6.695	54.000	30.684	AV
2		*	2419.200	81.657	51.023	N/A	N/A	30.634	AV

Engineer: Roy	
Site: AC1	Time: 2013/11/16 - 11:05
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Multi-Screen Interactive Device	Power: AC 120V/60Hz
Note: Mode 2:Transmit at Channel 2412MHz by 802.11g	

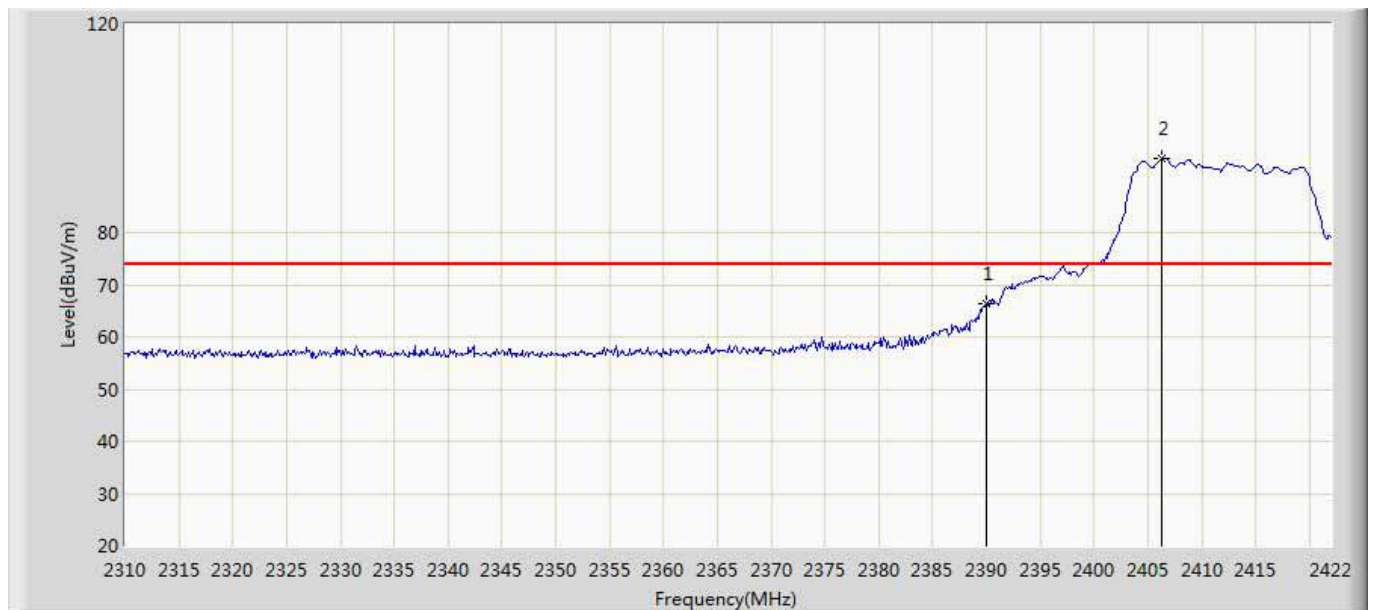


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	66.358	35.674	-7.642	74.000	30.684	PK
2		*	2406.320	94.128	63.474	N/A	N/A	30.654	PK

Engineer: Roy	
Site: AC1	Time: 2013/11/16 - 11:07
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Multi-Screen Interactive Device	Power: AC 120V/60Hz
Note: Mode 2:Transmit at Channel 2412MHz by 802.11g	

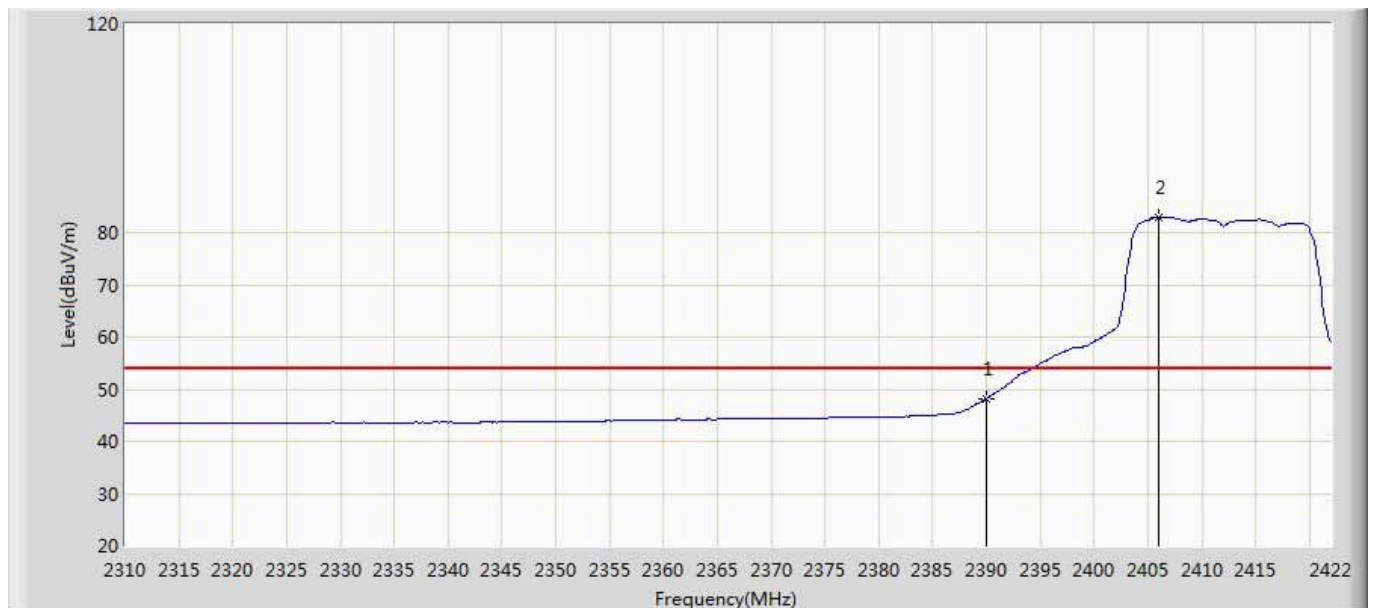


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	48.163	17.479	-5.837	54.000	30.684	AV
2		*	2405.984	82.908	52.253	N/A	N/A	30.655	AV

Engineer: Roy	
Site: AC1	Time: 2013/11/16 - 11:08
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Multi-Screen Interactive Device	Power: AC 120V/60Hz
Note: Mode 2:Transmit at Channel 2462MHz by 802.11g	

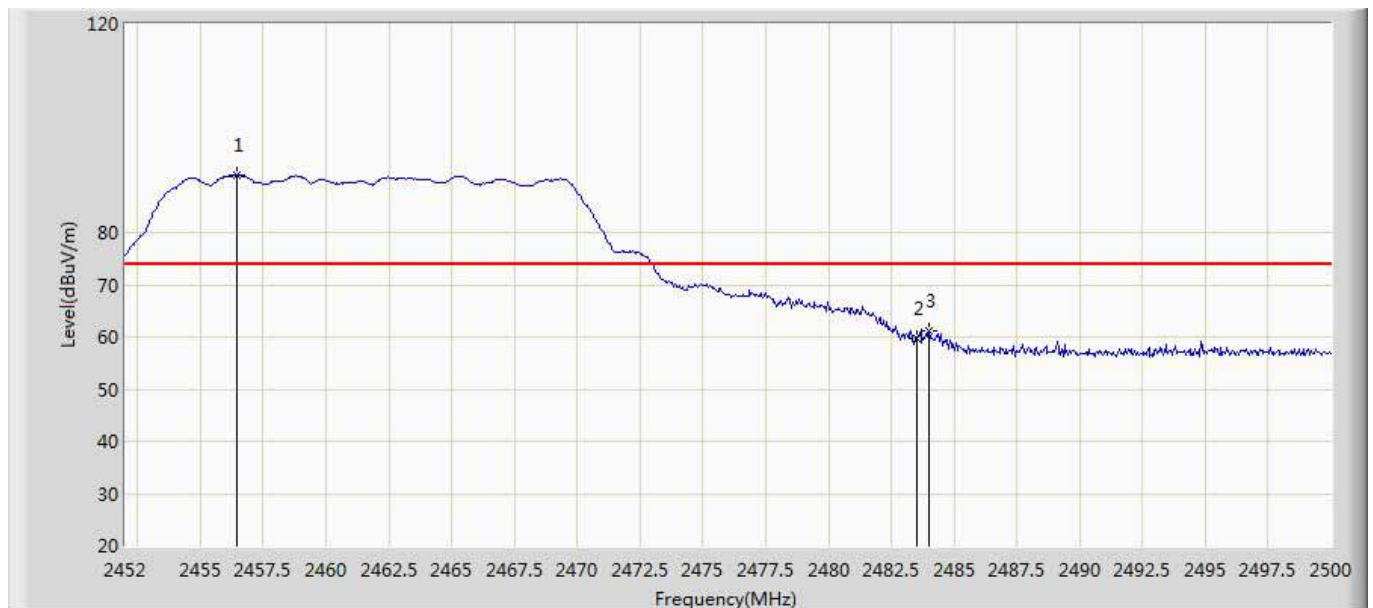

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2456.464	90.983	60.380	N/A	N/A	30.603	PK
2			2483.500	59.635	28.962	-14.365	74.000	30.673	PK
3			2484.016	61.028	30.354	-12.972	74.000	30.675	PK

Engineer: Roy	
Site: AC1	Time: 2013/11/16 - 11:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Multi-Screen Interactive Device	Power: AC 120V/60Hz
Note: Mode 2:Transmit at Channel 2462MHz by 802.11g	

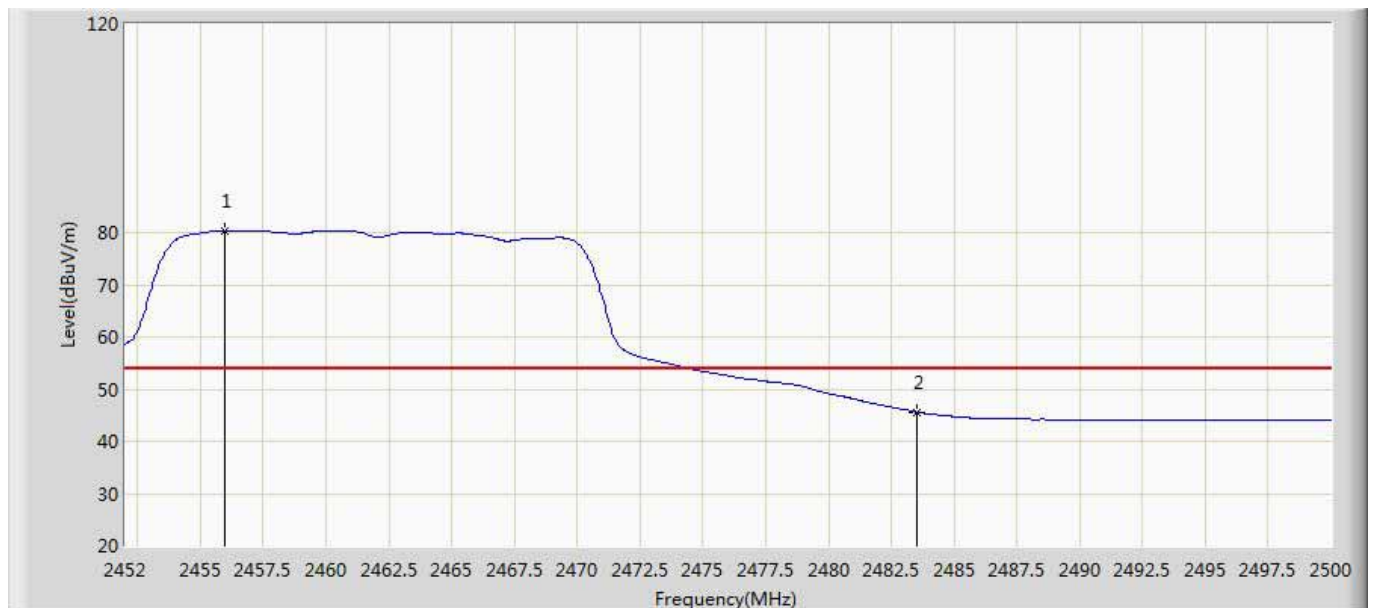


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2455.984	80.413	49.811	N/A	N/A	30.602	AV
2			2483.500	45.603	14.930	-8.397	54.000	30.673	AV

Engineer: Roy	
Site: AC1	Time: 2013/11/16 - 11:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Multi-Screen Interactive Device	Power: AC 120V/60Hz
Note: Mode 2:Transmit at Channel 2462MHz by 802.11g	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2465.440	91.287	60.667	N/A	N/A	30.620	PK
2			2483.500	60.336	29.663	-13.664	74.000	30.673	PK
3			2484.160	61.571	30.896	-12.429	74.000	30.675	PK

Engineer: Roy	
Site: AC1	Time: 2013/11/16 - 11:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Multi-Screen Interactive Device	Power: AC 120V/60Hz
Note: Mode 2:Transmit at Channel 2462MHz by 802.11g	

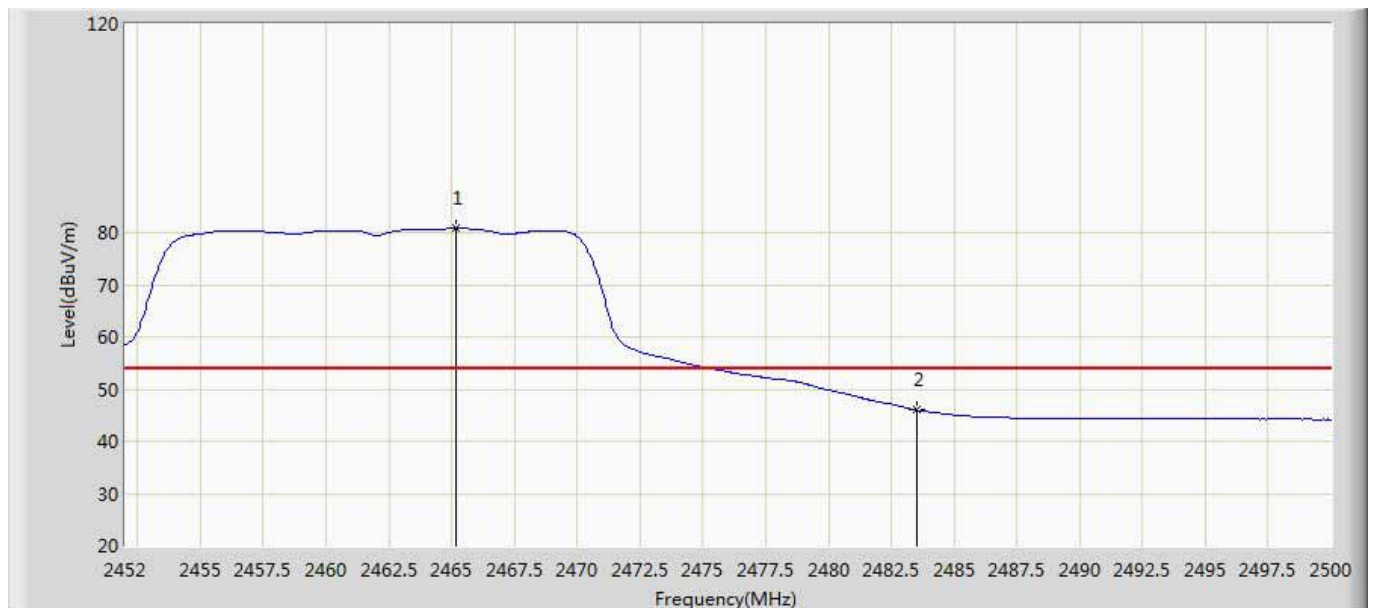


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2465.200	80.854	50.235	N/A	N/A	30.620	AV
2			2483.500	46.009	15.336	-7.991	54.000	30.673	AV

Engineer: Roy	
Site: AC1	Time: 2013/11/16 - 11:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Multi-Screen Interactive Device	Power: AC 120V/60Hz
Note: Mode 3:Transmit at Channel 2412MHz by 802.11n(20MHz)	

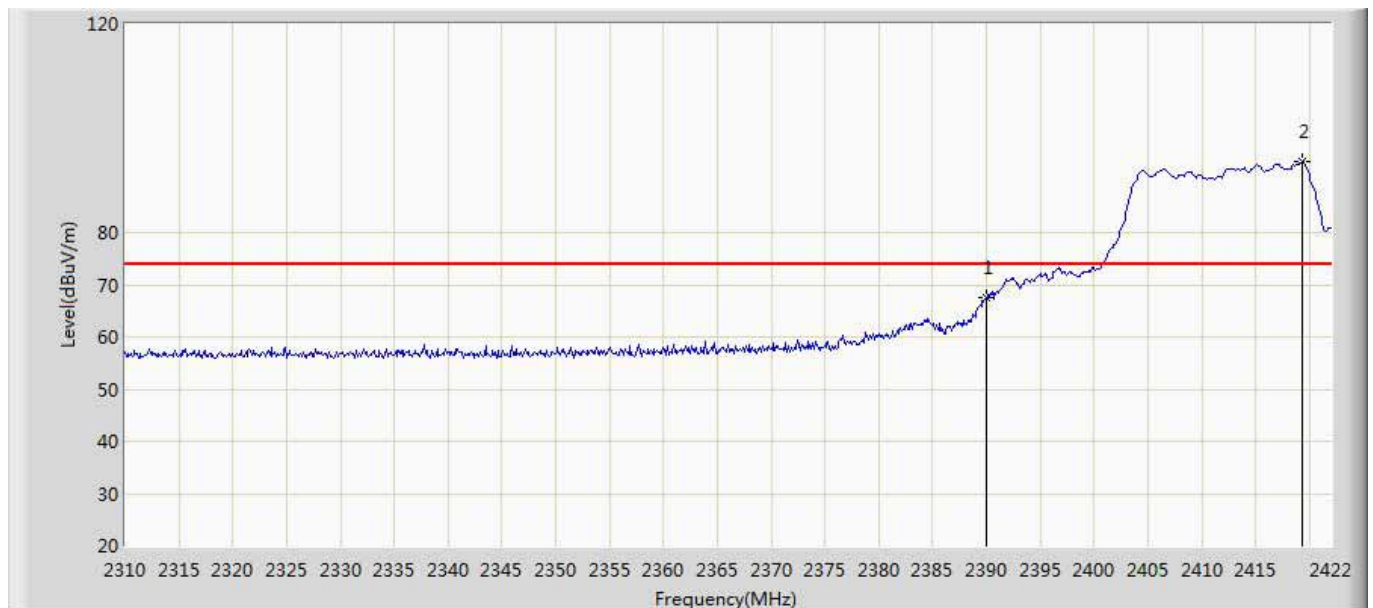


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	67.564	36.880	-6.436	74.000	30.684	PK
2		*	2419.312	93.508	62.875	N/A	N/A	30.634	PK

Engineer: Roy	
Site: AC1	Time: 2013/11/16 - 11:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Multi-Screen Interactive Device	Power: AC 120V/60Hz
Note: Mode 3:Transmit at Channel 2412MHz by 802.11n(20MHz)	

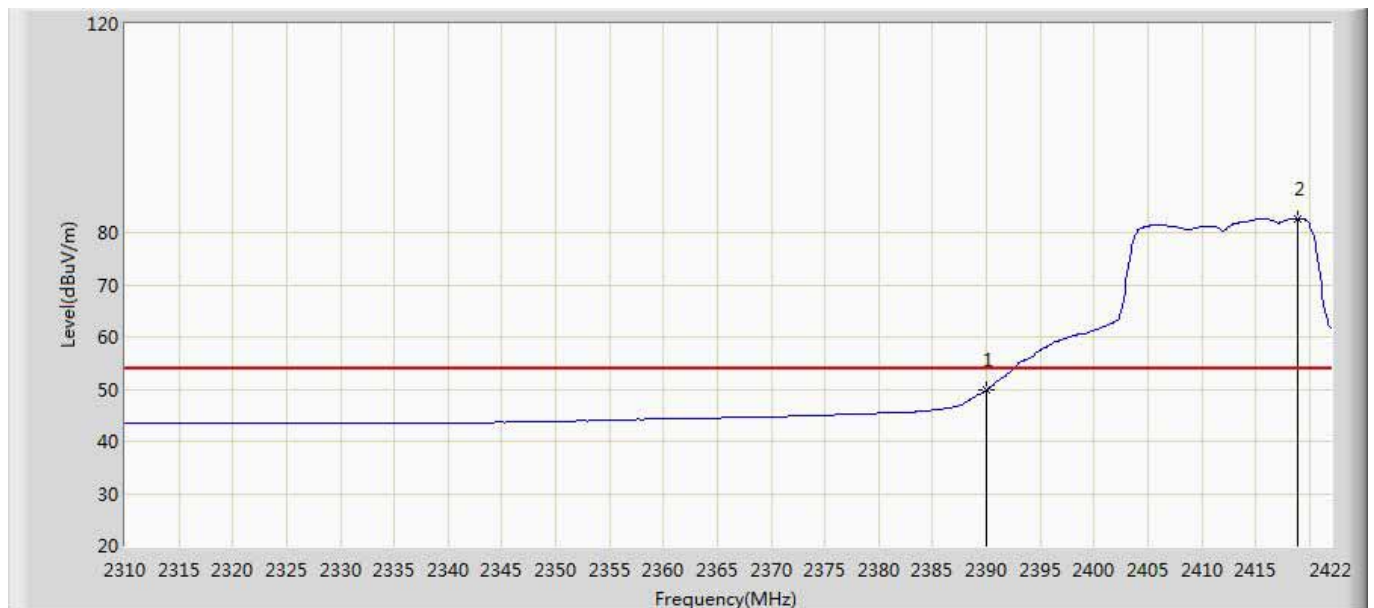


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	49.856	19.172	-4.144	54.000	30.684	AV
2		*	2418.864	82.542	51.908	N/A	N/A	30.634	AV

Engineer: Roy	
Site: AC1	Time: 2013/11/16 - 11:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Multi-Screen Interactive Device	Power: AC 120V/60Hz
Note: Mode 3:Transmit at Channel 2412MHz by 802.11n(20MHz)	

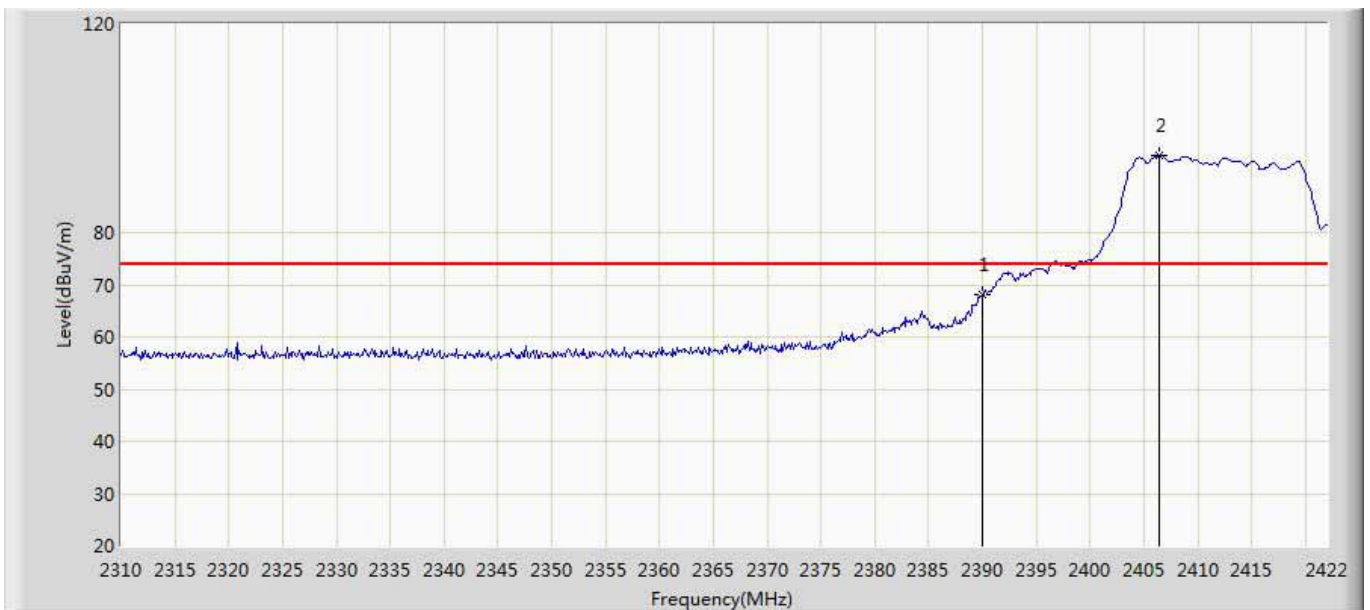

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	67.999	37.315	-6.001	74.000	30.684	PK
2		*	2406.432	94.870	64.216	N/A	N/A	30.654	PK

Engineer: Roy	
Site: AC1	Time: 2013/11/16 - 11:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Multi-Screen Interactive Device	Power: AC 120V/60Hz
Note: Mode 3:Transmit at Channel 2412MHz by 802.11n(20MHz)	

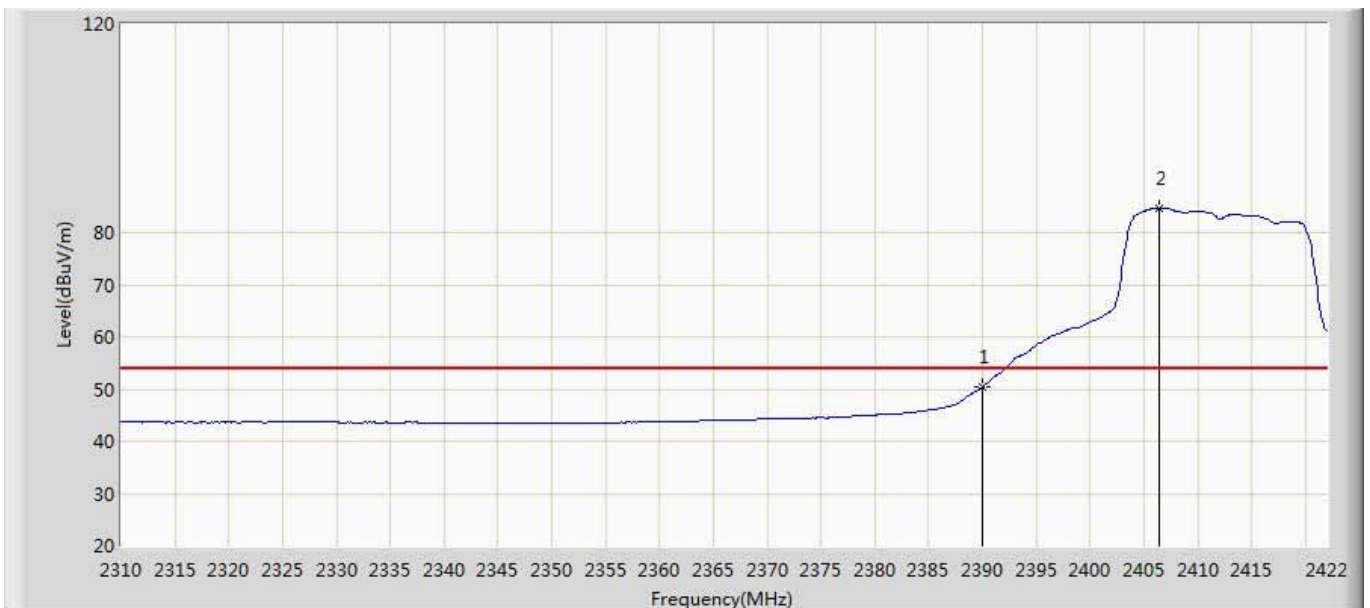


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	50.439	19.755	-3.561	54.000	30.684	AV
2		*	2406.432	84.595	53.941	N/A	N/A	30.654	AV

Engineer: Roy	
Site: AC1	Time: 2013/11/16 - 11:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Multi-Screen Interactive Device	Power: AC 120V/60Hz
Note: Mode 3:Transmit at Channel 2462MHz by 802.11n(20MHz)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2458.768	91.297	60.690	N/A	N/A	30.606	PK
2			2483.500	62.352	31.679	-11.648	74.000	30.673	PK

Engineer: Roy	
Site: AC1	Time: 2013/11/16 - 11:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Multi-Screen Interactive Device	Power: AC 120V/60Hz
Note: Mode 3:Transmit at Channel 2462MHz by 802.11n(20MHz)	

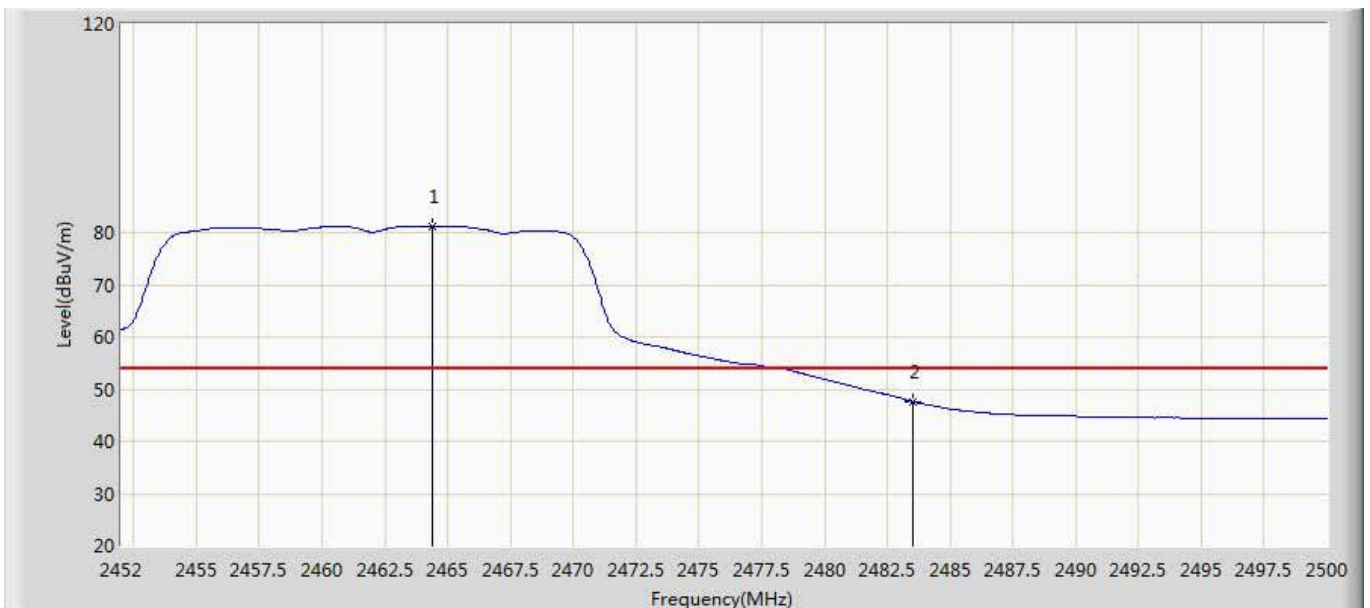


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2464.384	81.122	50.505	N/A	N/A	30.617	AV
2			2483.500	47.603	16.930	-6.397	54.000	30.673	AV

Engineer: Roy	
Site: AC1	Time: 2013/11/16 - 11:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Multi-Screen Interactive Device	Power: AC 120V/60Hz
Note: Mode 3:Transmit at Channel 2462MHz by 802.11n(20MHz)	

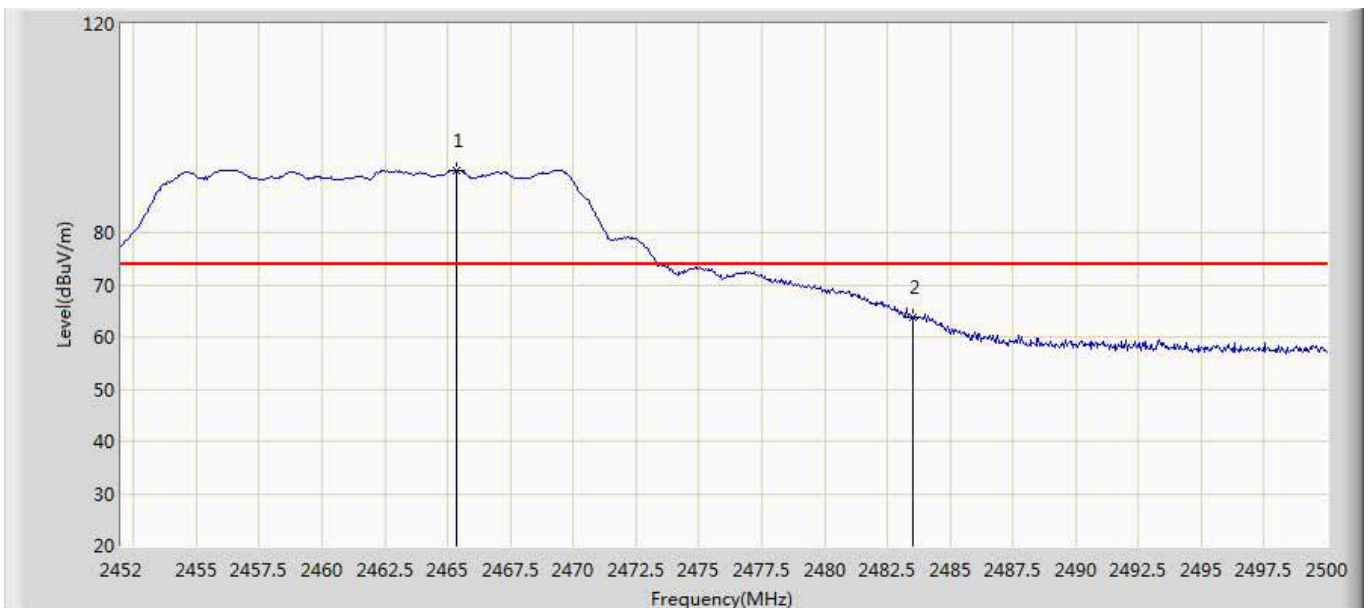


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2465.344	91.957	61.337	N/A	N/A	30.620	PK
2			2483.500	63.663	32.990	-10.337	74.000	30.673	PK

Engineer: Roy	
Site: AC1	Time: 2013/11/16 - 11:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Multi-Screen Interactive Device	Power: AC 120V/60Hz
Note: Mode 3:Transmit at Channel 2462MHz by 802.11n(20MHz)	

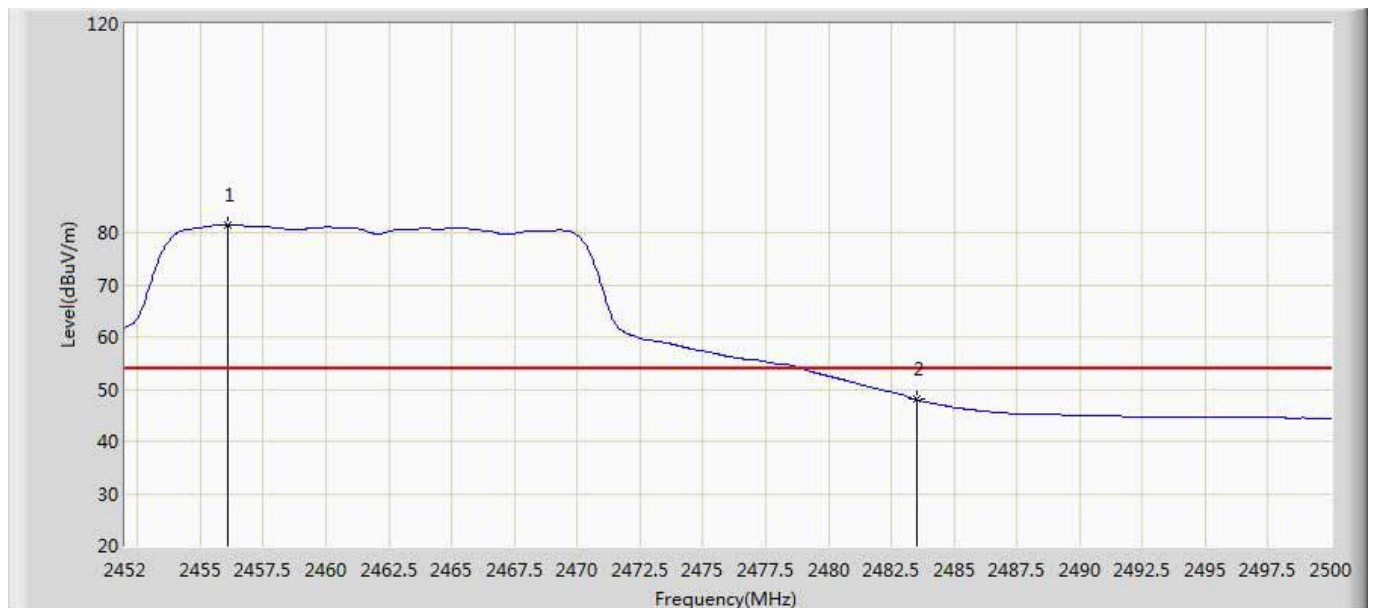


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2456.080	81.453	50.850	N/A	N/A	30.603	AV
2			2483.500	48.004	17.331	-5.996	54.000	30.673	AV

Engineer: Roy	
Site: AC1	Time: 2013/11/16 - 11:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Multi-Screen Interactive Device	Power: AC 120V/60Hz
Note: Mode 4:Transmit at Channel 2422MHz by 802.11n(40MHz)	

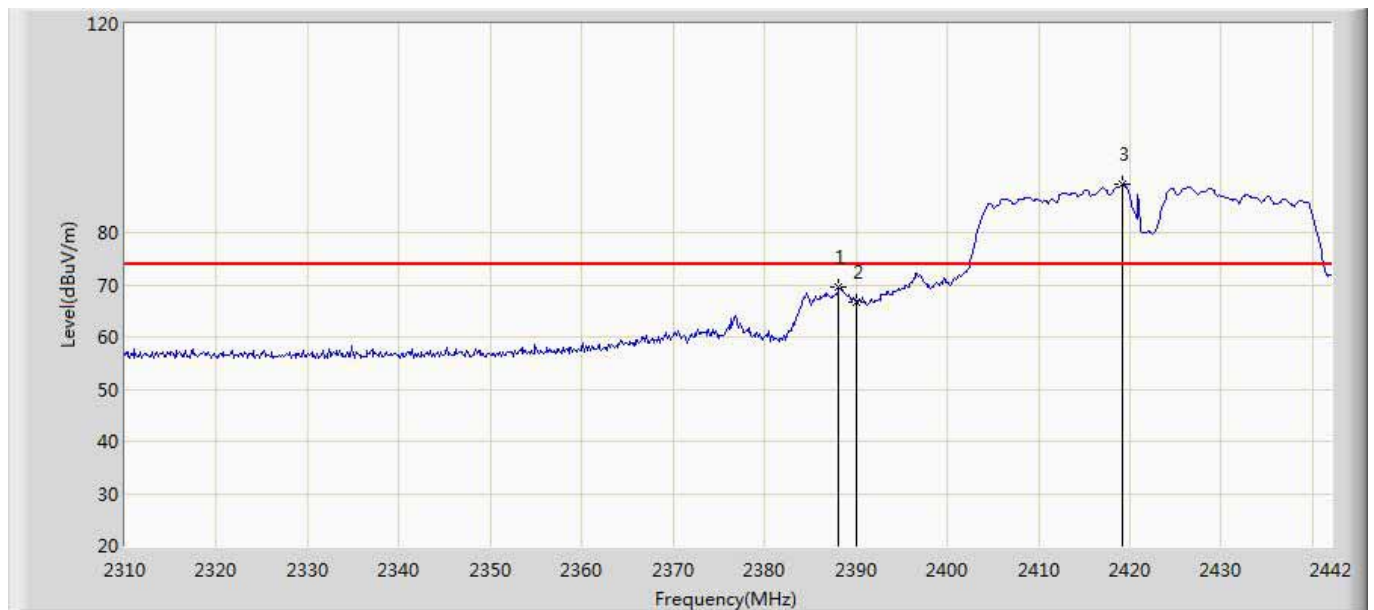


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2388.144	69.583	38.895	-4.417	74.000	30.688	PK
2			2390.000	66.758	36.074	-7.242	74.000	30.684	PK
3		*	2419.164	89.207	58.573	N/A	N/A	30.634	PK

Engineer: Roy	
Site: AC1	Time: 2013/11/16 - 11:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Multi-Screen Interactive Device	Power: AC 120V/60Hz
Note: Mode 4:Transmit at Channel 2422MHz by 802.11n(40MHz)	

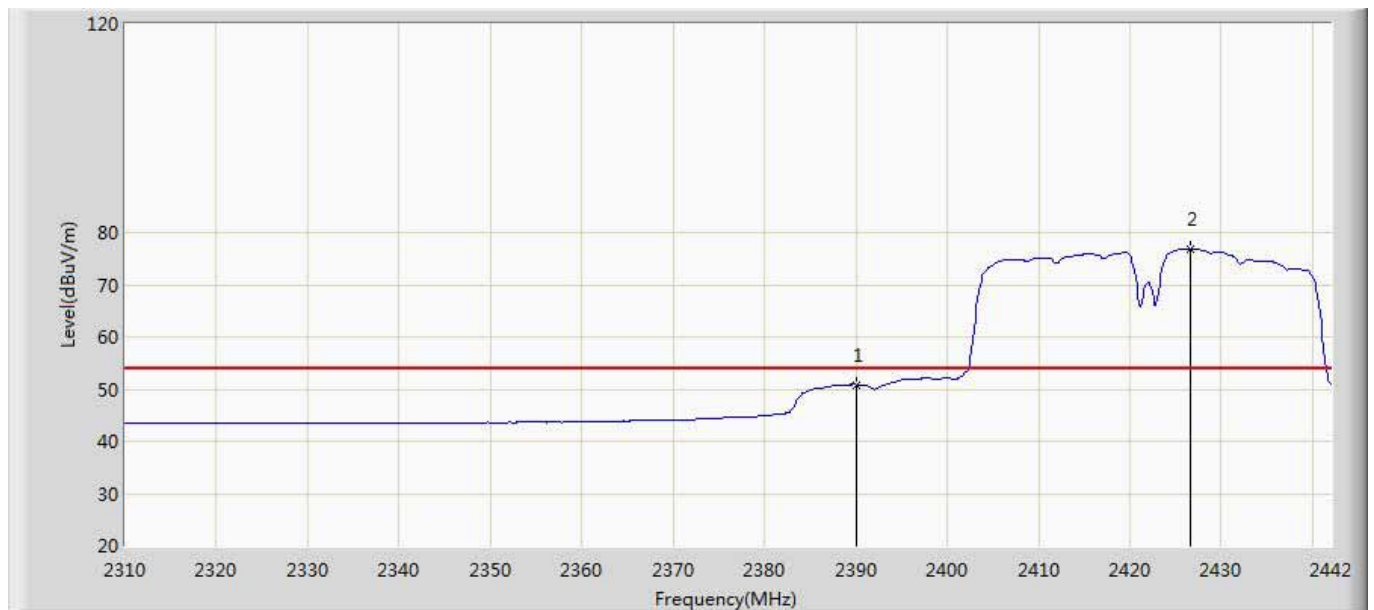


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	50.827	20.143	-3.173	54.000	30.684	AV
2		*	2426.556	76.859	46.237	N/A	N/A	30.622	AV

Engineer: Roy	
Site: AC1	Time: 2013/11/16 - 11:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Multi-Screen Interactive Device	Power: AC 120V/60Hz
Note: Mode 4:Transmit at Channel 2422MHz by 802.11n(40MHz)	

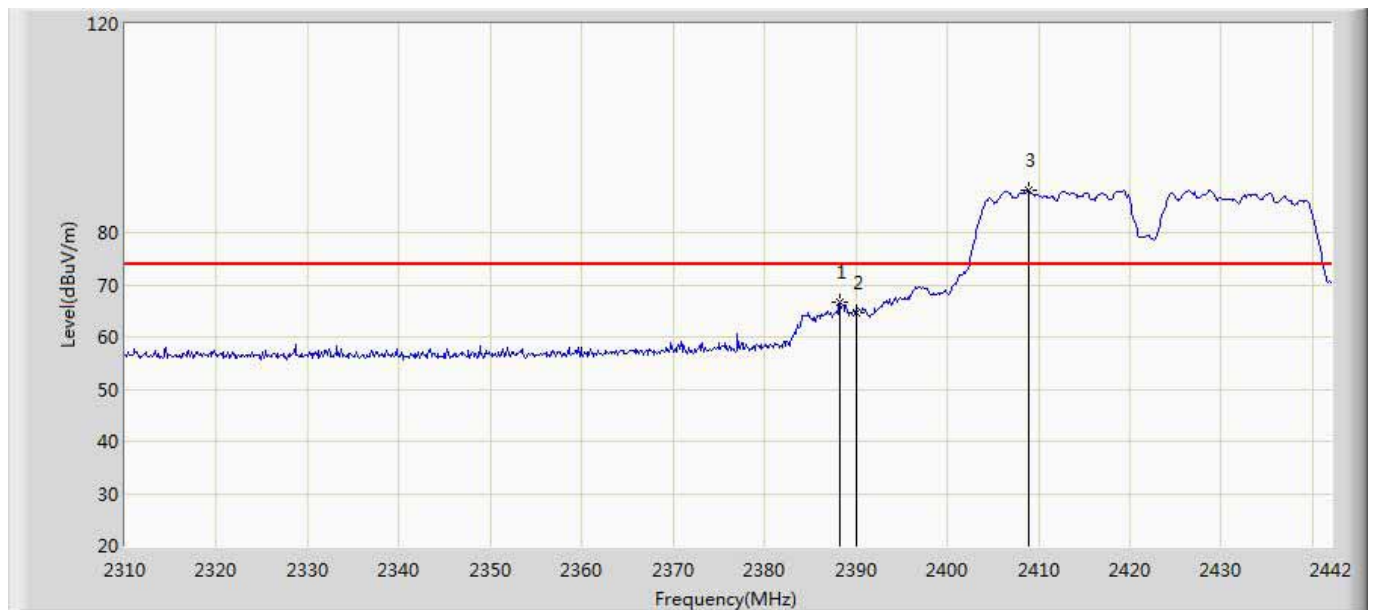


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2388.276	66.653	35.965	-7.347	74.000	30.687	PK
2			2390.000	64.705	34.021	-9.295	74.000	30.684	PK
3		*	2408.868	88.061	57.411	N/A	N/A	30.650	PK

Engineer: Roy	
Site: AC1	Time: 2013/11/16 - 11:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Multi-Screen Interactive Device	Power: AC 120V/60Hz
Note: Mode 4:Transmit at Channel 2422MHz by 802.11n(40MHz)	

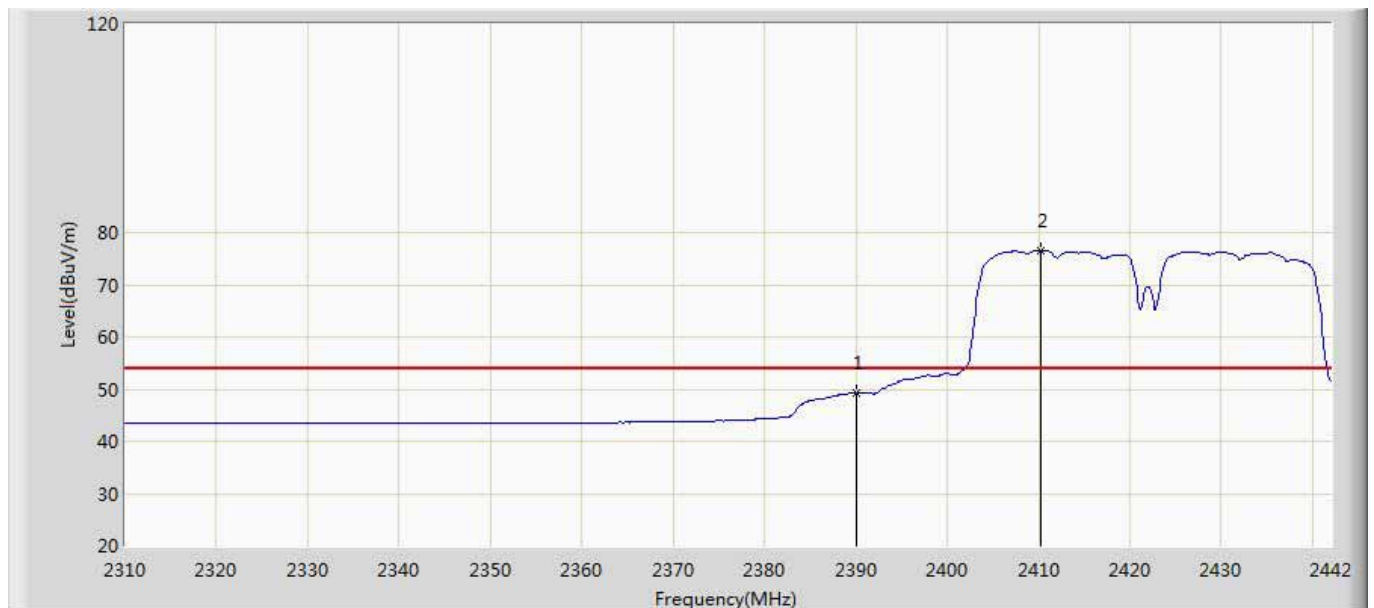


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	49.281	18.597	-4.719	54.000	30.684	AV
2		*	2410.320	76.575	45.928	N/A	N/A	30.647	AV

Engineer: Roy	
Site: AC1	Time: 2013/11/16 - 11:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Multi-Screen Interactive Device	Power: AC 120V/60Hz
Note: Mode 4:Transmit at Channel 2462MHz by 802.11n(40MHz)	

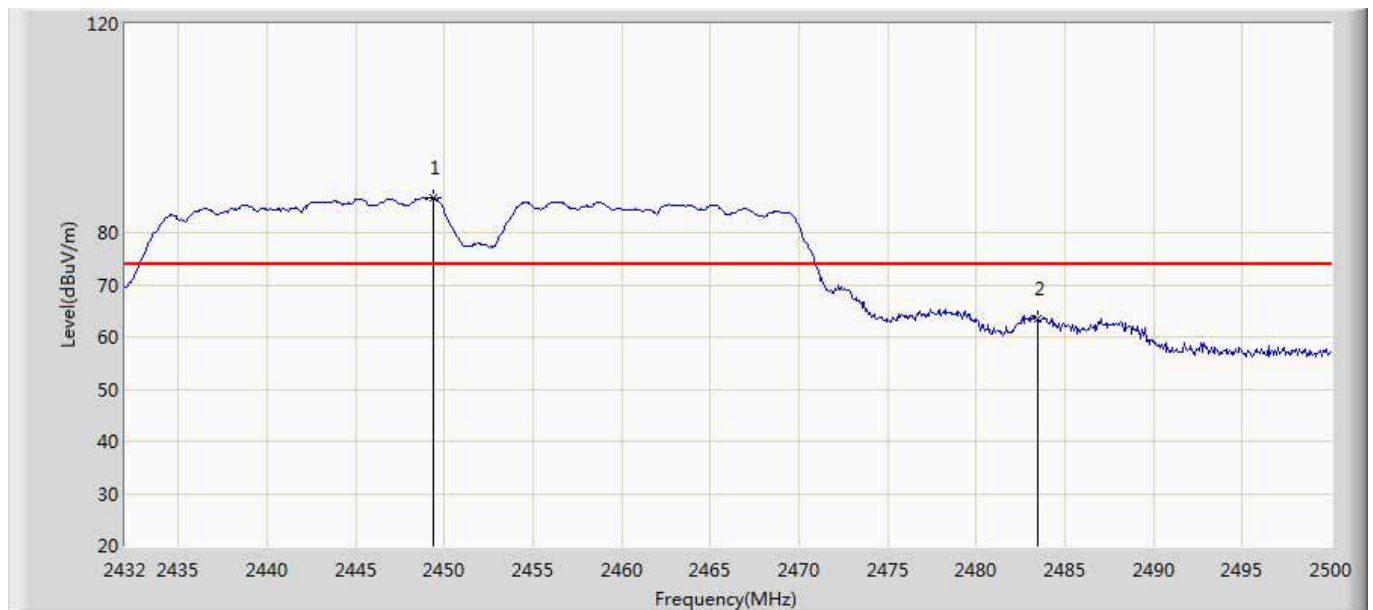


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2449.408	86.670	56.077	N/A	N/A	30.593	PK
2			2483.500	63.342	32.669	-10.658	74.000	30.673	PK

Engineer: Roy	
Site: AC1	Time: 2013/11/16 - 11:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Multi-Screen Interactive Device	Power: AC 120V/60Hz
Note: Mode 4:Transmit at Channel 2462MHz by 802.11n(40MHz)	

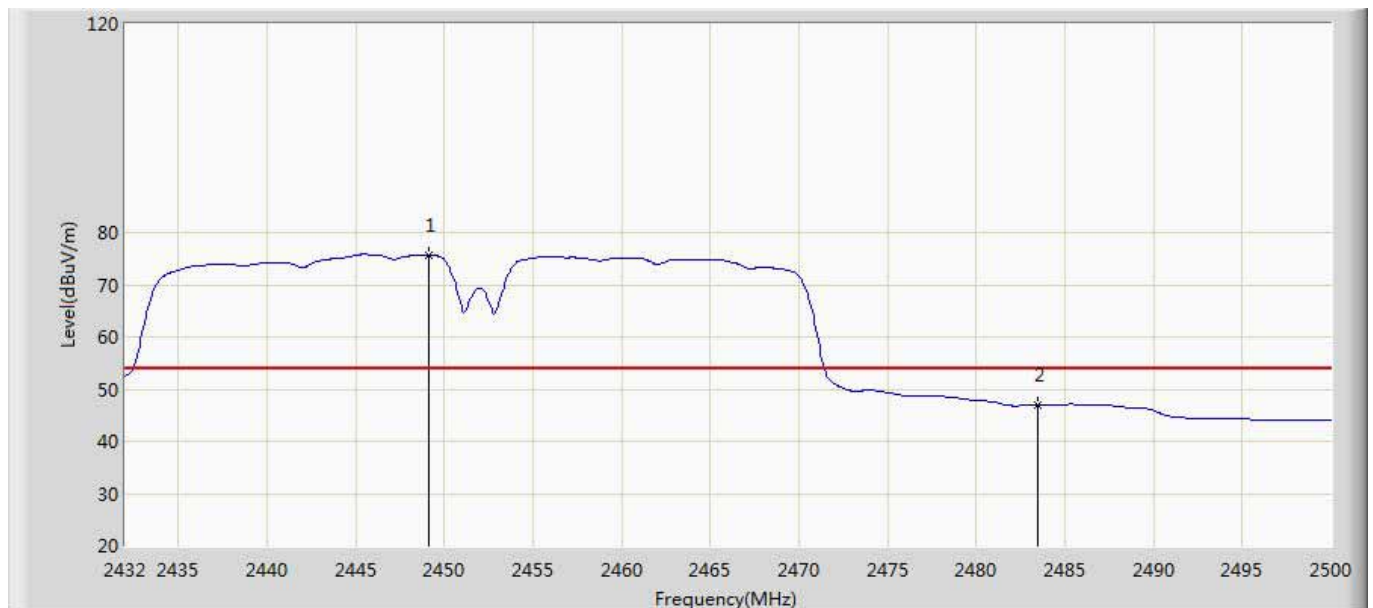

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2449.136	75.629	45.037	N/A	N/A	30.592	AV
2			2483.500	47.050	16.377	-6.950	54.000	30.673	AV

Engineer: Roy	
Site: AC1	Time: 2013/11/16 - 11:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Multi-Screen Interactive Device	Power: AC 120V/60Hz
Note: Mode 4:Transmit at Channel 2462MHz by 802.11n(40MHz)	

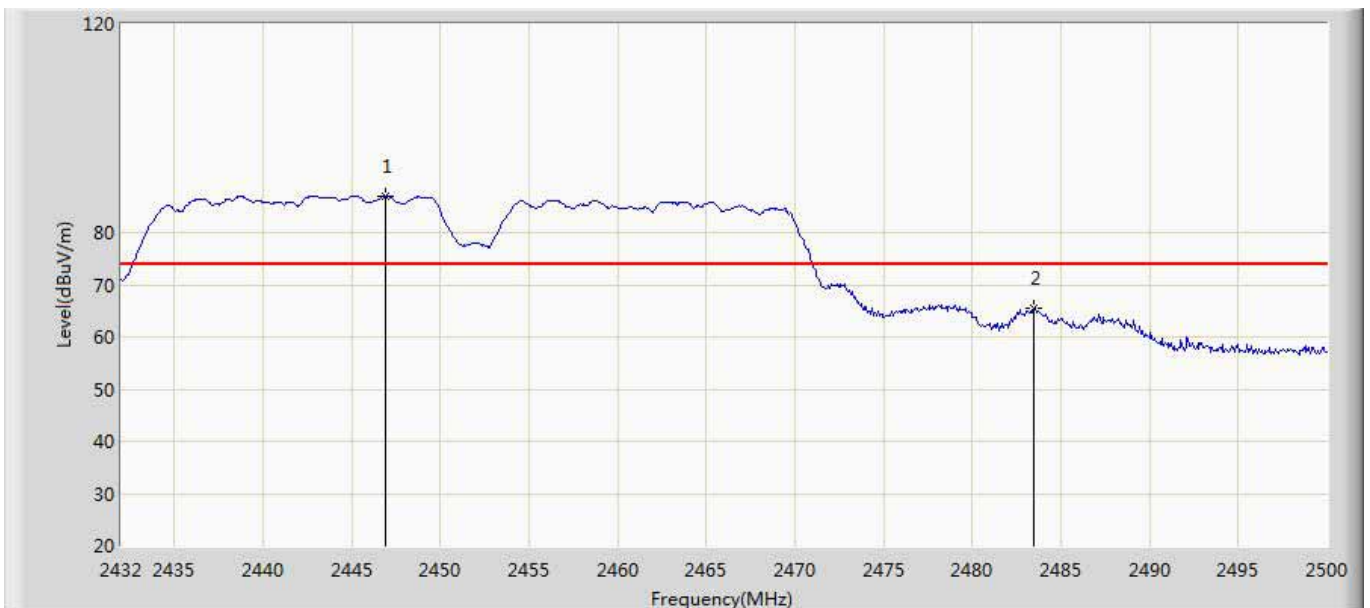

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2446.892	86.989	56.400	N/A	N/A	30.589	PK
2			2483.500	65.606	34.933	-8.394	74.000	30.673	PK

Engineer: Roy	
Site: AC1	Time: 2013/11/16 - 11:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Multi-Screen Interactive Device	Power: AC 120V/60Hz
Note: Mode 4:Transmit at Channel 2462MHz by 802.11n(40MHz)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2445.192	76.078	45.489	N/A	N/A	30.589	AV
2			2483.500	47.028	16.355	-6.972	54.000	30.673	AV

7. Operation Frequency Range of 20dB Bandwidth

7.1. Limit

20 dB bandwidth of the emission is contained within the operation frequency band.

7.2. Test Setup

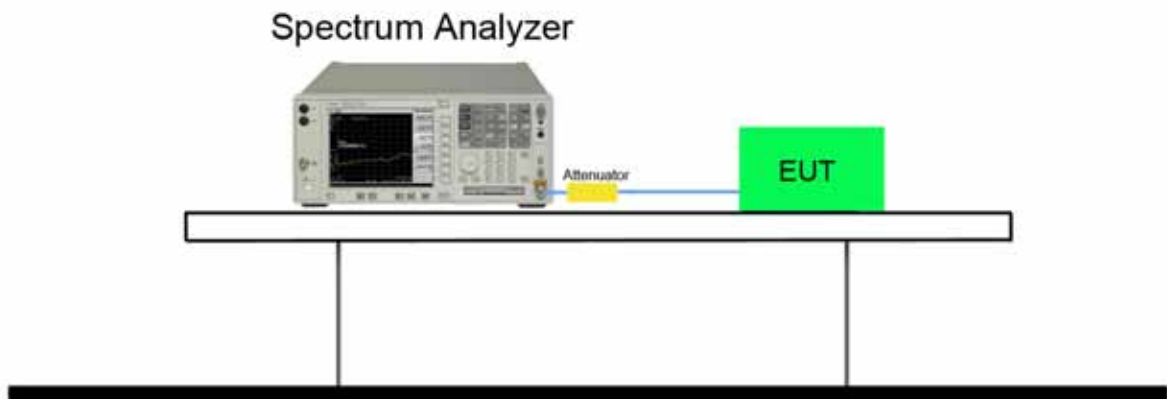

7.3. Test Procedure

The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Span greater than RBW.

7.4. Test Result

Product	:	Multi-Screen Interactive Device
Test Item	:	Operation Frequency Range of 20dB Bandwidth
Test Site	:	TR3
Test Mode	:	Mode 1: Transmit by 802.11b

Channel 01 (2412MHz)



Channel 11 (2462MHz)



Product	:	Multi-Screen Interactive Device
Test Item	:	Operation Frequency Range of 20dB Bandwidth
Test Site	:	TR3
Test Mode	:	Mode 2: Transmit by 802.11g

Channel 01 (2412MHz)



Channel 11 (2462MHz)



Product	:	Multi-Screen Interactive Device
Test Item	:	Operation Frequency Range of 20dB Bandwidth
Test Site	:	TR3
Test Mode	:	Mode 3: Transmit by 802.11n(20MHz)

Channel 01 (2412MHz)




Channel 11 (2462MHz)




Product	:	Multi-Screen Interactive Device
Test Item	:	Operation Frequency Range of 20dB Bandwidth
Test Site	:	TR3
Test Mode	:	Mode 4: Transmit by 802.11n(40MHz)

Channel 03 (2422MHz)

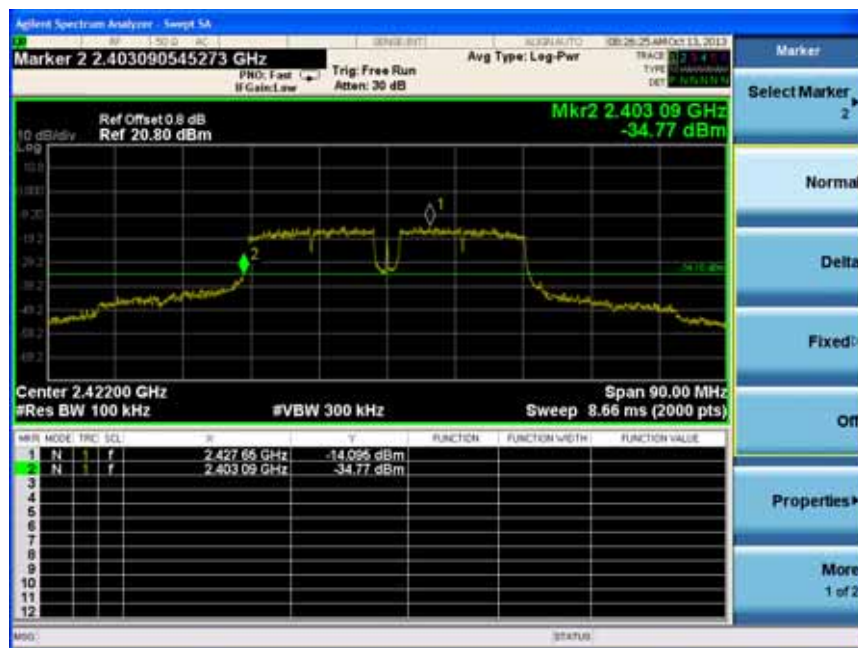

Channel 09 (2452MHz)

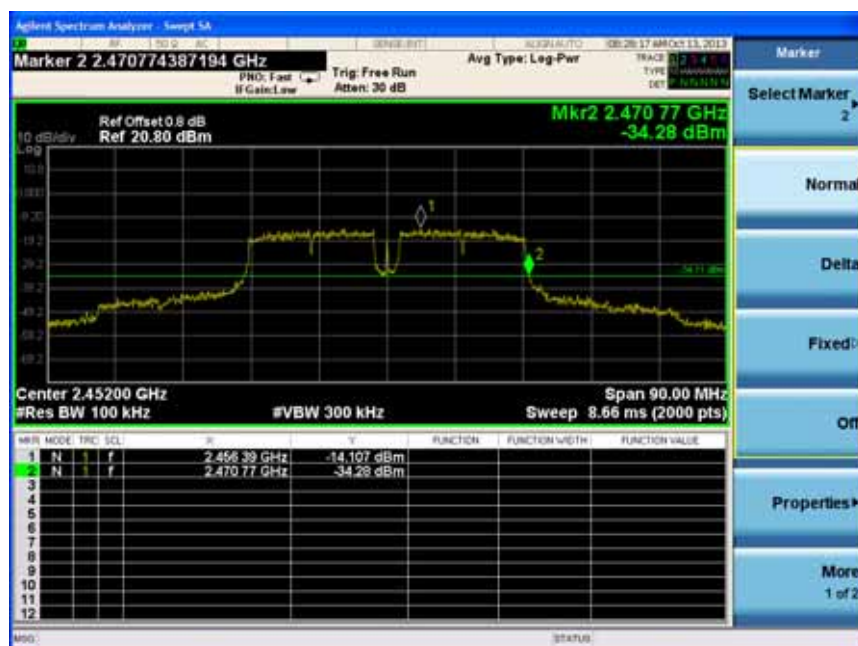


8. Occupied Bandwidth

8.1. Limit

The minimum 6dB bandwidth shall be at least 500 kHz.

8.2. Test Setup

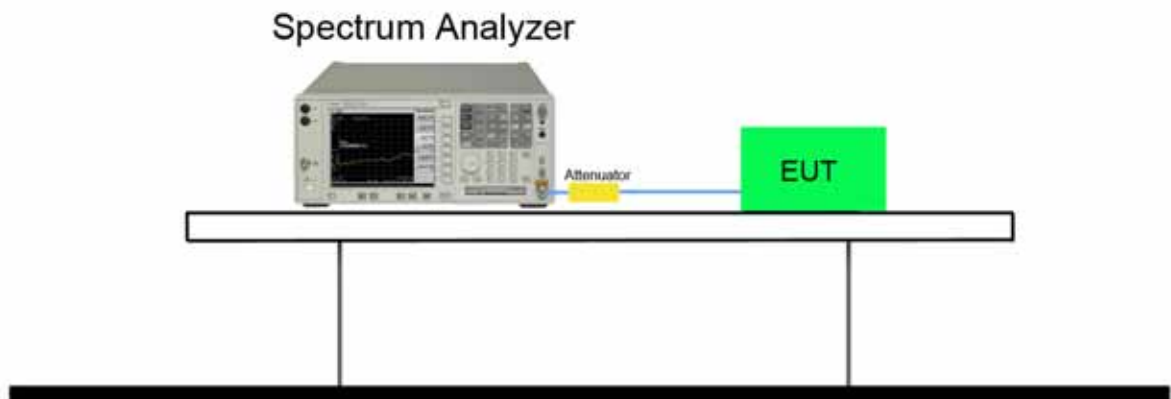

8.3. Test Procedure

The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

DTS bandwidth OPTION 2:

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW $\geq 3 * \text{RBW}$, peak detector with maximum hold) is implemented by the instrumentation function.

8.4. Test Result

Product	:	Multi-Screen Interactive Device
Test Item	:	6dB Occupied Bandwidth
Test Site	:	TR3
Test Mode	:	Mode 1: Transmit by 802.11b

Channel No.	Frequency (MHz)	Occupied Bandwidth (kHz)	Limit (kHz)	Result
01	2412	10105	≥500	Pass
06	2437	10230	≥500	Pass
11	2462	10105	≥500	Pass

Channel 01 (2412MHz)



Channel 06 (2437MHz)



Channel 11 (2462MHz)



Product	:	Multi-Screen Interactive Device
Test Item	:	6dB Occupied Bandwidth
Test Site	:	TR3
Test Mode	:	Mode 2: Transmit by 802.11g

Channel No.	Frequency (MHz)	Occupied Bandwidth (kHz)	Limit (kHz)	Result
01	2412	16533	≥500	Pass
06	2437	16558	≥500	Pass
11	2462	16558	≥500	Pass

Channel 01 (2412MHz)



Channel 06 (2437MHz)



Channel 11 (2462MHz)



Product	:	Multi-Screen Interactive Device
Test Item	:	6dB Occupied Bandwidth
Test Site	:	TR3
Test Mode	:	Mode 3: Transmit by 802.11n(20MHz)

Channel No.	Frequency (MHz)	Occupied Bandwidth (kHz)	Limit (kHz)	Result
01	2412	16533	≥500	Pass
06	2437	16533	≥500	Pass
11	2462	16533	≥500	Pass

Channel 01 (2412MHz)



Channel 06 (2437MHz)




Channel 11 (2462MHz)




Product	:	Multi-Screen Interactive Device
Test Item	:	6dB Occupied Bandwidth
Test Site	:	TR3
Test Mode	:	Mode 4: Transmit by 802.11n(40MHz)

Channel No.	Frequency (MHz)	Occupied Bandwidth (kHz)	Limit (kHz)	Result
03	2422	36470.0	≥500	Pass
06	2437	36560.0	≥500	Pass
09	2452	36470.0	≥500	Pass


Channel 03 (2422MHz)

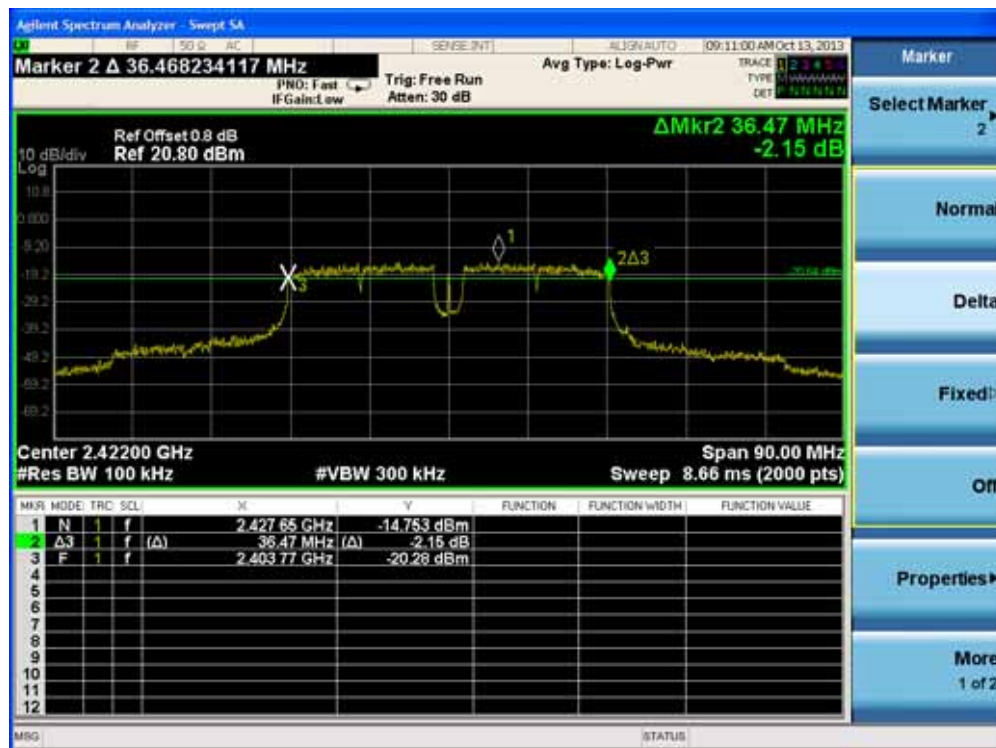

Channel 06 (2437MHz)

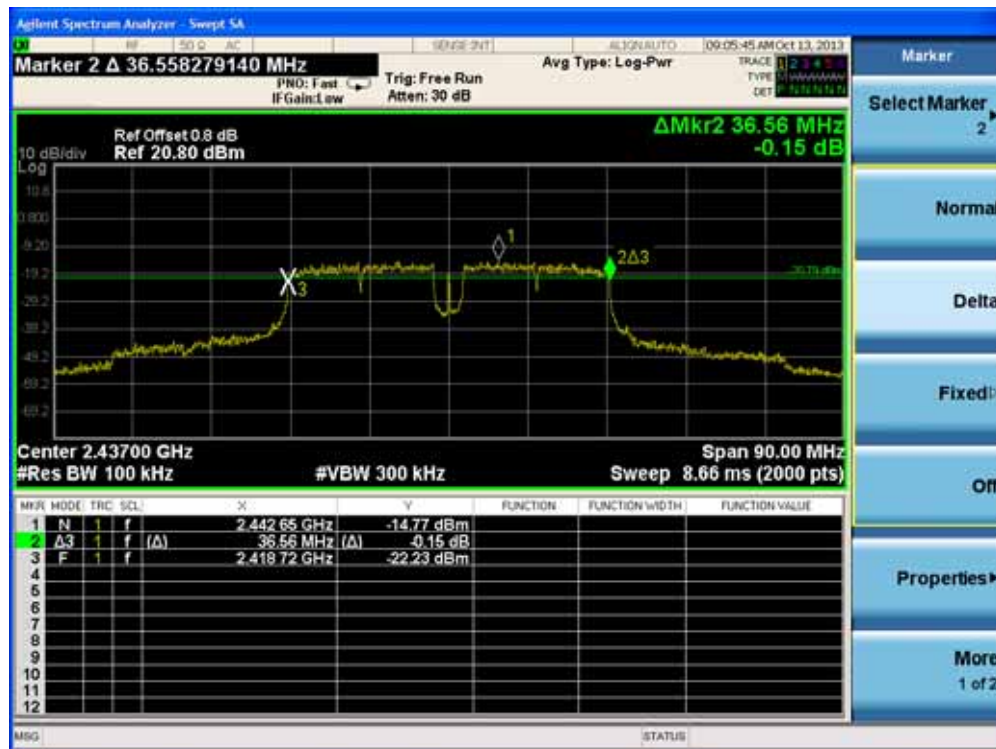

Channel 09 (2452MHz)

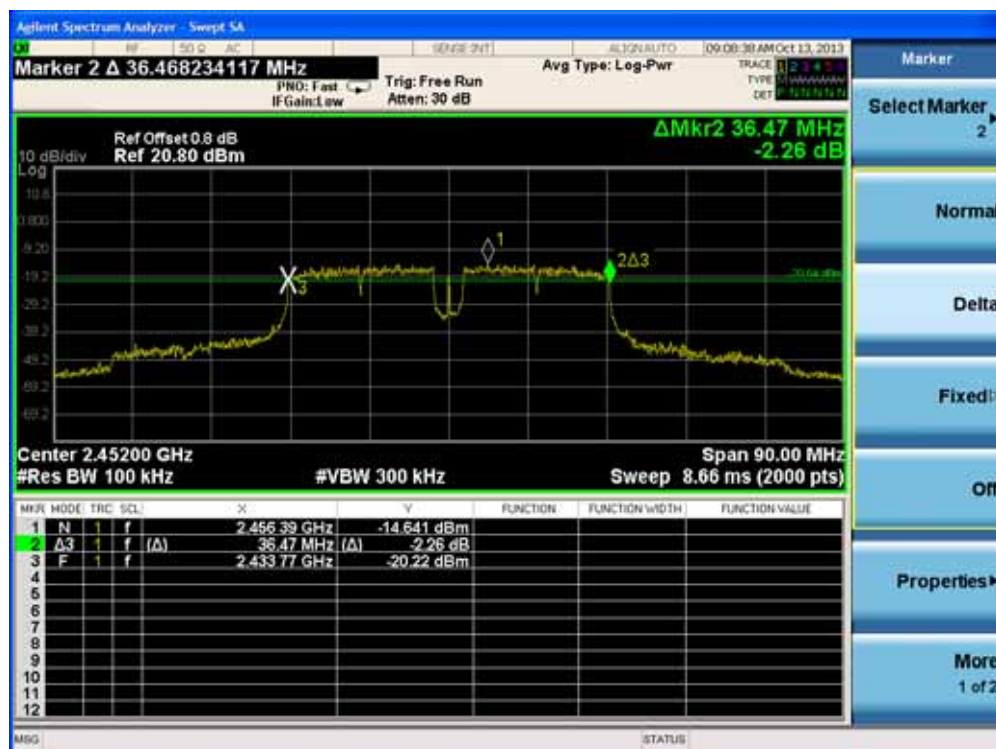


9. Power Output

9.1. Limit

The maximum peak power shall be less 1 Watt (30dBm).

Note: the conducted output power limit specified above is based on the use the antennas with directional gains that do not exceed 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values above, as appropriate, by the amount in dB that the directional gain of antenna exceeds 6 dBi.

9.2. Test Setup

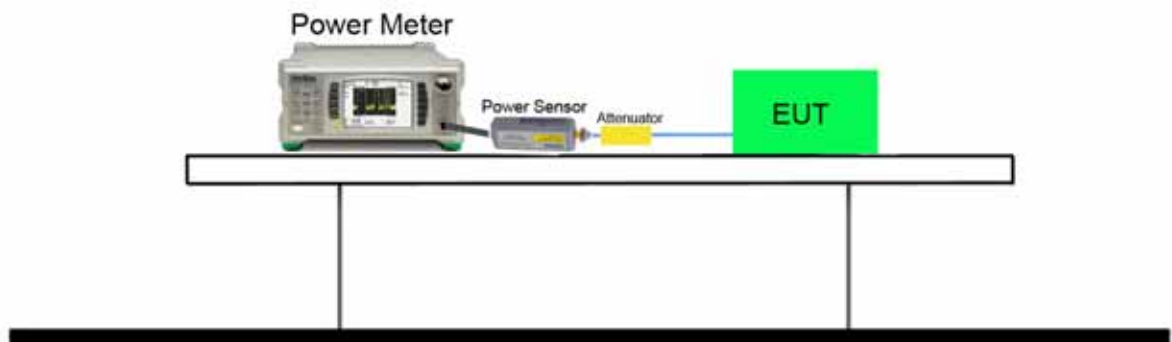

9.3. Test Procedure

The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

Use the broadband peak RF power meter to test peak power and record the result.

9.4. Test Result

Power output test was verified over all data rates of each mode shown as below, and then choose the maximum power output (blue marker) for final test of each channel.

MCS Index for 802.11n	Spatial Streams	Data Rate (Mbps)					
		802.11b	802.11g	20MHz Bandwidth		40MHz Bandwidth	
				800ns GI	400ns GI	800ns GI	400ns GI
0	1	1	6	6.5	7.2	13.5	15.0
1	1	2	9	13.0	14.4	27.0	30.0
2	1	5.5	12	19.5	21.7	40.5	45.0
3	1	11	18	26.0	28.9	54.0	60.0
4	1	---	24	39.0	43.3	81.0	90.0
5	1	---	36	52.0	57.8	108.0	120.0
6	1	---	48	58.5	65.0	121.5	135.0
7	1	---	54	65.0	72.2	135.0	150.0

Power output at various data rates:

Test Mode	Bandwidth	Frequency (MHz)	Channel	Data Rate	Peak Power (dBm)
802.11b	20	2437	6	1	9.17
				5.5	8.92
				11	8.96
802.11g	20	2437	6	6	8.97
				24	8.42
				54	8.85
802.11n	20	2437	6	MCS0	9.12
				MCS4	9.05
				MCS7	8.96
802.11n	40	2437	6	MCS0	9.56
				MCS4	8.98
				MCS7	9.41

Product	:	Multi-Screen Interactive Device
Test Item	:	Power Output
Test Site	:	TR3
Test Mode	:	Mode 1: Transmit by 802.11b

Channel No.	Frequency (MHz)	Peak Power Output (dBm)	Limit (dBm)	Result
1	2412	8.63	30.00	Pass
6	2437	9.17	30.00	Pass
11	2462	8.86	30.00	Pass

Product	:	Multi-Screen Interactive Device
Test Item	:	Power Output
Test Site	:	TR3
Test Mode	:	Mode 2: Transmit by 802.11g

Channel No.	Frequency (MHz)	Peak Power Output (dBm)	Limit (dBm)	Result
1	2412	8.36	30.00	Pass
6	2437	8.97	30.00	Pass
11	2462	8.43	30.00	Pass

Product	:	Multi-Screen Interactive Device
Test Item	:	Power Output
Test Site	:	TR3
Test Mode	:	Mode 3: Transmit by 802.11n(20MHz)

Channel No.	Frequency (MHz)	Peak Power Output (dBm)	Limit (dBm)	Result
1	2412	8.98	30.00	Pass
6	2437	9.12	30.00	Pass
11	2462	9.04	30.00	Pass

Product	:	Multi-Screen Interactive Device
Test Item	:	Power Output
Test Site	:	TR3
Test Mode	:	Mode 4: Transmit by 802.11n(40MHz)


Channel No.	Frequency (MHz)	Peak Power Output (dBm)	Limit (dBm)	Result
3	2422	9.07	30.00	Pass
6	2437	9.56	30.00	Pass
9	2452	9.11	30.00	Pass

10. Power Spectral Density

10.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiated to the Antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

10.2. Test Setup

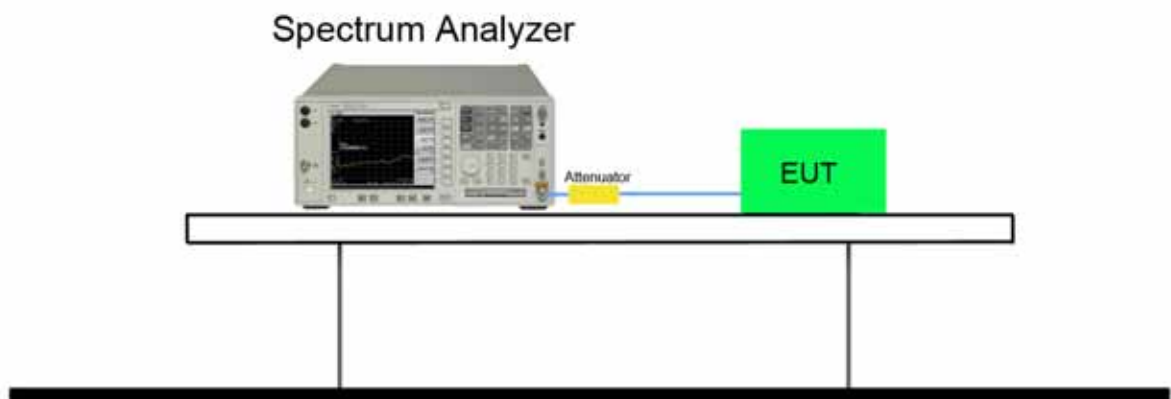

10.3. Test Procedure

The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

Set analyzer center frequency to DTS channel center frequency, the span to 1.5 times the DTS channel bandwidth, $RBW \geq 3 \text{ kHz}$, Set $VBW \geq 3 * RBW$, Sweep time = auto couple, Detector = peak, Trace mode = max hold, Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level. If measured value exceed limit reduce RBW (no less than 3kHz) and repeat.

10.4. Test Result

Product	:	Multi-Screen Interactive Device
Test Item	:	Power Spectral Density
Test Site	:	TR3
Test Mode	:	Mode 1: Transmit by 802.11b

Channel No.	Frequency (MHz)	Measurement PSD (dBm)	Limit (dBm)	Result
01	2412	-7.03	8	Pass
06	2437	-6.99	8	Pass
11	2462	-6.96	8	Pass

Channel 01 (2412MHz)



Channel 06 (2437MHz)




Channel 11 (2462MHz)



Product	:	Multi-Screen Interactive Device
Test Item	:	Power Spectral Density
Test Site	:	TR3
Test Mode	:	Mode 2: Transmit by 802.11g

Channel No.	Frequency (MHz)	Measurement PSD (dBm)	Limit (dBm)	Result
01	2412	-9.10	8	Pass
06	2437	-9.06	8	Pass
11	2462	-9.00	8	Pass

Channel 01 (2412MHz)

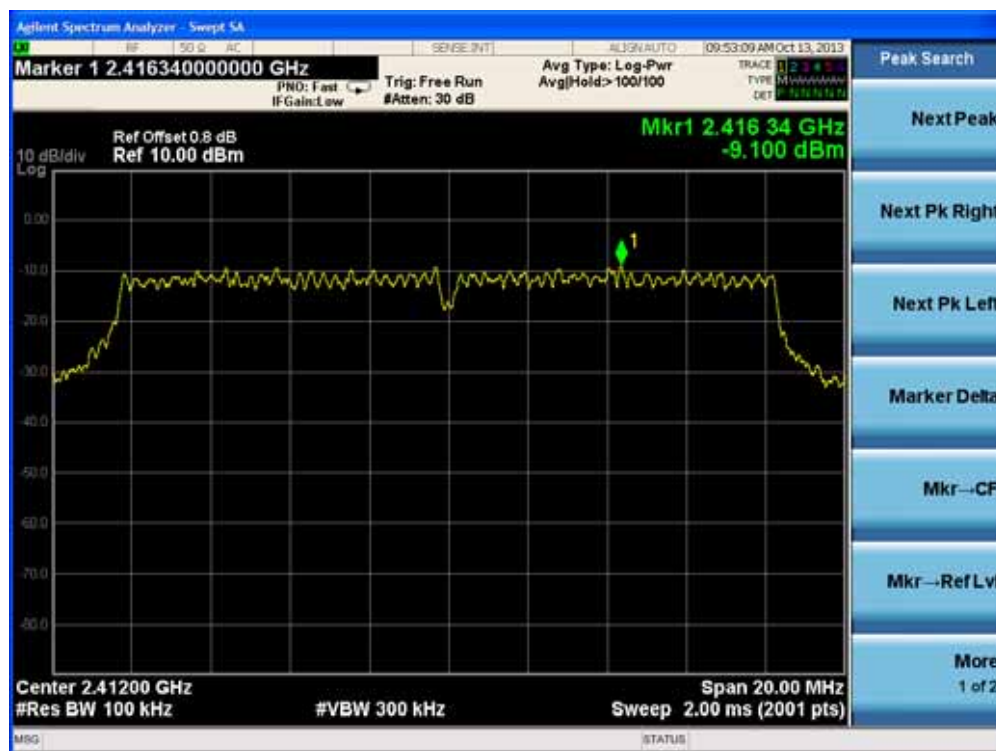

Channel 06 (2437MHz)




Channel 11 (2462MHz)



Product	:	Multi-Screen Interactive Device
Test Item	:	Power Spectral Density
Test Site	:	TR3
Test Mode	:	Mode 3: Transmit by 802.11n(20MHz)

Channel No.	Frequency (MHz)	Measurement PSD (dBm)	Limit (dBm)	Result
01	2412	-8.31	8	Pass
06	2437	-8.25	8	Pass
11	2462	-8.16	8	Pass

Channel 01 (2412MHz)

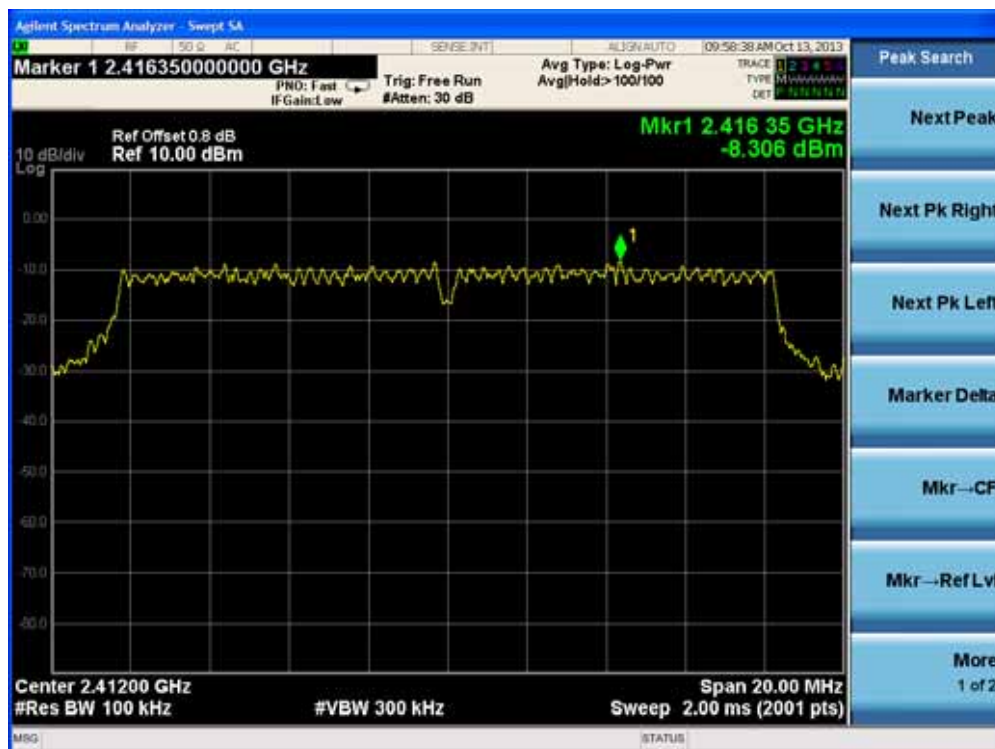

Channel 06 (2437MHz)



Channel 11 (2462MHz)



Product	:	Multi-Screen Interactive Device
Test Item	:	Power Spectral Density
Test Site	:	TR3
Test Mode	:	Mode 4: Transmit by 802.11n(40MHz)

Channel No.	Frequency (MHz)	Measurement PSD (dBm)	Limit (dBm)	Result
03	2422	-14.96	8	Pass
06	2437	-14.97	8	Pass
09	2452	-14.91	8	Pass


Channel 03 (2422MHz)



Channel 06 (2437MHz)



Channel 09 (2452MHz)

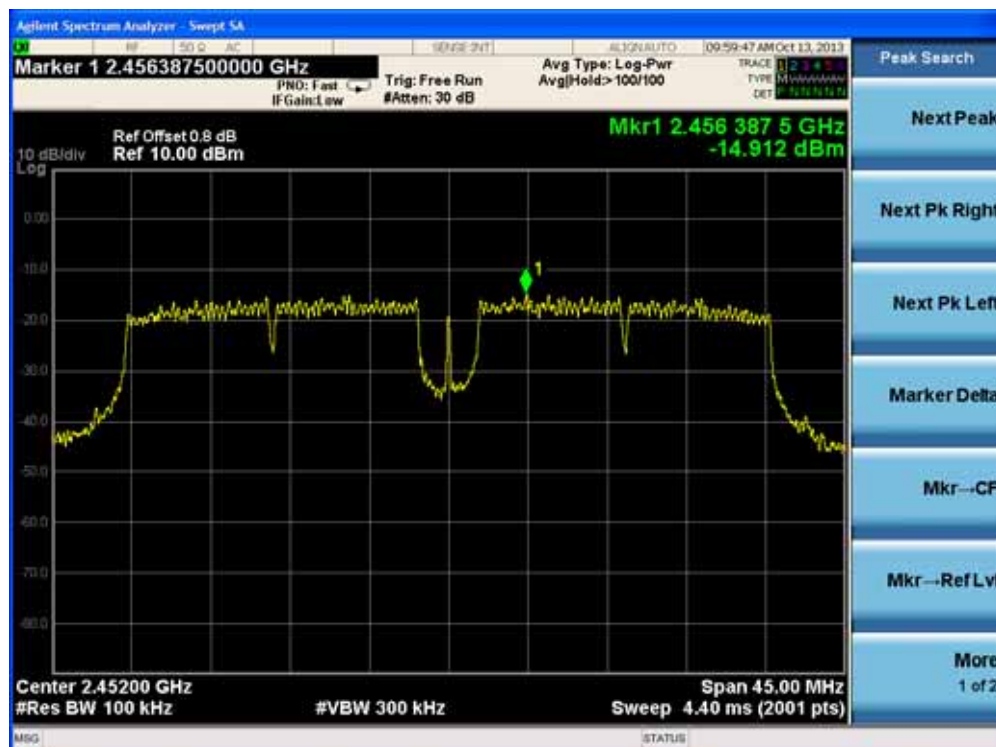

11. Measurement Uncertainty

Conducted Emission
The maximum measurement uncertainty is defined as: 9kHz~30MHz: $\pm 2.02\text{dB}$
Radiated disturbance
The maximum measurement uncertainty is defined as: Below 1GHz: $\pm 3.8\text{dB}$ Above 1GHz: $\pm 3.9\text{dB}$
RF Antenna Conducted Spurious
The maximum measurement uncertainty is defined as: $\pm 1.27\text{ dB}$.
Radiated Emission Band Edge
The maximum measurement uncertainty is defined as: Above 1GHz: $\pm 3.9\text{dB}$
Operation Frequency Range of 20dB Bandwidth
The maximum measurement uncertainty is defined as: $\pm 1\text{ kHz}$.
Occupied Bandwidth
The maximum measurement uncertainty is defined as: $\pm 1\text{ kHz}$.
Power Output
The maximum measurement uncertainty is evaluated as $\pm 1.27\text{ dB}$.
Power Spectral Density
The maximum measurement uncertainty is evaluated as $\pm 1.27\text{ dB}$.

12. List of Measuring Instrument

Conducted Emission

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	101209	1 year	2014/07/17
Two-Line V-Network	R&S	ENV216	101683	1 year	2014/07/17
Two-Line V-Network	R&S	ENV216	101684	1 year	2014/07/17
Temperature/ Meter Humidity	Anymetre	TH101B	SR2-01	1 year	2014/08/15

Radiated Emission

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cal. Date
Spectrum Analyzer	Agilent	N9038A	MY51210155	1 year	2014/08/15
Preamplifier	MRT	AP01G18	1310002	1 year	2014/10/08
Preamplifier	MRT	AP18G40	1310003	1 year	2014/10/08
Loop Antenna	Schwarzbeck	FMZB1519	1519-041	2 years	2014/09/13
TRILOG Antenna	Schwarzbeck	VULB9162	9162-047	2 years	2014/09.13
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1167	2 years	2014/09/13
Broadband Horn Antenna	Schwarzbeck	BBHA9170	9170-549	2 years	2014/09/13
Temperature/Humidity Meter	Anymetre	TH101B	AC1-01	1 year	2014/08/15

Operation Frequency Range of 20dB Bandwidth

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cal. Date
Spectrum Analyzer	Agilent	N9010A	MY5144016A	1 year	2014/08/15
Temperature/Humidity Meter	Anymetre	TH101B	TR3-01	1 year	2014/08/15

Occupied Channel Bandwidth

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Agilent	N9010A	MY5144016A	1 year	2014/08/15
Temperature/Humidity Meter	Anymetre	TH101B	TR3-01	1 year	2014/08/15

Power Output

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cali. Due Date
Power Meter	Anritsu	ML2495A	0905006	1 year	2013/11/10
Power Sensor	Anritsu	MA2411B	0846014	1 year	2013/11/10
Temperature/Humidity Meter	Anymetre	TH101B	TR3-01	1 year	2014/08/15

Power Spectral Density

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cal. Date
Spectrum Analyzer	Agilent	N9010A	MY5144016A	1 year	2014/08/15
Temperature/Humidity Meter	Anymetre	TH101B	TR3-01	1 year	2014/08/15

The End
