

P/N S331AM-915

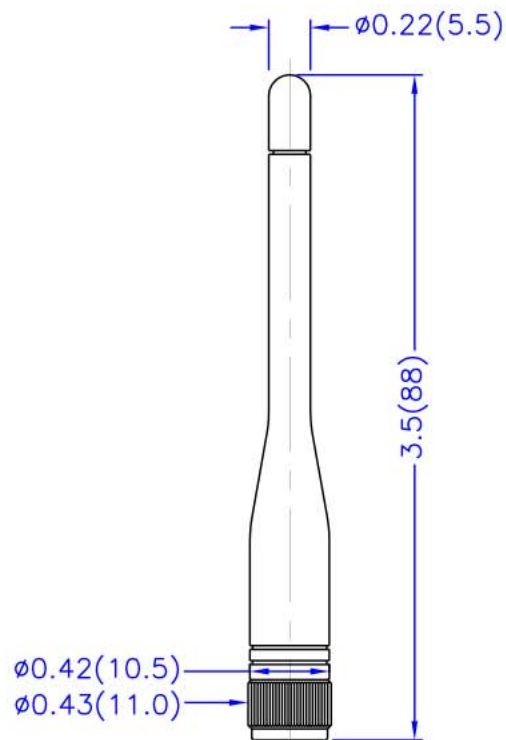
Alternative Connectors

.SMA Reverse Polarity Plug(female)

P/N: S331AH-915

.SMA Reverse Thread Plug(male)

P/N: S331AT-915

**Electrical Properties:**

Frequency Range: 902~928 MHz
Impedance: 50 Ω nominal
VSWR: <2.0:1
Gain: 1 dBi
Radiation: Omni
Polarization: Vertical
Wave: 1/4 wave

Mechanical Properties:

Connector: SMA Plug
Material: Polyurethane-BASF(Black)
Whip: Brass with Chrome Plating(Black)
Connector: -20°C to +65°C
Operation Temp.: -30°C to +75°C
Storage Temp.:

TOLERANCE		TITLE	900MHz ISM Band Antenna-331 Model		DATE	SHEET	
.X						1 OF 1	
.XX		UNIT	DWG. NO. S331AM-915			A4	
.XXX		in.(mm)					
ANGLE		SCALE	NEARSON				
		1 : 1					