

Appendix B - DAE & Probe Calibration Certificate

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'établissage
S Servizio svizzero di tutura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS).
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates.

Client: SGS
Taiyuan City

Accreditation No.: SCS 0106

Certificate No.: DAE4-1751_Mar24

CALIBRATION CERTIFICATE

Object: DAE4 - SD 000 D04 BP - SN: 1751

Calibration procedure(s): QA.CAL-06.v30
Calibration procedure for the data acquisition electronics (DAE)

Calibration date: March 13, 2024

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the above laboratory facility: environment temperature (22 ± 5)°C and humidity < 70%.

Calibration Equipment used (MATE critical for calibration):

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Kulthay Multimeter Type 2001	SN: 0810278	29-Aug-23 (No.37421)	Aug-24
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Auto DAE Calibration Unit Calibrator Box V2.1	SE UWS 053 AA 1001 SE UMS 006 AA 1002	23-Jan-24 (In house check) 23-Jan-24 (In house check)	In house check: Jan-25 In house check: Jan-25

Calibrated by:	Name: Dominique Steffen	Function: Laboratory Technician	Signature:
Approved by:	Name: Sven Kühn	Function: Technical Manager	Signature:

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Issued: March 13, 2024

Certificate No: DAE4-1751_Mar24

Page 1 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路134號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAB);
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates.

Glossary

DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- **DC Voltage Measurement:** Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- **Connector angle:** The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
- **DC Voltage Measurement Linearity:** Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
- **Common mode sensitivity:** Influence of a positive or negative common mode voltage on the differential measurement.
- **Channel separation:** Influence of a voltage on the neighbor channels not subject to an input voltage.
- **AD Converter Values with inputs shorted:** Values on the internal AD converter corresponding to zero input voltage
- **Input Offset Measurement:** Output voltage and statistical results over a large number of zero voltage measurements.
- **Input Offset Current:** Typical value for information; Maximum channel input offset current, not considering the input resistance.
- **Input resistance:** Typical value for information; DAE input resistance at the connector, during internal auto-zeroing and during measurement.
- **Low Battery Alarm Voltage:** Typical value for information. Below this voltage, a battery alarm signal is generated.
- **Power consumption:** Typical value for information. Supply currents in various operating modes.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

DC Voltage Measurement

A/D - Converter Resolution nominal
High Range: 1LSB = 6.1µV, full range = -100...+300 mV
Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	404.302 ± 0.02% (k=2)	404.262 ± 0.02% (k=2)	404.527 ± 0.02% (k=2)
Low Range	3.98545 ± 1.50% (k=2)	4.00007 ± 1.50% (k=2)	4.00689 ± 1.50% (k=2)

Connector Angle

Connector Angle to be used in DASY system	340.0 ° ± 1 °
---	---------------

Appendix (Additional assessments outside the scope of SCS0108)

1. DC Voltage Linearity

High Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	200004.24	2.04	-0.00
Channel X + Input	20012.21	2.36	-0.01
Channel X - Input	-18891.98	2.30	-0.01
Channel Y + Input	200003.93	1.59	-0.00
Channel Y + Input	20008.65	-1.27	-0.01
Channel Y - Input	-19993.86	0.47	-0.00
Channel Z + Input	200002.71	0.78	-0.00
Channel Z + Input	20008.16	-3.77	-0.02
Channel Z - Input	-19994.28	0.07	-0.00

Low Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	2008.98	1.17	-0.06
Channel X + Input	-208.49	-0.63	-0.30
Channel X - Input	-190.51	0.27	-0.14
Channel Y + Input	2009.15	0.31	-0.02
Channel Y + Input	-208.94	-0.18	-0.08
Channel Y - Input	-191.11	-0.35	0.18
Channel Z + Input	2008.91	0.14	-0.01
Channel Z + Input	-208.43	-0.60	-0.29
Channel Z - Input	-192.33	-1.42	0.74

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (µV)	Low Range Average Reading (µV)
Channel X	200	9.27	7.52
	-200	-7.71	-8.70
Channel Y	200	12.87	12.77
	-200	-14.29	-14.57
Channel Z	200	3.15	3.40
	-200	-5.72	-5.94

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (µV)	Channel Y (µV)	Channel Z (µV)
Channel X	200	-	1.78	-3.95
Channel Y	200	6.24	-	2.54
Channel Z	200	7.70	4.26	-

Certificate No: DAE4-1751_Mar24

Page 4 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wukou District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路134號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	15782	13277
Channel Y	16207	15182
Channel Z	16262	14305

5. Input Offset MeasurementDASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec
Input 10MΩ

	Average (µV)	min. Offset (µV)	max. Offset (µV)	Std. Deviation (µV)
Channel X	0.39	-1.17	2.70	0.53
Channel Y	-0.25	-1.19	0.54	0.33
Channel Z	-0.57	-1.68	0.44	0.38

6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25nA

7. Input Resistance (Typical values for information)

	Zerding (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.5
Supply (- Vcc)	-7.5

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+5	+14
Supply (- Vcc)	-0.01	-8	-9

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zauggenstrasse 43, 8034 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'établissement
S Servizio svizzero di tam tam
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS).
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates.

Accreditation No.: SCS 0108

Client SGS
Taoyuan City

Certificate No. EX-7823_Jul24

CALIBRATION CERTIFICATE

Object: EX3DV4 - SN:7823

Calibration procedure(s): QA CAL-01.v10, QA CAL-12.v10, QA CAL-14.v7, QA CAL-23.v6,
QA CAL-25.v8
Calibration procedure for dosimetric E-field probes

Calibration date: July 31, 2024

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.
All calibrations have been conducted in the closed laboratory facility; environment: temperature (22±3)°C and humidity < 70%.
Calibration Equipment used (M&TE critical for calibration):

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP3	SN: 104778	26-Mar-24 (No. 217-04208-04/21)	Mar-25
Power sensor NRP 291	SN: 103264	26-Mar-24 (No. 217-04208)	Mar-25
OCP DAK-3.5 (swissgrid)	SN: 1249	05-Oct-23 (OCP-DAK3.5-1249_Oct23)	Oct-24
OCP DAK-12	SN: 1016	05-Oct-23 (OCP-DAK12-1016_Oct23)	Oct-24
Reference 20 dB Attenuator	SN: CC2552 (351x)	26-Mar-24 (No. 217-04208)	Mar-25
DAS4	SN: 660	23-Feb-24 (No. DAEL-660_Feb24)	Feb-25
Reference Probe EX3DV4	SN: 7349	03-Jun-24 (No. EX3-7349_Jun24)	Jun-25

Secondary Standards	ID	Check Date (In house)	Scheduled Check
Power meter E4419B	SN: CB41203687	06-Apr-16 (in house check Jun-24)	In house check: Jun-26
Power sensor E4412A	SN: MY41499007	06-Apr-16 (in house check Jun-24)	In house check: Jun-26
Power sensor E4412A	SN: 003110210	06-Apr-16 (in house check Jun-24)	In house check: Jun-26
RF generator HP 8648C	SN: U63642101700	04-Aug-09 (in house check Jun-24)	In house check: Jun-28
Network Analyzer E8350A	SN: U841080477	31-Mar-14 (in house check Oct-22)	In house check: Oct-24

Calibrated by	Name: Jeffrey Katsman	Function: Laboratory Technician	Signature:
Approved by	Sven Künn	Technical Manager:	Issued: July 31, 2024

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: EX-7823_Jul24

Page 1 of 22

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wukoo District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路134號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zugstrasse 43, 8004 Zurich, Switzerland



SG Schweizerischer Kalibrierdienst
Service suisse d'étalonnage
Servizio svizzero di Istrumen
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Glossary

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ComF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ψ	ψ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta=0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration Is Performed According to the Following Standards:

- IEC/IEEE 62209-152B, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices – Part 152B: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- KOB #05664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}: Assessed for E-field polarization $\theta=0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E-field uncertainty inside TSL (see below ComF).
- NORM_{x,y,z} = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ComF.
- DCPx,y,z: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal. DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- Al,y,z; Br,y,z; Cr,y,z; Dr,y,z; VR_{x,y,z}; A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signals. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ComF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f = 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ComF whereby the uncertainty corresponds to that given for ComF. A frequency dependent ComF is used in DASY version 4.4 and higher which allows extending the validity from 450 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy): In a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wukou District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

EX3DV4 - SN:7823

July 31, 2024

Parameters of Probe: EX3DV4 - SN:7823**Basic Calibration Parameters**

	Sensor X	Sensor Y	Sensor Z	Unc (k = 2)
Norm (μV/Vm) ^A	0.60	0.61	0.58	±10.1%
DCP (mV) ^B	107.6	106.0	107.1	±4.7%

Calibration Results for Modulation Response

UID	Communication System Name	A dB	B dB ₁₀ pV	C	D dB	VR mV	Max dev.	Max Unc ^C k = 2
0	CW	X 0.00	0.00	1.00	0.00	130.0	±1.6%	±4.7%
		Y 0.00	0.00	1.00		133.6		
		Z 0.00	0.00	1.00		125.8		
10352	Pulse Waveform (200Hz, 10%)	X 1.38	60.00	6.14	18.00	60.0	±2.5%	±9.6%
		Y 1.49	60.59	6.41		60.0		
		Z 1.72	61.48	6.81		60.0		
10353	Pulse Waveform (200Hz, 20%)	X 10.00	72.00	9.00	6.99	90.0	±2.3%	±9.6%
		Y 0.81	60.00	4.96		80.0		
		Z 0.81	60.00	4.86		80.0		
10354	Pulse Waveform (200Hz, 40%)	X 0.16	138.07	0.23	3.98	95.0	±2.8%	±9.6%
		Y 22.00	72.00	7.00		85.0		
		Z 22.00	72.00	7.00		85.0		
10355	Pulse Waveform (200Hz, 60%)	X 11.33	93.82	0.05	2.22	120.0	±1.7%	±9.6%
		Y 11.42	154.30	11.24		120.0		
		Z 9.72	88.24	0.07		120.0		
10357	QPSK Waveform, 1 MHz	X 0.65	66.31	14.06	1.00	150.0	±3.1%	±9.6%
		Y 0.49	62.40	11.65		150.0		
		Z 0.59	66.20	14.31		150.0		
10388	QPSK Waveform, 10 MHz	X 1.47	87.44	14.78	0.00	150.0	±1.0%	±9.6%
		Y 1.23	65.05	13.10		150.0		
		Z 1.45	87.94	14.87		150.0		
10396	64-QAM Waveform, 100 kHz	X 1.75	65.20	16.26	3.01	150.0	±0.8%	±9.6%
		Y 1.66	64.00	15.53		150.0		
		Z 1.73	65.11	16.18		150.0		
10398	64-QAM Waveform, 40 MHz	X 2.93	66.97	16.49	0.00	150.0	±1.0%	±9.6%
		Y 2.76	66.09	14.89		150.0		
		Z 2.88	67.11	16.56		150.0		
10414	WLAN CCDF, 64-QAM, 40 MHz	X 3.90	66.50	15.65	0.00	150.0	±2.6%	±9.6%
		Y 3.68	66.87	15.06		150.0		
		Z 3.79	66.60	15.54		150.0		

Note: For details on UID parameters see Appendix

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainty of Norm X, Y, Z do not affect the E²-field uncertainty inside TS1, (see Pages 5 and 6).^B Linearity parameter uncertainty for maximum supplied field strength.^C Uncertainty is determined using the real deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

EX3DV4 - SN:7823

July 31, 2024

Parameters of Probe: EX3DV4 - SN:7823**Sensor Model Parameters**

	C1 fF	C2 fF	α V ⁻¹	T1 ms V ⁻²	T2 ms V ⁻¹	T3 ms	T4 V ⁻²	T5 V ⁻¹	T6
x	9.4	67.56	33.00	3.15	0.00	4.90	0.47	0.00	1.00
y	8.3	60.37	33.74	2.92	0.00	4.90	0.47	0.00	1.00
z	8.3	59.27	32.77	2.85	0.00	4.90	0.47	0.00	1.00

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle	29.5°
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	8 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Note: Measurement distance from surface can be increased to 3-4 mm for an Area Scan job.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

EX3DV4 - SN:7823

July 31, 2024

Parameters of Probe: EX3DV4 - SN:7823
Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity ^F (S/m)	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc ^H (k = 2)
750	41.5	0.99	8.75	8.90	9.05	0.35	1.27	±11.0%
835	41.5	0.99	9.60	8.78	8.90	0.36	1.27	±11.0%
900	41.5	0.97	8.36	8.55	8.68	0.35	1.27	±11.0%
1450	40.5	1.20	8.80	7.85	7.98	0.35	1.27	±11.0%
1750	40.1	1.37	8.34	7.61	7.73	0.38	1.27	±11.0%
1800	40.0	1.40	7.85	7.16	7.28	0.36	1.27	±11.0%
2000	40.0	1.40	7.81	7.13	7.24	0.36	1.27	±11.0%
2300	39.5	1.67	7.64	6.87	7.08	0.36	1.27	±11.0%
2450	39.2	1.80	7.29	6.85	6.78	0.36	1.27	±11.0%
2600	39.0	1.96	7.22	6.59	6.68	0.36	1.27	±11.0%
3300	38.2	2.71	8.03	6.23	6.33	0.37	1.27	±13.1%
3500	37.9	2.91	6.03	6.05	6.15	0.37	1.27	±13.1%
3700	37.7	3.12	6.95	5.88	6.08	0.37	1.27	±13.1%
3900	37.5	3.32	5.49	5.92	6.02	0.37	1.27	±13.1%
4100	37.2	3.53	5.44	5.88	5.95	0.37	1.27	±13.1%
4200	37.1	3.63	6.38	5.83	5.92	0.37	1.27	±13.1%
4400	36.9	3.84	6.24	5.70	5.78	0.37	1.27	±13.1%
4500	36.7	4.04	6.07	5.54	5.63	0.37	1.27	±13.1%
4800	36.4	4.25	5.99	5.46	5.55	0.38	1.27	±13.1%
4950	36.3	4.40	5.87	5.35	5.44	0.36	1.27	±13.1%
5250	35.9	4.71	5.57	5.08	5.16	0.33	1.27	±13.1%
5600	35.5	5.07	5.05	4.81	4.99	0.29	1.27	±13.1%
5750	35.4	5.32	5.19	4.74	4.81	0.28	1.27	±13.1%
5850	35.2	5.32	4.99	4.55	4.62	0.27	1.27	±13.1%

^C Frequency validity above 300 MHz at ±10% for unit applies for BABY 4A and higher (see Page 2), while it is restricted to ±50 MHz. The uncertainty is the RMS of the ConvF uncertainty of calibration frequency and the uncertainty for the selected frequency band. Frequency validity below 200 MHz is ±15, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 160 and 250 MHz respectively. Validity of ConvF measured at 8 MHz is 4–5 kHz; and ConvF measured at 13 MHz is 9–10 kHz. Above 3 GHz frequency validity can be extended to ±100 MHz.

^D The probes are calibrated using tissue simulating liquids (TSL) that deviate not ± 5% and ± 10% from the target values (typically better than ±3%) and are valid for TSL with deviations of up to ±10% if BAR correction is applied.

^E Alpha/Depth are determined during calibration. SPECNS warrants that the remaining deviation due to the boundary effect with compensation is always less than ±1% for frequencies below 2.5GHz and below ±2% for frequencies between 3–6 GHz at any distance longer than half the probe tip diameter from the boundary.

^F The stated uncertainty is the total calibration uncertainty ($k = 2$) of NIST (GaNS). This is equivalent to the uncertainty component with the symbol Cf in Table 9 of IEC62311:2009-02-09 2009.

Certificate No: EX-7823_Ju24

Page 5 of 22

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路134號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

EX3DV4 - SN:7823

July 31, 2024

Parameters of Probe: EX3DV4 - SN:7823**Calibration Parameter Determined in Head Tissue Simulating Media**

I (MHz) ^D	Relative Permittivity ^E	Conductivity ^F (S/m)	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc ^H (k = 2)
6500	34.5	6.07	5.34	4.87	4.96	0.20	1.27	±18.6%
7000	33.3	6.65	6.47	4.90	5.07	0.20	1.27	±18.6%


^D Frequency validity at 9.5 GHz is -600 - 700 MHz, and >700 MHz at or above 7 GHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.^E The probes are calibrated using tissue simulating liquid (TSL) that matches to ϵ_r and σ by less than ±10% from the target values (typically better than ±5%) and are valid for TSL with deviations of up to ±10%.^F Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ±1% for frequencies below 3.0 GHz, below ±2% for frequencies between 3-6 GHz, and below ±4% for frequencies between 6-10 GHz at any distance larger than half the probe tip diameter from the boundary.^G The stated uncertainty is the total calibration uncertainty (k = 2) of Norm ConvF. This is equivalent to the uncertainty component with the symbol Cf in Table 9 of IEC/IEEE 62228-1/28-2020.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路134號

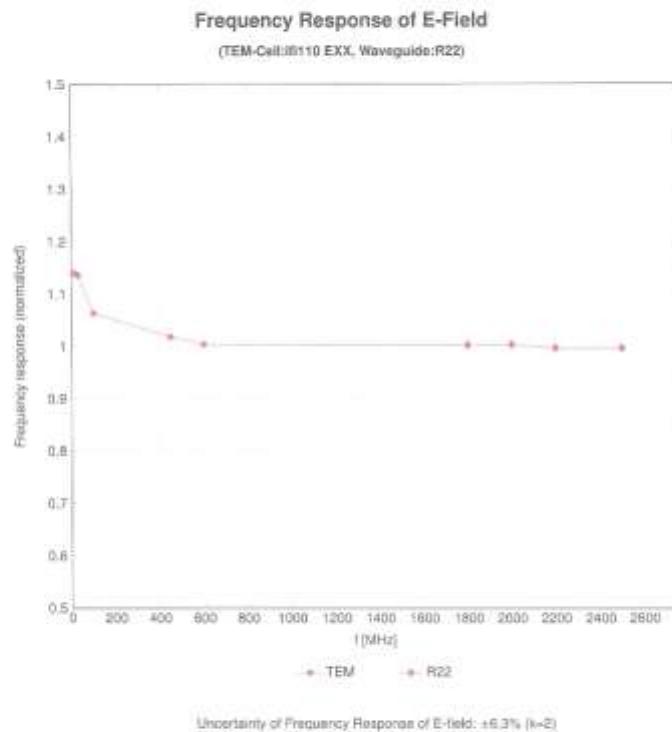

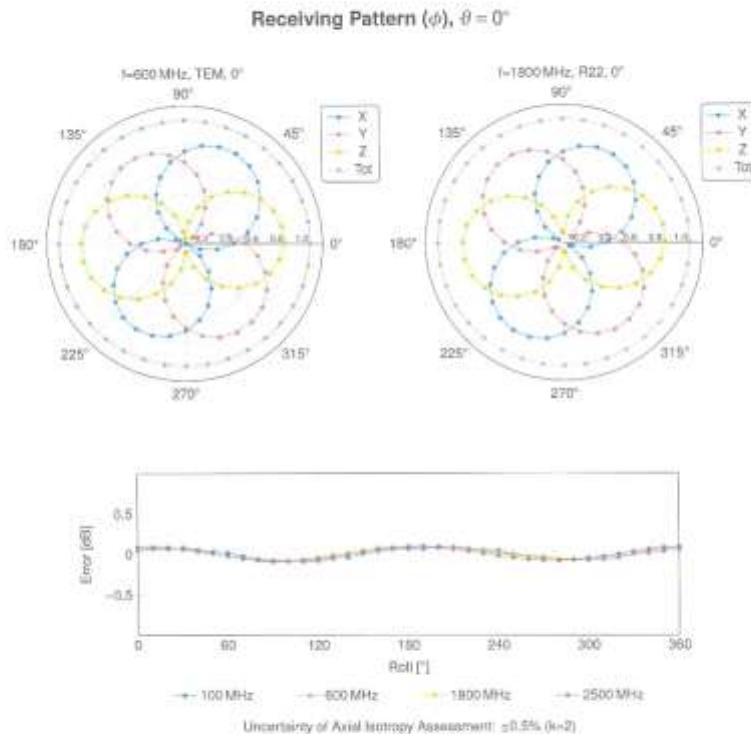

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

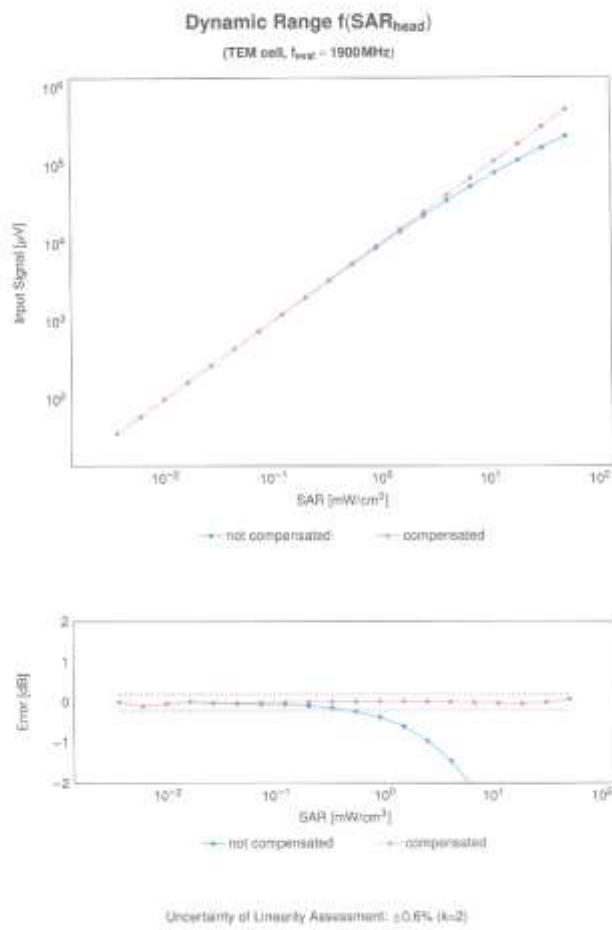


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路134號

Conversion Factor Assessment

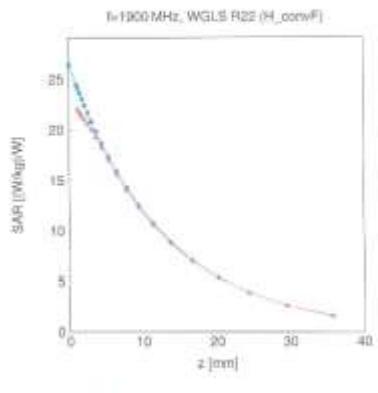

Deviation from Isotropy in Liquid

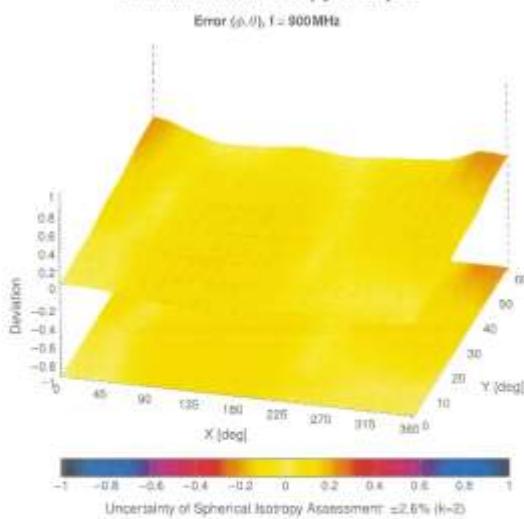

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Appendix: Modulation Calibration Parameters

ID	Rev	Communication System Name	Group	PWR (dB)	Unet ² K = 2
0		CDW	CDW	0.00	±0.7
10010	CAB	3G-Vision (Square, 100ms, 10 ms)	3G-V	50.00	±0.4
10011	CAB	UMTS-FDD (WCDMA)	WCDMA	2.91	±0.9
10012	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1Mbps)	WLAN	1.07	±0.5
10013	CAB	IEEE 802.11g WiFi 2.4 GHz (OFSS-OFDM, 6 Mbps)	WLAN	8.48	±0.5
10021	CAB	GSM-FDD (TDD, GMSK)	GSM	9.39	±0.6
10023	CAB	GPRS-FDD (TDD, GMSK, TN 0)	GSM	8.57	±0.6
10024	CAB	GPRS-FDD (TDD, GMSK, TN 0-1)	GSM	6.86	±0.6
10035	CAB	EDGE-FDD (TDD, GMSK, TN 0-1)	GSM	12.63	±0.5
10038	CAB	EDGE-FDD (TDD, GMSK, TN 0-1-2)	GSM	11.58	±0.5
10039	CAB	GPRS-FDD (TDD, GMSK, TN 0-1-2)	GSM	4.82	±0.6
10040	CAB	GPRS-FDD (TDD, GMSK, TN 0-1-2-3)	GSM	0.54	±0.6
10049	CAB	EDGE-FDD (TDD, GMSK, TN 0-1-2)	GSM	7.79	±0.6
10050	CAB	IEEE 802.15.1 Bluetooth (OFSS, DH1)	Bluetooth	8.30	±0.5
10051	CAB	IEEE 802.15.1 Bluetooth (OFSS, DH2)	Bluetooth	1.07	±0.5
10052	CAB	IEEE 802.15.1 Bluetooth (OFSS, DH3)	Bluetooth	1.18	±0.5
10053	CAB	IEEE 802.15.1 Bluetooth (Pulse-QPSK, DH1)	Bluetooth	7.74	±0.6
10054	CAB	IEEE 802.15.1 Bluetooth (Pulse-QPSK, DH2)	Bluetooth	4.53	±0.6
10055	CAB	IEEE 802.15.1 Bluetooth (Pulse-QPSK, DH3)	Bluetooth	3.83	±0.6
10056	CAB	IEEE 802.15.1 Bluetooth (OFSS, DH1)	Bluetooth	8.31	±0.6
10057	CAB	IEEE 802.15.1 Bluetooth (OFSS, DH2)	Bluetooth	4.77	±0.6
10058	CAB	IEEE 802.15.1 Bluetooth (OFSS, DH3)	Bluetooth	4.10	±0.6
10059	CAB	CDMA2000 (1xRTT, R5)	CDMA2000	4.57	±0.6
10062	CAB	2G-S4T (GSM-FDD (TDD, GMSK, 5.3 Mbps))	AMPS	7.78	±0.6
10064	CAB	2G-S4T (TDD, GMSK-FDD (TDD, GMSK, 5.3 Mbps))	AMPS	9.00	±0.6
10066	CAB	DECT (GSM, TDD, GMSK, Full Rate, 240)	DECT	11.80	±0.6
10067	CAB	DECT (TDD, TDD, GMSK, Double ISM, 12)	DECT	10.79	±0.6
10068	CAB	CDMA-FDD (TD-WCDMA, 1.28 Mbps)	TD-SCDMA	11.01	±0.6
10069	CAB	EDGE-FDD (TDD, GMSK, TN 0-1-2-3)	GSM	6.52	±0.6
10070	CAB	IEEE 802.11b WiFi (DSSS, 2Mbps)	WLAN	5.13	±0.6
10071	CAB	IEEE 802.11b WiFi 2.4 GHz (OFSS, 5.3 Mbps)	WLAN	2.83	±0.6
10072	CAB	IEEE 802.11b WiFi 2.4 GHz (OFSS, 11Mbps)	WLAN	3.60	±0.6
10073	CAB	IEEE 802.11b WiFi 2.4 GHz (OFSS-OFDM, 6Mbps)	WLAN	5.88	±0.6
10074	CAB	IEEE 802.11b WiFi 2.4 GHz (OFSS-OFDM, 9Mbps)	WLAN	9.83	±0.6
10075	CAB	IEEE 802.11b WiFi 2.4 GHz (OFSS-OFDM, 12Mbps)	WLAN	9.29	±0.6
10076	CAB	IEEE 802.11b WiFi 2.4 GHz (OFSS-OFDM, 18Mbps)	WLAN	9.00	±0.6
10077	CAB	IEEE 802.11b WiFi 2.4 GHz (OFSS-OFDM, 24Mbps)	WLAN	9.38	±0.6
10078	CAB	IEEE 802.11b WiFi 2.4 GHz (OFSS-OFDM, 36Mbps)	WLAN	10.12	±0.6
10079	CAB	IEEE 802.11b WiFi 2.4 GHz (OFSS-OFDM, 48Mbps)	WLAN	10.28	±0.6
10080	CAB	IEEE 802.11b WiFi 2.4 GHz (OFSS-OFDM, 54Mbps)	WLAN	9.50	±0.6
10071	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9Mbps)	WLAN	8.03	±0.6
10072	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 13Mbps)	WLAN	9.02	±0.6
10073	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18Mbps)	WLAN	9.98	±0.6
10078	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 34Mbps)	WLAN	10.30	±0.6
10079	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36Mbps)	WLAN	10.77	±0.6
10080	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54Mbps)	WLAN	10.84	±0.6
10081	CAB	IEEE 802.11g WiFi 2.4 GHz (OFSS-OFDM, 54Mbps)	WLAN	11.88	±0.6
10082	CAB	CDMA2000 (1xRTT, R5)	CDMA2000	2.87	±0.6
10087	CAB	TD-SCDMA (TD-WCDMA, 1.28 Mbps)	AMPS	4.77	±0.6
10089	CAB	GPRS-FDD (TDD, GMSK, TN 0-4)	GSM	6.56	±0.6
10097	CAB	UMTS-FDD (4GSM)	WCDMA	3.98	±0.6
10098	CAB	UMTS-FDD (4GSM, Susten 2)	WCDMA	3.98	±0.6
10099	CAB	EDGE-FDD (TDD, GMSK, TN 0-4)	GSM	9.25	±0.6
10100	CAB	LTE-FDD (SC-FDMA, 100% FB, 20 MHz, QPSK)	LTE-FDD	5.87	±0.6
10101	CAB	LTE-FDD (SC-FDMA, 100% FB, 20 MHz, 16-QAM)	LTE-FDD	6.42	±0.6
10102	CAB	LTE-FDD (SC-FDMA, 100% FB, 20 MHz, 64-QAM)	LTE-FDD	6.64	±0.6
10103	CAB	LTE-FDD (SC-FDMA, 100% FB, 20 MHz, QPSK)	LTE-FDD	9.24	±0.6
10104	CAB	LTE-FDD (SC-FDMA, 100% FB, 20 MHz, 16-QAM)	LTE-FDD	9.87	±0.6
10105	CAB	LTE-FDD (SC-FDMA, 100% FB, 20 MHz, 64-QAM)	LTE-FDD	10.01	±0.6
10106	CAB	LTE-FDD (SC-FDMA, 100% FB, 10 MHz, QPSK)	LTE-FDD	5.98	±0.6
10107	CAB	LTE-FDD (SC-FDMA, 100% FB, 10 MHz, 16-QAM)	LTE-FDD	6.43	±0.6
10108	CAB	LTE-FDD (SC-FDMA, 100% FB, 10 MHz, QPSK)	LTE-FDD	5.75	±0.6
10111	CAB	LTE-FDD (SC-FDMA, 100% FB, 10 MHz, 16-QAM)	LTE-FDD	6.44	±0.6

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

UID	Rev	Communication System Name	Group	PWR (dB)	1ms ² μ s \pm 2
10112	CAH	LTE-FDD (SC-FDMA, 100% RB, 1.0MHz, 64-QAM)	LTE-FDD	8.79	\pm 0.5
10113	CAH	LTE-FDD (SC-FDMA, 100% RB, 1.0MHz, 64-QAM)	LTE-FDD	8.82	\pm 0.5
10114	CAE	IEEE 802.11n (HT Greenfield, 15.5Mbps, BPSK)	WLAN	8.10	\pm 0.5
10115	CAE	IEEE 802.11n (HT Greenfield, 51Mbps, 16-QAM)	WLAN	8.40	\pm 0.5
10116	CAE	IEEE 802.11n (HT Greenfield, 155Mbps, 64-QAM)	WLAN	8.10	\pm 0.5
10117	CAE	IEEE 802.11n (HT Mixed, 10.3Mbps, BPSK)	WLAN	8.07	\pm 0.5
10118	CAE	IEEE 802.11n (HT Mixed, 81Mbps, 16-QAM)	WLAN	8.39	\pm 0.5
10119	CAE	IEEE 802.11n (HT Mixed, 125Mbps, 64-QAM)	WLAN	8.15	\pm 0.5
10140	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.0MHz, 64-QAM)	LTE-FDD	6.49	\pm 0.5
10141	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.0MHz, 64-QAM)	LTE-FDD	6.53	\pm 0.5
10142	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.0MHz, BPSK)	LTE-FDD	6.73	\pm 0.5
10143	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.0MHz, 16-QAM)	LTE-FDD	6.35	\pm 0.5
10144	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.0MHz, 64-QAM)	LTE-FDD	6.85	\pm 0.5
10145	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, BPSK)	LTE-FDD	6.76	\pm 0.5
10146	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 16-QAM)	LTE-FDD	6.41	\pm 0.5
10147	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.72	\pm 0.5
10148	CAF	LTE-FDD (SC-FDMA, 50% RB, 25MHz, 16-QAM)	LTE-FDD	6.42	\pm 0.5
10150	CAF	LTE-FDD (SC-FDMA, 50% RB, 20MHz, 64-QAM)	LTE-FDD	8.00	\pm 0.5
10151	CAH	LTE-TDD (SC-FDMA, 50% RB, 20MHz, BPSK)	LTE-TDD	8.28	\pm 0.5
10152	CAH	LTE-TDD (SC-FDMA, 50% RB, 30MHz, 16-QAM)	LTE-TDD	8.92	\pm 0.5
10153	CAH	LTE-TDD (SC-FDMA, 50% RB, 35MHz, 64-QAM)	LTE-TDD	10.00	\pm 0.5
10154	CAH	LTE-FDD (SC-FDMA, 50% RB, 33MHz, BPSK)	LTE-FDD	9.75	\pm 0.5
10155	CAH	LTE-FDD (SC-FDMA, 50% RB, 33MHz, 16-QAM)	LTE-FDD	8.43	\pm 0.5
10156	CAH	LTE-FDD (SC-FDMA, 50% RB, 33MHz, 64-QAM)	LTE-FDD	8.78	\pm 0.5
10157	CAH	LTE-FDD (SC-FDMA, 50% RB, 1.5MHz, 16-QAM)	LTE-FDD	6.48	\pm 0.5
10158	CAH	LTE-FDD (SC-FDMA, 50% RB, 1.0MHz, 64-QAM)	LTE-FDD	6.82	\pm 0.5
10159	CAH	LTE-FDD (SC-FDMA, 60% RB, 0MHz, 64-QAM)	LTE-FDD	8.56	\pm 0.5
10160	CAF	LTE-FDD (SC-FDMA, 60% RB, 15MHz, BPSK)	LTE-FDD	8.82	\pm 0.5
10161	CAF	LTE-FDD (SC-FDMA, 50% RB, 15MHz, 16-QAM)	LTE-FDD	8.48	\pm 0.5
10162	CAF	LTE-FDD (SC-FDMA, 50% RB, 15MHz, 64-QAM)	LTE-FDD	8.58	\pm 0.5
10163	CAF	LTE-FDD (SC-FDMA, 50% RB, 1.4MHz, 16-QAM)	LTE-FDD	8.21	\pm 0.5
10164	CAF	LTE-FDD (SC-FDMA, 50% RB, 1.4MHz, 64-QAM)	LTE-FDD	8.79	\pm 0.5
10165	CAF	LTE-FDD (SC-FDMA, 1 RB, 22MHz, BPSK)	LTE-FDD	5.73	\pm 0.5
10170	CAF	LTE-FDD (SC-FDMA, 1 RB, 29MHz, 16-QAM)	LTE-FDD	6.32	\pm 0.5
10171	AMF	LTE-FDD (SC-FDMA, 1 RB, 29MHz, 64-QAM)	LTE-FDD	6.40	\pm 0.5
10172	CAF	LTE-TDD (SC-FDMA, 1 RB, 29MHz, BPSK)	LTE-TDD	9.01	\pm 0.5
10173	CAF	LTE-TDD (SC-FDMA, 1 RB, 20MHz, 16-QAM)	LTE-TDD	9.48	\pm 0.5
10174	CAF	LTE-TDD (SC-FDMA, 1 RB, 20MHz, 64-QAM)	LTE-TDD	10.23	\pm 0.5
10175	CAF	LTE-FDD (SC-FDMA, 1 RB, 10MHz, BPSK)	LTE-FDD	5.72	\pm 0.5
10176	CAF	LTE-FDD (SC-FDMA, 1 RB, 10MHz, 16-QAM)	LTE-FDD	6.55	\pm 0.5
10177	CAF	LTE-FDD (SC-FDMA, 1 RB, 2MHz, BPSK)	LTE-FDD	5.79	\pm 0.5
10178	CAF	LTE-FDD (SC-FDMA, 1 RB, 2MHz, 16-QAM)	LTE-FDD	6.59	\pm 0.5
10179	CAF	LTE-FDD (SC-FDMA, 1 RB, 10MHz, 16-QAM)	LTE-FDD	6.55	\pm 0.5
10180	CAF	LTE-FDD (SC-FDMA, 1 RB, 5MHz, 64-QAM)	LTE-FDD	6.50	\pm 0.5
10181	CAF	LTE-FDD (SC-FDMA, 1 RB, 15MHz, BPSK)	LTE-FDD	5.78	\pm 0.5
10182	CAF	LTE-FDD (SC-FDMA, 1 RB, 15MHz, 16-QAM)	LTE-FDD	6.52	\pm 0.5
10183	CAF	LTE-FDD (SC-FDMA, 1 RB, 15MHz, 64-QAM)	LTE-FDD	6.58	\pm 0.5
10184	CAF	LTE-FDD (SC-FDMA, 1 RB, 3MHz, BPSK)	LTE-FDD	5.75	\pm 0.5
10185	CAF	LTE-FDD (SC-FDMA, 1 RB, 3MHz, 16-QAM)	LTE-FDD	6.51	\pm 0.5
10186	CAF	LTE-FDD (SC-FDMA, 1 RB, 3MHz, 64-QAM)	LTE-FDD	6.30	\pm 0.5
10187	CAF	LTE-FDD (SC-FDMA, 1 RB, 1.4MHz, BPSK)	LTE-FDD	5.73	\pm 0.5
10188	CAF	LTE-FDD (SC-FDMA, 1 RB, 1.4MHz, 16-QAM)	LTE-FDD	6.52	\pm 0.5
10189	AMF	LTE-FDD (SC-FDMA, 1 RB, 1.4MHz, 64-QAM)	LTE-FDD	6.50	\pm 0.5
10190	CAF	IEEE 802.11n (HT Greenfield, 6.5Mbps, BPSK)	WLAN	6.09	\pm 0.5
10191	CAF	IEEE 802.11n (HT Greenfield, 38Mbps, 16-QAM)	WLAN	6.12	\pm 0.5
10192	CAF	IEEE 802.11n (HT Greenfield, 62Mbps, 64-QAM)	WLAN	6.21	\pm 0.5
10193	CAF	IEEE 802.11n (HT Mixed, 5.5Mbps, BPSK)	WLAN	6.18	\pm 0.5
10194	CAF	IEEE 802.11n (HT Mixed, 38Mbps, 16-QAM)	WLAN	6.19	\pm 0.5
10195	CAF	IEEE 802.11n (HT Mixed, 62Mbps, 64-QAM)	WLAN	6.40	\pm 0.5
10196	CAF	IEEE 802.11n (HT Mixed, 7.2Mbps, BPSK)	WLAN	6.27	\pm 0.5
10197	CAF	IEEE 802.11n (HT Mixed, 43.3Mbps, 16-QAM)	WLAN	6.19	\pm 0.5
10198	CAF	IEEE 802.11n (HT Mixed, 72.2Mbps, 64-QAM)	WLAN	6.27	\pm 0.5
10199	CAF	IEEE 802.11n (HT Mixed, 88Mbps, 16-QAM)	WLAN	6.27	\pm 0.5
10200	CAF	IEEE 802.11n (HT Mixed, 10.3Mbps, BPSK)	WLAN	6.00	\pm 0.5
10201	CAF	IEEE 802.11n (HT Mixed, 125Mbps, 64-QAM)	WLAN	6.19	\pm 0.5
10202	CAF	IEEE 802.11n (HT Mixed, 150Mbps, BPSK)	WLAN	6.27	\pm 0.5
10203	CAF	IEEE 802.11n (HT Mixed, 20Mbps, 16-QAM)	WLAN	6.00	\pm 0.5
10204	CAF	IEEE 802.11n (HT Mixed, 150Mbps, 64-QAM)	WLAN	6.00	\pm 0.5

Unit	Ref	Communication System Name	Group	PAR (dB)	Unc. \pm n = 2
10226	CAG	UMTS-FDD (HSPA+)	WCDMA	9.07	\pm 0.0
10228	CAG	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-TDD	9.43	\pm 0.0
10227	CAG	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.28	\pm 0.0
10229	CAG	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-TDD	9.33	\pm 0.0
10230	CAG	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-TDD	9.48	\pm 0.0
10231	CAG	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-TDD	10.25	\pm 0.0
10232	CAG	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-TDD	9.19	\pm 0.0
10233	CAG	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-TDD	9.46	\pm 0.0
10234	CAG	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-TDD	10.26	\pm 0.0
10235	CAG	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-TDD	9.21	\pm 0.0
10236	CAG	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-TDD	9.48	\pm 0.0
10237	CAG	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-TDD	10.26	\pm 0.0
10238	CAG	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-TDD	9.43	\pm 0.0
10239	CAG	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-TDD	10.26	\pm 0.0
10240	CAG	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-TDD	9.21	\pm 0.0
10241	CAG	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-TDD	9.43	\pm 0.0
10242	CAG	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.36	\pm 0.0
10243	CAG	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-TDD	9.46	\pm 0.0
10244	CAG	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-TDD	10.06	\pm 0.0
10245	CAG	LTE-TDD (SC-FDMA, 0.01% RB, 3 MHz, 64-QAM)	LTE-TDD	10.06	\pm 0.0
10246	CAG	LTE-TDD (SC-FDMA, 0.01% RB, 3 MHz, QPSK)	LTE-TDD	9.30	\pm 0.0
10247	CAG	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-TDD	9.91	\pm 0.0
10248	CAG	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-TDD	10.06	\pm 0.0
10249	CAG	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-TDD	9.39	\pm 0.0
10250	CAG	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-TDD	9.81	\pm 0.0
10251	CAG	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-TDD	10.17	\pm 0.0
10252	CAG	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-TDD	9.24	\pm 0.0
10253	CAG	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-TDD	9.50	\pm 0.0
10254	CAG	LTE-TDD (SC-FDMA, 10% RB, 15 MHz, 64-QAM)	LTE-TDD	10.14	\pm 0.0
10255	CAG	LTE-TDD (SC-FDMA, 10% RB, 15 MHz, QPSK)	LTE-TDD	9.28	\pm 0.0
10256	CAG	LTE-TDD (SC-FDMA, 10% RB, 15 MHz, QPSK)	LTE-TDD	9.98	\pm 0.0
10257	CAG	LTE-TDD (SC-FDMA, 10% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.86	\pm 0.0
10258	CAG	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.06	\pm 0.0
10259	CAG	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-TDD	9.54	\pm 0.0
10260	CAG	LTE-TDD (SC-FDMA, 100% RB, 2 MHz, 16-QAM)	LTE-TDD	9.98	\pm 0.0
10261	CAG	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-TDD	9.21	\pm 0.0
10262	CAG	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-TDD	10.06	\pm 0.0
10263	CAG	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-TDD	9.43	\pm 0.0
10264	CAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-TDD	10.16	\pm 0.0
10265	CAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-TDD	9.33	\pm 0.0
10266	CAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-TDD	10.06	\pm 0.0
10267	CAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-TDD	9.38	\pm 0.0
10268	CAG	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-TDD	10.06	\pm 0.0
10269	CAG	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-TDD	10.13	\pm 0.0
10270	CAG	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-TDD	9.58	\pm 0.0
10271	CAG	UMTS-FDD (HSPA, subless 3, 30MP, Rel.10)	WCDMA	4.87	\pm 0.0
10272	CAG	UMTS-FDD (HSPA, Subless 3, 30MP, Rel.4)	WCDMA	3.98	\pm 0.0
10273	CAG	PHS-QPSK	PHS	11.81	\pm 0.0
10274	CAG	PHS-QPSK, 5W 804MHz, Rel.0.5	PHS	11.81	\pm 0.0
10275	CAG	PHS-QPSK, 5W 804MHz, Rel.0.38	PHS	12.18	\pm 0.0
10276	AB	CDMA2000 RCH, 50% Full Rate	CDMA2000	3.91	\pm 0.0
10277	AB	CDMA2000 RCH, 50% Full Rate	CDMA2000	3.48	\pm 0.0
10278	AB	CDMA2000 RCH, 50% Full Rate	CDMA2000	3.99	\pm 0.0
10279	AB	CDMA2000 RCH, 50% Full Rate	CDMA2000	3.60	\pm 0.0
10280	AB	CDMA2000 RCH, 50% Full Rate	CDMA2000	12.48	\pm 0.0
10281	AB	LTE-FDD (SC-FDMA, 5W, 10 MHz, 16-QAM)	LTE-FDD	5.81	\pm 0.0
10282	AB	LTE-FDD (SC-FDMA, 5W, 10 MHz, 64-QAM)	LTE-FDD	6.72	\pm 0.0
10283	AB	LTE-FDD (SC-FDMA, 5W, 10 MHz, 16-QAM)	LTE-FDD	6.38	\pm 0.0
10284	AB	LTE-FDD (SC-FDMA, 5W, 10 MHz, QPSK)	LTE-FDD	8.80	\pm 0.0
10285	AAA	IEEE 802.11a WMAX (29.16, 5.9ms, 10 MHz, QPSK, PLSC)	WMAX	12.03	\pm 0.0
10286	AAA	IEEE 802.11a WMAX (29.16, 5.9ms, 10 MHz, QPSK, PLSC, 3 CIR, 18 symbols)	WMAX	12.57	\pm 0.0
10287	AAA	IEEE 802.11a WMAX (31.75, 5.9ms, 10 MHz, 64QAM, RPSK)	WMAX	12.52	\pm 0.0
10288	AAA	IEEE 802.11a WMAX (31.75, 5.9ms, 10 MHz, 64QAM, RPSK)	WMAX	11.89	\pm 0.0
10289	AAA	IEEE 802.11a WMAX (31.75, 5.9ms, 10 MHz, 64QAM, PLSC, 18 symbols)	WMAX	11.28	\pm 0.0
10290	AAA	IEEE 802.11a WMAX (29.16, 5.9ms, 10 MHz, 64QAM, PLSC, 18 symbols)	WMAX	14.67	\pm 0.0

UID	Rev	Communication System Name	Group	PIUR (dB)	Unit ¹ n = 2
10307	AAA	IEEE 802.16e WiMAX (2018, 10ms, 16-QAM, QPSK, PUSC, 16 symbols)	WiMAX	14.49	±0.5
10308	AAA	IEEE 802.16e WiMAX (2018, 10ms, 16-QAM, 16QAM, PUSC)	WiMAX	14.46	±0.6
10309	AAA	IEEE 802.16e WiMAX (2018, 12ms, 10MHz, 16QAM, AMC 2x3, 16 symbols)	WiMAX	14.58	±0.6
10310	AAA	IEEE 802.16e WiMAX (2018, 12ms, 10MHz, QPSK, AMC 2x3, 16 symbols)	WiMAX	14.57	±0.6
10311	AAA	LTE-FDD-SC-FDMA, 100% RS, 15MHz, QPSK	LTE-FDD	8.06	±0.5
10312	AAA	TDEN 1.0	TDEN	15.51	±0.5
10314	AAA	TDEN 1.0	TDEN	15.48	±0.5
10315	AAA	IEEE 802.11b WiFi 2.4GHz (DBPSK, 1Mbps, 80pc duty cycle)	WLAN	1.71	±0.6
10316	AAA	IEEE 802.11g WiFi 2.4GHz (ERP-QPSK, 6Mbps, 98pc duty cycle)	WLAN	6.34	±0.6
10317	AAA	IEEE 802.11b WiFi 2.4GHz (DBPSK, 1Mbps, 80pc duty cycle)	WLAN	6.28	±0.6
10351	AAA	Pulse Waveform (200Hz, 10%)	General	10.96	±0.6
10352	AAA	Pulse Waveform (200Hz, 30%)	General	6.99	±0.6
10354	AAA	Pulse Waveform (200Hz, 40%)	General	3.98	±0.6
10355	AAA	Pulse Waveform (200Hz, 50%)	General	2.22	±0.6
10356	AAA	Pulse Waveform (200Hz, 60%)	General	0.97	±0.6
10357	AAA	QPSK Waveform, 1MHz	General	9.01	±0.6
10358	AAA	QPSK Waveform, 10MHz	General	5.23	±0.6
10359	AAA	84-QAM Waveform, 10MHz	General	5.27	±0.6
10360	AAA	84-QAM Waveform, 40MHz	General	5.27	±0.6
10400	AAA	IEEE 802.11ac WiFi 5GHz (64-QAM, 98pc duty cycle)	WLAN	9.37	±0.6
10401	AAA	IEEE 802.11ac WiFi (40MHz, 64-QAM, 98pc duty cycle)	WLAN	9.03	±0.6
10402	AAA	IEEE 802.11ac WiFi (60MHz, 64-QAM, 98pc duty cycle)	WLAN	9.33	±0.6
10403	AAA	CDMA2000 (1xEV-DO, Rev. B)	CDMA2000	3.78	±0.6
10404	AAA	CDMA2000 (1xEV-DO, Rev. A)	CDMA2000	3.77	±0.6
10405	AAA	CDMA2000, R200, 800, 50MHz, Full Rate	CDMA2000	5.82	±0.6
10410	AAA	LTE-TDD-SC-FDMA, 1RB, 10MHz, QPSK, UL Subframe=23.4.7.8.8, Subframe=23.4.7.8.8, (Intraframe Context)	LTE-TDD	7.86	±0.6
10414	AAA	WLAN CCDF 24-QAM, 40MHz	General	6.54	±0.6
10415	AAA	IEEE 802.11b WiFi 2.4GHz (DBPSK, 1Mbps, 98pc duty cycle)	WLAN	1.94	±0.6
10416	AAA	IEEE 802.11g WiFi 2.4GHz (ERP-QPSK, 6Mbps, 98pc duty cycle)	WLAN	6.20	±0.6
10417	AAA	IEEE 802.11n WiFi 5GHz (QPSK, 6Mbps, 98pc duty cycle)	WLAN	6.03	±0.6
10418	AAA	IEEE 802.11n WiFi 2.4GHz (DBPSK-QPSK, 6Mbps, 98pc duty cycle, Long preamble)	WLAN	6.16	±0.6
10419	AAA	IEEE 802.11g WiFi 2.4GHz (DBPSK-QPSK, 6Mbps, 98pc duty cycle, Short preamble)	WLAN	6.19	±0.6
10422	AAA	IEEE 802.11n WiFi Greenfield, 7.0Mbps (QPSK)	WLAN	6.32	±0.6
10423	AAA	IEEE 802.11n WiFi Greenfield, 43.3Mbps, 16-QAM	WLAN	6.47	±0.6
10424	AAA	IEEE 802.11n WiFi Greenfield, 72.2Mbps, 64-QAM	WLAN	6.48	±0.6
10425	AAA	IEEE 802.11n WiFi Greenfield, 115Mbps (QPSK)	WLAN	6.41	±0.6
10426	AAA	IEEE 802.11n WiFi Greenfield, 61Mbps, 16-QAM	WLAN	6.45	±0.6
10427	AAA	IEEE 802.11n WiFi Greenfield, 160Mbps, 64-QAM	WLAN	6.41	±0.6
10430	AM	LTE-FDD-SC-FDMA, 5MHz, E-TM 3.1	LTE-FDD	6.56	±0.6
10431	AM	LTE-FDD-SC-FDMA, 15MHz, E-TM 3.1	LTE-FDD	8.38	±0.6
10432	AM	LTE-FDD-SC-FDMA, 15MHz, E-TM 3.1	LTE-FDD	5.54	±0.6
10433	AM	LTE-FDD-SC-FDMA, 50MHz, E-TM 3.1	LTE-FDD	5.34	±0.6
10434	AM	W-CDMA 200 Test Model 1, 64-QPSK	W-CDMA	6.00	±0.6
10435	AM	LTE-TDD-SC-FDMA, 1RB, 10MHz, QPSK, UL Subframe=23.4.7.8.8, UL Subframe=23.4.7.8.8	LTE-TDD	7.82	±0.6
10437	AM	LTE-FDD-SC-FDMA, 1MHz, E-TM 3.1, Clipping 44%	LTE-FDD	7.95	±0.6
10440	AM	LTE-FDD-SC-FDMA, 1MHz, E-TM 3.1, Clipping 44%	LTE-FDD	7.43	±0.6
10448	AM	LTE-FDD-SC-FDMA, 15MHz, E-TM 3.1, Clipping 44%	LTE-FDD	7.91	±0.6
10450	AM	LTE-FDD-SC-FDMA, 20MHz, E-TM 3.1, Clipping 44%	LTE-FDD	7.48	±0.6
10461	AM	W-CDMA (BS, Test Model 1, 64-QPSK, Clipping 44%)	W-CDMA	7.39	±0.6
10462	AM	validation (Square, 10ms, 1ms)	Not	10.95	±0.6
10465	AM	IEEE 802.11ac WiFi (60MHz, 64-QAM, 98pc duty cycle)	WLAN	6.88	±0.6
10467	AM	UMTS-FDD (DQPSK)	W-CDMA	6.62	±0.6
10468	AM	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	CDMA2000	6.55	±0.6
10469	AM	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	CDMA2000	8.25	±0.6
10470	AM	UMTS-FDD (WCDMA, AWGN)	W-CDMA	8.29	±0.6
10481	AM	LTE-TDD-SC-FDMA, 1RB, 1MHz, QPSK, UL Subframe=23.4.7.8.9	LTE-TDD	7.82	±0.6
10482	AM	LTE-TDD-SC-FDMA, 1RB, 1MHz, 16-QAM, UL Subframe=23.4.7.8.9	LTE-TDD	8.20	±0.6
10483	AM	LTE-TDD-SC-FDMA, 1RB, 1MHz, 16-QAM, UL Subframe=23.4.7.8.9	LTE-TDD	9.58	±0.6
10484	AM	LTE-TDD-SC-FDMA, 1RB, 3MHz, QPSK, UL Subframe=23.4.7.8.9	LTE-TDD	7.82	±0.6
10485	AM	LTE-TDD-SC-FDMA, 1RB, 3MHz, 16-QAM, UL Subframe=23.4.7.8.9	LTE-TDD	8.33	±0.6
10486	AM	LTE-TDD-SC-FDMA, 1RB, 3MHz, 64-QAM, UL Subframe=23.4.7.8.9	LTE-TDD	8.57	±0.6
10487	AM	LTE-TDD-SC-FDMA, 1RB, 3MHz, 64-QAM, UL Subframe=23.4.7.8.9	LTE-TDD	8.32	±0.6
10488	AM	LTE-TDD-SC-FDMA, 1RB, 5MHz, 16-QAM, UL Subframe=23.4.7.8.9	LTE-TDD	8.32	±0.6
10489	AM	LTE-TDD-SC-FDMA, 1RB, 5MHz, 64-QAM, UL Subframe=23.4.7.8.9	LTE-TDD	8.96	±0.6
10490	AM	LTE-TDD-SC-FDMA, 1RB, 10MHz, QPSK, UL Subframe=23.4.7.8.9	LTE-TDD	7.87	±0.6
10491	AM	LTE-TDD-SC-FDMA, 1RB, 10MHz, 16-QAM, UL Subframe=23.4.7.8.9	LTE-TDD	8.32	±0.6

UID	Rev	Communication System Name	Group	Rate (Mbps)	Link ^a # = 2
10478	AAB	LTE-TDD (SC-FDMA, 1 RBL, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.47	±0.5
10479	AAF	LTE-TDD (SC-FDMA, 1 RBL, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.87	±0.5
10476	AAF	LTE-TDD (SC-FDMA, 1 RBL, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	±0.5
10475	AAF	LTE-TDD (SC-FDMA, 1 RBL, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	±0.5
10477	AAF	LTE-TDD (SC-FDMA, 1 RBL, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.34	±0.5
10478	AAG	LTE-TDD (SC-FDMA, 1 RBL, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	±0.5
10479	AAC	LTE-TDD (SC-FDMA, 50% RBL, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	±0.5
10480	AAC	LTE-TDD (SC-FDMA, 50% RBL, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.18	±0.5
10481	AAC	LTE-TDD (SC-FDMA, 50% RBL, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.46	±0.5
10482	AAC	LTE-TDD (SC-FDMA, 50% RBL, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.71	±0.5
10483	AAD	LTE-TDD (SC-FDMA, 50% RBL, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.39	±0.5
10484	AAD	LTE-TDD (SC-FDMA, 50% RBL, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.47	±0.5
10485	AAD	LTE-TDD (SC-FDMA, 50% RBL, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.98	±0.5
10486	AAD	LTE-TDD (SC-FDMA, 50% RBL, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.38	±0.5
10487	AAD	LTE-TDD (SC-FDMA, 50% RBL, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.46	±0.5
10488	AAD	LTE-TDD (SC-FDMA, 50% RBL, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.98	±0.5
10489	AAD	LTE-TDD (SC-FDMA, 50% RBL, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.31	±0.5
10490	AAG	LTE-TDD (SC-FDMA, 50% RBL, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.54	±0.5
10491	AFF	LTE-TDD (SC-FDMA, 50% RBL, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	±0.5
10492	AFF	LTE-TDD (SC-FDMA, 50% RBL, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.81	±0.5
10493	AMP	LTE-TDD (SC-FDMA, 50% RBL, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.55	±0.5
10494	AAG	LTE-TDD (SC-FDMA, 50% RBL, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.78	±0.5
10495	AAG	LTE-TDD (SC-FDMA, 50% RBL, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	9.37	±0.5
10496	AAG	LTE-TDD (SC-FDMA, 50% RBL, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	9.54	±0.5
10497	AAG	LTE-TDD (SC-FDMA, 50% RBL, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.54	±0.5
10498	AAC	LTE-TDD (SC-FDMA, 100% RBL, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.97	±0.5
10499	AAC	LTE-TDD (SC-FDMA, 100% RBL, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.49	±0.5
10500	AAC	LTE-TDD (SC-FDMA, 100% RBL, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	9.08	±0.5
10501	AAC	LTE-TDD (SC-FDMA, 100% RBL, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	9.44	±0.5
10502	AAG	LTE-TDD (SC-FDMA, 100% RBL, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	9.52	±0.5
10503	AAG	LTE-TDD (SC-FDMA, 100% RBL, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.78	±0.5
10504	AAG	LTE-TDD (SC-FDMA, 100% RBL, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.31	±0.5
10505	AAG	LTE-TDD (SC-FDMA, 100% RBL, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.54	±0.5
10506	AAG	LTE-TDD (SC-FDMA, 100% RBL, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.78	±0.5
10507	AAG	LTE-TDD (SC-FDMA, 100% RBL, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	9.06	±0.5
10508	AAG	LTE-TDD (SC-FDMA, 100% RBL, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	9.55	±0.5
10509	AAG	LTE-TDD (SC-FDMA, 100% RBL, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	9.99	±0.5
10510	AAG	LTE-TDD (SC-FDMA, 100% RBL, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.49	±0.5
10511	AAG	LTE-TDD (SC-FDMA, 100% RBL, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.51	±0.5
10512	AAG	LTE-TDD (SC-FDMA, 100% RBL, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	±0.5
10513	AAG	LTE-TDD (SC-FDMA, 100% RBL, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.54	±0.5
10506	AAG	LTE-TDD (SC-FDMA, 100% RBL, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.78	±0.5
10514	AAG	LTE-TDD (SC-FDMA, 100% RBL, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	9.06	±0.5
10515	AAG	LTE-TDD (SC-FDMA, 100% RBL, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	9.55	±0.5
10516	AAG	LTE-TDD (SC-FDMA, 100% RBL, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.49	±0.5
10517	AAG	LTE-TDD (SC-FDMA, 100% RBL, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	9.99	±0.5
10518	AAG	IEEE 802.11ac WiFi (2.4 GHz) (OFDM, 16QAM, 802.11a/b/g/n)	WLAN	8.53	±0.5
10519	AAG	IEEE 802.11ac WiFi (2.4 GHz) (OFDM, 16QAM, 802.11a/b/g/n)	WLAN	8.39	±0.5
10520	AAG	IEEE 802.11ac WiFi (2.4 GHz) (OFDM, 16QAM, 802.11a/b/g/n)	WLAN	8.12	±0.5
10521	AAG	IEEE 802.11ac WiFi (2.4 GHz) (OFDM, 16QAM, 802.11a/b/g/n)	WLAN	7.97	±0.5
10522	AAG	IEEE 802.11ac WiFi (2.4 GHz) (OFDM, 16QAM, 802.11a/b/g/n)	WLAN	8.45	±0.5
10523	AAG	IEEE 802.11ac WiFi (2.4 GHz) (OFDM, 16QAM, 802.11a/b/g/n)	WLAN	8.08	±0.5
10524	AAG	IEEE 802.11ac WiFi (2.4 GHz) (OFDM, 16QAM, 802.11a/b/g/n)	WLAN	8.37	±0.5
10525	AAG	IEEE 802.11ac WiFi (2.4 GHz) (MC25, 802.11a/b/g/n)	WLAN	8.38	±0.5
10526	AAG	IEEE 802.11ac WiFi (2.4 GHz) (MC25, 802.11a/b/g/n)	WLAN	8.42	±0.5
10527	AAG	IEEE 802.11ac WiFi (2.4 GHz) (MC25, 802.11a/b/g/n)	WLAN	8.21	±0.5
10528	AAG	IEEE 802.11ac WiFi (2.4 GHz) (MC25, 802.11a/b/g/n)	WLAN	8.58	±0.5
10529	AAG	IEEE 802.11ac WiFi (2.4 GHz) (MC25, 802.11a/b/g/n)	WLAN	8.30	±0.5
10530	AAG	IEEE 802.11ac WiFi (2.4 GHz) (MC25, 802.11a/b/g/n)	WLAN	8.43	±0.5
10531	AAG	IEEE 802.11ac WiFi (2.4 GHz) (MC25, 802.11a/b/g/n)	WLAN	8.29	±0.5
10532	AAG	IEEE 802.11ac WiFi (2.4 GHz) (MC25, 802.11a/b/g/n)	WLAN	8.54	±0.5
10533	AAG	IEEE 802.11ac WiFi (2.4 GHz) (MC25, 802.11a/b/g/n)	WLAN	8.38	±0.5
10534	AAG	IEEE 802.11ac WiFi (2.4 GHz) (MC25, 802.11a/b/g/n)	WLAN	8.45	±0.5
10535	AAG	IEEE 802.11ac WiFi (2.4 GHz) (MC25, 802.11a/b/g/n)	WLAN	8.45	±0.5
10536	AAG	IEEE 802.11ac WiFi (2.4 GHz) (MC25, 802.11a/b/g/n)	WLAN	8.32	±0.5
10537	AAG	IEEE 802.11ac WiFi (2.4 GHz) (MC25, 802.11a/b/g/n)	WLAN	8.54	±0.5
10538	AAG	IEEE 802.11ac WiFi (2.4 GHz) (MC25, 802.11a/b/g/n)	WLAN	8.34	±0.5
10539	AAG	IEEE 802.11ac WiFi (2.4 GHz) (MC25, 802.11a/b/g/n)	WLAN	8.54	±0.5
10540	AAG	IEEE 802.11ac WiFi (2.4 GHz) (MC25, 802.11a/b/g/n)	WLAN	8.39	±0.5

EX3DV4-SN7823

July 31, 2024

Certificate No: EX-7822_JUDW

Page 16 of 22

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

此件為月結單，此報表由木連捷資訊乙係員貳 向守此係品區係第9人。奉報木連捷公司會計部，不可即期後裝。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unit	Rev	Communication System Name	Group	PdB (dB)	Unit ^a N = 3
10009	AAD	IEEE 802.11ac WiFi (20MHz, MC82, 90pc duty cycle)	WLAN	8.47	+8.0
10010	AAD	IEEE 802.11ac WiFi (20MHz, MC82, 90pc duty cycle)	WLAN	8.78	+8.0
10011	AAD	IEEE 802.11ac WiFi (20MHz, MC84, 90pc duty cycle)	WLAN	8.79	+8.0
10012	AAD	IEEE 802.11ac WiFi (20MHz, MC82, 90pc duty cycle)	WLAN	8.77	+8.0
10013	AAD	IEEE 802.11ac WiFi (20MHz, MC82, 90pc duty cycle)	WLAN	8.94	+8.0
10014	AAD	IEEE 802.11ac WiFi (20MHz, MC82, 90pc duty cycle)	WLAN	8.58	+8.0
10015	AAD	IEEE 802.11ac WiFi (20MHz, MC82, 90pc duty cycle)	WLAN	8.52	+8.0
10016	AAD	IEEE 802.11ac WiFi (40MHz, MC82, 90pc duty cycle)	WLAN	8.82	+8.0
10017	AAD	IEEE 802.11ac WiFi (40MHz, MC82, 90pc duty cycle)	WLAN	8.61	+8.0
10018	AAD	IEEE 802.11ac WiFi (40MHz, MC82, 90pc duty cycle)	WLAN	8.58	+8.0
10019	AAD	IEEE 802.11ac WiFi (40MHz, MC82, 90pc duty cycle)	WLAN	8.88	+8.0
10020	AAD	IEEE 802.11ac WiFi (40MHz, MC82, 90pc duty cycle)	WLAN	8.27	+8.0
10021	AAD	IEEE 802.11ac WiFi (40MHz, MC82, 90pc duty cycle)	WLAN	8.17	+8.0
10022	AAD	IEEE 802.11ac WiFi (40MHz, MC82, 90pc duty cycle)	WLAN	8.09	+8.0
10023	AAD	IEEE 802.11ac WiFi (40MHz, MC82, 90pc duty cycle)	WLAN	8.82	+8.0
10024	AAD	IEEE 802.11ac WiFi (40MHz, MC82, 90pc duty cycle)	WLAN	8.36	+8.0
10025	AAD	IEEE 802.11ac WiFi (40MHz, MC82, 90pc duty cycle)	WLAN	8.36	+8.0
10026	AAD	IEEE 802.11ac WiFi (80MHz, MC82, 90pc duty cycle)	WLAN	8.29	+8.0
10027	AAD	IEEE 802.11ac WiFi (80MHz, MC82, 90pc duty cycle)	WLAN	8.88	+8.0
10028	AAD	IEEE 802.11ac WiFi (80MHz, MC82, 90pc duty cycle)	WLAN	8.74	+8.0
10029	AAD	IEEE 802.11ac WiFi (80MHz, MC82, 90pc duty cycle)	WLAN	8.86	+8.0
10030	AAD	IEEE 802.11ac WiFi (80MHz, MC82, 90pc duty cycle)	WLAN	8.72	+8.0
10031	AAD	IEEE 802.11ac WiFi (80MHz, MC82, 90pc duty cycle)	WLAN	8.81	+8.0
10032	AAD	IEEE 802.11ac WiFi (80MHz, MC82, 90pc duty cycle)	WLAN	8.74	+8.0
10033	AAD	IEEE 802.11ac WiFi (80MHz, MC82, 90pc duty cycle)	WLAN	8.83	+8.0
10034	AAD	IEEE 802.11ac WiFi (80MHz, MC82, 90pc duty cycle)	WLAN	8.88	+8.0
10035	AAD	IEEE 802.11ac WiFi (160MHz, MC82, 90pc duty cycle)	WLAN	8.81	+8.0
10036	AAD	IEEE 802.11ac WiFi (160MHz, MC82, 90pc duty cycle)	WLAN	8.83	+8.0
10037	AAD	IEEE 802.11ac WiFi (160MHz, MC82, 90pc duty cycle)	WLAN	8.79	+8.0
10038	AAD	IEEE 802.11ac WiFi (160MHz, MC82, 90pc duty cycle)	WLAN	8.86	+8.0
10039	AAD	IEEE 802.11ac WiFi (160MHz, MC82, 90pc duty cycle)	WLAN	8.88	+8.0
10040	AAD	IEEE 802.11ac WiFi (160MHz, MC82, 90pc duty cycle)	WLAN	8.98	+8.0
10041	AAD	IEEE 802.11ac WiFi (160MHz, MC82, 90pc duty cycle)	WLAN	8.88	+8.0
10042	AAD	IEEE 802.11ac WiFi (160MHz, MC82, 90pc duty cycle)	WLAN	8.81	+8.0
10043	AAD	IEEE 802.11ac WiFi (160MHz, MC82, 90pc duty cycle)	WLAN	8.83	+8.0
10044	AAD	IEEE 802.11ac WiFi (160MHz, MC82, 90pc duty cycle)	WLAN	8.58	+8.0
10045	AAD	IEEE 802.11ac WiFi (160MHz, MC82, 90pc duty cycle)	WLAN	9.11	+8.0
10046	AAD	LTE-TDD (SC-FDMA, 1.9GHz, 5MHz, CP8K, UL Subframe=2,7)	LTE-TDD	11.96	+9.6
10047	AAD	LTE-TDD (SC-FDMA, 1.9GHz, 20MHz, CP8K, UL Subframe=2,7)	LTE-TDD	11.96	+9.6
10048	AAA	CDMA2000 (1x Advanced)	CDMA2000	3.45	+8.0
10052	AAF	LTE-TDD (OFDMA, 8MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	8.91	+8.0
10053	AAF	LTE-TDD (OFDMA, 16MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	7.42	+8.0
10054	AAF	LTE-TDD (OFDMA, 16MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	6.96	+8.0
10055	AAF	LTE-TDD (OFDMA, 20MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	7.31	+8.0
10056	AAB	Pulse Waveform (20MHz, 10%)	Test	10.00	+8.0
10059	AAB	Pulse Waveform (20MHz, 20%)	Test	6.39	+8.0
10060	AAB	Pulse Waveform (20MHz, 50%)	Test	5.98	+8.0
10061	AAB	Pulse Waveform (20MHz, 55%)	Test	5.22	+8.0
10062	AAB	Pulse Waveform (20MHz, 80%)	Test	6.87	+8.0
10070	AAA	Baileigh Low Energy	Baileigh	2.19	+8.0
10071	AAC	IEEE 802.11ax (20MHz, MC82, 90pc duty cycle)	WLAN	9.59	+8.0
10072	AAC	IEEE 802.11ax (20MHz, MC82, 90pc duty cycle)	WLAN	8.61	+8.0
10073	AAC	IEEE 802.11ax (20MHz, MC82, 90pc duty cycle)	WLAN	9.76	+8.0
10074	AAC	IEEE 802.11ax (20MHz, MC82, 90pc duty cycle)	WLAN	8.74	+8.0
10075	AAC	IEEE 802.11ax (20MHz, MC82, 90pc duty cycle)	WLAN	8.00	+8.0
10076	AAC	IEEE 802.11ax (20MHz, MC82, 90pc duty cycle)	WLAN	8.17	+8.0
10077	AAC	IEEE 802.11ax (20MHz, MC82, 90pc duty cycle)	WLAN	9.73	+8.0
10078	AAC	IEEE 802.11ax (20MHz, MC82, 90pc duty cycle)	WLAN	8.78	+8.0
10079	AAC	IEEE 802.11ax (20MHz, MC82, 90pc duty cycle)	WLAN	8.29	+8.0
10080	AAC	IEEE 802.11ax (20MHz, MC82, 90pc duty cycle)	WLAN	8.50	+8.0
10081	AAC	IEEE 802.11ax (20MHz, MC82, 90pc duty cycle)	WLAN	8.03	+8.0
10082	AAC	IEEE 802.11ax (20MHz, MC82, 90pc duty cycle)	WLAN	8.23	+8.0
10083	AAC	IEEE 802.11ax (20MHz, MC82, 90pc duty cycle)	WLAN	8.42	+8.0
10084	AAC	IEEE 802.11ax (20MHz, MC82, 90pc duty cycle)	WLAN	8.26	+8.0
10085	AAC	IEEE 802.11ax (20MHz, MC82, 90pc duty cycle)	WLAN	8.33	+8.0
10086	AAC	IEEE 802.11ax (20MHz, MC82, 90pc duty cycle)	WLAN	8.28	+8.0

UID	Rev	Communication System Name	Group	Path dB	Line ^a E = 2
10887	AAC	IEEE 802.11ax (20 MHz, MCS9, 80pc duty cycle)	WLAN	8.45	±0.0
10886	AAC	IEEE 802.11ax (20 MHz, MCS8, 80pc duty cycle)	WLAN	8.39	±0.0
10889	AAC	IEEE 802.11ax (20 MHz, MCS7, 80pc duty cycle)	WLAN	8.25	±0.0
10890	AAC	IEEE 802.11ax (20 MHz, MCS6, 80pc duty cycle)	WLAN	8.28	±0.0
10891	AAC	IEEE 802.11ax (20 MHz, MCS5, 80pc duty cycle)	WLAN	8.30	±0.0
10892	AAC	IEEE 802.11ax (20 MHz, MCS4, 80pc duty cycle)	WLAN	8.29	±0.0
10893	AAC	IEEE 802.11ax (20 MHz, MCS3, 80pc duty cycle)	WLAN	8.25	±0.0
10894	AAC	IEEE 802.11ax (20 MHz, MCS2, 80pc duty cycle)	WLAN	8.57	±0.0
10895	AAC	IEEE 802.11ax (20 MHz, MCS1, 80pc duty cycle)	WLAN	8.78	±0.0
10896	AAC	IEEE 802.11ax (40 MHz, MCS9, 80pc duty cycle)	WLAN	8.41	±0.0
10897	AAC	IEEE 802.11ax (40 MHz, MCS8, 80pc duty cycle)	WLAN	8.31	±0.0
10898	AAC	IEEE 802.11ax (40 MHz, MCS7, 80pc duty cycle)	WLAN	8.38	±0.0
10899	AAC	IEEE 802.11ax (40 MHz, MCS6, 80pc duty cycle)	WLAN	8.32	±0.0
10900	AAC	IEEE 802.11ax (40 MHz, MCS5, 80pc duty cycle)	WLAN	8.38	±0.0
10901	AAC	IEEE 802.11ax (40 MHz, MCS4, 80pc duty cycle)	WLAN	8.36	±0.0
10902	AAC	IEEE 802.11ax (40 MHz, MCS3, 80pc duty cycle)	WLAN	8.30	±0.0
10903	AAC	IEEE 802.11ax (40 MHz, MCS2, 80pc duty cycle)	WLAN	8.39	±0.0
10904	AAC	IEEE 802.11ax (40 MHz, MCS1, 80pc duty cycle)	WLAN	8.56	±0.0
10905	AAC	IEEE 802.11ax (40 MHz, MCS9, 80pc duty cycle)	WLAN	8.43	±0.0
10906	AAC	IEEE 802.11ax (40 MHz, MCS8, 80pc duty cycle)	WLAN	8.38	±0.0
10907	AAC	IEEE 802.11ax (40 MHz, MCS7, 80pc duty cycle)	WLAN	8.31	±0.0
10908	AAC	IEEE 802.11ax (40 MHz, MCS6, 80pc duty cycle)	WLAN	8.38	±0.0
10909	AAC	IEEE 802.11ax (40 MHz, MCS5, 80pc duty cycle)	WLAN	8.33	±0.0
10910	AAC	IEEE 802.11ax (40 MHz, MCS4, 80pc duty cycle)	WLAN	8.29	±0.0
10911	AAC	IEEE 802.11ax (40 MHz, MCS3, 80pc duty cycle)	WLAN	8.39	±0.0
10912	AAC	IEEE 802.11ax (40 MHz, MCS2, 80pc duty cycle)	WLAN	8.46	±0.0
10913	AAC	IEEE 802.11ax (40 MHz, MCS1, 80pc duty cycle)	WLAN	8.66	±0.0
10914	AAC	IEEE 802.11ax (60 MHz, MCS9, 80pc duty cycle)	WLAN	8.47	±0.0
10915	AAC	IEEE 802.11ax (60 MHz, MCS8, 80pc duty cycle)	WLAN	8.49	±0.0
10916	AAC	IEEE 802.11ax (60 MHz, MCS7, 80pc duty cycle)	WLAN	8.59	±0.0
10917	AAC	IEEE 802.11ax (60 MHz, MCS6, 80pc duty cycle)	WLAN	8.55	±0.0
10918	AAC	IEEE 802.11ax (60 MHz, MCS5, 80pc duty cycle)	WLAN	8.34	±0.0
10919	AAC	IEEE 802.11ax (60 MHz, MCS4, 80pc duty cycle)	WLAN	8.31	±0.0
10920	AAC	IEEE 802.11ax (60 MHz, MCS3, 80pc duty cycle)	WLAN	8.37	±0.0
10921	AAC	IEEE 802.11ax (60 MHz, MCS2, 80pc duty cycle)	WLAN	8.36	±0.0
10922	AAC	IEEE 802.11ax (60 MHz, MCS1, 80pc duty cycle)	WLAN	8.51	±0.0
10923	AAC	IEEE 802.11ax (80 MHz, MCS9, 80pc duty cycle)	WLAN	8.70	±0.0
10924	AAC	IEEE 802.11ax (80 MHz, MCS8, 80pc duty cycle)	WLAN	8.80	±0.0
10925	AAC	IEEE 802.11ax (80 MHz, MCS7, 80pc duty cycle)	WLAN	8.74	±0.0
10926	AAC	IEEE 802.11ax (80 MHz, MCS6, 80pc duty cycle)	WLAN	8.75	±0.0
10927	AAC	IEEE 802.11ax (80 MHz, MCS5, 80pc duty cycle)	WLAN	8.66	±0.0
10928	AAC	IEEE 802.11ax (80 MHz, MCS4, 80pc duty cycle)	WLAN	8.65	±0.0
10929	AAC	IEEE 802.11ax (80 MHz, MCS3, 80pc duty cycle)	WLAN	8.64	±0.0
10930	AAC	IEEE 802.11ax (80 MHz, MCS2, 80pc duty cycle)	WLAN	8.67	±0.0
10931	AAC	IEEE 802.11ax (80 MHz, MCS1, 80pc duty cycle)	WLAN	8.82	±0.0
10932	AAC	IEEE 802.11ax (90 MHz, MCS9, 80pc duty cycle)	WLAN	8.58	±0.0
10933	AAC	IEEE 802.11ax (90 MHz, MCS8, 80pc duty cycle)	WLAN	8.55	±0.0
10934	AAC	IEEE 802.11ax (90 MHz, MCS7, 80pc duty cycle)	WLAN	8.53	±0.0
10935	AAC	IEEE 802.11ax (90 MHz, MCS6, 80pc duty cycle)	WLAN	8.56	±0.0
10936	AAC	IEEE 802.11ax (90 MHz, MCS5, 80pc duty cycle)	WLAN	8.57	±0.0
10937	AAC	IEEE 802.11ax (90 MHz, MCS4, 80pc duty cycle)	WLAN	8.38	±0.0
10938	AAC	IEEE 802.11ax (90 MHz, MCS3, 80pc duty cycle)	WLAN	8.42	±0.0
10939	AAC	IEEE 802.11ax (90 MHz, MCS2, 80pc duty cycle)	WLAN	8.40	±0.0
10940	AAC	IEEE 802.11ax (90 MHz, MCS1, 80pc duty cycle)	WLAN	8.60	±0.0
10941	AAC	IEEE 802.11ax (100 MHz, MCS9, 80pc duty cycle)	WLAN	8.65	±0.0
10942	AAC	IEEE 802.11ax (100 MHz, MCS8, 80pc duty cycle)	WLAN	8.62	±0.0
10943	AAC	IEEE 802.11ax (100 MHz, MCS7, 80pc duty cycle)	WLAN	8.63	±0.0
10944	AAC	IEEE 802.11ax (100 MHz, MCS6, 80pc duty cycle)	WLAN	8.67	±0.0
10945	AAC	IEEE 802.11ax (100 MHz, MCS5, 80pc duty cycle)	WLAN	8.38	±0.0
10946	AAC	IEEE 802.11ax (100 MHz, MCS4, 80pc duty cycle)	WLAN	8.41	±0.0
10947	AAC	IEEE 802.11ax (100 MHz, MCS3, 80pc duty cycle)	WLAN	8.43	±0.0
10948	AAC	IEEE 802.11ax (100 MHz, MCS2, 80pc duty cycle)	WLAN	8.54	±0.0
10949	AAC	IEEE 802.11ax (100 MHz, MCS1, 80pc duty cycle)	WLAN	8.66	±0.0
10950	AAC	IEEE 802.11ax (100 MHz, MCS9, 80pc duty cycle)	WLAN	8.64	±0.0
10951	AAC	IEEE 802.11ax (100 MHz, MCS8, 80pc duty cycle)	WLAN	8.70	±0.0
10952	AAC	IEEE 802.11ax (100 MHz, MCS7, 80pc duty cycle)	WLAN	8.62	±0.0
10953	AAC	IEEE 802.11ax (100 MHz, MCS6, 80pc duty cycle)	WLAN	8.61	±0.0

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

EX3DW4-SN7823

July 31, 2024

Centers No. EX-7823 Ju94

Page 19 of 22

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

除非另有說明，此報名表格僅對測試之樣品有效，同時此樣品僅保留90天。報名表本公會由計，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

EX3DV4 - SN:7823

July 31, 2024

Unit	Rev	Communication System Name	Group	IPWR (dB)	Unit ² # = 2
10839	AAE	5G NR (CP-OFDM, 100% RB, 100MHz, QPSK, 30 kHz)	5G NR FRI TDD	8.49	±0.6
10840	AAE	5G NR (CP-OFDM, 1 RB, 10MHz, QPSK, 40 kHz)	5G NR FRI TDD	7.93	±0.6
10841	AAE	5G NR (CP-OFDM, 1 RB, 10MHz, QPSK, 60 kHz)	5G NR FRI TDD	7.78	±0.6
10842	AAE	5G NR (CP-OFDM, 1 RB, 20MHz, QPSK, 60 kHz)	5G NR FRI TDD	7.74	±0.6
10843	AAE	5G NR (CP-OFDM, 1 RB, 20MHz, QPSK, 90 kHz)	5G NR FRI TDD	7.70	±0.6
10844	AAE	5G NR (CP-OFDM, 1 RB, 30MHz, QPSK, 90 kHz)	5G NR FRI TDD	7.76	±0.6
10845	AAE	5G NR (CP-OFDM, 1 RB, 40MHz, QPSK, 90 kHz)	5G NR FRI TDD	7.76	±0.6
10846	AAE	5G NR (CP-OFDM, 1 RB, 50MHz, QPSK, 90 kHz)	5G NR FRI TDD	7.76	±0.6
10847	AAE	5G NR (CP-OFDM, 1 RB, 60MHz, QPSK, 90 kHz)	5G NR FRI TDD	7.76	±0.6
10848	AAE	5G NR (CP-OFDM, 1 RB, 80MHz, QPSK, 90 kHz)	5G NR FRI TDD	7.70	±0.6
10849	AAE	5G NR (CP-OFDM, 1 RB, 100MHz, QPSK, 90 kHz)	5G NR FRI TDD	7.71	±0.6
10850	AAE	5G NR (CP-OFDM, 1 RB, 100MHz, QPSK, 95 kHz)	5G NR FRI TDD	8.49	±0.6
10851	AAE	5G NR (CP-OFDM, 1 RB, 100MHz, QPSK, 95 kHz)	5G NR FRI TDD	8.34	±0.6
10852	AAE	5G NR (CP-OFDM, 1 RB, 100MHz, QPSK, 95 kHz)	5G NR FRI TDD	8.41	±0.6
10853	AAE	5G NR (CP-OFDM, 1 RB, 100MHz, QPSK, 95 kHz)	5G NR FRI TDD	8.34	±0.6
10854	AAE	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 60 kHz)	5G NR FRI TDD	8.38	±0.6
10855	AAE	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 60 kHz)	5G NR FRI TDD	8.35	±0.6
10856	AAE	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 60 kHz)	5G NR FRI TDD	8.36	±0.6
10857	AAE	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 60 kHz)	5G NR FRI TDD	8.35	±0.6
10858	AAE	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 60 kHz)	5G NR FRI TDD	8.34	±0.6
10859	AAE	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 60 kHz)	5G NR FRI TDD	8.41	±0.6
10860	AAE	5G NR (CP-OFDM, 100% RB, 60 MHz, QPSK, 60 kHz)	5G NR FRI TDD	8.43	±0.6
10861	AAE	5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 60 kHz)	5G NR FRI TDD	8.37	±0.6
10862	AAE	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 60 kHz)	5G NR FRI TDD	8.41	±0.6
10863	AAE	5G NR (CP-OFDM, 100% RB, 100MHz, QPSK, 60 kHz)	5G NR FRI TDD	8.48	±0.6
10864	AAE	5G NR (CP-OFDM, 100% RB, 100MHz, QPSK, 60 kHz)	5G NR FRI TDD	8.49	±0.6
10865	AAE	5G NR (CP-OFDM, 100% RB, 100MHz, QPSK, 60 kHz)	5G NR FRI TDD	8.41	±0.6
10866	AAE	5G NR (CP-OFDM, 100% RB, 100MHz, QPSK, 60 kHz)	5G NR FRI TDD	8.43	±0.6
10867	AAE	5G NR (CP-OFDM, 100% RB, 100MHz, QPSK, 60 kHz)	5G NR FRI TDD	8.41	±0.6
10868	AAE	5G NR (CP-OFDM, 100% RB, 100MHz, QPSK, 60 kHz)	5G NR FRI TDD	8.43	±0.6
10869	AAE	5G NR (CP-OFDM, 100% RB, 100MHz, QPSK, 60 kHz)	5G NR FRI TDD	8.43	±0.6
10870	AAE	5G NR (CP-OFDM, 100% RB, 100MHz, QPSK, 60 kHz)	5G NR FRI TDD	8.46	±0.6
10871	AAE	5G NR (CP-OFDM, 1 RB, 100MHz, QPSK, 120 kHz)	5G NR FRI TDD	9.75	±0.6
10872	AAE	5G NR (CP-OFDM, 1 RB, 100MHz, QPSK, 120 kHz)	5G NR FRI TDD	9.50	±0.6
10873	AAE	5G NR (CP-OFDM, 1 RB, 100MHz, QPSK, 120 kHz)	5G NR FRI TDD	9.61	±0.6
10874	AAE	5G NR (CP-OFDM, 1 RB, 100MHz, QPSK, 120 kHz)	5G NR FRI TDD	9.46	±0.6
10875	AAE	5G NR (CP-OFDM, 1 RB, 100MHz, QPSK, 120 kHz)	5G NR FRI TDD	7.78	±0.6
10876	AAE	5G NR (CP-OFDM, 1 RB, 100MHz, QPSK, 120 kHz)	5G NR FRI TDD	8.59	±0.6
10877	AAE	5G NR (CP-OFDM, 1 RB, 100MHz, QPSK, 120 kHz)	5G NR FRI TDD	7.95	±0.6
10878	AAE	5G NR (CP-OFDM, 1 RB, 100MHz, QPSK, 120 kHz)	5G NR FRI TDD	8.41	±0.6
10879	AAE	5G NR (CP-OFDM, 1 RB, 100MHz, QPSK, 120 kHz)	5G NR FRI TDD	8.12	±0.6
10880	AAE	5G NR (CP-OFDM, 100% RB, 64QAM, 120 kHz)	5G NR FRI TDD	8.38	±0.6
10881	AAE	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz)	5G NR FRI TDD	8.75	±0.6
10882	AAE	5G NR (CP-OFDM, 100% RB, 64MHz, QPSK, 120 kHz)	5G NR FRI TDD	6.96	±0.6
10883	AAE	5G NR (CP-OFDM, 1 RB, 60MHz, QPSK, 120 kHz)	5G NR FRI TDD	6.57	±0.6
10884	AAE	5G NR (CP-OFDM, 1 RB, 80MHz, QPSK, 120 kHz)	5G NR FRI TDD	6.53	±0.6
10885	AAE	5G NR (CP-OFDM, 1 RB, 90MHz, QPSK, 120 kHz)	5G NR FRI TDD	6.61	±0.6
10886	AAE	5G NR (CP-OFDM, 1 RB, 100MHz, QPSK, 120 kHz)	5G NR FRI TDD	6.66	±0.6
10887	AAE	5G NR (CP-OFDM, 1 RB, 100MHz, QPSK, 120 kHz)	5G NR FRI TDD	7.78	±0.6
10888	AAE	5G NR (CP-OFDM, 1 RB, 100MHz, QPSK, 120 kHz)	5G NR FRI TDD	8.35	±0.6
10889	AAE	5G NR (CP-OFDM, 1 RB, 100MHz, QPSK, 120 kHz)	5G NR FRI TDD	8.00	±0.6
10890	AAE	5G NR (CP-OFDM, 1 RB, 100MHz, QPSK, 120 kHz)	5G NR FRI TDD	8.40	±0.6
10891	AAE	5G NR (CP-OFDM, 1 RB, 100MHz, QPSK, 120 kHz)	5G NR FRI TDD	8.18	±0.6
10892	AAE	5G NR (CP-OFDM, 1 RB, 100MHz, QPSK, 120 kHz)	5G NR FRI TDD	8.41	±0.6
10893	AAE	5G NR (CP-OFDM, 1 RB, 100MHz, QPSK, 120 kHz)	5G NR FRI TDD	8.46	±0.6
10894	AAE	5G NR (CP-OFDM, 1 RB, 100MHz, QPSK, 120 kHz)	5G NR FRI TDD	8.48	±0.6
10895	AAE	5G NR (CP-OFDM, 1 RB, 100MHz, QPSK, 120 kHz)	5G NR FRI TDD	8.48	±0.6
10896	AAE	5G NR (CP-OFDM, 1 RB, 100MHz, QPSK, 120 kHz)	5G NR FRI TDD	8.48	±0.6
10897	AAE	5G NR (CP-OFDM, 1 RB, 100MHz, QPSK, 120 kHz)	5G NR FRI TDD	8.48	±0.6
10898	AAE	5G NR (CP-OFDM, 1 RB, 100MHz, QPSK, 120 kHz)	5G NR FRI TDD	8.48	±0.6
10899	AAE	5G NR (CP-OFDM, 1 RB, 100MHz, QPSK, 120 kHz)	5G NR FRI TDD	8.48	±0.6
10900	AAE	5G NR (CP-OFDM, 1 RB, 100MHz, QPSK, 120 kHz)	5G NR FRI TDD	8.48	±0.6

Certificate No: EX-7823_Jul24

Page 20 of 22

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路134號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

UID	Rev	Communication System Name	Group	IMR (dB)	Unit ^F # = 2
10011	AAA	SG NR (DFT-s-OFDM, 50% RB, 25MHz, QPSK, 30MHz)	SG NR FRI TDD	5.23	±0.5
10012	AAA	SG NR (DFT-s-OFDM, 50% RB, 30MHz, QPSK, 30MHz)	SG NR FRI TDD	5.64	±0.5
10013	AAA	SG NR (DFT-s-OFDM, 50% RB, 30MHz, QPSK, 30MHz)	SG NR FRI TDD	5.64	±0.5
10014	AAA	SG NR (DFT-s-OFDM, 50% RB, 30MHz, QPSK, 30MHz)	SG NR FRI TDD	5.65	±0.5
10015	AAA	SG NR (DFT-s-OFDM, 50% RB, 30MHz, QPSK, 30MHz)	SG NR FRI TDD	5.65	±0.5
10016	AAA	SG NR (DFT-s-OFDM, 50% RB, 30MHz, QPSK, 30MHz)	SG NR FRI TDD	5.67	±0.5
10017	AAA	SG NR (DFT-s-OFDM, 50% RB, 30MHz, QPSK, 30MHz)	SG NR FRI TDD	5.64	±0.5
10018	AAA	SG NR (DFT-s-OFDM, 100% RB, 30MHz, QPSK, 30MHz)	SG NR FRI TDD	5.86	±0.5
10019	AAA	SG NR (DFT-s-OFDM, 100% RB, 30MHz, QPSK, 30MHz)	SG NR FRI TDD	5.86	±0.5
10020	AAA	SG NR (DFT-s-OFDM, 100% RB, 30MHz, QPSK, 30MHz)	SG NR FRI TDD	5.86	±0.5
10021	AAA	SG NR (DFT-s-OFDM, 100% RB, 30MHz, QPSK, 30MHz)	SG NR FRI TDD	5.87	±0.5
10022	AAA	SG NR (DFT-s-OFDM, 100% RB, 30MHz, QPSK, 30MHz)	SG NR FRI TDD	5.87	±0.5
10023	AAA	SG NR (DFT-s-OFDM, 100% RB, 30MHz, QPSK, 30MHz)	SG NR FRI TDD	5.87	±0.5
10024	AAA	SG NR (DFT-s-OFDM, 100% RB, 40MHz, QPSK, 30MHz)	SG NR FRI TDD	5.84	±0.5
10025	AAA	SG NR (DFT-s-OFDM, 100% RB, 50MHz, QPSK, 30MHz)	SG NR FRI TDD	5.85	±0.5
10026	AAA	SG NR (DFT-s-OFDM, 100% RB, 60MHz, QPSK, 30MHz)	SG NR FRI TDD	5.84	±0.5
10027	AAA	SG NR (DFT-s-OFDM, 100% RB, 80MHz, QPSK, 30MHz)	SG NR FRI TDD	5.84	±0.5
10028	AAA	SG NR (DFT-s-OFDM, 1RB, 4MHz, QPSK, 15MHz)	SG NR FRI FDD	8.92	±0.5
10029	AAA	SG NR (DFT-s-OFDM, 1RB, 12MHz, QPSK, 15MHz)	SG NR FRI FDD	8.92	±0.5
10030	AAA	SG NR (DFT-s-OFDM, 1RB, 20MHz, QPSK, 15MHz)	SG NR FRI FDD	8.92	±0.5
10031	AAA	SG NR (DFT-s-OFDM, 1RB, 28MHz, QPSK, 15MHz)	SG NR FRI FDD	8.91	±0.5
10032	AAA	SG NR (DFT-s-OFDM, 1RB, 36MHz, QPSK, 15MHz)	SG NR FRI FDD	8.91	±0.5
10033	AAA	SG NR (DFT-s-OFDM, 1RB, 44MHz, QPSK, 15MHz)	SG NR FRI FDD	8.91	±0.5
10034	AAA	SG NR (DFT-s-OFDM, 1RB, 52MHz, QPSK, 15MHz)	SG NR FRI FDD	8.91	±0.5
10035	AAA	SG NR (DFT-s-OFDM, 1RB, 60MHz, QPSK, 15MHz)	SG NR FRI FDD	8.91	±0.5
10036	AAA	SG NR (DFT-s-OFDM, 1RB, 78MHz, QPSK, 15MHz)	SG NR FRI FDD	8.91	±0.5
10037	AAA	SG NR (DFT-s-OFDM, 1RB, 86MHz, QPSK, 15MHz)	SG NR FRI FDD	8.91	±0.5
10038	AAA	SG NR (DFT-s-OFDM, 1RB, 94MHz, QPSK, 15MHz)	SG NR FRI FDD	8.91	±0.5
10039	AAA	SG NR (DFT-s-OFDM, 1RB, 102MHz, QPSK, 15MHz)	SG NR FRI FDD	8.91	±0.5
10040	AAA	SG NR (DFT-s-OFDM, 1RB, 110MHz, QPSK, 15MHz)	SG NR FRI FDD	8.91	±0.5
10041	AAA	SG NR (DFT-s-OFDM, 30% RB, 30MHz, QPSK, 15MHz)	SG NR FRI FDD	5.83	±0.5
10042	AAA	SG NR (DFT-s-OFDM, 1RB, 4MHz, QPSK, 15MHz)	SG NR FRI FDD	5.83	±0.5
10043	AAA	SG NR (DFT-s-OFDM, 50% RB, 5MHz, QPSK, 15MHz)	SG NR FRI FDD	5.83	±0.5
10044	AAA	SG NR (DFT-s-OFDM, 50% RB, 10MHz, QPSK, 15MHz)	SG NR FRI FDD	5.83	±0.5
10045	AAA	SG NR (DFT-s-OFDM, 100% RB, 12MHz, QPSK, 15MHz)	SG NR FRI FDD	5.85	±0.5
10046	AAA	SG NR (DFT-s-OFDM, 100% RB, 16MHz, QPSK, 15MHz)	SG NR FRI FDD	5.83	±0.5
10047	AAA	SG NR (DFT-s-OFDM, 100% RB, 20MHz, QPSK, 15MHz)	SG NR FRI FDD	5.83	±0.5
10048	AAA	SG NR (DFT-s-OFDM, 100% RB, 25MHz, QPSK, 15MHz)	SG NR FRI FDD	5.84	±0.5
10049	AAA	SG NR (DFT-s-OFDM, 100% RB, 30MHz, QPSK, 15MHz)	SG NR FRI FDD	5.84	±0.5
10050	AAA	SG NR (DFT-s-OFDM, 100% RB, 35MHz, QPSK, 15MHz)	SG NR FRI FDD	5.84	±0.5
10051	AAA	SG NR (DFT-s-OFDM, 100% RB, 40MHz, QPSK, 15MHz)	SG NR FRI FDD	5.84	±0.5
10052	AAA	SG NR (DFT-s-OFDM, 100% RB, 50MHz, QPSK, 15MHz)	SG NR FRI FDD	5.85	±0.5
10053	AAA	SG NR DL (CP-OFDM, TM 3.1, 10MHz, 64-QAM, 15MHz)	SG NR FRI FDD	6.16	±0.5
10054	AAA	SG NR DL (CP-OFDM, TM 3.1, 10MHz, 64-QAM, 15MHz)	SG NR FRI FDD	6.23	±0.5
10055	AAA	SG NR DL (CP-OFDM, TM 3.1, 10MHz, 64-QAM, 15MHz)	SG NR FRI FDD	6.23	±0.5
10056	AAA	SG NR DL (CP-OFDM, TM 3.1, 10MHz, 64-QAM, 15MHz)	SG NR FRI FDD	6.23	±0.5
10057	AAA	SG NR DL (CP-OFDM, TM 3.1, 10MHz, 64-QAM, 15MHz)	SG NR FRI FDD	6.23	±0.5
10058	AAA	SG NR DL (CP-OFDM, TM 3.1, 10MHz, 64-QAM, 15MHz)	SG NR FRI FDD	6.23	±0.5
10059	AAA	SG NR DL (CP-OFDM, TM 3.1, 10MHz, 64-QAM, 15MHz)	SG NR FRI FDD	6.23	±0.5
10060	AAA	SG NR DL (CP-OFDM, TM 3.1, 10MHz, 64-QAM, 15MHz)	SG NR FRI FDD	6.23	±0.5
10061	AAA	SG NR DL (CP-OFDM, TM 3.1, 10MHz, 64-QAM, 15MHz)	SG NR FRI FDD	6.23	±0.5
10062	AAA	SG NR DL (CP-OFDM, TM 3.1, 10MHz, 64-QAM, 15MHz)	SG NR FRI FDD	6.23	±0.5
10063	AAA	SG NR DL (CP-OFDM, TM 3.1, 10MHz, 64-QAM, 15MHz)	SG NR FRI FDD	6.23	±0.5
10064	AAA	SG NR DL (CP-OFDM, TM 3.1, 10MHz, 64-QAM, 15MHz)	SG NR FRI FDD	6.23	±0.5
10065	AAA	SG NR DL (CP-OFDM, TM 3.1, 10MHz, 64-QAM, 15MHz)	SG NR FRI FDD	6.23	±0.5
10066	AAA	SG NR DL (CP-OFDM, TM 3.1, 10MHz, 64-QAM, 15MHz)	SG NR FRI FDD	6.23	±0.5
10067	AAA	SG NR DL (CP-OFDM, TM 3.1, 10MHz, 64-QAM, 15MHz)	SG NR FRI FDD	6.23	±0.5
10068	AAA	SG NR DL (CP-OFDM, TM 3.1, 10MHz, 64-QAM, 15MHz)	SG NR FRI FDD	6.23	±0.5
10069	AAA	SG NR DL (CP-OFDM, TM 3.1, 10MHz, 64-QAM, 15MHz)	SG NR FRI FDD	6.23	±0.5
10070	AAA	SG NR DL (CP-OFDM, TM 3.1, 10MHz, 64-QAM, 15MHz)	SG NR FRI FDD	6.23	±0.5
10071	AAA	SG NR DL (CP-OFDM, TM 3.1, 10MHz, 64-QAM, 15MHz)	SG NR FRI FDD	6.23	±0.5
10072	AAA	SG NR DL (CP-OFDM, TM 3.1, 10MHz, 64-QAM, 15MHz)	SG NR FRI FDD	6.23	±0.5
10073	AAA	SG NR DL (CP-OFDM, TM 3.1, 10MHz, 64-QAM, 15MHz)	SG NR FRI FDD	6.23	±0.5
10074	AAA	SG NR DL (CP-OFDM, TM 3.1, 10MHz, 64-QAM, 15MHz)	SG NR FRI FDD	6.23	±0.5
10075	AAA	ULLA 10MHz	ULLA	1.18	±0.5
10076	AAA	ULLA 10MHz	ULLA	6.38	±0.5
10077	AAA	ULLA 10MHz	ULLA	10.31	±0.5
10078	AAA	ULLA 10MHz	ULLA	9.18	±0.5
10079	AAA	ULLA 10MHz	ULLA	9.48	±0.5

Unit	Rev	Communication System Name	Group	PAIR (dB)	Unit ^F E = 2
10469	AAC	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	0.21	±3.5
10464	AAB	5G NR DL (CP-OFDM, TM 3.1, 80 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	0.42	±3.5
10386	AAC	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	0.54	±3.5
10386	AAB	5G NR DL (CP-OFDM, TM 3.1, 80 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	0.56	±3.5
10467	AAC	5G NR DL (CP-OFDM, TM 3.1, 80 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	0.63	±3.5
10468	AAB	5G NR DL (CP-OFDM, TM 3.1, 80 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	0.63	±3.5
10469	AAB	5G NR DL (CP-OFDM, TM 3.1, 80 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	0.63	±3.5
10480	AAB	5G NR DL (CP-OFDM, TM 3.1, 80 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	0.63	±3.5
10599	AAB	5G NR DL (CP-OFDM, TM 3.1, 80 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	0.63	±3.5
11003	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	0.24	±3.5
11004	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	0.73	±3.5
11005	AAA	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	0.70	±3.5
11005	AAC	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	0.70	±3.5
11006	AAC	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	0.70	±3.5
11007	AAC	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	0.48	±3.5
11008	AAC	5G NR DL (CP-OFDM, TM 3.1, 50 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	0.51	±3.5
11008	AAC	5G NR DL (CP-OFDM, TM 3.1, 50 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	0.56	±3.5
11009	AAC	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	0.56	±3.5
11010	AAC	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	0.56	±3.5
11011	AAC	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	0.56	±3.5
11012	AAC	5G NR DL (CP-OFDM, TM 3.1, 50 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	0.56	±3.5
11013	AAC	IEEE 802.11ax (220 MHz, MU8, 9980 duty cycle)	WLAN	0.47	±3.5
11014	AAC	IEEE 802.11ax (320 MHz, MU8, 9980 duty cycle)	WLAN	0.49	±3.5
11015	AAC	IEEE 802.11ax (320 MHz, MU8, 9980 duty cycle)	WLAN	0.44	±3.5
11016	AAC	IEEE 802.11ax (320 MHz, MU8, 9980 duty cycle)	WLAN	0.44	±3.5
11017	AAC	IEEE 802.11ax (320 MHz, MU8, 9980 duty cycle)	WLAN	0.41	±3.5
11018	AAC	IEEE 802.11ax (320 MHz, MU8, 9980 duty cycle)	WLAN	0.45	±3.5
11019	AAC	IEEE 802.11ax (320 MHz, MU8, 9980 duty cycle)	WLAN	0.29	±3.5
11020	AAC	IEEE 802.11ax (320 MHz, MU8, 9980 duty cycle)	WLAN	0.27	±3.5
11021	AAC	IEEE 802.11ax (320 MHz, MU8, 9980 duty cycle)	WLAN	0.48	±3.5
11022	AAC	IEEE 802.11ax (320 MHz, MU8, 9980 duty cycle)	WLAN	0.36	±3.5
11023	AAC	IEEE 802.11ax (320 MHz, MU8, 9980 duty cycle)	WLAN	0.09	±3.5
11024	AAC	IEEE 802.11ax (320 MHz, MU8, 9980 duty cycle)	WLAN	0.40	±3.5
11025	AAC	IEEE 802.11ax (320 MHz, MU8, 9980 duty cycle)	WLAN	0.47	±3.5
11026	AAC	IEEE 802.11ax (320 MHz, MU8, 9980 duty cycle)	WLAN	0.29	±3.5

F: Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

- End of report -

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.