

TEST REPORT

of the accredited test laboratory

TÜV Nr.:M/FG-11/113

:
Deutschstraße 10
A-1230 Vienna
Tel.:
+43(0)1 610 91-0
pzw@tuv.at

Division:
Medical Technology/
Communication
Technology/ EMC

Department:
Testing Body for
Communication
Technology/ EMC

TÜV®

Applicant: ADCON TELEMETRY GmbH
Inkustraße 24
A-3400 Klosterneuburg

Tested Product: UHF telemetry transceiver

FCC-ID: SHXA752-46

IC-ID: 3606A-A75246

Manufacturer: ADCON TELEMETRY GmbH
Inkustraße 24
A-3400 Klosterneuburg

Output power / 471 mW max. **power supply:** 6,2 VDC
field strength: e.r.p.

Frequency range: 460 - 470 MHz **Channel separation:** 12,5 kHz

Standard: FCC: 47 CFR 90 10-1-09 Edition;
RSS-119 Issue 11 (June 2011)



Testing Laboratory,
Inspection Body,
Certification Body,
Calibration Laboratory

Notified Body 0408
IC 2932K-1

Chairman of the
Supervisory Board:
KR Dipl.-Ing. Johann
MARIHART

Management:
Dipl.-Ing. Dr. Hugo
EBERHARDT
Mag. Christoph
WENNINGER

Registered Office:
Krugerstrasse 16
1015 Vienna/Austria

Branch Office:
Dornbirn, Graz,
Innsbruck, Klagenfurt,
Linz, Salzburg, St. Pölz
Wels, Wien 1, Wien 2C
Wien 23, Brixen (I) und
Filderstadt (D)

Company Register
Court / - Number:
Vienna / FN 288476 f

Banking Connections
BA CA 52949 001 066
IBAN
AT131200052949001C
BIC BKAUATWW
RBI 001-04.093.282
IBAN
AT1531000001040932
BIC RZBAATWW

UID ATU63240488
DVR 3002476

TUV Austria SERVICES GMBH
Test laboratory for EMC

Deputy
Supervisor of EMC-laboratory:

Ing. Michael Emminger



27.10.2011

Copy Nbr.: 01

checked by:

Ing. Stefan Matzner

A publication of this test report is only permitted literally.
Copying or reproduction of partial sections needs a written permission of
TUV Austria SERVICES GMBH.

The results of this test report only refer to the provided equipment.

LIST OF MEASUREMENTS

The complete list of measurements called for in 47 CFR 90 and (RSS-119) is given below.

SUBCLAUSE	PARAMETER TO BE MEASURED	PAGE
	Intentional Radiators	
	Test object data	3
2.1046(a) (5.4)	RF Power Output	4-5
90.210(d) (5.5)	Emission Mask D	6-18
2.1051 (5.8)	Spurious conducted emissions	19-20
2.1053 (5.8.3)	Field strength of spurious emissions of the transmitter	21-30
90.213 (5.3)	Frequency stability	31-32
90.214 (5.9)	Transient frequency behaviour	33-39
(5.11)	Receiver spurious emissions	40-49
(7.2.4 RSS-Gen)	Transmitter and Receiver AC Power Lines Conducted Emission	50-51

TEST OBJECT DATA

General EUT Description

This telemetry device will be used to collect data from various sensors and transmit it on UHF to other stations. This telemetry device will be situated in environment where normally no persons are situated and will work without user interaction.

3.3 There is no data port allowing direct modulation of the transmitter.

5.2 Type of emission: 9K00F1D – channel spacing 12,5 kHz (selectable stepsize: 6,25 kHz / 12,5 kHz / 25 kHz)

The maximum symbol rate is 4000 symbols per second (2kHz maximum modulation frequency).
The maximum frequency deviation is set to 2,5 kHz (nominal 2,3kHz with $\pm 0,2$ kHz tolerance)
With $k=1$ the necessary bandwidth is calculated as: $B_N = 2M + 2DK = 4000 + 5000 = 9\text{kHz}$.

Details of the modulation scheme can be found in chapter 2.1.1 of the hardware description.

Frequency range: 460 – 470 MHz

Power range and Controls: There are NO user power controls, the output power is fixed to 500mW.

Maximum output power rating: 500 mW into whip antenna

DC Voltage and Current: 6,2 V nominal 10V maximum (internal battery)
maximum current consumption: 0,68A

For radiated measurements and AC power line conducted measurements a typical configuration was set up to demonstrate compliance in normal operation configuration:

The telemetry device was mounted at top of the normally used vertical mast of 1,5m height. The solar cell was mounted in the same height on the backside of the telemetry device and connected to it. The normally used antenna was directly connected to the device. A combined temperature/humidity sensor was connected to the device.

This setup is referred as "EUT" in the description of test setups.

The measurement of the transmitter output power was made both conducted and radiated. The antennae used for radiated measurements were that supplied with the equipment when sold. In case of damage or for other reasons antennae should be replaced with same antenna type only.

Date of tests: 16th and 17th March 2011.

Power Output

§ 5.4

Rated output power: 500mW

Radiated Measurement


Test conditions		Transmitter power (mW)		
		460 MHz	465 MHz	470 MHz
T _{nom} (22)°C	V _{nom} (6,2)V	462	452	444
Maximum deviation from output power under normal test conditions (dB)		-0,34	-0,44	-0,52
Measurement uncertainty		± 0,75 dB		

LIMIT

SUBCLAUSE 5.4

Under normal test conditions	± 1 dB
------------------------------	--------

Test equipment used:

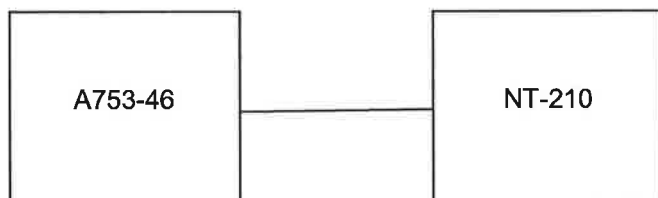

Power Output

§ 5.4

Rated output power: 500mW

Conducted Measurement


Test conditions		Transmitter power (mW)		
		460 MHz	465 MHz	470 MHz
T_{nom} (22)°C	V_{nom} (6,2)V	456	471	445
Maximum deviation from output power under normal test conditions (dB)		-0,40	-0,26	-0,51
Measurement uncertainty		$\pm 4,0$ dB		

LIMIT

SUBCLAUSE 5.4

Under normal test conditions	± 1 dB
------------------------------	------------

Test equipment used:

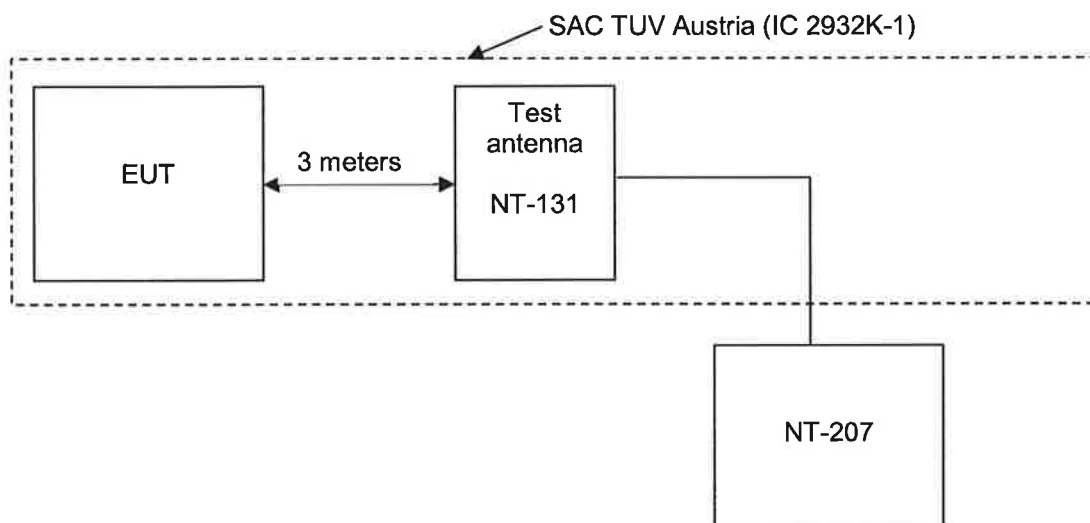

Emissions Mask D

§ 5.5

LIMIT

5.5 and 5.8.3:


For transmitters designed to operate with a 12,5 kHz channel bandwidth in the frequency range 450-470 MHz, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

(1) On any frequency from the center of the authorized bandwidth f_0 to 5,625 kHz removed from f_0 :
Zero dB.

(2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5,625 kHz but no more than 12,5 kHz: At least $7,27(f_d - 2,88 \text{ kHz})$ dB.

(3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12,5 kHz: At least $50 + 10 \log(P)$ dB or 70 dB, whichever is the lesser attenuation.

Test equipment used:

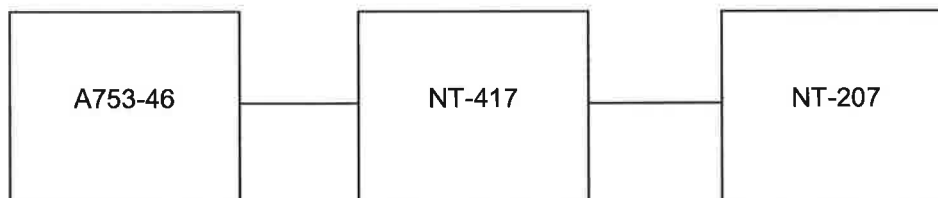


Emissions Mask D

§ 5.5

Operating mode:

Frequency: 460 MHz

Modulation: unmodulated carrier

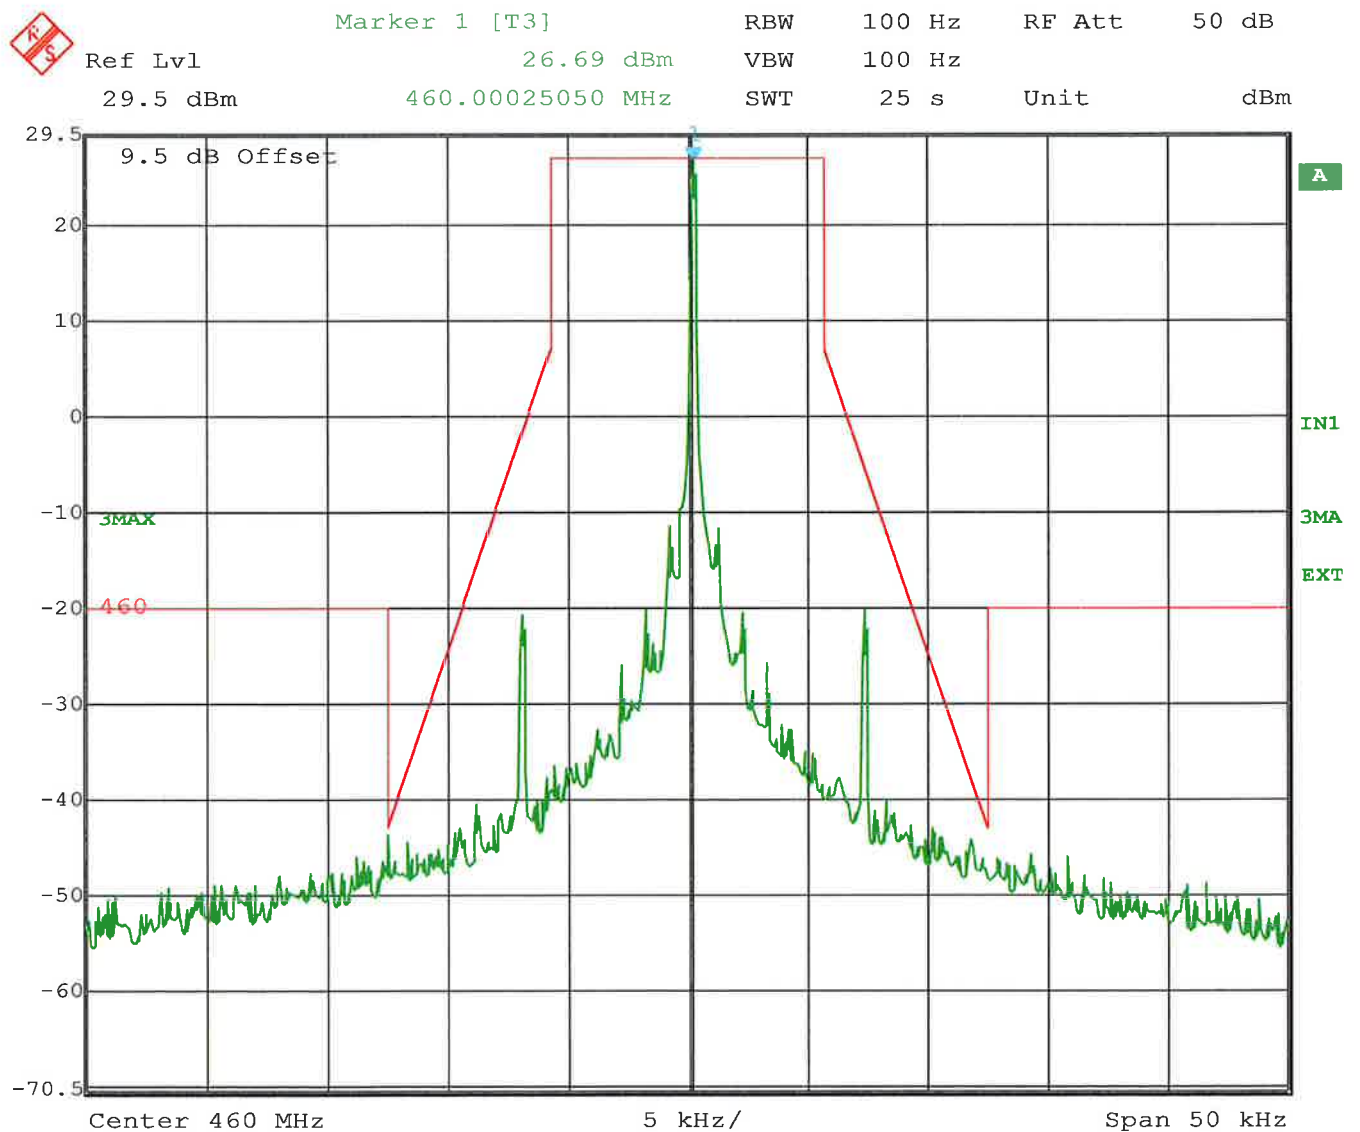

Date: 16.MAR.2011 09:41:51


Emissions Mask D

§ 5.5

Operating mode:

Frequency: 460 MHz

Modulation: modulated carrier symbol 0 (2 kHz)

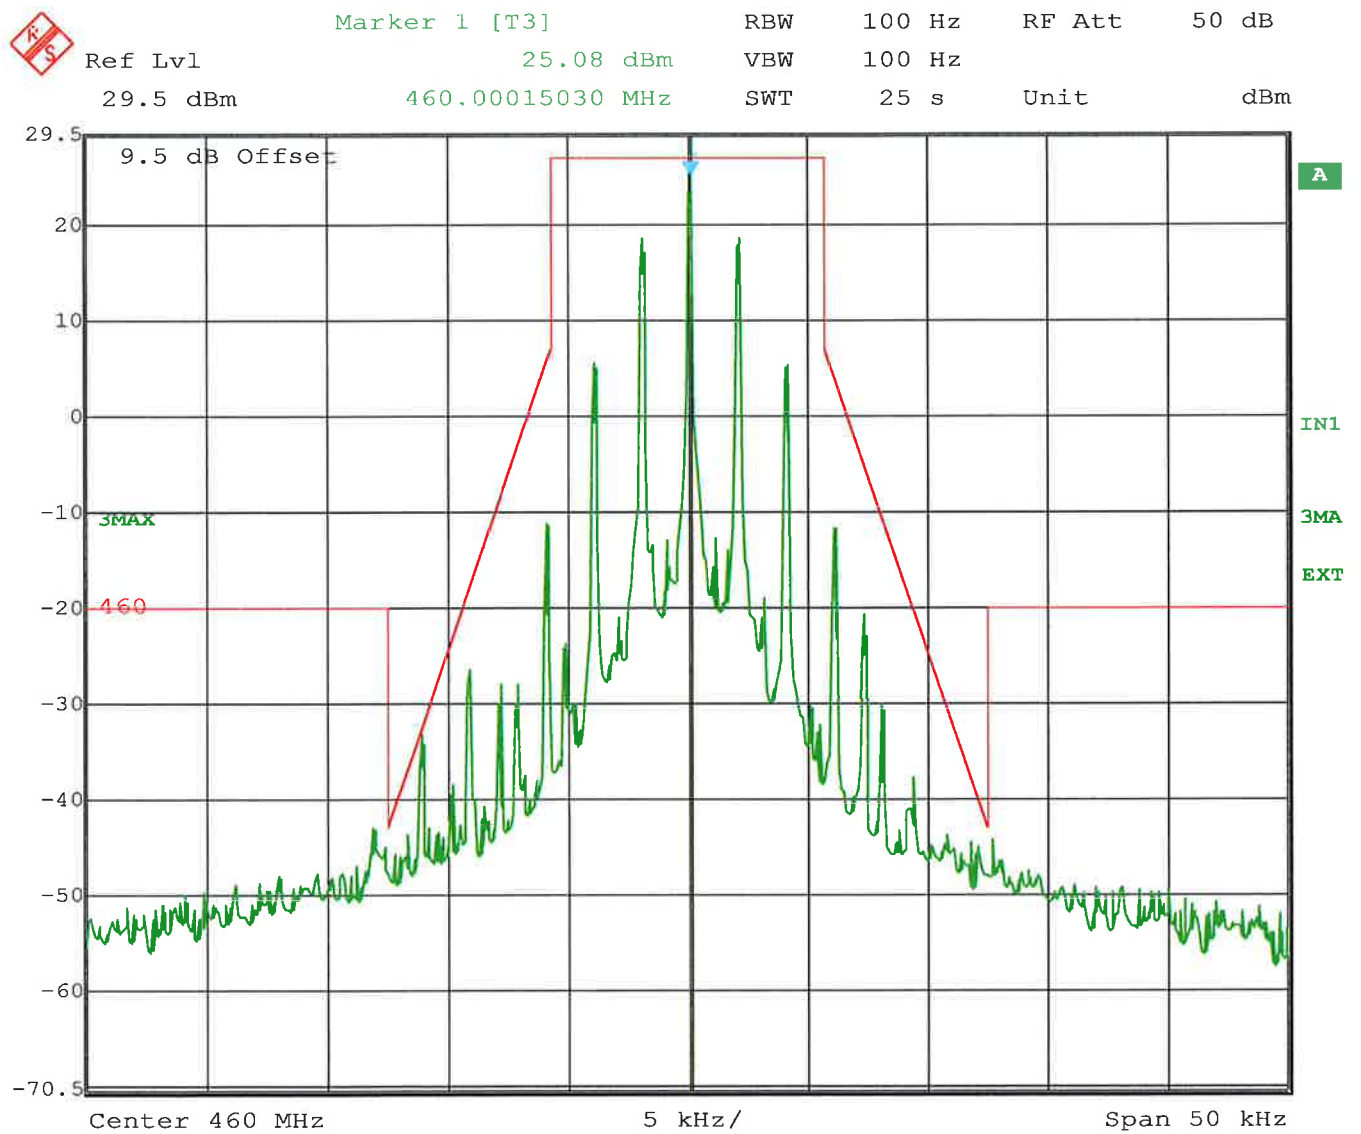

Date: 16.MAR.2011 09:47:35


Emissions Mask D

§ 5.5

Operating mode:

Frequency: 460 MHz

Modulation: modulated carrier symbol 1 (1 kHz)

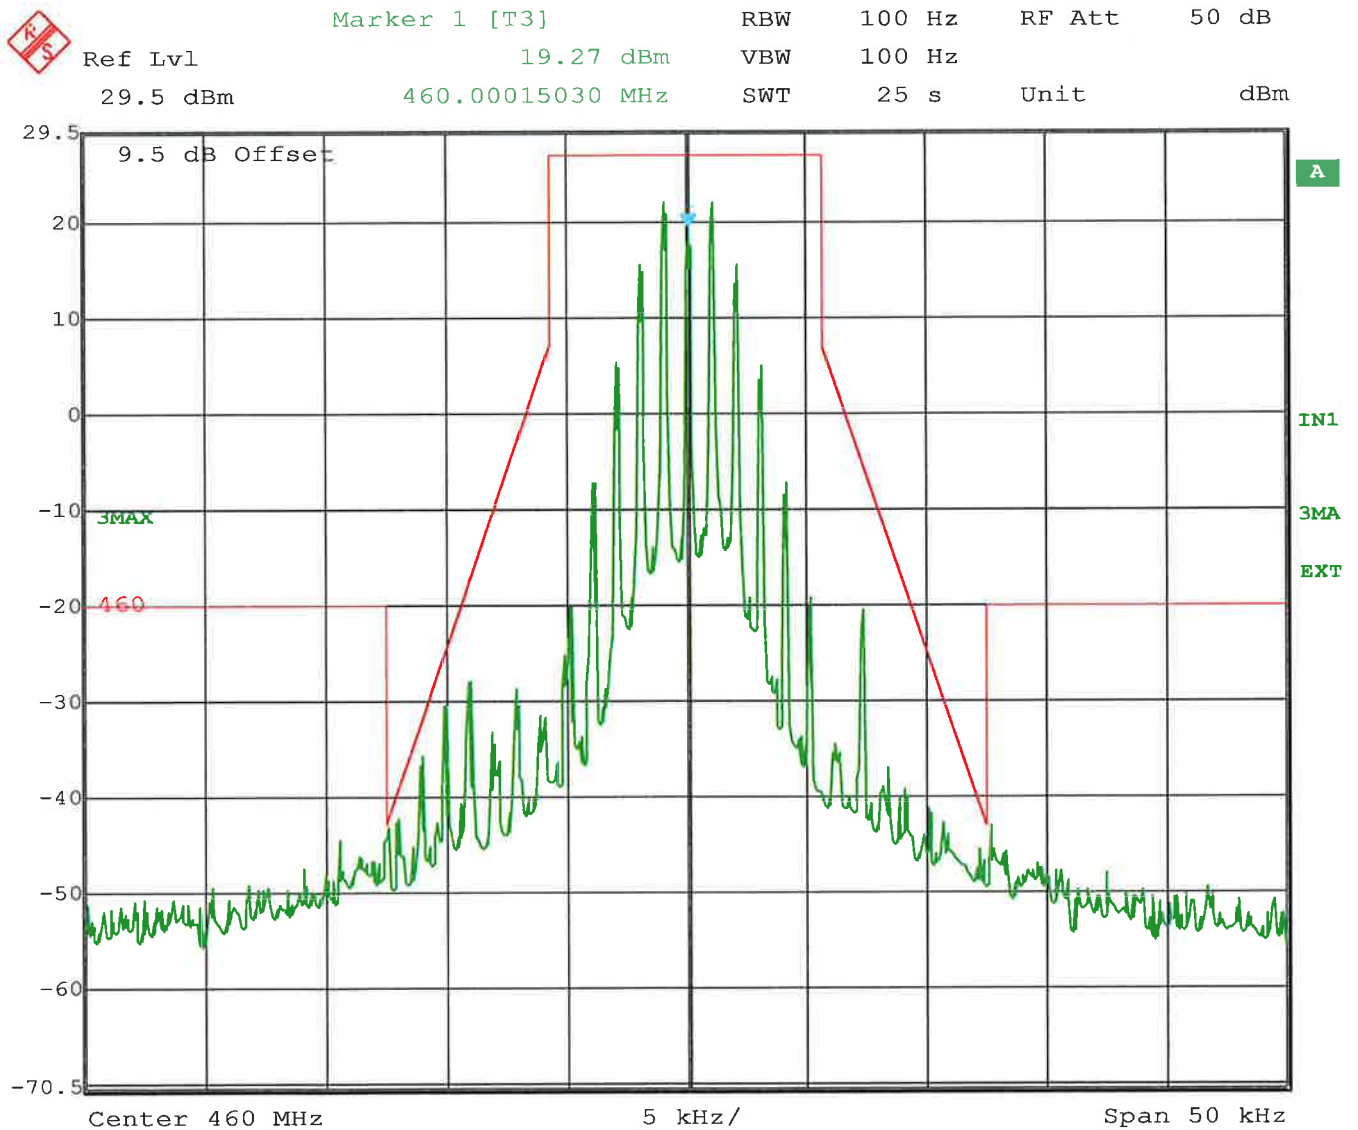

Date: 16.MAR.2011 09:49:40


Emissions Mask D

§ 5.5

Operating mode:

Frequency: 460 MHz

Modulation: modulated carrier symbol 0/1 at 1500 bps

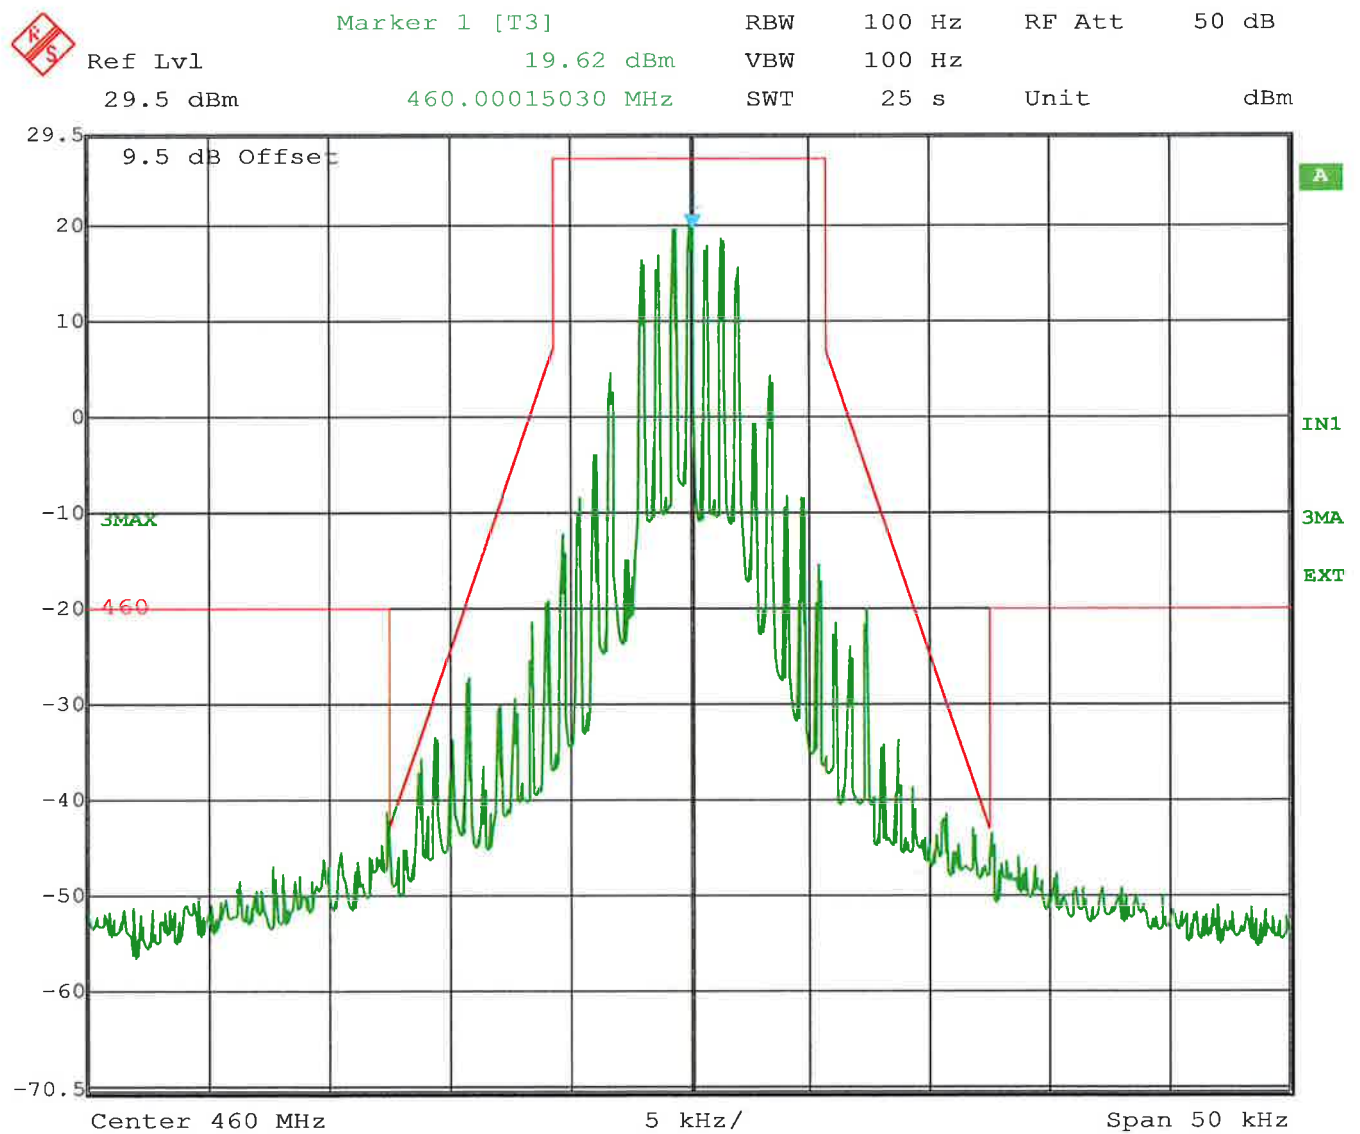

Date: 16.MAR.2011 09:53:28


Emissions Mask D

§ 5.5

Operating mode:

Frequency: 465 MHz

Modulation: unmodulated carrier

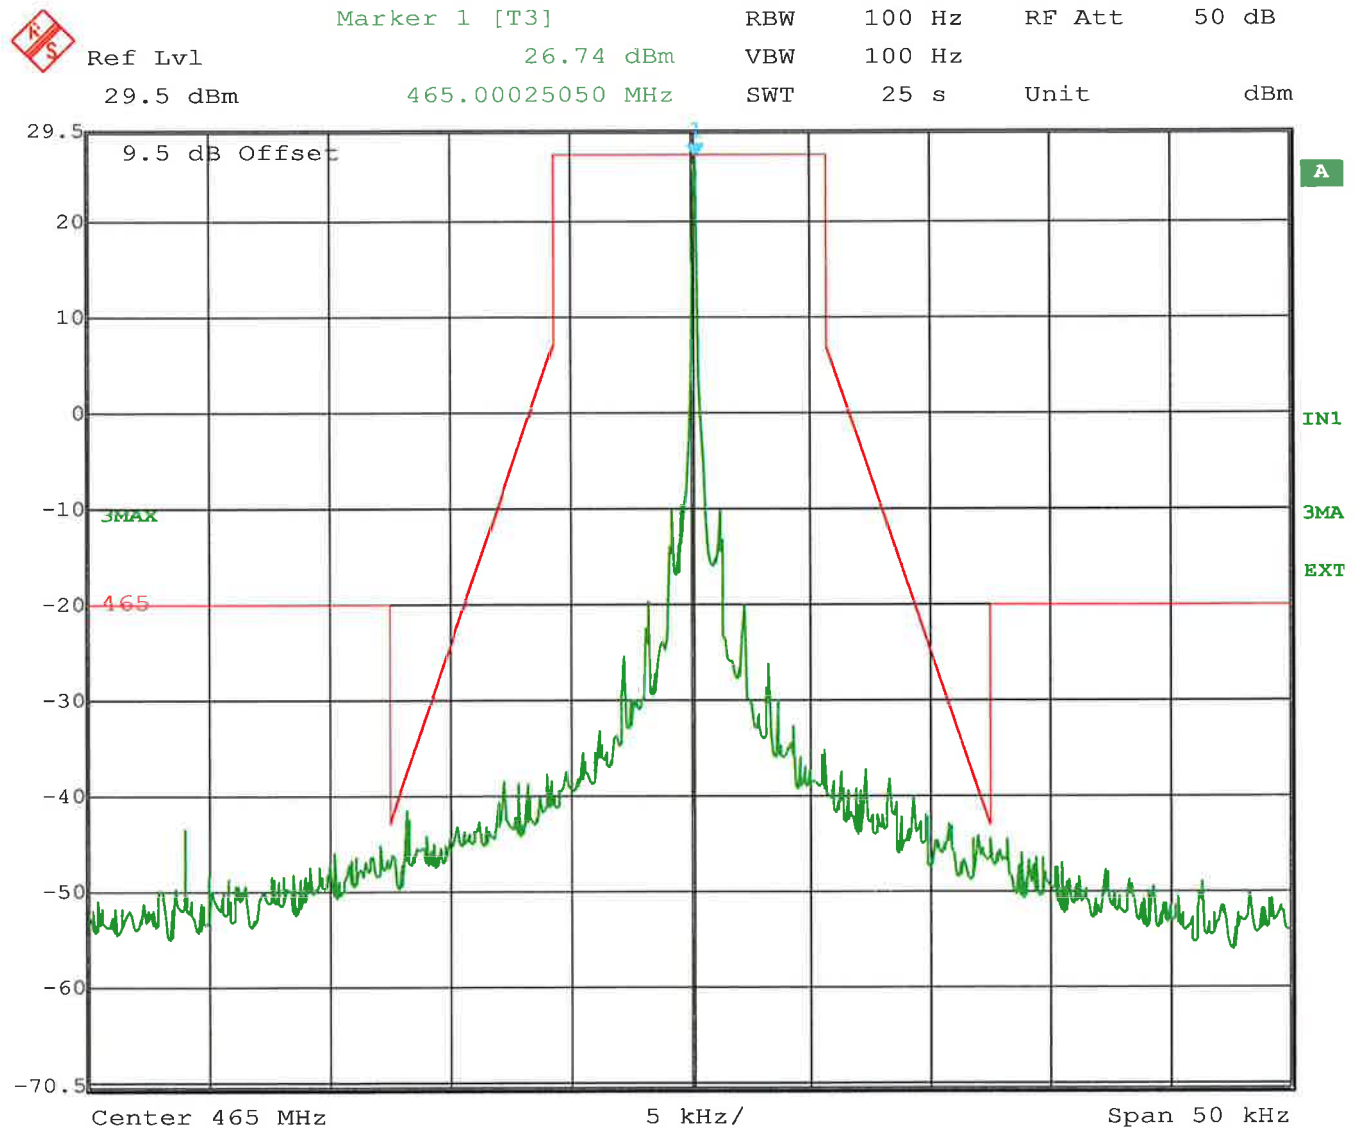

Date: 16.MAR.2011 09:55:09


Emissions Mask D

§ 5.5

Operating mode:

Frequency: 465 MHz

Modulation: modulated carrier symbol 0 (2 kHz)

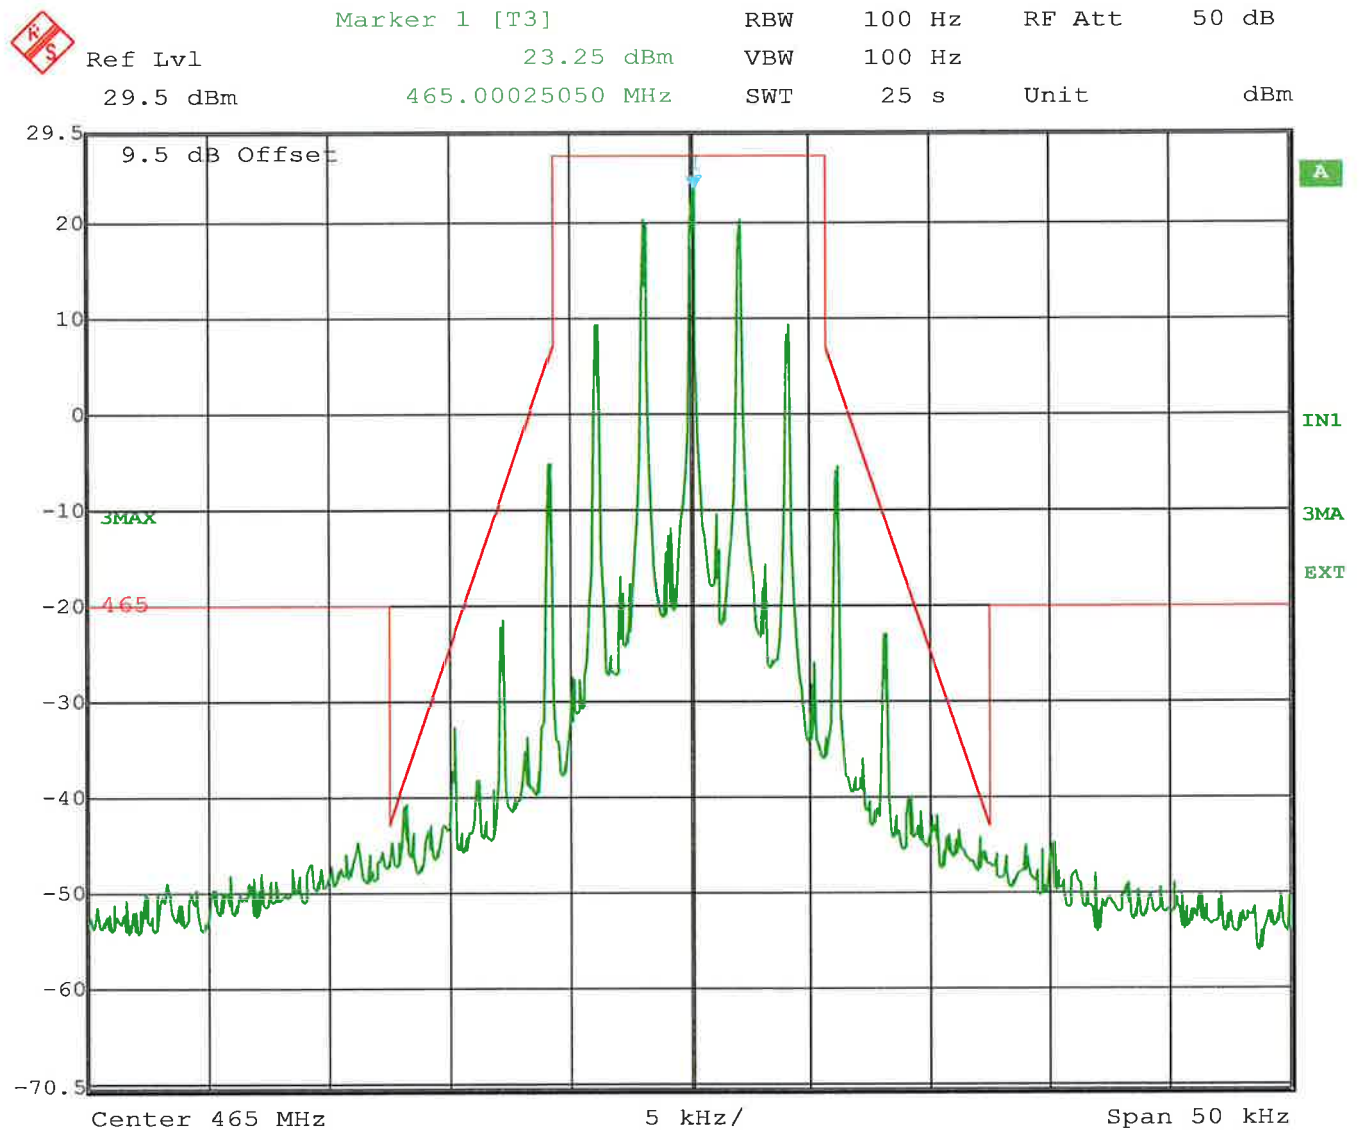

Date: 16.MAR.2011 09:56:48


Emissions Mask D

§ 5.5

Operating mode:

Frequency: 465 MHz

Modulation: modulated carrier symbol 1 (1 kHz)

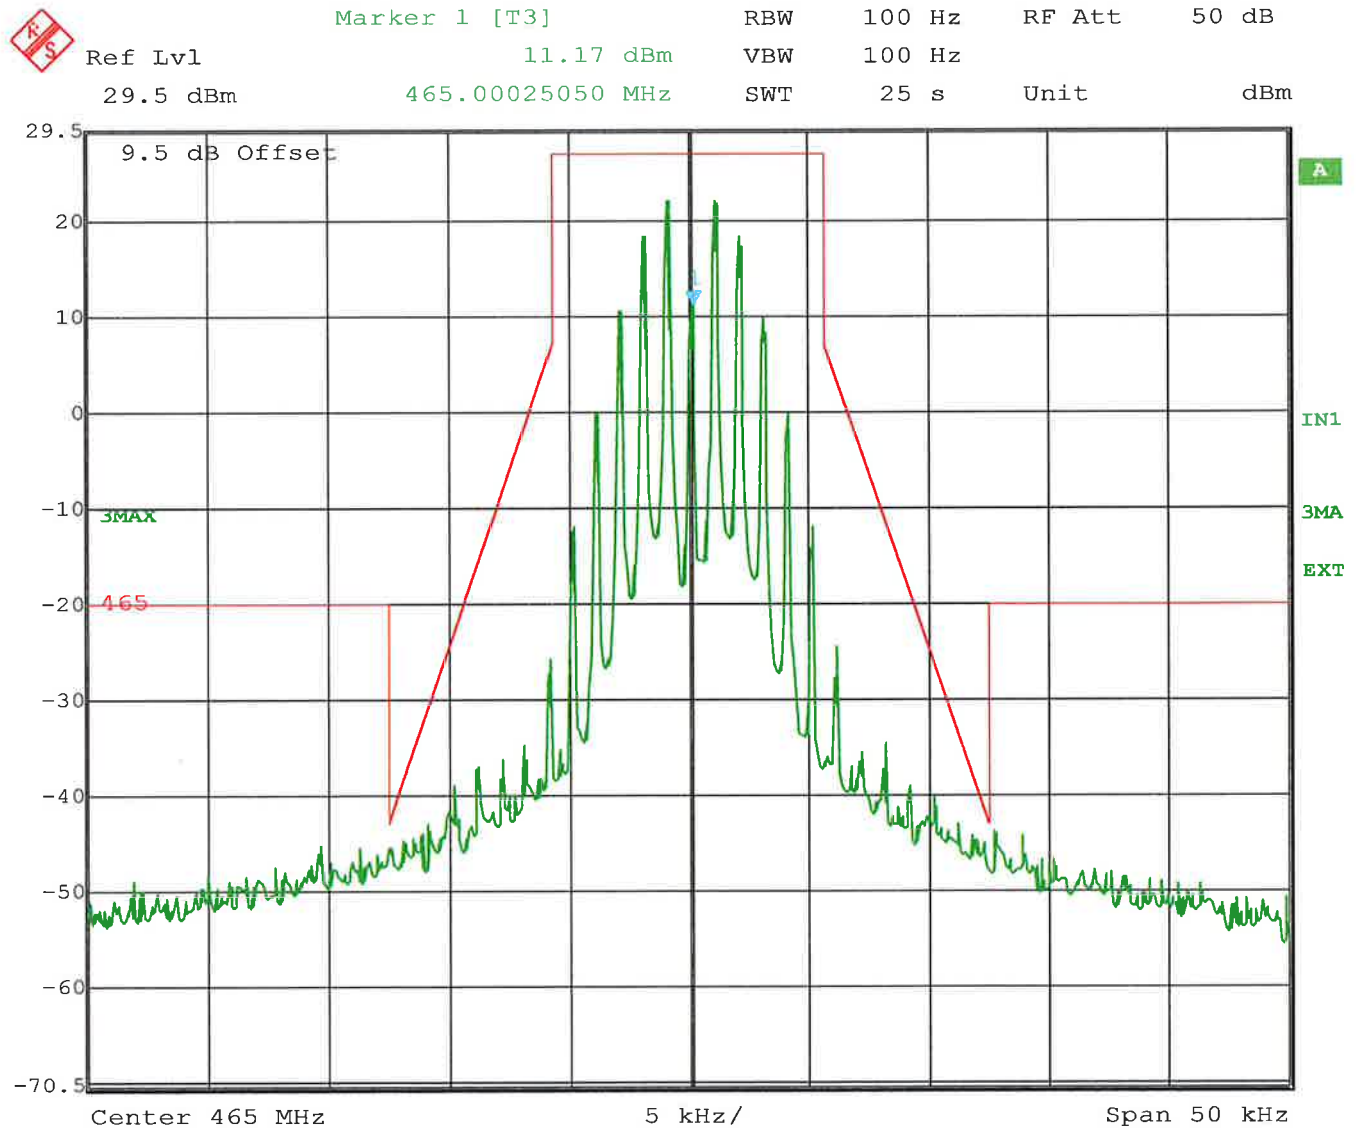

Date: 16.MAR.2011 09:59:05


Emissions Mask D

§ 5.5

Operating mode:

Frequency: 465 MHz


Modulation: modulated carrier symbol 0/1 at 1500 bps

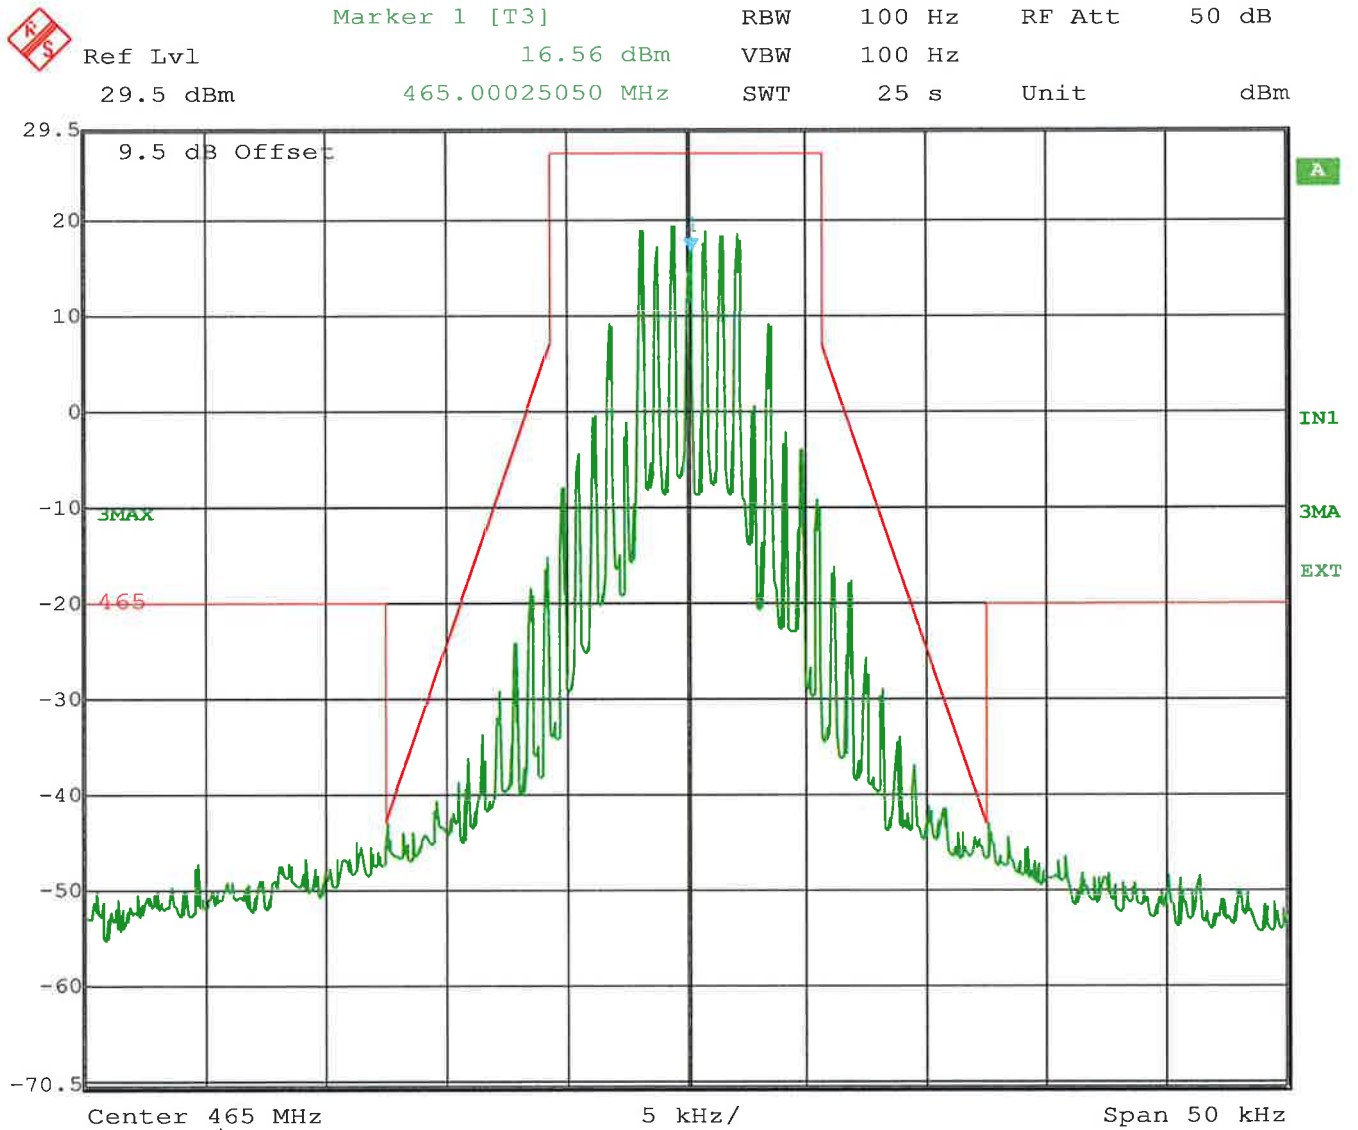

Date: 16.MAR.2011 10:01:27

§ 5.5

Modulation: unmodulated carrier

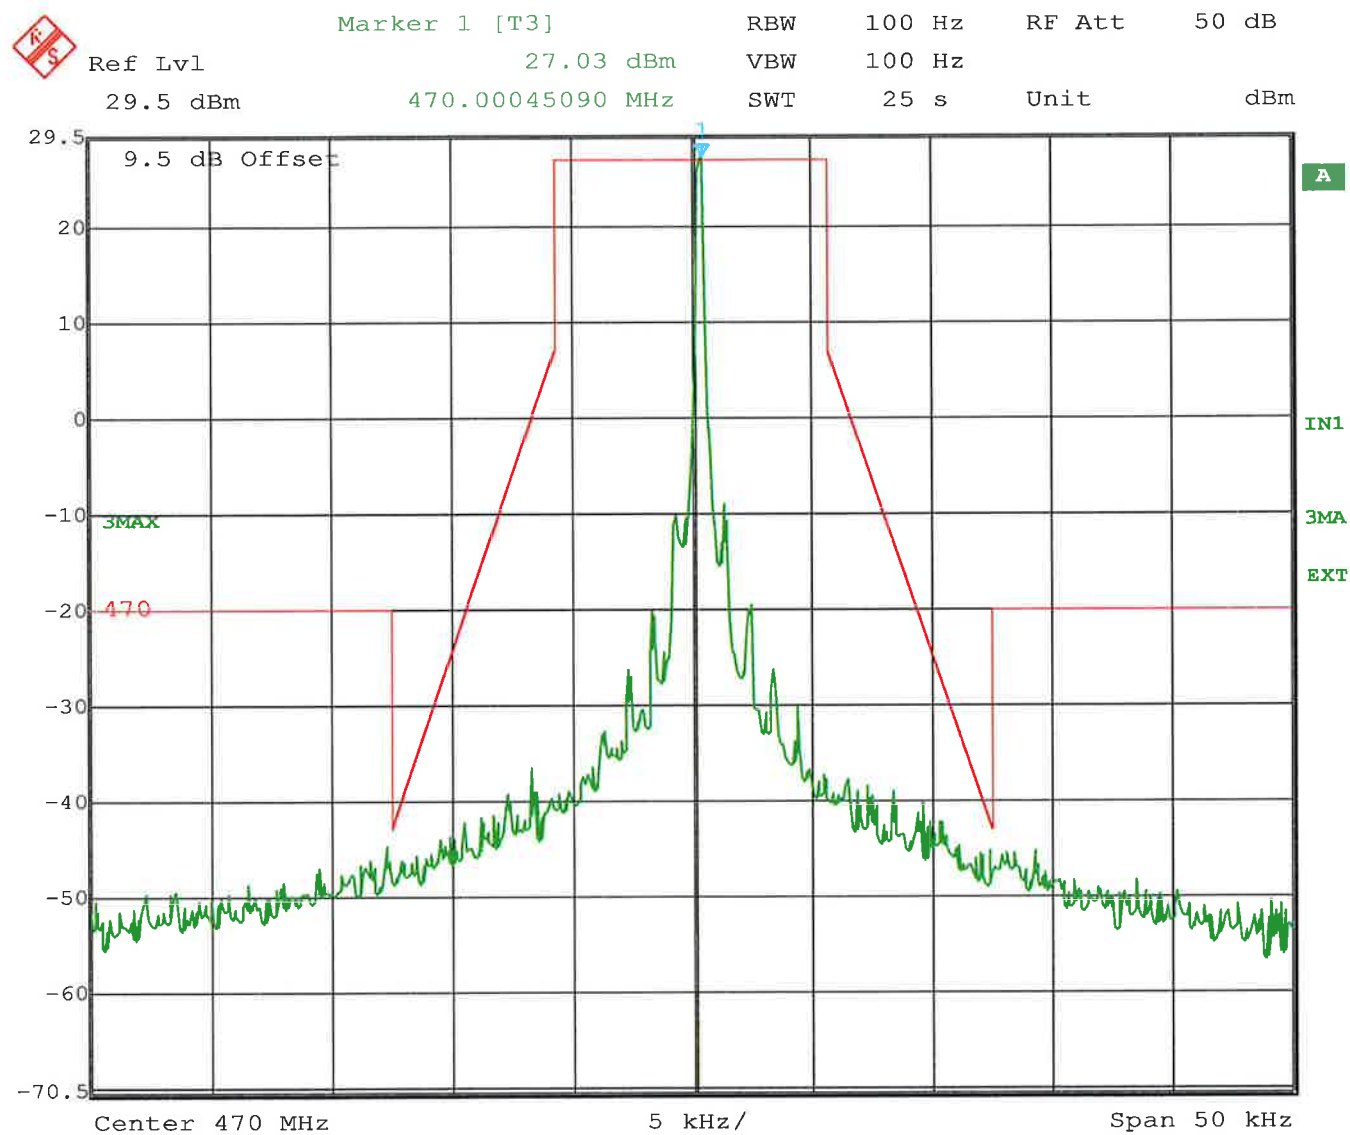

Date: 16.MAR.2011 09:33:44


Emissions Mask D

§ 5.5

Operating mode:

Frequency: 470 MHz

Modulation: modulated carrier symbol 0 (2 kHz)

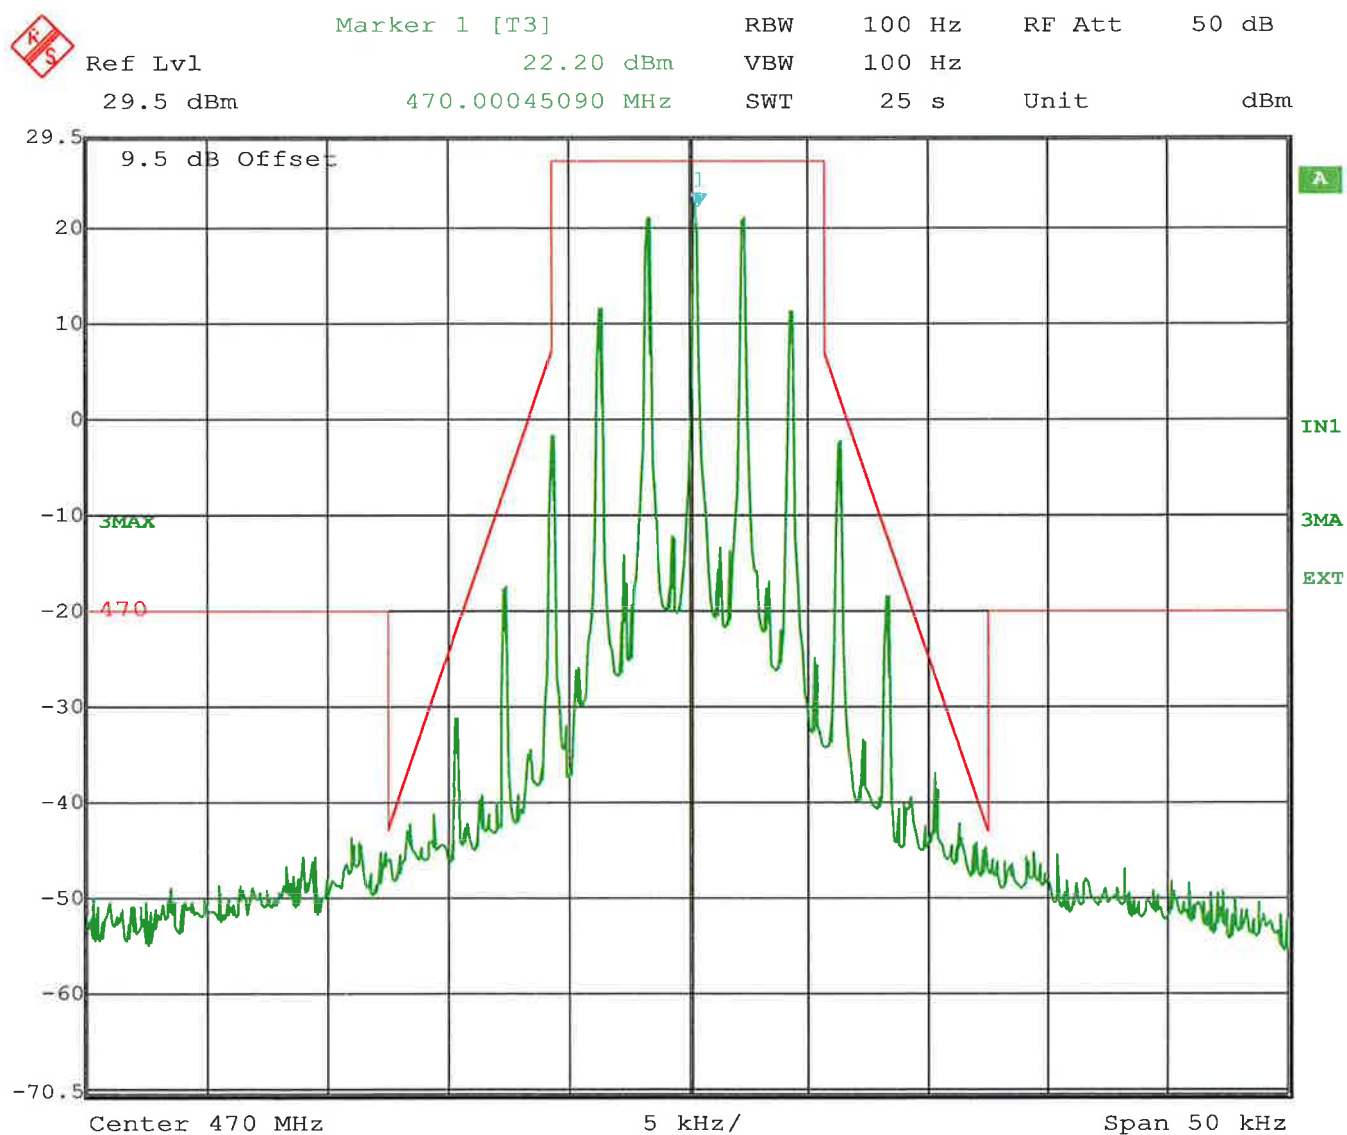

Date: 16.MAR.2011 09:35:44


Emissions Mask D

§ 5.5

Operating mode:

Frequency: 470 MHz

Modulation: modulated carrier symbol 1 (1 kHz)

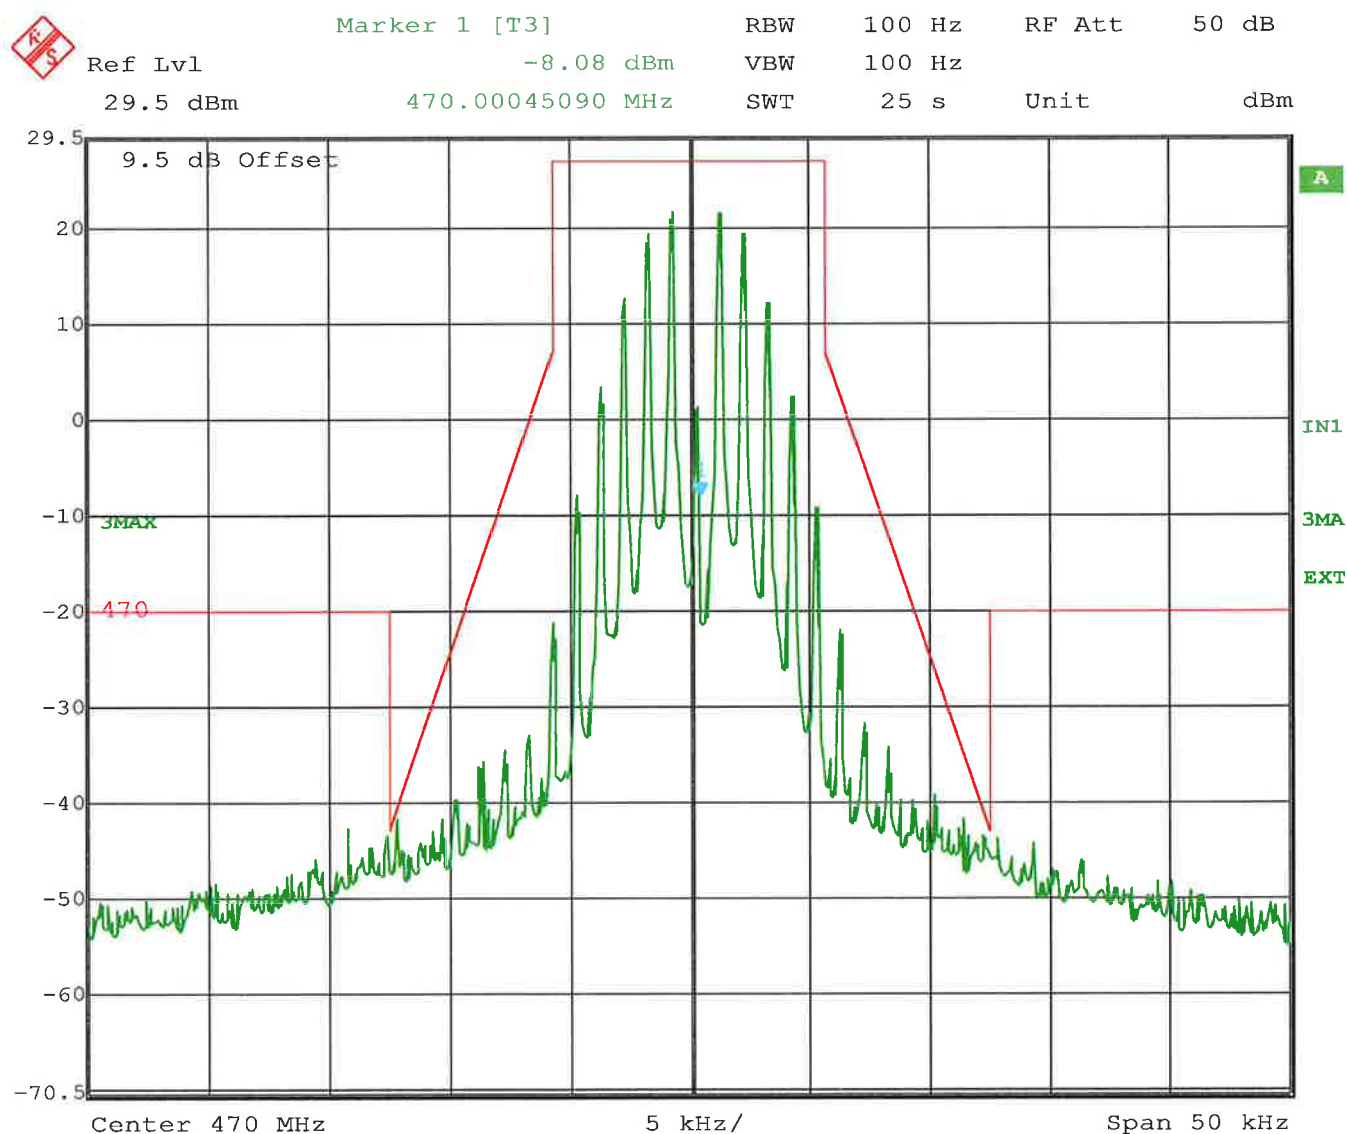

Date: 16.MAR.2011 09:37:39


Emissions Mask D

§ 5.5

Operating mode:

Frequency: 470 MHz

Modulation: modulated carrier symbol 0/1 at 1500 bps

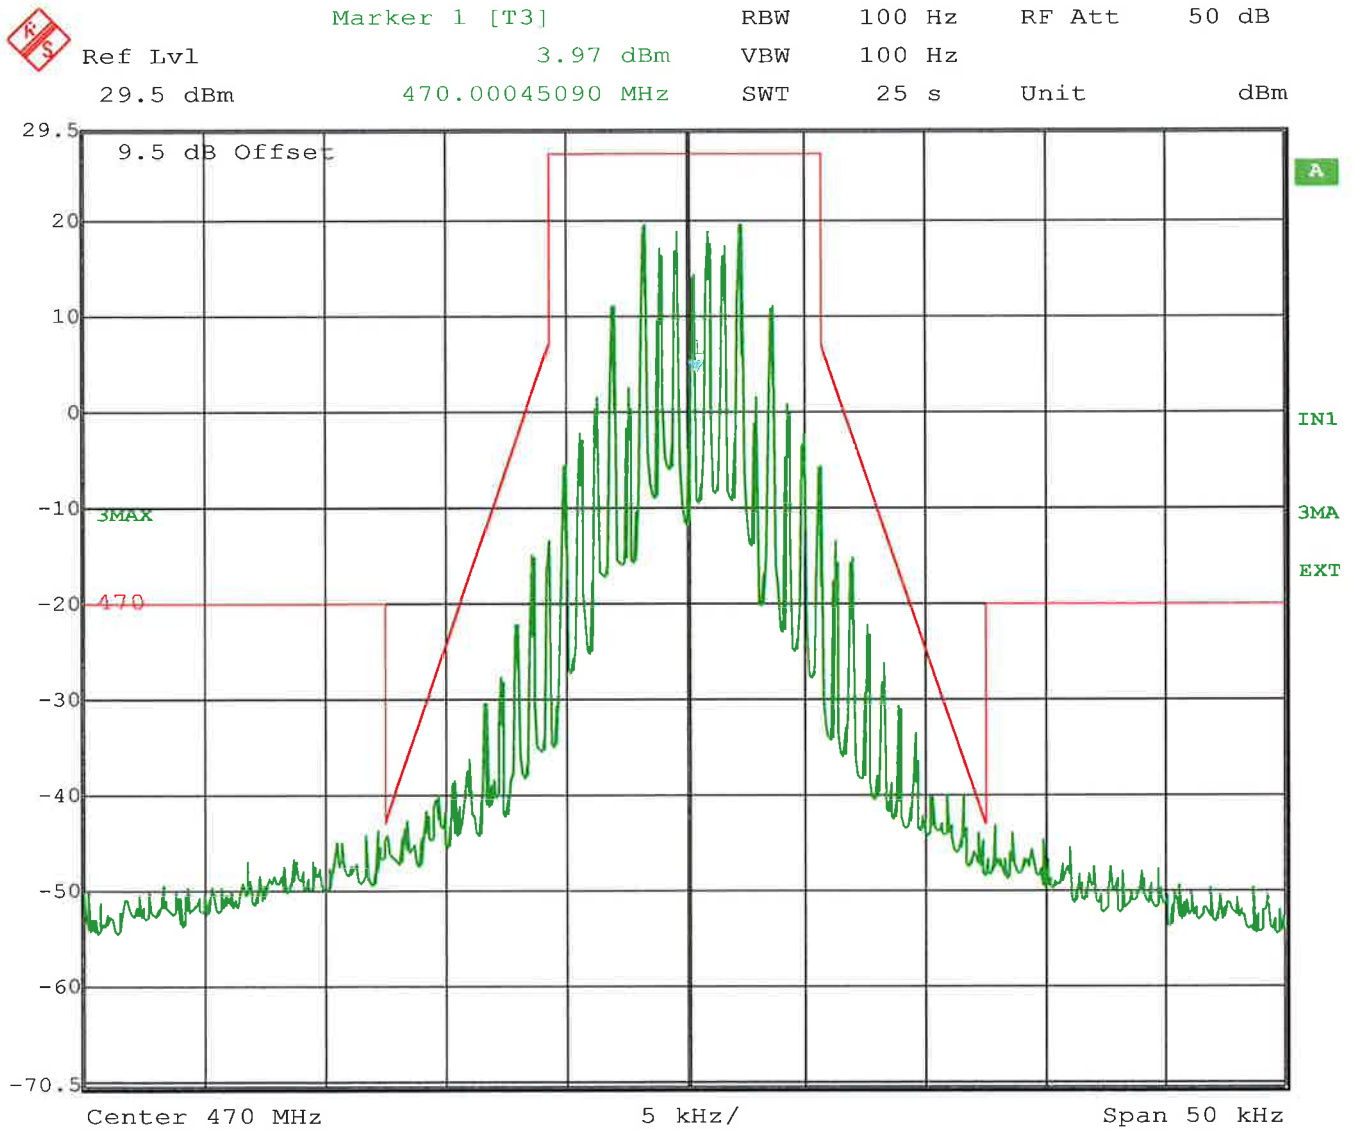

Date: 16.MAR.2011 09:39:09

Spurious conducted emissions

§ 5.8

LIMIT


5.8:

For transmitters designed to operate with a 12,5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

(3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12,5 kHz: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.

With the given transmitter output Power of 500 mW this results in an absolute Limit of -20 dBm.

Test equipment used:

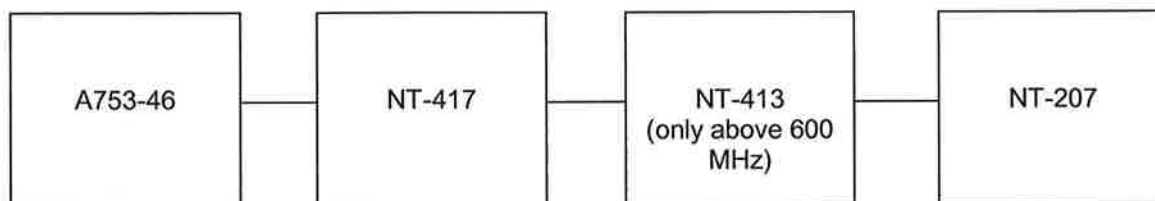

Results:

See following page.

Spurious conducted emissions

§ 5.8

Operating mode: Transmit at 500mW

Modulation: unmodulated carrier

SPURIOUS EMISSION LEVEL (dBm)								
CH 1 (460 MHz)			CH 2 (465 MHz)			CH 3 (470 MHz)		
f (MHz)	Bandwidth (kHz)	Level (dBm)	f (MHz)	Bandwidth (kHz)	Level (dBm)	f (MHz)	Bandwidth (kHz)	Level (dBm)
52,99	100	-43,5	42,04	100	-39,9	39,70	100	-38,8
2300	1000	-53,8	2325	1000	-54,0	2350	1000	-54,7
All others		< -40	All others		< -40	All others		< -40
Measurement uncertainty			± 4 dB					

Bandwidth (kHz); this refers to the bandwidth of the measurement receiver

Field strength of spurious emissions of the transmitter

§ 5.8.3

LIMIT


5.8.3:

For transmitters designed to operate with a 12,5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

(3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12,5 kHz: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.

With the given transmitter output Power of 500 mW this results in an absolute Limit of -20 dBm.

Test equipment used:

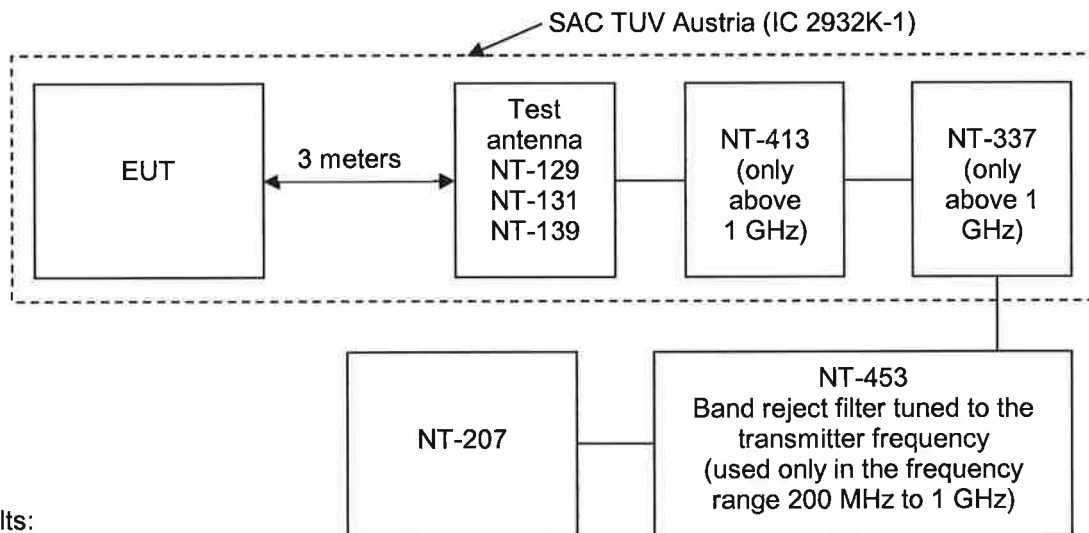

Results:

There were no other relevant emissions found except the harmonics in the spectrum from 30 MHz to the 10th harmonic.

CHANNEL					
460 MHz		465 MHz		470 MHz	
Frequency (MHz)	Level (dBm)	Frequency (MHz)	Level (dBm)	Frequency (MHz)	Level (dBm)
All	< -40	All	< -40	All	< -40


Field strength of spurious emissions of the transmitter

§ 5.8.3

Operating mode:

Frequency: 460 MHz

Modulation: unmodulated carrier

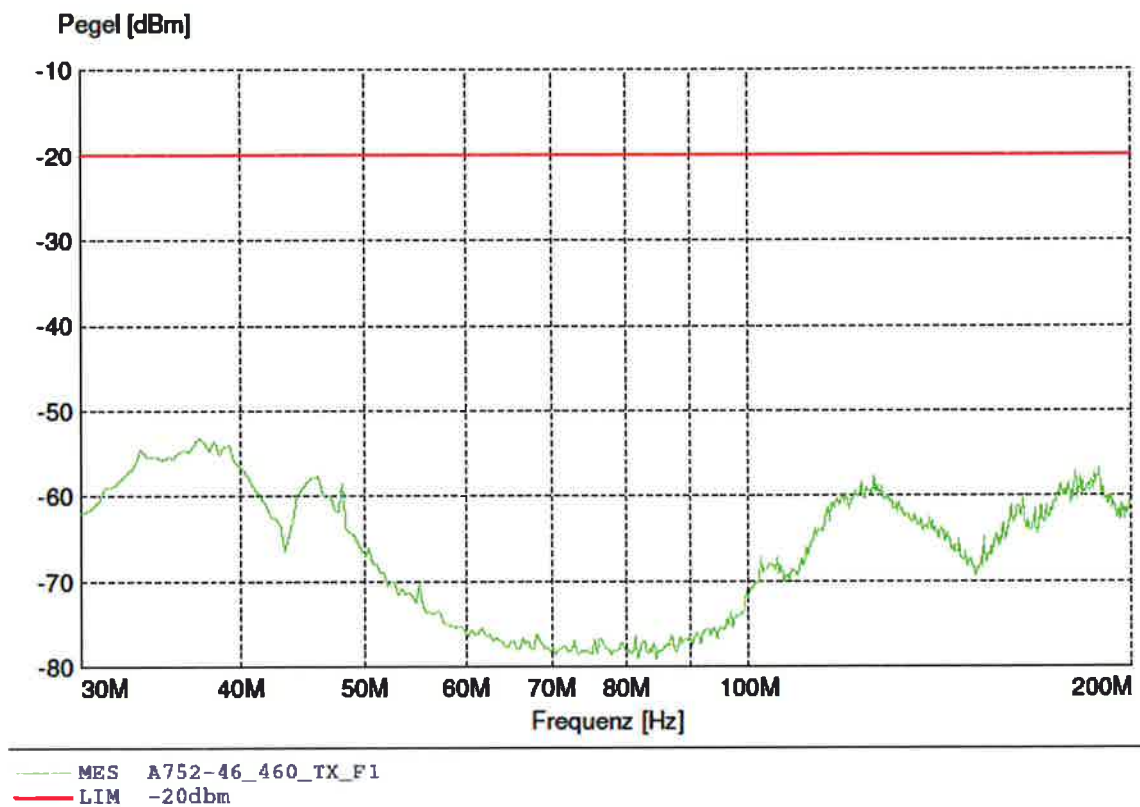


Field strength of spurious emissions of the transmitter

§ 5.8.3

Operating mode:

Frequency: 460 MHz

Modulation: unmodulated carrier

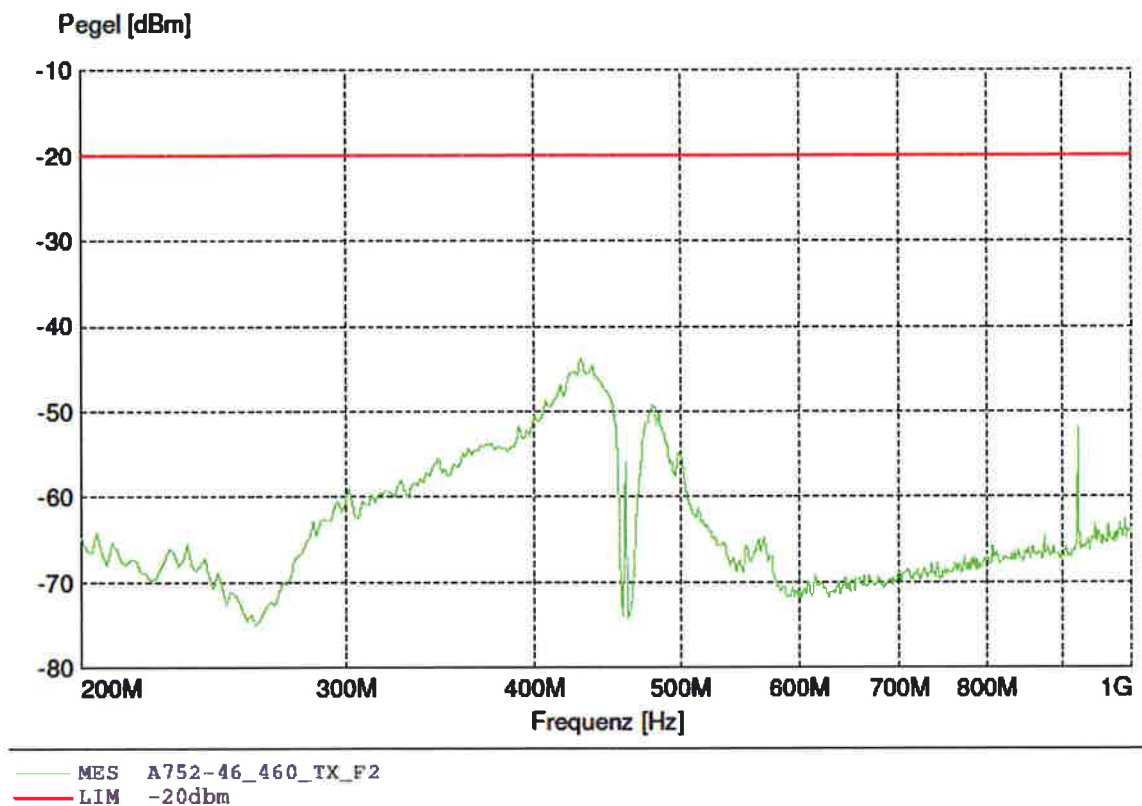

Seite 1 16.03.2011 16:49


Field strength of spurious emissions of the transmitter

§ 5.8.3

Operating mode:

Frequency: 460 MHz

Modulation: unmodulated carrier

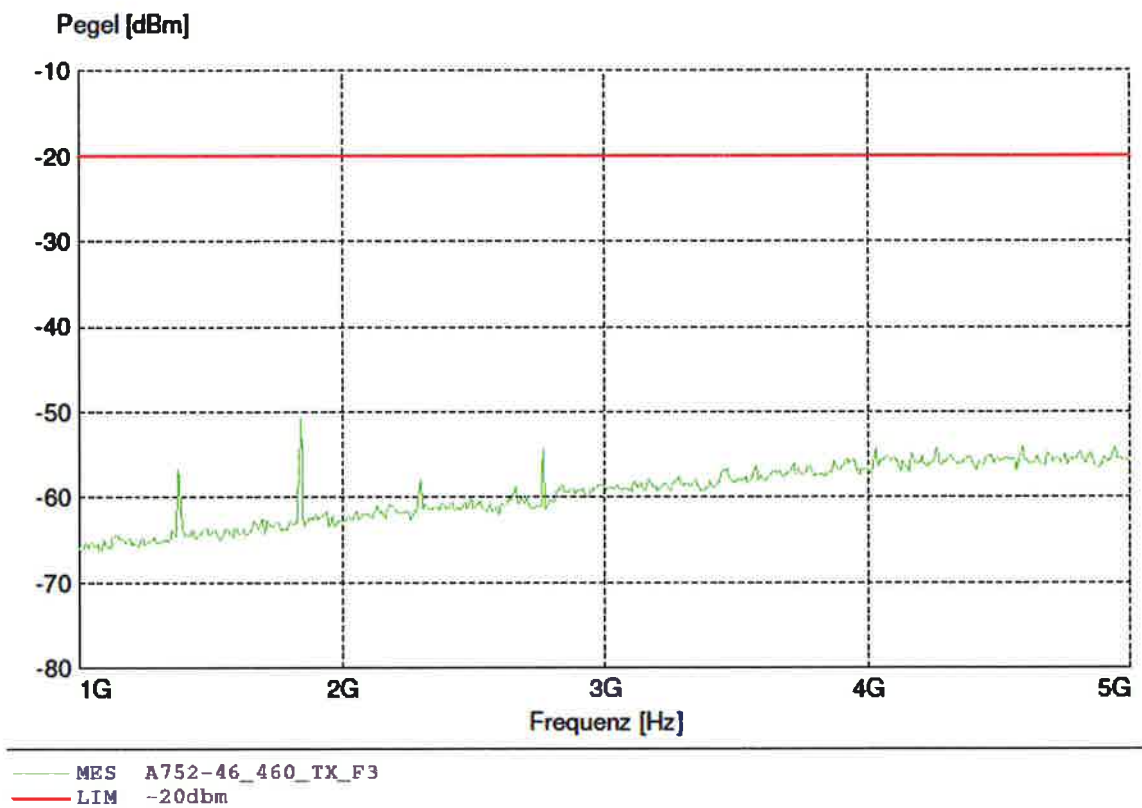

Seite 1 17.03.2011 10:08


Field strength of spurious emissions of the transmitter

§ 5.8.3

Operating mode:

Frequency: 465 MHz

Modulation: unmodulated carrier

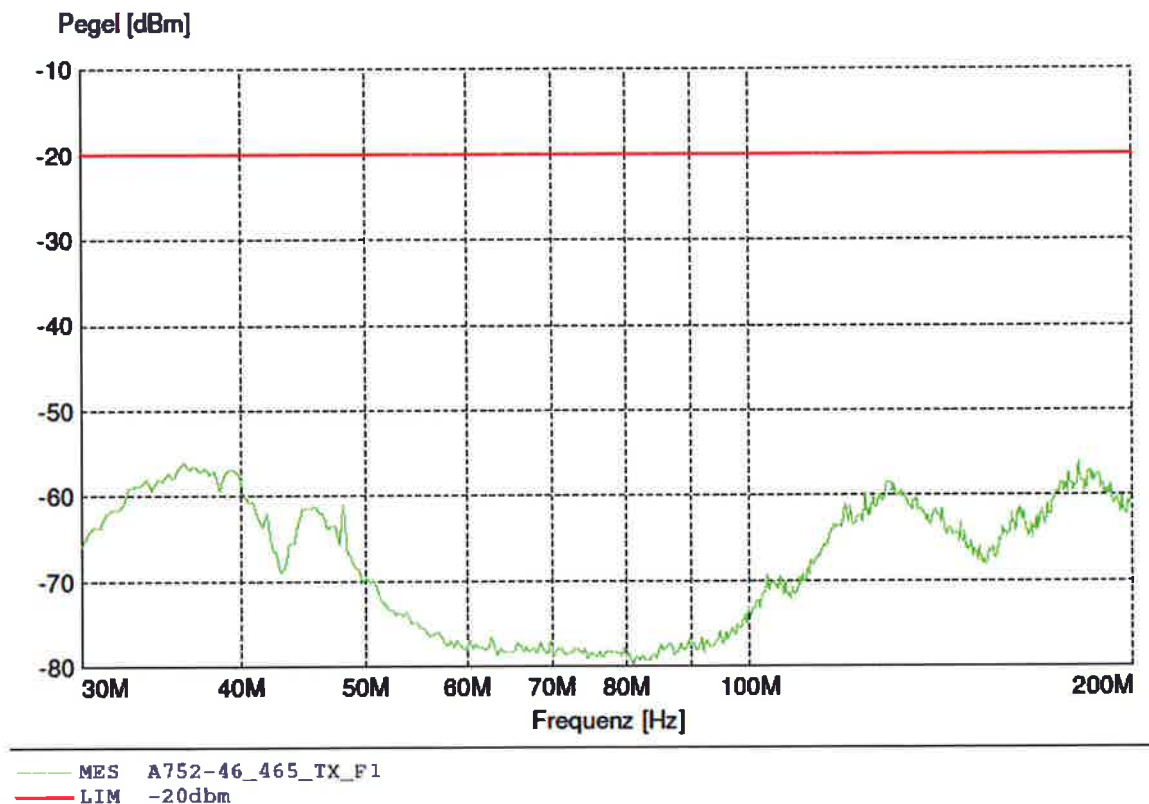


Field strength of spurious emissions of the transmitter

§ 5.8.3

Operating mode:

Frequency: 465 MHz

Modulation: unmodulated carrier

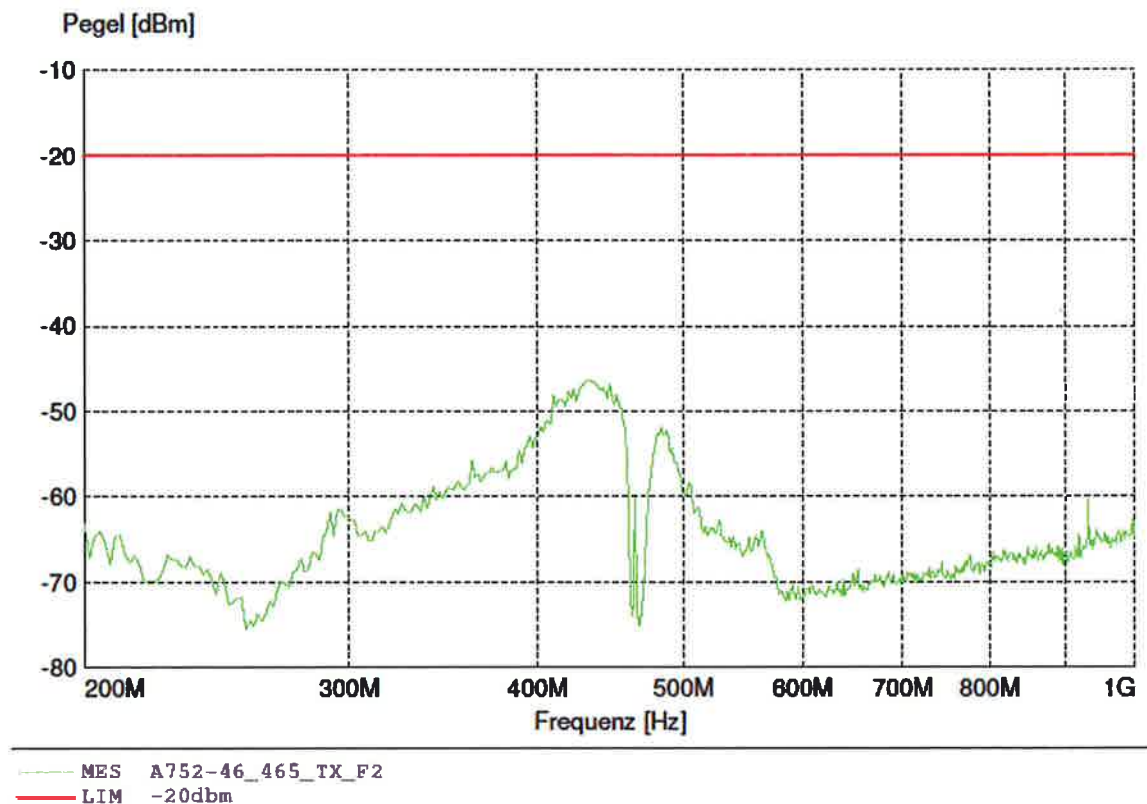


Field strength of spurious emissions of the transmitter

§ 5.8.3

Operating mode:

Frequency: 465 MHz

Modulation: unmodulated carrier

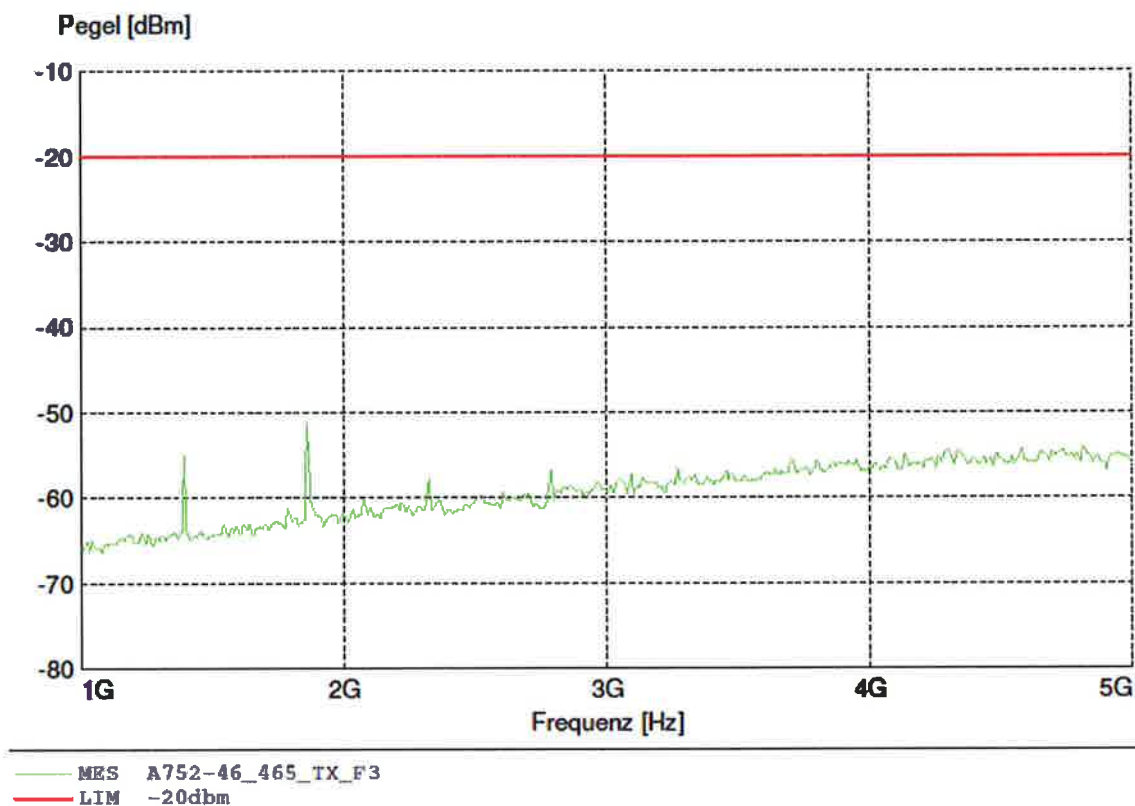

Seite 1 17.03.2011 10:06


Field strength of spurious emissions of the transmitter

§ 5.8.3

Operating mode:

Frequency: 470 MHz

Modulation: unmodulated carrier

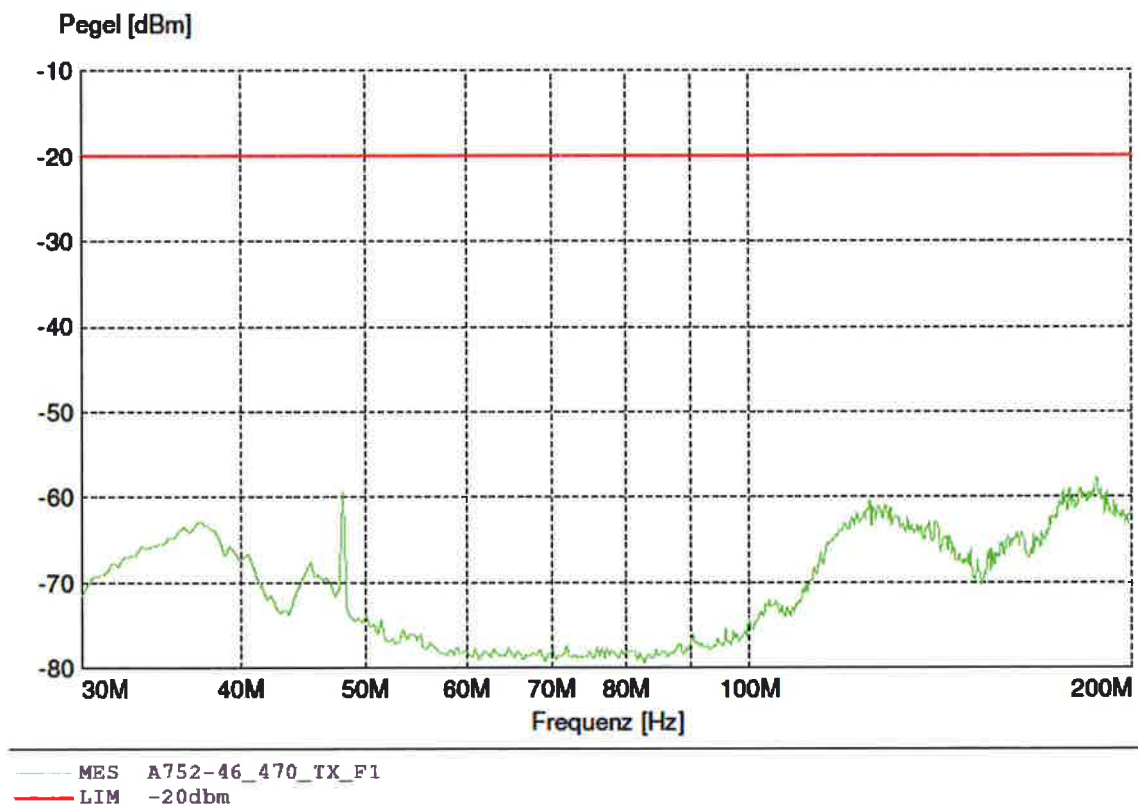

Seite 1 17.03.2011 08:47


Field strength of spurious emissions of the transmitter

§ 5.8.3

Operating mode:

Frequency: 470 MHz

Modulation: unmodulated carrier

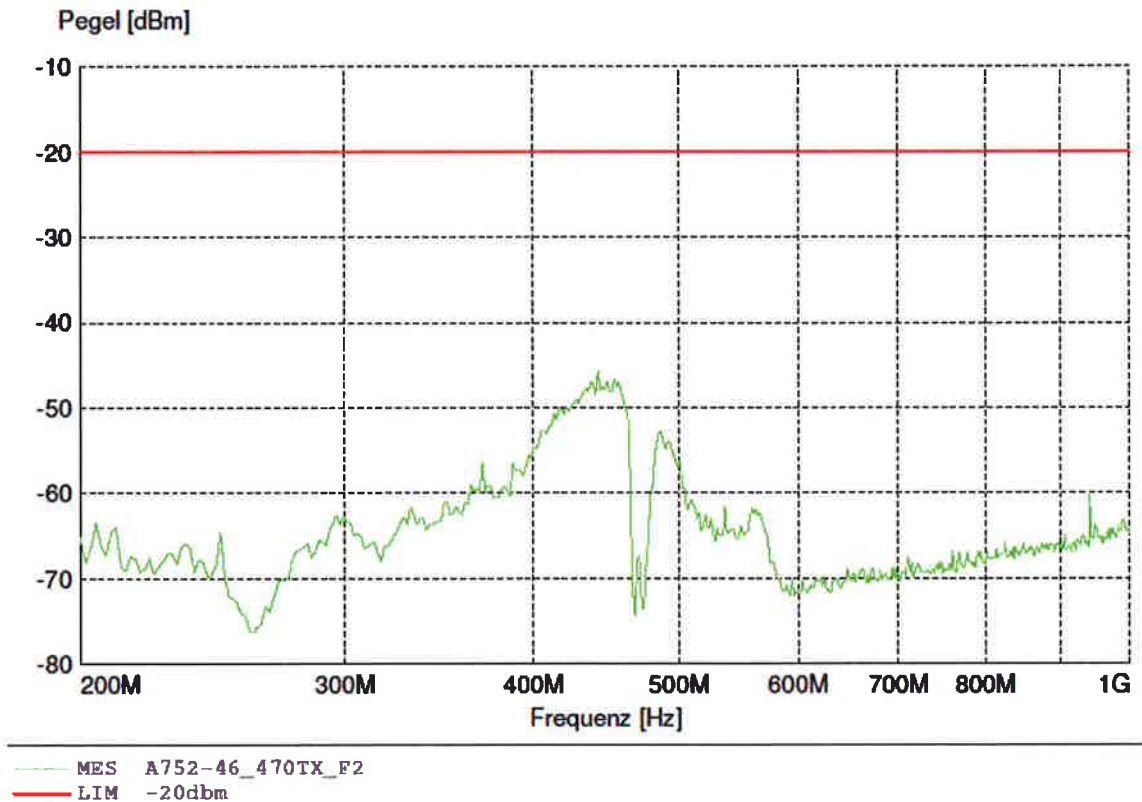


Field strength of spurious emissions of the transmitter

§ 5.8.3

Operating mode:

Frequency: 470 MHz

Modulation: unmodulated carrier

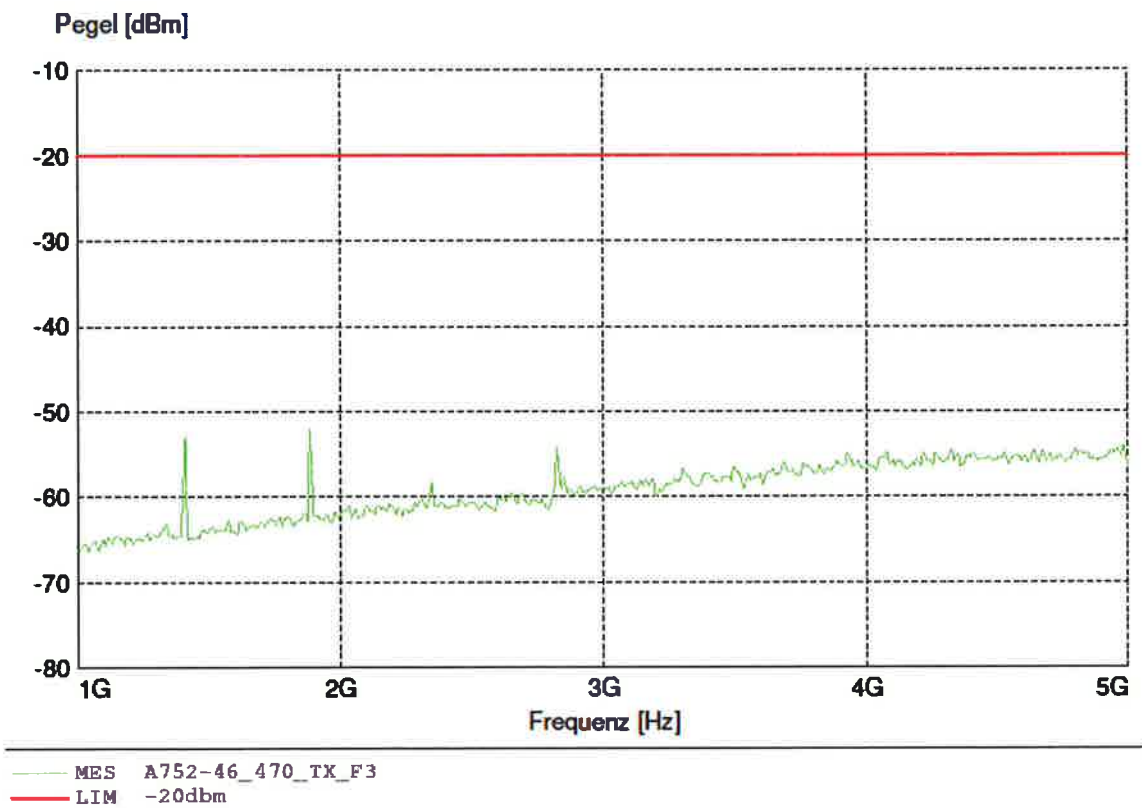

Seite 1 17.03.2011 10:03

Frequency stability

§ 5.3

Frequency error vs. Supply voltage

DC-Voltage	Frequency Error kHz			Frequency Error ppm		
	460 MHz	465 MHz	470 MHz	460 MHz	465 MHz	470 MHz
6,2 V	0,4	0,37	0,39	0,87	0,80	0,83
5,6 V	0,41	0,38	0,4	0,89	0,82	0,85
7,13 V	0,41	0,39	0,41	0,89	0,84	0,87
10 V	0,35	0,33	0,36	0,76	0,71	0,77

Frequency error vs. Temperature

Temperature °C	Frequency Error kHz			Frequency Error ppm		
	460 MHz	465 MHz	470 MHz	460 MHz	465 MHz	470 MHz
-30	0,68	0,69	0,7	1,48	1,48	1,49
-20	0,6	0,63	0,64	1,30	1,35	1,36
-10	0,53	0,56	0,57	1,15	1,20	1,21
±0	0,45	0,48	0,5	0,98	1,03	1,06
+10	0,46	0,47	0,47	1,00	1,01	1,00
+20	0,4	0,37	0,39	0,87	0,80	0,83
+30	0,44	0,43	0,41	0,96	0,92	0,87
+40	0,36	0,39	0,44	0,78	0,84	0,94
+50	0,3	0,28	0,28	0,65	0,60	0,60

LIMIT


5.3 Table 1

In the 450-470 MHz band, fixed and base stations with a 12,5 kHz channel bandwidth must have a frequency stability of 1,5 ppm. In the 450-470 MHz band, mobile stations with a 12,5 kHz channel bandwidth must have a frequency stability of 2,5 ppm.

Frequency stability

§ 5.3

Test equipment used:

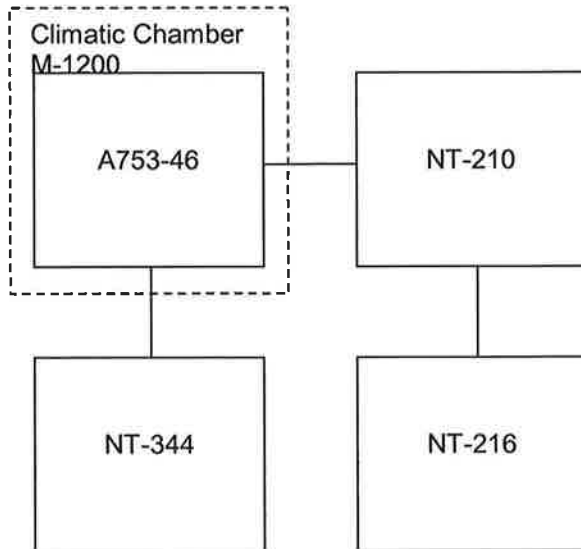

Transient frequency behaviour

§ 5.9

LIMIT

5.9:

Transmitters designed to operate in the 138-174 MHz and 406,1-512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time intervals ^{1,2}	Maximum frequency Difference ³	All Equipment	
		138 to 174 MHz	406,1 to 512 MHz
Transient Frequency Behaviour for Equipment designed to Operate on 25 kHz Channels			
t ₁	± 25,0 kHz	5,0 ms	10,0 ms
t ₂	± 12,5 kHz	20,0 ms	25,0 ms
t ₃	± 25,0 kHz	5,0 ms	10,0 ms
Transient Frequency Behaviour for Equipment designed to Operate on 12,5 kHz Channels			
t ₁	± 12,5 kHz	5,0 ms	10,0 ms
t ₂	± 6,25 kHz	20,0 ms	25,0 ms
t ₃	± 12,5 kHz	5,0 ms	10,0 ms
Transient Frequency Behaviour for Equipment designed to Operate on 6,25 kHz Channels			
t ₁	± 6,25 kHz	5,0 ms	10,0 ms
t ₂	± 3,125 kHz	20,0 ms	25,0 ms
t ₃	± 6,25 kHz	5,0 ms	10,0 ms

¹ t_{on} is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

t_1 is the time period immediately following t_{on}


t_2 is the time period immediately following t_1

t_3 is the time period from the instant when the transmitter is turned off until t_{off}

t_{off} is the instant when the 1 kHz test signal starts to rise.

² If the transmitter carrier output power rating is 6 W or less, the frequency difference during the time periods t_1 and t_3 may exceed the maximum frequency difference for these time periods. The corresponding plot of frequency versus time during t_1 and t_3 shall be recorded in the test report.

Test equipment used:

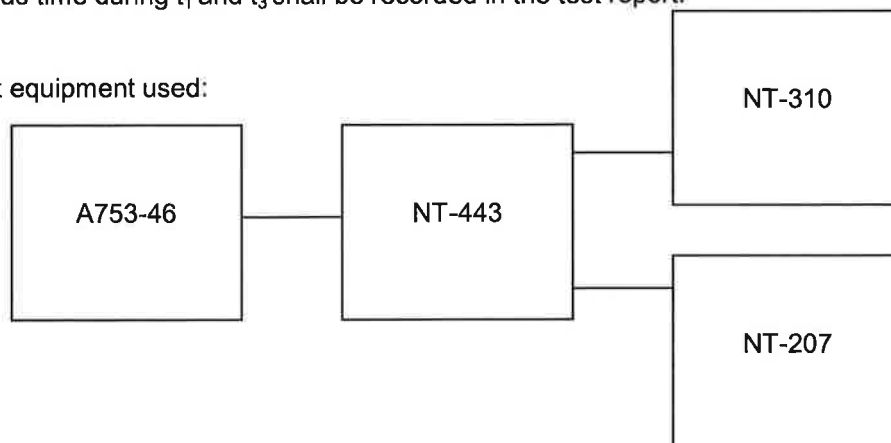

Transient frequency behaviour

§ 5.9

Operating mode: t_{on} is in the middle of the screen (25ms pre-trigger)


Frequency: 460 MHz

Transmitter switching on



Ref Lvl
20 dBm

CF 460 MHz Real Time OFF
DEMOD BW: 50 kHz AF-Signal
FM [Hz]

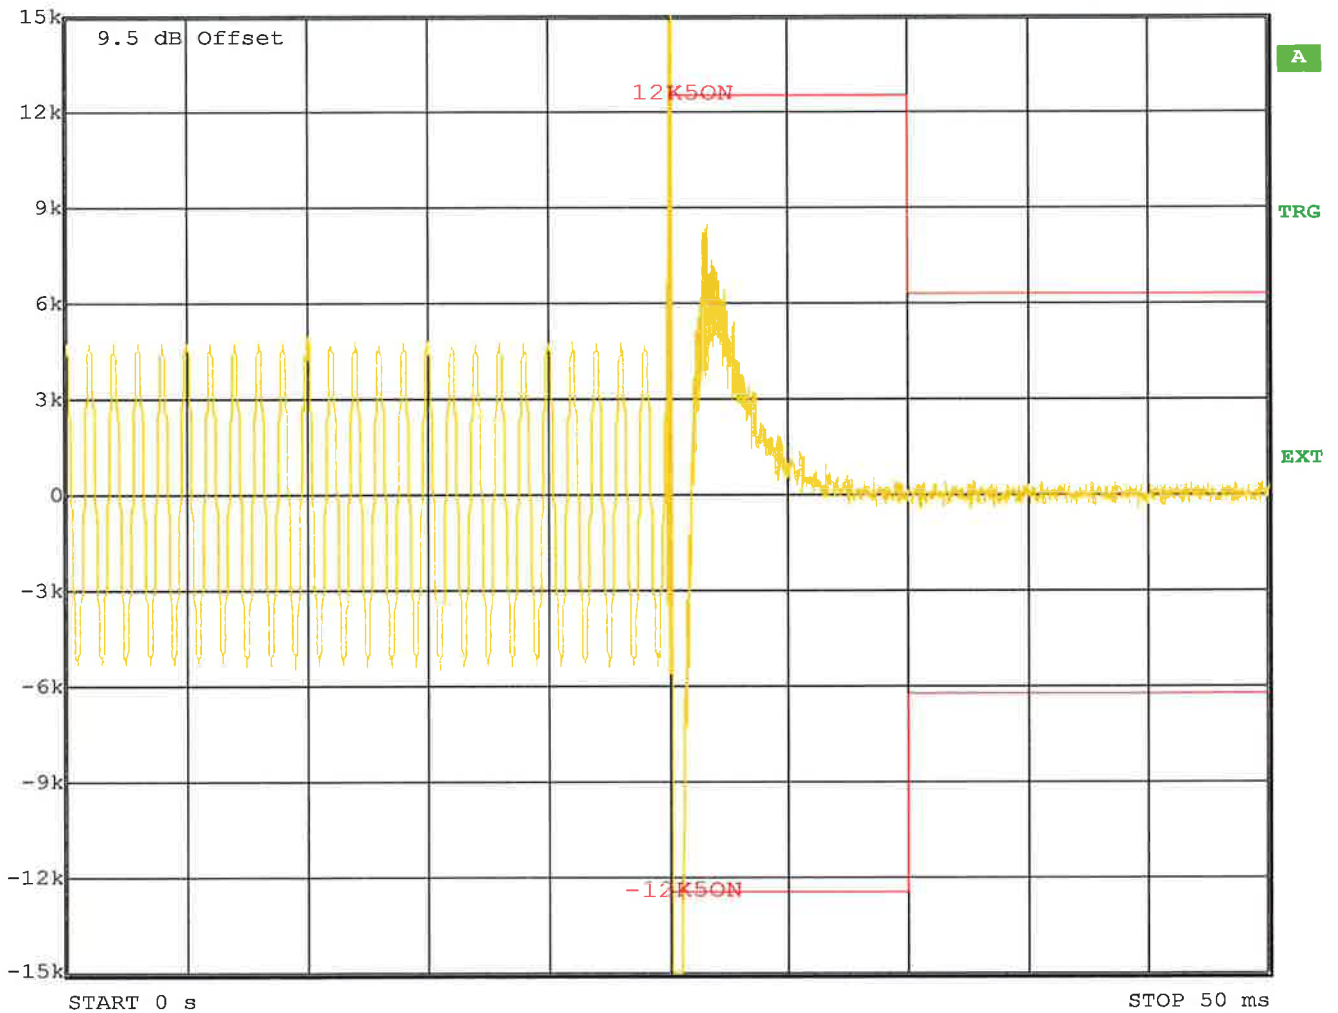

Date: 16.MAR.2011 13:26:27

Transient frequency behaviour

§ 5.9

Operating mode: t_{off} is in the middle of the screen (25ms pre-trigger)


Frequency: 460 MHz

Transmitter switching off



Ref Lvl
20 dBm

CF 460 MHz Real Time OFF
DEMOD BW: 50 kHz AF-Signal
FM [Hz]

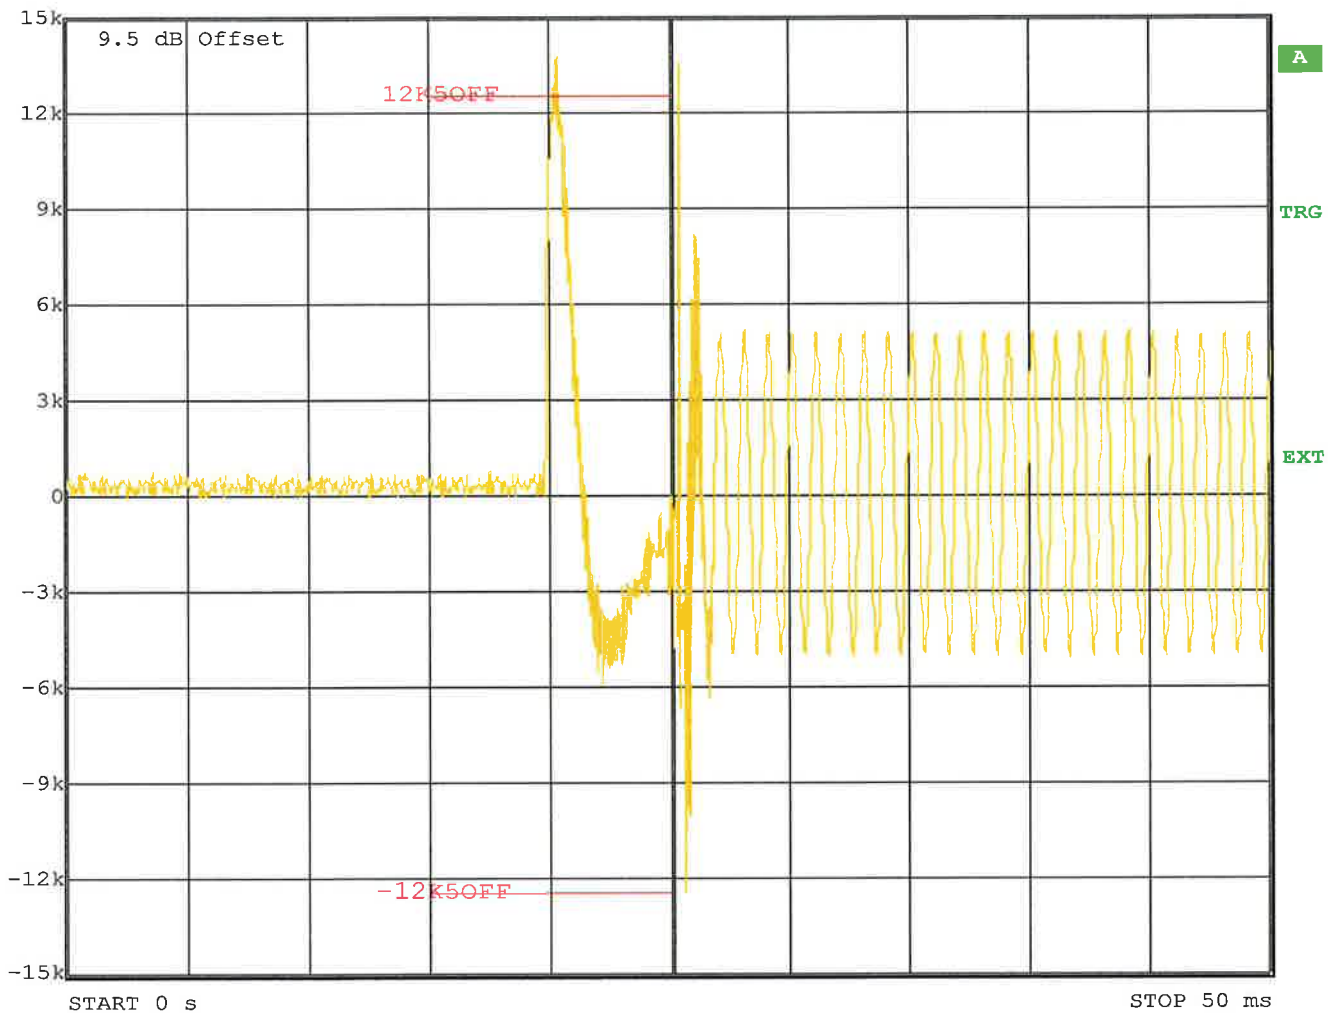

Date: 16.MAR.2011 13:26:56


Transient frequency behaviour

§ 5.9

Operating mode: t_{on} is in the middle of the screen (25ms pre-trigger)

Frequency: 465 MHz

Transmitter switching on

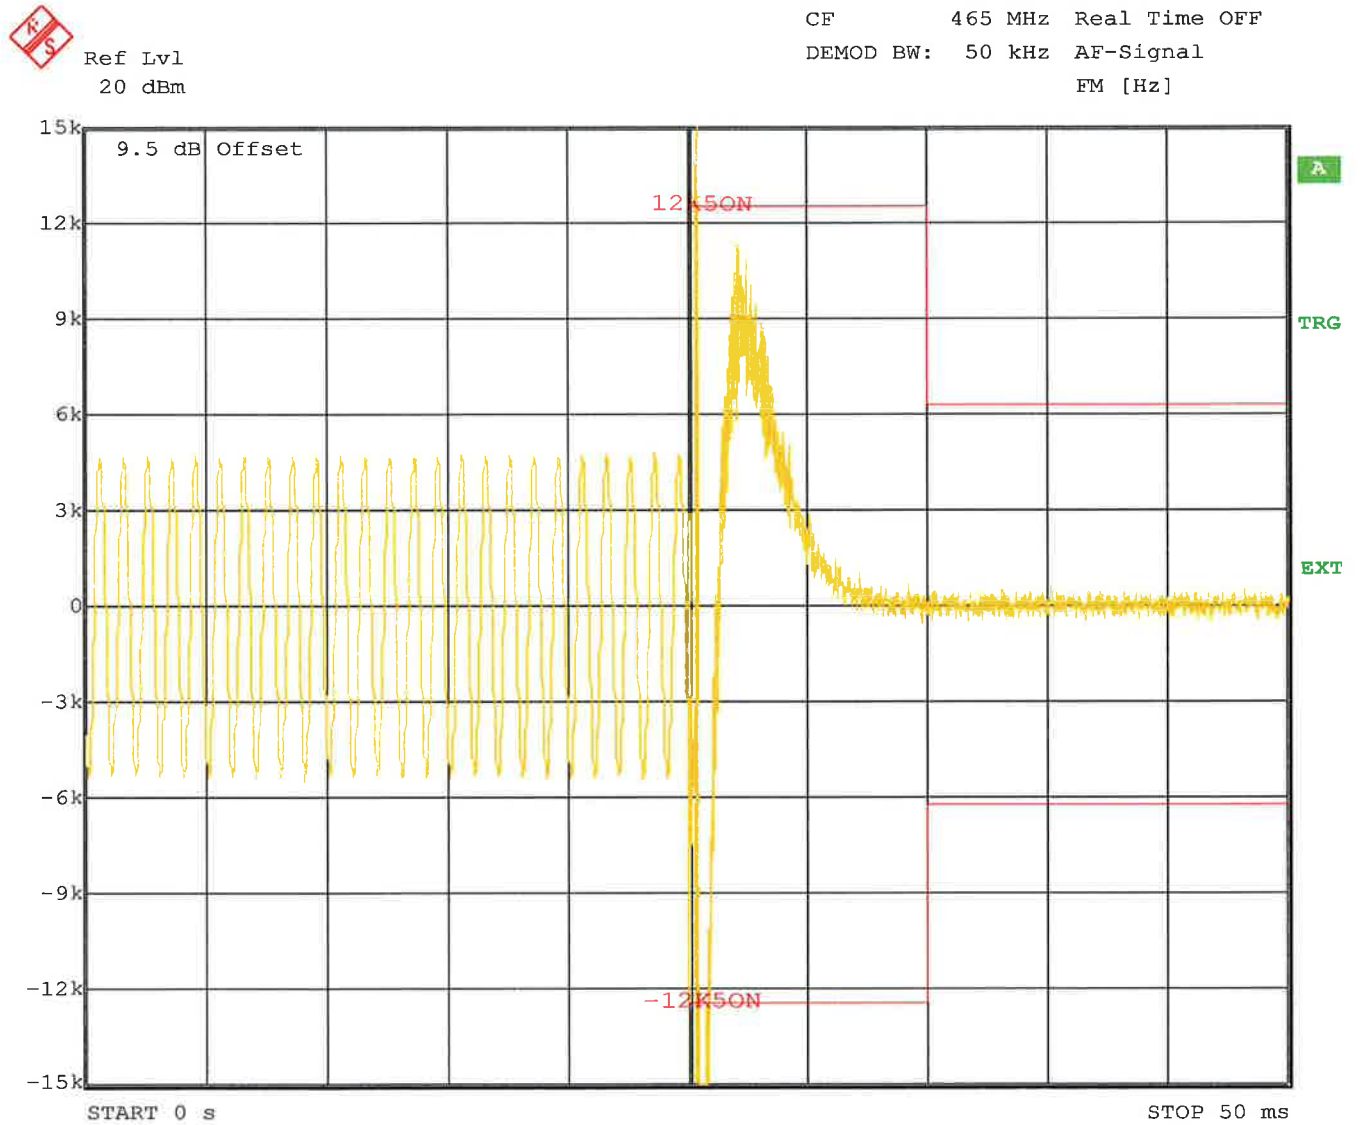

Date: 16.MAR.2011 13:26:06


Transient frequency behaviour

§ 5.9

Operating mode: t_{off} is in the middle of the screen (25ms pre-trigger)

Frequency: 465 MHz

Transmitter switching off

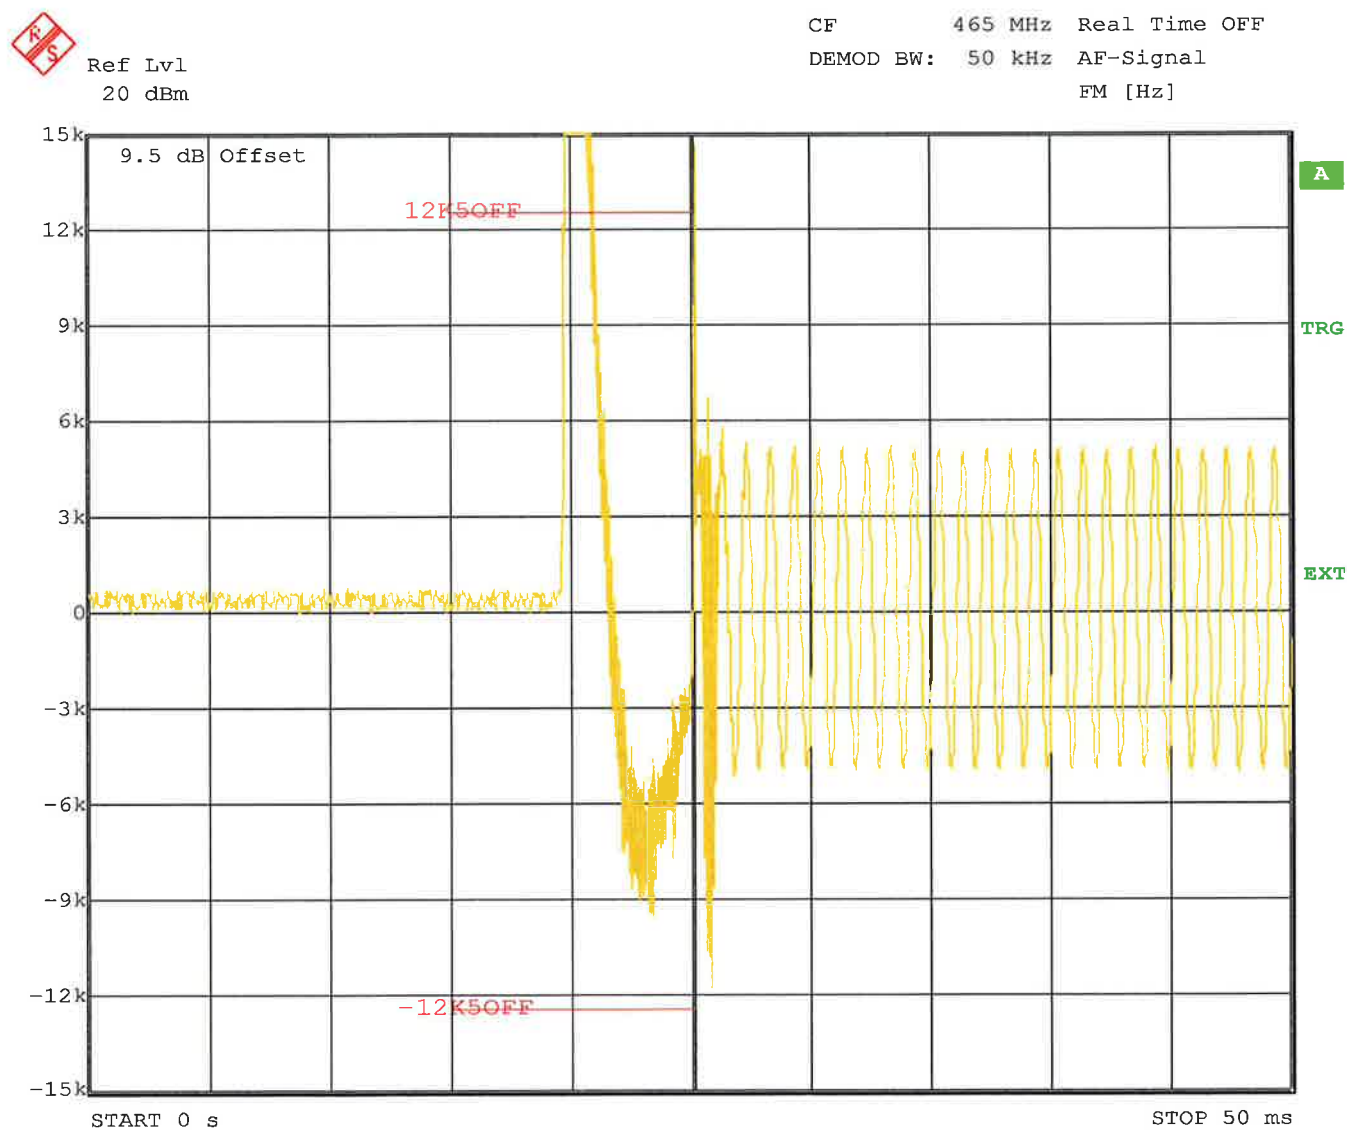

Date: 16.MAR.2011 13:27:20

Transient frequency behaviour

§ 5.9

Operating mode: t_{on} is in the middle of the screen (25ms pre-trigger)


Frequency: 470 MHz

Transmitter switching on



Ref Lvl
20 dBm

CF 470 MHz Real Time OFF
DEMOD BW: 50 kHz AF-Signal
FM [Hz]

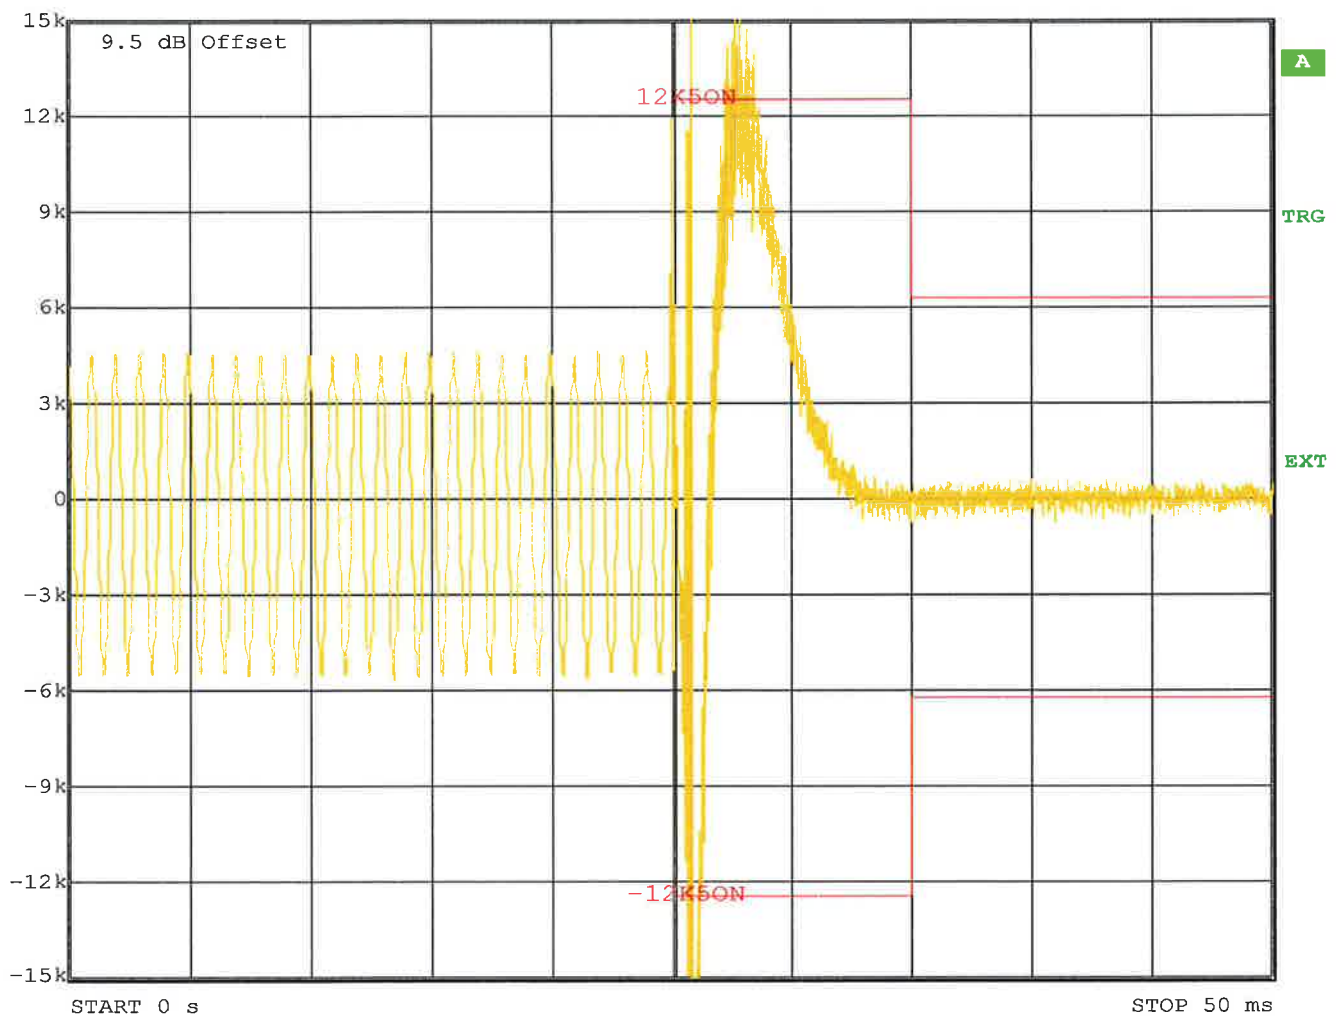

Date: 16.MAR.2011 13:25:41


Transient frequency behaviour

§ 5.9

Operating mode: t_{off} is in the middle of the screen (25ms pre-trigger)

Frequency: 470 MHz

Transmitter switching off

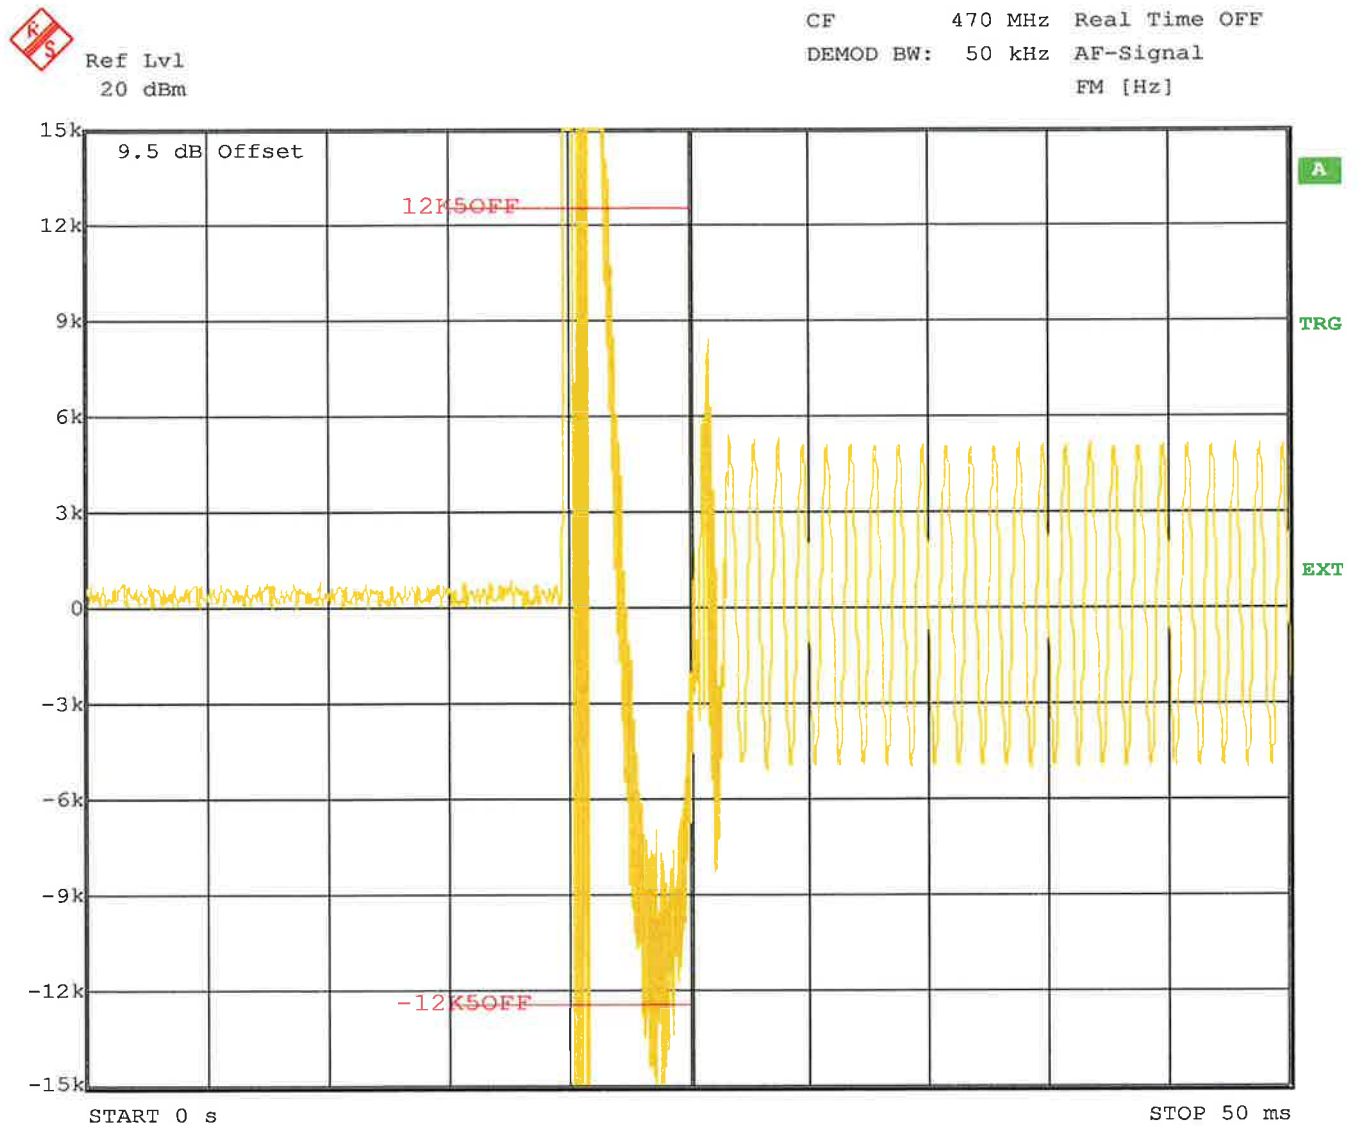

Date: 16.MAR.2011 13:27:38

Receiver spurious emissions

§ 5.11

LIMIT

The following receiver spurious emission limits shall be complied with:


(a) If a radiated measurement is made, all spurious emissions shall comply with the limits of Table 1.

Table 1 - Spurious Emission Limits for Receivers

Spurious frequency (MHz)	Field strength ($\mu\text{V/m}$) at 3 metres
30-88	100
88-216	150
216-960	200
above 960	500

(b) If a conducted measurement is made, no spurious output signals appearing at the antenna terminals shall exceed 2 nanowatts per any 4 kHz spurious frequency in the band 30-1000 MHz, or 5 nanowatts above 1 GHz.

Test equipment used:

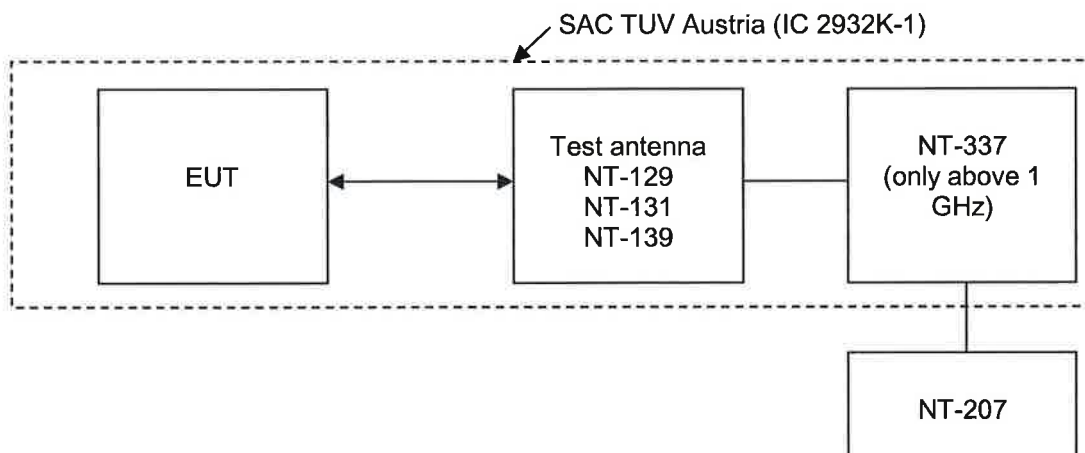

CHANNEL					
460 MHz		465 MHz		470 MHz	
Frequency (MHz)	Level (dB $\mu\text{V/m}$)	Frequency (MHz)	Level (dB $\mu\text{V/m}$)	Frequency (MHz)	Level (dB $\mu\text{V/m}$)
48	32,3 QP	48	33,0 QP	48	34,6 QP
415	33,8 QP	420	32,9 QP	425	32,3 QP
All others $\leq$ 500 MHz	< 30 QP	All others $\leq$ 500 MHz	< 30 QP	All others $\leq$ 500 MHz	< 30 QP
$\leq$ 1000	< 35 QP	$\leq$ 1000	< 35 QP	$\leq$ 1000	< 35 QP
> 1000	< 35 AV	> 1000	< 35 AV	> 1000	< 35 AV


Receiver spurious emissions

§ 5.11

Operating mode:

Frequency: 460 MHz

Receiving

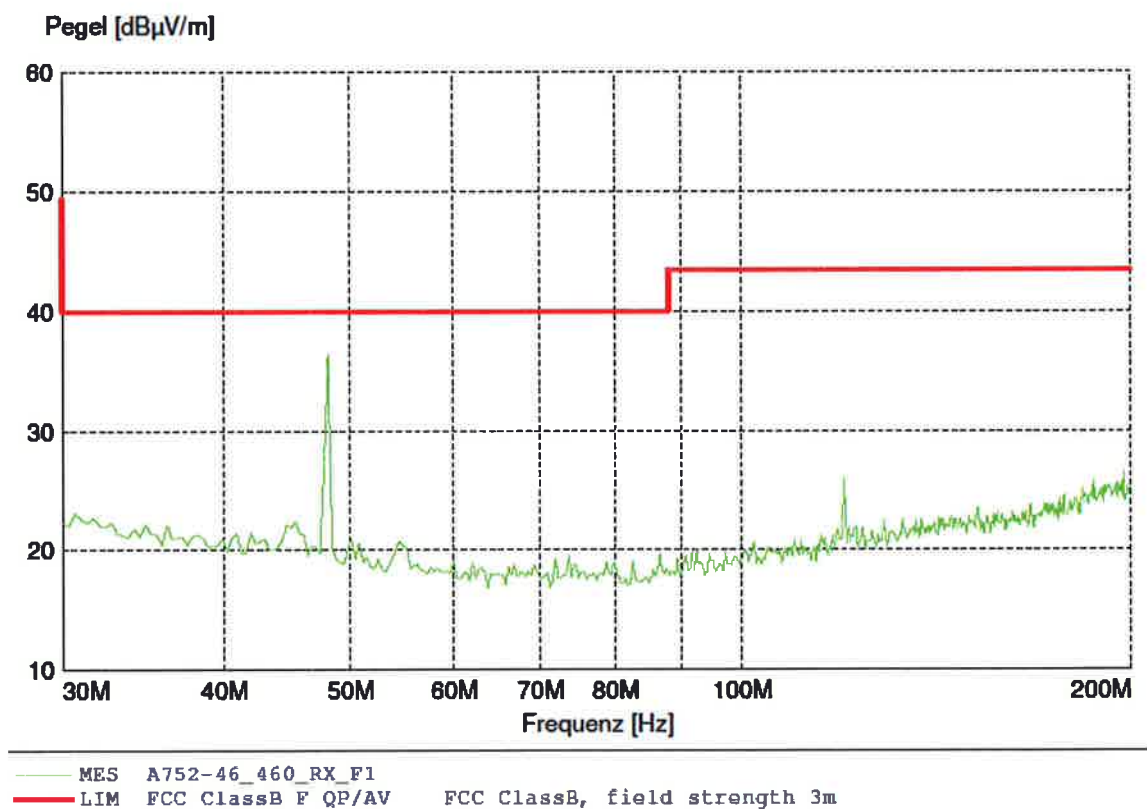


Receiver spurious emissions

§ 5.11

Operating mode:

Frequency: 460 MHz

Receiving

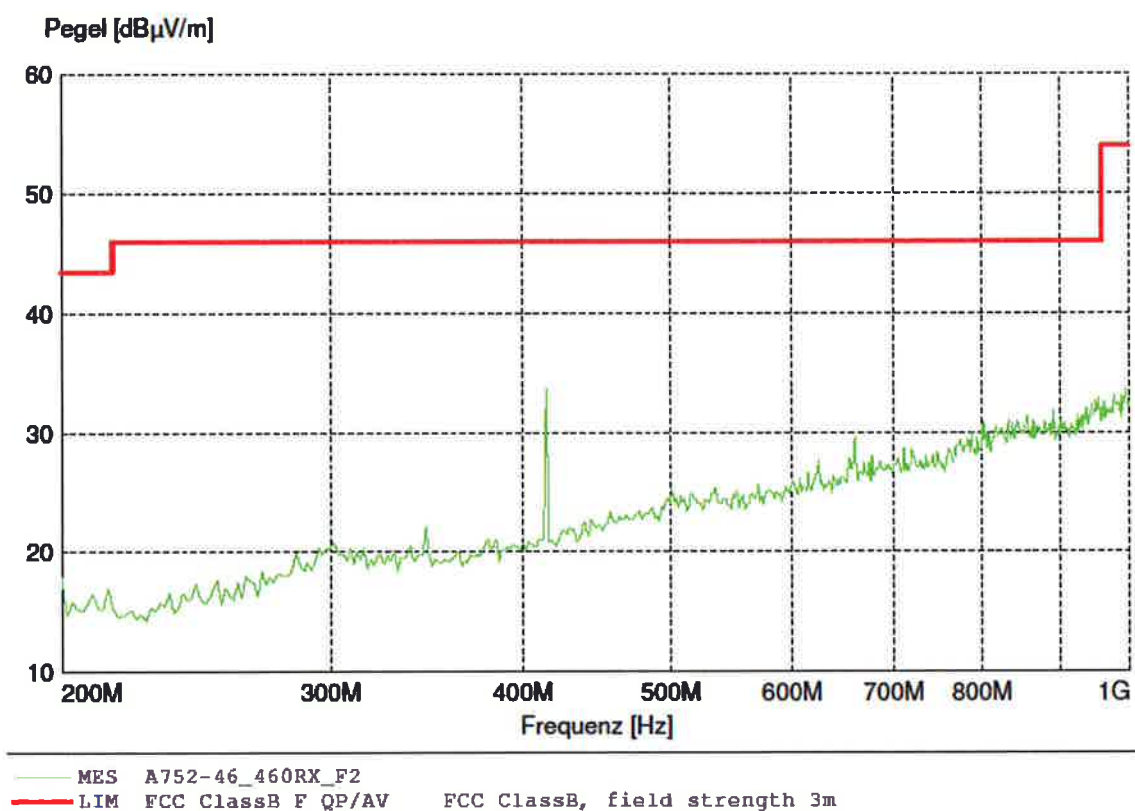


Receiver spurious emissions

§ 5.11

Operating mode:

Frequency: 460 MHz

Receiving

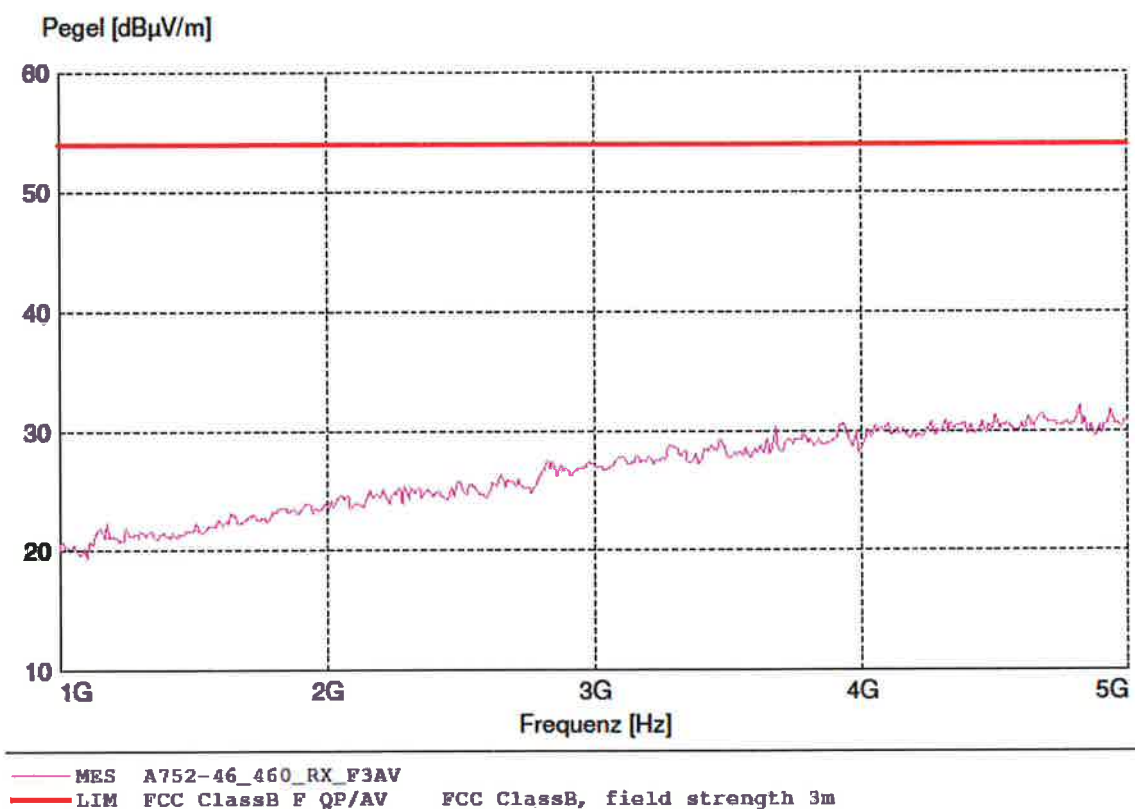


Receiver spurious emissions

§ 5.11

Operating mode:

Frequency: 465 MHz

Receiving

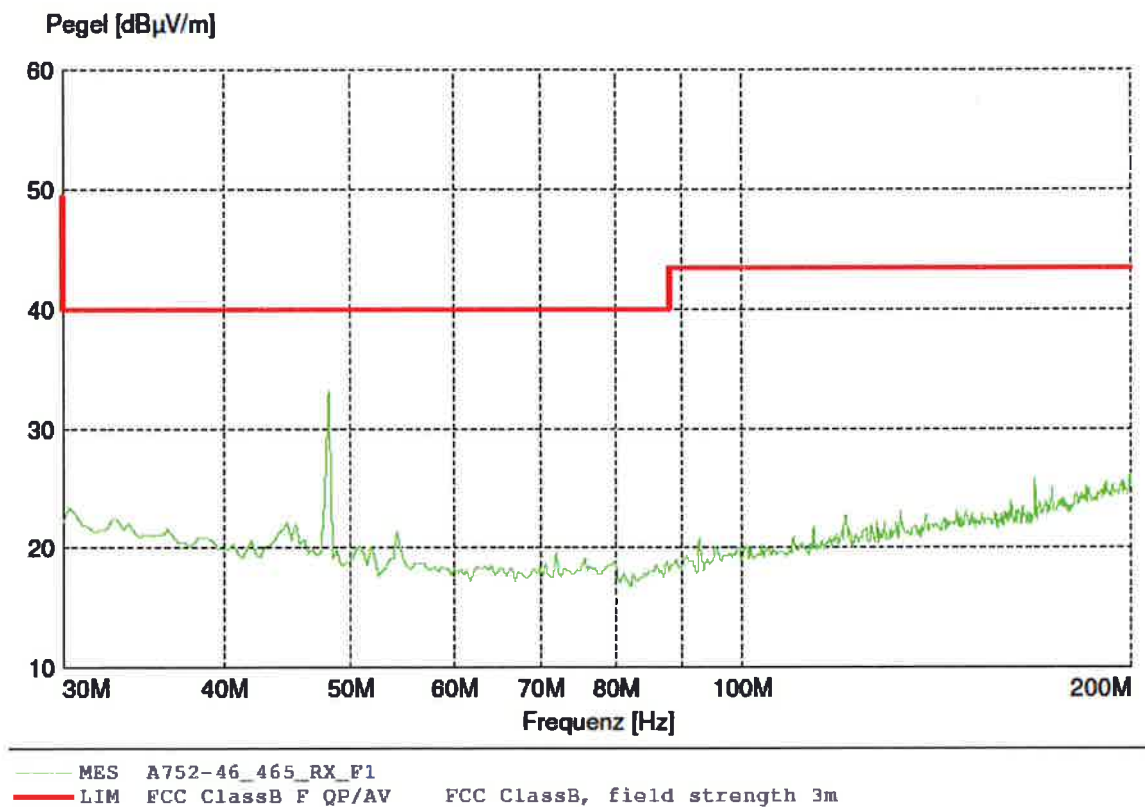


Receiver spurious emissions

§ 5.11

Operating mode:

Frequency: 465 MHz

Receiving

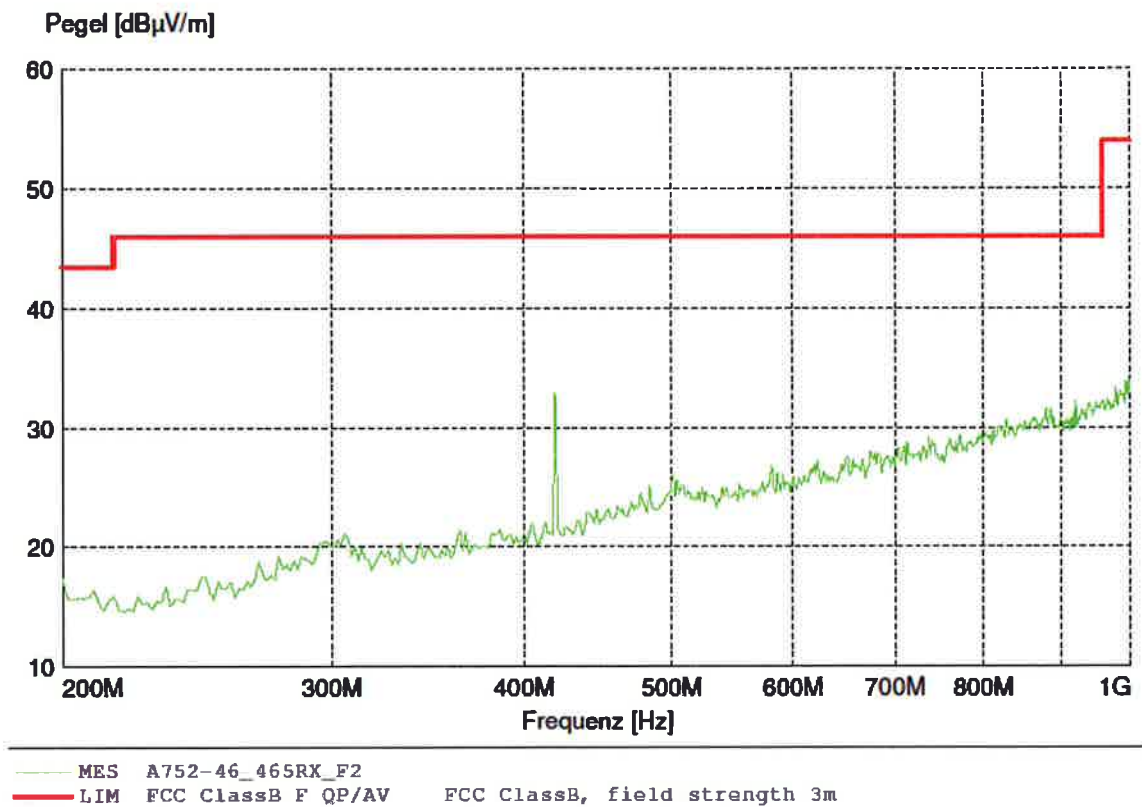


Receiver spurious emissions

§ 5.11

Operating mode:

Frequency: 465 MHz

Receiving

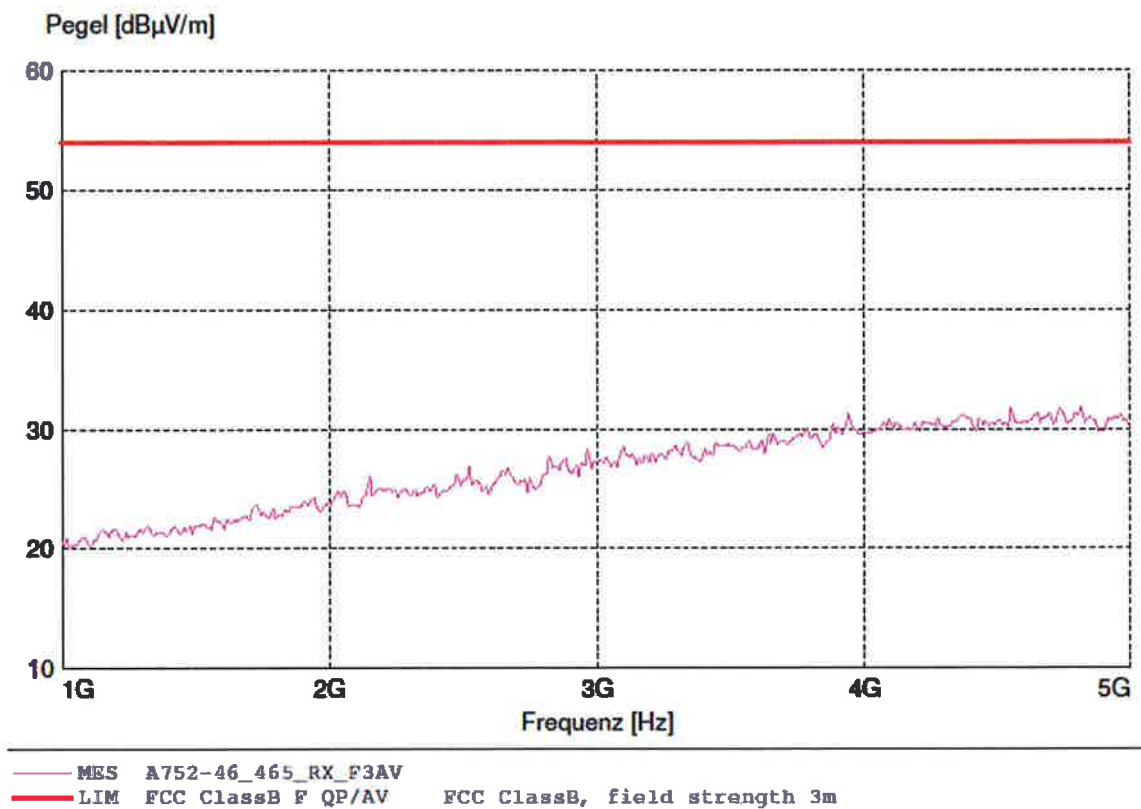


Receiver spurious emissions

§ 5.11

Operating mode:

Frequency: 470 MHz

Receiving

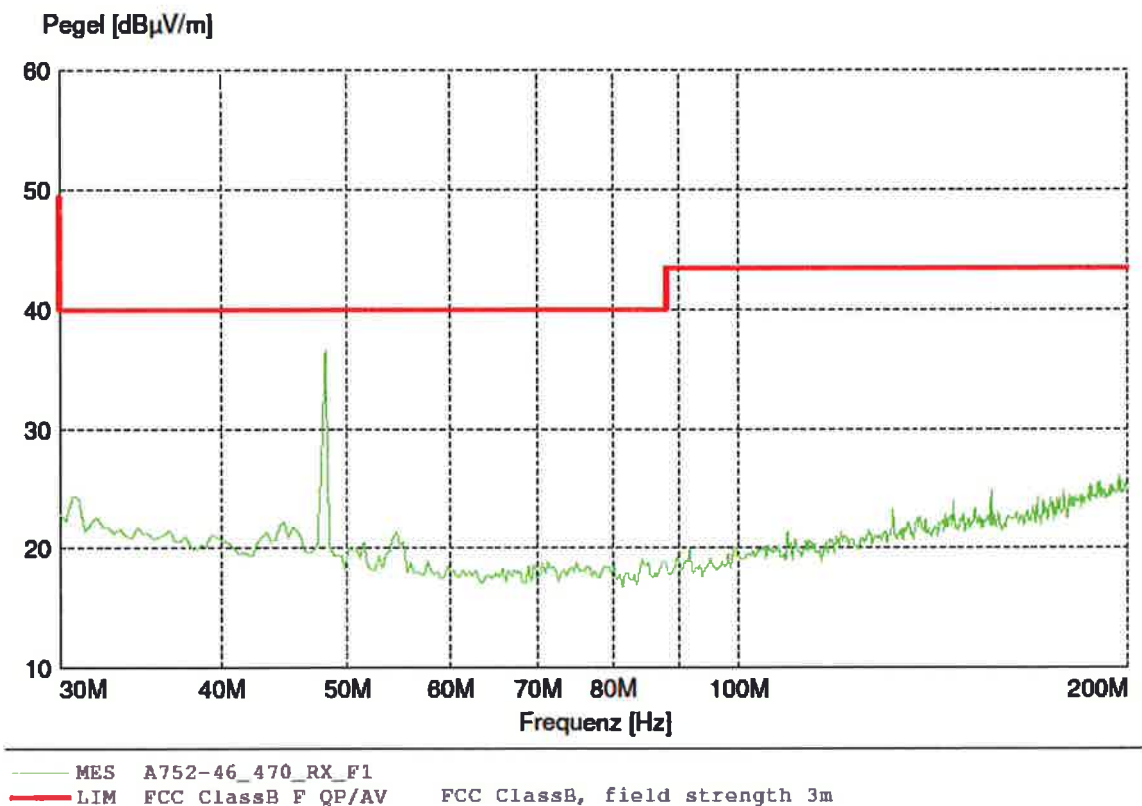


Receiver spurious emissions

§ 5.11

Operating mode:

Frequency: 470 MHz

Receiving

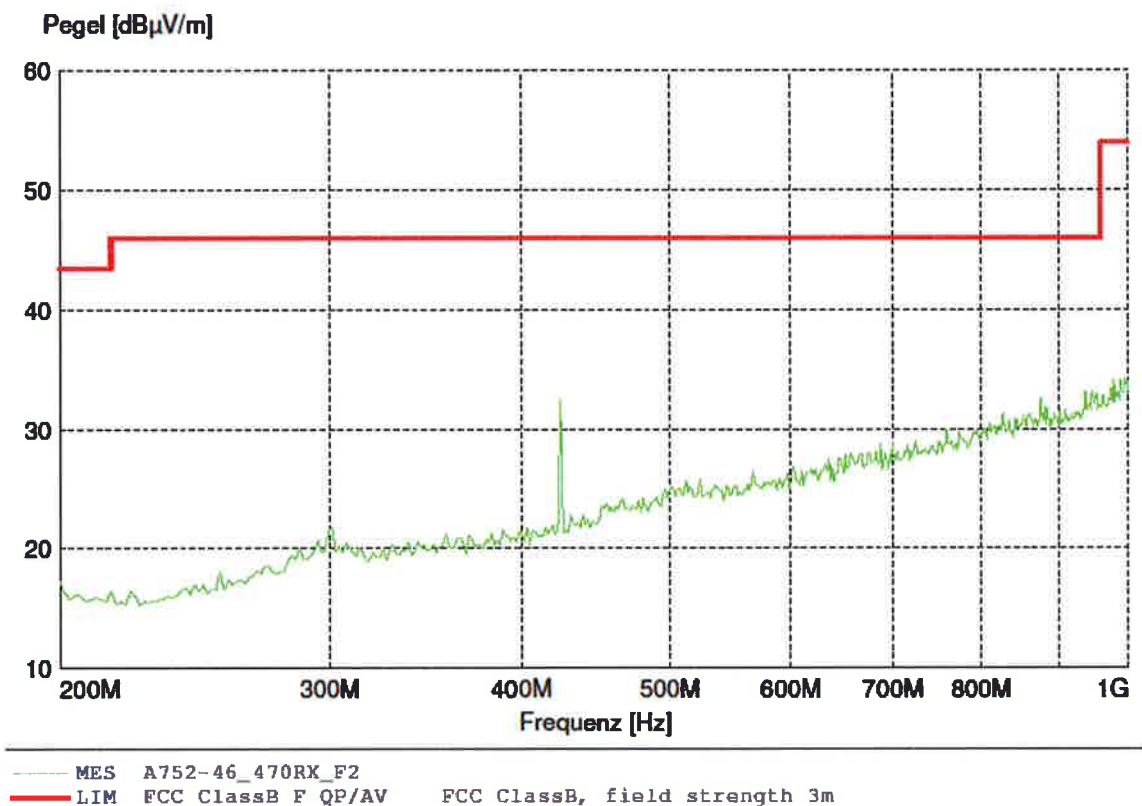


Receiver spurious emissions

§ 5.11

Operating mode:

Frequency: 470 MHz

Receiving

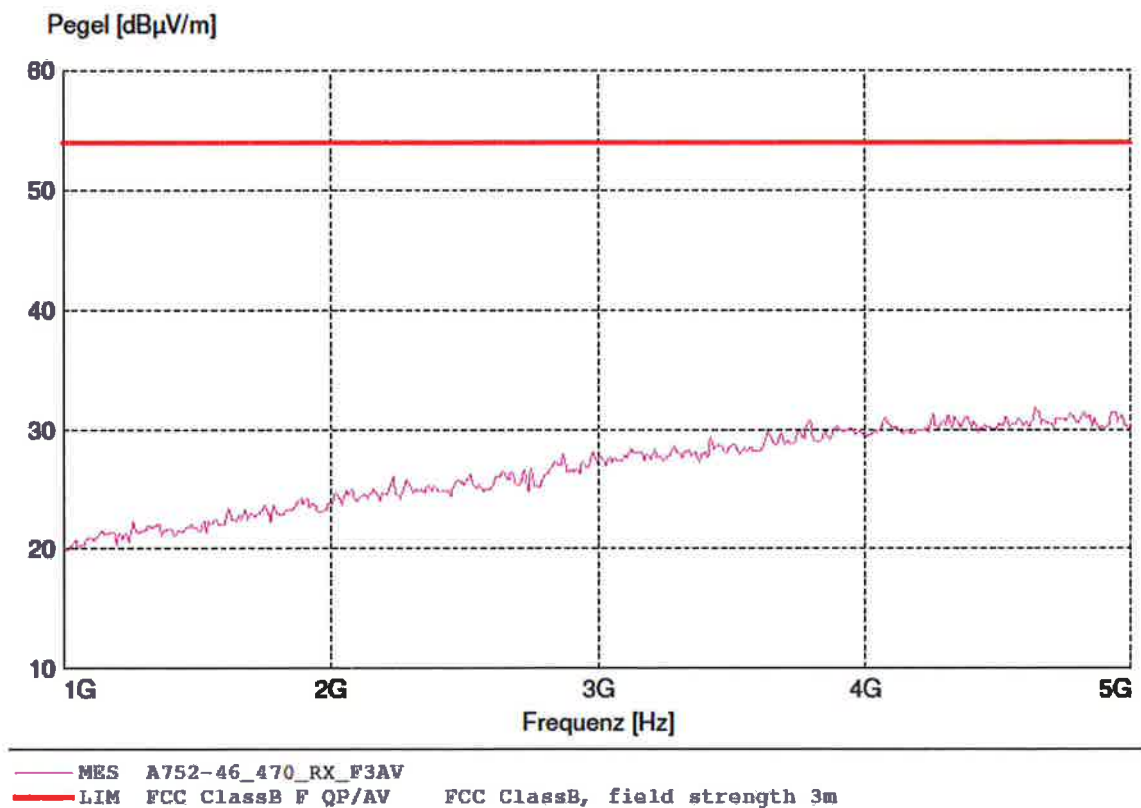

AC Power-Lines Conducted Emission

§ 7.2.4 of RSS-Gen

LIMIT

The purpose of this test is to measure unwanted radio frequency currents induced in any AC conductor external to the equipment which could conduct interference to other equipment via the AC electrical network.

Except when the requirements applicable to a given device state otherwise, for any licence-exempt radiocommunication device equipped to operate from the public utility AC power supply, either directly or indirectly, the radio frequency voltage that is conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in Table 2. The tighter limit applies at the frequency range boundaries.


The conducted emissions shall be measured with a 50 ohm/50 microhenry line impedance stabilization network.

Table 2 - AC Power Lines Conducted Emission Limits

Frequency range (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

*Decreases with the logarithm of the frequency.

Test Equipment used:

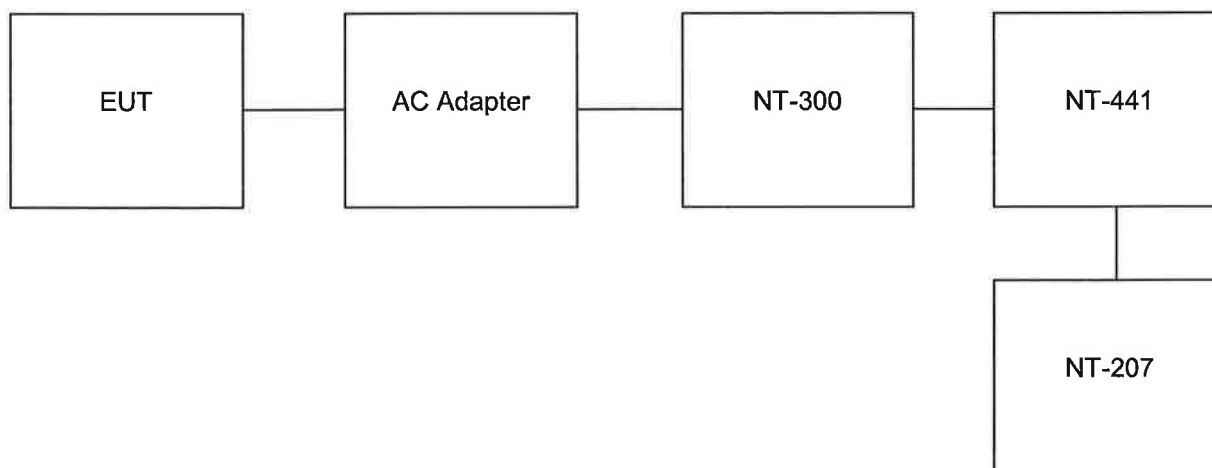


AC Power-Lines Conducted Emission

§ 7.2.4 of RSS-Gen

Operating mode:

Transmitting/Receiving at a rate of one packet per second at 465 MHz

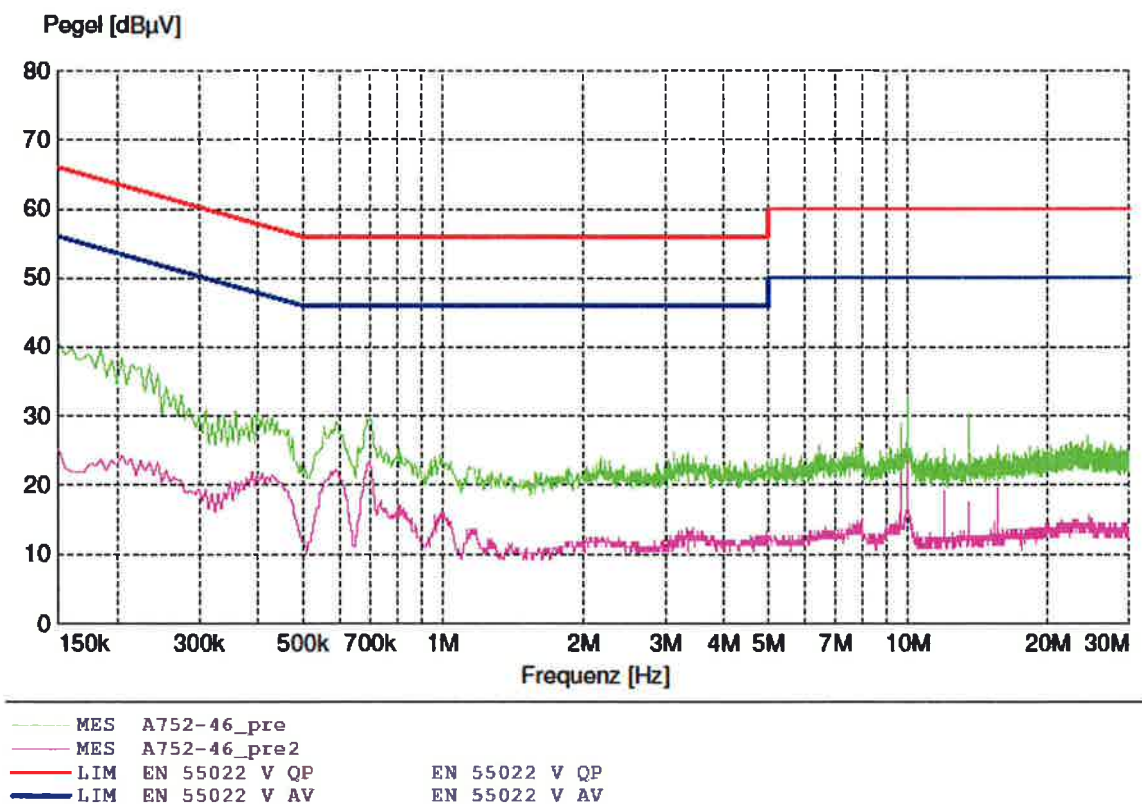

Appendix 1

Test equipment used

☐	Anechoic Chamber with 3m measurement distance	NT-100	☐	Spectrumanalyzer – FSP7 9 kHz – 7 GHz	NT-200
☐	Stripline according to ISO 11452-5	NT-108	☐	ESVP - Test receiver 20 - 1000 MHz	NT-201
☐	MA 240 - Antenna mast 1 - 4 m height	NT-110	☐	ESCI - Test receiver 9 kHz - 7 GHz	NT-203/1
☐	DS 412 - Turntable 0 - 400 ° Azimuth	NT-111	☐	ESI26 – Test receiver 20 Hz – 26,5 GHz	NT-207
☐	HD 100 Controller Mast+Turntable	NT-112	☐	Digital Radio Tester CTS55	NT-208
☐	HUF-Z2 - Bicon. Antennna 20 - 300 MHz	NT-120	☐	Noise-gen., ITU-R 559-2 20 Hz – 20 kHz	NT-209
☐	HUF-Z3 - Log. Per. Antenna 200 - 1000 MHz	NT-121	☐	CMTA - Radiocommunication analyzer ; 0,1 - 1000 MHz	NT-210
☐	HFH-Z2 - Loop Antenna 9 kHz - 30 MHz	NT-122	☐	3271 - Spectrum analyzer 100 Hz - 26,5 GHz	NT-211
☐	HFH-Z6 - Rod Antenna 9 kHz - 30 MHz	NT-123	☐	Digital Radio Tester Aeroflex 3920	NT-212/1
☐	3121C - Dipole Antenna 28 - 1000 MHz	NT-124	☐	2855S - Communication analyzer	NT-213
☐	3115 - Horn Antenna 1 - 18 GHz (immunity)	NT-125	☐	Mixer M28HW 26,5 GHz - 40 GHz	NT-214
☐	3116 - Horn Antenna 18 - 40 GHz	NT-126	☐	Diode Detector 0,01 GHz - 26,5 GHz	NT-215
☐	SAS-200/543 - Bicon. Antenna 20 MHz - 300 MHz	NT-127	☐	RubiSource T&M Timing reference	NT-216
☐	AT-1080 - Log. Per. Antenna 80 - 1000 MHz	NT-128	☐	Radiocommunicationanalyzer SWR 1180 MD	NT-217
☐	HK-116 - bicon. Antenna 20 MHz - 300 MHz	NT-129	☐	Mixer M19HWD 40 GHz – 60 GHz	NT-218
☐	HK-116 - bicon. Antenna 20 MHz - 300 MHz	NT-130	☐	Mixer M12HWD 60 GHz – 90 GHz	NT-219
☐	3146 - Log. Per. Antenna 200 – 1000 MHz	NT-131	☐	DSO9104 Digital scope	NT-220/1
☐	Loop Antenna H-Field	NT-132	☐	TPS 2014 Digital scope	NT-222
☐	Horn Antenna 500 MHz - 2900 MHz	NT-133	☐	Artificial Ear according to IEC 60318	NT-224
☐	Horn Antenna 500 MHz - 6000 MHz	NT-133/1	☐	1 kHz Sound calibrator	NT-225
☐	Log. per. Antenna 800 MHz - 2500 MHz	NT-134	☐	B10 - Harmonics and flicker analyzer	NT-232
☐	Log. per. Antenna 800 MHz - 2500 MHz	NT-135	☐	SRM-3000 Spectrumanalyzer	NT-233
☐	BiConiLog Antenna 26 MHz – 2000 MHz	NT-137	☐	SRM-3006 Spectrumanalyzer	NT-233/1a
☐	Conical Dipol Antenna PCD8250	NT-138	☐	E-field probe SRM 75 MHz – 3 GHz	NT-234
☐	HF 906 - Horn Antenna 1 - 18 GHz (emission)	NT-139	☐	Field Meter NBM-500 incl. E- and H-Field probes	NT-240a-d
☐	HZ-1 Antenna tripod	NT-150	☐	Hall-Teslameter ETM-1	NT-241
☐	BN 1500 Antenna tripod	NT-151	☐	EFA-3 H-field- / E-field probe	NT-243
☐	Ant. tripod for EN61000-4-3 Model TP1000A	NT-156	☐	Field Meter EMR-200 100 kHz – 3 GHz	NT-244
☐	Power quality analyzer Fluke 1760 (complete set)	NT-160 - NT-172	☐	E-field probe 100 kHz – 3 GHz	NT-245

Division Medical
Technology/
Communication
Technology/ EMC

Department: FG

Test report number:
M/FG-11/113

Page: 1 of 3

Date: 27.10.2011

Checked by: h

Appendix 1 (continued)

Test equipment used

☐	H-field probe 300 kHz – 30 MHz	NT-246	☐	PSURGE 4.1 Surge generator	NT-324
☐	E-field probe 3 MHz – 18 GHz	NT-247	☐	TRANSIENT 1000 Immunity test system	NT-325
☐	H-field probe 27 MHz – 1 GHz	NT-248	☐	VCS 500-M6 Surge-Generator	NT-326
☐	ELT-400 1 Hz – 400 kHz	NT-249	☐	BTA-250 - RF-Amplifier 9 kHz - 220 MHz / 250 W	NT-330
☐	MDS 21 - Absorbing clamp 30 - 1000 MHz	NT-250	☐	T82-50 RF-Amplifier 2 GHz – 8 GHz	NT-331
☐	FCC-203I EM Injection clamp	NT-251	☐	500W1000M7 - RF-Amplifier 80 - 1000 MHz / 500 W	NT-332
☐	FCC-203I-DCN Ferrite decoupling network	NT-252	☐	AS0102-65R - RF-Amplifier 1 GHz - 2 GHz	NT-333
☐	PR50 Current Probe	NT-253	☐	APA01 – RF-Amplifier 0,5 GHz – 2,5 GHz	NT-334
☐	PR630 Current Probe	NT-254	☐	Preamplifier 1 GHz - 4 GHz	NT-335
☐	Fluke 87 V True RMS Multimeter	NT-260	☐	Preamplifier for GPS MKU 152 A	NT-336
☐	Model 2000 Digital Multimeter	NT-261	☐	Preamplifier 100 MHz – 23 GHz	NT-337
☐	Fluke 87 V Digital Multimeter	NT-262/1	☐	DC Block 10 MHz – 18 GHz Model 8048	NT-338
☐	ESH2-Z5-U1 Artificial mains network 4x25A	NT-300	☐	2-97201 Electronic load	NT-341
☐	ESH3-Z5-U1 Artificial mains network 2x10A	NT-301	☐	TSX3510P - Power supply 0-30 V / 0 - 10 A	NT-344
☐	ESH3-Z6-U1 Artificial mains network 1x100A	NT-302	☐	TSX3510P - Power supply 0-30 V / 0 - 10 A	NT-345
☐	ESH3-Z4 T-Artificial network	NT-303	☐	VDS 200 Mobil-impuls-generator	NT-350
☐	PHE 4500/B Power amplifier	NT-304	☐	LD 200 Mobil-impuls-generator	NT-351
☐	EZ10 T-Artificial Network	NT-305	☐	MPG 200 Mobil-Impuls-Generators	NT-352
☐	ENY22 Artificial Network	NT-308	☐	EFT 200 Mobil-impuls-generator	NT-353
☐	ENY41 Artificial Network	NT-309	☐	AN 200 S1 Artificial Network	NT-354
☐	SMG - Signal generator 0,1 - 1000 MHz	NT-310	☐	FP-EFT 32M 3 ph. Coupling filter (Burst)	NT-400/1
☐	SMA100A - Signal generator 9 kHz - 6 GHz	NT-310/1	☐	PHE 4500 - Mains impedance network	NT-401
☐	PM 5518 TXVPS Video generator	NT-311	☐	IP 6.2 Coupling filter for data lines (Surge)	NT-403
☐	RefRad Reference generator	NT-312	☐	TK 9421 High Power Volt. Probe 150 kHz - 30 MHz	NT-409
☐	SMP 02 Signal generator 10 MHz - 20 GHz	NT-313	☐	ESH2-Z3 - Probe 9 kHz - 30 MHz	NT-410
☐	40 MHz Arbitrary Generator TGA1241	NT-315	☐	IP 4 - Capacitive clamp (Burst)	NT-411
☐	Artificial mains network NSLK 8127-PLC	NT-316	☐	Highpass-Filter 100 MHz – 3 GHz	NT-412
☐	PEFT - Burst generator up to 4 kV	NT-320	☐	Highpass-Filter 600 MHz – 4 GHz	NT-413
☐	ESD 30 System up to 25 kV	NT-321	☐	Highpass-Filter 1250 MHz – 4 GHz	NT-414

Division Medical
Technology/
Communication
Technology/ EMC

Department: FG

Test report number:
M/FG-11/113

Page: 2 of 3

Date: 27.10.2011

Checked by: 

Appendix 1 (continued)

Test equipment used

☐	Highpass-Filter 1800 MHz – 16 GHz	NT-415	☐	FCC-801-AF10 Coupling decoupling network	NT-461
☐	Highpass-Filter 3500 MHz – 18 GHz	NT-416	☐	FCC-801-S25 Coupling decoupling network	NT-462
☐	RF-Attenuator 10 dB DC – 18 GHz / 50 W	NT-417	☐	FCC-801-T4 Coupling decoupling network	NT-463
☐	RF-Attenuator 6 dB DC – 18 GHz / 50 W	NT-418	☐	FCC-801-C1 Coupling decoupling network	NT-464
☐	RF-Attenuator 3 dB DC – 18 GHz / 50 W	NT-419	☐	F-16A - Current probe 1kHz - 70MHz	NT-465
☐	RF-Attenuator 20 dB DC - 1000 MHz / 25 W	NT-421	☐	95242-1 – Current probe 1 MHz – 400 MHz	NT-468
☐	RF-Attenuator 30 dB DC - 1000 MHz / 1 W	NT-423	☐	94106-1L-1 – Current probe 100 kHz – 450 MHz	NT-471
☐	RF-Attenuator 30 dB	NT-424	☐	GA 1240 Power amplifier according to EN 61000-4-16	NT-480
☐	RF-Attenuator 6 dB DC - 1000 MHz / 1 W	NT-425	☐	Coupling networks according to EN 61000-4-16	NT-481 - NT-483
☐	RF-Attenuator 6 dB DC - 1000 MHz / 1 W	NT-426	☐	Van der Hoofden Test Head	NT-484
☐	RF-Attenuator 6 dB	NT-428	☐	PC P4 3 GHz Test computer	NT-500
☐	RF-Attenuator 0 dB - 81 dB	NT-429	☐	PC P4 1700 MHz Notebook	NT-505
☐	WRU 27 - Band blocking 27 MHz	NT-430	☐	Monitoring camera with Monitor	NT-511
☐	WHJ450C9 AA - High pass 450 MHz	NT-431	☐	ES-K1 Version 1.71 SP2 Test software	NT-520
☐	WHJ250C9 AA - High pass 250 MHz	NT-432	☐	EMC32 Version 8.51 Test software	NT-520/1
☐	RF-Load 150 W	NT-433	☐	SRM-TS Version 1.3 software for SRM-3000	NT-522
☐	Impedance transducer 1:4 ; 1:9 ; 1:16	NT-435	☐	SPS-PHE Test software V2.5 voltage fluctuations/harmonics	NT-525
☐	RF-Attenuator DC – 18 GHz 6 dB	NT-436	☐	SPS-EM Test software V4.0 EN61000-4-11	NT-527
☐	RF-Attenuator DC – 18 GHz 6 dB	NT-437	☐	Noise power test apparatus according to EN 55014	NT-530
☐	RF-Attenuator DC – 18 GHz 10 dB	NT-438	☐	Vertical coupling plane (ESD)	NT-531
☐	RF-Attenuator DC – 18 GHz 20 dB	NT-439	☐	Test cable #4 for EN 61000-4-6	NT-553
☐	I+P 7780 Directional coupler 100 - 2000 MHz	NT-440	☐	Test cable #3 for conducted emission	NT-554
☐	ESH3-Z2 - Pulse limiter 9 kHz - 30 MHz	NT-441	☐	Test cable #5+#6 ESD-cable (2x470k)	NT-555 + NT-556
☐	Power Divider 6 dB/1 W/50 Ohm	NT-443	☐	Test cable #8 Sucoflex 104EA	NT-559
☐	Directional coupler 0,1 MHz – 70 MHz	NT-444	☐	Test cable #9 (for outdoor measurements)	NT-580
☐	Directional coupler 0,1 MHz – 70 MHz	NT-445	☐	Test cable #10 (for outdoor measurements)	NT-581
☐	Tube imitations according to EN 55015	NT-450	☐	Test cable #13 Sucoflex 104PE	NT-584
☐	FCC-801-M3-16A Coupling decoupling network	NT-458	☐	Test cable #21 for SRM-3000	NT-592
☐	FCC-801-M2-50A Coupling decoupling network	NT-459	☐	Shield chamber	NT-600
☐	FCC-801-M5-25 Coupling decoupling network	NT-460	☐	Climatic chamber	M-1200

Division Medical
Technology/
Communication
Technology/ EMC

Department: FG

Test report number:
M/FG-11/113

Page: 3 of 3

Date: 27.10.2011

Checked by: 