

## FCC EVALUATION REPORT FOR CERTIFICATION

*KOREA Standard Technology*

*Test report No.: KST-FCC0430*

**Applicant's Name :** TAEJIN INFOTECH CO., LTD.

**Applicant's Address :** 6F, Woolim e-BIZ Center, 170-5, Guro-Dong, Guro-Ku, Seoul, Korea

**Manufacturer's Name :** TAEJIN INFOTECH CO., LTD.

**Manufacturer's Address :** 6F, Woolim e-BIZ Center, 170-5, Guro-Dong, Guro-Ku, Seoul, Korea

**EUT's:**

**FCC ID** : SI31101

**Product Name** : Memory Card

**Model Number(s)** : Jet-Speed PRO

**Product Options** : N/A

**Category** : FCC Part 15 subpart B

Class B Computing Digital Device

### Supplementary Information


The device bearing the brand name and FCC ID specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with measurement procedures specified in ANSI C63.4-2000.

I attest to the accuracy of data and all measurements reported herein were performed by or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

**Test Date : November 01, 2004.**

**Issued Date : November 04, 2004.**

**Tested by:**

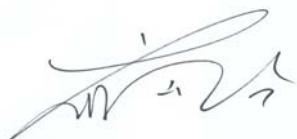

Choi, Jae-Rak

**Approved by:**



Lee, Weon-Woo

# EMI TEST REPORT



Report reference No: KST-FCC0430

## Contents

1. Description of Device
2. Test Facility
3. MAP
4. Test system configuration
5. Description of E.U.T.
6. Summary of test results.
7. Test results.
8. Photographs.

Appendix. Schematics

Specifications.

# EMI TEST REPORT



Report reference No: KST-FCC0430

## 1. Description of Device

1) Kind of equipment:	Memory Card
2) FCC ID:	SI31101
3) Model Name:	Jet-Speed PRO
4) Serial No.:	None
5) Type of Sample Tested:	Pre-production
6) High Frequency Used:	40.000 MHz
7) Adapter	-None
8) Power Rating:	1phase AC100-240V, 50/60Hz, 300W Output: DC 12V, 5V - PC POWER
9) Tested Power supply:	1phase AC120V, 60Hz
10) Date of Manufacture:	October , 2004
11) Manufacture:	TAEJIN INFOTECH CO.,LTD.
12) Description of Operating:	Scroll All "H" Character Resolution 1024*768 , Vertical Frequency: 75Hz
13) Dates of Test:	November 01, 2004
14) Place of Tests:	Korea Standard Technology EMC site
15) Test Report No:	KST-FCC0430

# EMI TEST REPORT



Report reference No: KST-FCC0430

## 2. Test Facility

The open field test site and conducted measurement facility are used for these testing, where are located following address and drawing. This site was fully described in a report dated November 14, 2002, that was submitted to the FCC.

Korea Standard Technology ( KOSTEC Co., Ltd)

Head office:

4F, 1503-2, Kwanyang-dong, Dongan-gu, Anyang-shi, Kyunggi-do, Korea  
Telephone No : 82-31-388-2051

Facsimile No: 82-31-388-2052

Test Lab

:180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea  
Telephone No : 82-31-222-4251  
Facsimile No: 82-31-222-4252

**MIC**(Ministry of Information and Communication) No: **KR0042**

**FCC** Filing No. : **525762**

**VCCI** Membership Number : **2005**

**VCCI** Registration Number : **R-1657 / C-1763**


# EMI TEST REPORT




Report reference No: KST-FCC0430

## 3. MAP

Korea

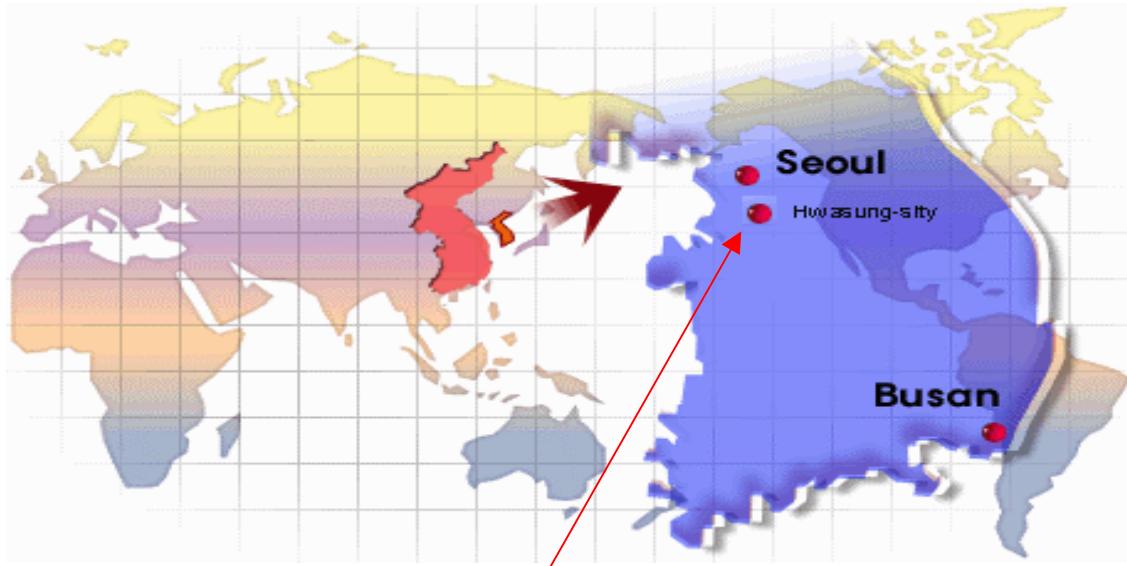

Hwasung-si (open area test site)

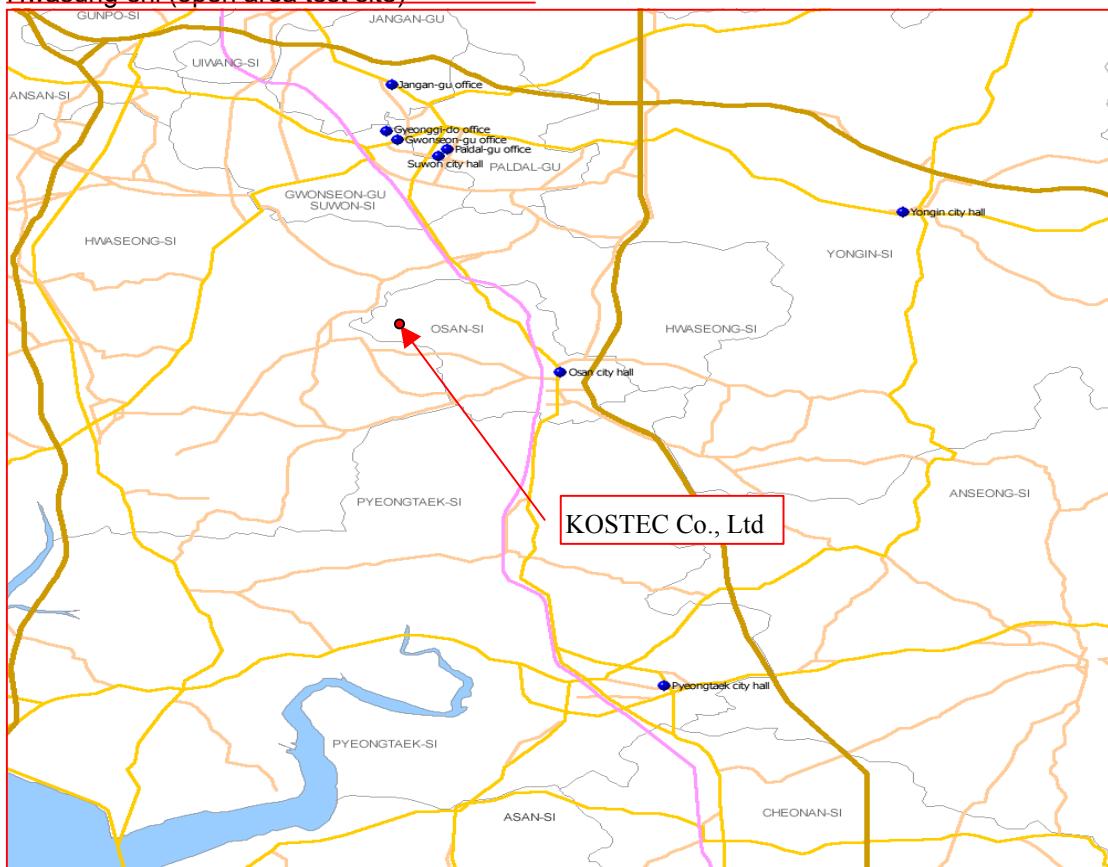

KOSTEC Co.,Ltd.

180-254, Annyung-Ri, Taean-Yup, Hwasung-si, Kyunggi-do, Korea  
Tel : +82-31-222-4251 Fax: +82-31-222-4252  
<http://www.kosteclab.com>

Page : 5 of 16  
November 01, 2004

# EMI TEST REPORT



Report reference No: KST-FCC0430

## 4. Test System Configuration

### Operation Environment

	<u>Temperature</u> ( ° C )	<u>Humidity</u> ( % )	<u>Pressure</u> ( hPa )
Ambient			
10m Open Area site	21.7	47	1007
Shielded room:	21	45	1006

### Test site

These testing were performed following locations ;

Shielded room : Conducted Emission,

10m Open Area Site: Radiated Emission

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC.

The factors contributing to uncertainties are test receiver, Cable loss, antenna factor calibration, Antenna directivity, antenna factor variation with height, antenna phase center variation, antenna frequency interpolation, measurement distance variation, site imperfection, mismatch, and system repeatability.

Based on NIS 80,81, The measurement uncertainty level with a 95% confidence level were applied.

### sample calculation

#### Conducted emission

The field strength is calculated by adding the LISN factor, cable loss from the measured reading.

The sample calculation is as follows:

$$FS = MR + LF + CL$$

MR = Meter Reading

LF = LISN Factor

CL = Cable Loss

If MR is 30dB, LISN Factor 1dB, CL 1dB

The result (MR) is

$$30 + 1 + 1 = 32 \text{dBuV}$$

KOSTEC Co.,Ltd.

180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea

Tel : +82-31-222-4251 Fax: +82-31-222-4252

<http://www.kosteclab.com>

Page : 6 of 16  
November 01, 2004

# EMI TEST REPORT



Report reference No: KST-FCC0430

## 5. Description of E.U.T.

### Product Description

Manufactured By:	TAEJIN INFOTECH CO., LTD .
Address:	6F, Woolim e-BIZ Center, 170-5, Guro-Dong, Guro-Ku, Seoul, Korea
Model:	Jet-Speed PRO
Serial Number:	None

### Configuration of EUT

Description	Manufacturer	Model / Part #	Serial Number
Memory Card	TAEJIN INFOTECH CO.,LTD.	Jet-Speed Lite	None
RAM	SAMSUNG	PC2700U	None
RAM	SAMSUNG	PC2700U	None
RAM	SAMSUNG	PC2700U	None
RAM	SAMSUNG	PC2700U	None
RAM	SAMSUNG	PC2700U	None
RAM	SAMSUNG	PC2700U	None
RAM	SAMSUNG	PC2700U	None
RAM	SAMSUNG	PC2700U	None
RAM	SAMSUNG	PC2700U	None

### EUT Used cables

Cable Type	Shield	Length (m)	Ferrite	Connector	Connection Point 1	Connection Point 2
POWER	Y	1.5	-	AC INLET	PC	Main power source
-	-	-	-	PCI Slot	EUT	Personal computer
PS/2	Y	1.2	Y	Din	PC	Keyboard
PS/2	Y	1.5	-	Din	PC	Mouse
Parallel	Y	1.5	Y	D-sub	PC	Printer
VGA	Y	1.5	Y	D-sub	PC	Monitor
S-Video	Y	1.8	-	Din	EUT	-

KOSTEC Co.,Ltd.

180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea

Tel : +82-31-222-4251 Fax: +82-31-222-4252

<http://www.kosteclab.com>

Page : 7 of 16  
November 01, 2004

# EMI TEST REPORT



Report reference No: KST-FCC0430

## 7. TEST RESULTS

### 7.1 Conducted emission

#### Measurement procedure

##### Mains

The measurements were performed in a shielded room. EUT was placed on a non-metallic table height of 0.4m above the reference ground plane. They were folded back and forth forming a bundle 30cm to 40Cm long and were hanged at a 40cm height to the ground plane.

Each EUT power lead, except ground (safety) lead, were individually connected through a LISN to input power source.

Both lines of power cord, hot and neutral, were measured.

#### Used equipment

Equipment	Model no.	Serial no.	Makers	Next cal date	Used
Test receiver	ESPI3	100109	R&S	2005.3.15	●
L.I.S.N.	ESH2-Z5	100044	R&S	2005.4.23	●
	ESH2-Z5	100147	R&S	2005.4.23	●

#### Measurement uncertainty

Conducted Emission measurement :  $\pm 2.4$  (K=2)

#### Test data

FREQ. (MHz)	LEVEL(dB $\mu$ N)		LINE Pol	Loss (dB)	LIMIT(dB $\mu$ N)		MARGIN(dB $\mu$ N)	
	QP	AV			QP	AV	QP	AV
0.150	40.78	34.85	L	0.29	65.57	55.57	25.08	21.01
0.202	38.20	37.59	N	0.29	63.53	53.53	25.62	16.23
0.302	36.00	35.00	N	0.29	60.19	50.19	24.48	15.48
0.506	30.04	28.40	L	0.90	56.00	46.00	26.86	18.50
0.998	20.34	15.15	N	0.43	56.00	46.00	36.09	31.28
12.202	29.97	25.82	N	1.52	60.00	50.00	31.55	25.70
13.006	38.53	33.80	L	1.61	60.00	50.00	23.08	17.81
28.470	30.16	24.93	N	2.28	60.00	50.00	32.12	27.35

\* Level = test receiver reading value

\* Loss = LISN insertion Loss + Cable Loss


# EMI TEST REPORT



Report reference No: KST-FCC0430


## Conducted emission test graph

### Line. Live

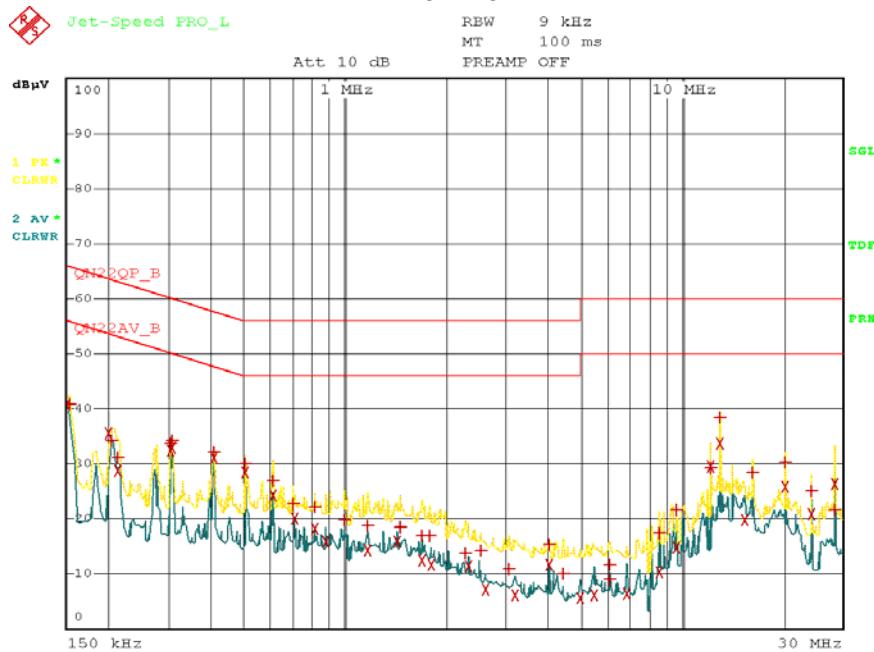

Date: 1.NOV.2004 12:32:00

### Line. Neutral

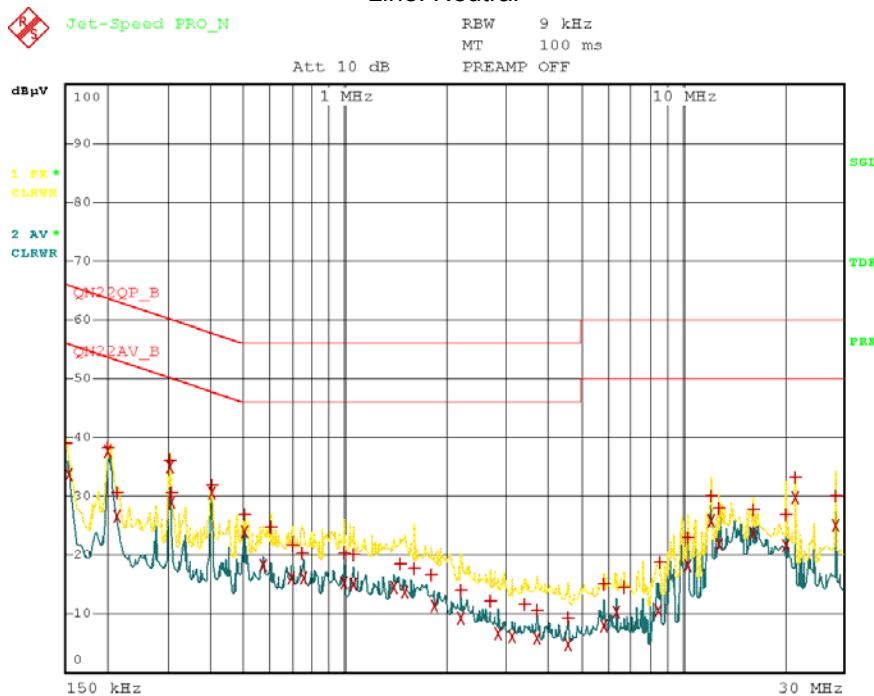

Date: 1.NOV.2004 12:28:38

KOSTEC Co.,Ltd.  
180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea  
Tel : +82-31-222-4251 Fax: +82-31-222-4252  
http://www.kosteclab.com

Page : 10 of 16  
November 01, 2004

# EMI TEST REPORT



Report reference No: KST-FCC0430

## 7.2 Radiated Emission

### Measurement procedure

A pretest was performed at 3m distances in a semi-anechoic chamber for searching correct frequency. The final test was done at a 10m open area test site with a quasi-peak detector. EUT was placed on a non-metallic table height of 0.8m above the reference ground plane. Cables connected to EUT were fixed to cause maximum emission. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

### Used equipment

Equipment	Model no.	Serial no.	Makers	Next cal date
Test receiver	ESCS30	100111	R&S	2005.3.17
Ultra broadband antenna	HL562	100075	R&S	2005.3.16
Matching network	RAM	358.5414.02	R&S	-
Antenna Mast	AT14	none	Daeil EMC	-
Turn Table	TT15	none	Daeil EMC	-
10m Open area site chamber(3m)	none	none	KOSTEC Lab	-
	none	none	FRANCONIA	-

### Measurement uncertainty

#### Radiated Emission measurement :

30-300MHz +3.96dB / -4.04dB  
300-1000MHz +3.04dB / -3.00dB

### Test data

Freq (MHz)	Reading (dBuV/m)	P (H/V)	H (m)	A (.)	Antenna (dB)	Cable Loss (dB)	Result (dBuV/m)	Limit (dB)	Margin (dB)
40.00	19.10	H	2.40	360	14.10	2.50	22.40	40.0	17.60
80.00	12.60	V	1.50	180	8.20	3.40	24.20	40.0	15.80
120.00	14.50	V	1.50	180	9.60	3.70	27.80	43.5	15.70
133.63	14.97	H	2.40	360	8.43	4.10	27.50	43.5	16.00
167.04	24.24	H	2.40	360	7.40	4.36	36.00	43.5	7.50
233.86	14.05	H	2.10	300	8.82	5.13	28.00	46.0	18.00
440.00	6.70	H	1.70	100	14.40	7.80	28.90	46.0	17.10
560.00	9.15	H	1.70	360	16.40	9.15	34.70	46.0	11.30

Reading = Test receiver reading / P= antenna Polarization / H=antenna H

A=turn table Angle / Antenna = antenna factor / Cable loss = used cable loss

Result = reading + antenna + loss / Margin = Limit - result

\* Receiving Antenna Mode: Horizontal, Vertical / \* Test site: 3m Open area site

KOSTEC Co.,Ltd.

180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea

Tel : +82-31-222-4251 Fax: +82-31-222-4252

<http://www.kosteclab.com>

Page : 11 of 16

November 01, 2004