

FCC EVALUATION REPORT FOR CERTIFICATION

KOREA Standard Technology

Test report No.: KST-FCC0539

Applicant's Name : TAEJIN INFOTECH CO., LTD.

Applicant's Address : 6F, Woolim e-BIZ Center, 170-5, Guro-Dong, Guro-Ku, Seoul, Korea

Manufacturer's Name : TAEJIN INFOTECH CO., LTD.

Manufacturer's Address : 6F, Woolim e-BIZ Center, 170-5, Guro-Dong, Guro-Ku, Seoul, Korea

EUT's:

FCC ID : SI3JetSpeedPro

Product Name : Memory Card

Model Number(s) : Jet-Speed Pro

Product Options : N/A

Category : FCC Part 15 subpart B

Class B Computing Digital Device

Supplementary Information


The device bearing the brand name and FCC ID specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with measurement procedures specified in ANSI C63.4-2003.

I attest to the accuracy of data and all measurements reported herein were performed by or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Test Date : August 16, 2005.

Issued Date : August 18, 2005.

Tested by:

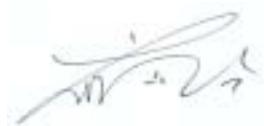

Choi, Jae-Rak

Approved by:



Lee, Weon-Woo



EMI TEST REPORT

Report reference No: KST-FCC0539



Contents

1. Description of Device
2. Test Facility
3. MAP
4. Test system configuration
5. Description of E.U.T.
6. Summary of test results.
7. Test results.
8. Photographs.

Appendix. Schematics

Specifications.



EMI TEST REPORT

Report reference No: KST-FCC0539



1. Description of Device

1) Kind of equipment: Memory Card
2) FCC ID: SI3JetSpeedPro
3) Model Name: Jet-Speed Pro
4) Serial No.: None
5) Type of Sample Tested: Pre-production
6) High Frequency Used: 40.000 MHz
7) Adapter -None
8) Power Rating: 1phase AC100-240V, 50/60Hz, 300W
Output: DC 12V, 5V - PC POWER
9) Tested Power supply: 1phase AC120V, 60Hz
10) Date of Manufacture: August 2005
11) Manufacture: TAEJIN INFOTECH CO.,LTD.
12) Description of Operating: Scroll All "H" Character
Resolution 1024*768 , Vertical Frequency: 75Hz
13) Dates of Test: August 16, 2005
14) Place of Tests: Korea Standard Technology EMC site
15) Test Report No: KST-FCC0539



EMI TEST REPORT

Report reference No: KST-FCC0539



2. Test Facility

The open field test site and conducted measurement facility are used for these testing, where are located following address and drawing. This site was fully described in a report dated November 14, 2002, that was submitted to the FCC.

Korea Standard Technology (KOSTEC Co., Ltd)

Head office & Test Lab :

:180-254, Anynung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea

Telephone Number: 82-31-222-4251

Facsimile Number: 82-31-222-4252

Test Lab

MIC(Ministry of Information and Communication) Number: **KR0041**

FCC Filing Number: **525762**

VCCI Membership Number: **2005**

VCCI Registration Number: **R-1657 / C-1763**

KOLAS(Korea Laboratory Accreditation Scheme) Number: **232**

KOSTEC Co.,Ltd.

180-254,Anynung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea

Tel : +82-31-222-4251 Fax: +82-31-222-4252

<http://www.kosteclab.com>

Page : 4 of 16
August 18, 2005




EMI TEST REPORT

Report reference No: KST-FCC0539



3. MAP

Korea

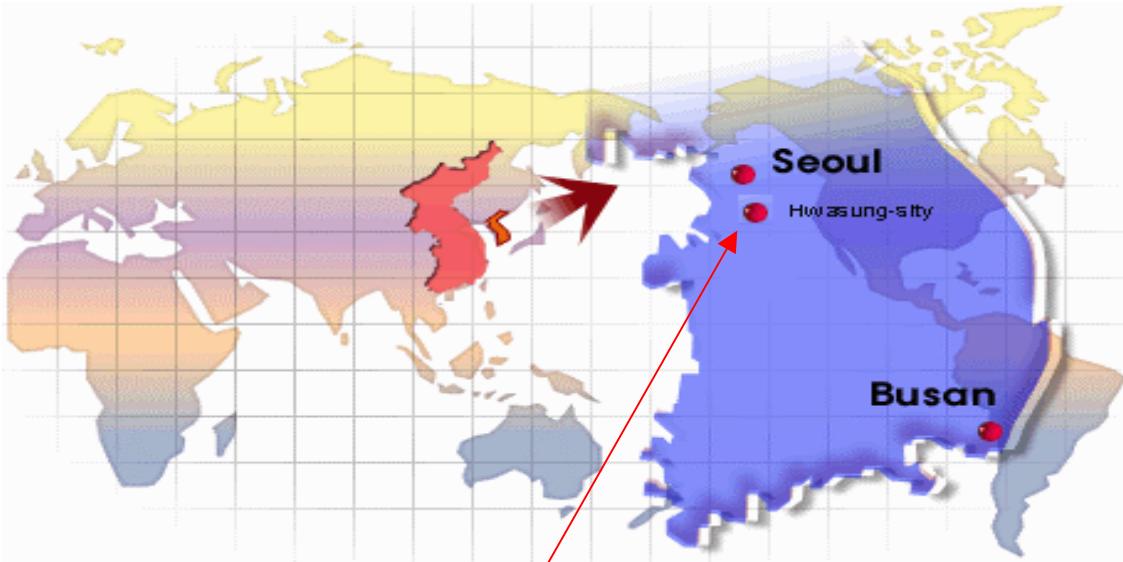

Hwasung-si (open area test site)



KOSTEC Co.,Ltd.

180-254, Annyung-Ri, Taean-Yup, Hwasung-si, Kyunggi-do, Korea
Tel : +82-31-222-4251 Fax: +82-31-222-4252
<http://www.kosteclab.com>

Page : 5 of 16
August 18, 2005



EMI TEST REPORT

Report reference No: KST-FCC0539



4. Test System Configuration

Operation Environment

	<u>Temperature</u> (° C)	<u>Humidity</u> (%)	<u>Pressure</u> (hPa)
Ambient			
10m Open Area site	28	44	1002
Shielded room:	25	42	1002

Test site

These testing were performed following locations :

Shielded room : Conducted Emission,

10 m Open Area Site: Radiated Emission

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC.

The factors contributing to uncertainties are test receiver, Cable loss, antenna factor calibration, Antenna directivity, antenna factor variation with height, antenna phase center variation, antenna frequency interpolation, measurement distance variation, site imperfection, mismatch, and system repeatability.

Based on NIS 80,81, The measurement uncertainty level with a 95 % confidence level were applied.

sample calculation

Conducted emission

The field strength is calculated by adding the LISN factor, cable loss from the measured reading.

The sample calculation is as follows:

$$FS = MR + LF + CL$$

MR = Meter Reading

LF = LISN Factor

CL = Cable Loss

If MR is 30dB, LISN Factor 1 dB, CL 1dB

The result (MR) is

$$30 + 1 + 1 = 32 \text{ dBuV}$$

KOSTEC Co.,Ltd.

180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea

Tel : +82-31-222-4251 Fax: +82-31-222-4252

<http://www.kosteclab.com>

Page : 6 of 16
August 18, 2005



EMI TEST REPORT

Report reference No: KST-FCC0539



5. Description of E.U.T.

Product Description

Manufactured By:	TAEJIN INFOTECH CO., LTD .
Address:	6F, Woolim e-BIZ Center, 170-5, Guro-Dong, Guro-Ku, Seoul, Korea
Model:	Jet-Speed Pro
Serial Number:	None

Configuration of EUT

Description	Manufacturer	Model / Part #	Serial Number
Memory Card	TAEJIN INFOTECH CO.,LTD.	Jet Speed Pro	None
RAM	SAMSUNG	PC2700R-25331-DO	None
RAM	SAMSUNG	PC2700R-25331-DO	None
RAM	SAMSUNG	PC2700R-25331-DO	None
RAM	SAMSUNG	PC2700R-25331-DO	None
RAM	SAMSUNG	PC2700R-25331-DO	None
RAM	SAMSUNG	PC2700R-25331-DO	None
RAM	SAMSUNG	PC2700R-25331-DO	None
RAM	SAMSUNG	PC2700R-25331-DO	None
RAM	SAMSUNG	PC2700R-25331-DO	None

EUT Used cables

Cable Type	Shield	Length (m)	Ferrite	Connector	Connection Point 1	Connection Point 2
POWER	Y	1.5	-	AC INLET	PC	Main power source
-	-	-	-	PCI Slot	EUT	Personal computer
PS/2	Y	1.2	Y	Din	PC	Keyboard
PS/2	Y	1.5	-	Din	PC	Mouse
Parallel	Y	1.5	Y	D-sub	PC	Printer
VGA	Y	1.5	Y	D-sub	PC	Monitor
S-Video	Y	1.8	-	Din	EUT	-

KOSTEC Co.,Ltd.

180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea

Tel : +82-31-222-4251 Fax: +82-31-222-4252

<http://www.kosteclab.com>

Page : 7 of 16
August 18, 2005



EMI TEST REPORT

Report reference No: KST-FCC0539



7. TEST RESULTS

7.1 Conducted emission

Measurement procedure

Mains

The measurements were performed in a shielded room. EUT was placed on a non-metallic table height of 0.4 m above the reference ground plane. They were folded back and forth forming a bundle 30 cm to 40Cm long and were hanged at a 40 cm height to the ground plane.

Each EUT power lead, except ground (safety) lead, were individually connected through a LISN to input power source.

Both lines of power cord, hot and neutral, were measured.

Used equipment

Equipment	Model no.	Serial no.	Makers	Next cal date	Used
Test receiver	ESPI3	100109	R&S	2006.3.15	
L.I.S.N.	ESH2-Z5	100044	R&S	2006.4.23	
	ESH3-Z5	100147	R&S	2006.8.12	

Measurement uncertainty

Conducted Emission measurement : \pm 2.4 (K=2)

Test data

FREQ. (MHz)	LEVEL(dB μ V)		LINE Pol	Loss (dB)	LIMIT(dB μ V)		MARGIN(dB μ V)	
	QP	AV			QP	AV	QP	AV
0.150	37.60	30.58	N	0.29	65.57	55.57	28.26	25.28
0.282	46.65	44.42	N	0.29	63.53	53.53	17.17	9.40
0.426	42.95	38.45	N	0.29	60.19	50.19	17.53	12.03
0.582	38.12	36.12	N	0.90	56.00	46.00	18.78	10.78
0.810	39.07	37.29	L	0.43	56.00	46.00	17.36	9.14
12.506	37.39	34.54	N	1.52	60.00	50.00	24.13	16.98
19.166	48.30	43.49	L	1.77	60.00	50.00	13.47	8.28
25.586	46.09	41.45	L	2.32	60.00	50.00	16.23	10.87

* Level = test receiver reading value

* Loss = LISN insertion Loss + Cable Loss

KOSTEC Co.,Ltd.

180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea

Tel : +82-31-222-4251 Fax: +82-31-222-4252

<http://www.kosteclab.com>

Page : 9 of 16
August 18, 2005




EMI TEST REPORT

Report reference No: KST-FCC0539




Conducted emission test graph

Line. Live

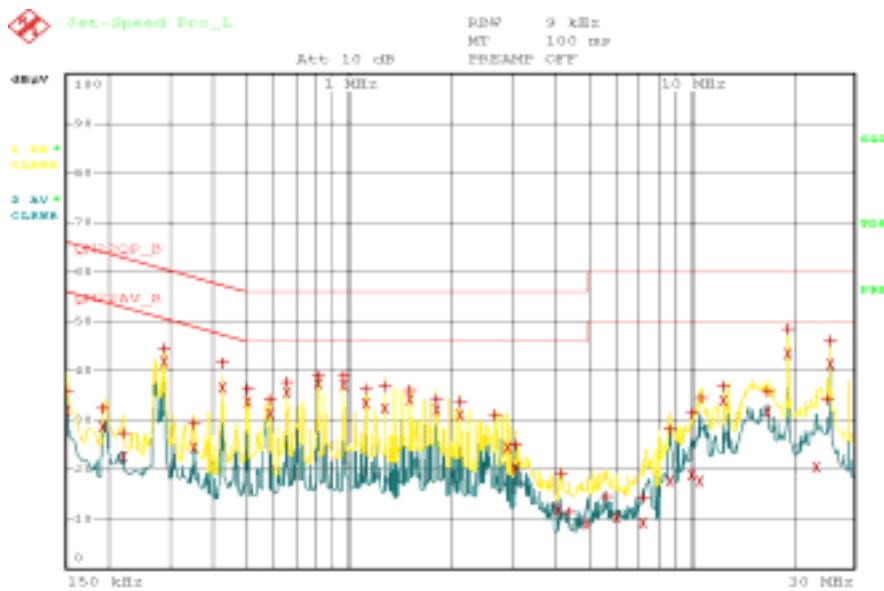

Date: 16.AUG.2005 11:36:12

Line. Neutral

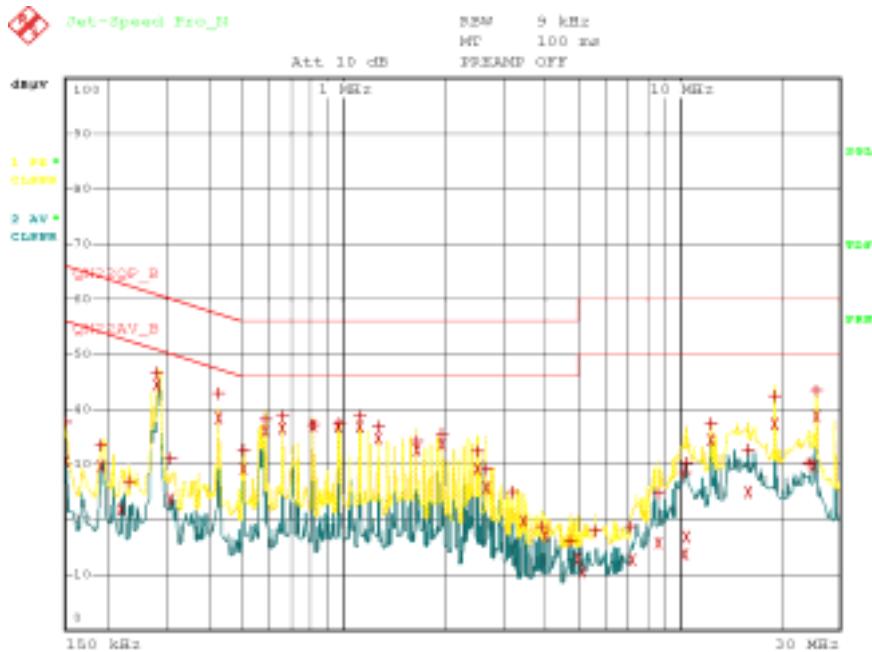

Date: 16.AUG.2005 11:33:12

KOSTEC Co.,Ltd.

180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea
Tel : +82-31-222-4251 Fax: +82-31-222-4252
<http://www.kosteclab.com>

Page : 10 of 16
August 18, 2005



EMI TEST REPORT



Report reference No: KST-FCC0539

7.2 Radiated Emission

Measurement procedure

A pretest was performed at 3 m distances in a semi-anechoic chamber for searching correct frequency. The final test was done at a 10 m open area test site with a quasi-peak detector.

EUT was placed on a non-metallic table height of 0.8 m above the reference ground plane.

Cables connected to EUT were fixed to cause maximum emission.

Test was made with the antenna positioned in both the horizontal and vertical planes of polarization.

The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

Used equipment

Equipment	Model no.	Serial no.	Makers	Next cal date
Test receiver	ESCS30	100111	R&S	2006.3.17
Ultra broadband antenna	HL562	100075	R&S	2006.3.16
Matching network	RAM	358.5414.02	R&S	-
Antenna Mast	AT14	none	Daeil EMC	-
Turn Table	TT15	none	Daeil EMC	-
10m Open area site	none	none	KOSTEC Lab	-
chamber(3m)	none	none	FRANCONIA	-

Measurement uncertainty

Radiated Emission measurement :

30 - 300 MHz + 3.96 dB / -4.04 dB

300 - 1000 MHz + 3.04 dB / -3.00 dB

Test data

Freq (MHz)	Reading (dBuV/m)	P (H/V)	H (m)	A (.)	Antenna (dB)	Cable Loss (dB)	Result (dBuV/m)	Limit (dB)	Margin (dB)
44.75	19.10	V	1.50	180	11.54	2.66	33.40	40.0	6.60
76.71	22.72	V	1.50	180	7.80	3.08	33.60	40.0	6.40
134.21	19.04	V	1.50	180	8.36	4.10	31.50	43.5	12.00
153.42	11.93	V	2.40	180	7.68	4.29	23.90	43.5	19.60
172.59	12.88	H	2.00	110	7.56	4.36	24.80	43.5	18.70
255.68	24.20	H	2.00	110	9.60	5.90	39.70	46.0	6.30
300.43	16.50	H	2.00	90	11.00	6.50	34.00	46.0	12.00
421.85	6.88	H	1.70	90	14.01	7.61	28.50	46.0	17.50

Reading = Test receiver reading / P= antenna Polarization / H=antenna H

A=turn table Angle / Antenna = antenna factor / Cable loss = used cable loss

Result = reading + antenna + loss / Margin = Limit - result

* Receiving Antenna Mode: Horizontal, Vertical / * Test site: 3 m Open area site

KOSTEC Co.,Ltd.

180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea

Tel : +82-31-222-4251 Fax: +82-31-222-4252

<http://www.kosteclab.com>

Page : 11 of 16
August 18, 2005

