

FCC Radio Test Report

FCC ID: SI5VRE3000

This report concerns: Class II Permissive Change

Project No. : 1807T004A
Equipment : Verizon 5G Home Wi-Fi Extender
Test Model : VRE3000
Series Model : N/A
Applicant : U-MEDIA Communications, Inc.
Address : 9F, No.1, Jin-shan 7th St. Hsinchu Taiwan

Date of Receipt : Jul. 02, 2018 (For UNII-1 and UNII-3)
Aug. 03, 2018 (For UNII-2A and UNII-2C)
Date of Test : Jul. 02, 2018 ~ Aug. 13, 2018 (For UNII-1 and UNII-3)
Aug. 03, 2018 ~ Dec. 22, 2018 (For UNII-2A and
UNII-2C)
Issued Date : Dec. 24, 2018
Tested by : BTL Inc.

Testing Engineer : Kay Wu
(Kay Wu)

Technical Manager : James Chiu
(James Chiu)

Authorized Signatory : Andy Chiu
(Andy Chiu)

B T L I N C .

No.18, Ln. 171, Sec. 2, Jiuzong Rd.,
Neihu Dist., Taipei City 114, Taiwan (R.O.C.)
TEL: +886-2-2657-3299 FAX: +886-2-2657-3331



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

CONTENTS

REPORT ISSUED HISTORY	5
1 CERTIFICATION	6
2 SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 GENERAL INFORMATION	10
3.1 DESCRIPTION OF EUT	10
3.2 TEST MODES	15
3.3 PARAMETERS OF TEST SOFTWARE	18
3.4 DUTY CYCLE	20
3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	24
3.6 SUPPORT UNITS	24
4 AC POWER LINE CONDUCTED EMISSIONS TEST	25
4.1 LIMIT	25
4.2 TEST PROCEDURE	25
4.3 DEVIATION FROM TEST STANDARD	25
4.4 TEST SETUP	26
4.5 EUT OPERATING CONDITIONS	26
4.6 TEST RESULT	26
5 RADIATED EMISSIONS TEST	27
5.1 LIMIT	27
5.2 TEST PROCEDURE	28
5.3 DEVIATION FROM TEST STANDARD	28
5.4 TEST SETUP	29
5.5 EUT OPERATING CONDITIONS	30
5.6 TEST RESULT – 9 KHZ TO 30 MHZ	30
5.7 TEST RESULT – 30MHZ TO 1000 MHZ	30
5.8 TEST RESULT – ABOVE 1000 MHZ	31
6 BANDWIDTH TEST	32
6.1 LIMIT	32
6.2 TEST PROCEDURE	32
6.3 DEVIATION FROM TEST STANDARD	32
6.4 TEST SETUP	32
6.5 EUT OPERATING CONDITIONS	32
6.6 TEST RESULT	32
7 PEAK OUTPUT POWER TEST	33
7.1 LIMIT	33
7.2 TEST PROCEDURE	33
7.3 DEVIATION FROM TEST STANDARD	33
7.4 TEST SETUP	33
7.5 EUT OPERATING CONDITIONS	33

7.6	TEST RESULT	33
8	POWER SPECTRAL DENSITY	34
8.1	LIMIT	34
8.2	TEST PROCEDURE	34
8.3	DEVIATION FROM TEST STANDARD	34
8.4	TEST SETUP	34
8.5	EUT OPERATING CONDITIONS	34
8.6	TEST RESULT	34
9	FREQUENCY STABILITY TEST	35
9.1	LIMIT	35
9.2	TEST PROCEDURE	35
9.3	DEVIATION FROM TEST STANDARD	35
9.4	TEST SETUP	35
9.5	EUT OPERATING CONDITIONS	35
9.6	TEST RESULT	35
10	LIST OF MEASURING EQUIPMENTS	36
11	EUT TEST PHOTO	38
APPENDIX A	AC POWER LINE CONDUCTED EMISSIONS	42
APPENDIX B	RADIATED EMISSIONS - 9 KHZ TO 30 MHZ	51
APPENDIX C	RADIATED EMISSIONS - 30 MHZ TO 1000 MHZ	68
APPENDIX D	RADIATED EMISSIONS - ABOVE 1000 MHZ	77
APPENDIX E	BANDWIDTH	318
APPENDIX F	CONDUCTED OUTPUT POWER	327
APPENDIX G	POWER SPECTRAL DENSITY	352
APPENDIX H	FREQUENCY STABILITY	386
APPENDIX I	TRANSMIT POWER CONTROL (TPC)	391

REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Original Issue. This is a supplementary report to the original test report (BTL-FCCP-2-1807T004). The difference compared with original report is enabled UNII-2A and UNII-2C bands. All tests had been verified and the other original test data are kept in this report.	Oct. 22, 2018
R01	Revised report to address TCB's comments.	Oct. 31, 2018
R02	Revised report to address TCB's comments.	Dec. 24, 2018

1 CERTIFICATION

Equipment : Verizon 5G Home Wi-Fi Extender
Brand Name : Verizon
Test Model : VRE3000
Series Model : N/A
Applicant : U-MEDIA Communications, Inc.
Manufacturer : U-MEDIA Communications, Inc.
Address : No. 90, Kuang Fu Nth.Rd., Hsinchu Industrial Park, Hu Kou, Hsinchu, 303, Taiwan
Date of Test : Jul. 02, 2018 ~ Aug. 13, 2018 (For UNII-1 and UNII-3)
Aug. 03, 2018 ~ Dec. 22, 2018 (For UNII-2A and UNII-2C)
Test Sample : Engineering Sample
Standard(s) : FCC Part15, Subpart E (§15.407)
ANSI C63.10-2013

The above equipment has been tested and found in compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1807T004A) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Test results included in this report is only for the RLAN 5GHz part.

2 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards.

FCC Part15, Subpart E (§15.407)				
FCC Clause No	Description	Test Result	Judgement	Remark
§15.207 §15.407(b)	AC Power Line Conducted Emissions	APPENDIX A	Pass	-----
§15.205 §15.209 §15.407(b)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	Pass	-----
§15.407(a)	Bandwidth	APPENDIX E	Pass	-----
§15.407(a)	Conducted Output Power	APPENDIX F	Pass	-----
§15.407(a)	Power Spectral Density	APPENDIX G	Pass	-----
§15.407(g)	Frequency Stability	APPENDIX H	Pass	-----
§15.407(h)(1)	Transmit power control (TPC)	APPENDIX I	N/A	NOTE (2)
§15.203	Antenna Requirement	-----	Pass	-----
§15.407(c)	Automatically Discontinue Transmission	-----	Pass	NOTE (3)

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report.
- (2) A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.
- (3) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving.
The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

CB05: (FCC RN:674415; FCC DN:TW0659)

No. 68-1, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)

CB15: (VCCI RN: R-20020; FCC RN:674415; FCC DN:TW0659; ISED Assigned

(Veeranikar 20088-5)

No. 68-1, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{cisor} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U (dB)
C05	CISPR	150 kHz ~ 30MHz	2.68	C05

B. Radiated emissions below 1 GHz test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U (dB)
CB15 (3m)	CISPR	30 MHz ~ 200 MHz	V	4.20
		30 MHz ~ 200 MHz	H	3.64
		200 MHz ~ 1,000 MHz	V	4.56
		200 MHz ~ 1,000 MHz	H	3.90

C. Radiated emissions above 1 GHz test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U (dB)
CB15 (3m)	CISPR	1 GHz ~ 6 GHz	V	4.46
		1 GHz ~ 6 GHz	H	4.40
		6 GHz ~18 GHz	V	3.88
		6 GHz ~18 GHz	H	4.00

Test Site	Method	Measurement Frequency Range	U (dB)
CB15 (1m)	CISPR	18 GHz ~ 26.5 GHz	4.62
		26.5 GHz ~ 40 GHz	5.12

D. Conducted tests:

Item	Method	U
Bandwidth	ANSI	3.8 %
Output Power	ANSI	0.95 dB
Power Spectral Density	ANSI	0.86 dB
Conducted Spurious Emissions	ANSI	2.71 dB

NOTE:

Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

Our calculated Measurement Instrumentation Uncertainty is shown in the tables above. These are our U_{lab} values in CISPR 16-4-2 terminology.

Since Table 1 of CISPR 16-4-2 has values of measurement instrumentation uncertainty, called U_{CISPR} , as follows:

Conducted Disturbance (mains port) – 150 kHz – 30 MHz : 3.6 dB

Radiated Disturbance (electric field strength on an open area test site or alternative test site) – 30 MHz – 1000 MHz : 5.2 dB

3 GENERAL INFORMATION

3.1 DESCRIPTION OF EUT

Equipment	Verizon 5G Home Wi-Fi Extender														
Brand Name	Verizon														
Test Model	VRE3000														
Series Model	N/A														
Model Difference	N/A														
Power Source	DC Voltage supplied from AC/DC adapter.														
Power Rating	#1 Ktec / KSA-24W-120200HU I/P: 100-240V~50/60Hz, 0.6A O/P: 12V 2.0A #2 UMEC / UP0251M-12PA I/P: 100-240V~50/60Hz, 0.6A MAX O/P: +12V 2A, 24W MAX														
Product Specification	Frequency Range	UNII-1: 5150 MHz to 5250 MHz UNII-2A: 5250 MHz to 5350 MHz UNII-2C: 5470 MHz to 5725 MHz UNII-3: 5725 MHz to 5850 MHz													
	Operation Frequency	UNII-1: 5180 MHz to 5240 MHz UNII-2A: 5260 MHz to 5320 MHz UNII-2C: 5500 MHz to 5700 MHz UNII-3: 5745 MHz to 5825 MHz													
	Modulation Type	OFDM													
	Bit Rate of Transmitter	up to 1733 Mbps													
	RF Chips	The EUT contains two RF Chips which functions are as below <table border="1" data-bbox="809 1208 1428 1448"> <thead> <tr> <th>Chip</th> <th>2.4 GHz</th> <th>5 GHz</th> <th>Chains</th> </tr> </thead> <tbody> <tr> <td>MT7615N</td> <td>NO</td> <td>YES UNII-1 UNII-2A</td> <td>4T4R</td> </tr> <tr> <td>MT7615DN</td> <td>YES</td> <td>YES UNII-2C UNII-3</td> <td>2T2R</td> </tr> </tbody> </table>			Chip	2.4 GHz	5 GHz	Chains	MT7615N	NO	YES UNII-1 UNII-2A	4T4R	MT7615DN	YES	YES UNII-2C UNII-3
Chip	2.4 GHz	5 GHz	Chains												
MT7615N	NO	YES UNII-1 UNII-2A	4T4R												
MT7615DN	YES	YES UNII-2C UNII-3	2T2R												

Product Specification	Maximum Output Power for UNII-1	IEEE 802.11a: 23.18 dBm (0.2080 W) IEEE 802.11n (HT20): 21.88 dBm (0.1541 W) IEEE 802.11n (HT40): 21.76 dBm (0.1500 W) IEEE 802.11ac (VHT20): 21.25 dBm (0.1335 W) IEEE 802.11ac (VHT40): 21.34 dBm (0.1362 W) IEEE 802.11ac (VHT80): 20.39 dBm (0.1094 W)
	Maximum Output Power for UNII-2A	IEEE 802.11a: 17.82 dBm (0.0606 W) IEEE 802.11n (HT20): 13.09 dBm (0.0204 W) IEEE 802.11n (HT40): 13.08 dBm (0.0203 W) IEEE 802.11ac (VHT20): 12.83 dBm (0.0192 W) IEEE 802.11ac (VHT40): 12.99 dBm (0.0199 W) IEEE 802.11ac (VHT80): 12.80 dBm (0.0191 W)
	Maximum Output Power for UNII-2C	IEEE 802.11a: 19.00 dBm (0.0794 W) IEEE 802.11n (HT20): 18.88 dBm (0.0772 W) IEEE 802.11n (HT40): 21.67 dBm (0.1469 W) IEEE 802.11ac (VHT20): 18.43 dBm (0.0697 W) IEEE 802.11ac (VHT40): 21.41 dBm (0.1384 W) IEEE 802.11ac (VHT80): 21.00 dBm (0.1260 W)
	Maximum Output Power for UNII-3	IEEE 802.11a: 22.12 dBm (0.1628 W) IEEE 802.11n (HT20): 21.21 dBm (0.1320 W) IEEE 802.11n (HT40): 19.96 dBm (0.0991 W) IEEE 802.11ac (VHT20): 20.23 dBm (0.1054 W) IEEE 802.11ac (VHT40): 19.58 dBm (0.0908 W) IEEE 802.11ac (VHT80): 19.61 dBm (0.0914 W)
Product Covered	2 * Adapter: (1) Ktec / KSA-24W-120200HU (2) UMEC / UP0251M-12PA	

NOTE:

(1) For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

(2) Channel List:

UNII-1					
IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40)		IEEE 802.11ac (VHT80)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

UNII-2A					
IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40)		IEEE 802.11ac (VHT80)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

UNII-2C					
IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40)		IEEE 802.11ac (VHT80)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590	138	5690
112	5560	126	5630		
116	5580	134	5670		
120	5600				
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				

UNII-3					
IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40)		IEEE 802.11ac (VHT80)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

(3) Table for Filed Antenna:

Group 1:

UNII-1:

Ant.	Brand	Model	Type	Connector	Gain (dBi)
JC1	Galtronics	02102142-06808Ax	PCB	iPEX	3.4
JC3	Galtronics	02102142-06808Ax	PCB	iPEX	3.4
JC4	Galtronics	02102142-06808Ax	PCB	iPEX	3.4
JC5	Galtronics	02102142-06808Ax	PCB	iPEX	3.4

UNII-2A:

Ant.	Brand	Model	Type	Connector	Gain (dBi)
JC1	Galtronics	02102142-06808Ax	PCB	iPEX	3.4
JC3	Galtronics	02102142-06808Ax	PCB	iPEX	3.4
JC4	Galtronics	02102142-06808Ax	PCB	iPEX	3.4
JC5	Galtronics	02102142-06808Ax	PCB	iPEX	3.4

UNII-2C:

Ant.	Brand	Model	Type	Connector	Gain (dBi)
JC6	Galtronics	02102140-06808Ax	PCB	iPEX	3.5
JC7	Galtronics	02102140-06808Ax	PCB	iPEX	3.5

UNII-3:

Ant.	Brand	Model	Type	Connector	Gain (dBi)
JC6	Galtronics	02102140-06808Ax	PCB	iPEX	3.8
JC7	Galtronics	02102140-06808Ax	PCB	iPEX	3.8

Group 2:

UNII-1:

Ant.	Brand	Model	Type	Connector	Gain (dBi)
JC1	Galtronics	02102142-06808Cx	PCB	iPEX	3.1
JC3	Galtronics	02102142-06808Cx	PCB	iPEX	3.1
JC4	Galtronics	02102142-06808Cx	PCB	iPEX	3.1
JC5	Galtronics	02102142-06808Cx	PCB	iPEX	3.1

UNII-2A:

Ant.	Brand	Model	Type	Connector	Gain (dBi)
JC1	Galtronics	02102142-06808Cx	PCB	iPEX	3.1
JC3	Galtronics	02102142-06808Cx	PCB	iPEX	3.1
JC4	Galtronics	02102142-06808Cx	PCB	iPEX	3.1
JC5	Galtronics	02102142-06808Cx	PCB	iPEX	3.1

UNII-2C:

Ant.	Brand	Model	Type	Connector	Gain (dBi)
JC6	Galtronics	02102140-06808Bx	PCB	iPEX	2.8
JC7	Galtronics	02102140-06808Bx	PCB	iPEX	2.8

UNII-3:

Ant.	Brand	Model	Type	Connector	Gain (dBi)
JC6	Galtronics	02102140-06808Bx	PCB	iPEX	3.0
JC7	Galtronics	02102140-06808Bx	PCB	iPEX	3.0

NOTE:

(a) The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and receivers (**UNII-1 and UNII-2A**: 4T4R, **UNII-2C and UNII-3**: 2T2R). 2.4 GHz and 5GHz can transmit simultaneously.

(b) For **UNII-1 and UNII-2A**:

All JC1, JC3, JC4 and JC5 can be used as transmitting/receiving antenna.
JC1, JC3, JC4 and JC5 could transmit/receive simultaneously.

The C1 + JC3 + JC4 + JC5 generated the worst case, so it was selected to test and record in the report.

For **UNII-2C and UNII-3**:

All JC6 and JC7 can be used as transmitting/receiving antenna.
JC6 and JC7 could transmit/receive simultaneously.

The C6 + JC7 generated the worst case, so it was selected to test and record in the report.

(c) The EUT **UNII-1 and UNII-2A** (N mode & AC mode) are with beamforming function.
The **UNII-1 and UNII-2A** beamforming gain is 4.46 dB.
The EUT **UNII-1** (A mode), **UNII-2A** (A mode), **UNII-2C and UNII-3** do not support beamforming function.

(d) For Power Spectral Density

For **UNII-1** (A mode in CDD mode):

$$\text{Directional Gain} = 10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{Gn/20})^2/N_{\text{ANT}}] = 9.42 \text{ dBi.}$$

The Direction gain exceeds 6 dBi, so the reduced power spectral density limits =
Limit - (Directional Gain - 6 dBi) = 17 - (9.42 - 6) = 13.58 dBm/MHz.

For **UNII-1** (N mode & AC mode in beamforming mode):

$$\text{Directional Gain} = 10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{Gn/20})^2/N_{\text{ANT}}] = 9.42 \text{ dBi.}$$

The Direction gain exceeds 6 dBi, so the reduced power spectral density limits =
Limit - (Directional Gain + Beamforming Gain - 6 dBi) = 17 - (9.42 + 4.46 - 6) = 9.12 dBm/MHz.

For **UNII-2A** (A mode in CDD mode):

$$\text{Directional Gain} = 10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{Gn/20})^2/N_{\text{ANT}}] = 9.42 \text{ dBi.}$$

The Direction gain exceeds 6 dBi, so the reduced power spectral density limits =
Limit - (Directional Gain - 6 dBi) = 11 - (9.42 - 6) = 7.58 dBm/MHz.

For **UNII-2A** (N mode & AC mode in beamforming mode):

$$\text{Directional Gain} = 10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{Gn/20})^2/N_{\text{ANT}}] = 9.42 \text{ dBi.}$$

The Direction gain exceeds 6 dBi, so the reduced power spectral density limits =
Limit - (Directional Gain + Beamforming Gain - 6 dBi) = 11 - (9.42 + 4.46 - 6) = 3.12 dBm/MHz.

For **UNII-2C** (CDD mode):

$$\text{Directional Gain} = 10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{Gn/20})^2/N_{\text{ANT}}] = 6.51 \text{ dBi.}$$

The Direction gain exceeds 6 dBi, so the reduced power spectral density limits =
Limit - (Directional Gain - 6 dBi) = 30 - (6.51 - 6) = 29.49 dBm/MHz.

For **UNII-3** (CDD mode):

$$\text{Directional Gain} = 10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{Gn/20})^2/N_{\text{ANT}}] = 6.81 \text{ dBi.}$$

The Direction gain exceeds 6 dBi, so the reduced power spectral density limits =
Limit - (Directional Gain - 6 dBi) = 30 - (6.81 - 6) = 29.19 dBm/MHz.

(e) For Conducted Output Power (CDD mode)

For **UNII-1**:

For $N_{\text{ANT}} = 4 < 5$,

$$\text{Direction gain} = G_{\text{ANT}} + 0 = 3.4 + 0 = 3.4 \text{ dBi.}$$

The Direction gain is less than 6 dBi, so conducted power limits will not be reduced.

For **UNII-2A**:

For $N_{\text{ANT}} = 4 < 5$,

$$\text{Direction gain} = G_{\text{ANT}} + 0 = 3.4 + 0 = 3.4 \text{ dBi.}$$

The Direction gain is less than 6 dBi, so conducted power limits will not be reduced.

For **UNII-2C**:

For $N_{\text{ANT}} = 2 < 5$,

$$\text{Direction gain} = G_{\text{ANT}} + 0 = 3.5 + 0 = 3.5 \text{ dBi.}$$

The Direction gain is less than 6 dBi, so conducted power limits will not be reduced.

For **UNII-3**:

For $N_{\text{ANT}} = 2 < 5$,

$$\text{Direction gain} = G_{\text{ANT}} + 0 = 3.8 + 0 = 3.8 \text{ dBi.}$$

The Direction gain is less than 6 dBi, so conducted power limits will not be reduced.

(f) For Conducted Output Power (beamforming mode)

For **UNII-1** (N mode & AC mode in beamforming mode):

$$\text{Directional Gain} = G_{\text{ANT}} + 10\log (N_{\text{ANT}}/N_{\text{SS}}) = 3.4 \text{ dBi} + 10\log (4/1) = 9.42 \text{ dBi.}$$

The Direction gain exceeds 6 dBi, so the reduced conducted output power limits =

$$\text{Limit} - (\text{Directional Gain} + \text{Beamforming Gain} + 6 \text{ dBi}) = 30 - (9.42 + 4.46 - 6) = 22.12 \text{ dBm.}$$

For **UNII-2A** (N mode & AC mode in beamforming mode):

$$\text{Directional Gain} = G_{\text{ANT}} + 10\log (N_{\text{ANT}}/N_{\text{SS}}) = 3.4 \text{ dBi} + 10\log (4/1) = 9.42 \text{ dBi.}$$

The Direction gain exceeds 6 dBi, so the reduced conducted output power limits =

$$\text{Limit} - (\text{Directional Gain} + \text{Beamforming Gain} + 6 \text{ dBi}) = 24 - (9.42 + 4.46 - 6) = 16.12 \text{ dBm.}$$

For **UNII-2C**: does not support beamforming function.

For **UNII-3**: does not support beamforming function.

3.2 TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Following mode(s) as (were) found to be the worst case(s) and selected for the final test.
For CDD mode:

AC power line conducted emissions test	
Test Mode	Description
6	UNII-1_TX AC (VHT80) MODE CHANNEL 42
12	UNII-2A_TX AC (VHT80) MODE CHANNEL 58
18	UNII-2C_TX AC (VHT80) MODE CHANNEL 106
19	UNII-3_TX A MODE CHANNEL 149

For CDD mode:

Radiated emissions test	
Test Mode	Description
1	UNII-1_TX A MODE CHANNEL 36/40/48
2	UNII-1_TX N (HT20) MODE CHANNEL 36/40/48
3	UNII-1_TX N (HT40) MODE CHANNEL 38/46
6	UNII-1_TX AC (VHT80) MODE CHANNEL 42
7	UNII-2A_TX A MODE CHANNEL 52/60/64
8	UNII-2A_TX N (HT20) MODE CHANNEL 52/60/64
9	UNII-2A_TX N (HT40) MODE CHANNEL 54/62
12	UNII-2A_TX AC (VHT80) MODE CHANNEL 58
13	UNII-2C_TX A MODE CHANNEL 100/116/140
14	UNII-2C_TX N (HT20) MODE CHANNEL 100/116/140
15	UNII-2C_TX N (HT40) MODE CHANNEL 102/110/134
18	UNII-2C_TX AC (VHT80) MODE CHANNEL 106/122
19	UNII-3_TX A MODE CHANNEL 149/157/165
20	UNII-3_TX N (HT20) MODE CHANNEL 149/157/165
21	UNII-3_TX N (HT40) MODE CHANNEL 151/159
24	UNII-3_TX AC (VHT80) MODE CHANNEL 155

For CDD mode:

Conducted test	
Test Mode	Description
1	UNII-1_TX A MODE CHANNEL 36/40/48
2	UNII-1_TX N (HT20) MODE CHANNEL 36/40/48
3	UNII-1_TX N (HT40) MODE CHANNEL 38/46
4	UNII-1_TX AC (HT20) MODE CHANNEL 36/40/48
5	UNII-1_TX AC (HT40) MODE CHANNEL 38/46
6	UNII-1_TX AC (VHT80) MODE CHANNEL 42
7	UNII-2A_TX A MODE CHANNEL 52/60/64
8	UNII-2A_TX N (HT20) MODE CHANNEL 52/60/64
9	UNII-2A_TX N (HT40) MODE CHANNEL 54/62
10	UNII-2A_TX AC (VHT20) MODE CHANNEL 52/60/64
11	UNII-2A_TX AC (VHT40) MODE CHANNEL 54/62
12	UNII-2A_TX AC (VHT80) MODE CHANNEL 58
13	UNII-2C_TX A MODE CHANNEL 100/116/140
14	UNII-2C_TX N (HT20) MODE CHANNEL 100/116/140
15	UNII-2C_TX N (HT40) MODE CHANNEL 102/110/134
16	UNII-2C_TX AC (VHT20) MODE CHANNEL 100/116/140
17	UNII-2C_TX AC (VHT40) MODE CHANNEL 102/110/134
18	UNII-2C_TX AC (VHT80) MODE CHANNEL 106/122
19	UNII-3_TX A MODE CHANNEL 149/157/165
20	UNII-3_TX N (HT20) MODE CHANNEL 149/157/165
21	UNII-3_TX N (HT40) MODE CHANNEL 151/159
22	UNII-3_TX AC (VHT20) MODE CHANNEL 149/157/165
23	UNII-3_TX AC (VHT40) MODE CHANNEL 151/159
24	UNII-3_TX AC (VHT80) MODE CHANNEL 155

For beamforming mode:

Radiated emissions test	
Test Mode	Description
2	UNII-1_TX N (HT20) MODE CHANNEL 36/40/48
3	UNII-1_TX N (HT40) MODE CHANNEL 38/46
4	UNII-1_TX AC (HT20) MODE CHANNEL 36/40/48
5	UNII-1_TX AC (HT40) MODE CHANNEL 38/46
6	UNII-1_TX AC (VHT80) MODE CHANNEL 42
8	UNII-2A_TX N (HT20) MODE CHANNEL 52/60/64
9	UNII-2A_TX N (HT40) MODE CHANNEL 54/62
10	UNII-2A_TX AC (VHT20) MODE CHANNEL 52/60/64
11	UNII-2A_TX AC (VHT40) MODE CHANNEL 54/62
12	UNII-2A_TX AC (VHT80) MODE CHANNEL 58

NOTE:

- (1) The measurements are performed at the low, middle and high available channels.
- (2) The adapter KSA-24W-120200HU was found to be the worst case and used for final test.
- (3) For radiated emission tests, the highest output powers were set for final test.
- (4) For radiated emission below 1 GHz test, the IEEE 802.11ac (VHT80) for UNII-1, UNII-2A and UNII-2A and IEEE 802.11a for UNII-3 were found to be the worst case and recorded.
- (5) The EUT contains beamforming and Multi-user MIMO (MU-MIMO) functions and the beamforming mode was found to be the worst case and recorded.
- (6) The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %.

3.3 PARAMETERS OF TEST SOFTWARE

UNII-1			
Test Software	QATool(0.0.1.85)		
Mode	5180 MHz	5200 MHz	5240 MHz
IEEE 802.11a	18	17	19
IEEE 802.11n (HT20)	12	13	12
IEEE 802.11ac (VHT20)	12	13	12
Mode	5190 MHz	5230 MHz	
IEEE 802.11n (HT40)	12	11	
IEEE 802.11ac (VHT40)	13	12	
Mode	5210 MHz		
IEEE 802.11ac (VHT80)	0D		

UNII-2A			
Test Software	QATool(0.0.1.85)		
Mode	5260 MHz	5300 MHz	5320 MHz
IEEE 802.11a	0A	0A	0B
IEEE 802.11n (HT20)	00	7F	00
IEEE 802.11ac (VHT20)	00	00	02
Mode	5270 MHz	5310 MHz	
IEEE 802.11n (HT40)	7D	7B	
IEEE 802.11ac (VHT40)	03	7F	
Mode	5290 MHz		
IEEE 802.11ac (VHT80)	7D		

UNII-2C			
Test Software	QATool(0.0.1.85)		
Mode	5500 MHz	5580 MHz	5700 MHz
IEEE 802.11a	11	11	16
IEEE 802.11n (HT20)	15	12	16
IEEE 802.11ac (VHT20)	15	12	14
Mode	5510 MHz	5550 MHz	5670 MHz
IEEE 802.11n (HT40)	12	1B	15
IEEE 802.11ac (VHT40)	13	1B	15
Mode	5530 MHz	5610 MHz	
IEEE 802.11ac (VHT80)	0E	18	

UNII-3			
Test Software	QATool(0.0.1.85)		
Mode	5745 MHz	5785 MHz	5825 MHz
IEEE 802.11a	11	11	10
IEEE 802.11n (HT20)	11	10	0D
IEEE 802.11ac (VHT20)	0F	0F	0B
Mode	5755 MHz	5795 MHz	
IEEE 802.11n (HT40)	10	10	
IEEE 802.11ac (VHT40)	10	0F	
Mode	5775 MHz		
IEEE 802.11ac (VHT80)	0D		


NOTE:

(1) The parameter setting of CDD and beamforming mode is the same.

3.4 DUTY CYCLE

If duty cycle is $\geq 98\%$, duty factor is not required.
If duty cycle is $< 98\%$, duty factor shall be considered.

For UNII-1:

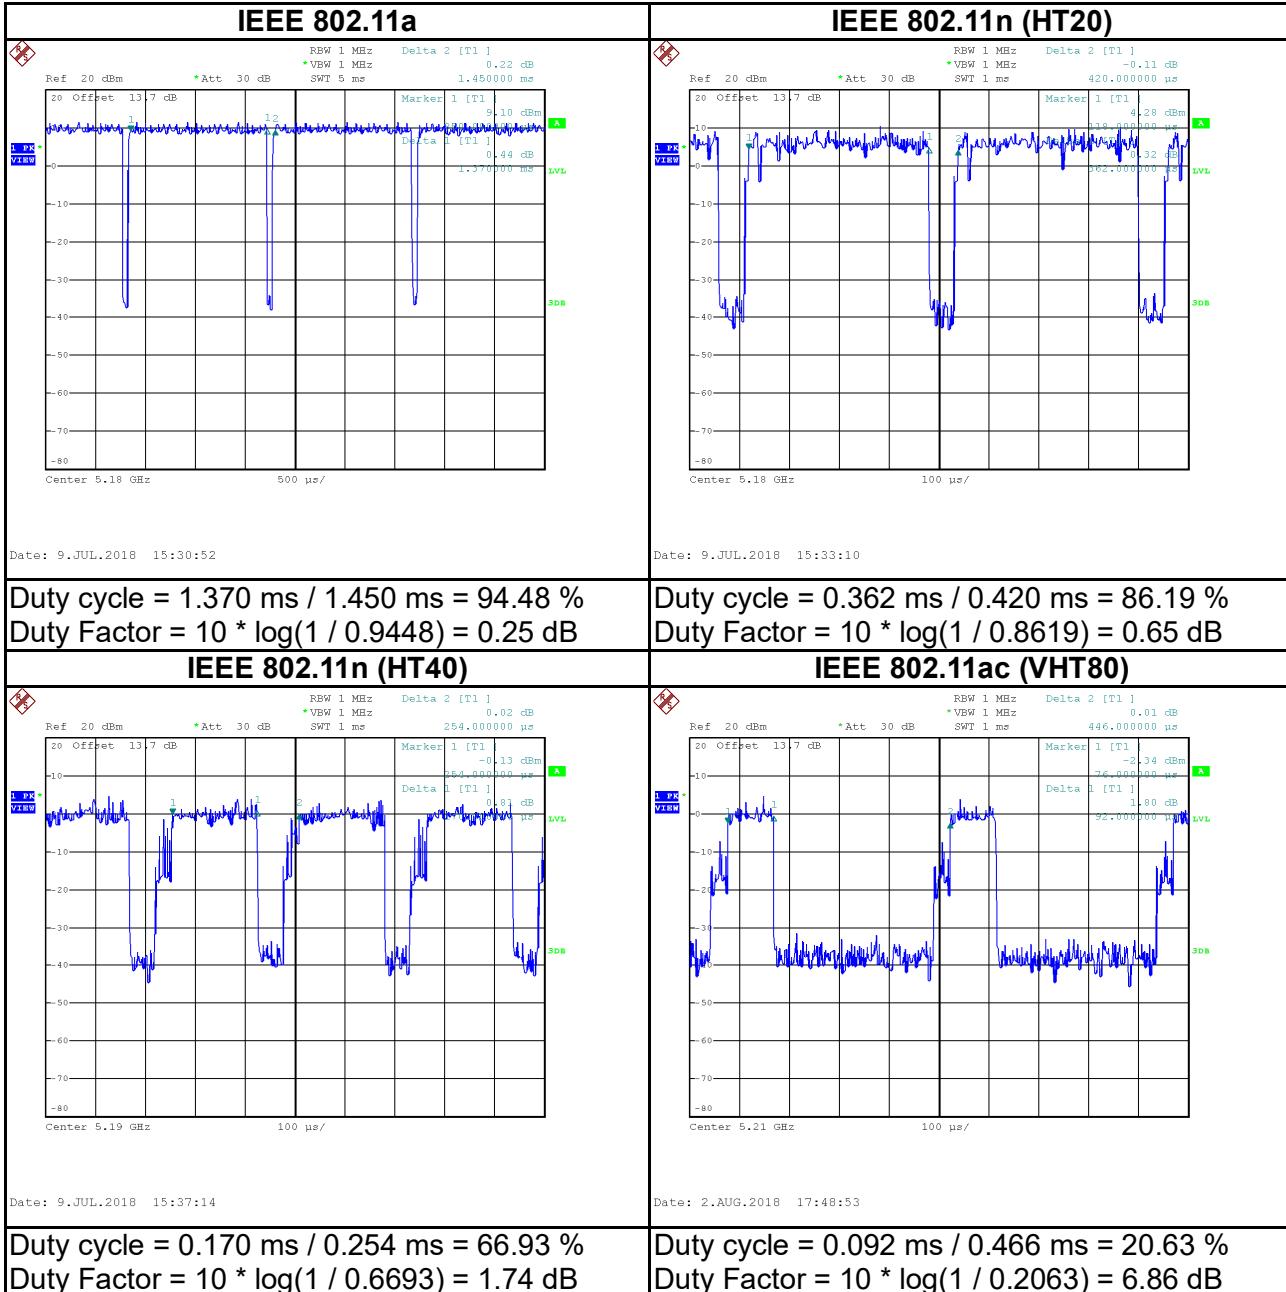

NOTE-

For IEEE 802.11a and IEEE 802.11n (HT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz (Duty cycle < 98%).

analyzer is 1 MHz and the For IEEE 802.11n (HT40):


For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 2 kHz (Duty cycle < 98%).

For IEEE 802.11ac (VHT80):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 kHz (Duty cycle < 98%).

For UNII-2A:


IEEE 802.11a

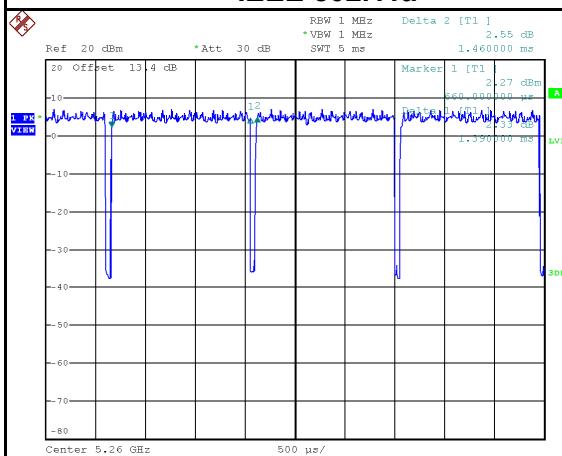

Date: 14.AUG.2018 14:43:45

Duty cycle = 1.390 ms / 1.460 ms = 95.21 %
 Duty Factor = $10 * \log(1 / 0.9521) = 0.21 \text{ dB}$


IEEE 802.11n (HT20)

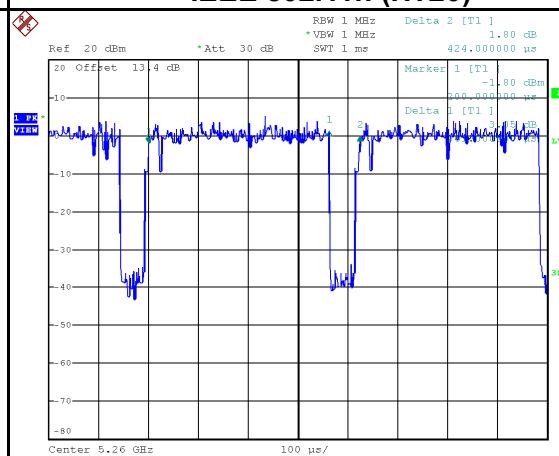

Date: 14.AUG.2018 15:18:47

Duty cycle = 0.361 ms / 0.424 ms = 85.14 %
 Duty Factor = $10 * \log(1 / 0.8514) = 0.70 \text{ dB}$


IEEE 802.11n (HT40)

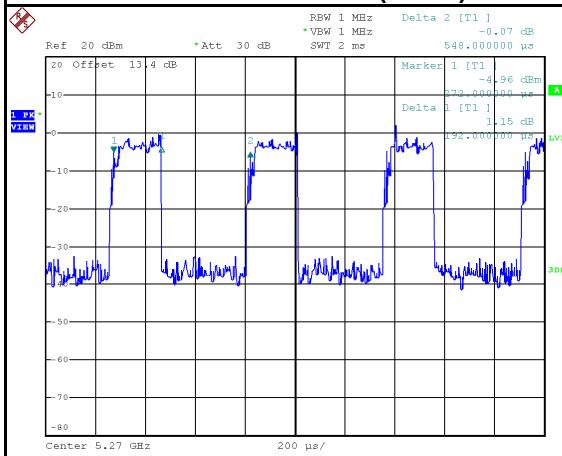

Date: 14.AUG.2018 15:38:53

Duty cycle = 0.192 ms / 0.548 ms = 35.04 %
 Duty Factor = $10 * \log(1 / 0.3504) = 4.55 \text{ dB}$

IEEE 802.11ac (VHT80)

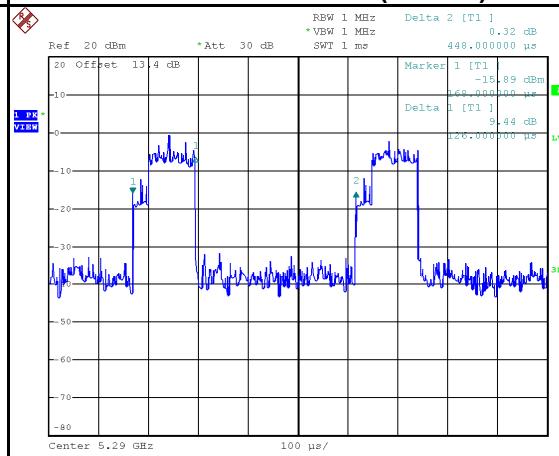

Date: 14.AUG.2018 15:51:31

Duty cycle = 0.126 ms / 0.448 ms = 28.13 %
 Duty Factor = $10 * \log(1 / 0.2813) = 5.51 \text{ dB}$

NOTE:

For IEEE 802.11a and IEEE 802.11n (HT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz (Duty cycle < 98%).


For IEEE 802.11n (HT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 2 kHz (Duty cycle < 98%).

For IEEE 802.11ac (VHT80):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 kHz (Duty cycle < 98%).

For UNII-2C:

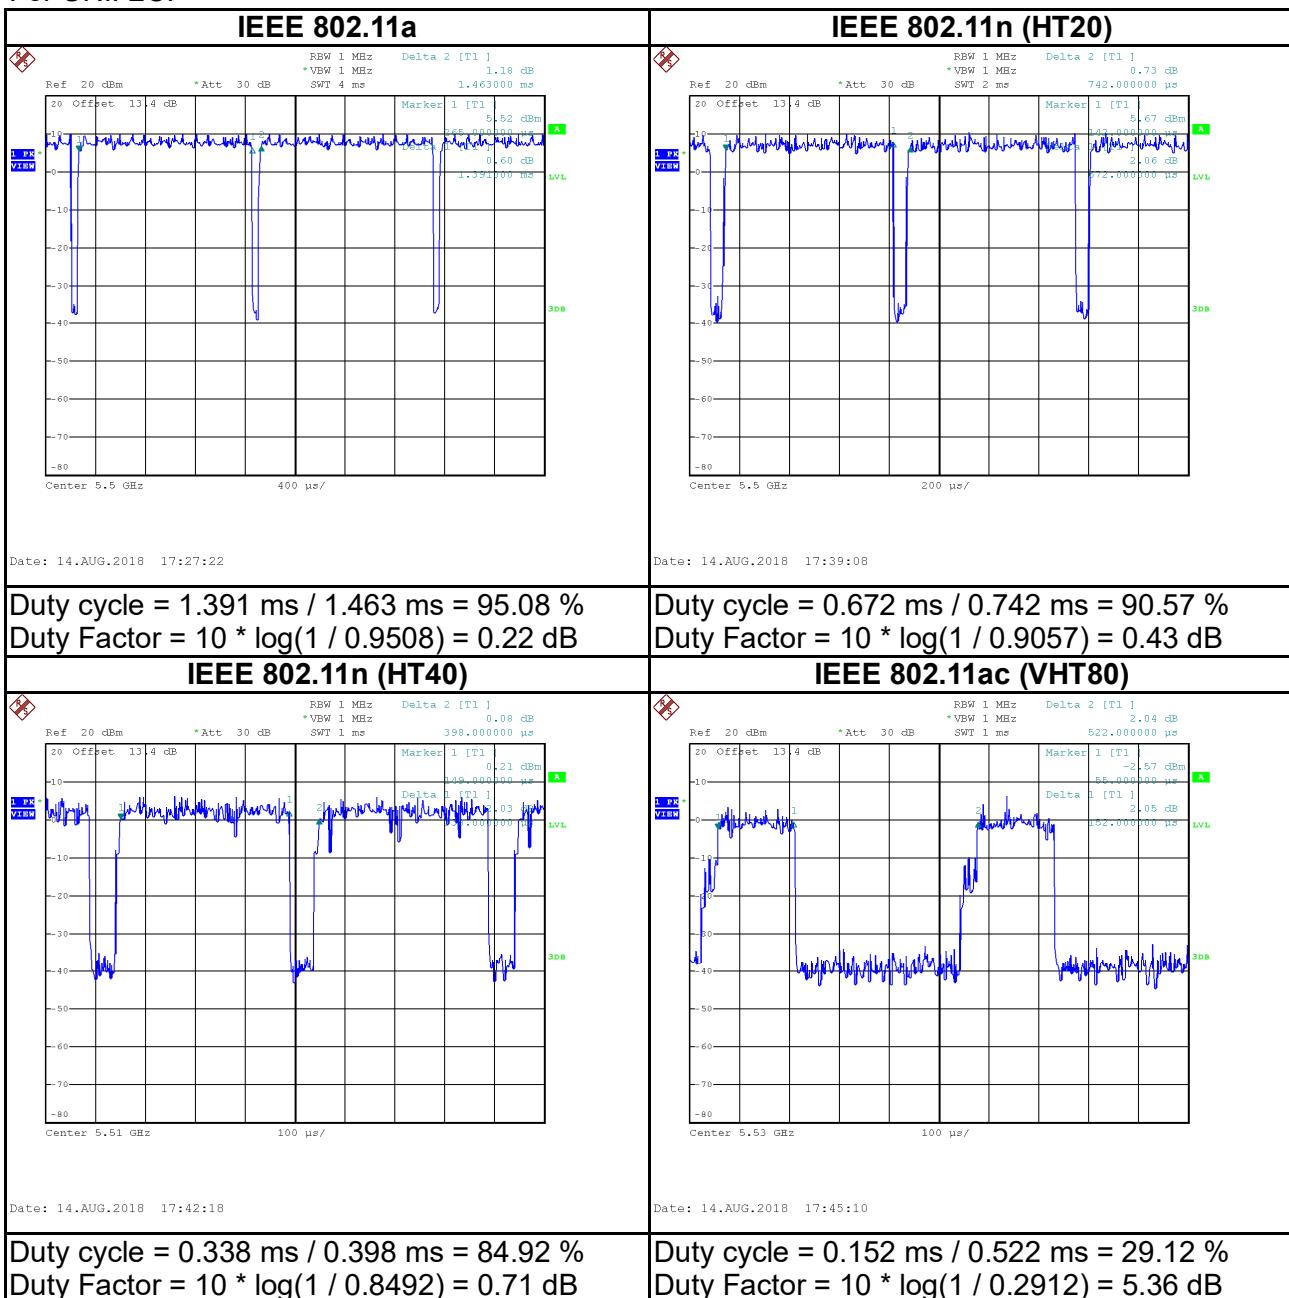

NOTE:

For IEEE 802.11a and IEEE 802.11n (HT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz (Duty cycle < 98%).


For IEEE 802.11n (HT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 2 kHz (Duty cycle < 98%).

For IEEE 802.11ac (VHT80):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 kHz (Duty cycle < 98%).

For UNII-3:

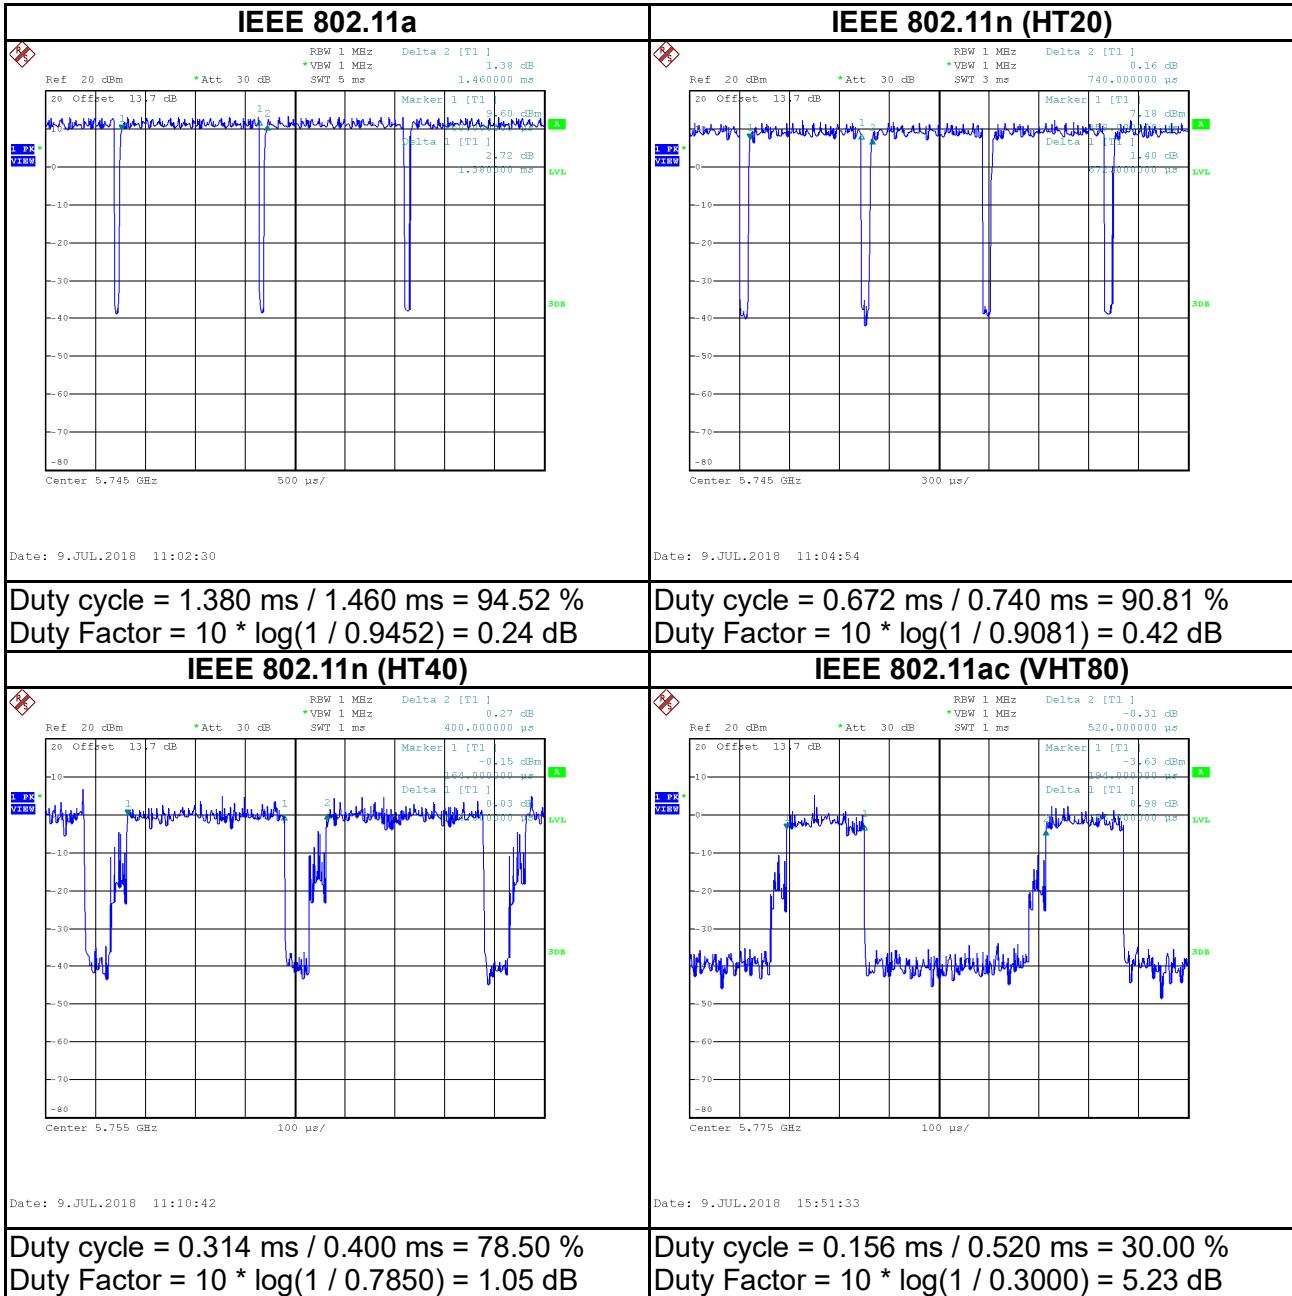

NOTE:

For IEEE 802.11a and IEEE 802.11n (HT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz (Duty cycle < 98%).

For IEEE 802.11n (HT40):


For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 2 kHz (Duty cycle < 98%).

For IEEE 802.11ac (VHT80):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 kHz (Duty cycle < 98%).

3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 3.6.

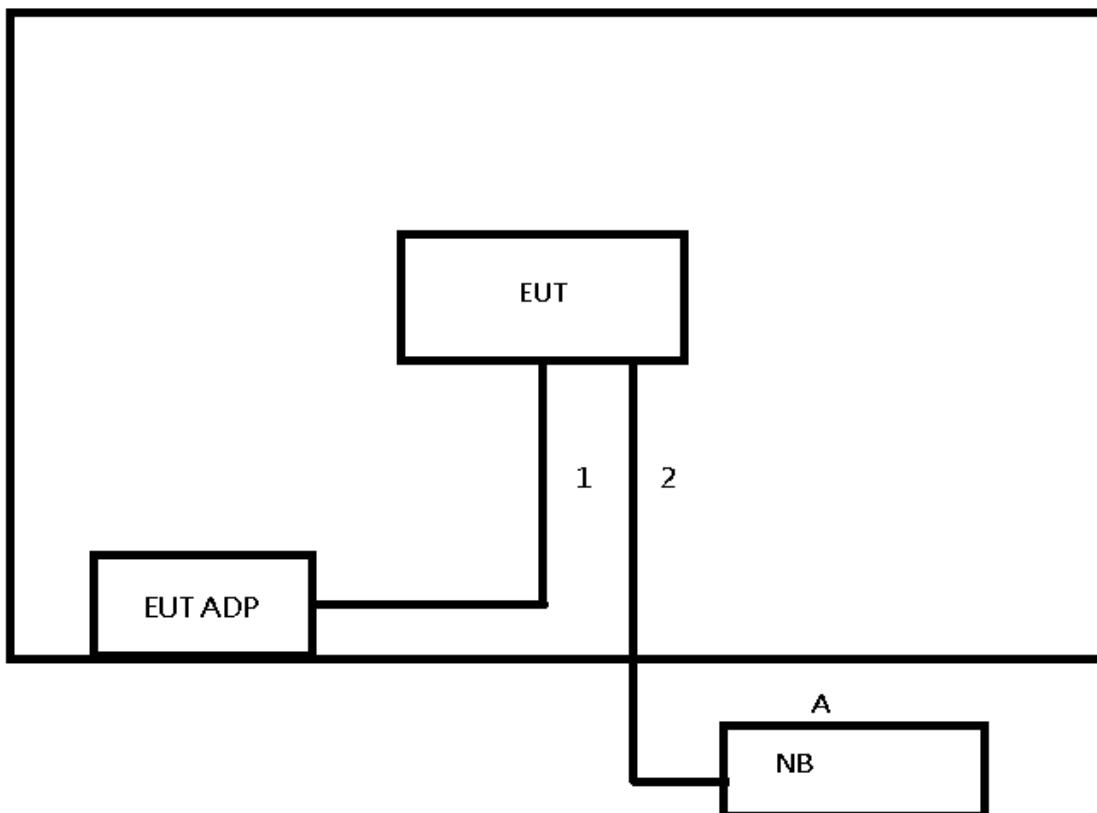

3.6 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	NB	HP	TPN-I119	5CG7032BNS	Furnished at test lab

Item	Shielded	Ferrite Core	Length	Cable Type	Remarks
1	NO	NO	1 m	Power Cable	Furnished at test lab
2	NO	NO	4 m	RJ45 Cable	Furnished at test lab

4 AC POWER LINE CONDUCTED EMISSIONS TEST

4.1 LIMIT

Frequency (MHz)	Class A (dB μ V)		Class B (dB μ V)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56 *	56 - 46 *
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
 Margin Level = Measurement Value – Limit Value

The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 m above the horizontal ground plane with the EUT being connected to the power mains through a line impedance stabilization network (LISN).
 All other support equipment were powered from an additional LISN(s).
 The LISN provides 50 Ohm/50uH of impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle to keep the cable above 40 cm.
- c. Excess I/O cables that are not connected to a peripheral shall be bundled in the center.
 The end of the cable will be terminated, using the correct terminating impedance.
 The overall length shall not exceed 1 m.
- d. The LISN is spaced at least 80 cm from the nearest part of the EUT chassis.
- e. For the actual test configuration, please refer to the related Item - EUT Test Photos.


NOTE:

1. In the results, each reading is marked as Peak, QP or AVG per the detector used.
 BW=9 kHz (6 dB Bandwidth)
2. All readings are Peak unless otherwise stated QP or AVG in column of Note. Both the QP and the AVG readings must be less than the limit for compliance.

4.3 DEVIATION FROM TEST STANDARD

No deviation.

4.4 TEST SETUP

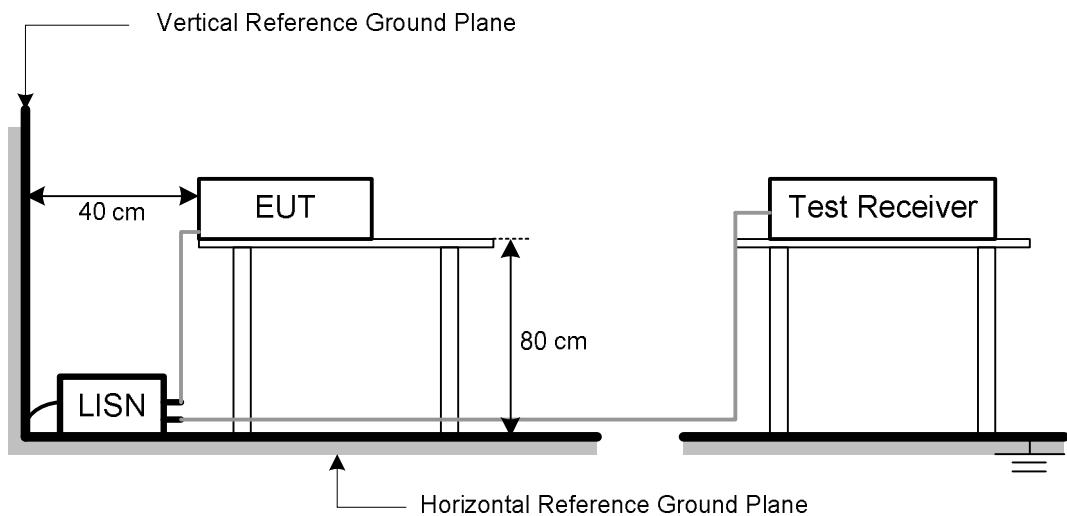

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in normal link mode.

4.6 TEST RESULT

Temperature: 25 °C Relative Humidity: 45 % Test Voltage: AC 120V/50Hz

Please refer to the APPENDIX A.

5 RADIATED EMISSIONS TEST

5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequency (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dB μ V/m)
5150-5250	-27	68.3
5250-5350	-27	68.3
5470-5725	-27	68.3
	-27 (NOTE 2)	68.3
5725-5850	10 (NOTE 2)	105.3
	15.6 (NOTE 2)	110.9
	27 (NOTE 2)	122.3

NOTE:

1. The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength: $E = \frac{1000000\sqrt{30P}}{3}$ μ V/m, where P is the eirp (Watts)
2. According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

5.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

5.3 DEVIATION FROM TEST STANDARD


No deviation.

5.4 TEST SETUP


Below 30 MHz

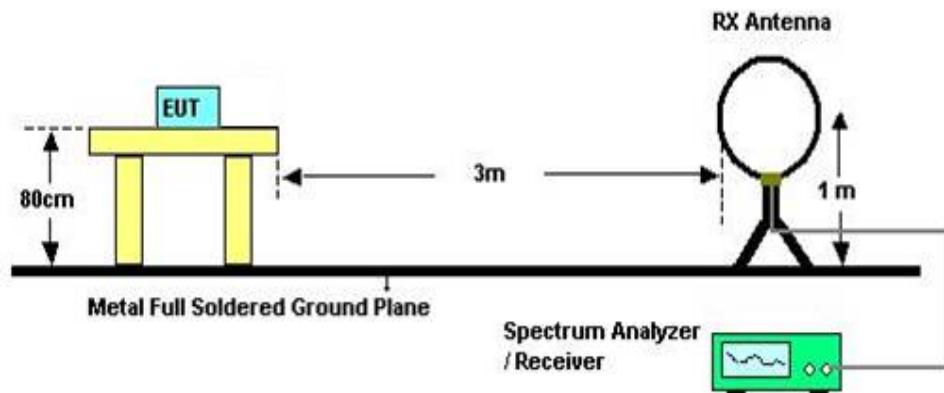

30 MHz to 1 GHz

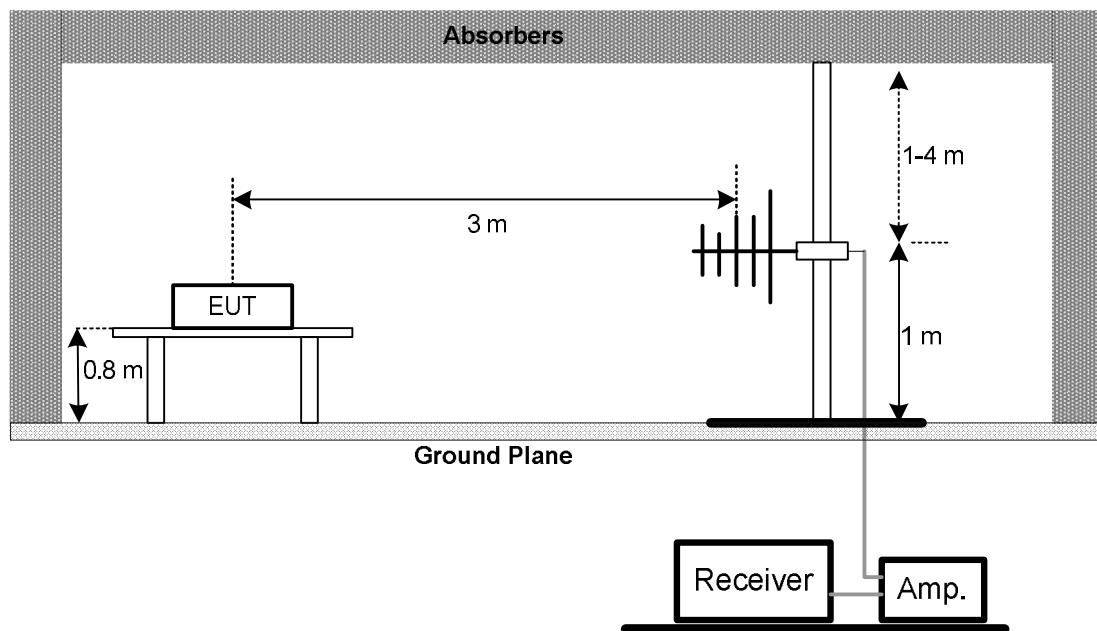

Above 1 GHz

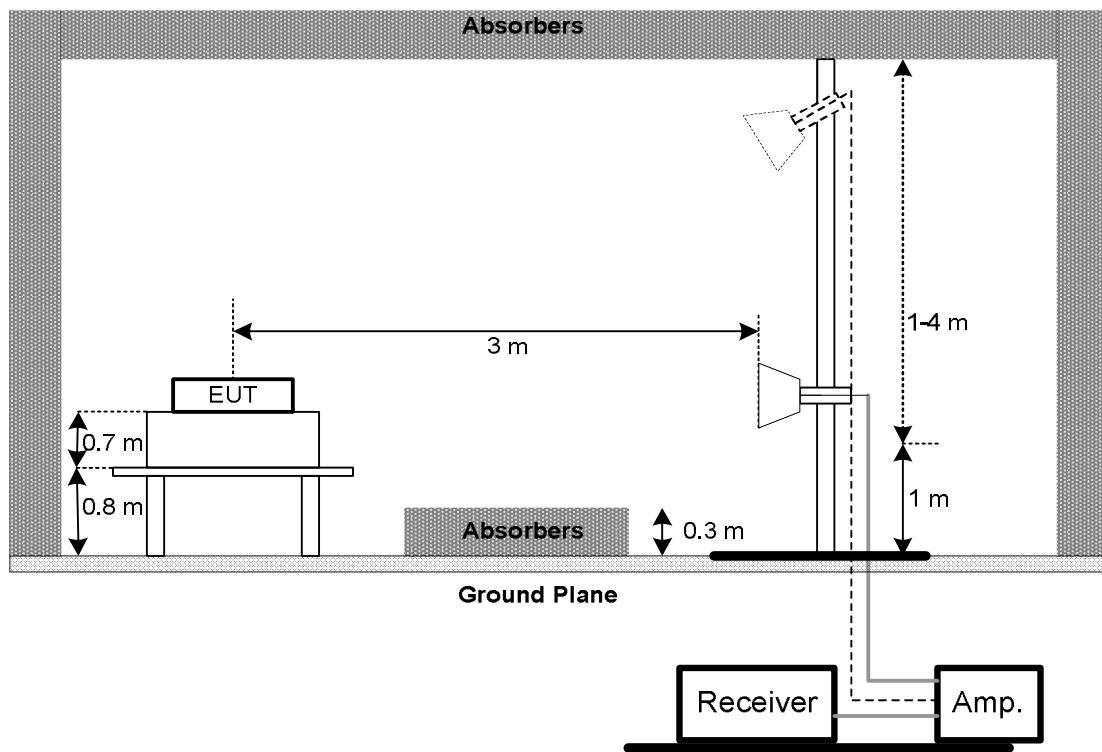

5.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULT – 9 KHZ TO 30 MHZ

Temperature: 23 °C Relative Humidity: 70 % Test Voltage: AC 120V/50Hz

Please refer to the APPENDIX B.

NOTE:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

5.7 TEST RESULT – 30MHZ TO 1000 MHZ

Temperature: 23 °C Relative Humidity: 70 % Test Voltage: AC 120V/50Hz

Please refer to the APPENDIX C.

5.8 TEST RESULT – ABOVE 1000 MHZ

Temperature: 23 °C Relative Humidity: 70 % Test Voltage: AC 120V/50Hz

Please refer to the APPENDIX D.

NOTE:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

6 BANDWIDTH TEST

6.1 LIMIT

FCC Part15, Subpart E (§15.407)		
Section	Test Item	Frequency Range (MHz)
§15.407(a)	26 dB Bandwidth	5150-5250
		5250-5350
		5470-5725
	Minimum 500 kHz 6 dB Bandwidth	5725-5850

6.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> 26 dB Bandwidth
RBW	300 kHz(Bandwidth 20 MHz) 1 MHz(Bandwidth 40 MHz and 80 MHz)
VBW	1 MHz(Bandwidth 20 MHz) 3 MHz(Bandwidth 40 MHz and 80 MHz)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

6.3 DEVIATION FROM TEST STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULT

Please refer to the APPENDIX E.

7 PEAK OUTPUT POWER TEST

7.1 LIMIT

FCC Part15, Subpart E (§15.407)			
Section	Test Item	Limit	Frequency Range (MHz)
§15.407(a)	Maximum Output Power	Fixed:1 Watt (30 dBm)	5150-5250
		Mobile and portable: 250 mW (24 dBm)	5250-5350
		250 mW (24 dBm)	5470-5725
		1 Watt (30dBm)	5725-5850

Note: The maximum e.i.r.p at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW(21 dBm).

7.2 TEST PROCEDURE

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- Spectrum Setting:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1 MHz
VBW	≥ 3 MHz
Detector	RMS
Trace	Max Hold
Sweep Time	auto

- The maximum peak conducted output power was performed in accordance with method of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

7.3 DEVIATION FROM TEST STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULT

Please refer to the APPENDIX F.

8 POWER SPECTRAL DENSITY

8.1 LIMIT

FCC Part15, Subpart E (§15.407)			
Section	Test Item	Limit	Frequency Range (MHz)
§15.407(a)	Power Spectral Density	Other than Mobile and portable: 17 dBm/MHz	5150-5250
		Mobile and portable: 11 dBm/MHz	5250-5350
		11 dBm/MHz	5470-5725
		30 dBm/500 kHz	5725-5850

8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1 MHz
VBW	≥ 3 MHz
Detector	RMS
Trace	Max Hold
Sweep Time	Auto

8.3 DEVIATION FROM TEST STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULT

Please refer to the APPENDIX G.

9 FREQUENCY STABILITY TEST

9.1 LIMIT

FCC Part15, Subpart E (§15.407)			
Section	Test Item	Limit	Frequency Range (MHz)
15.407(g)	Frequency Stability	Specified in the user's manual	5150-5250
			5250-5350
			5470-5725
			5725-5850

9.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:


Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

- The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
- User manual temperature is 0°C~40°C.

9.3 DEVIATION FROM TEST STANDARD

No deviation.

9.4 TEST SETUP

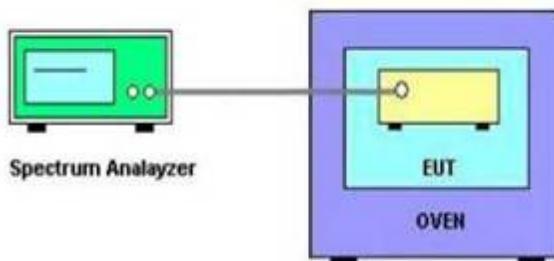

9.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

9.6 TEST RESULT

Please refer to the APPENDIX H.

10 LIST OF MEASURING EQUIPMENTS

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	101050	Mar. 08, 2019
2	Test Cable	EMCI	EMCCFD300-BM-BMR-6000	170715	Aug. 07, 2019
3	EMI Test Receiver	R&S	ESR7	101433	Dec. 09, 2019
4	Measurement Software	EZ	EZ_EMC (Version NB-03A)	N/A	N/A

Radiated Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Preamplifier	EMCI	012645B	980267	Feb. 27, 2019
2	Preamplifier	EMCI	EMC02325	980217	Dec. 28, 2018
3	Preamplifier	EMCI	EMC2654045	980030	Feb. 13, 2019
4	Test Cable	EMCI	EMC104-SM-SM-8000	8m	Jan. 03, 2019
5	Test Cable	EMCI	EMC104-SM-SM-800	150207	Mar. 15, 2019
6	Test Cable	EMCI	EEMC104-SM-SM-3000	151205	Jan. 03, 2019
7	MXE EMI Receiver	Agilent	N9038A	MY55420127	Jan. 08, 2019
8	Signal Analyzer	Agilent	N9010A	MY52220990	Feb. 21, 2019
9	Loop Ant	EMCI	LPA600	274	May 03, 2019
10	Horn Ant	SCHWARZBEC K	BBHA 9120D	9120D-1342	Feb. 27, 2019
11	Horn Ant	Schwarzbeck	BBHA 9170	187	Dec. 04, 2019
12	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	9168-548	Jan. 15, 2019
13	5dB Attenuator	EMCI	EMCI-N-6-05	AT-N0623	Jan. 15, 2019

26 dB Bandwidth					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	R&S/FSP30	100854	May 24, 2019

Conducted Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	Anritsu	ML2495A	1128008	Aug. 15, 2019
2	Power Sensor	Anritsu	MA2411B	1126001	Aug. 15, 2019

Power Spectral Density					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	R&S/FSP30	100854	May 24, 2019


Frequency Stability					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	R&S/FSP30	100854	May 24, 2019

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

APPENDIX A AC POWER LINE CONDUCTED EMISSIONS


CONTINUE ON NEXT PAGE

Test Mode	UNII-1_TX AC (VHT80) MODE 5210 MHz	Phase	Line
-----------	------------------------------------	-------	------

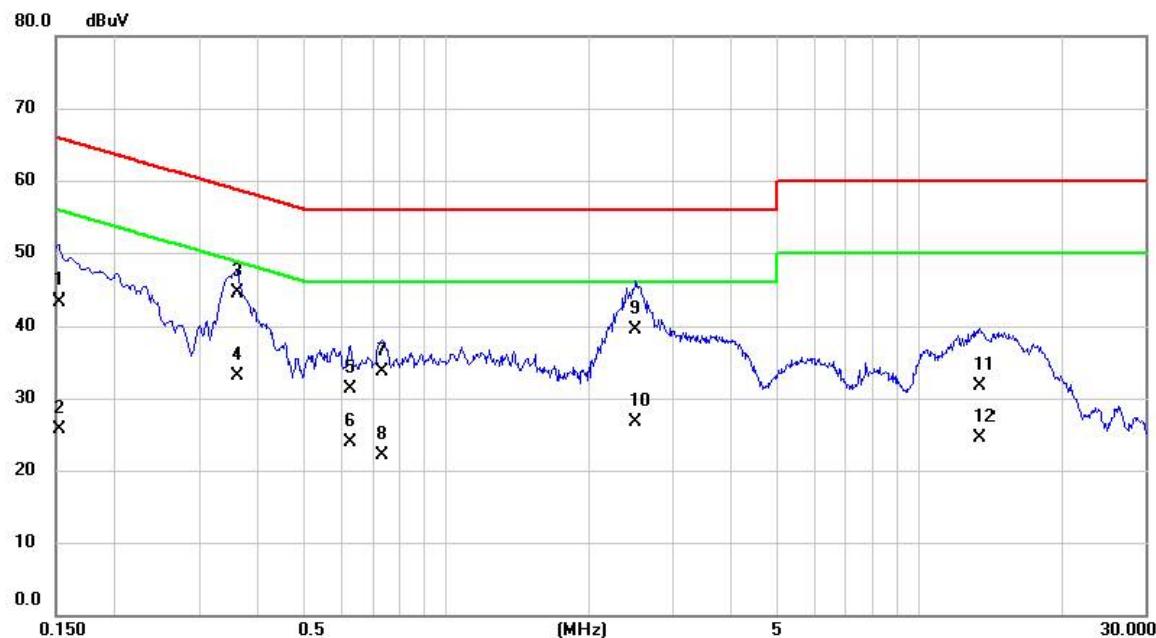


No. Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector	Comment
		dBuV	dB	dBuV	dB			
1	0.1522	33.70	9.63	43.33	65.88	-22.55	QP	
2	0.1522	16.00	9.63	25.63	55.88	-30.25	AVG	
3 *	0.3615	34.90	9.65	44.55	58.69	-14.14	QP	
4	0.3615	23.40	9.65	33.05	48.69	-15.64	AVG	
5	0.6292	21.70	9.66	31.36	56.00	-24.64	QP	
6	0.6292	14.20	9.66	23.86	46.00	-22.14	AVG	
7	0.7350	24.10	9.67	33.77	56.00	-22.23	QP	
8	0.7350	12.40	9.67	22.07	46.00	-23.93	AVG	
9	2.5013	29.90	9.70	39.60	56.00	-16.40	QP	
10	2.5013	17.10	9.70	26.80	46.00	-19.20	AVG	
11	13.4228	21.70	9.94	31.64	60.00	-28.36	QP	
12	13.4228	14.50	9.94	24.44	50.00	-25.56	AVG	

Test Mode	UNII-1_TX AC (VHT80) MODE 5210 MHz	Phase	Neutral
-----------	------------------------------------	-------	---------

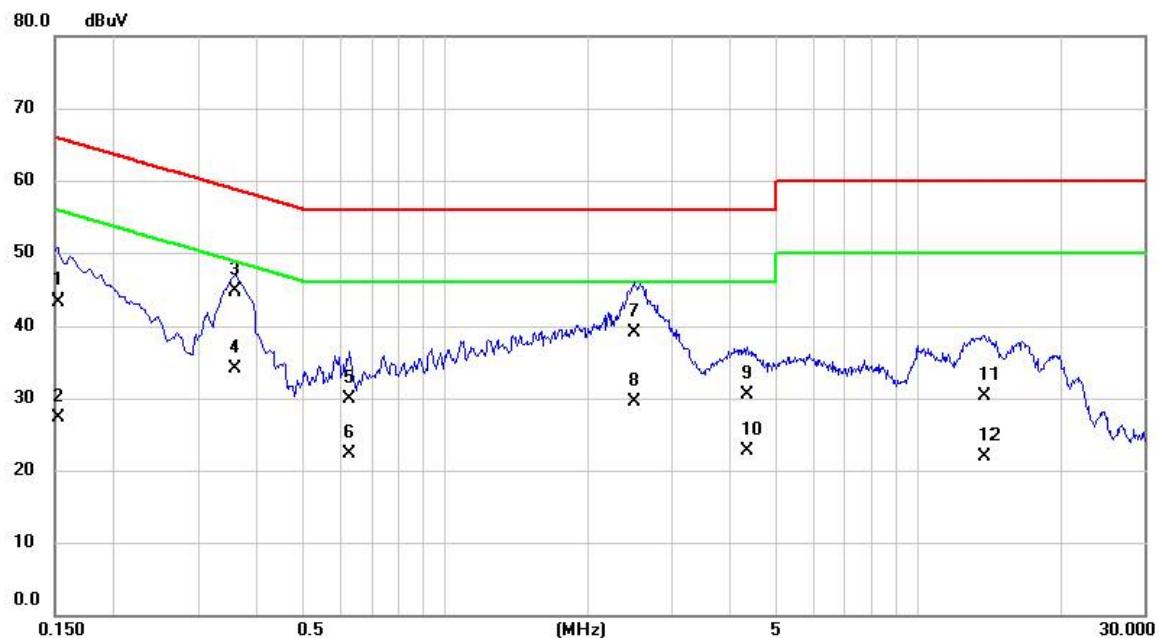


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV	Limit dBuV	Over	
						Detector	Comment
1	0.1522	33.60	9.62	43.22	65.88	-22.66	QP
2	0.1522	17.60	9.62	27.22	55.88	-28.66	AVG
3 *	0.3592	35.00	9.64	44.64	58.75	-14.11	QP
4	0.3592	24.50	9.64	34.14	48.75	-14.61	AVG
5	0.6292	20.30	9.65	29.95	56.00	-26.05	QP
6	0.6292	12.70	9.65	22.35	46.00	-23.65	AVG
7	2.4968	29.50	9.68	39.18	56.00	-16.82	QP
8	2.4968	19.90	9.68	29.58	46.00	-16.42	AVG
9	4.3508	20.80	9.73	30.53	56.00	-25.47	QP
10	4.3508	13.00	9.73	22.73	46.00	-23.27	AVG
11	13.8345	20.30	9.95	30.25	60.00	-29.75	QP
12	13.8345	11.90	9.95	21.85	50.00	-28.15	AVG

Test Mode	UNII-2A_TX AC (VHT80) MODE 5290 MHz	Phase	Line
-----------	-------------------------------------	-------	------

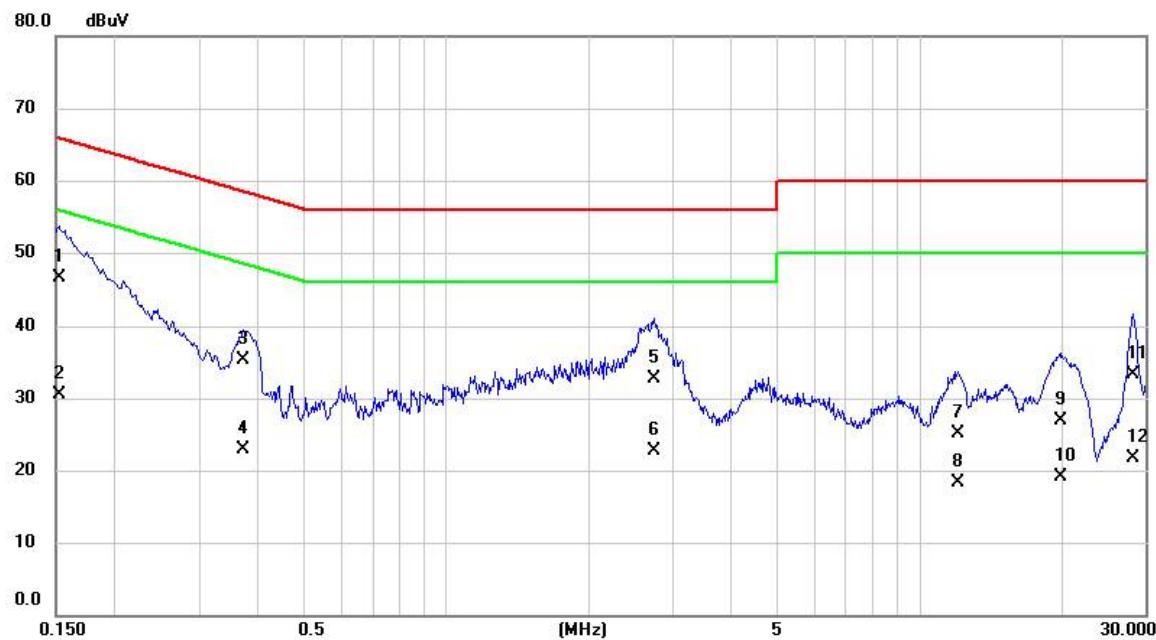


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV	Limit dBuV	Over	
						Detector	Comment
1 *	0.1522	36.80	9.63	46.43	65.88	-19.45	QP
2	0.1522	20.90	9.63	30.53	55.88	-25.35	AVG
3	0.3727	25.70	9.65	35.35	58.44	-23.09	QP
4	0.3727	13.20	9.65	22.85	48.44	-25.59	AVG
5	2.7375	23.00	9.70	32.70	56.00	-23.30	QP
6	2.7375	13.00	9.70	22.70	46.00	-23.30	AVG
7	12.0255	15.20	9.93	25.13	60.00	-34.87	QP
8	12.0255	8.40	9.93	18.33	50.00	-31.67	AVG
9	19.7880	17.00	9.97	26.97	60.00	-33.03	QP
10	19.7880	9.10	9.97	19.07	50.00	-30.93	AVG
11	28.3020	23.40	9.96	33.36	60.00	-26.64	QP
12	28.3020	11.80	9.96	21.76	50.00	-28.24	AVG

Test Mode	UNII-2A_TX AC (VHT80) MODE 5290 MHz	Phase	Neutral
-----------	-------------------------------------	-------	---------

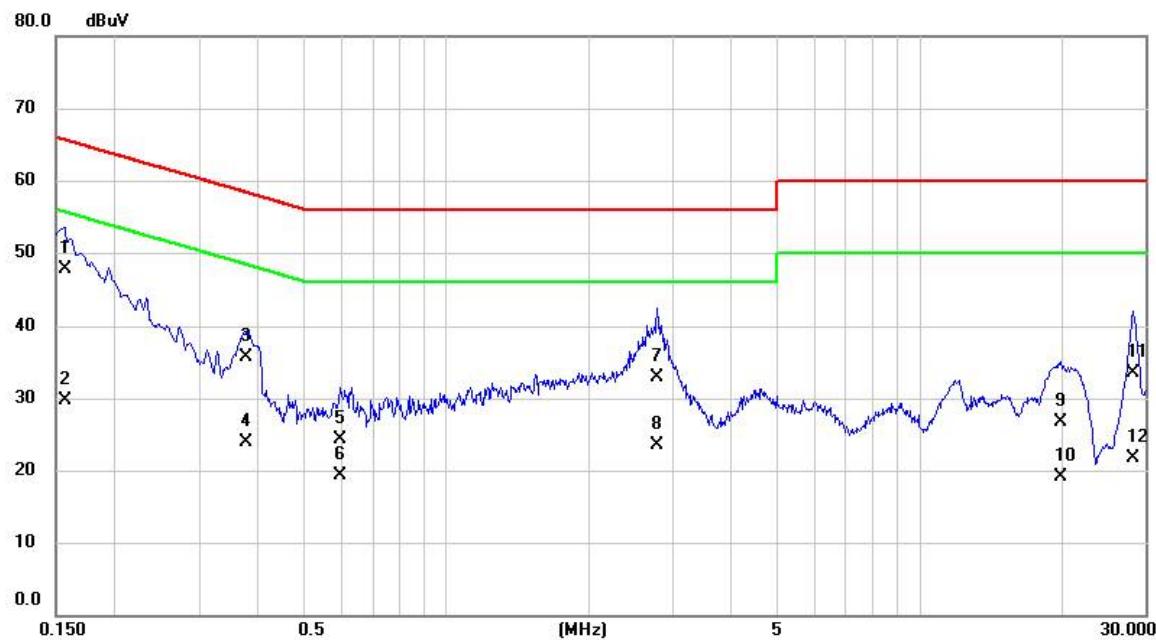


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dB	Limit dBuV	Over	
						Detector	Comment
1 *	0.1568	38.10	9.62	47.72	65.63	-17.91	QP
2	0.1568	20.00	9.62	29.62	55.63	-26.01	AVG
3	0.3772	26.00	9.64	35.64	58.34	-22.70	QP
4	0.3772	14.30	9.64	23.94	48.34	-24.40	AVG
5	0.5977	14.70	9.65	24.35	56.00	-31.65	QP
6	0.5977	9.60	9.65	19.25	46.00	-26.75	AVG
7	2.7870	23.20	9.70	32.90	56.00	-23.10	QP
8	2.7870	13.90	9.70	23.60	46.00	-22.40	AVG
9	19.8173	16.70	9.98	26.68	60.00	-33.32	QP
10	19.8173	9.10	9.98	19.08	50.00	-30.92	AVG
11	28.2480	23.60	10.00	33.60	60.00	-26.40	QP
12	28.2480	11.70	10.00	21.70	50.00	-28.30	AVG

Test Mode	UNII-2C_TX AC (VHT80) MODE 5530 MHz	Phase	Line
-----------	-------------------------------------	-------	------

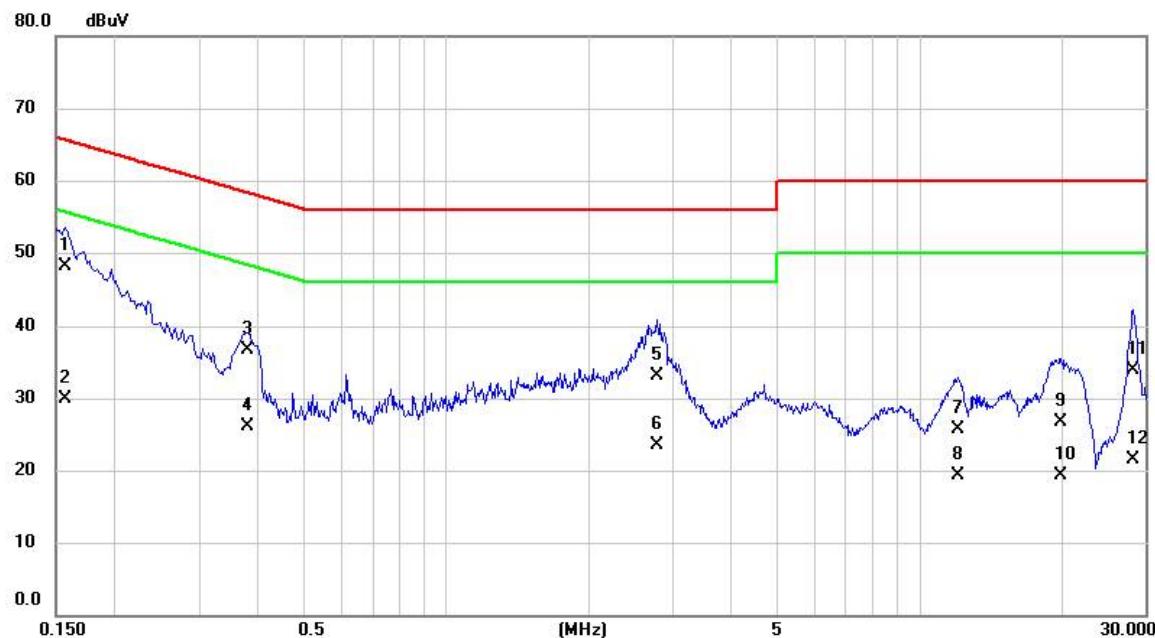


No. Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector	Comment
		dBuV	dB	dBuV	dB			
1 *	0.1568	38.50	9.63	48.13	65.63	-17.50	QP	
2	0.1568	20.30	9.63	29.93	55.63	-25.70	AVG	
3	0.3795	27.10	9.65	36.75	58.29	-21.54	QP	
4	0.3795	16.40	9.65	26.05	48.29	-22.24	AVG	
5	2.7825	23.30	9.71	33.01	56.00	-22.99	QP	
6	2.7825	13.70	9.71	23.41	46.00	-22.59	AVG	
7	12.0098	15.70	9.93	25.63	60.00	-34.37	QP	
8	12.0098	9.40	9.93	19.33	50.00	-30.67	AVG	
9	19.8713	16.80	9.97	26.77	60.00	-33.23	QP	
10	19.8713	9.30	9.97	19.27	50.00	-30.73	AVG	
11	28.1940	24.00	9.96	33.96	60.00	-26.04	QP	
12	28.1940	11.60	9.96	21.56	50.00	-28.44	AVG	

Test Mode	UNII-2C_TX AC (VHT80) MODE 5530 MHz	Phase	Neutral
-----------	-------------------------------------	-------	---------

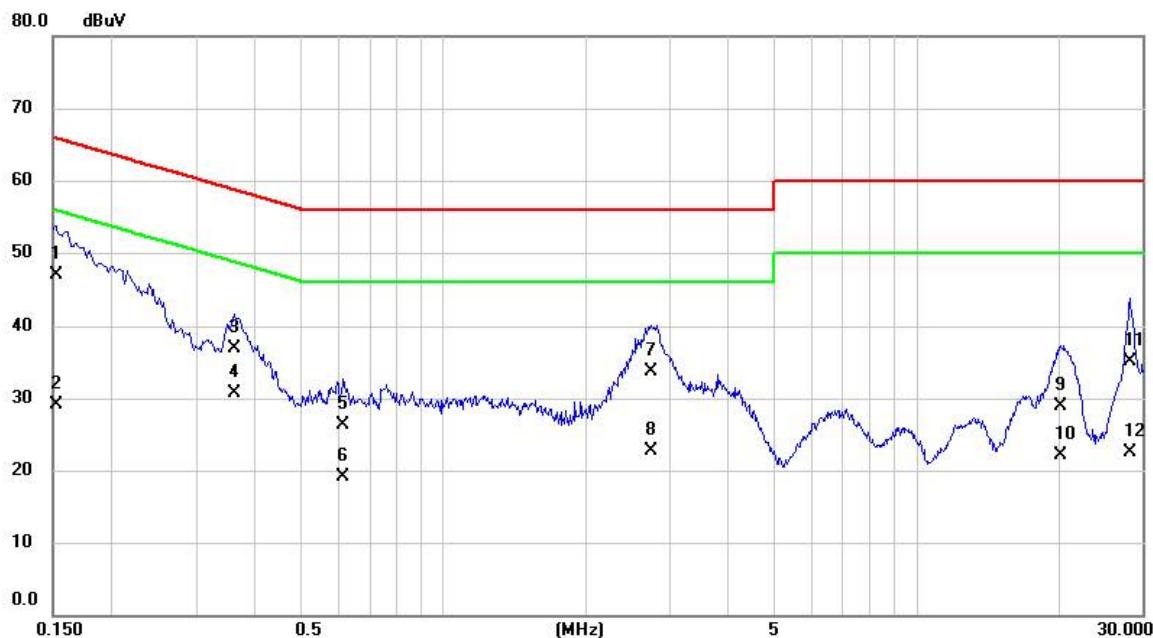


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV	Limit dBuV	Over	
						Detector	Comment
1	0.1522	37.30	9.62	46.92	65.88	-18.96	QP
2	0.1522	19.50	9.62	29.12	55.88	-26.76	AVG
3	0.3615	27.30	9.64	36.94	58.69	-21.75	QP
4 *	0.3615	21.00	9.64	30.64	48.69	-18.05	AVG
5	0.6157	16.70	9.65	26.35	56.00	-29.65	QP
6	0.6157	9.50	9.65	19.15	46.00	-26.85	AVG
7	2.7465	24.00	9.69	33.69	56.00	-22.31	QP
8	2.7465	13.10	9.69	22.79	46.00	-23.21	AVG
9	20.1053	18.90	9.98	28.88	60.00	-31.12	QP
10	20.1053	12.20	9.98	22.18	50.00	-27.82	AVG
11	28.2390	25.20	10.00	35.20	60.00	-24.80	QP
12	28.2390	12.60	10.00	22.60	50.00	-27.40	AVG

Test Mode	UNII-3_TX A MODE 5745 MHz	Phase	Line
-----------	---------------------------	-------	------

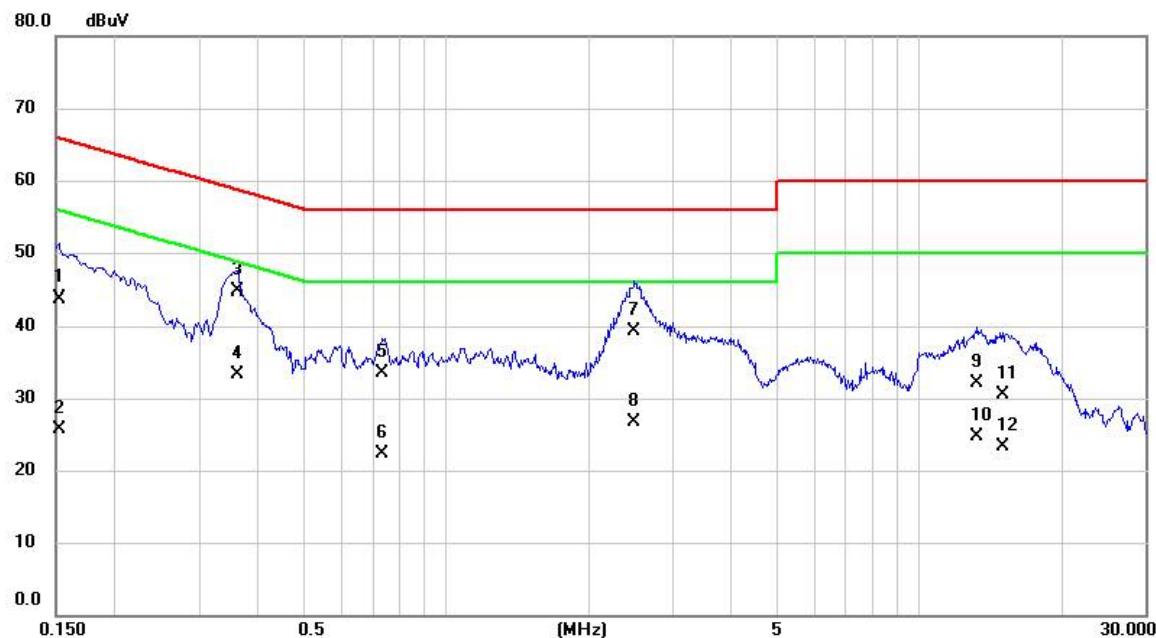

No. Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector	Comment
		dBuV	dB	dBuV	dB			
1	0.1522	34.00	9.63	43.63	65.88	-22.25	QP	
2	0.1522	16.10	9.63	25.73	55.88	-30.15	AVG	
3 *	0.3615	35.00	9.65	44.65	58.69	-14.04	QP	
4	0.3615	23.70	9.65	33.35	48.69	-15.34	AVG	
5	0.7350	23.90	9.67	33.57	56.00	-22.43	QP	
6	0.7350	12.70	9.67	22.37	46.00	-23.63	AVG	
7	2.4945	29.60	9.70	39.30	56.00	-16.70	QP	
8	2.4945	17.00	9.70	26.70	46.00	-19.30	AVG	
9	13.2878	22.10	9.94	32.04	60.00	-27.96	QP	
10	13.2878	14.80	9.94	24.74	50.00	-25.26	AVG	
11	14.9235	20.60	9.94	30.54	60.00	-29.46	QP	
12	14.9235	13.40	9.94	23.34	50.00	-26.66	AVG	


Test Mode	UNII-3_TX A MODE 5745 MHz	Phase	Neutral
-----------	---------------------------	-------	---------

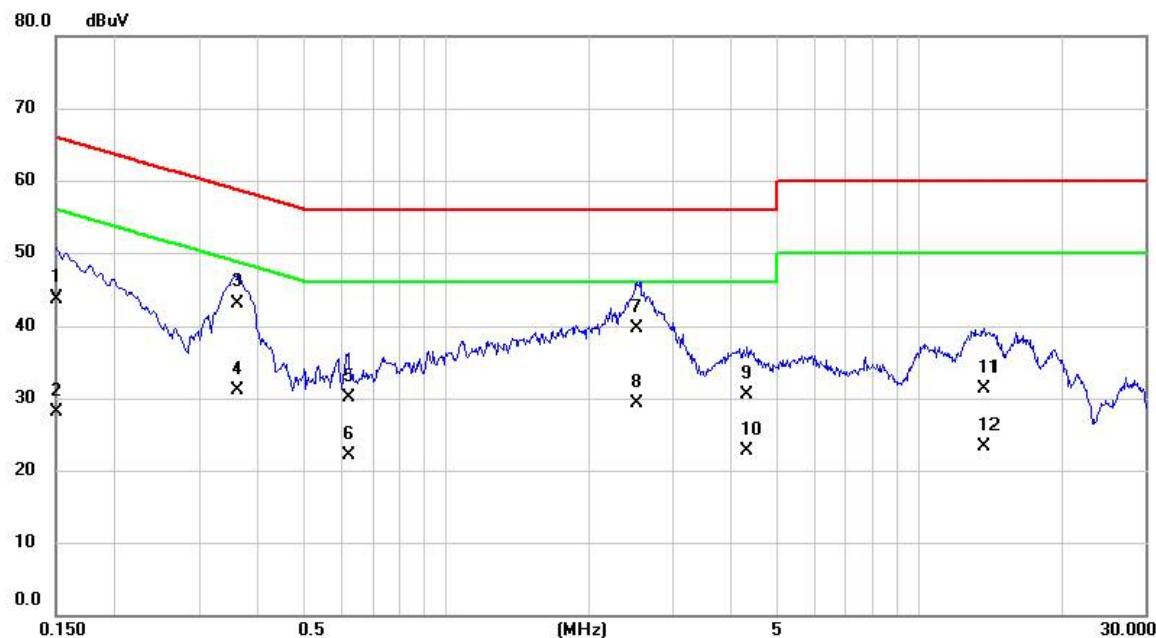

No. Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector	Comment
		dBuV	dB	dBuV	dB			
1	0.1500	34.10	9.62	43.72	66.00	-22.28	QP	
2	0.1500	18.50	9.62	28.12	56.00	-27.88	AVG	
3 *	0.3615	33.50	9.64	43.14	58.69	-15.55	QP	
4	0.3615	21.50	9.64	31.14	48.69	-17.55	AVG	
5	0.6225	20.40	9.65	30.05	56.00	-25.95	QP	
6	0.6225	12.50	9.65	22.15	46.00	-23.85	AVG	
7	2.5260	30.00	9.69	39.69	56.00	-16.31	QP	
8	2.5260	19.70	9.69	29.39	46.00	-16.61	AVG	
9	4.3238	20.70	9.73	30.43	56.00	-25.57	QP	
10	4.3238	13.00	9.73	22.73	46.00	-23.27	AVG	
11	13.7288	21.30	9.94	31.24	60.00	-28.76	QP	
12	13.7288	13.30	9.94	23.24	50.00	-26.76	AVG	

APPENDIX B RADIATED EMISSIONS - 9 KHZ TO 30 MHZ**CONTINUE ON NEXT PAGE**

Test Mode	UNII-1_TX AC (VHT80) MODE 5210 MHz	Azimuth Angle	90°
-----------	------------------------------------	---------------	-----

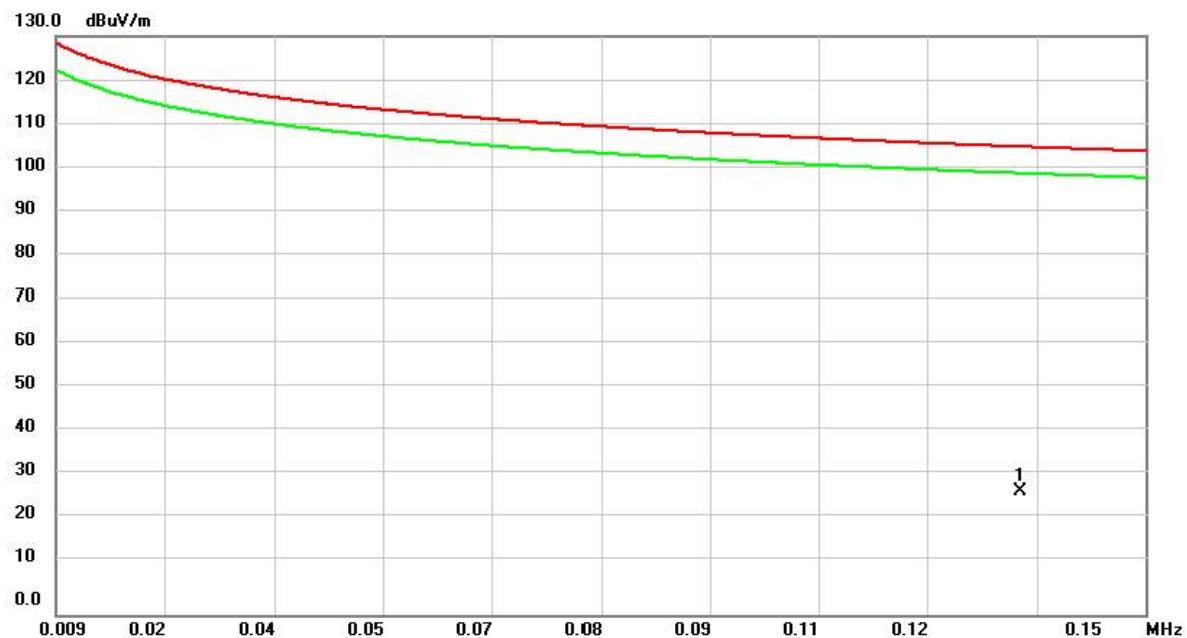


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.1338	13.82	14.11	27.93	105.08	-77.15	peak	

Test Mode	UNII-1_TX AC (VHT80) MODE 5210 MHz	Azimuth Angle	90°
-----------	------------------------------------	---------------	-----




No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level						
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		0.5082	30.85	3.43	34.28	73.48	-39.20	peak	
2	*	1.4633	29.14	-1.55	27.59	64.30	-36.71	peak	
3		3.3738	29.55	-3.71	25.84	69.54	-43.70	peak	
4		6.5180	28.77	-4.08	24.69	69.54	-44.85	peak	
5		8.9060	29.11	-4.67	24.44	69.54	-45.10	peak	
6		10.4184	28.98	-4.75	24.23	69.54	-45.31	peak	

Test Mode	UNII-1_TX AC (VHT80) MODE 5210 MHz	Azimuth Angle	0°
-----------	------------------------------------	---------------	----

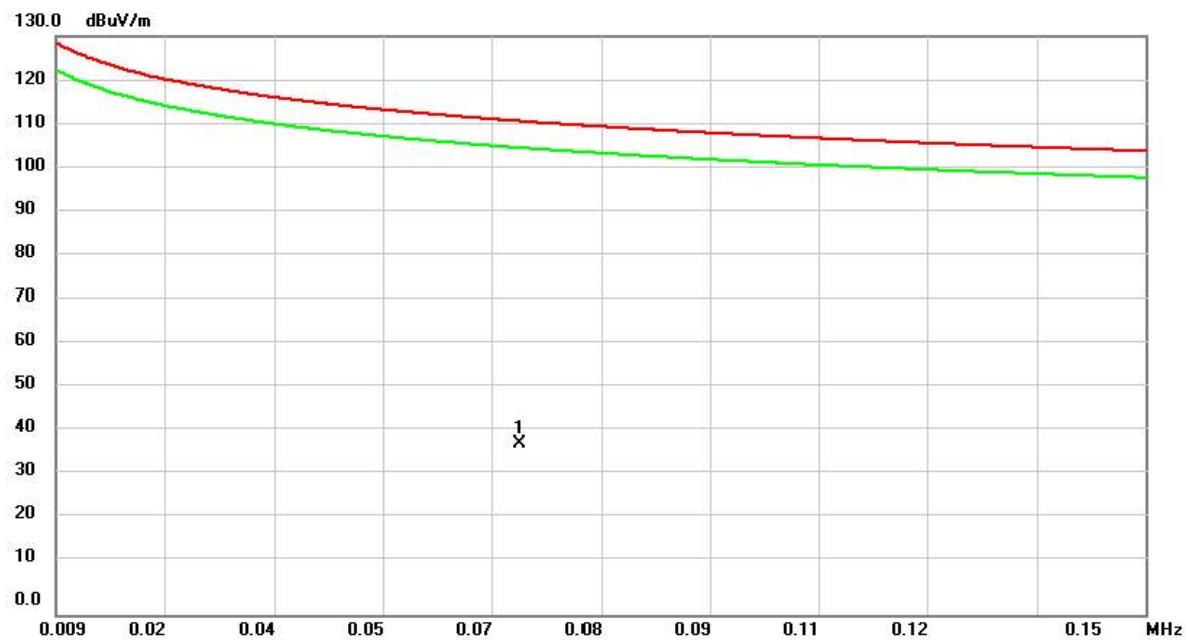


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0690	19.11	19.45	38.56	110.83	-72.27	peak	

Test Mode	UNII-1_TX AC (VHT80) MODE 5210 MHz	Azimuth Angle	0°
-----------	------------------------------------	---------------	----

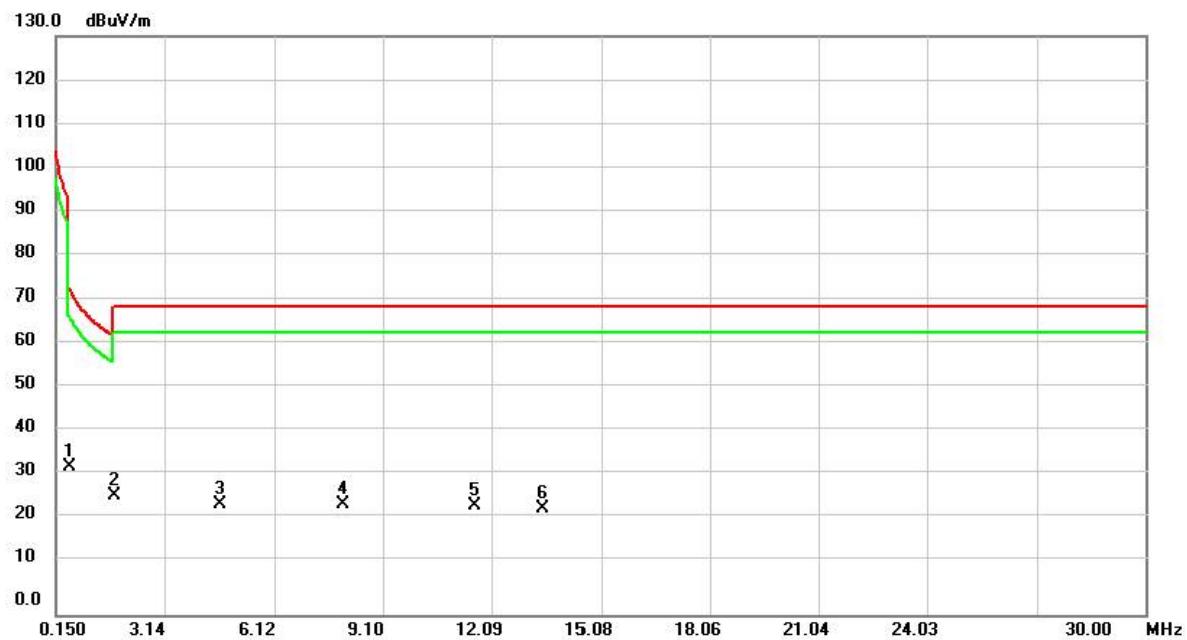

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1	*	0.5082	30.03	3.43	33.46	73.48	-40.02	peak	
2		1.7420	28.98	-2.27	26.71	69.54	-42.83	peak	
3		4.6076	28.83	-3.88	24.95	69.54	-44.59	peak	
4		7.9906	29.27	-4.32	24.95	69.54	-44.59	peak	
5		11.6124	29.27	-4.81	24.46	69.54	-45.08	peak	
6		13.4830	28.87	-4.82	24.05	69.54	-45.49	peak	

Test Mode	UNII-2A_TX AC (VHT80) MODE 5290 MHz	Azimuth Angle	90°
-----------	-------------------------------------	---------------	-----

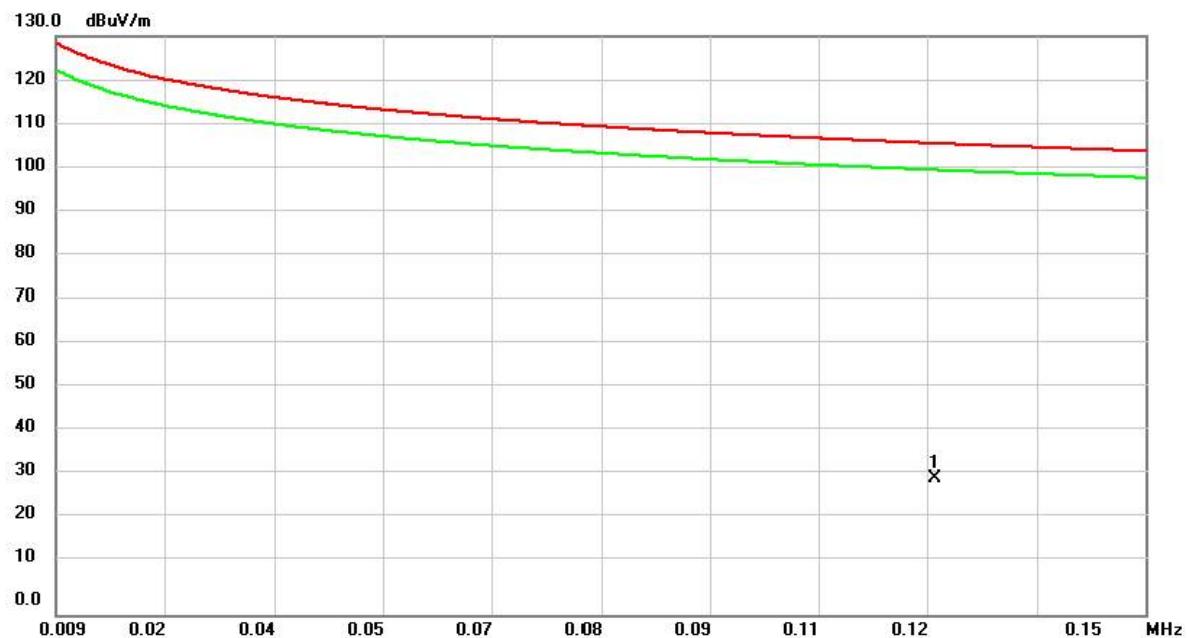

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.1228	15.85	14.74	30.59	105.82	-75.23	peak	

Test Mode	UNII-2A_TX AC (VHT80) MODE 5290 MHz	Azimuth Angle	90°
-----------	-------------------------------------	---------------	-----




No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	0.5480	29.95	3.07	33.02	72.83	-39.81	peak	
2		1.8216	28.30	-2.48	25.82	69.54	-43.72	peak	
3		3.4136	29.11	-3.71	25.40	69.54	-44.14	peak	
4		5.7220	28.84	-4.00	24.84	69.54	-44.70	peak	
5		8.0702	29.00	-4.34	24.66	69.54	-44.88	peak	
6		11.8910	28.99	-4.82	24.17	69.54	-45.37	peak	

Test Mode	UNII-2A_TX AC (VHT80) MODE 5290 MHz	Azimuth Angle	0°
-----------	-------------------------------------	---------------	----




No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.1383	14.67	13.86	28.53	104.79	-76.26	peak	

Test Mode	UNII-2A_TX AC (VHT80) MODE 5290 MHz	Azimuth Angle	0°
-----------	-------------------------------------	---------------	----

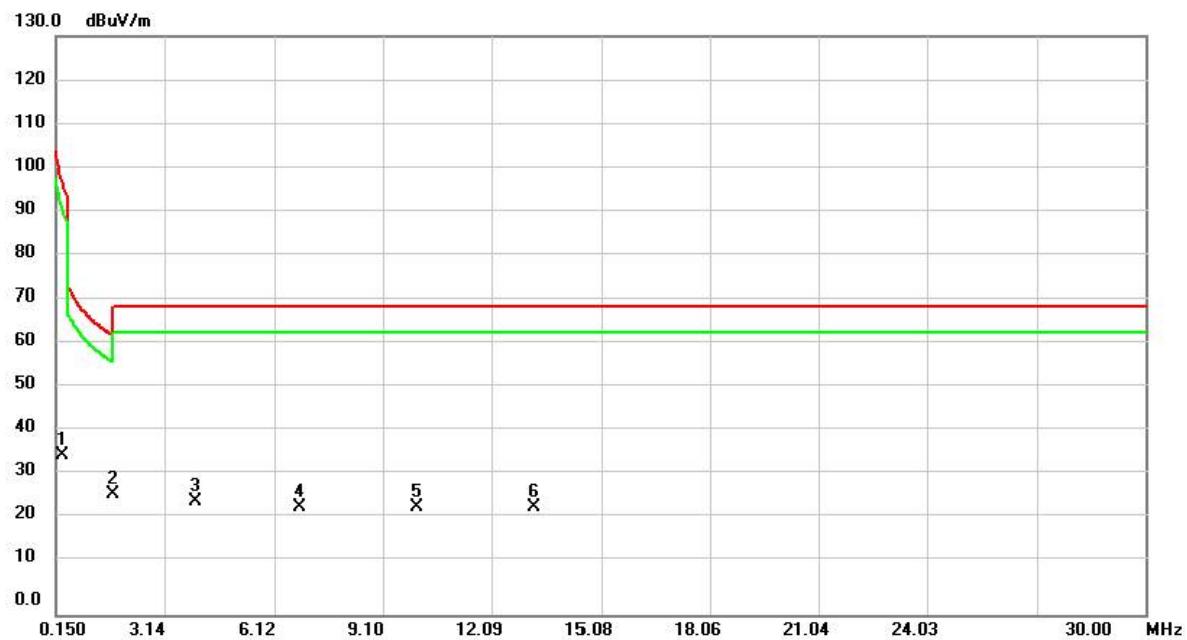


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		0.3092	29.16	6.81	35.97	97.80	-61.83	peak	
2	*	1.7022	29.19	-2.17	27.02	62.98	-35.96	peak	
3		3.9310	29.17	-3.78	25.39	69.54	-44.15	peak	
4		6.7966	28.44	-4.10	24.34	69.54	-45.20	peak	
5		10.0204	29.02	-4.71	24.31	69.54	-45.23	peak	
6		13.2442	29.00	-4.82	24.18	69.54	-45.36	peak	

Test Mode	UNII-2C_TX AC (VHT80) MODE 5530 MHz	Azimuth Angle	90°
-----------	-------------------------------------	---------------	-----

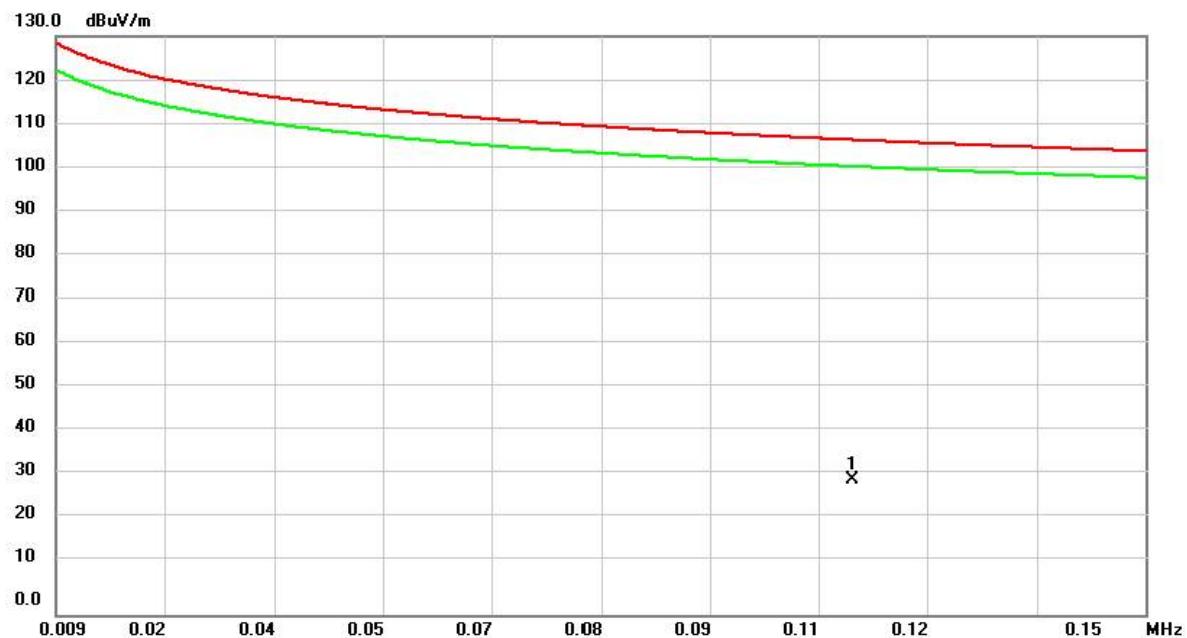


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.1121	15.03	15.34	30.37	106.61	-76.24	peak	

Test Mode	UNII-2C_TX AC (VHT80) MODE 5530 MHz	Azimuth Angle	90°
-----------	-------------------------------------	---------------	-----

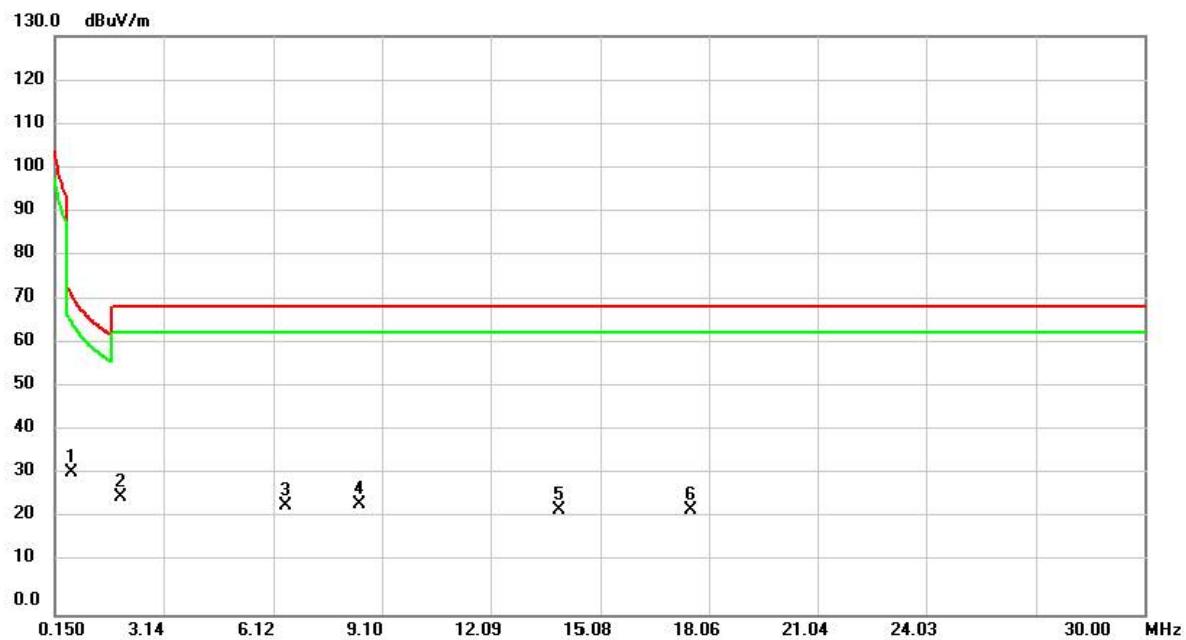


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV/m	Limit dBuV/m	Over	
						Detector	Comment
1 *	0.5878	29.18	2.72	31.90	72.22	-40.32	peak
2	1.9410	29.24	-2.79	26.45	69.54	-43.09	peak
3	6.4384	28.60	-4.07	24.53	69.54	-45.01	peak
4	8.4682	29.39	-4.50	24.89	69.54	-44.65	peak
5	13.9606	28.51	-4.82	23.69	69.54	-45.85	peak
6	17.5426	29.53	-6.05	23.48	69.54	-46.06	peak

Test Mode	UNII-2C_TX AC (VHT80) MODE 5530 MHz	Azimuth Angle	0°
-----------	-------------------------------------	---------------	----

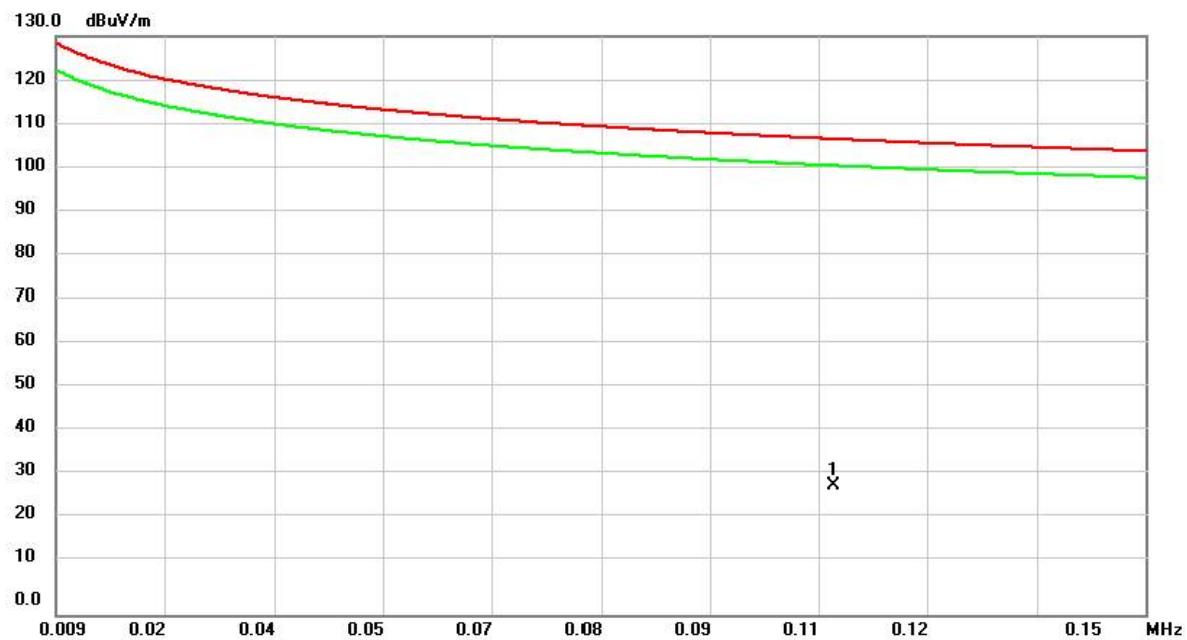


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.1096	13.47	15.48	28.95	106.81	-77.86	peak	

Test Mode	UNII-2C_TX AC (VHT80) MODE 5530 MHz	Azimuth Angle	0°
-----------	-------------------------------------	---------------	----

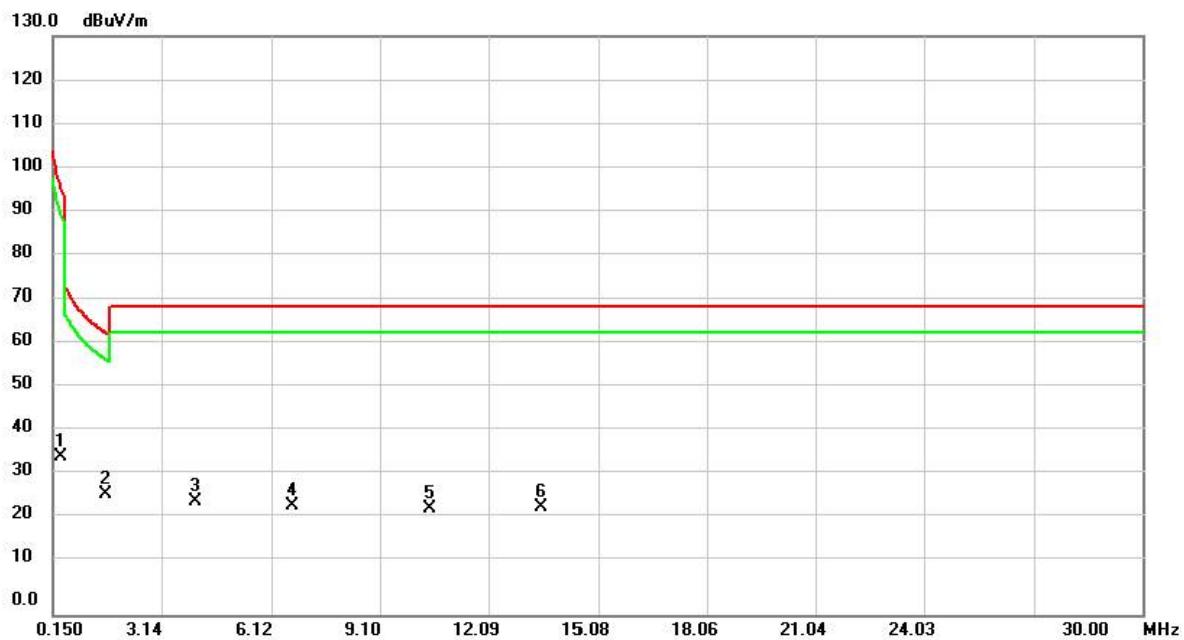

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		0.3490	29.69	5.95	35.64	96.75	-61.11	peak	
2	*	1.5828	29.07	-1.86	27.21	63.61	-36.40	peak	
3		4.0106	29.19	-3.80	25.39	69.54	-44.15	peak	
4		6.6772	28.52	-4.09	24.43	69.54	-45.11	peak	
5		10.4582	28.63	-4.76	23.87	69.54	-45.67	peak	
6		13.5228	28.98	-4.82	24.16	69.54	-45.38	peak	

Test Mode	UNII-3_TX A MODE 5745 MHz	Azimuth Angle	90°
-----------	---------------------------	---------------	-----

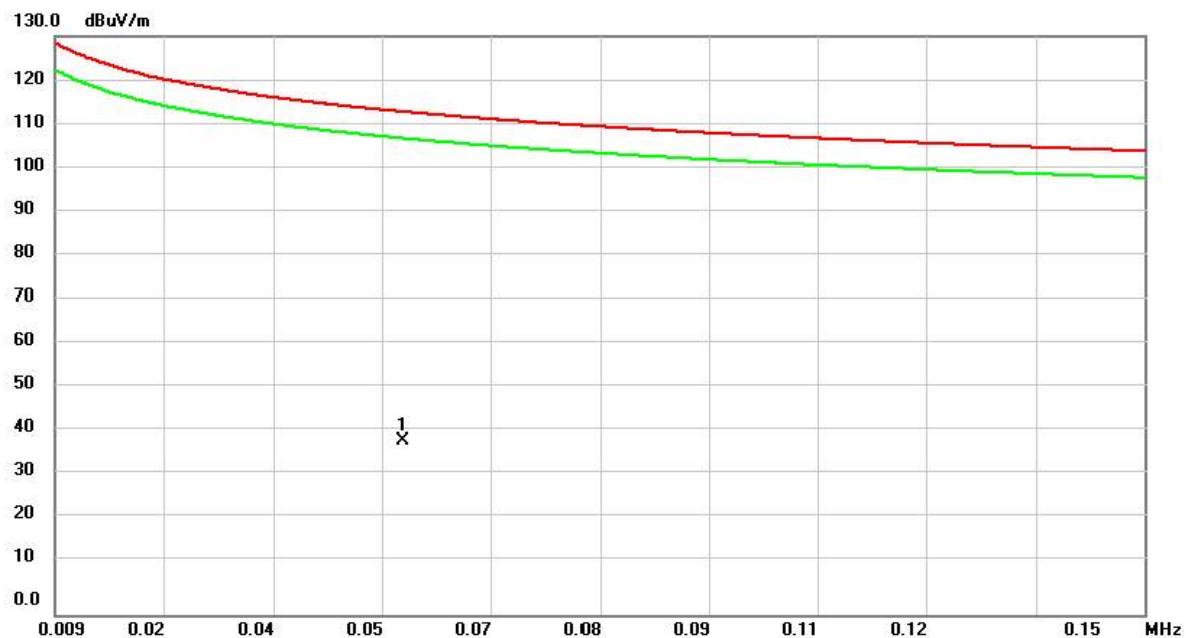


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0541	17.37	21.70	39.07	112.94	-73.87	peak	

Test Mode	UNII-3_TX A MODE 5745 MHz	Azimuth Angle	90°
-----------	---------------------------	---------------	-----



No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV/m	Limit dBuV/m	Over	
						Detector	Comment
1	0.5082	30.85	3.43	34.28	73.48	-39.20	peak
2 *	1.1450	28.71	-0.73	27.98	66.43	-38.45	peak
3	2.6176	28.62	-3.38	25.24	69.54	-44.30	peak
4	5.0453	28.36	-3.93	24.43	69.54	-45.11	peak
5	6.3588	29.84	-4.06	25.78	69.54	-43.76	peak
6	8.0304	29.96	-4.33	25.63	69.54	-43.91	peak

Test Mode	UNII-3_TX A MODE 5745 MHz	Azimuth Angle	0°
-----------	---------------------------	---------------	----

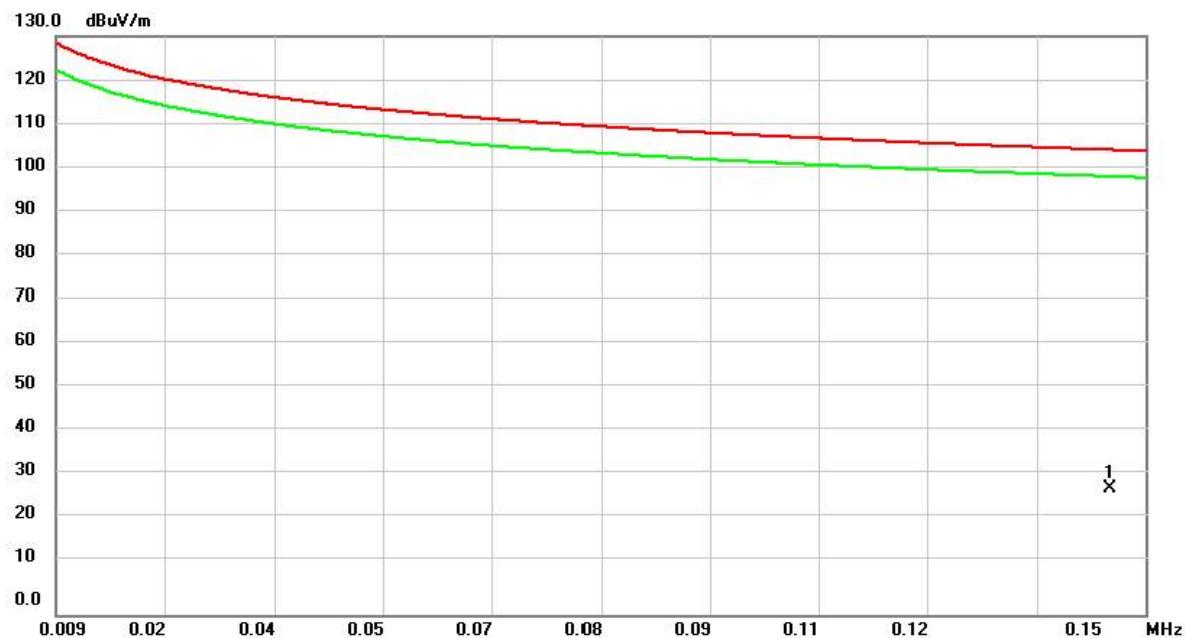

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.1454	15.02	13.45	28.47	104.35	-75.88	peak	


Test Mode	UNII-3_TX A MODE 5745 MHz	Azimuth Angle	0°
-----------	---------------------------	---------------	----



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		0.4187	30.30	4.60	34.90	95.17	-60.27	peak	
2 *		1.6126	29.93	-1.94	27.99	63.45	-35.46	peak	
3		4.6870	30.29	-3.89	26.40	69.54	-43.14	peak	
4		5.9111	30.30	-4.02	26.28	69.54	-43.26	peak	
5		10.4184	29.40	-4.75	24.65	69.54	-44.89	peak	
6		13.5228	28.98	-4.82	24.16	69.54	-45.38	peak	


APPENDIX C RADIATED EMISSIONS - 30 MHZ TO 1000 MHZ**CONTINUE ON NEXT PAGE**

Test Mode	UNII-1_TX AC (VHT80) MODE 5210 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

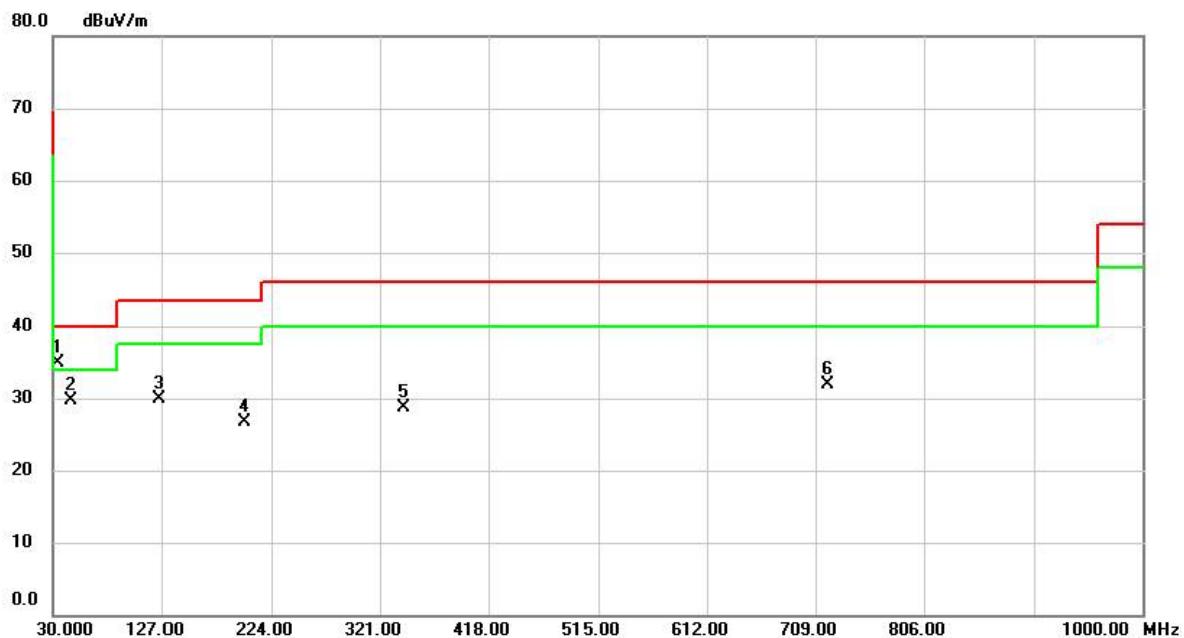


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1	*	33.8800	44.02	-9.02	35.00	40.00	-5.00		peak
2		45.5200	37.97	-8.20	29.77	40.00	-10.23		peak
3		125.0600	40.22	-10.31	29.91	43.50	-13.59		peak
4		199.7500	37.56	-10.90	26.66	43.50	-16.84		peak
5		342.3400	35.12	-6.39	28.73	46.00	-17.27		peak
6		719.6700	30.17	1.69	31.86	46.00	-14.14		peak

Test Mode	UNII-1_TX AC (VHT80) MODE 5210 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

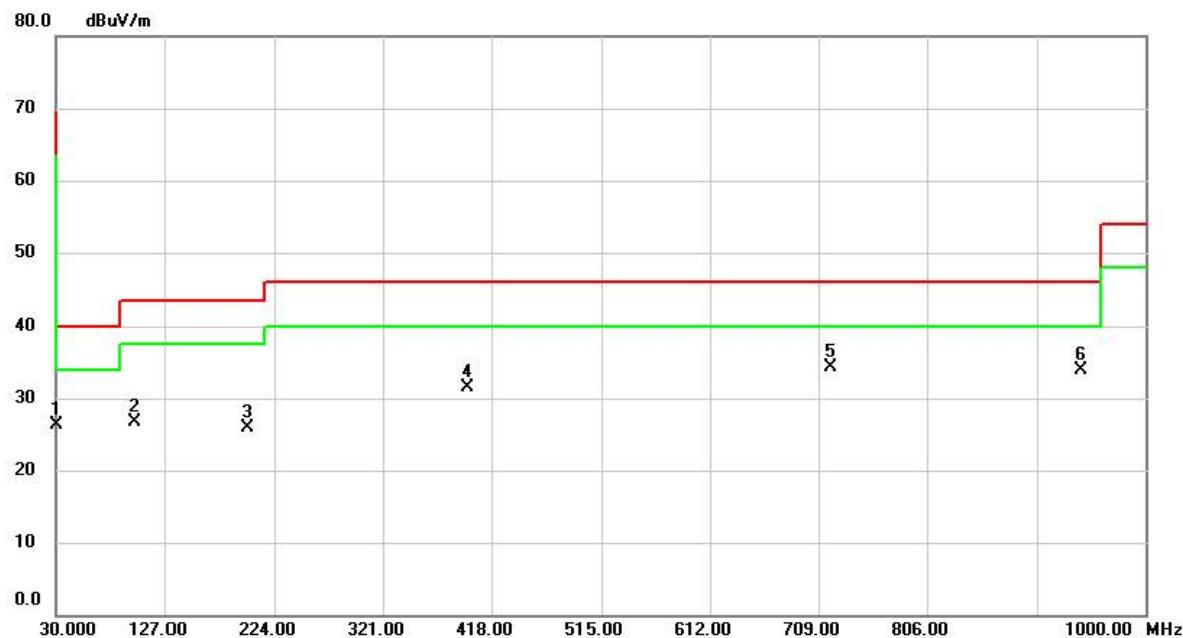


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		30.0000	35.37	-9.06	26.31	40.00	-13.69	peak	
2		99.8400	39.68	-12.92	26.76	43.50	-16.74	peak	
3		199.7500	36.76	-10.90	25.86	43.50	-17.64	peak	
4		396.6600	36.67	-5.15	31.52	46.00	-14.48	peak	
5	*	719.6700	32.58	1.69	34.27	46.00	-11.73	peak	
6		941.8000	28.18	5.66	33.84	46.00	-12.16	peak	

Test Mode	UNII-2A_TX AC (VHT80) MODE 5290 MHz	Polarization	Vertical
-----------	-------------------------------------	--------------	----------

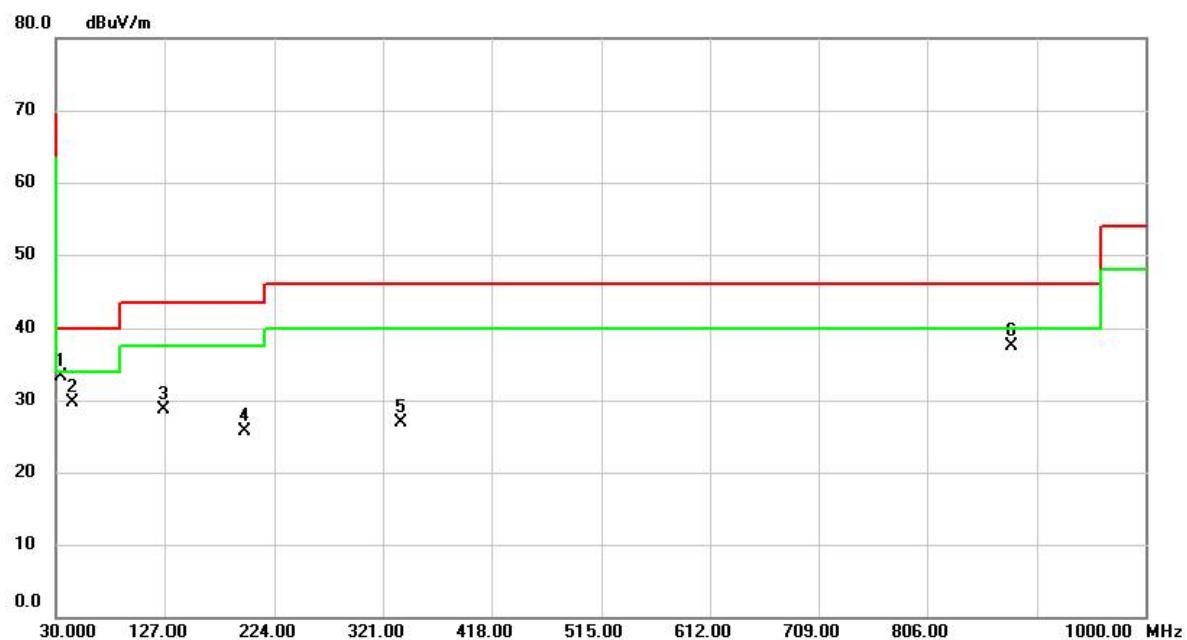


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1	*	33.9000	42.40	-9.02	33.38	40.00	-6.62	peak	
2		45.4800	37.92	-8.19	29.73	40.00	-10.27	peak	
3		125.7067	38.99	-10.25	28.74	43.50	-14.76	peak	
4		198.1333	36.50	-10.89	25.61	43.50	-17.89	peak	
5		337.8133	33.46	-6.52	26.94	46.00	-19.06	peak	
6		879.8000	32.91	4.58	37.49	46.00	-8.51	peak	

Test Mode	UNII-2A_TX AC (VHT80) MODE 5290 MHz	Polarization	Horizontal
-----------	-------------------------------------	--------------	------------

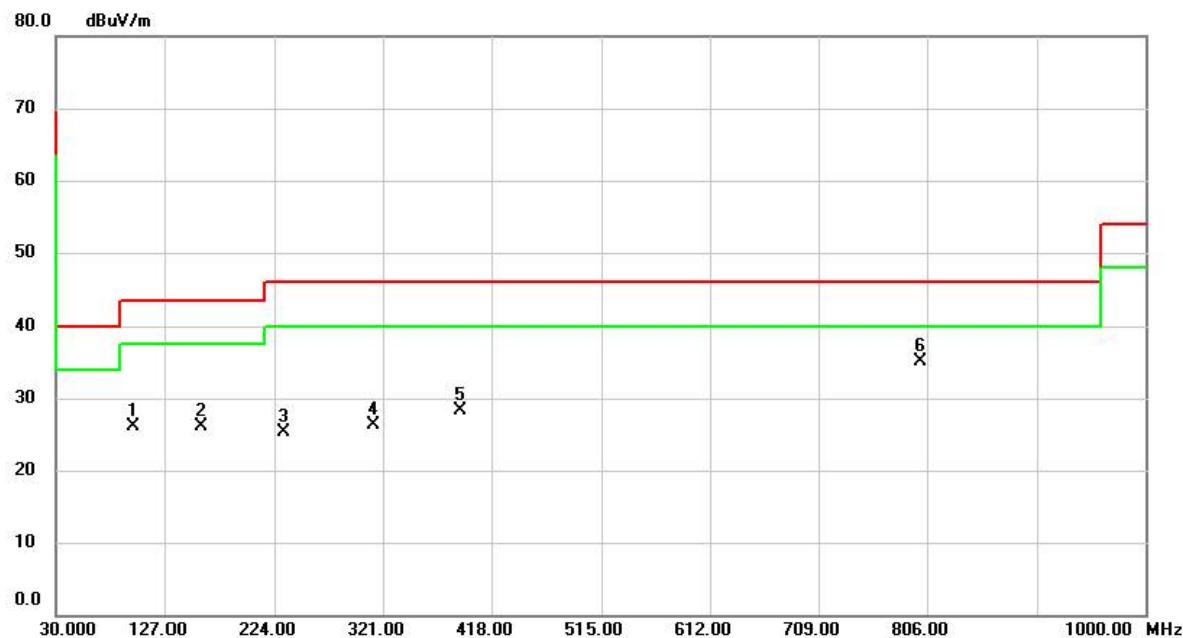


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		99.6400	39.01	-12.94	26.07	43.50	-17.43	peak	
2		158.7000	34.60	-8.55	26.05	43.50	-17.45	peak	
3		231.7600	34.82	-9.48	25.34	46.00	-20.66	peak	
4		312.2700	33.53	-7.18	26.35	46.00	-19.65	peak	
5		389.8700	33.69	-5.30	28.39	46.00	-17.61	peak	
6	*	800.2000	32.03	3.06	35.09	46.00	-10.91	peak	

Test Mode	UNII-2C_TX AC (VHT80) MODE 5530 MHz	Polarization	Vertical
-----------	-------------------------------------	--------------	----------

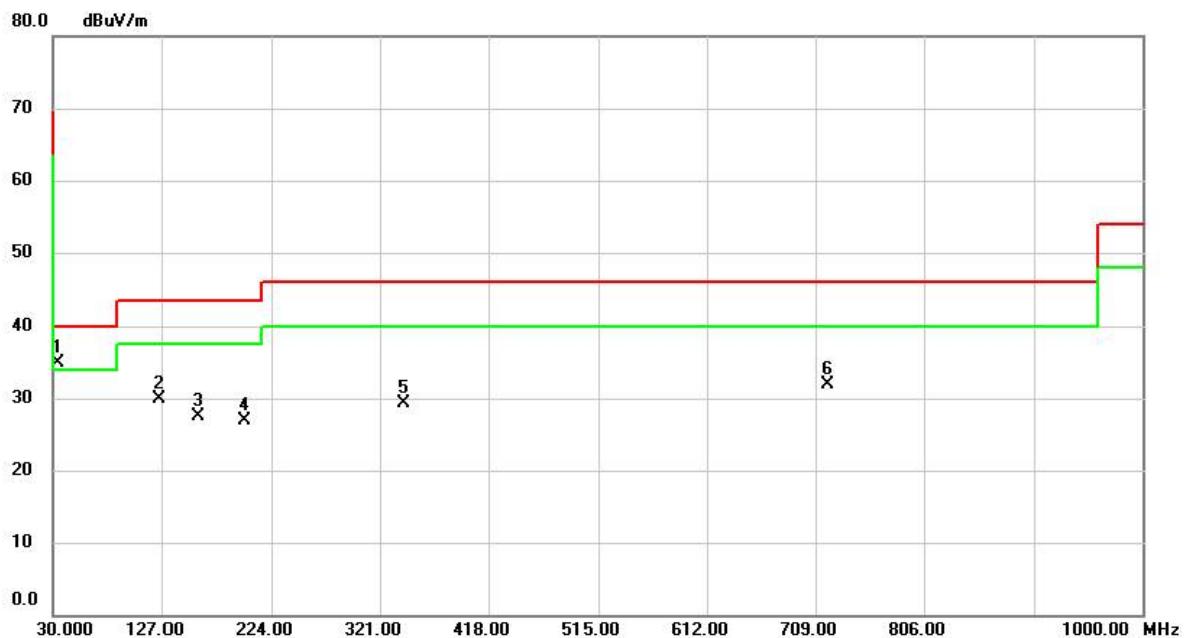


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1	*	33.9200	43.98	-9.02	34.96	40.00	-5.04	peak	
2		125.1000	40.21	-10.30	29.91	43.50	-13.59	peak	
3		158.0400	35.99	-8.55	27.44	43.50	-16.06	peak	
4		199.6500	37.76	-10.90	26.86	43.50	-16.64	peak	
5		342.3900	35.61	-6.39	29.22	46.00	-16.78	peak	
6		719.6600	30.13	1.69	31.82	46.00	-14.18	peak	

Test Mode	UNII-2C_TX AC (VHT80) MODE 5530 MHz	Polarization	Horizontal
-----------	-------------------------------------	--------------	------------

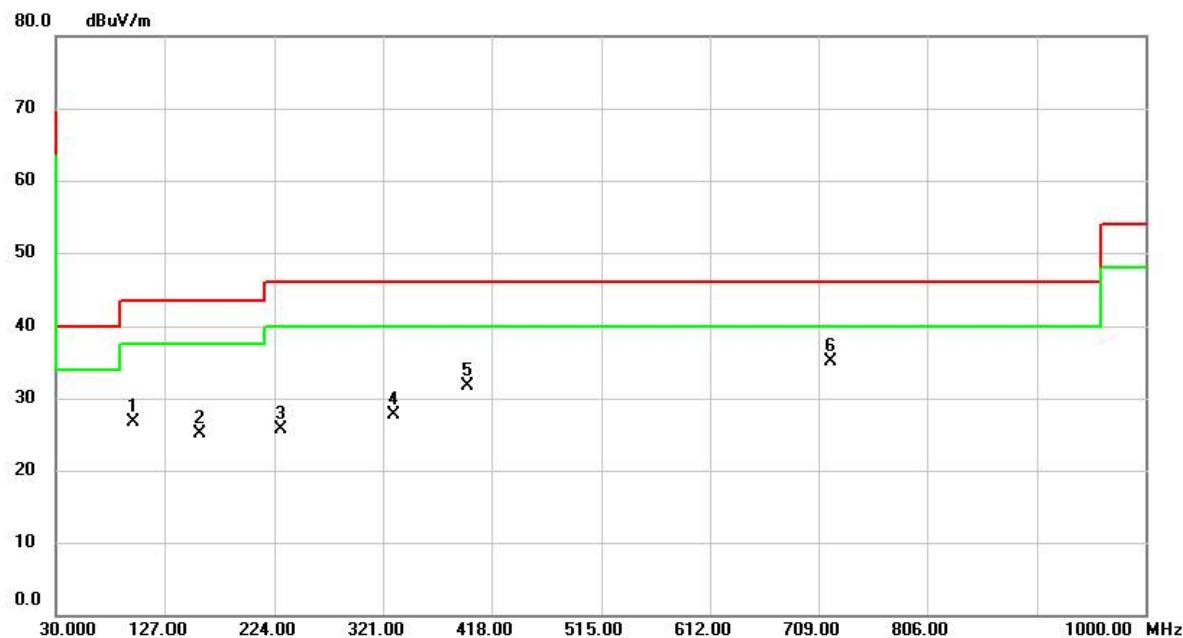


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		99.2600	39.73	-12.97	26.76	43.50	-16.74	peak	
2		157.0700	33.66	-8.57	25.09	43.50	-18.41	peak	
3		229.8200	35.34	-9.57	25.77	46.00	-20.23	peak	
4		330.7000	34.38	-6.71	27.67	46.00	-18.33	peak	
5		396.4900	36.96	-5.16	31.80	46.00	-14.20	peak	
6	*	719.6200	33.51	1.69	35.20	46.00	-10.80	peak	

Test Mode	UNII-3_TX A MODE 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

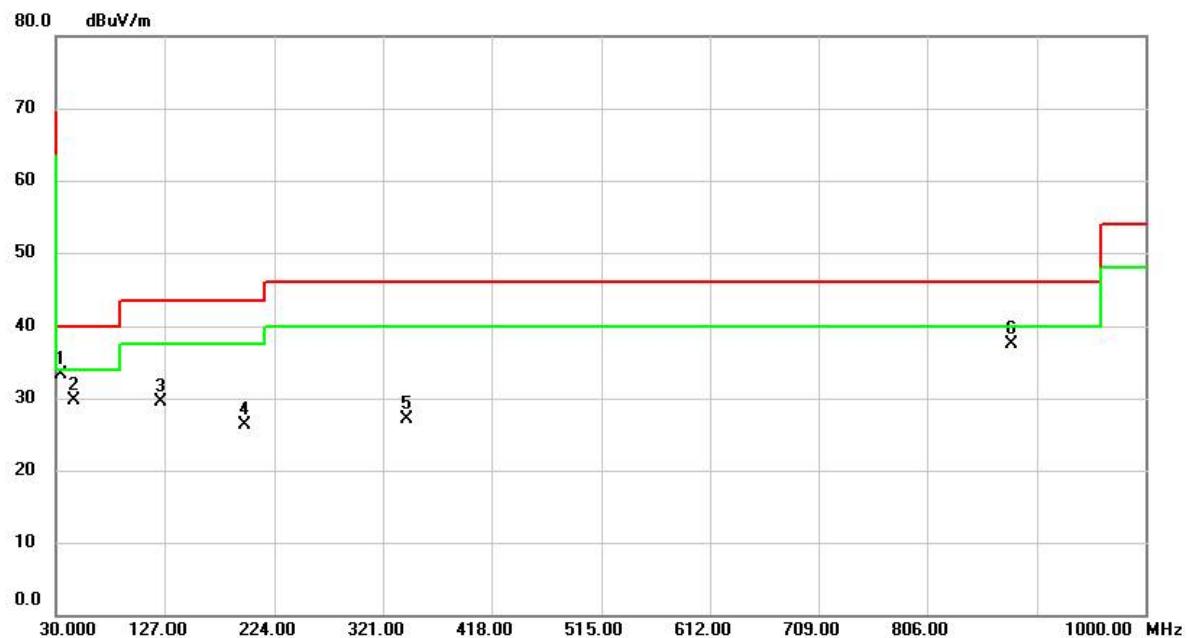

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV/m	Limit dBuV/m	dB	Detector	Comment
1	*	33.8800	42.38	-9.02	33.36	40.00	-6.64	peak	
2		45.5200	37.93	-8.20	29.73	40.00	-10.27	peak	
3		124.0900	39.85	-10.39	29.46	43.50	-14.04	peak	
4		196.8400	37.11	-10.88	26.23	43.50	-17.27	peak	
5		342.3400	33.53	-6.39	27.14	46.00	-18.86	peak	
6		879.7200	32.99	4.58	37.57	46.00	-8.43	peak	

Test Mode	UNII-3_TX A MODE 5745 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

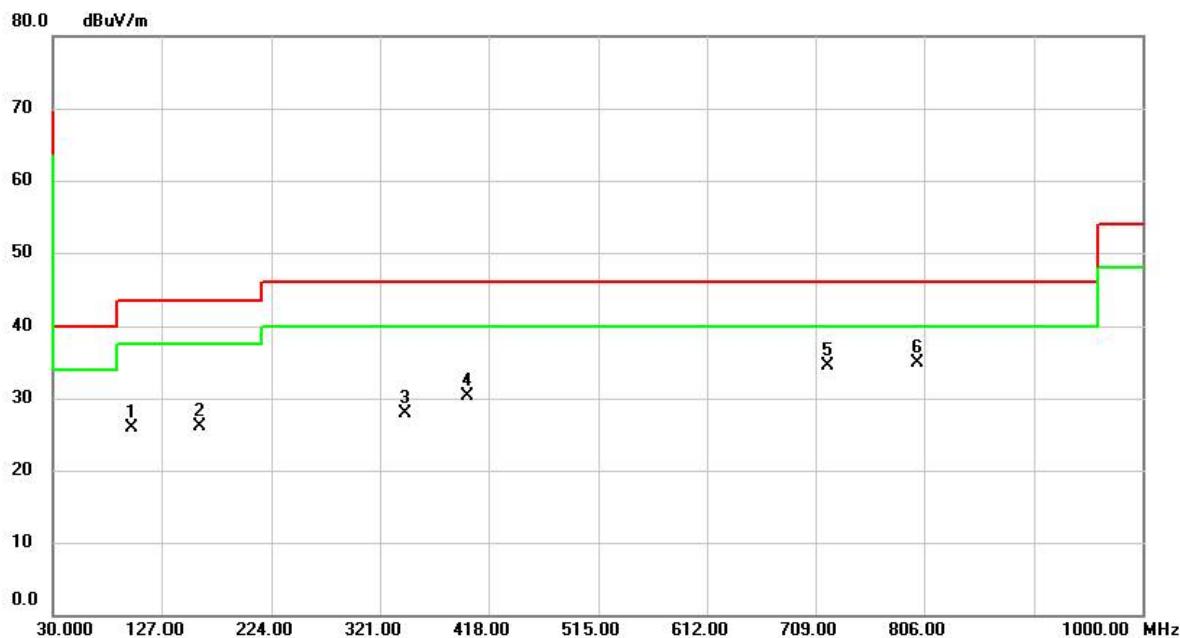


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		99.8400	38.86	-12.92	25.94	43.50	-17.56	peak	
2		159.9800	34.55	-8.54	26.01	43.50	-17.49	peak	
3		343.3100	34.26	-6.37	27.89	46.00	-18.11	peak	
4		399.5700	35.37	-5.08	30.29	46.00	-15.71	peak	
5		719.6700	32.72	1.69	34.41	46.00	-11.59	peak	
6	*	800.1800	31.91	3.06	34.97	46.00	-11.03	peak	

APPENDIX D RADIATED EMISSIONS - ABOVE 1000 MHZ**CONTINUE ON NEXT PAGE**


CDD Mode

Test Mode	UNII-1_TX A MODE 5180 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

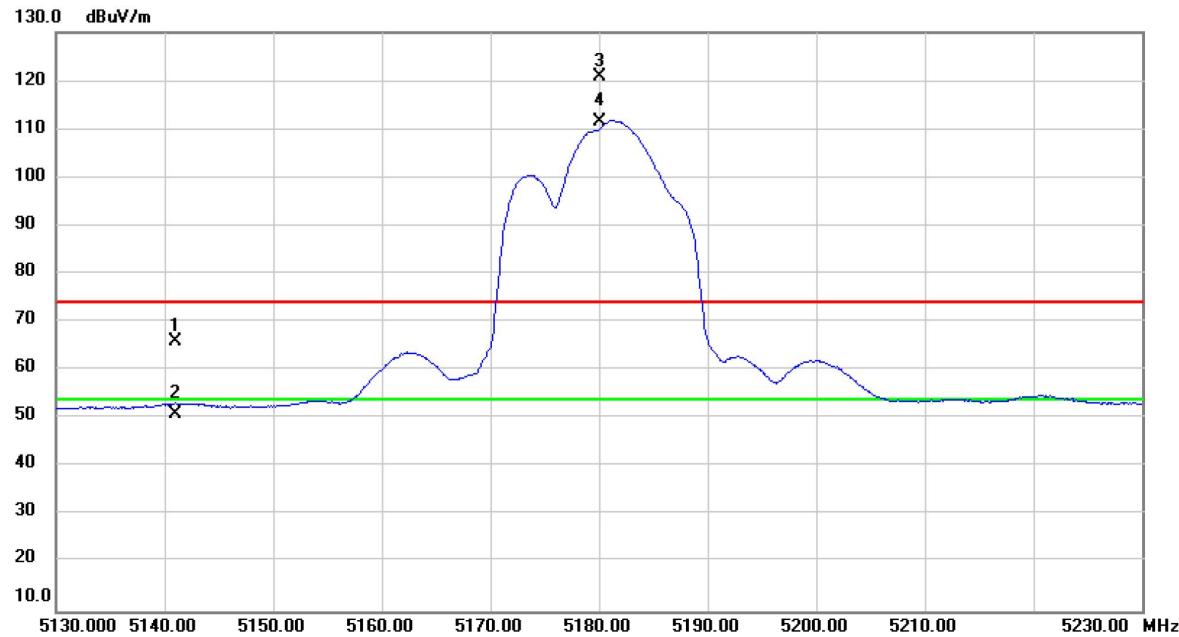


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over		
						Limit dB	Detector	Comment
1	5141.000	28.66	37.29	65.95	74.00	-8.05	peak	
2	5141.000	13.57	37.29	50.86	54.00	-3.14	AVG	
3 X	5180.000	83.51	37.34	120.85	74.00	46.85	peak	No Limit
4 *	5180.000	74.35	37.34	111.69	54.00	57.69	AVG	No Limit

Test Mode	UNII-1_TX A MODE 5180 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

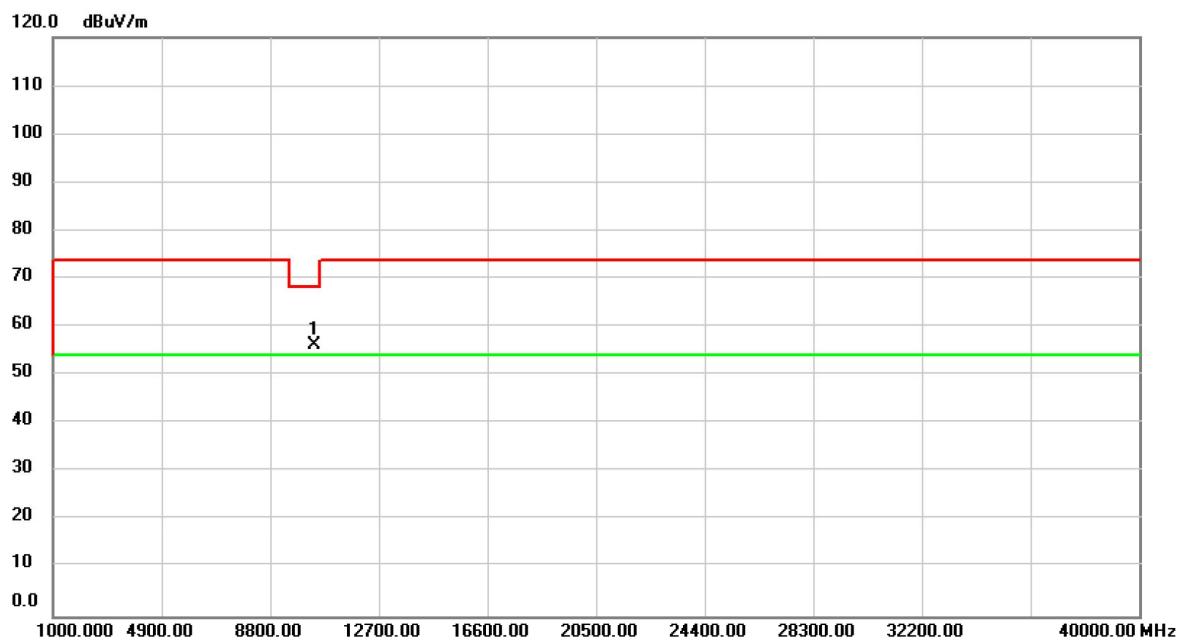


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	54.79	1.57	56.36	68.20	-11.84	peak	

Test Mode	UNII-1_TX A MODE 5180 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

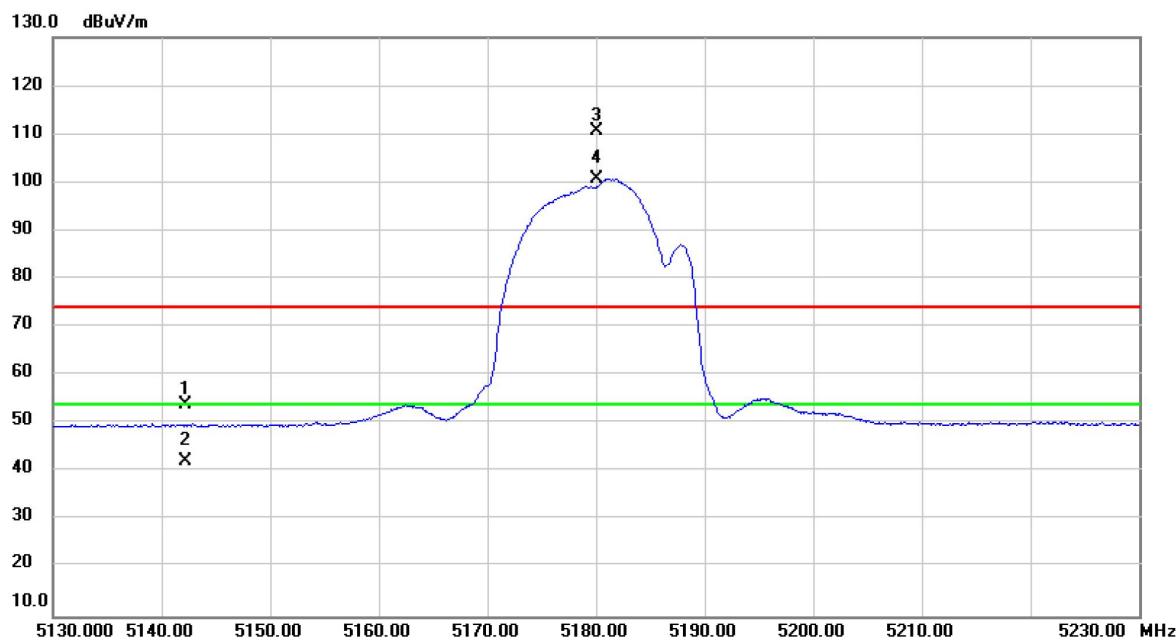

No. Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector	Comment
		dBuV	dB	dBuV/m	dBuV/m	dB		
1	5142.160	16.66	37.30	53.96	74.00	-20.04	peak	
2	5142.160	4.87	37.30	42.17	54.00	-11.83	AVG	
3 X	5180.000	73.17	37.34	110.51	74.00	36.51	peak	No Limit
4 *	5180.000	63.45	37.34	100.79	54.00	46.79	AVG	No Limit

Test Mode	UNII-1_TX A MODE 5180 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

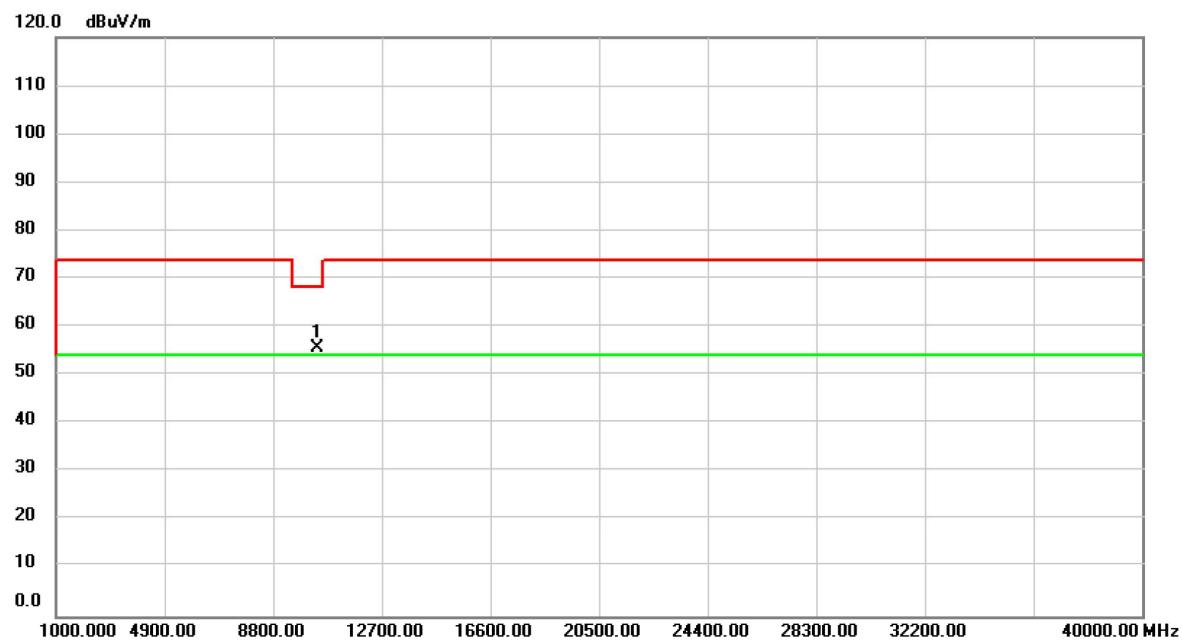

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	54.13	1.57	55.70	68.20	-12.50	peak	