



Appendix D

RF Test Data for 5.2G WIFI (Conducted Measurement)

Product Name: TABLET

Test Model: ELITE10QH

Environmental Conditions

Temperature:	21.1° C
Relative Humidity:	52.2%
ATM Pressure:	100.0 kPa
Test Engineer:	Jay Li
Supervised by:	Li Huan



D.1 Emission Bandwidth


Test Result

TestMode	Antenna	Channel	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	17.160	5171.400	5188.560	---	PASS
		5200	17.240	5191.440	5208.680	---	PASS
		5240	17.160	5231.400	5248.560	---	PASS
11N20SISO	Ant1	5180	18.480	5170.760	5189.240	---	PASS
		5200	18.520	5190.800	5209.320	---	PASS
		5240	18.440	5230.800	5249.240	---	PASS
11N40SISO	Ant1	5190	37.760	5171.120	5208.880	---	PASS
		5230	37.440	5211.200	5248.640	---	PASS
11AC20SISO	Ant1	5180	18.840	5170.480	5189.320	---	PASS
		5200	18.640	5190.640	5209.280	---	PASS
		5240	18.360	5230.800	5249.160	---	PASS
11AC40SISO	Ant1	5190	37.680	5171.040	5208.720	---	PASS
		5230	37.520	5211.280	5248.800	---	PASS
11AC80SISO	Ant1	5210	78.240	5170.960	5249.200	---	PASS




Test Graphs


11A_Ant1_5180

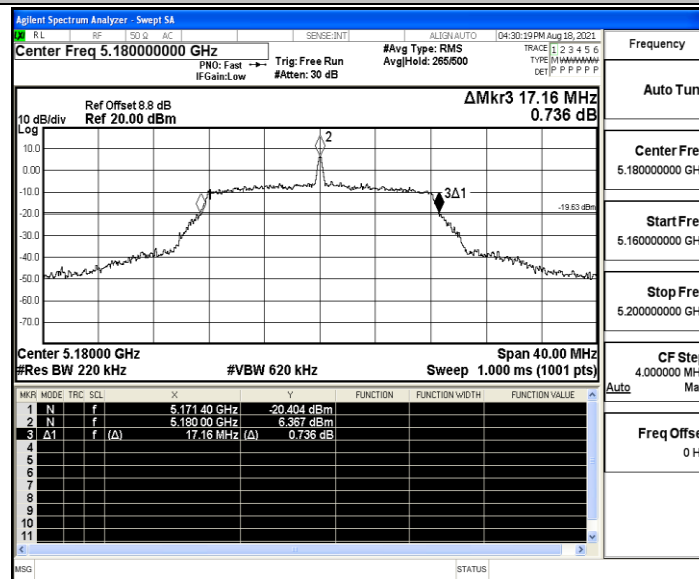


11A_Ant1_5200

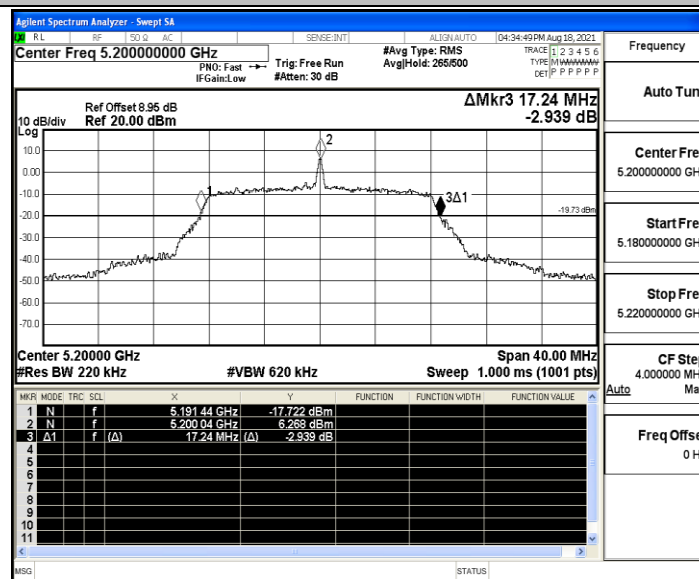


11A_Ant1_5240

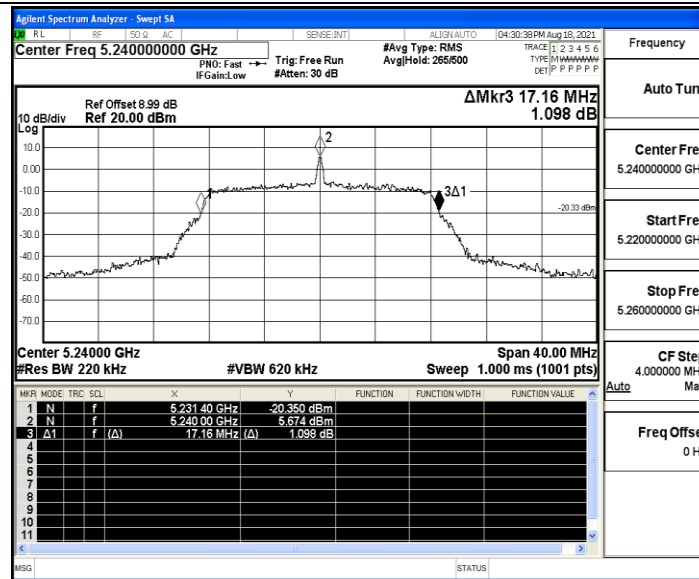

11N20SISO_Ant1_5180

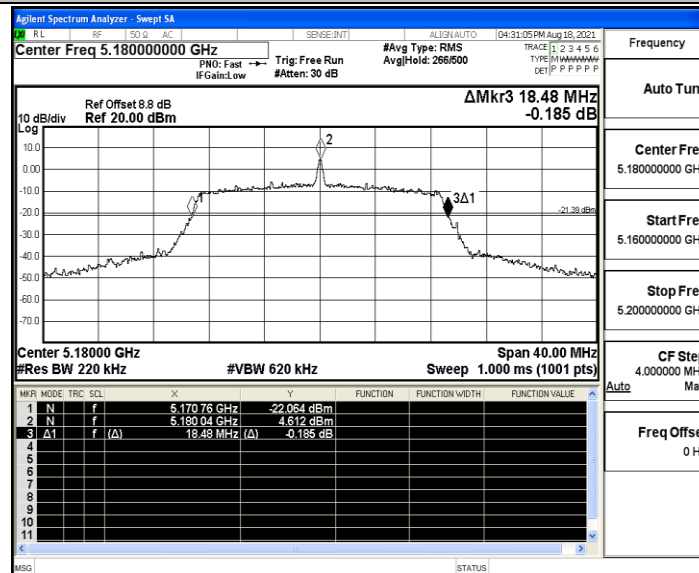


11N20SISO_Ant1_5200

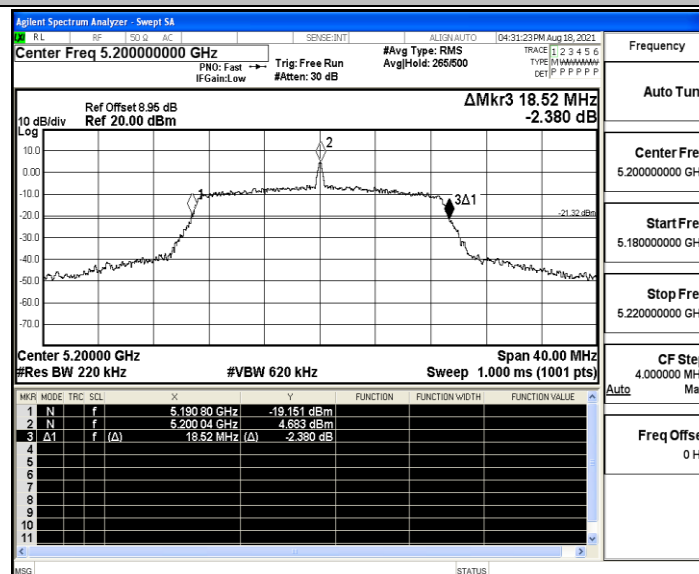





11N20SISO_Ant1_5240

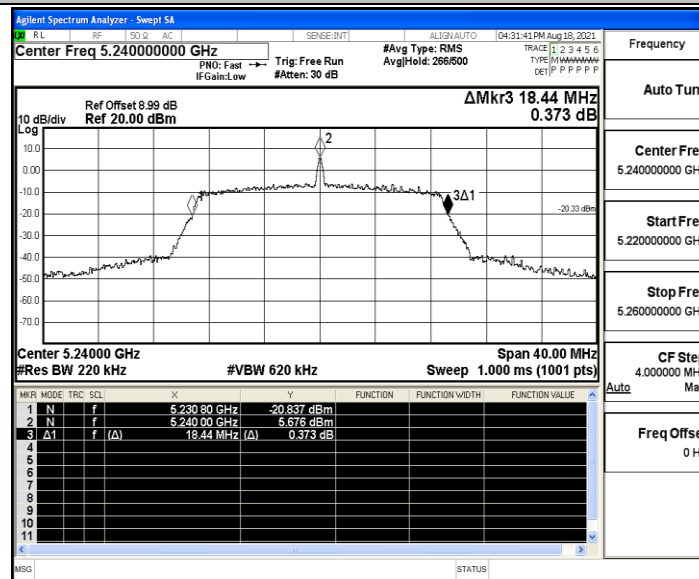


11N40SISO_Ant1_5190

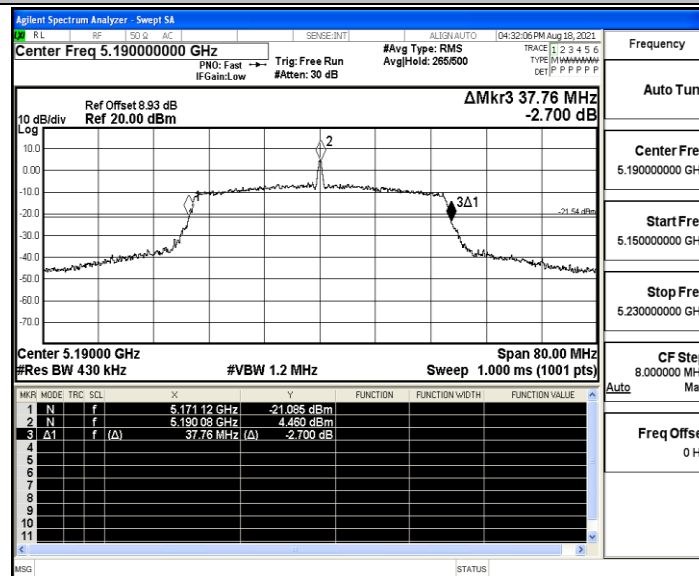


11N40SISO_Ant1_5230

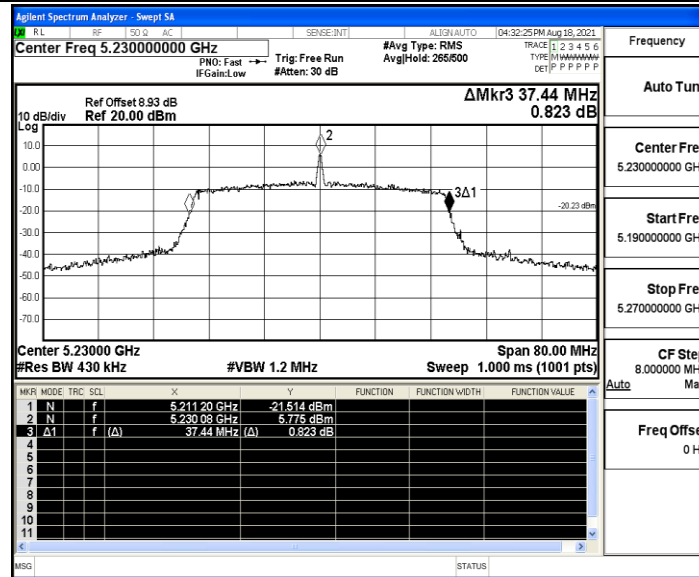

11AC20SISO_Ant1_5180

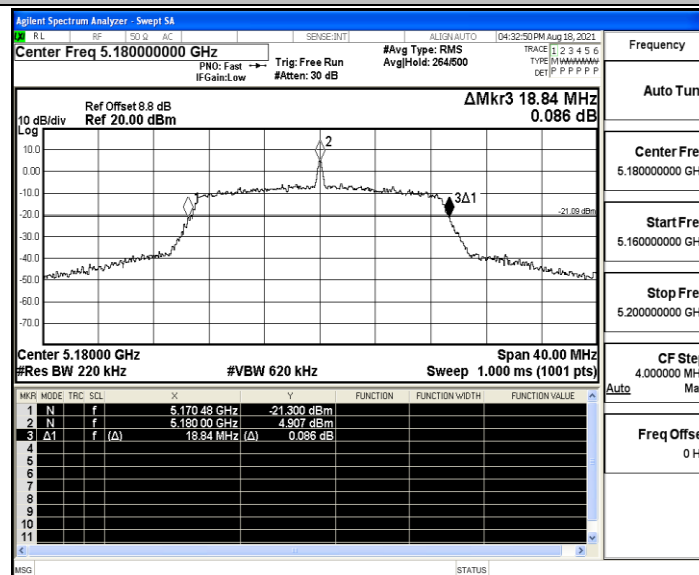


11AC20SISO_Ant1_5200

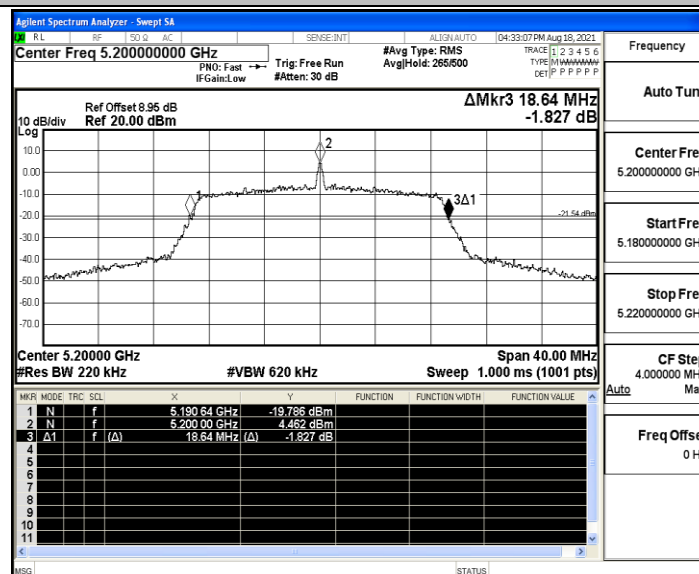





11AC20SISO_Ant1_5240

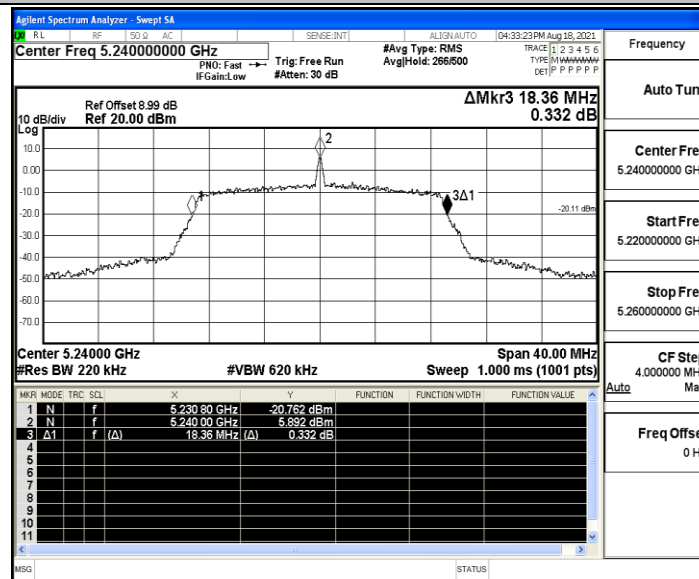


11AC40SISO_Ant1_5190

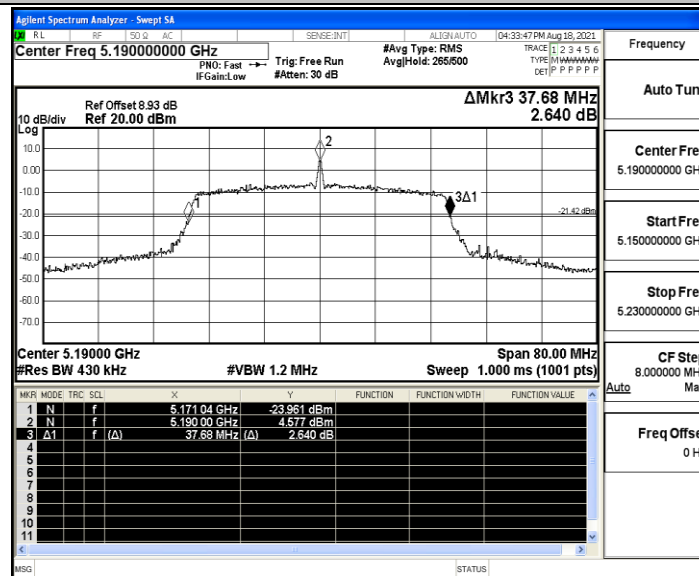

11AC40SISO_Ant1_5230

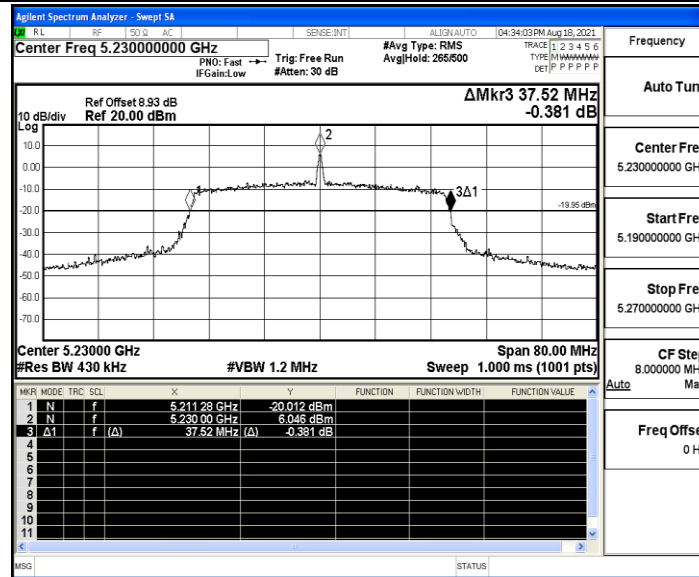

11AC80SISO_Ant1_5210

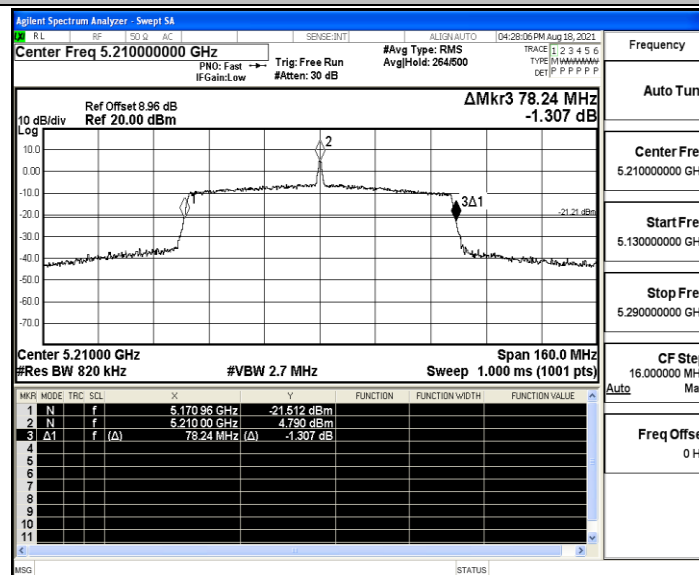



D.2 Maximum conducted output power

Test Result

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11A	Ant1	5180	7.57	≤ 23.98	PASS
		5200	7.71	≤ 23.98	PASS
		5240	7.75	≤ 23.98	PASS
11N20SISO	Ant1	5180	7.11	≤ 23.98	PASS
		5200	7.39	≤ 23.98	PASS
		5240	7.61	≤ 23.98	PASS
11N40SISO	Ant1	5190	7.54	≤ 23.98	PASS
		5230	7.49	≤ 23.98	PASS
11AC20SISO	Ant1	5180	7.79	≤ 23.98	PASS
		5200	7.25	≤ 23.98	PASS
		5240	7.98	≤ 23.98	PASS
11AC40SISO	Ant1	5190	6.50	≤ 23.98	PASS
		5230	7.51	≤ 23.98	PASS
11AC80SISO	Ant1	5210	7.63	≤ 23.98	PASS

Note: The Duty Cycle Factor is compensated in the graph.



D.3 Maximum power spectral density

Test Result

TestMode	Antenna	Channel	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11A	Ant1	5180	-2.55	≤ 11	PASS
		5200	-2.55	≤ 11	PASS
		5240	-2.02	≤ 11	PASS
11N20SISO	Ant1	5180	-3.33	≤ 11	PASS
		5200	-2.97	≤ 11	PASS
		5240	-2.78	≤ 11	PASS
11N40SISO	Ant1	5190	-5.79	≤ 11	PASS
		5230	-5.81	≤ 11	PASS
11AC20SISO	Ant1	5180	-2.5	≤ 11	PASS
		5200	-3.34	≤ 11	PASS
		5240	-2.15	≤ 11	PASS
11AC40SISO	Ant1	5190	-6.84	≤ 11	PASS
		5230	-5.86	≤ 11	PASS
11AC80SISO	Ant1	5210	-9.01	≤ 11	PASS


Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.

2.The Duty Cycle Factor and RBW Factor is compensated in the graph.




Test Graphs


11A_Ant1_5180

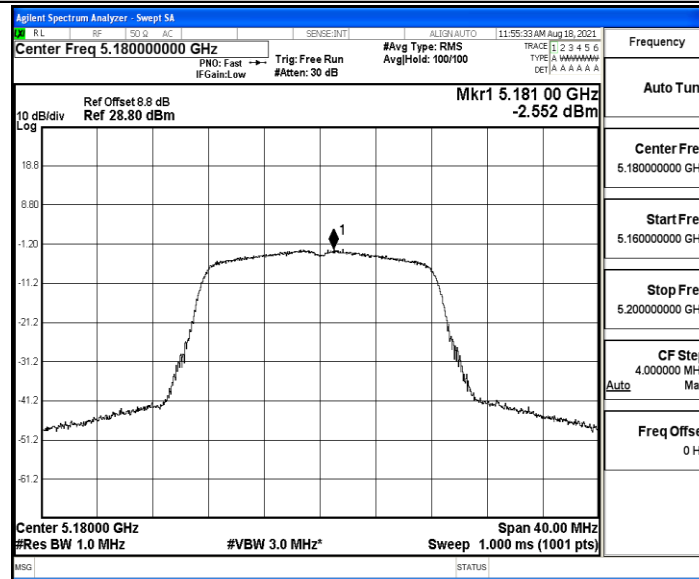


11A_Ant1_5200

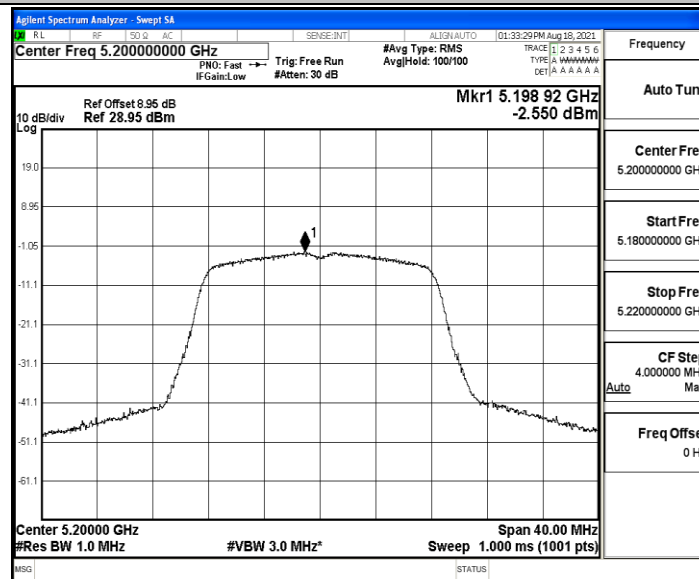


11A_Ant1_5240

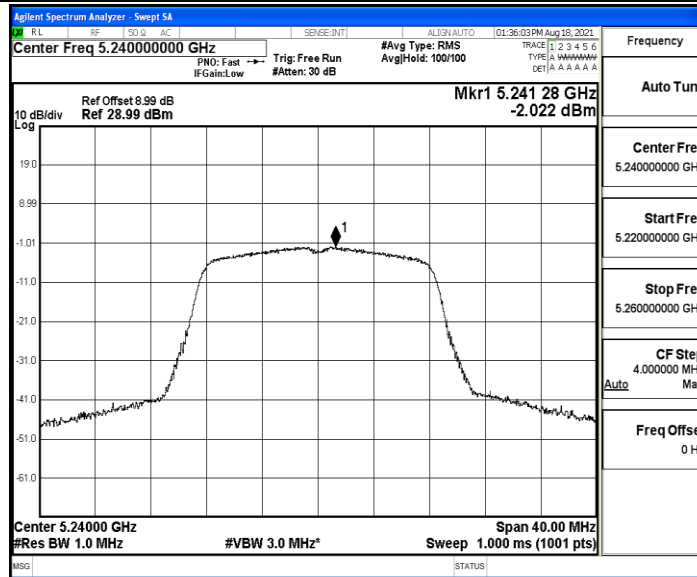

11N20SISO_Ant1_5180

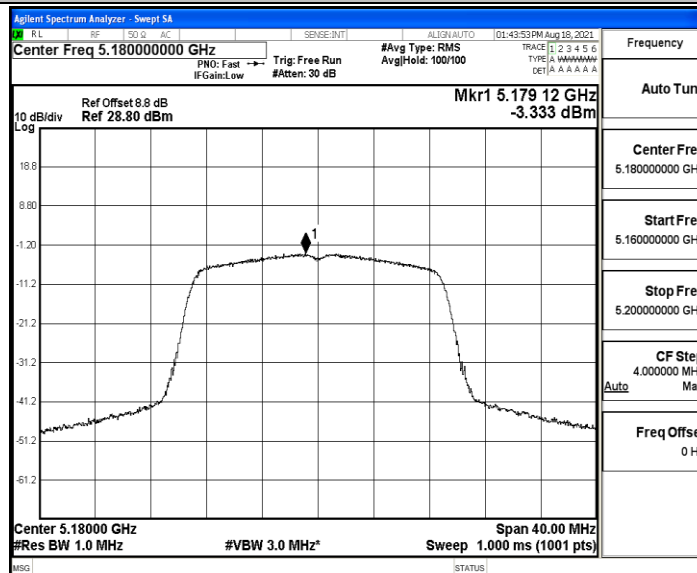


11N20SISO_Ant1_5200

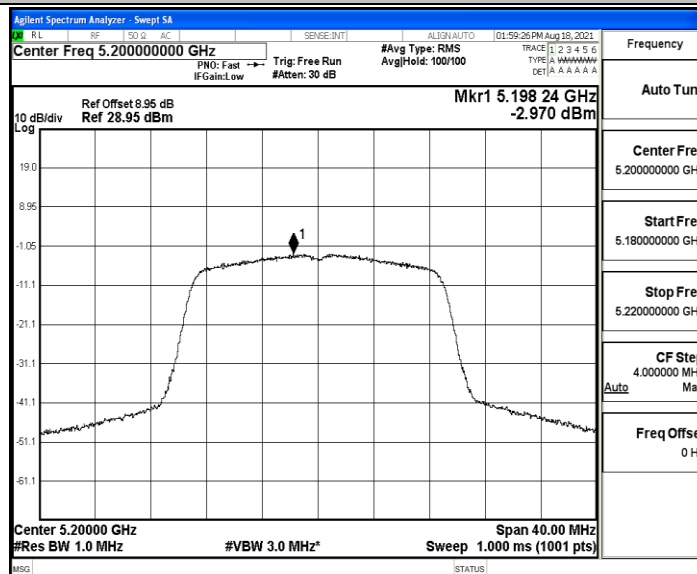





11N20SISO_Ant1_5240

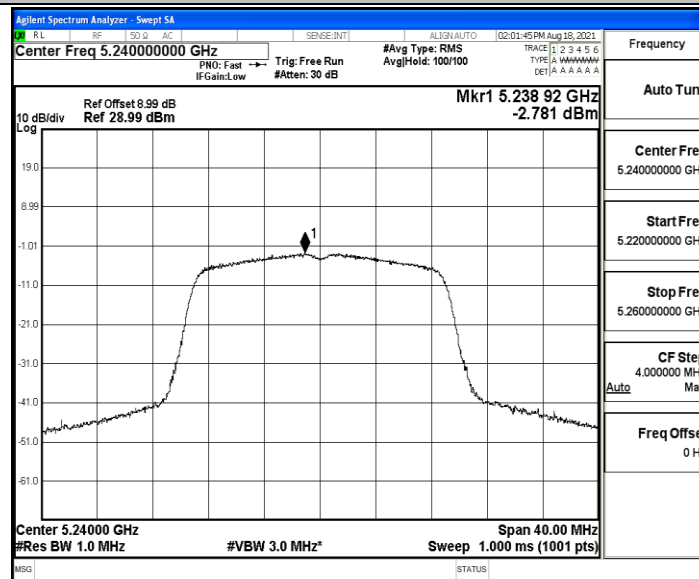


11N40SISO_Ant1_5190

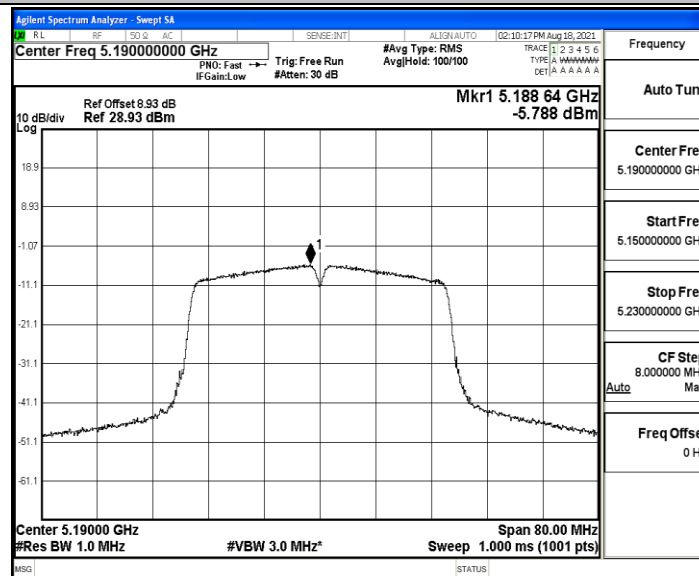


11N40SISO_Ant1_5230

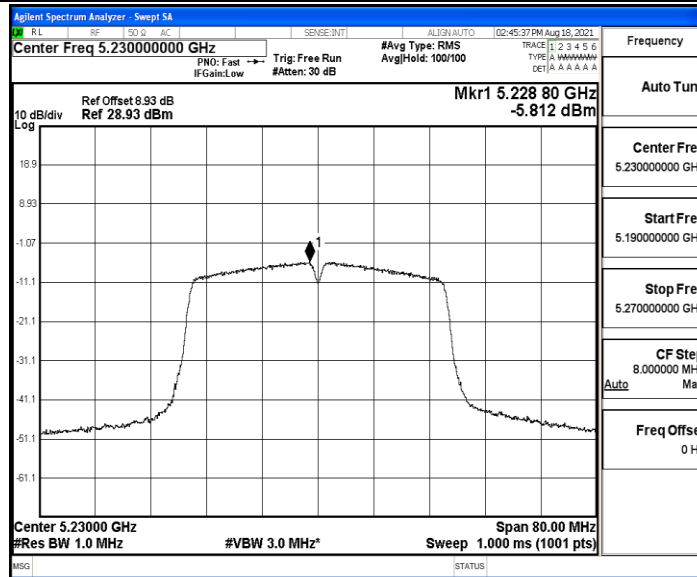

11AC20SISO_Ant1_5180

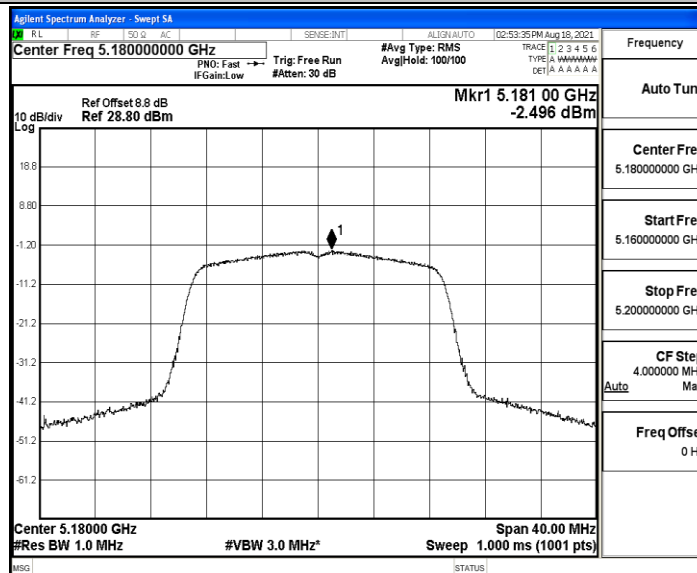


11AC20SISO_Ant1_5200

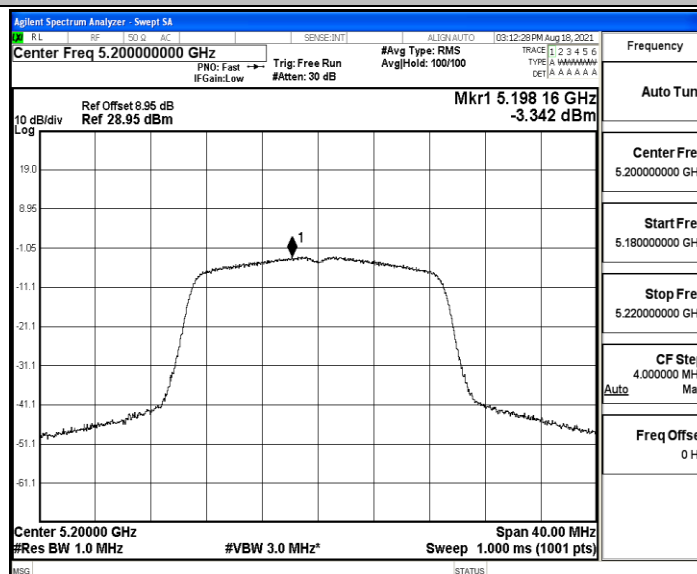





11AC20SISO_Ant1_5240

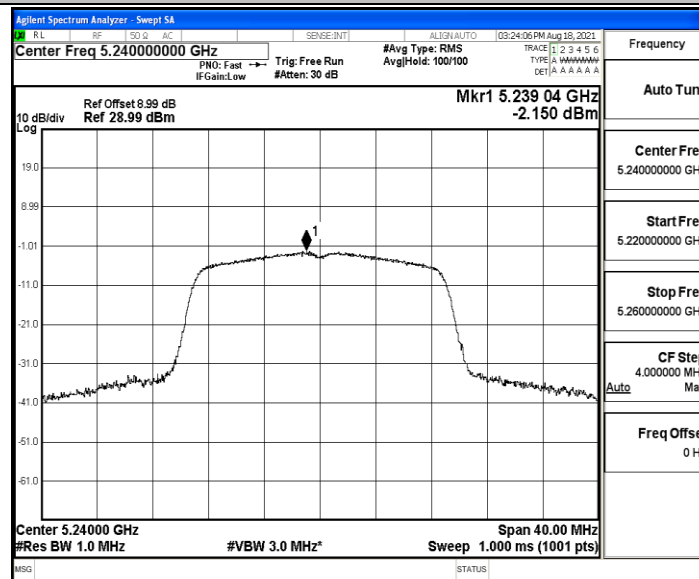


11AC40SISO_Ant1_5190

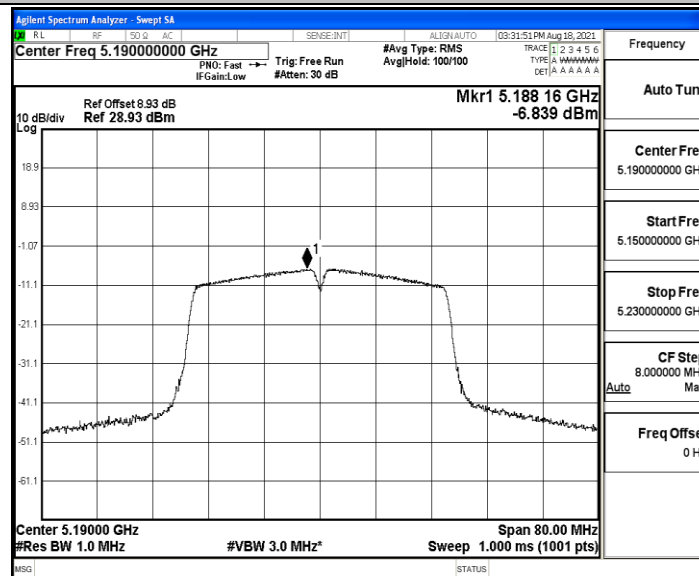

11AC40SISO_Ant1_5230

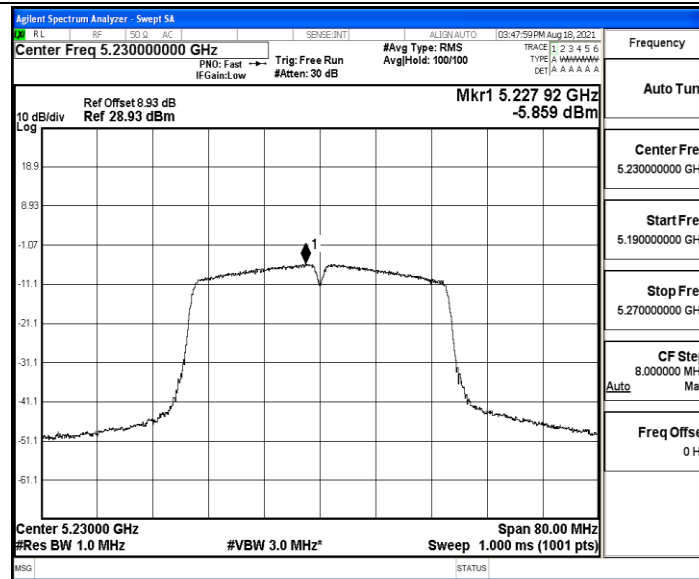

11AC80SISO_Ant1_5210

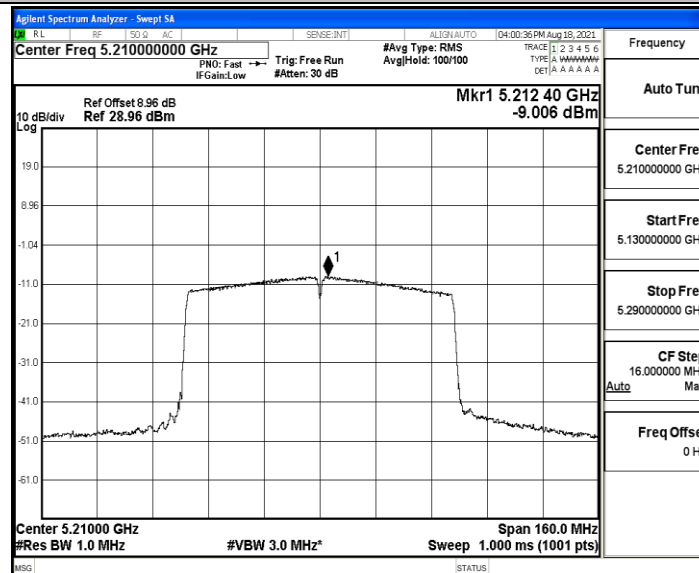



D.4 Emissions in Restricted Bands

Test Result

TestMode	Antenna	ChName	Channel	Detector	Freq. [MHz]	Result [dBm]	Limit [dBm]	Result [dBuV/m]	Limit [dBuV/m]	Verdict
11A	Ant1	Low	5180	AV	4500.000	-49.9	≤-41.20	45.30	≤54	PASS
				AV	5149.600	-47.44	≤-41.20	47.76	≤54	PASS
				AV	5150.000	-47.42	≤-41.20	47.78	≤54	PASS
				Peak	4500.000	-44.49	≤-21.20	50.71	≤68.2	PASS
				Peak	5134.900	-36.39	≤-21.20	58.81	≤68.2	PASS
				Peak	5150.000	-40.26	≤-21.20	54.94	≤68.2	PASS
		High	5240	AV	5350.000	-48.33	≤-41.20	46.87	≤54	PASS
				AV	5361.840	-48.29	≤-41.20	46.91	≤54	PASS
				AV	5460.000	-48.43	≤-41.20	46.77	≤54	PASS
				Peak	5350.000	-42.58	≤-21.20	52.62	≤68.2	PASS
				Peak	5400.480	-39.27	≤-21.20	55.93	≤68.2	PASS
				Peak	5460.000	-41.43	≤-21.20	53.77	≤68.2	PASS
11N20SIS O	Ant1	Low	5180	AV	4500.000	-49.9	≤-41.20	45.30	≤54	PASS
				AV	5149.600	-47.48	≤-41.20	47.72	≤54	PASS
				AV	5150.000	-47.47	≤-41.20	47.73	≤54	PASS
				Peak	4500.000	-43.66	≤-21.20	51.54	≤68.2	PASS
				Peak	5130.000	-37.89	≤-21.20	57.31	≤68.2	PASS
				Peak	5150.000	-41.72	≤-21.20	53.48	≤68.2	PASS
		High	5240	AV	5350.000	-48.38	≤-41.20	46.82	≤54	PASS
				AV	5355.120	-48.34	≤-41.20	46.86	≤54	PASS
				AV	5460.000	-48.5	≤-41.20	46.70	≤54	PASS
				Peak	5350.000	-41.89	≤-21.20	53.31	≤68.2	PASS
				Peak	5353.200	-39.68	≤-21.20	55.52	≤68.2	PASS
				Peak	5460.000	-44.3	≤-21.20	50.90	≤68.2	PASS
11N40SIS O	Ant1	Low	5190	AV	4500.000	-49.89	≤-41.20	45.31	≤54	PASS
				AV	5149.600	-46.56	≤-41.20	48.64	≤54	PASS
				AV	5150.000	-46.47	≤-41.20	48.73	≤54	PASS
				Peak	4500.000	-44.08	≤-21.20	51.12	≤68.2	PASS
				Peak	5007.500	-37.93	≤-21.20	57.27	≤68.2	PASS
				Peak	5150.000	-41.86	≤-21.20	53.34	≤68.2	PASS
		High	5230	AV	5350.000	-48.08	≤-41.20	47.12	≤54	PASS
				AV	5357.560	-48.06	≤-41.20	47.14	≤54	PASS
				AV	5460.000	-48.23	≤-41.20	46.97	≤54	PASS
				Peak	5350.000	-42.82	≤-21.20	52.38	≤68.2	PASS
				Peak	5380.700	-38.69	≤-21.20	56.51	≤68.2	PASS
				Peak	5460.000	-45.81	≤-21.20	49.39	≤68.2	PASS



11AC20SI SO	Ant1	Low	5180	AV	4500.000	-50.08	≤ -41.20	45.12	≤ 54	PASS
				AV	5149.600	-47.39	≤ -41.20	47.81	≤ 54	PASS
				AV	5150.000	-47.36	≤ -41.20	47.84	≤ 54	PASS
				Peak	4500.000	-44.61	≤ -21.20	50.59	≤ 68.2	PASS
				Peak	5143.300	-37.66	≤ -21.20	57.54	≤ 68.2	PASS
				Peak	5150.000	-43.7	≤ -21.20	51.50	≤ 68.2	PASS
		High	5240	AV	5350.000	-48.49	≤ -41.20	46.71	≤ 54	PASS
				AV	5406.000	-48.43	≤ -41.20	46.77	≤ 54	PASS
				AV	5460.000	-48.57	≤ -41.20	46.63	≤ 54	PASS
				Peak	5350.000	-42.15	≤ -21.20	53.05	≤ 68.2	PASS
				Peak	5447.520	-38.46	≤ -21.20	56.74	≤ 68.2	PASS
				Peak	5460.000	-42.72	≤ -21.20	52.48	≤ 68.2	PASS
11AC40SI SO	Ant1	Low	5190	AV	4500.000	-49.82	≤ -41.20	45.38	≤ 54	PASS
				AV	5149.600	-45.51	≤ -41.20	49.69	≤ 54	PASS
				AV	5150.000	-45.39	≤ -41.20	49.81	≤ 54	PASS
				Peak	4500.000	-43.11	≤ -21.20	52.09	≤ 68.2	PASS
				Peak	5144.700	-37	≤ -21.20	58.20	≤ 68.2	PASS
				Peak	5150.000	-37.84	≤ -21.20	57.36	≤ 68.2	PASS
		High	5230	AV	5350.000	-48.47	≤ -41.20	46.73	≤ 54	PASS
				AV	5365.620	-48.44	≤ -41.20	46.76	≤ 54	PASS
				AV	5460.000	-48.59	≤ -41.20	46.61	≤ 54	PASS
				Peak	5350.000	-44.31	≤ -21.20	50.89	≤ 68.2	PASS
				Peak	5386.160	-38.95	≤ -21.20	56.25	≤ 68.2	PASS
				Peak	5460.000	-43.37	≤ -21.20	51.83	≤ 68.2	PASS
11AC80SI SO	Ant1	Low	5210	AV	4500.000	-49.78	≤ -41.20	45.42	≤ 54	PASS
				AV	5149.500	-45.54	≤ -41.20	49.66	≤ 54	PASS
				AV	5150.000	-45.54	≤ -41.20	49.66	≤ 54	PASS
				Peak	4500.000	-43.84	≤ -21.20	51.36	≤ 68.2	PASS
				Peak	5135.250	-36.6	≤ -21.20	58.60	≤ 68.2	PASS
				Peak	5150.000	-37.48	≤ -21.20	57.72	≤ 68.2	PASS
		High	5210	AV	5350.000	-48.42	≤ -41.20	46.78	≤ 54	PASS
				AV	5358.360	-48.39	≤ -41.20	46.81	≤ 54	PASS
				AV	5460.000	-48.54	≤ -41.20	46.66	≤ 54	PASS
				Peak	5350.000	-41.39	≤ -21.20	53.81	≤ 68.2	PASS
				Peak	5367.600	-38.07	≤ -21.20	57.13	≤ 68.2	PASS
				Peak	5460.000	-44.45	≤ -21.20	50.75	≤ 68.2	PASS


Note:

1. The Antenna Gain is compensated in the graph.
2. For transmitters operating in 5150-5350 GHz band and 5470-5725 GHz band: The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.




Test Graphs


11A_Ant1_Low_5180_AV

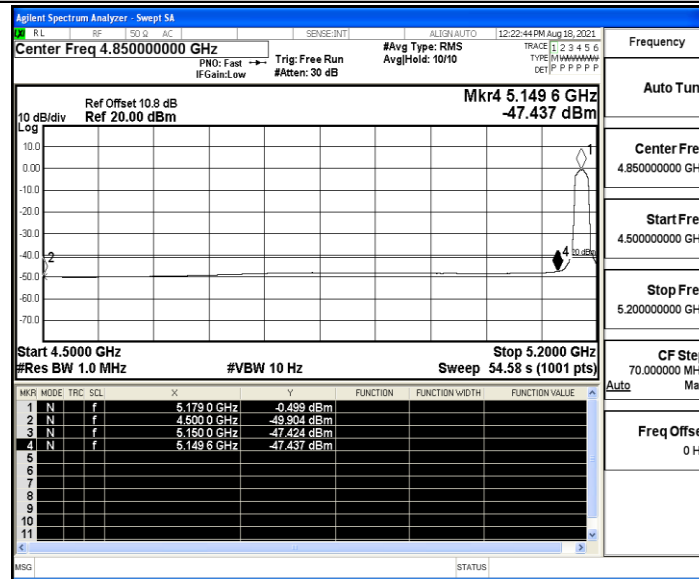


11A_Ant1_Low_5180_Peak

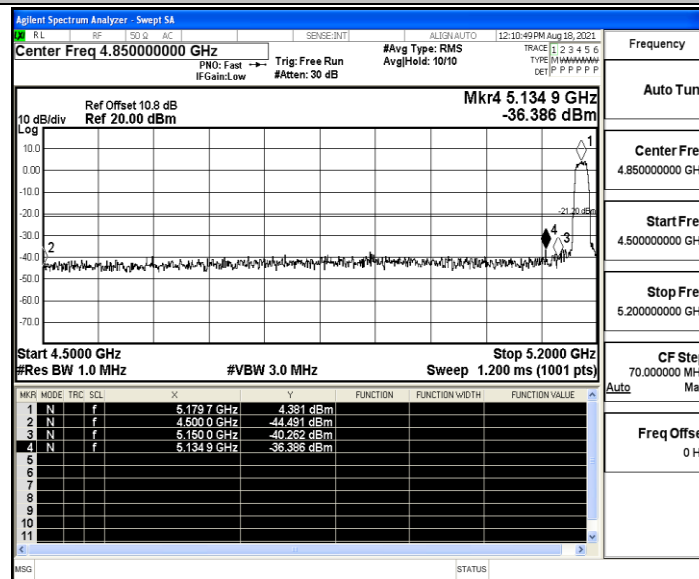


11A_Ant1_High_5240_AV

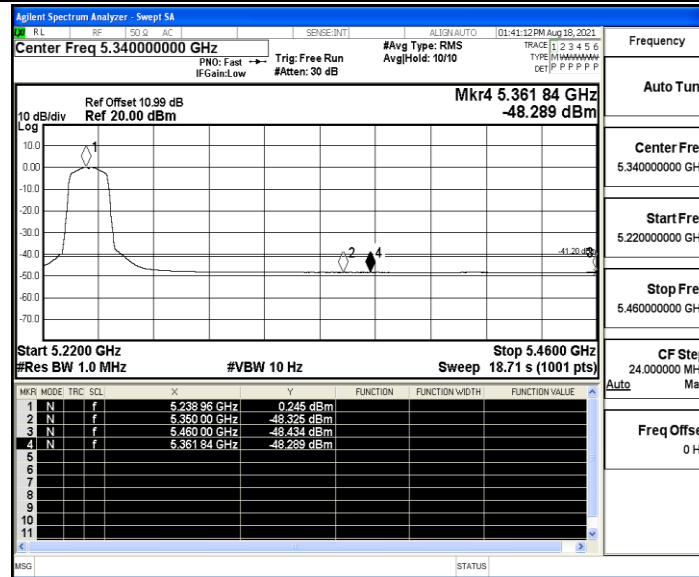

11A_Ant1_High_5240_Peak

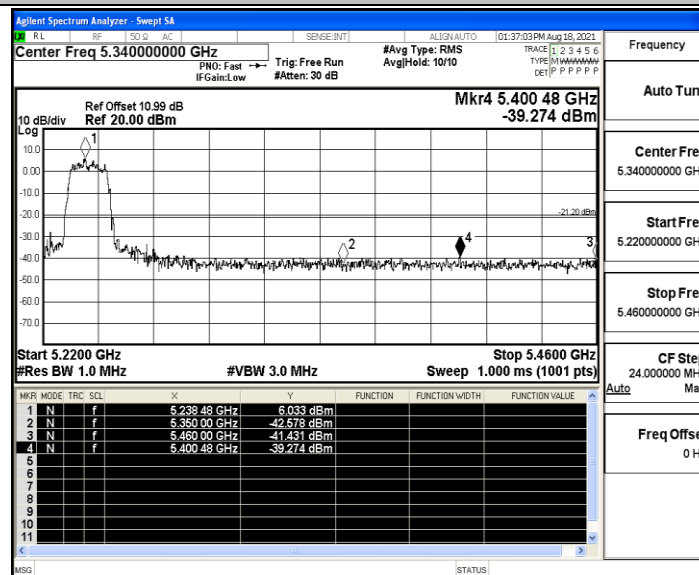


11N20SISO_Ant1_Low_5180_AV

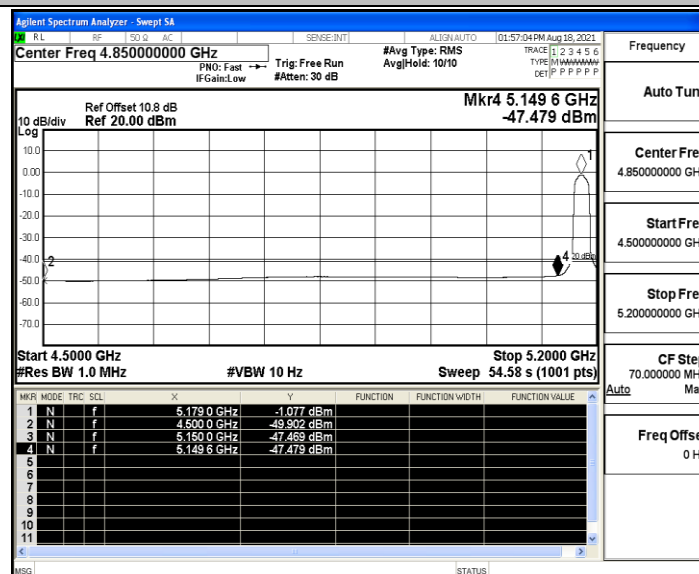





11N20SISO_Ant1_Low_5180_Peak

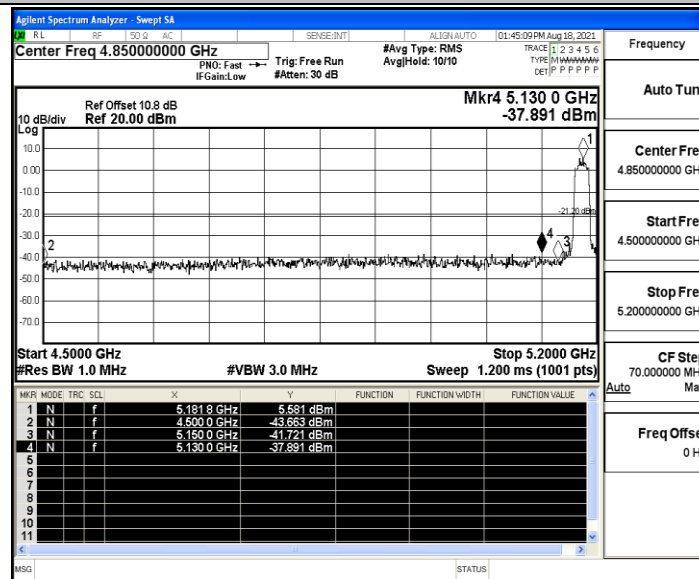


11N20SISO_Ant1_High_5240_AV

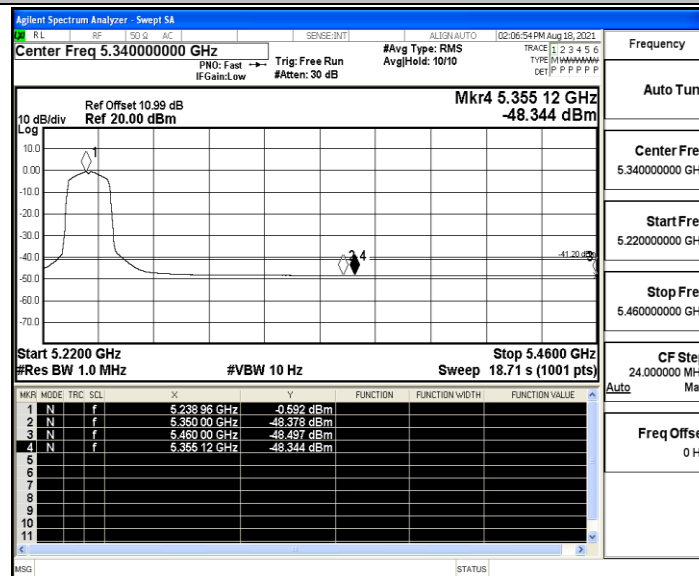


11N20SISO_Ant1_High_5240_Peak

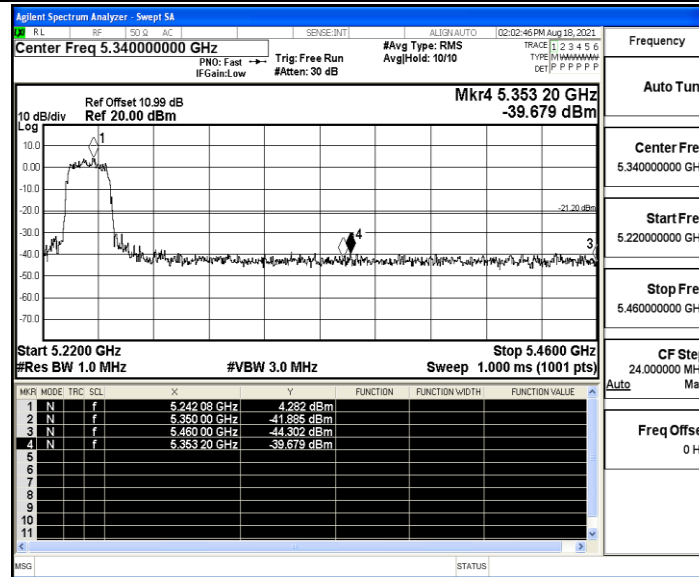

11N40SISO_Ant1_Low_5190_AV

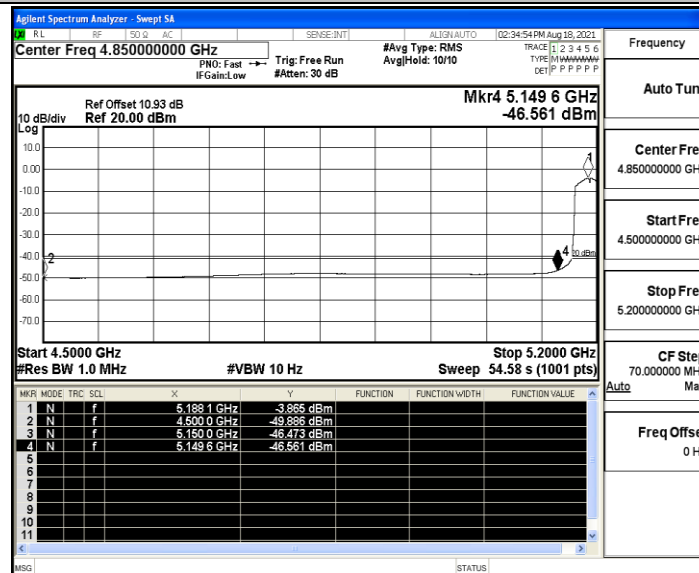


11N40SISO_Ant1_Low_5190_Peak

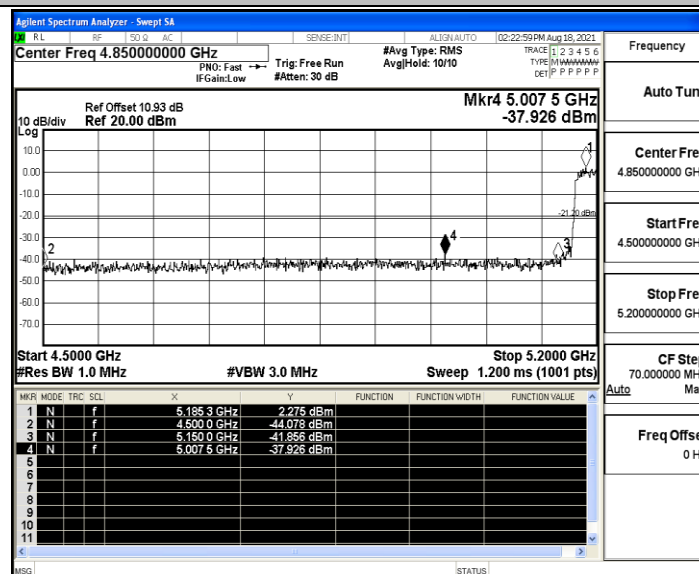





11N40SISO_Ant1_High_5230_AV

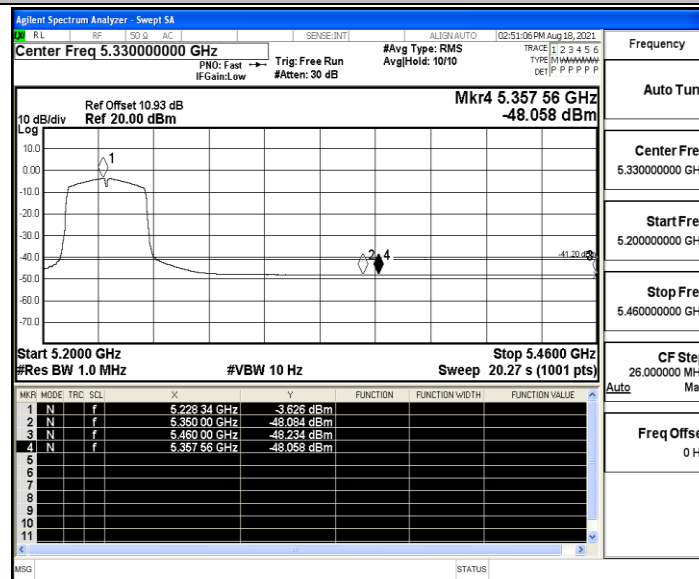


11N40SISO_Ant1_High_5230_Peak

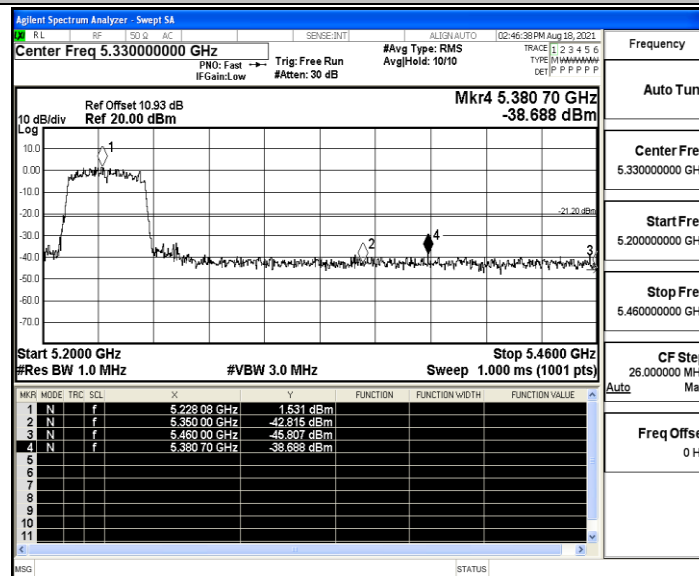


11AC20SISO_Ant1_Low_5180_AV

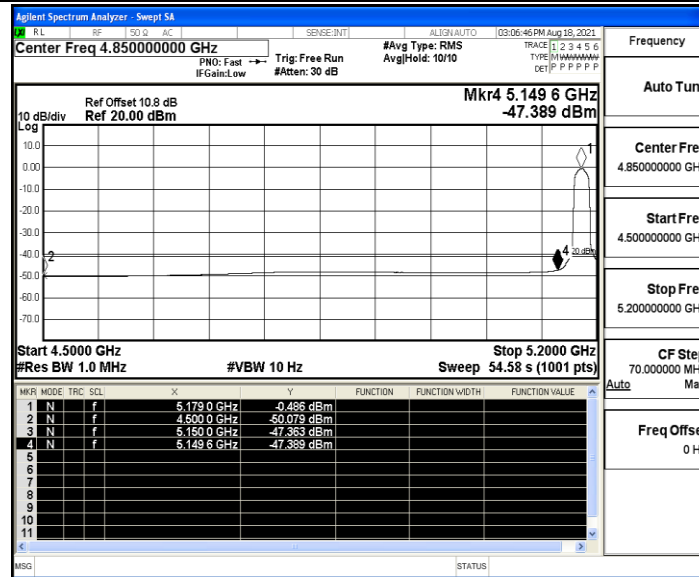

11AC20SISO_Ant1_Low_5180_Peak

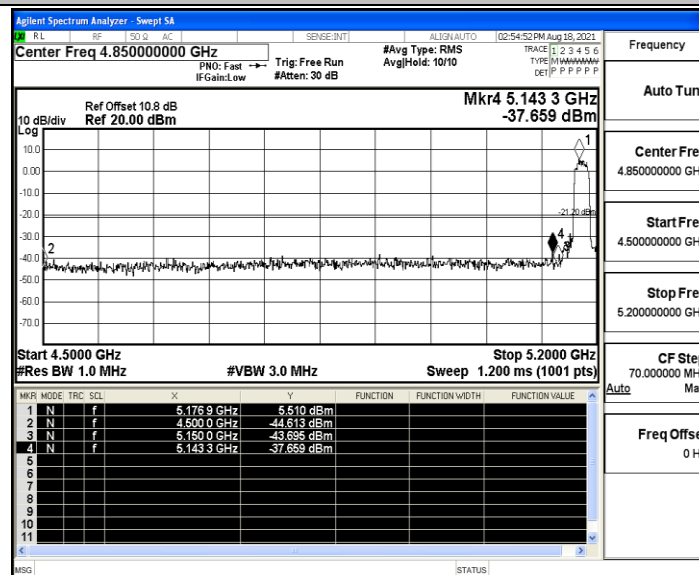


11AC20SISO_Ant1_High_5240_AV

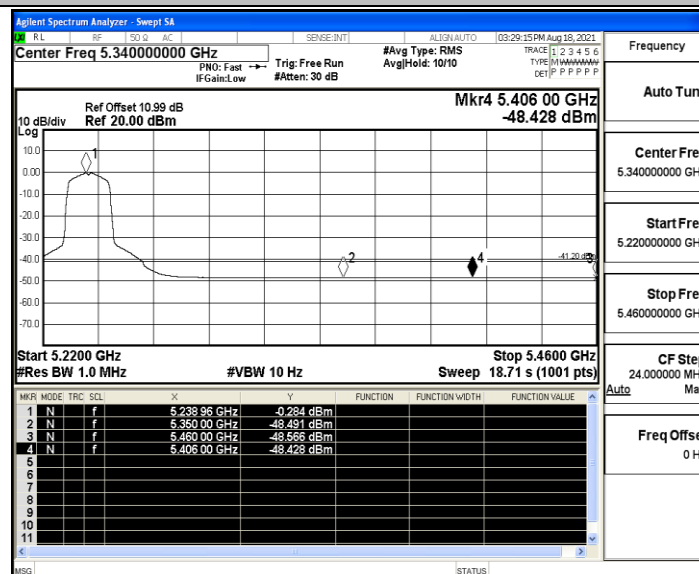





11AC20SISO_Ant1_High_5240_Peak

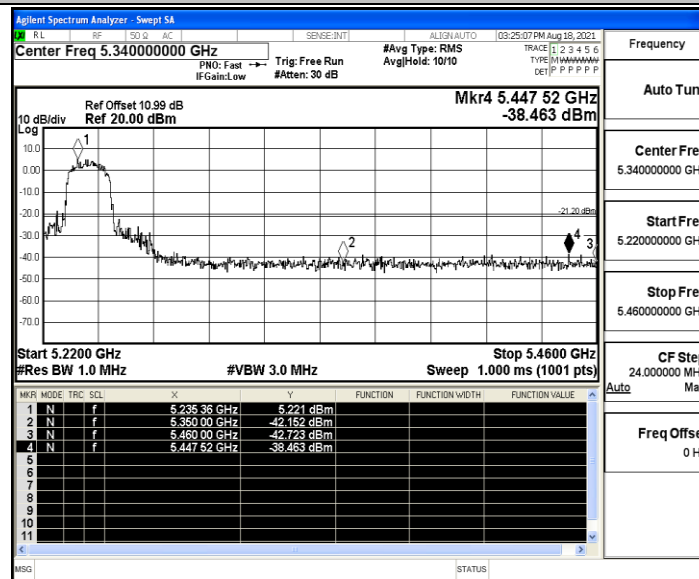


11AC40SISO_Ant1_Low_5190_AV

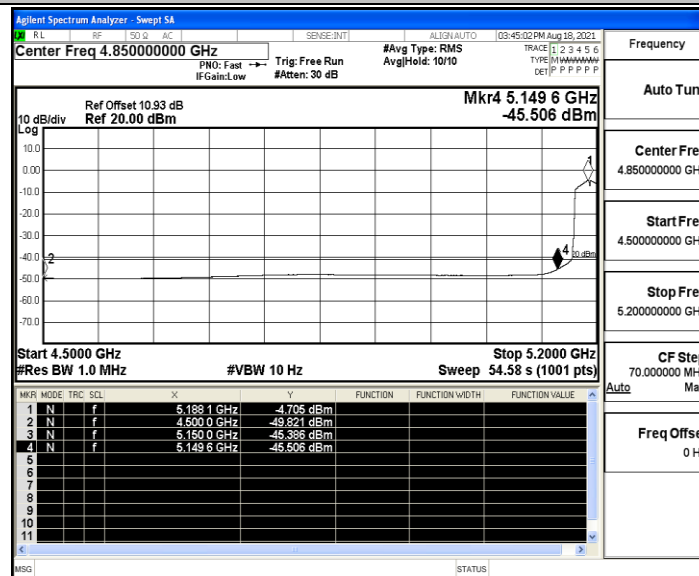


11AC40SISO_Ant1_Low_5190_Peak

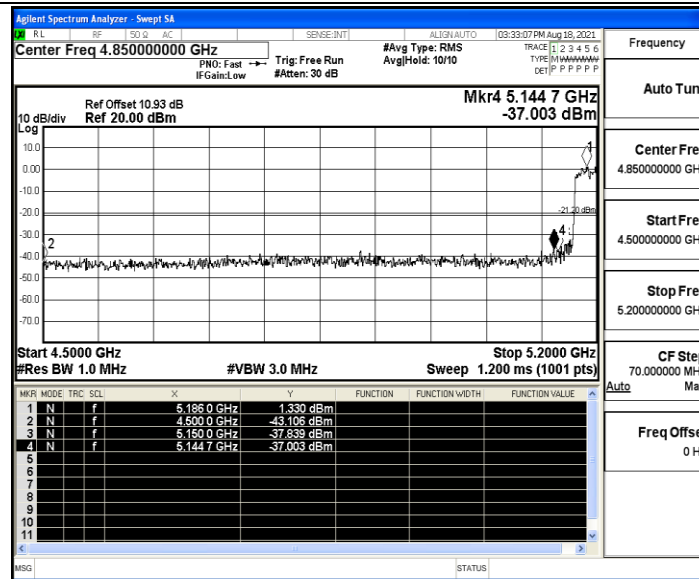

11AC40SISO_Ant1_High_5230_AV

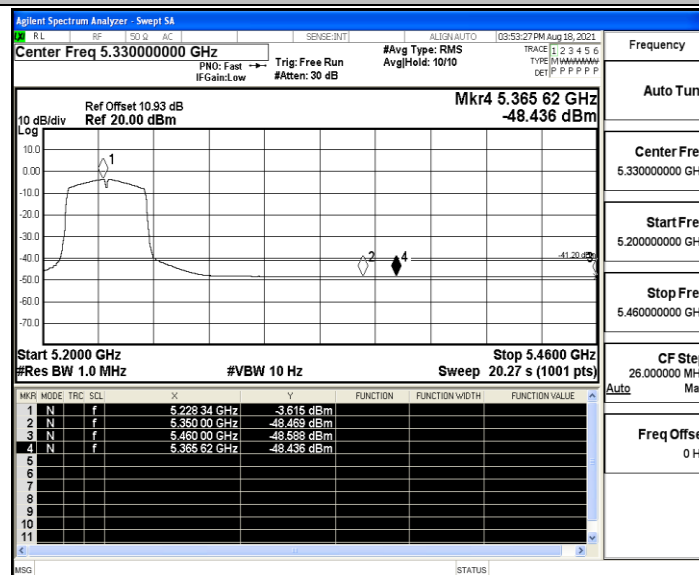


11AC40SISO_Ant1_High_5230_Peak

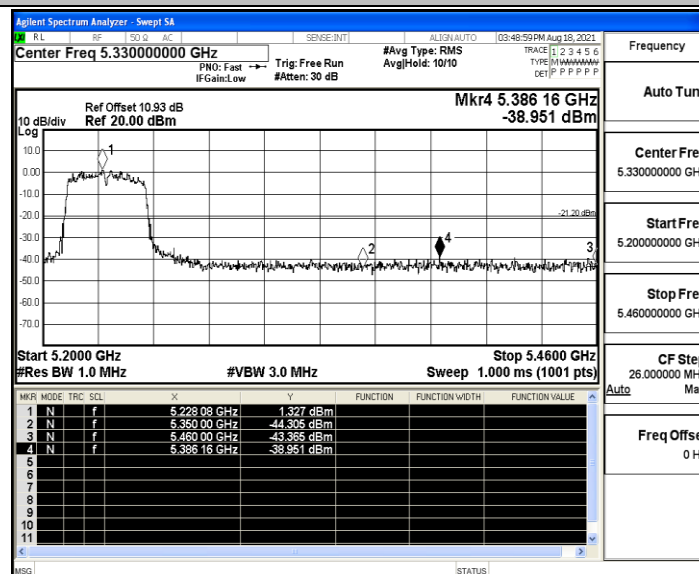






11AC80SISO_Ant1_Low_5210_AV

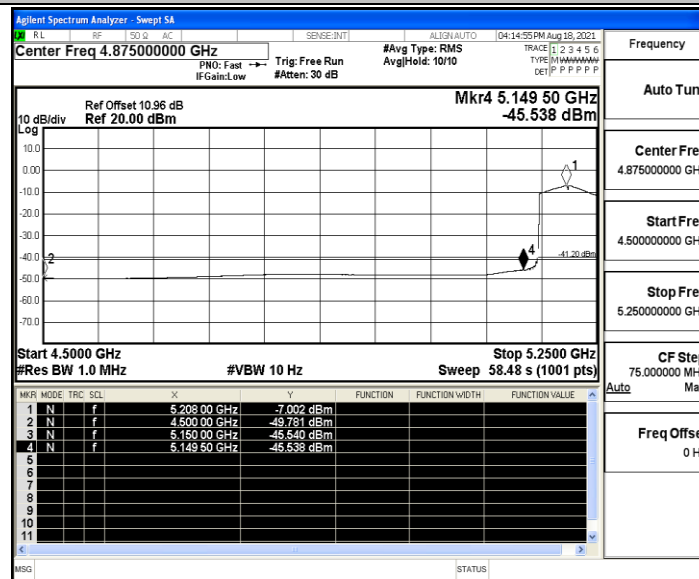

11AC80SISO_Ant1_Low_5210_Peak

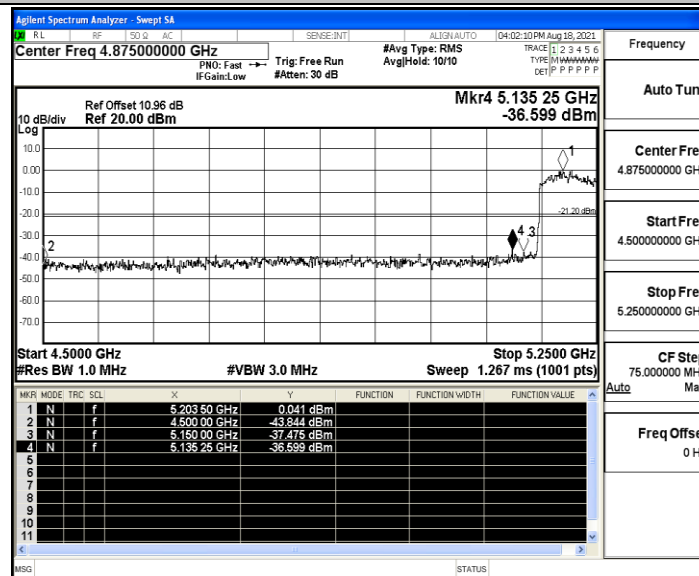

11AC80SISO_Ant1_High_5210_AV

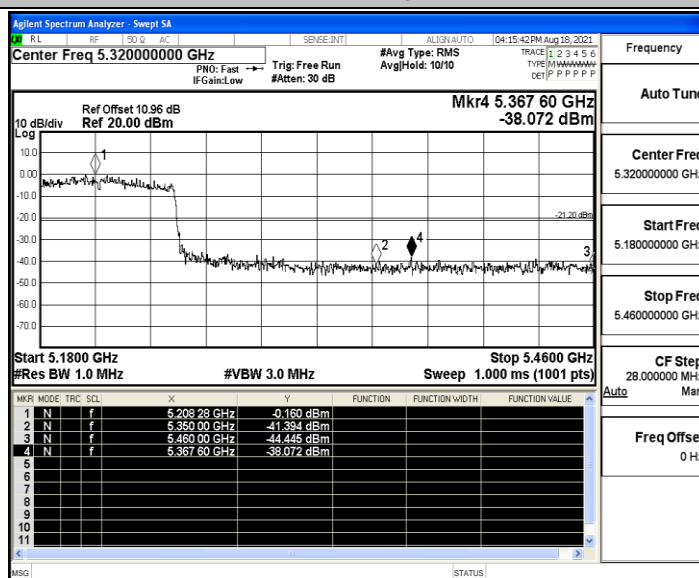11AC80SISO_Ant1_High_5210_Peak



D.5 Frequency Stability

Test Result

Voltage								
TestMode	Antenna	Channel	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
11A	Ant1	5180	NV	NT	-3000	-0.579151	20	PASS
			LV	NT	-4000	-0.772201	20	PASS
			HV	NT	-4000	-0.772201	20	PASS
		5200	NV	NT	-4000	-0.769231	20	PASS
			LV	NT	-4000	-0.769231	20	PASS
			HV	NT	-4000	-0.769231	20	PASS
		5240	NV	NT	-4000	-0.763359	20	PASS
			LV	NT	-4000	-0.763359	20	PASS
			HV	NT	-4000	-0.763359	20	PASS
11N20SISO	Ant1	5180	NV	NT	-4000	-0.772201	20	PASS
			LV	NT	-4000	-0.772201	20	PASS
			HV	NT	-4000	-0.772201	20	PASS
		5200	NV	NT	-4000	-0.769231	20	PASS
			LV	NT	-4000	-0.769231	20	PASS
			HV	NT	-4000	-0.769231	20	PASS
		5240	NV	NT	-4000	-0.763359	20	PASS
			LV	NT	-4000	-0.763359	20	PASS
			HV	NT	-4000	-0.763359	20	PASS
11N40SISO	Ant1	5190	NV	NT	-3000	-0.578035	20	PASS
			LV	NT	-4000	-0.770713	20	PASS
			HV	NT	-4000	-0.770713	20	PASS
		5230	NV	NT	-4000	-0.764818	20	PASS
			LV	NT	-4000	-0.764818	20	PASS
			HV	NT	-4000	-0.764818	20	PASS
11AC20SISO	Ant1	5180	NV	NT	-4000	-0.772201	20	PASS
			LV	NT	-4000	-0.772201	20	PASS
			HV	NT	-4000	-0.772201	20	PASS
		5200	NV	NT	-4000	-0.769231	20	PASS
			LV	NT	-4000	-0.769231	20	PASS
			HV	NT	-4000	-0.769231	20	PASS
		5240	NV	NT	-4000	-0.763359	20	PASS
			LV	NT	-4000	-0.763359	20	PASS
			HV	NT	-4000	-0.763359	20	PASS
11AC40SISO	Ant1	5190	NV	NT	-4000	-0.770713	20	PASS
			LV	NT	-4000	-0.770713	20	PASS



		5230	HV	NT	-4000	-0.770713	20	PASS
			NV	NT	-4000	-0.764818	20	PASS
			LV	NT	-4000	-0.764818	20	PASS
			HV	NT	-4000	-0.764818	20	PASS
11AC80SI SO	Ant1	5210	NV	NT	-4000	-0.767754	20	PASS
			LV	NT	-4000	-0.767754	20	PASS
			HV	NT	-4000	-0.767754	20	PASS

Temperature								
TestMode	Antenna	Channel	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
11A	Ant1	5180	NV	-30	-4000	-0.772201	20	PASS
			NV	-20	-4000	-0.772201	20	PASS
			NV	-10	-4000	-0.772201	20	PASS
			NV	0	-4000	-0.772201	20	PASS
			NV	10	-4000	-0.772201	20	PASS
			NV	20	-4000	-0.772201	20	PASS
			NV	30	-4000	-0.772201	20	PASS
			NV	40	-4000	-0.772201	20	PASS
			NV	50	-4000	-0.772201	20	PASS
		5200	NV	-30	-4000	-0.769231	20	PASS
			NV	-20	-4000	-0.769231	20	PASS
			NV	-10	-4000	-0.769231	20	PASS
			NV	0	-4000	-0.769231	20	PASS
			NV	10	-4000	-0.769231	20	PASS
			NV	20	-4000	-0.769231	20	PASS
			NV	30	-4000	-0.769231	20	PASS
			NV	40	-4000	-0.769231	20	PASS
			NV	50	-4000	-0.769231	20	PASS
		5240	NV	-30	-4000	-0.763359	20	PASS
			NV	-20	-4000	-0.763359	20	PASS
			NV	-10	-4000	-0.763359	20	PASS
			NV	0	-4000	-0.763359	20	PASS
			NV	10	-4000	-0.763359	20	PASS
			NV	20	-4000	-0.763359	20	PASS
			NV	30	-4000	-0.763359	20	PASS
			NV	40	-4000	-0.763359	20	PASS
			NV	50	-4000	-0.763359	20	PASS
11N20SIS O	Ant1	5180	NV	-30	-4000	-0.772201	20	PASS
			NV	-20	-4000	-0.772201	20	PASS
			NV	-10	-4000	-0.772201	20	PASS
			NV	0	-4000	-0.772201	20	PASS
			NV	10	-4000	-0.772201	20	PASS



			NV	20	-4000	-0.772201	20	PASS
			NV	30	-4000	-0.772201	20	PASS
			NV	40	-4000	-0.772201	20	PASS
			NV	50	-4000	-0.772201	20	PASS
		5200	NV	-30	-4000	-0.769231	20	PASS
			NV	-20	-4000	-0.769231	20	PASS
			NV	-10	-4000	-0.769231	20	PASS
			NV	0	-4000	-0.769231	20	PASS
			NV	10	-4000	-0.769231	20	PASS
			NV	20	-4000	-0.769231	20	PASS
			NV	30	-4000	-0.769231	20	PASS
			NV	40	-4000	-0.769231	20	PASS
			NV	50	-4000	-0.769231	20	PASS
		5240	NV	-30	-4000	-0.763359	20	PASS
			NV	-20	-4000	-0.763359	20	PASS
			NV	-10	-4000	-0.763359	20	PASS
			NV	0	-4000	-0.763359	20	PASS
			NV	10	-4000	-0.763359	20	PASS
			NV	20	-4000	-0.763359	20	PASS
			NV	30	-4000	-0.763359	20	PASS
			NV	40	-4000	-0.763359	20	PASS
11N40SIS O	Ant1	5190	NV	-30	-4000	-0.770713	20	PASS
			NV	-20	-4000	-0.770713	20	PASS
			NV	-10	-4000	-0.770713	20	PASS
			NV	0	-4000	-0.770713	20	PASS
			NV	10	-4000	-0.770713	20	PASS
			NV	20	-4000	-0.770713	20	PASS
			NV	30	-4000	-0.770713	20	PASS
			NV	40	-4000	-0.770713	20	PASS
		5230	NV	50	-4000	-0.770713	20	PASS
			NV	-30	-4000	-0.764818	20	PASS
			NV	-20	-4000	-0.764818	20	PASS
			NV	-10	-4000	-0.764818	20	PASS
			NV	0	-4000	-0.764818	20	PASS
			NV	10	-4000	-0.764818	20	PASS
			NV	20	-4000	-0.764818	20	PASS
			NV	30	-4000	-0.764818	20	PASS
11AC20SI SO	Ant1	5180	NV	40	-4000	-0.764818	20	PASS
			NV	50	-4000	-0.764818	20	PASS
			NV	-30	-4000	-0.772201	20	PASS
			NV	-20	-4000	-0.772201	20	PASS
			NV	-10	-4000	-0.772201	20	PASS
			NV					



			NV	0	-4000	-0.772201	20	PASS
			NV	10	-4000	-0.772201	20	PASS
			NV	20	-4000	-0.772201	20	PASS
			NV	30	-4000	-0.772201	20	PASS
			NV	40	-4000	-0.772201	20	PASS
			NV	50	-4000	-0.772201	20	PASS
		5200	NV	-30	-4000	-0.769231	20	PASS
			NV	-20	-4000	-0.769231	20	PASS
			NV	-10	-4000	-0.769231	20	PASS
			NV	0	-4000	-0.769231	20	PASS
			NV	10	-4000	-0.769231	20	PASS
			NV	20	-4000	-0.769231	20	PASS
			NV	30	-4000	-0.769231	20	PASS
			NV	40	-4000	-0.769231	20	PASS
			NV	50	-4000	-0.769231	20	PASS
		5240	NV	-30	-4000	-0.763359	20	PASS
			NV	-20	-4000	-0.763359	20	PASS
			NV	-10	-4000	-0.763359	20	PASS
			NV	0	-4000	-0.763359	20	PASS
			NV	10	-4000	-0.763359	20	PASS
			NV	20	-4000	-0.763359	20	PASS
			NV	30	-4000	-0.763359	20	PASS
			NV	40	-4000	-0.763359	20	PASS
			NV	50	-4000	-0.763359	20	PASS
11AC40SI SO	Ant1	5190	NV	-30	-4000	-0.770713	20	PASS
			NV	-20	-4000	-0.770713	20	PASS
			NV	-10	-4000	-0.770713	20	PASS
			NV	0	-4000	-0.770713	20	PASS
			NV	10	-4000	-0.770713	20	PASS
			NV	20	-4000	-0.770713	20	PASS
			NV	30	-4000	-0.770713	20	PASS
			NV	40	-4000	-0.770713	20	PASS
			NV	50	-4000	-0.770713	20	PASS
		5230	NV	-30	-4000	-0.764818	20	PASS
			NV	-20	-4000	-0.764818	20	PASS
			NV	-10	-4000	-0.764818	20	PASS
			NV	0	-4000	-0.764818	20	PASS
			NV	10	-4000	-0.764818	20	PASS
			NV	20	-4000	-0.764818	20	PASS
			NV	30	-4000	-0.764818	20	PASS
			NV	40	-4000	-0.764818	20	PASS
			NV	50	-4000	-0.764818	20	PASS
11AC80SI	Ant1	5210	NV	-30	-4000	-0.767754	20	PASS



SO			NV	-20	-4000	-0.767754	20	PASS
			NV	-10	-4000	-0.767754	20	PASS
			NV	0	-4000	-0.767754	20	PASS
			NV	10	-4000	-0.767754	20	PASS
			NV	20	-4000	-0.767754	20	PASS
			NV	30	-4000	-0.767754	20	PASS
			NV	40	-4000	-0.767754	20	PASS
			NV	50	-4000	-0.767754	20	PASS



D.6 Duty Cycle


Test Result

TestMode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Limit	Verdict
11A	Ant1	5180	30.00	30.00	100.00	---	PASS
		5200	30.00	30.00	100.00	---	PASS
		5240	30.00	30.00	100.00	---	PASS
11N20SISO	Ant1	5180	30.00	30.00	100.00	---	PASS
		5200	30.00	30.00	100.00	---	PASS
		5240	30.00	30.00	100.00	---	PASS
11N40SISO	Ant1	5190	30.00	30.00	100.00	---	PASS
		5230	30.00	30.00	100.00	---	PASS
11AC20SISO	Ant1	5180	30.00	30.00	100.00	---	PASS
		5200	30.00	30.00	100.00	---	PASS
		5240	30.00	30.00	100.00	---	PASS
11AC40SISO	Ant1	5190	30.00	30.00	100.00	---	PASS
		5230	30.00	30.00	100.00	---	PASS
11AC80SISO	Ant1	5210	30.00	30.00	100.00	---	PASS




Test Graphs


11A_Ant1_5180

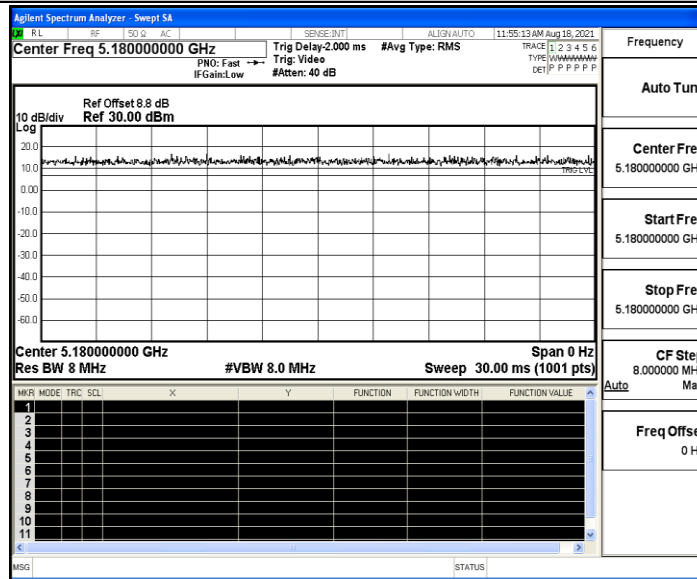


11A_Ant1_5200

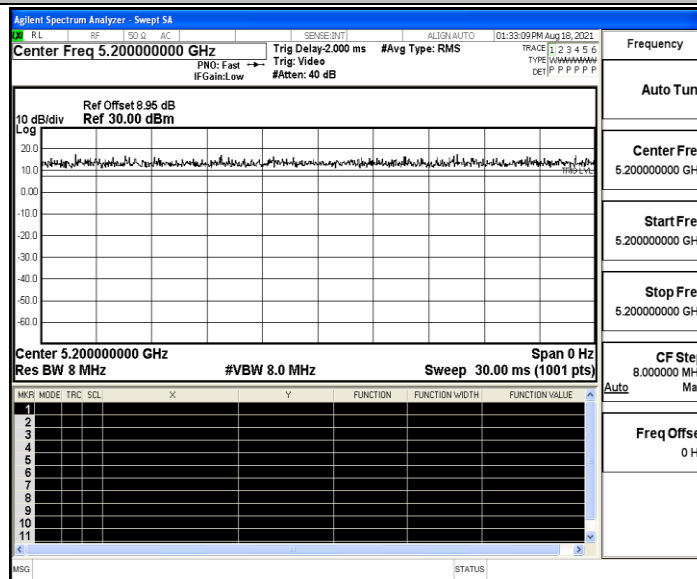


11A_Ant1_5240

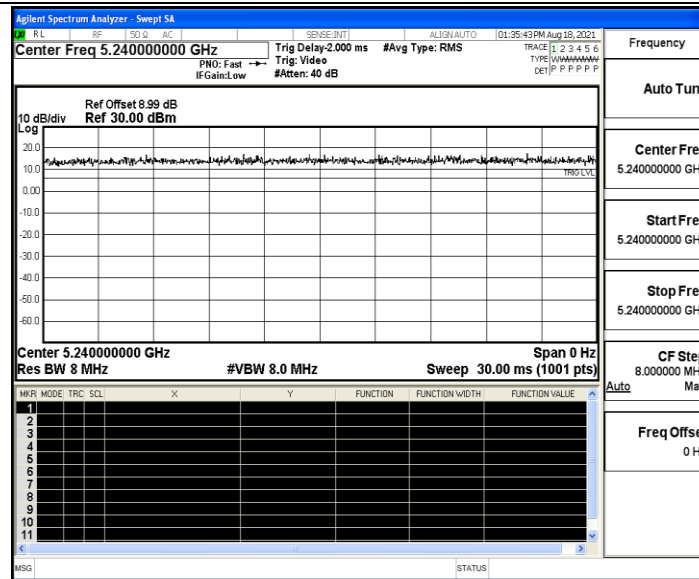

11N20SISO_Ant1_5180

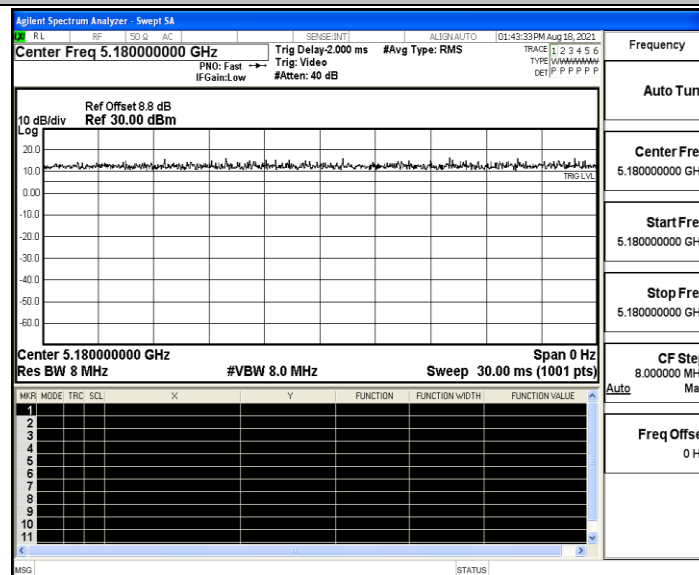


11N20SISO_Ant1_5200

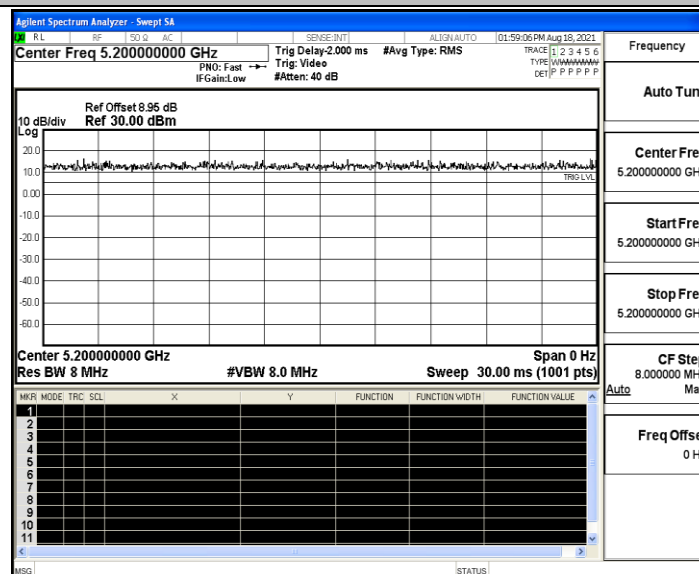





11N20SISO_Ant1_5240

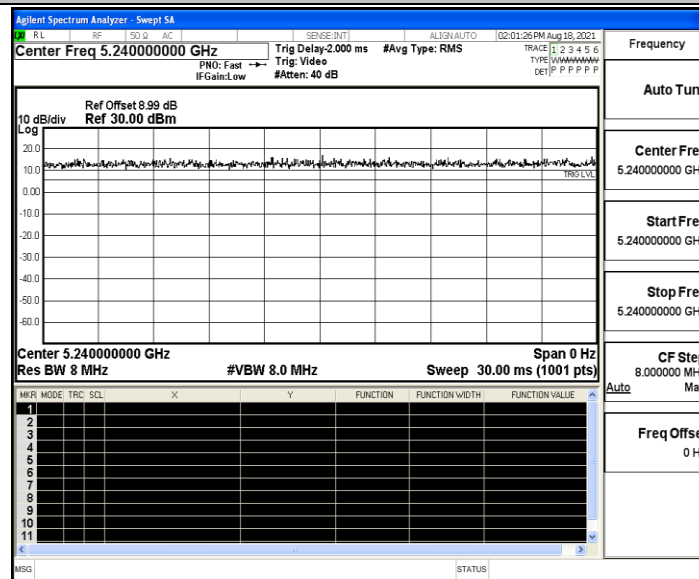


11N40SISO_Ant1_5190

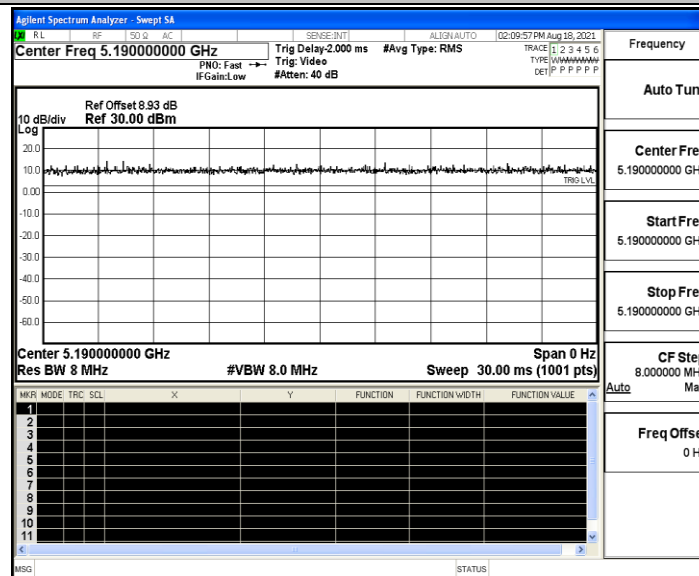


11N40SISO_Ant1_5230

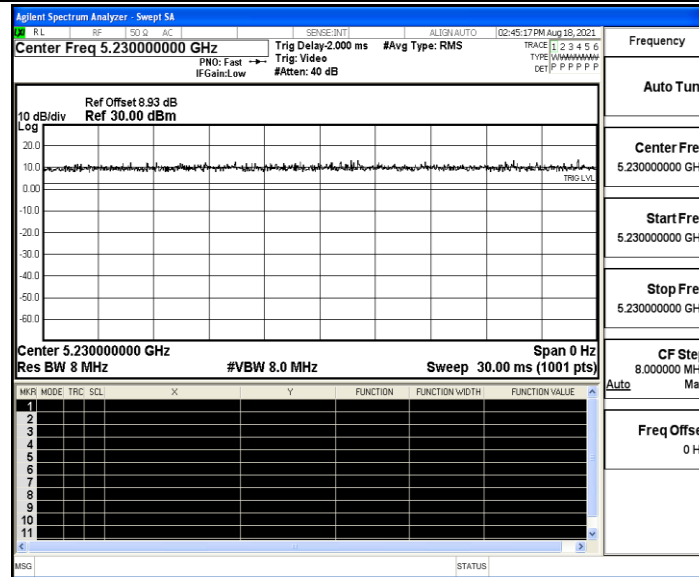

11AC20SISO_Ant1_5180

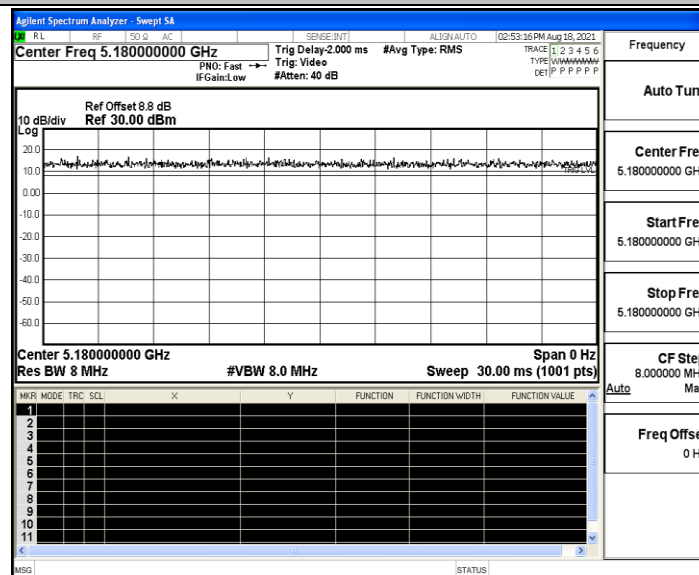


11AC20SISO_Ant1_5200

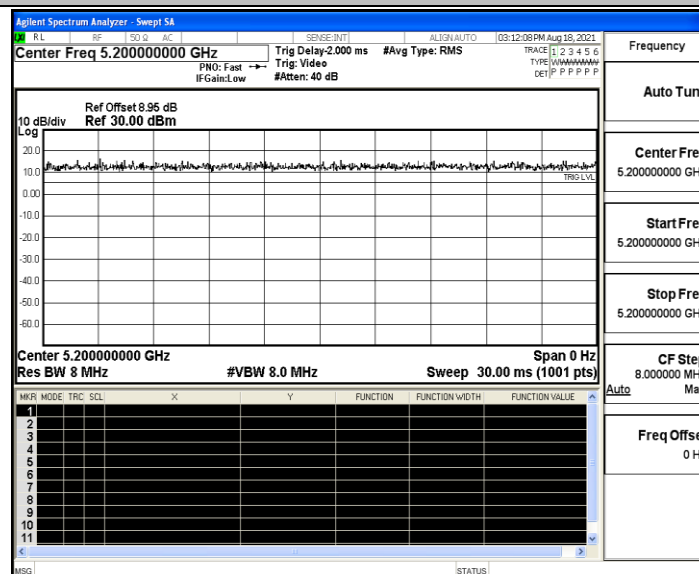




11AC20SISO_Ant1_5240

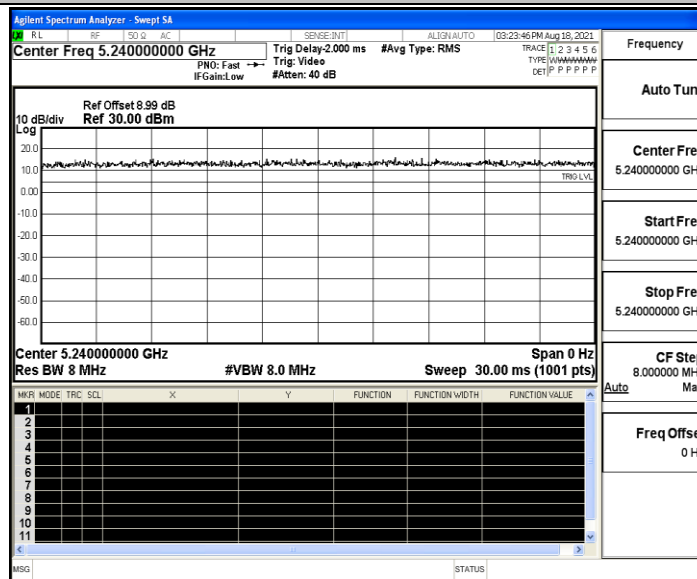

11AC40SISO_Ant1_5190

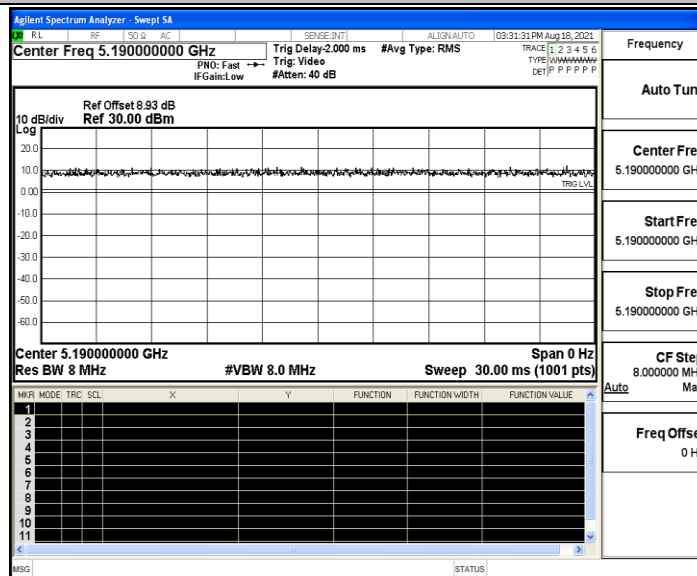

11AC40SISO_Ant1_5230

