



Appendix B

Detailed Test Results

1. WIFI
WIFI 2.4GHz for Body
WIFI 5.2GHz for Body
WIFI 5.3GHz for Body
WIFI 5.8GHz for Body





Test Laboratory: LCS-SAR Lab

WIFI 2.4G 802.11b 1CH Rear side 0mm

DUT: TABLET ; Type: Prestige 10QH Plus ; Serial: A250721026-1

Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2412 MHz; Duty Cycle: 1:1.011

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.774$ S/m; $\epsilon_r = 38.624$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.43, 7.43, 7.43); Calibrated: 2025/2/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Unnamed procedure/Area Scan (10x15x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.946 W/kg


Configuration/Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.28 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.652 W/kg; SAR(10 g) = 0.331 W/kg

Maximum value of SAR (measured) = 0.978 W/kg

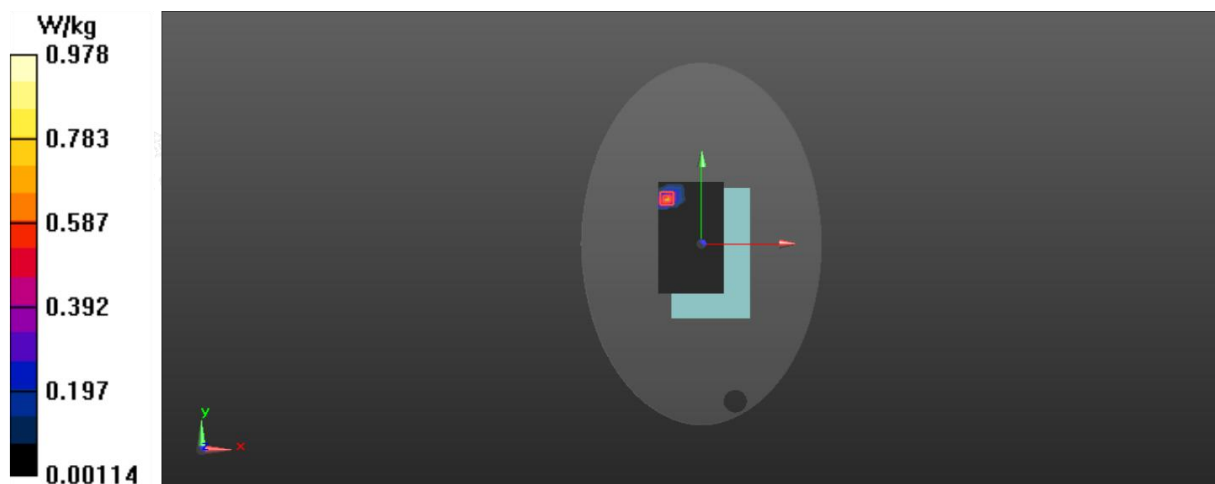



Test Laboratory: LCS-SAR Lab

WIFI 5.2G 802.11a 40CH Body Rear side 0mm

DUT: TABLET ; Type: Prestige 10QH Plus ; Serial: A250721026-1

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5200 MHz; Duty Cycle: 1:1.058

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.602 \text{ S/m}$; $\epsilon_r = 35.362$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.36, 5.36, 5.36); Calibrated: 2025/2/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Unnamed procedure/Area Scan (12x15x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.754 W/kg



Configuration/Unnamed procedure/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 12.59 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 10.5 W/kg

SAR(1 g) = 0.498 W/kg; SAR(10 g) = 0.263 W/kg

Maximum value of SAR (measured) = 0.719 W/kg

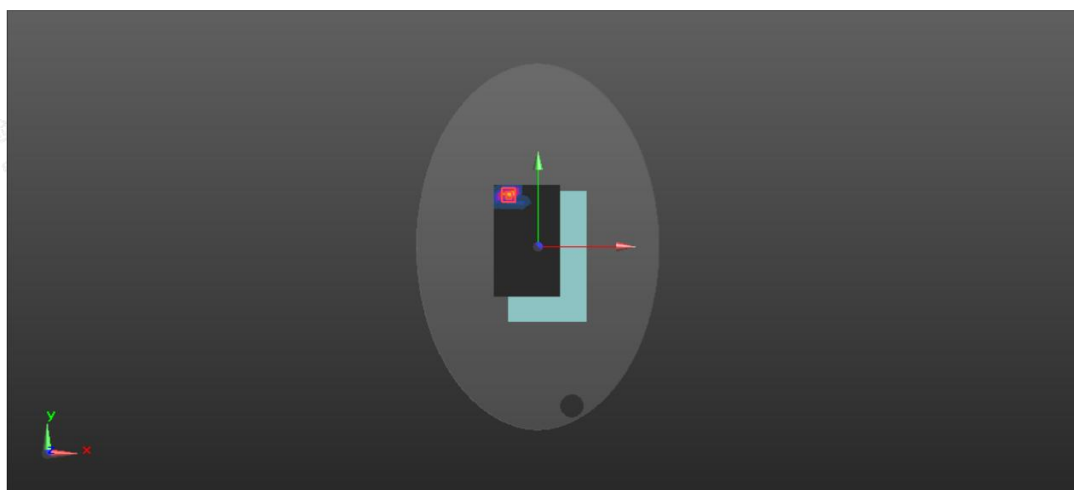



Test Laboratory: LCS-SAR Lab

WIFI 5.3G 802.11a 64CH Body Rear side 0mm

DUT: TABLET ; Type: Prestige 10QH Plus ; Serial: A250721026-1

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5320 MHz; Duty Cycle: 1:1.058

Medium parameters used: $f = 5320$ MHz; $\sigma = 4.647$ S/m; $\epsilon_r = 35.493$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.36, 5.36, 5.36); Calibrated: 2025/2/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Unnamed procedure/Area Scan (12x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.643 W/kg


Configuration/Unnamed procedure/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 10.13 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.946 W/kg

SAR(1 g) = 0.452 W/kg; SAR(10 g) = 0.232 W/kg

Maximum value of SAR (measured) = 0.687 W/kg

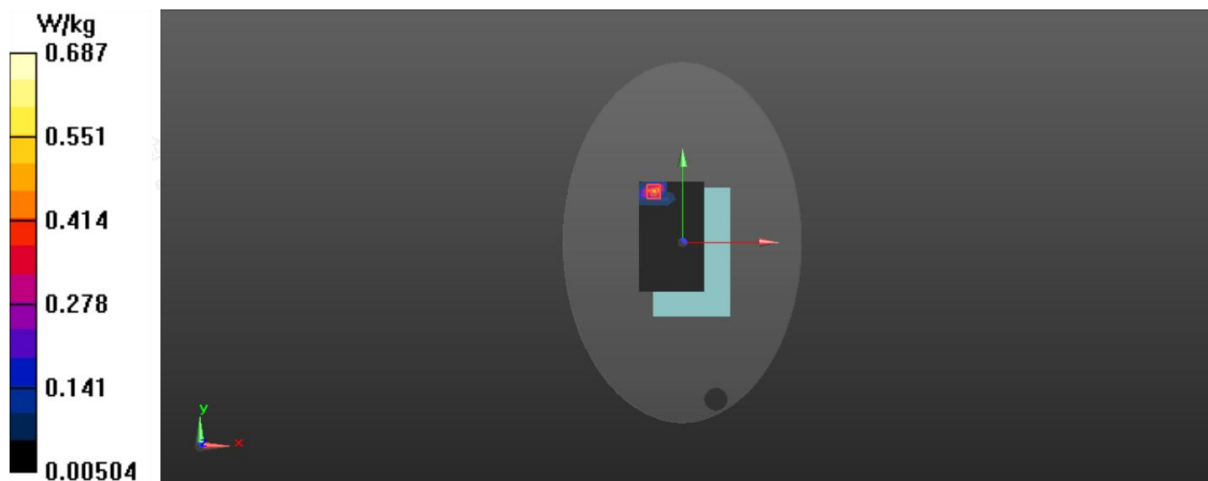



Test Laboratory: LCS-SAR Lab

WIFI 5.8G 802.11a 149CH Body Rear side 0mm

DUT: TABLET ; Type: Prestige 10QH Plus ; Serial: A250721026-1

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5745MHz;Duty Cycle: 1:1.058

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.283 \text{ S/m}$; $\epsilon_r = 35.357$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.86, 4.86, 4.86); Calibrated: 2025/2/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Unnamed procedure/Area Scan (12x15x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.795 W/kg

Configuration/Unnamed procedure/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 11.35 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.512 W/kg; SAR(10 g) = 0.271 W/kg

Maximum value of SAR (measured) = 0.754 W/kg

