

1-4F, Huafeng Science Park, Xin'an Sixth Road, 82th District, Bao'an,

Shenzhen, China.

Telephone: +86-755-29451282, Fax: +86-755-22639141

Report No.: EBO1312124-E440

Page 1 of 16

TEST REPORT

Applicant: VISUAL LAND INC.

Address of Applicant: 17785 Center Court Dr. Suite 670, Cerritos, CA 90703

Equipment Under Test (EUT)

Product Name: 8INCH TABLET

Model No.: ME-8D

FCC ID: SI9PRESTIGEPRO8D

Applicable standards: FCC CFR Title 47 Part 15 Subpart B:2012

Date of sample receipt: December 25, 2013

Date of Test: December 25, 2013 to January 2, 2014

Date of report issue: December 16, 2013

Test Result: PASS *

Authorized Signature:

Kevin Yu Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the EBO product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of EBO International Electrical Approvals or testing done by EBO International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by EBO International Electrical Approvals in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

^{*} In the configuration tested, the EUT complied with the standards specified above.



Report No.: EBO1312124-E440 Page 2 of 16

2 Version

Version No.	Date	Description
00	January 02, 2014	Original

Prepared By:	Jason	Date:	January 02, 2014
	Project Engineer		
Check By:	Canyo	Date:	January 02, 2014
	Reviewer		



Report No.: EBO1312124-E440

Page 3 of 16

3 Contents

			Page
1	COV	/ER PAGE	1
2	VER	SION	2
3	CON	ITENTS	3
4	TES	T SUMMARY	4
5	GEN	IERAL INFORMATION	5
	5.1	CLIENT INFORMATION	5
	5.2	GENERAL DESCRIPTION OF EUT	
	5.3	TEST MODE	
	5.4	TEST FACILITY	
	5.5	TEST LOCATION	
	5.6	DESCRIPTION OF SUPPORT UNITS	
	5.7	DEVIATION FROM STANDARDS	6
	5.8	ABNORMALITIES FROM STANDARD CONDITIONS	6
	5.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
6	TES	T INSTRUMENTS LIST	7
7	TES	T RESULTS AND MEASUREMENT DATA	8
	7.1 7.2	CONDUCTED EMISSIONS	



Report No.: EBO1312124-E440

Page 4 of 16

4 Test Summary

Test Item	Section in CFR 47	Result
Conducted Emission	Part15.107	PASS
Radiated Emissions	Part15.109	PASS

PASS: The EUT complies with the essential requirements in the standard.



Report No.: EBO1312124-E440

Page 5 of 16

5 General Information

5.1 Client Information

Applicant:	VISUAL LAND INC.
Address of Applicant:	17785 Center Court Dr. Suite 670, Cerritos, CA 90703
Manufacturer :	VISUAL LAND INC.
Address of Manufacturer:	17785 Center Court Dr. Suite 670, Cerritos, CA 90703
Factory:	VISUAL LAND INC.
Address of Factory:	17785 Center Court Dr. Suite 670, Cerritos, CA 90703

5.2 General Description of EUT

Product Name:	8INCH TABLET
Model No.:	ME-8D
Trade Name:	VISUAL LAND
	Adapter:
	Model No.: K-E30502000U1
Dower oupply	Input: 100-240VAC, 50/60Hz, 0.35A MAX
Power supply:	Output: 5VDC, 2A
	Or
	3.7V Li-ion Battery

5.3 Test mode

Test mode:				
Playing mode	Keep the EUT in video playing mode			
REC mode	Keep the EUT in video recording mode			
PC mode	Keep the EUT in data exchanging with PC mode.			

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ebotek.cn and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ebotek.cn. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: EBO1312124-E440

Page 6 of 16

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS —Registration No.: CNAS L5775

CNAS has accredited Global United Technology Services Co., Ltd. To ISO/IEC 17025 General Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• FCC —Registration No.: 600491

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 28, 2013.

• Industry Canada (IC) —Registration No.: 9079A-2

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. Has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, June 26, 2013.

5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China

5.6 Description of Support Units

Manufacturer	Description	Model	Serial Number	FCC ID/DoC
HP	Printer	CB495A	05257893	DoC
Lenovo	PC Host	M6900	EA05257893	DoC
DELL	MONITOR	E178FPC	N/A	DoC
DELL	KEYBOARD	SK-8115	N/A	DoC
DELL	MOUSE	MOC5UO	N/A	DoC

5.7 Deviation from Standards

Biconical, log.per. antenna and horn antenna were used instead of dipole antenna. Semi-anechoic Chamber was used as alternation of open air test sites, and all test suites were performed with radiated method in it.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.



Report No.: EBO1312124-E440

Page 7 of 16

6 Test Instruments list

Radia	Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)	
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.0(L)*6.0(W)* 6.0(H)	GTS250	Mar. 29 2013	Mar. 28 2014	
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A	
3	ESU EMI Test Receiver	R&S	ESU26	GTS203	Jul. 06 2013	Jul. 05 2014	
4	BiConiLog Antenna	SCHWARZBECK	VULB9163	GTS214	Mar. 09 2013	Mar. 08 2014	
5	Double -ridged waveguide horn	SCHWARZBECK	9120D	GTS208	Mar. 09 2013	Mar. 08 2014	
6	RF Amplifier	HP	8347A	GTS204	Jul. 06 2013	Jul. 05 2014	
7	Preamplifier	HP	8349B	GTS206	Jul. 06 2013	Jul. 05 2014	
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A	
9	Coaxial cable	GTS	N/A	GTS210	Jul. 06 2013	Jul. 05 2014	
10	Coaxial Cable	GTS	N/A	GTS211	Jul. 06 2013	Jul. 05 2014	
11	Thermo meter	N/A	N/A	GTS256	Jul. 06 2013	Jul. 05 2014	

Con	Conducted Emission:							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)		
1	Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS264	Sep. 07 2013	Sep. 06 2015		
2	EMI Test Receiver	Rohde & Schwarz	ESCS30	GTS223	Jul. 02 2013	Jul. 01 2014		
3	10dB Pulse Limita	Rohde & Schwarz	N/A	GTS224	Jul. 02 2013	Jul. 01 2014		
4	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	Jul. 02 2013	Jul. 01 2014		
5	LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	GTS226	Jul. 02 2013	Jul. 01 2014		
6	Coaxial Cable	GTS	N/A	GTS227	Jul. 02 2013	Jul. 01 2014		
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A		

Gen	General used equipment:							
Item	Test Equipment	Manufacturer	Model No.	Inventory	Cal.Date	Cal.Due date		
				No.	(mm-dd-yy)	(mm-dd-yy)		
1	Barometer	ChangChun	DYM3	GTS257	July 09 2013	July 08 2014		



Report No.: EBO1312124-E440

Page 8 of 16

7 Test Results and Measurement Data

7.1 Conducted Emissions


Test Requirement:	FCC Part15 B Section 15.107					
Test Method:	ANSI C63.4:2003					
Test Frequency Range:	150KHz to 30MHz	150KHz to 30MHz				
Class / Severity:	Class B					
Receiver setup:	RBW=9KHz, VBW=30KHz, Sv	weep time=auto				
Limit:	Fraguency range (MHz)	Limit (d	lBuV)			
	Frequency range (MHz) Quasi-peak Average					
	0.15-0.5	66 to 56*	56 to 46*			
	0.5-5	56	46			
	5-30	60	50			
Test setup:	* Decreases with the logarithm	i of the frequency.				
Test procedure:	AUX Equipment E.U.T Test table/Insulation plane Remark: E.U.T. Equipment Under Test LISN: Line impedence Stabilization Network Test table height=0.8m 1. The E.U.T and simulators as		ain power through a			
	 line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement. 					
Test Instruments:	Refer to section 6 for details					
Test mode:	Pre-scan all modes in section 5.3, and found the PC mode which is the worst mode, so only the data of worst mode was show on the test report.					
Test results:	Pass					



Report No.: EBO1312124-E440

Page 9 of 16

Measurement Data

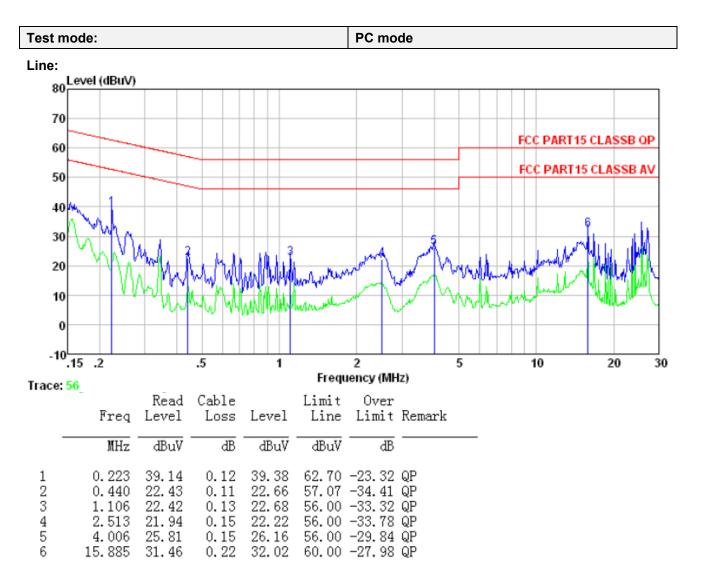


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ebotek.cn and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ebotek.cn. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: EBO1312124-E440

Page 10 of 16

Neutral:

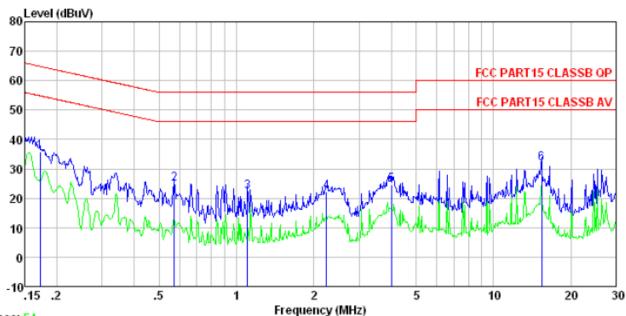

Trace: 54

	Freq	Read Level	Cable Loss			Over Limit	Remark
	MHz	dBu₹	dB	dBu₹	dBuV	dB	
1 2 3 4 5	1.106		0.12 0.13 0.15 0.15	35. 95 24. 99 22. 26 22. 15 24. 60 31. 93	56.00 56.00 56.00 56.00	-31.01 -33.74 -33.85 -31.40	QP QP QP QP

Notes:

- 1. An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3. Final Level =Receiver Read level + LISN Factor + Cable Loss
- 4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.



Report No.: EBO1312124-E440

Page 11 of 16


7.2 Radiated Emission

Test Requirement:	FCC Part15 B Section 15.109								
Test Method:	ANSI C63.4:2003								
Test Frequency Range:	30MHz to 6GHz	<u>z</u>							
Test site:	Measurement D	Measurement Distance: 3m (Semi-Anechoic Chamber)							
Receiver setup:									
	Frequency	Detector	RBW	VBW	Remark				
	30MHz- 1GHz	Quasi-peal	k 120kHz	300kHz	Quasi-peak Value				
	Above 1GHz	Above 1GHz Peak		3MHz	Peak Value				
		Peak	1MHz	10Hz	Average Value				
Limit:					Т				
	Freque	-	Limit (dBuV		Remark				
	30MHz-8	8MHz	40.0		Quasi-peak Value				
	88MHz-2		43.5		Quasi-peak Value				
	216MHz-9	60MHz	46.0	0	Quasi-peak Value				
	960MHz-	960MHz-1GHz		0	Quasi-peak Value				
	Above 1	Above 1GHz		0	Average Value				
	Above	OFIZ	74.0	0	Peak Value				
Test Procedure:	 The EUT was placed on the top of a rotating table 0.8 meters above ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving 								
					ole-height antenna				
	 The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 								
	5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.								
	6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or								



Report No.: EBO1312124-E440

Page 12 of 16

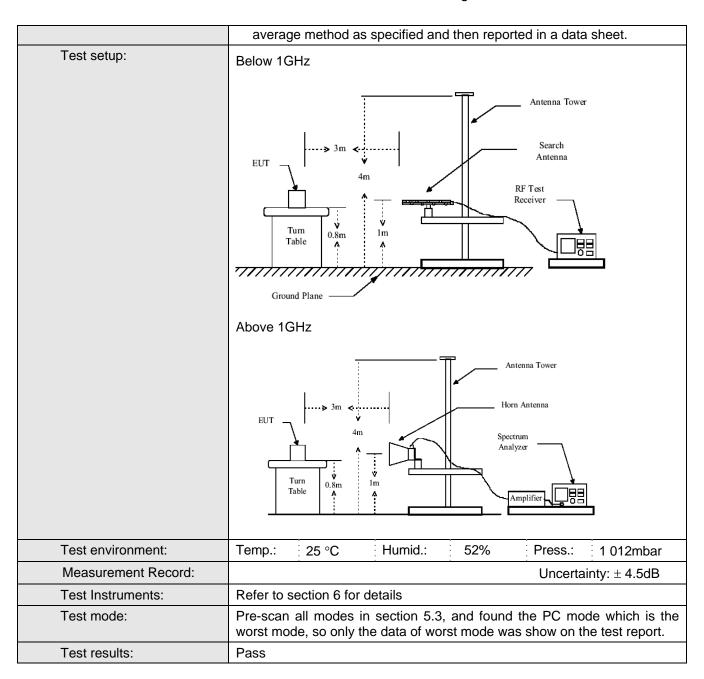

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor



Report No.: EBO1312124-E440


Page 13 of 16

Measurement Data

Test mode: PC	mode
---------------	------

Below 1GHz

Horizontal:

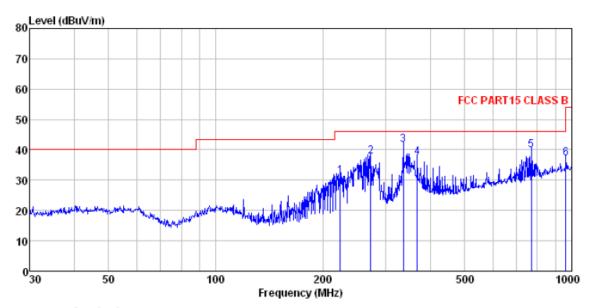

Site : 3m chamber

: FCC PART15 CLASS B 3m VULB9163-2013M HORIZONTAL Condition

Test Mode : PC mode

est	Engineer:		Ant enna	Cable	Preamn		Limit	Over		
	Freq		Factor						Remark	
	MHz	dBu∜	<u>dB</u> /m	dB		dBuV/m	dBuV/m			
1 2 3 4 5 6	223.733 272.278 336.035 368.112 768.748 962.162	55.08 50.25 45.21	15.99 16.49	2.55 2.71 4.35	32.17 32.07	41.55 37.47 39.96	46.00 46.00 46.00 46.00	-8.22 -4.45 -8.53 -6.04	QP QP QP QP	


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ebotek.cn and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ebotek.cn. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: EBO1312124-E440

Page 14 of 16

Vertical:

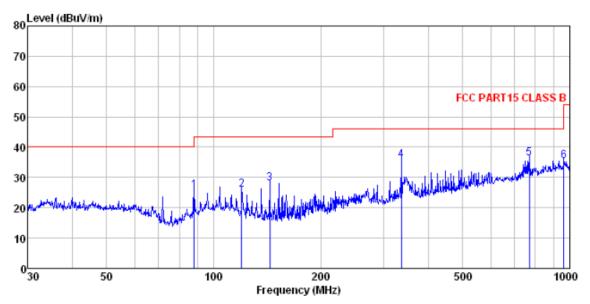

Site

: 3m chamber : FCC PART15 CLASS B 3m VULB9163-2013M VERTICAL Condition

: PC mode Test Mode

Test Engineer: Yang

	Freq		intenna Factor						Remark
	MHz	dBu∀	<u>dB</u> /m	dB	dB	dBuV/m	dBuV/m	<u>dB</u>	
1 2 3 4 5	88.033 119.856 143.830 336.035 768.748 962.162	48.29 49.28 41.70	12.48 10.22 15.99 21.68	1.36 1.53 2.55 4.35	31.73 31.86 31.96 32.07 31.28 31.22	25. 98 28. 08 35. 75 36. 45	43.50 43.50 46.00 46.00	-17.52 -15.42 -10.25 -9.55	QP QP QP QP

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ebotek.cn and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ebotek.cn. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: EBO1312124-E440

Page 15 of 16

Above 1GHz

Horizontal:

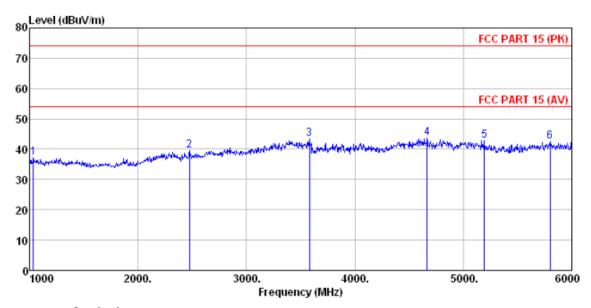

Site : 3m chamber

: FCC PART 15 (PK) 3m BBHA9120D ANT(>1GHZ) HORIZONTAL Condition : PC mode

Test Mode

Test Engineer: Yang

	Freq				Preamp Factor		Limit Line	Over Limit	Remark
	MHz	dBu∀	<u>dB</u> /m	dB	dB	dBuV/m	dBuV/m	<u>dB</u>	
1 2 3 4 5	1035.000 2475.000 3580.000 4665.000 5195.000 5800.000	40.36 39.96 35.75 34.16	31.97	5.47 7.11 8.48 9.06	32. 81 33. 92 32. 66 32. 02 32. 28 32. 25	39.43 43.52 43.82 42.91	74.00 74.00 74.00 74.00	-34.57 -30.48 -30.18 -31.09	Peak Peak Peak Peak


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ebotek.cn and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ebotek.cn. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: EBO1312124-E440

Page 16 of 16

Vertical:

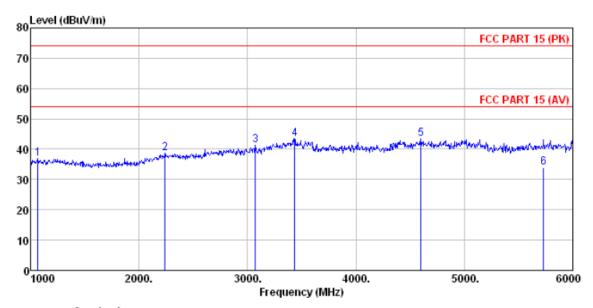

Site : 3m chamber

: FCC PART 15 (PK) 3m BBHA9120D ANT(>1GHZ) VERTICAL Condition

: PC mode Test Mode

3.	Engineer.		ant enna	Cable	Preamp		Limit	Over	
	Freq		Factor						Remark
	MHz	dBu∜	<u>dB</u> /m	₫B	dB	dBuV/m	dBuV/m	<u>d</u> B	
2	1070.000 2240.000	40.72 39.53		5.23			74.00	-37.13 -35.43	Peak
3 4	3075.000 3435.000	40.61			32.83		74.00	-30.62	Peak
5 6	4600.000 5730.000	35.47 23.84			31.99 32.29				

----- End-----

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ebotek.cn and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ebotek.cn. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."