

FCC TEST REPORT

CATEGORY : Portable End Product
PRODUCT NAME : Wireless LAN
FCC ID. : **SIHNVWLB703**
FILING TYPE : Certification
MODEL NAME : NV-WLB703
APPLICANT : **Tul Corporation**
7F-7, No.79, Hsin Tai Wu Rd., Sec.1, His-Chin,
Taipei Hsien 221, Taiwan, R.O.C.
MANUFACTURER : **Cameo Communications, Inc.**
6F, No.22, Chung Shin Rd., His-Chih, Taipei 221,
Taiwan, R.O.C.
ISSUED BY : **SPORTON INTERNATIONAL INC.**
6F, No. 106, Sec. 1, Hsin Tai Wu Rd., His Chih, Taipei Hsien,
Taiwan, R.O.C.

Statements:

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

Certificate or Test Report could not be used by the applicant to claim the product endorsement by CNLA, NVLAP or any agency of U.S. government.

The test equipment used to perform the test are calibrated and traceable to NML/ROC or NIST/USA.



Dr. Alan Lane
Vice General Manager
Sporton International Inc.



Lab Code: 200079-0

Table of Contents

History of this test report.....	ii
1. General Description of Equipment under Test.....	1
1.1. Applicant.....	1
1.2. Manufacturer	1
1.3. Basic Description of Equipment under Test	1
1.4. Features of Equipment under Test.....	1
1.5. Table for Carrier Frequencies	2
2. Test Configuration of the Equipment under Test.....	3
2.1. Description of the Test	3
2.2. Frequency Range Investigated	3
2.3. Description of Test Supporting Units.....	4
2.4. Connection Diagram of Test System	6
2.5. Test Software	7
3. Test Location and Standards	8
3.1. Test Location.....	8
3.2. Test Conditions	8
3.3. Standards for Methods of Measurement.....	8
3.4. DoC Statement.....	8
4. List of Measurements.....	9
4.1. Summary of the Test Results	9
5. Test Result	10
5.1. Test of 6dB Spectrum Bandwidth (DSSS System)	10
5.2. Test of Maximum Peak Output Power	13
5.3. Test of Peak Power Spectral Density.....	14
5.4. Test of Band Edges Emission	17
5.5. Test of AC Power Line Conducted Emission	19
5.6. Test of Spurious Radiated Emission	23
5.7. Antenna Requirements	30
5.8. RF Exposure	31
6. List of Measuring Equipments Used	33
Appendix A. Photographs of EUT.....	A1 ~ A12

History of this test report

☒ No additional attachment.

☐ Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

1. General Description of Equipment under Test

1.1. Applicant

Tul Corporation

7F-7, No.79, Hsin Tai Wu Rd., Sec.1, His-Chin, Taipei Hsien 221, Taiwan, R.O.C.

1.2. Manufacturer

Cameo Communications, Inc.

6F, No.22, Chung Shin Rd., His-Chih, Taipei 221, Taiwan, R.O.C.

1.3. Basic Description of Equipment under Test

This product is a wireless LAN USB adapter with IEEE 802.11b wireless module. The radio technical data has been listed on section " Features of Equipment under Test ". The product is the interface of USB Dongle.

1.4. Features of Equipment under Test

ITEM	DESCRIPTION
Type of Modulation	DSSS (CCK / DQPSK / DBPSK),
Number of Channels	11
Frequency Band	2400MHz ~ 2483.5MHz
Carrier Frequency	Please reference table below.
Channel Bandwidth	22MHz
Output Power	12.90 dBm (peak)
Antenna Type / Gain	Line Antenna / 1dBi
Function Type	Transceiver
Power Rating	3.3 VDC
Temperature Range (Operating)	0 ~ 55°C

1.5. Table for Carrier Frequencies

Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412 MHz	5	2432 MHz	9	2452 MHz
2	2417 MHz	6	2437 MHz	10	2457 MHz
3	2422 MHz	7	2442 MHz	11	2462 MHz
4	2427 MHz	8	2447 MHz		

2. Test Configuration of the Equipment under Test

2.1. Description of the Test

- a. During testing, the equipment was placed on a non-conducting support.
- b. The following test modes were performed:
 - Mode 1 : CH 01 2412MHz
 - Mode 2 : CH 06 2437MHz
 - Mode 3 : CH 11 2462MHz
- c. Spurious emission below 1GHz is independent of channel selection, so only Channel 11 was tested.
- d. For spurious emission above 1GHz, lowest, middle and highest channel with 11Mbps data rate was tested.
- e. The EUT has been programmed to continuously transmit or receive during testing. The used peripherals as well as the configuration fulfill the requirements of ANSI C63.4:2001.
- f. The configuration is operated in a manner which tends to maximize its emission characteristics in a typical application.
- g. 3 meters measurement distance in semi-anechoic chamber was used in this test.

2.2. Frequency Range Investigated

- a. Conducted power line test: from 150 kHz to 30 MHz
- b. Radiated emission test: from 30 MHz to 25000 MHz



2.3. Description of Test Supporting Units

Support Unit 1. – Notebook (DELL)

FCC ID	: N/A
Model No.	: PP01L
Serial No.	: SP0004
Remark	: This support device was tested to comply with FCC standards and authorized under Declaration of Conformity.

Support Unit 2. – Printer (EPSON)

FCC ID	: N/A
Model No.	: Stylus Color 680
Serial No.	: SP0016
Remark	: This support device was tested to comply with FCC standards and authorized under Declaration of Conformity and data cable is 1.35m of the shielded.

Support Unit 3. – Modem (ACEEX)

FCC ID	: IFAXDM141
Model No.	: DM141
Serial No.	: SP0019
Remark	: This support device was tested to comply with FCC standards and authorized under Declaration of Conformity and data cable is 1.15m of the shielded.

Support Unit 4. – Personal Computer (COMPAQ)

FCC ID	: N/A
Model No.	: D380mx
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0004



Support Unit 5. -- Monitor (SONY)

FCC ID	: N/A
Model No.	: G420
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0006
Data Cable	: Shielded, 1.7m
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.


Support Unit 6. --PS/2 Keyboard (COMPAQ)

FCC ID	: N/A
Model No.	: 6511-VA
Serial No.	: SP0013
Data Cable	: Shielded, 360 degree via metal backshells, 1.5m
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 7. --Mouse (MICROSOFT)

FCC ID	: N/A
Model No.	: 1004
Serial No.	: SP0014
Data Cable	: Shielded, 1.8m
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

2.4. Connection Diagram of Test System

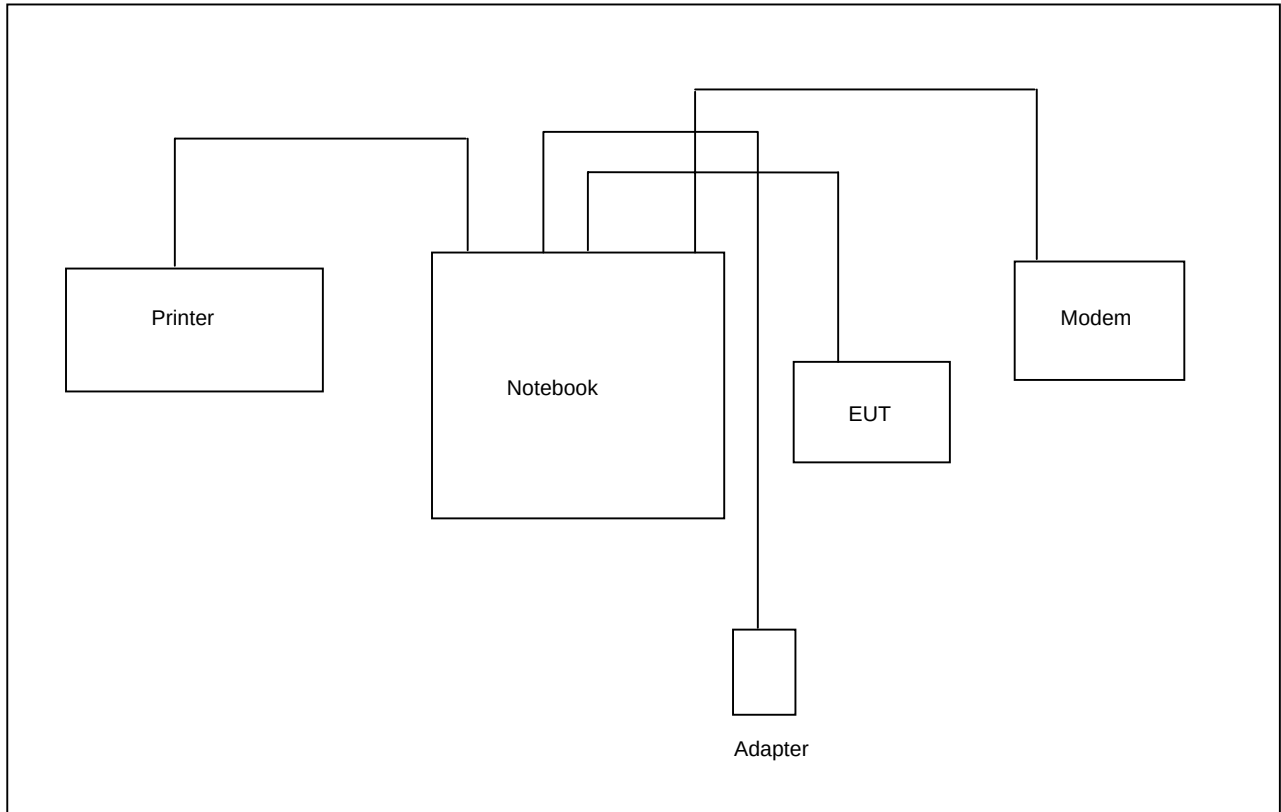



2.5. Test Software

There are 2 software may be used in the testing.

- a. Channel & Power Controlling Software: This was provided by the manufacturer and is able to let the test engineer select the operating channel as well as the RF output power. The parameters for channel selection is trying to offer the test engineer the ability to fix the operating channel for testing, both normal data and continuously transmitting modes are allowed, and that for RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.
- b. "H" Pattern Generator: Except Access Point, the supporting equipment such as monitor or printer is always available. Under testing, these supporting equipment has to also under working condition. "H" Pattern Generator is able to continuously transmitting "H" character to those supporting equipments.

3. Test Location and Standards

3.1. Test Location

Test Location : Sporton Hwa Ya Testing Building

Address : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Tel: +886 3 327 3456 Fax: +886 3 318 0055

Test Site No. : CO01-HY, 03CH03-HY

3.2. Test Conditions

Normal Voltage : 110V/60Hz (host equipment)

Extreme Voltage : 138V and 102V (host equipment)

Normal Temperature : 20 °C

Extreme Temperature : 0 °C and 55 °C

3.3. Standards for Methods of Measurement

Here is the list of the standards followed in this test report.

ANSI C63.4-2001

47 CFR Part 15 Subpart C (Section 15.247)

3.4. DoC Statement

This EUT is also classified as a device of computer peripheral Class B which DoC has to be followed. It has been verified according to the rule of 47 CFR part 15 Subpart B, and found that all the requirements has been fulfilled.

4. List of Measurements

4.1. Summary of the Test Results

Applied Standard: 47 CFR Part 15 and Part 2			
Paragraph	FCC Rule	Description of Test	Result
5.1	15.247(a)(2)	6dB Spectrum Bandwidth (DSSS System)	Pass
5.2	15.247(b)	Maximum Peak Output Power	Pass
5.3	15.247(d)	Peak Power Spectral Density	Pass
5.4	15.247(c)	Band Edges Emission	Pass
5.5	15.107/15.207	AC Power Line Conducted Emission	Pass
5.6	15.209/15.247(c)	Spurious Radiated Emission	Pass
5.7	15.203	Antenna Requirement	Pass

5. Test Result

5.1. Test of 6dB Spectrum Bandwidth (DSSS System)


5.1.1 Measuring Instruments

Item 19 of the table on section 6.

5.1.2 Test Procedures

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. The 6dB bandwidth is defined as the spectrum width with level higher than 6dB below the peak level.
4. Repeat above 1~3 points for the middle and highest channel of the EUT.

5.1.3 Test Setup Layout

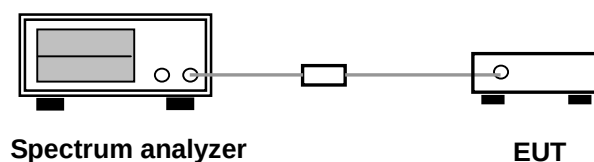


5.1.4 Test Result : See spectrum analyzer plots below

- Temperature: 25°C
- Relative Humidity: 60%
- Duty Cycle of the Equipment During the Test: 100%
- Test Engineer: Sam Lee


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Min. Limit (MHz)
01	2412	11.84	0.5
06	2437	11.48	0.5
11	2462	11.84	0.5

(Channel 01) :

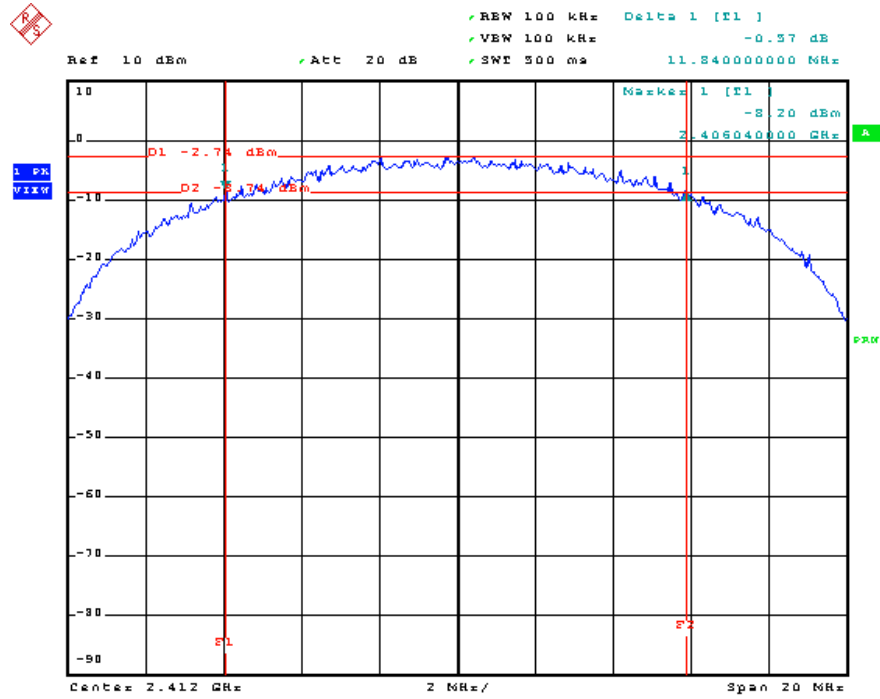


Date: 17.AUG.2004 21:55:24

(Channel 06) :

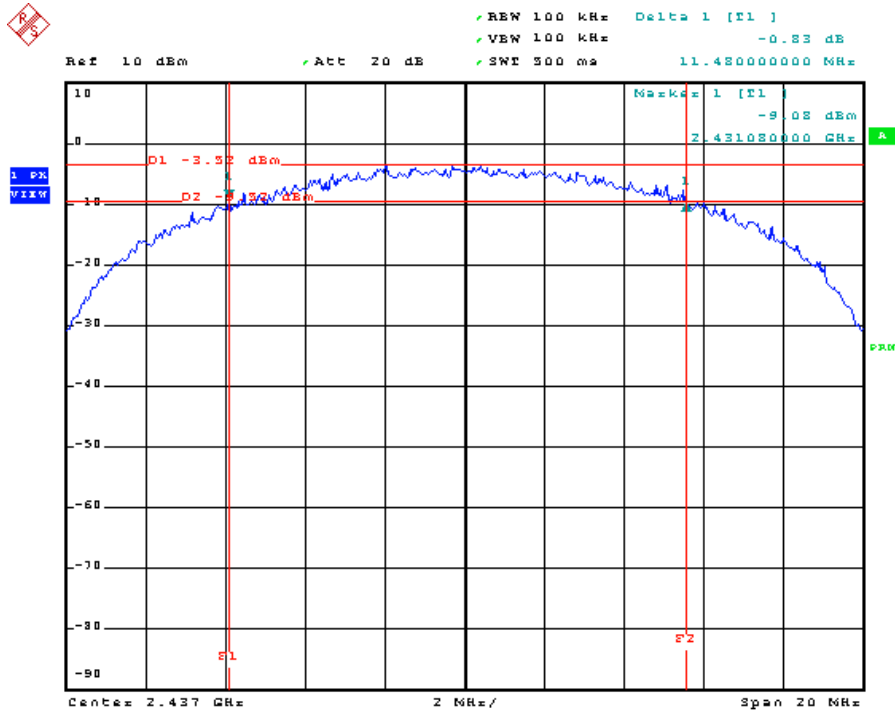

Date: 17.AUG.2004 21:57:29

(Channel 11) :

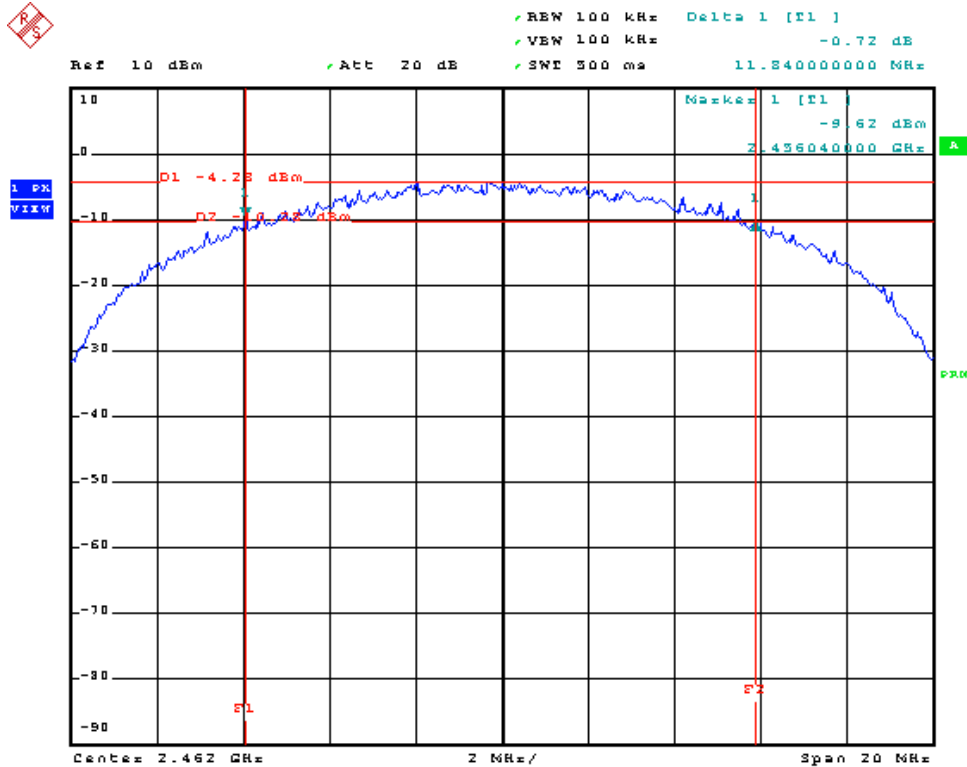

Date: 17.AUG.2004 21:59:27

5.2. Test of Maximum Peak Output Power


5.2.1 Measuring Instruments

Item 20 of the table on section 6.

5.2.2 Test Procedures

1. The transmitter output was connected to the vertical channel of the oscilloscope through a detector.
2. Record peak value from the meter.
3. Repeated the 1~2 for the middle and highest channel of the EUT.

5.2.3 Test Setup Layout

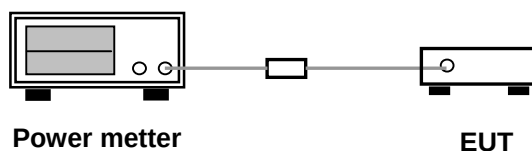

5.2.4 Test Result : See spectrum analyzer plots below

- Temperature: 25°C
- Relative Humidity: 60 %
- Duty Cycle of the Equipment During the Test: 100%
- Test Engineer: Sam Lee

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (mWatt)	Limits (dBm)
01	2412	12.90	19.50	30 dBm
06	2437	12.21	13.63	30 dBm
11	2462	11.35	13.65	30 dBm

5.3. Test of Peak Power Spectral Density


5.3.1 Measuring Instruments

Item 19 of the table on section 6.

5.3.2 Test Procedures

1. The transmitter output is connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum
4. Set the span to 1.5MHz and the sweep time to 500s and record the maximum peak value.
5. Repeated the 1~4 for the middle and highest channel of the EUT.

5.3.3 Test Setup Layout

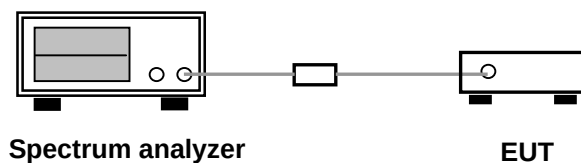


5.3.4 Test Result : See spectrum analyzer plots below

- Temperature: 25°C
- Relative Humidity: 60 %
- Duty Cycle of the Equipment During the Test: 100%
- Test Engineer: Sam Lee

Channel	Frequency (MHz)	Power Density (dBm)	Limits (dBm)
01	2412	-10.04	8
06	2437	-12.93	8
11	2462	-12.12	8




(Channel 01) :

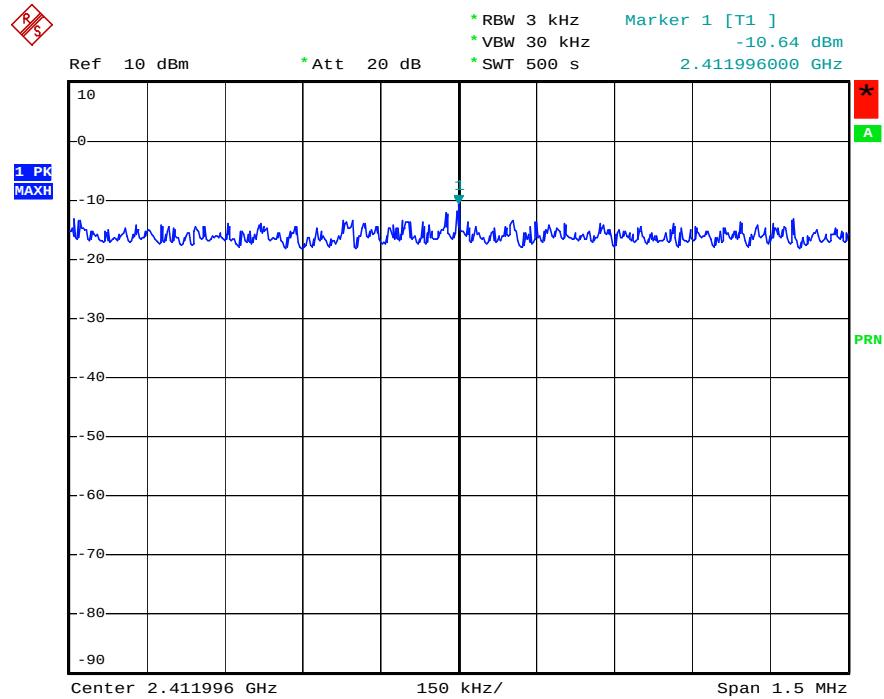

Date: 17.AUG.2004 22:09:41


(Channel 06) :

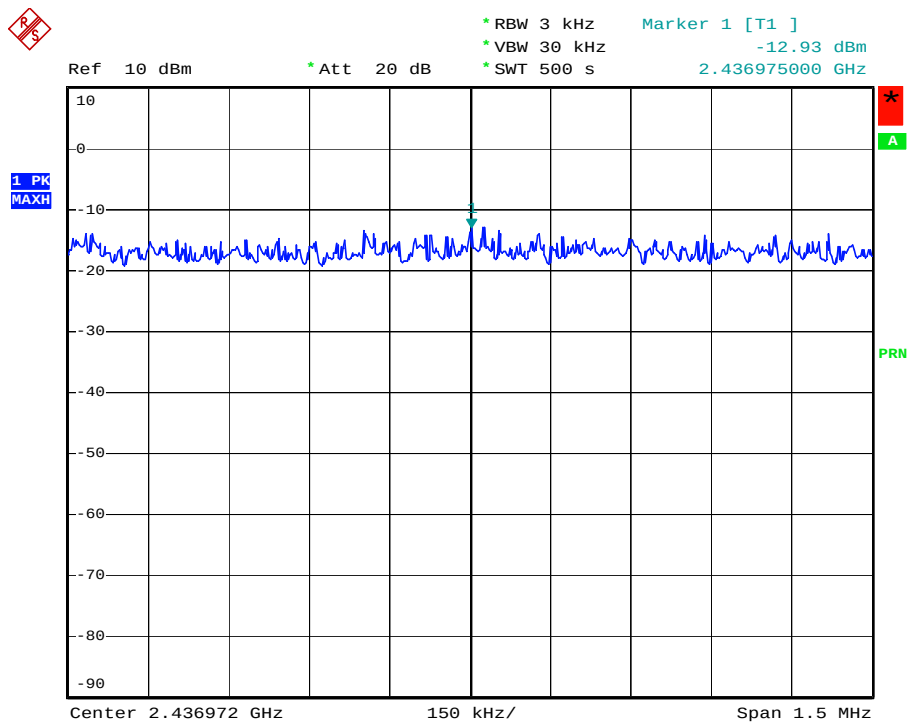

Date: 17.AUG.2004 22:11:38



(Channel 11) :

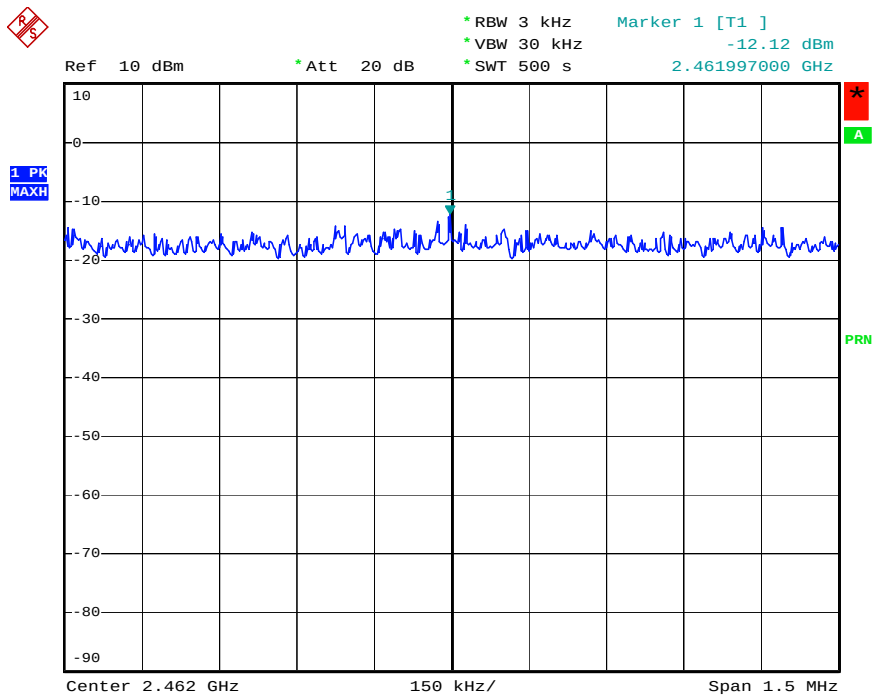

Date: 17.AUG.2004 22:14:39

5.4. Test of Band Edges Emission

5.4.1 Measuring Instruments

Item 19 of the table on section 6.

5.4.2 Test Procedures

1. The transmitter is set to the lowest channel.
2. The transmitter output was connected to the spectrum analyzer via a cable and cable loss is used as the offset of the spectrum analyzer.
3. Set both RBW and VBW of spectrum analyzer to 100KHz with convenient frequency span including 100MHz bandwidth from lower band edge.
4. The lowest band edges emission was measured and recorded.
5. The transmitter set to the highest channel and repeated 2~4.

5.4.3 Test Result :

- Test Engineer: Sam Lee

(A) Left Edge

The band edge emission plot shows 62.72dB delta between carrier maximum power and local maximum emission in the restricted band.

CH01 Carrier power strength (dBuV/m)	Delta (dB)	The maximum field strength in restrict band (dBuV/m)	Limit (dBuV/m)	Margin (dB)
97.18	62.72	34.46	54.00	-19.54


(B) Right Edge

The band edge emission plot shows 61.77 dB delta between carrier maximum power and local maximum emission in the restricted band.

CH11 Carrier power strength (dBuV/m)	Delta (dB)	The maximum field strength in restrict band (dBuV/m)	Limit (dBuV/m)	Margin (dB)
94.04	61.77	32.27	54.00	-21.73


* The maximum field strength in restricted band is the emission of carrier power strength subtract to the delta between carrier maximum power and local maximum emission in the restricted band.

(Channel 01) :

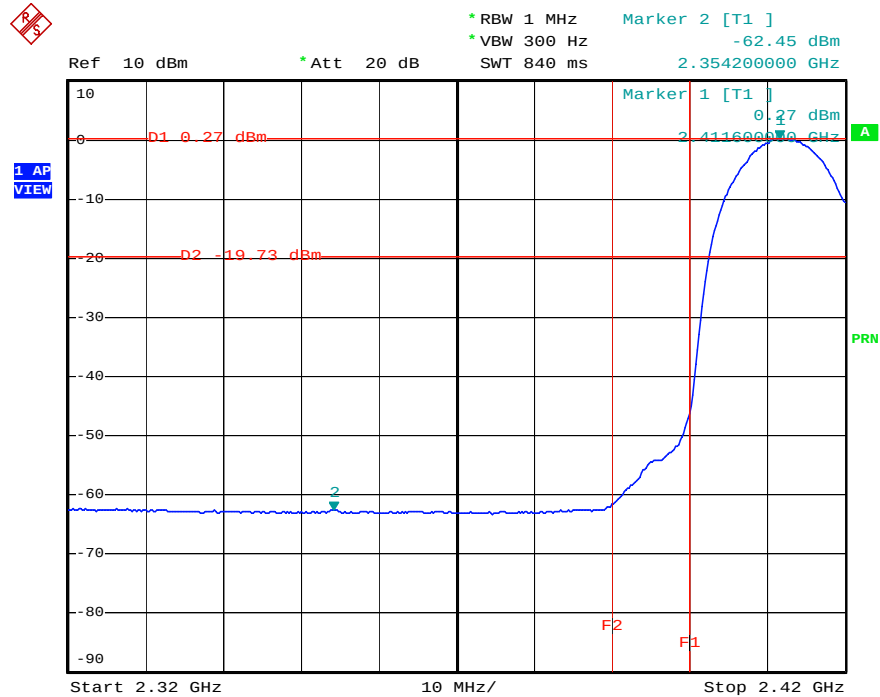

Date: 17.AUG.2004 22:21:55

(Channel 11) :

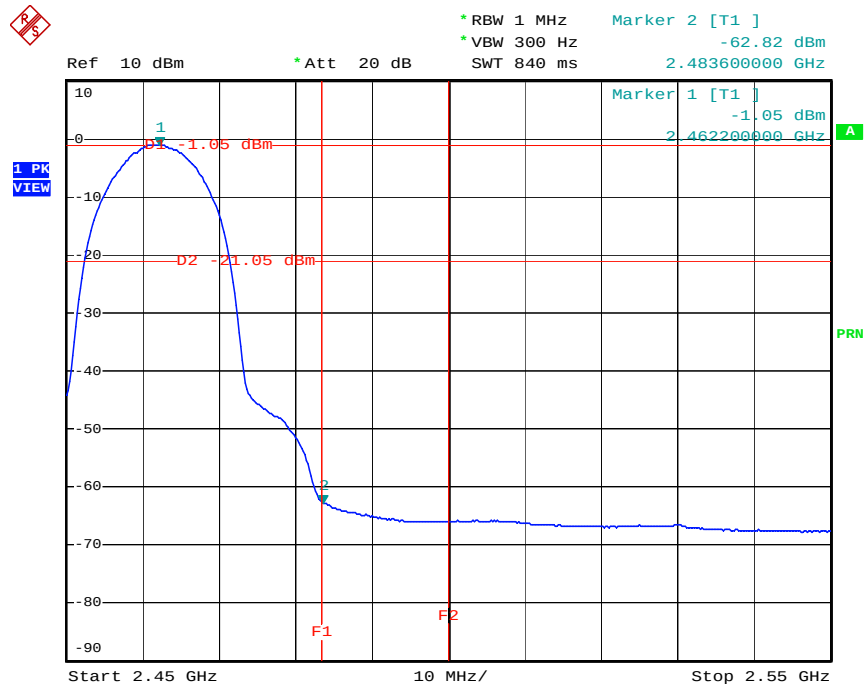

Date: 17.AUG.2004 22:19:30

Observation : All emissions in the 100kHz bandwidth are 20dB lower than the carrier strength

5.5. Test of AC Power Line Conducted Emission

5.5.1 Measuring Instruments

Please reference item 1~7 in chapter 6 for the instruments used for testing.

5.5.2 Test Procedures

1. Configure the EUT according to ANSI C63.4.
2. The EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least
3. 80 centimeters from any other grounded conducting surface.
4. Connect EUT to the power mains through a line impedance stabilization network (LISN).
5. All the support units are connected to the other LISNs. The LISN should provides 50uH/50ohms coupling impedance.
6. The frequency range from 150 KHz to 30 MHz was searched.
7. Use the Channel & Power Controlling software to make the EUT working on selected channel and expected output power, then use the "H" Patter Generator software to make the supporting equipments stay on working condition.
8. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
9. The measurement has to be done between each power line and ground at the power terminal for each RF channel. Only one RF channel has to be investigated since this test is independent with the RF channel selection.

5.5.3 Test Result of Conducted Emission

Test Mode	RF Link	Tested By	Peter Lin
Temperature / Humidity	26.6deg. C / 51%		

Line to Ground

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.150	50.11	-15.89	66.00	49.98	0.10	0.03	QP
2	0.150	40.81	-15.19	56.00	40.68	0.10	0.03	Average
3	0.178	48.75	-15.83	64.58	48.62	0.10	0.03	QP
4	0.178	37.90	-16.68	54.58	37.77	0.10	0.03	Average
5	0.207	42.71	-20.60	63.31	42.58	0.10	0.03	QP
6	0.207	37.77	-15.54	53.31	37.64	0.10	0.03	Average
7	0.237	36.02	-26.18	62.20	35.89	0.10	0.03	QP
8	0.237	29.31	-22.89	52.20	29.18	0.10	0.03	Average
9	0.264	30.02	-21.28	51.30	29.89	0.10	0.03	Average
10	0.264	38.36	-22.94	61.30	38.23	0.10	0.03	QP
11	0.298	36.61	-23.69	60.30	36.48	0.10	0.03	QP
12	0.298	29.86	-20.44	50.30	29.73	0.10	0.03	Average

Neutral to Ground

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.151	40.64	-15.30	55.94	40.51	0.10	0.03	Average
2	0.151	47.99	-17.95	65.94	47.86	0.10	0.03	QP
3	0.176	37.37	-17.30	54.67	37.24	0.10	0.03	Average
4	0.176	48.76	-15.91	64.67	48.63	0.10	0.03	QP
5	0.205	44.30	-19.11	63.41	44.17	0.10	0.03	QP
6	0.205	39.12	-14.29	53.41	38.99	0.10	0.03	Average
7	0.235	37.67	-24.59	62.26	37.54	0.10	0.03	QP
8	0.235	30.22	-22.04	52.26	30.09	0.10	0.03	Average
9	0.264	39.71	-21.58	61.29	39.58	0.10	0.03	QP
10	0.264	32.35	-18.94	51.29	32.22	0.10	0.03	Average
11	0.299	29.64	-20.64	50.28	29.51	0.10	0.03	Average
12	0.299	35.12	-25.16	60.28	34.99	0.10	0.03	QP


5.5.4 Photographs of Conducted Emission Test Configuration

- The photographs show the configuration that generates the maximum emission.


FRONT VIEW



REAR VIEW

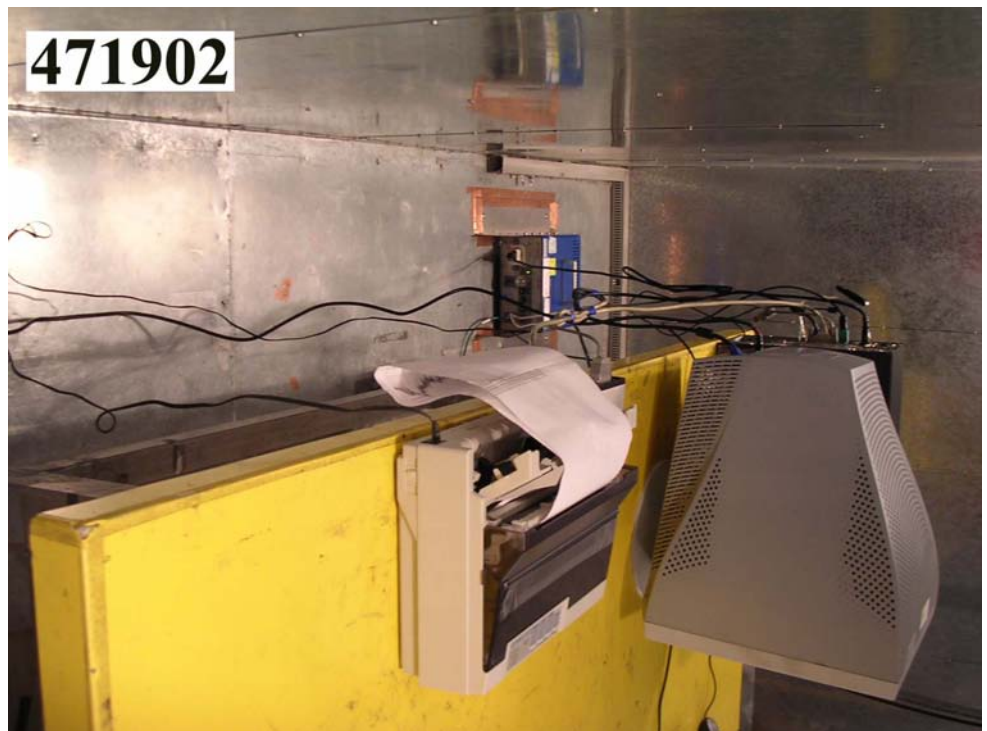

SIDE VIEW

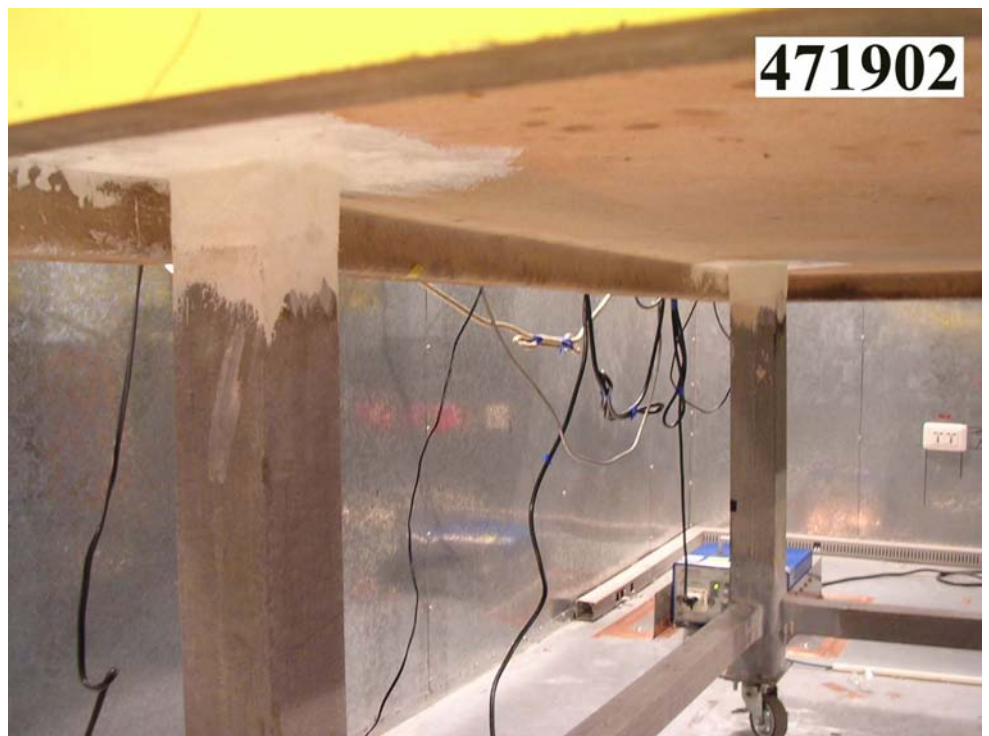

5.6. Test of Spurious Radiated Emission


5.6.1 Measuring Instruments

Please reference item 8~19 in chapter 6 for the instruments used for testing.

5.6.2 Test Procedures

1. Configure the EUT according to ANSI C63.4.
2. The EUT was placed on the top of the turn table 0.8 meter above ground.
3. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turn table.
4. Power on the EUT and all the supporting units.
5. The turn table was rotated by 360 degrees to determine the position of the highest radiation.
6. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
7. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turn table was rotated (from 0 degree to 360 degrees) to find the maximum reading.
8. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
9. For emission above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
10. If the emission level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz and average method for above the 1GHz. the reported.
11. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB higher than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

5.6.3 Test Setup Layout

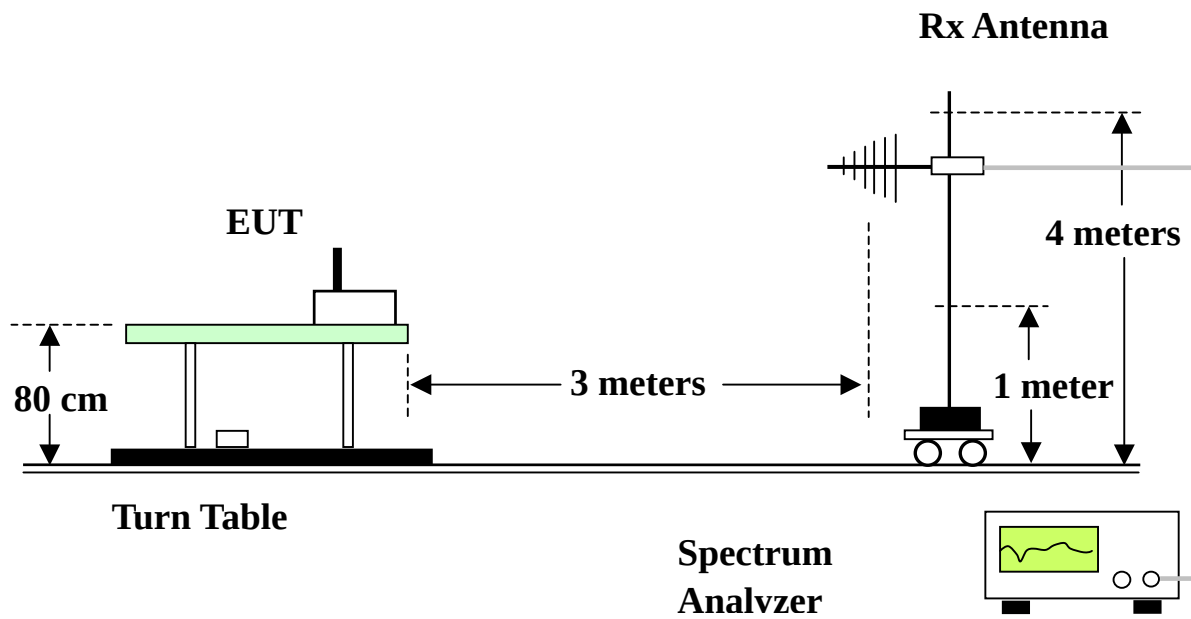



5.6.4 Test Results and Limit

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

Test Mode	CH11	Temperature	25 deg. C	Tested By	Steve Chen
Freq. Range	30MHz~1GHz	Humidity	64%		

(A) Polarization: Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	52.950	20.57	-19.43	40.00	38.07	10.15	0.34	27.99	Peak	---	---
2	113.300	24.86	-18.64	43.50	41.73	10.49	0.51	27.87	Peak	---	---
3	183.510	31.29	-12.21	43.50	44.34	13.91	0.77	27.73	Peak	---	---
1	200.000	33.57	-9.93	43.50	44.04	16.20	1.03	27.70	Peak	151	128
2	432.000	29.79	-16.21	46.00	40.32	16.24	1.32	28.09	Peak	---	---
3	500.000	27.83	-18.17	46.00	37.82	17.35	1.36	28.70	Peak	---	---
4	832.000	28.95	-17.05	46.00	35.34	20.69	1.56	28.64	Peak	---	---

(B) Polarization: Vertical

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	68.590	24.83	-15.17	40.00	43.47	8.96	0.36	27.96	Peak	---	---
2	112.620	23.87	-19.63	43.50	40.70	10.48	0.56	27.87	Peak	---	---
3	129.620	22.94	-20.56	43.50	38.82	11.34	0.62	27.84	Peak	---	---
1	500.000	23.79	-22.21	46.00	33.78	17.35	1.36	28.70	Peak	---	---
2	665.600	28.83	-17.17	46.00	36.92	19.10	1.54	28.73	Peak	---	---
3	832.000	30.24	-15.76	46.00	36.63	20.69	1.56	28.64	Peak	---	---



Test Mode	Mode 1 (2412MHz)	Temperature	25 deg. C	Tested By	Steve Chen
Freq. Range	1GHz~25GHz	Humidity	64%		

(A) Polarization: Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1388.000	43.11	-10.89	54.00	59.36	24.92	1.39	42.56	Average	---	---
2	1452.000	44.16	-9.84	54.00	60.18	25.10	1.46	42.58	Average	---	---
3	1452.000	51.25	-22.75	74.00	67.27	25.10	1.46	42.58	Peak	---	---
4	1572.000	42.97	-11.03	54.00	58.58	25.52	1.49	42.62	Average	---	---

(B) Polarization: Vertical

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1198.000	42.50	-11.50	54.00	59.38	24.38	1.22	42.48	Average	---	---
2	1318.000	46.24	-7.76	54.00	62.69	24.72	1.36	42.53	Average	102	181
3	1462.000	45.28	-8.72	54.00	61.28	25.13	1.46	42.59	Average	---	---



Test Mode	Mode 2 (2437MHz)	Temperature	25 deg. C	Tested By	Steve Chen
Freq. Range	1GHz~25GHz	Humidity	64%		

(A) Polarization: Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1190.000	39.32	-14.68	54.00	56.22	24.36	1.22	42.48	Average	---	---
2	1326.000	46.91	-7.09	54.00	63.34	24.75	1.35	42.53	Average	101	128
3	1460.000	46.58	-7.42	54.00	62.57	25.13	1.46	42.58	Average	---	---

(B) Polarization: Vertical

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1332.000	43.59	-10.41	54.00	60.00	24.77	1.35	42.53	Average	---	---
2	1454.000	45.49	-8.51	54.00	61.50	25.11	1.46	42.58	Average	---	---
3	2086.000	46.19	-7.81	54.00	59.87	27.34	1.66	42.68	Average	---	---



Test Mode	Mode 3 (2462MHz)	Temperature	25 deg. C	Tested By	Steve Chen
Freq. Range	1GHz~25GHz	Humidity	64%		

(A) Polarization: Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1460.000	47.65	-6.35	54.00	63.64	25.13	1.46	42.58	Average	105	149
2	1724.000	44.23	-9.77	54.00	59.34	26.09	1.45	42.65	Average	---	---
3	1998.000	40.00	-14.00	54.00	54.07	27.11	1.52	42.70	Average	---	---

(B) Polarization: Vertical

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1324.000	43.52	-10.48	54.00	59.95	24.74	1.36	42.53	Average	---	---
2	1454.000	44.28	-9.72	54.00	60.29	25.11	1.46	42.58	Average	---	---
3	2062.000	42.57	-11.43	54.00	56.32	27.27	1.66	42.68	Average	---	---


5.6.5 Photographs of Radiated Emission Test Configuration

- The photographs show the configuration that generates the maximum emission.

FRONT VIEW



REAR VIEW

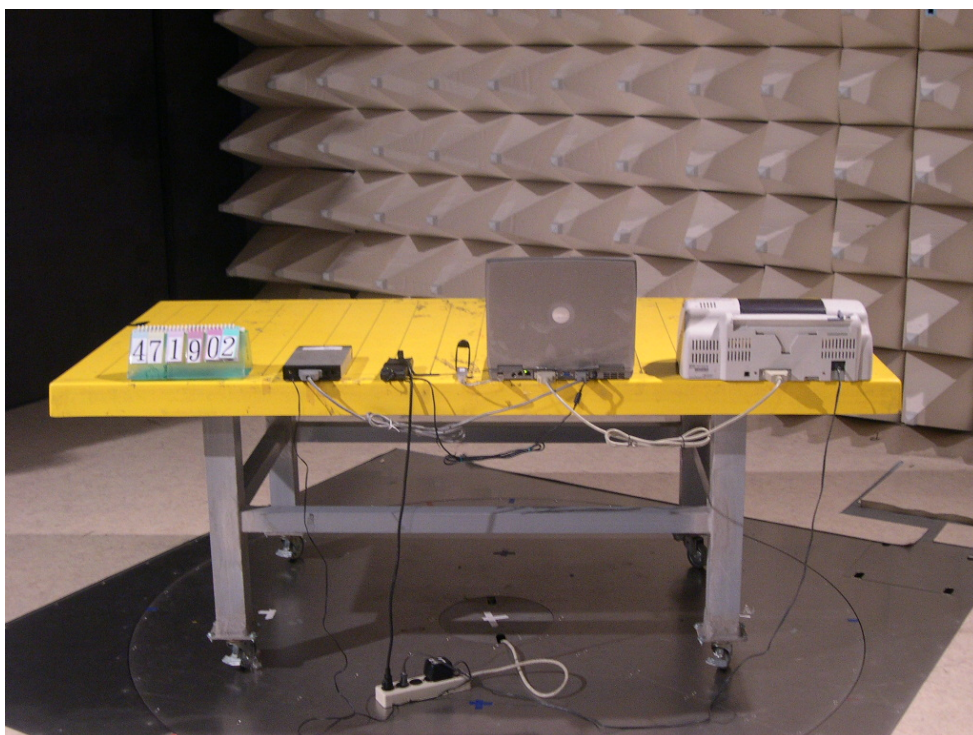



5.7. Antenna Requirements

5.7.1 Standard Applicable

47 CFR Part15 Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

47 CFR Part15 Section 15.247 (b):

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

If the intentional radiator is used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

5.7.2 Antenna Connected Construction

The antenna used in this product is Line antenna without antenna connector.

5.8. RF Exposure

5.8.1 Limit For Maximum Permissible Exposure (MPE)

This product can be classified as mobile device, so the 2.5cm separation distance warning is required.
In this section, the power density at 20cm location is calculated to examine if it is lower than the limit.

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500	-	-	F/300	6
1500-100,000	-	-	5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500	-	-	F/1500	30
1500-100,000	-	-	1.0	30

F = frequency in MHz

*Plane-wave equivalent power density

5.8.2 MPE Calculation Method

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d}$$

$$\text{Power Density: } Pd \text{ (mW/cm}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Peak RF output power (mW)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance, d=2.5cm, as well as the gain of the used antenna, the RF power density can be obtained.

5.8.3 Calculated Result and Limit

Channel No.	Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)
Channel 1	1	1.26	12.9000	19.4984	0.3127	1
Channel 6	1	1.26	12.2100	16.6341	0.2668	1
Channel 11	1	1.26	11.3500	13.6458	0.2188	1

From the calculated result shown in above table, the power density is lower than limit at location 2.5cm far away.

6. List of Measuring Equipments Used

Items	Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
1	EMC Receiver	R&S	ESCS 30	100132	9 KHz – 2.75 GHz	Jun. 23, 2004	Conduction (CO01-HY)
2	LISN	MessTec	NNB-2/16Z	2001/008	9 KHz – 30 MHz	May 03, 2004	Conduction (CO01-HY)
3	LISN (Support Unit)	MessTec	NNB-2/16Z	2001/009	9 KHz – 30 MHz	Apr. 19, 2004	Conduction (CO01-HY)
4	EMI Filter	LINDGREN	LRE-2060	1004	< 450 Hz	N/A	Conduction (CO01-HY)
5	EMI Filter	LINDGREN	N6006	201052	0 ~ 60 Hz	N/A	Conduction (CO01-HY)
6	RF Cable-CON	Suhner Switzerland	RG223/U	CB029	9KHz~30MHz	Dec. 24, 2003	Conduction (CO01-HY)
7	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz~1GHz 3m	Jun. 21, 2004	Radiation (03CH03-HY)
8	Spectrum analyzer	R&S	FSP40	100004	9KHz~40GHz	Aug. 23, 2003	Radiation (03CH03-HY)
9	Amplifier	HP	8447D	2944A09072	100KHz – 1.3GHz	Nov. 05, 2003	Radiation (03CH03-HY)
10	Biconical Antenna	SCHWARZBECK	VHBB 9124	301	30MHz –200MHz	Jul. 28, 2004	Radiation (03CH03-HY)
11	Log Antenna	SCHWARZBECK	VUSLP 9111	221	200MHz -1GHz	Jul. 28, 2004	Radiation (03CH03-HY)
12	RF Cable-R03m	Jye Bao	RG142	CB021	30MHz~1GHz	Dec. 03, 2003	Radiation (03CH03-HY)
13	Amplifier	MITEQ	AFS44	849984	100MHz~26.5GHz	Mar. 26, 2004	Radiation (03CH03-HY)
14	Horn Antenna	EMCO	3115	6821	1GHz – 18GHz	Sep. 12, 2003	Radiation (03CH03-HY)
15	Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
16	Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
17	Horn Antenna	Schwarzbeck	BBHA9170	154	15GHz~40GHz	Jun. 09, 2004	Radiation (03CH03-HY)
18	RF Cable-HIGH	Jye Bao	RG142	CB030-HIGH	1GHz~29.5GHz	Dec. 05, 2003	Radiation (03CH03-HY)

※ Calibration Interval of instruments listed above is one year.

Items	Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
19	Spectrum analyzer	R&S	FSP7	838858/014	9KHZ~7GHZ	Sep. 03, 2003	Conducted (TH01-HY)
20	Power meter	R&S	NRVS	100444	DC~40GHz	Jun. 15, 2004	Conducted (TH01-HY)
21	Power sensor	R&S	NRV-Z55	100049	DC~40GHz	Jun. 15, 2004	Conducted (TH01-HY)
22	Power Sensor	R&S	NRV-Z32	100057	30MHz-6GHz	Jun. 15, 2004	Conducted (TH01-HY)
23	AC power source	HPC	HPA-500W	HPA-9100024	AC 0~300V	Jun. 16, 2004	Conducted (TH01-HY)
24	AC power source	G.W.	GPC-6030D	C671845	DC 1V~60V	Nov. 06, 2003	Conducted (TH01-HY)
25	Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 01, 2003	Conducted (TH01-HY)
26	RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz~7GHz	Jan. 01, 2004	Conducted (TH01-HY)
27	RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz~1GHz	Jan. 01, 2004	Conducted (TH01-HY)


※ Calibration Interval of instruments listed above is one year.

APPENDIX A. Photographs of EUT









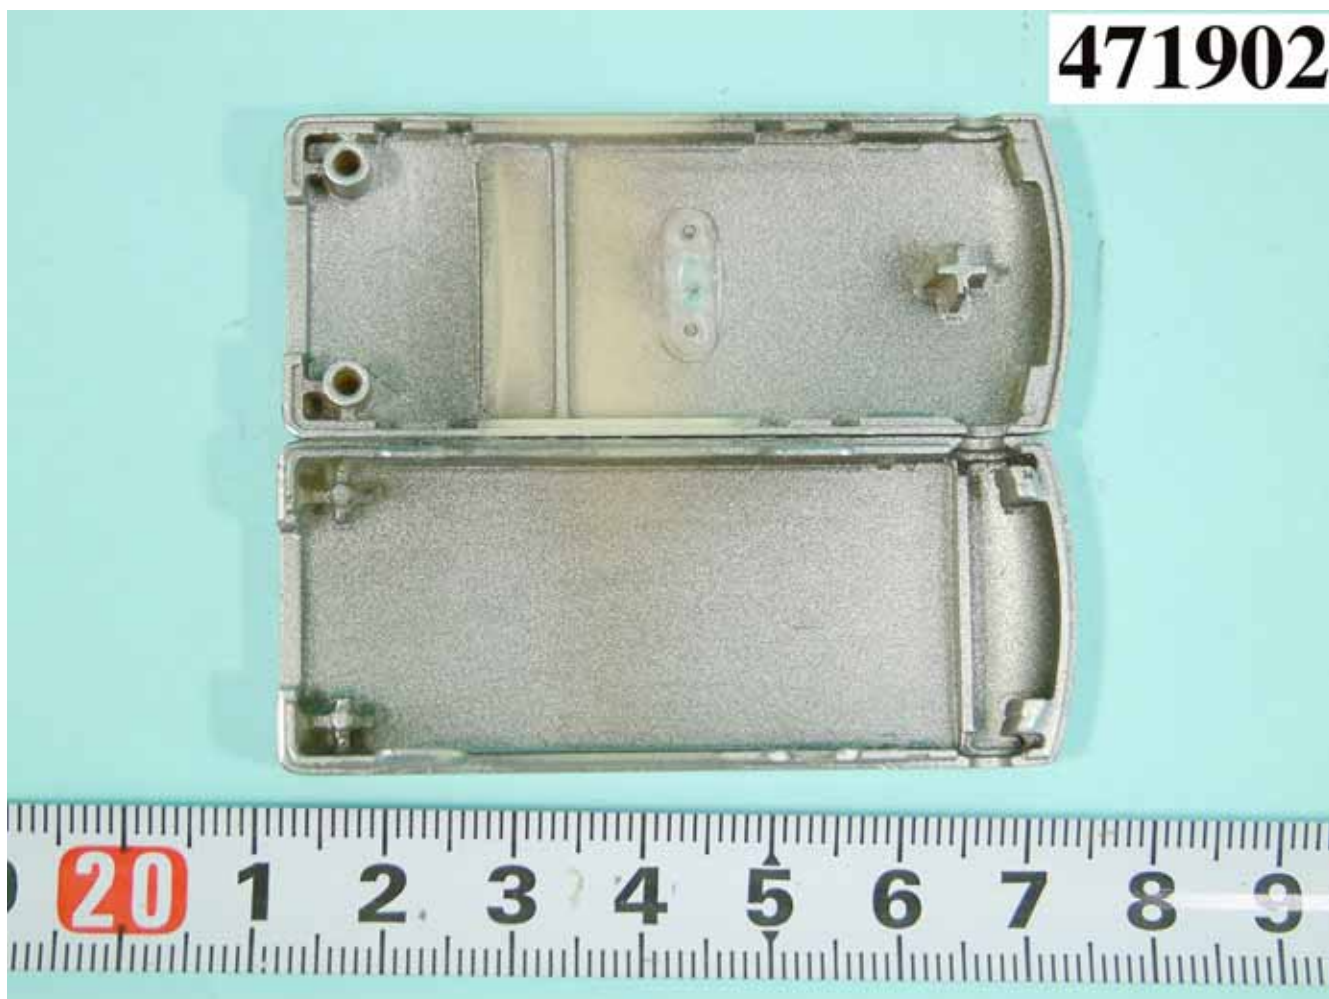



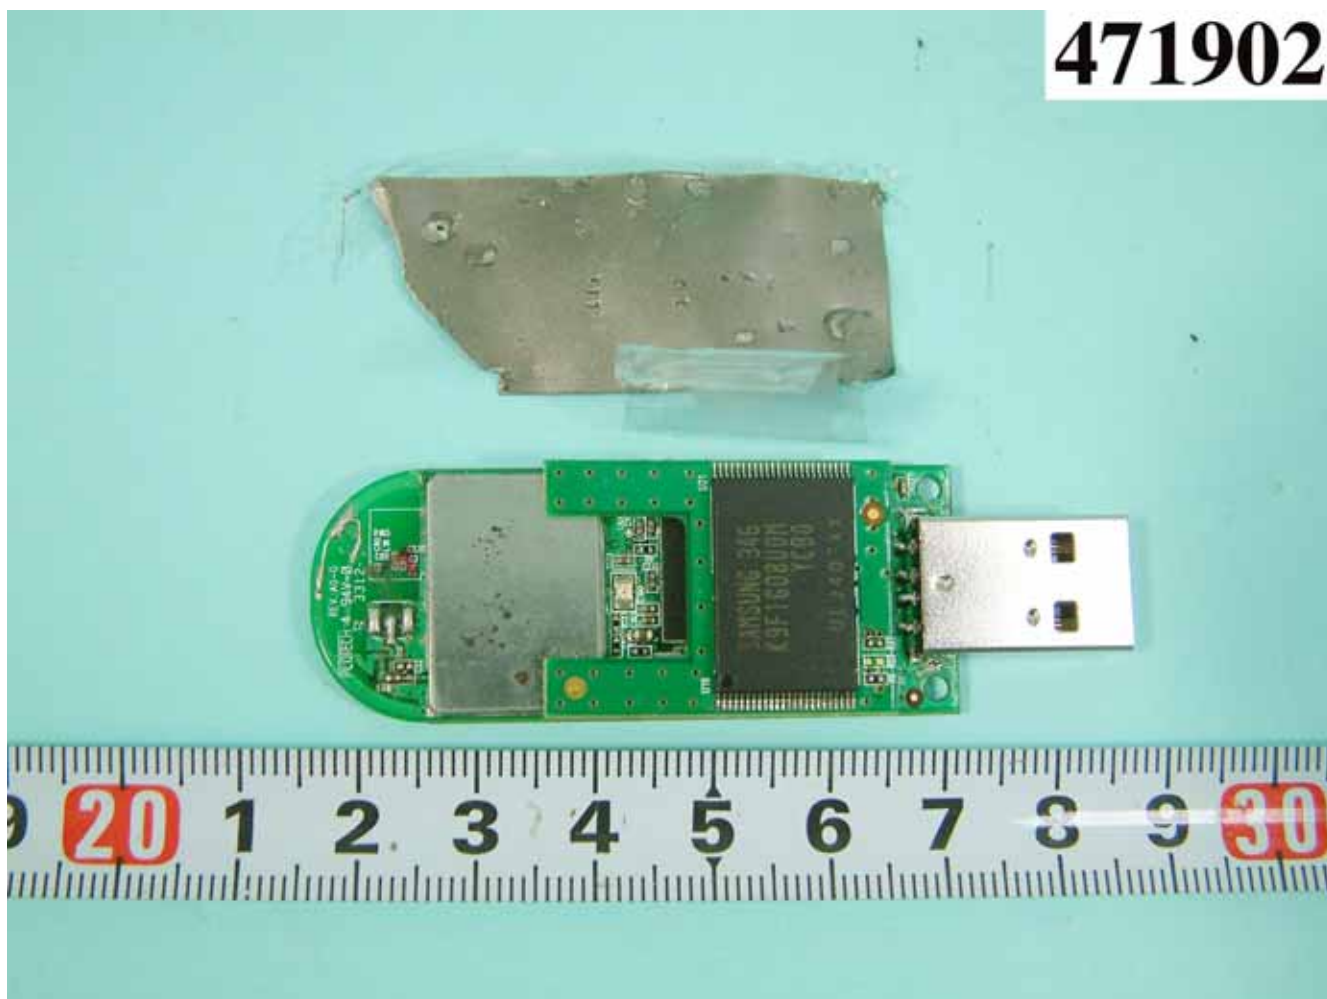

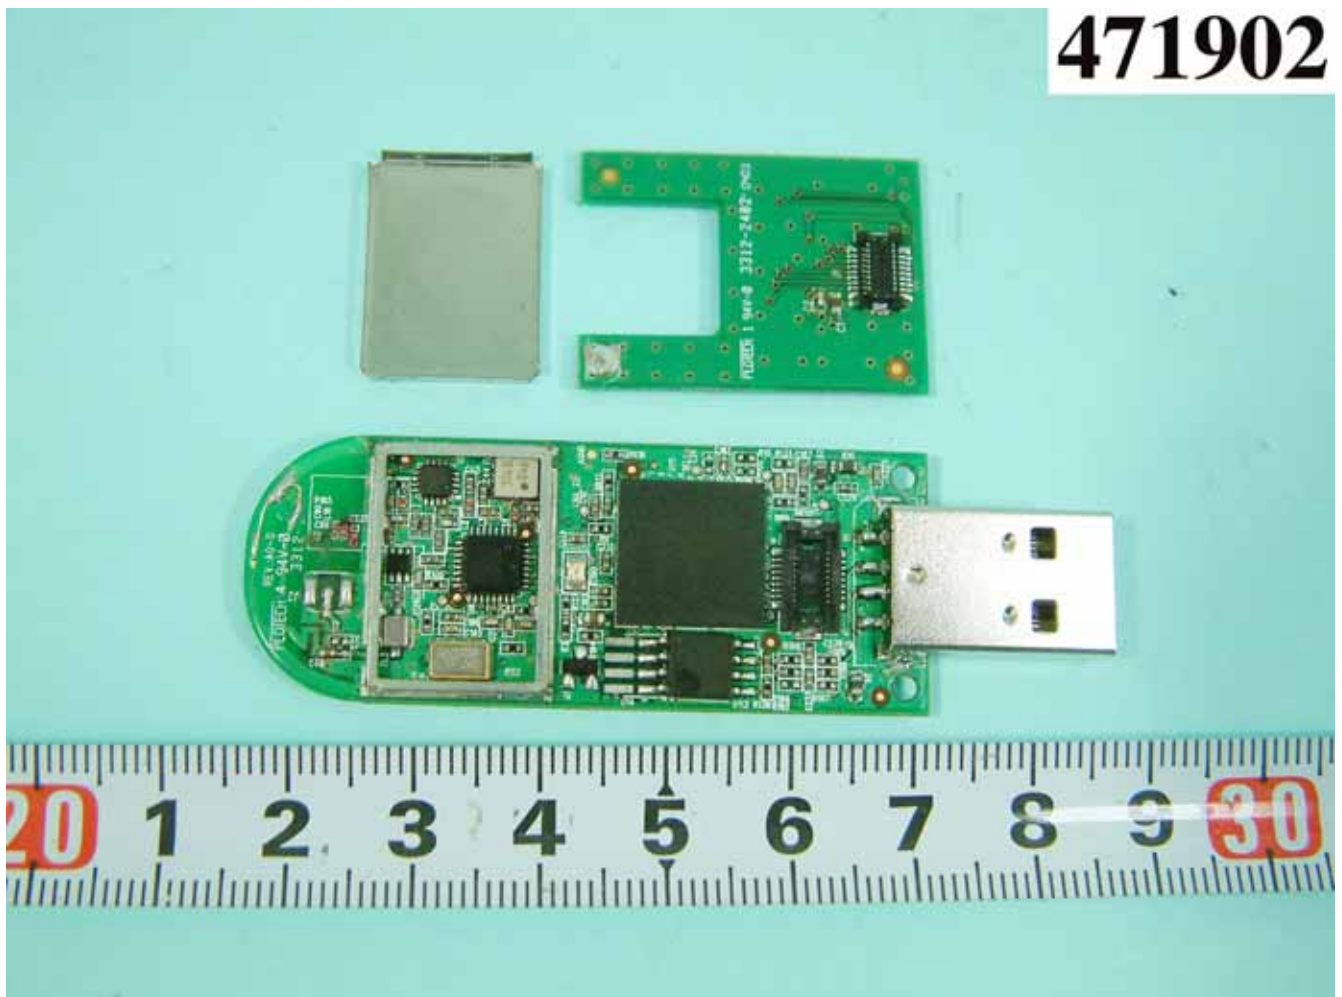

471902

