

EMC

TEST REPORT

Report No.: EME-040888
Model No.: 4001/27
Issued Date: Sep. 13, 2004

Applicant: ShanTou Botong Electronic Technology Co., Ltd
201/B, HuangShan Building, HuangShan Road,
ShanTou City, GuangDong, China

Test By: Intertek Testing Services Taiwan Ltd.
No. 11, Lane 275, Ko-Nan 1 Street, Chia-Tung Li,
Shiang-Shan District, Hsinchu City, Taiwan

This test report consists of 12 pages in total. It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of Intertek Laboratory. The test result(s) in this report only applies to the tested sample(s).

Project Engineer

Jackey Chiu

Jackey Chiu

Reviewed By

Jerry Liu

Jerry Liu

Table of Contents

Summary of Tests	3
1. General information.....	4
1.1 Identification of the EUT.....	4
1.2 Additional information about the EUT.....	4
1.3 Antenna description.....	4
2. Test specifications.....	5
2.1 Test standard	5
2.2 Operation mode.....	5
2.3 Test equipment	6
3. Radiated emission test FCC 15.227 (a)/(b)	7
3.1 Operating environment.....	7
3.2 Test setup & procedure	7
3.3 Emission limit	8
3.3.1 Fundamental and harmonics emission limits.....	8
3.3.2 General radiated emission limits.....	9
3.4 Radiated emission test data.....	10
3.4.1 Fundamental Radiated Emission Data.....	10
3.4.2 Harmonic Radiated Emission Data	11

Summary of Tests**Flying Saucer -Model: 4001/27**
FCC ID: SIS4001-27M

Test	Reference	Results
Field strength of fundamental frequency	15.227(a)	Complies
Radiated emission	15.227(b), 15.209	Complies

1. General information**1.1 Identification of the EUT**

Applicant: ShanTou Botong Electronic Technology Co., Ltd
Product: Flying Saucer
Model No.: 4001/27
FCC ID.: SIS4001-27M
Frequency Range: 27.145MHz
Channel Number: 1 channel
Frequency of Each Channel: 27.145MHz
Type of Modulation: FM
Power Supply: 9Vdc
Power Cord: N/A
Sample Received: Sep. 8, 2004
Test Date(s): Sep. 8, 2004 ~ Sep. 9, 2004

1.2 Additional information about the EUT

The EUT is a Flying Saucer, and was defined as information technology equipment.

For more detail features, please refer to User's manual as file name "Installation guide.pdf"

1.3 Antenna description

The EUT uses a permanently connected antenna.

Antenna Gain: 0dBi max
Antenna Type: Monopole antenna
Connector Type: N/A

2. Test specifications

2.1 Test standard

The EUT was performed according to the procedures in FCC Part 15 Subpart C Paragraph 15.227.

The test of radiated measurements according to FCC Part15 Section 15.33(a) had been conducted and the field strength of this frequency band were all meet limit requirement, thus we evaluate the EUT pass the specified test.

2.2 Operation mode

Transmitter:

In Radiated Emission test, it worked in the status of continuously transmitting.

After verifying three setups of transmitter, we found the worst case was occurred at setup 2. The final test was excute under this condition and recorded in this report.

Receiver:

In Radiated Emission test, it worked in normal operating mode.

2.3 Test equipment

Equipment	Brand	Frequency range	Model No.	Intertek ID No.	Next Cal. Date
EMI Test Receiver	Rohde & Schwarz	9kHz~2.75GHz	ESCS 30	EC346	04/13/2005
EMI Test Receiver	Rohde & Schwarz	20Hz~26.5GHz	ESMI	EC317	07/14/2005
Spectrum Analyzer	Rohde & Schwarz	9kHz~30GHz	FSP 30	EC353	07/13/2005
Bilog Antenna	SCHWARZBECK	25MHz~1.7GHz	VULB 9160	EC368	05/20/2005
Turn Table	HDGmbH	N/A	DS 420S	EP317-3	N/A
Antenna Tower	HDGmbH	N/A	MA 240	EP317-2	N/A

Note: The above equipments are within the valid calibration period.


3. Radiated emission test FCC 15.227 (a)/(b)

3.1 Operating environment

Temperature: 22 °C (10-40°C)
 Relative Humidity: 54 % (10-90%)
 Atmospheric Pressure 1023 hPa (860-1060hPa)

3.2 Test setup & procedure


The Diagram below shows the test setup, which is utilized to make these measurements.

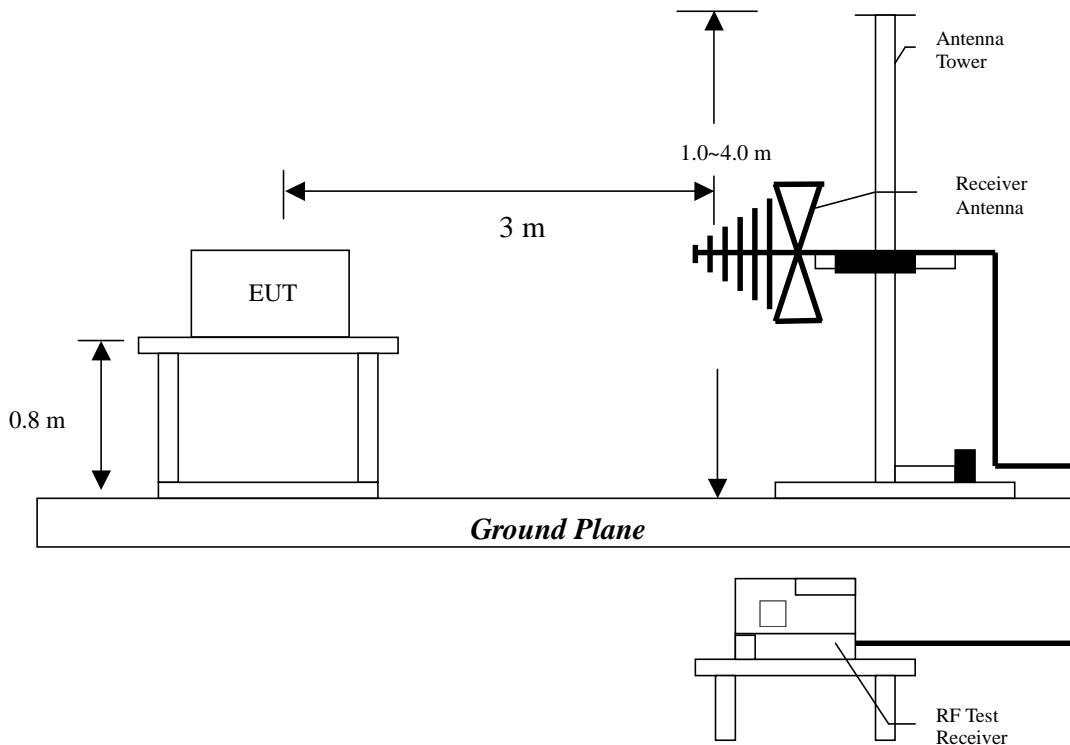

The signal is maximized through rotation and placement in the three orthogonal axes. Radiated emissions were invested cover the frequency range from 30MHz to 1000MHz using a receiver RBW of 120kHz record QP reading, and the frequency over 1GHz using a spectrum analyzer RBW of 1MHz and 10Hz VBW record Average reading. (15.209 paragraph), the Peak reading (1MHz RBW/VBW) recorded also on the report. The EUT for testing is arranged on a wooden turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and the whole system. During the test, all cables were arranged to produce worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meters and down to 1 meter.

The measurement for radiated emission will be done at the distance of three meters unless the signal level is too low to measure at that distance. In the case of the reading under noise floor, a pre-amplifier is used and/or the test is conducted at a closer distance. And then all readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance.

The signal is maximized through rotation and placement in the three orthogonal axes.

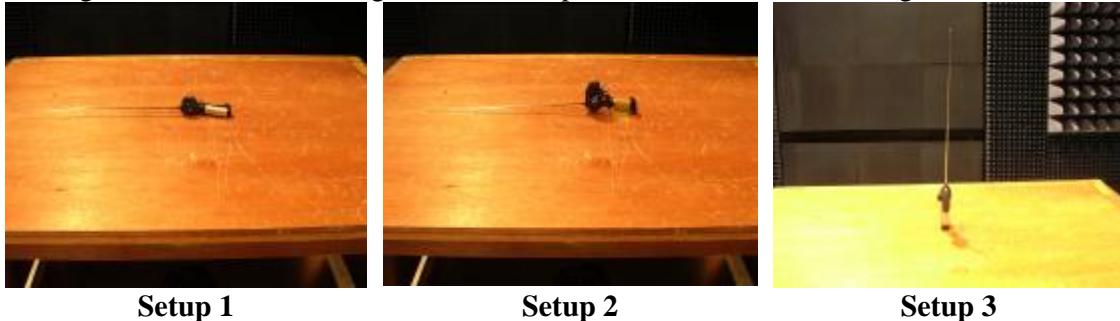

After verifying three axes, we found the maximum electromagnetic field was occurred at setup 2 configuration. The final test data was executed under this configuration.

The EUT configuration please refer to the “Spurious set-up photo.pdf”.

3.3 Emission limit

3.3.1 Fundamental and harmonics emission limits

Frequency (MHz)	Field Strength of Fundamental	
	(uV/m@3m)	(dBuV/m@3m)
26.96-27.28	10000	80

The emission limit above is based on measurement instrumentation employing an average detector. The provisions in Section 15.35 for limiting peak emissions apply.

3.3.2 General radiated emission limits

Frequency MHz	15.209 Limits (dB μ V/m@3m)
30-88	40
88-216	43.5
216-960	46
Above 960	54

Remark:

1. In the above table, the tighter limit applies at the band edges.
2. Distance refers to the distance in meters between the measuring antenna and the closed point of any part of the device or system

Uncertainty was calculated in accordance with NAMAS NIS 81.

Expanded uncertainty ($k=2$) of radiated emission measurement is ± 4.98 dB.

3.4 Radiated emission test data**3.4.1 Fundamental Radiated Emission Data**

EUT : 4001/27
Test Unit : Tx
Worst Case : Setup 2
Antenna Length : Full extend

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polarize. (H/V)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV)	Margin (dB)	Antenna high (cm)	Turn Table angle (degree)
27.145	PK	V	12.83	16.30	29.13	100.00	-70.87	283.00	19.00
27.145	AV	V	12.83	13.80	26.63	80.00	-53.37	283.00	19.00
27.145	PK	H	12.83	27.00	39.83	100.00	-60.17	198.00	336.00
27.145	AV	H	12.83	23.30	36.13	80.00	-43.87	198.00	336.00

Remark:

1. Corrected Level = Reading Level + Correction Factor
2. Correction Factor = Antenna Factor + Cable Loss

3.4.2 Harmonic Radiated Emission Data

EUT : 4001/27
Test Unit : Tx
Worst Case : Setup 2
Antenna Length : Full extend

Frequency (MHz)	Spectrum Analyzer Detector	Antenna	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV)	Margin (dB)	Antenna high (cm)	Turn Table angle (degree)
54.280	QP	V	13.07	11.70	24.77	40.00	-15.23	100.00	254.00
81.430	QP	V	9.50	11.90	21.40	40.00	-18.60	150.00	104.00
108.580	QP	V	10.92	8.50	19.42	43.50	-24.08	130.00	267.00
144.600	QP	V	14.27	1.90	16.17	43.50	-27.33	141.00	162.00
162.010	QP	V	14.92	2.40	17.32	43.50	-26.18	132.00	108.00
271.450	QP	V	13.38	8.20	21.58	46.00	-24.42	162.00	138.00
190.010	QP	H	12.03	8.30	20.33	43.50	-23.17	192.00	110.00
217.600	QP	H	11.52	9.40	20.92	46.00	-25.08	106.00	106.00
244.300	QP	H	12.85	8.00	20.85	46.00	-25.15	161.00	182.00
271.450	QP	H	13.38	9.80	23.18	46.00	-22.82	136.00	48.00
298.600	QP	H	14.07	6.80	20.87	46.00	-25.13	102.00	110.00
325.740	QP	H	14.99	9.00	23.99	46.00	-22.01	100.00	59.00

Remark:

1. Corrected Level = Reading Level + Correction Factor
2. Correction Factor = Antenna Factor + Cable Loss

EUT : 4001/27

Test Unit : Rx

Test Condition : Normal operating mode

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polarize. (H/V)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV)	Margin (dB)	Antenna high (cm)	Turn Table angle (degree)
549.070	QP	V	19.60	13.50	33.10	46.00	-12.90	100.00	68.00
557.750	QP	V	19.60	6.50	26.10	46.00	-19.90	112.00	123.00
586.870	QP	V	20.62	6.30	26.92	46.00	-19.08	108.00	110.00
613.910	QP	V	20.88	3.40	24.28	46.00	-21.72	100.00	262.00
619.740	QP	V	20.88	2.60	23.48	46.00	-22.52	100.00	0.00
643.070	QP	V	21.32	1.30	22.62	46.00	-23.38	100.00	360.00
573.050	QP	H	19.99	1.60	21.59	46.00	-24.41	106.00	28.00
780.970	QP	H	23.49	4.90	28.39	46.00	-17.61	104.00	110.00
800.020	QP	H	23.89	3.60	27.49	46.00	-18.51	118.00	102.00
815.720	QP	H	23.89	5.60	29.49	46.00	-16.51	100.00	356.00
833.200	QP	H	24.46	3.30	27.76	46.00	-18.24	102.00	313.00
870.420	QP	H	24.39	7.60	31.99	46.00	-14.01	100.00	78.00

Remark:

1. Corrected Level = Reading Level + Correction Factor
2. Correction Factor = Antenna Factor + Cable Loss