

Straubing, June 18, 2008

T E S T - R E P O R T

No. 55465-070528-1 (Edition 2)

for

OMNIKEY 5325

Inductive Tag Reader for Access Control

Applicant: OMNIKEY GmbH

Test Specifications: FCC Code of Federal Regulations,
CFR 47, Part 15,
Sections 15.205, 15.207 and 15.209

Industry Canada Radio Standards
Specifications
RSS-Gen Issue 2, Section 7.2.2 and
RSS-210 Issue 7, Sections 2.2, 2.6
(Category I Equipment)

Note:

The test data of this report is related only to the individual item which has been tested. This report shall not be reproduced except in full extent without the written approval of the testing laboratory.

Table of Contents

1	Description of the Equipment Under Test (EUT)	3
2	Administrative Data.....	4
3	Identification of the Test Laboratory	5
4	Summary	6
5	Operation Mode and Configuration of EUT.....	7
6	Measurement Procedures.....	8
6.1	Bandwidth Measurements	8
6.2	Conducted AC Powerline Emission.....	9
6.3	Radiated Emission Measurement 9 kHz to 30 MHz	11
6.4	Radiated Emission in Fully or Semi Anechoic Room.....	13
6.5	Radiated Emission at Open Field Test Site.....	15
7	Photographs Taken During Testing	16
8	Test Results.....	22
8.1	Occupied Bandwidth.....	24
8.2	Designation of Emissions	28
8.3	Restricted Bands of Operation	29
8.4	Conducted Powerline Emission Measurement 150 kHz to 30 MHz.....	30
8.5	Radiated Emission Measurement 9 kHz to 30 MHz	32
8.6	Radiated Emission Measurement 30 MHz to 1 GHz	35
8.7	Exposure of Humans to RF Fields.....	36
9	Referenced Regulations	38
10	Revision History	39
11	Charts taken during testing	40

1 Description of the Equipment Under Test (EUT)

General data of EUT	
Type designation ¹ :	OMNIKEY 5325
Parts ² :	
Serial number(s):	SN OKCM532525070006
Manufacturer:	OMNIKEY GmbH
Type of equipment:	Inductive Tag Reader for Access Control
Version:	as received
FCC ID:	
Additional parts/accessories:	

Technical data of EUT	
Application frequency range:	
Frequency range:	126 kHz
Operating frequency:	126 kHz
Type of modulation:	ASK
Pulse train:	---
Pulse width:	---
Number of RF-channels:	1
Channel spacing:	---
Designation of emissions ³ :	10K0A1D
Type of antenna:	Integrated loop on printed board
Size/length of antenna:	8 x 6 cm
Connection of antenna:	<input type="checkbox"/> detachable <input checked="" type="checkbox"/> not detachable
Type of power supply:	DC supply over USB
Specifications for power supply:	nominal voltage: 5.00 V

¹ Type designation of the system if EUT consists of more than one part.

² Type designations of the parts of the system, if applicable.

³ Also known as "Class of Emission".

2 Administrative Data

Application details	
Applicant (full address):	OMNIKEY GmbH Ferihumerstraße 13 4040 Linz Austria
Contact person:	Mr. Jürgen Kastner
Contract identification:	
Receipt of EUT:	June 25, 2007
Date(s) of test:	June to November 2007
Note(s):	

Report details	
Report number:	55465-070528-1
Edition:	2
Issue date:	June 18, 2008

3 Identification of the Test Laboratory

Details of the Test Laboratory	
Company name:	Senton GmbH EMI/EMC Test Center
Address:	Aeussere Fruehlingstrasse 45 D-94315 Straubing Germany
Laboratory accreditation:	DAR-Registration No. DAT-P-171/94-02
FCC test site registration number	90926
Industry Canada test site registration:	IC 3050
Contact person:	Mr. Johann Roidt
	Phone: (+49) (0)9421 5522-0 Fax: (+49) (0)9421 5522-99

4 Summary

Summary of test results

The tested sample complies with the requirements set forth in the
Code of Federal Regulations CFR 47, Part 15, Sections 15.205, 15.207 and 15.209
of the Federal Communication Commission (FCC) and the
Radio Standards Specifications
RSS-Gen Issue 2, Section 7.2.2 and
RSS-210 Issue 7, Sections 2.2, 2.6 (Category I Equipment)
of Industry Canada (IC).

Personnel involved in this report

Laboratory Manager:



Mr. Johann Roidt

Responsible for testing:



Mr. Martin Steindl

Responsible for test report:

Mr. Martin Steindl

5 Operation Mode and Configuration of EUT

Operation Mode

The applicant provided a software to read both cards continuously. The contactless card was positioned in 1 cm distance.

Configuration of EUT

The EUT was configured as USB-device of a laptop PC

List of ports and cables

Port	Description	Classification ⁴	Cable type	Cable length
1	AC supply of laptop PC	ac power	Unshielded	1 m
2	USB interface	signal/control port	Shielded	2 m

List of devices connected to EUT

Item	Description	Type Designation	Serial no. or ID	Manufacturer
	Not Applicable			

List of support devices

Item	Description	Type Designation	Serial no. or ID	Manufacturer
1	Laptop PC	latitude		DELL
2				
3	Contact Card	ISABEL		ISASERVER
4	Tag	Smart ISO Prox II		HID Corp.

⁴ Ports shall be classified as ac power, dc power or signal/control port


6 Measurement Procedures

6.1 Bandwidth Measurements

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 2, section 2.202(a) CFR 47 Part 15, section 15.215(c) IC RSS-Gen Issue 2, sections 4.6.1 and 4.6.2 IC RSS-210 Issue 7, section A1.1.3 ANSI C63.4, annex H.6
Guide:	ANSI C63.4 / IC RSS-Gen Issue 2, sections 4.6.1 and 4.6.2
Measurement setup:	<input type="checkbox"/> Conducted: See below <input checked="" type="checkbox"/> Radiated: Radiated Emission Measurement 9 kHz to 30 MHz (6.3)
<p>If antenna is detachable bandwidth measurements shall be performed at the antenna connector (conducted measurement) when the transmitter is adjusted in accordance with the tune-up procedure, if applicable. The RF output terminals are connected to a spectrum analyzer. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). The electrical characteristics of the radio frequency load attached to the output terminals shall be stated, if applicable.</p> <p>If radiated measurements are performed the same test setups and instruments are used as with radiated emission measurements for the appropriate frequency range.</p> <p>The analyzer settings are specified by the test description of the appropriate test record(s).</p>	

6.2 Conducted AC Powerline Emission

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, section 15.207 IC RSS-Gen Issue 2, section 7.2.2
Guide:	ANSI C63.4 / CISPR 22
Conducted emission tests in the frequency range 150 kHz to 30 MHz are performed using Line Impedance Stabilization Networks (LISNs). To simplify testing with quasi-peak and average detector the following procedure is used:	
First the whole spectrum of emission caused by the equipment under test (EUT) is recorded with detector set to peak using CISPR bandwidth of 10 kHz. After that all emission levels having less margin than 10 dB to or exceeding the average limit are retested with detector set to quasi-peak. If average limit is kept with quasi-peak levels no additional scan with average detector is necessary. In cases of emission levels between quasi-peak and average limit an additional scan with detector set to average is performed.	
According to ANSI C63.4, section 13.1.3.1, testing of intentional radiators with detachable antenna shall be performed using a suitable dummy load connected to the antenna output terminals. Otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. Testing with dummy load may be necessary to distinguish (unintentional) conducted emissions on the supply lines from (intentional) emissions radiated by the antenna and coupling directly to supply lines and/or LISN. Usage of dummy load has to be stated in the appropriate test record(s) and notes should be added to clarify the test setup.	

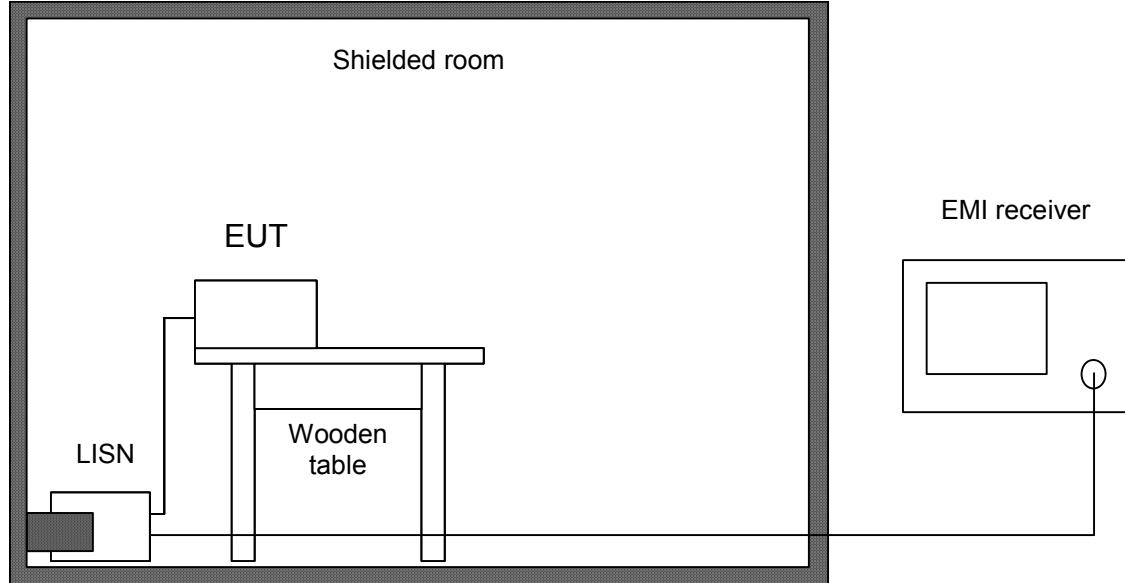


Test instruments used:

Used	Type	Model	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/>	EMI receiver	ESHS 10	860043/016	Rohde & Schwarz
<input checked="" type="checkbox"/>	LISN	ESH3-Z5	862770/021	Rohde & Schwarz
<input type="checkbox"/>	LISN	ESH3-Z5	830952/025	Rohde & Schwarz
<input type="checkbox"/>	Artificial mains network	ESH 2-Z5	842966/004	Rohde & Schwarz
<input type="checkbox"/>	Shielded room	No. 1	1451	Albatross Projects
<input checked="" type="checkbox"/>	Shielded room	No. 4	3FD-100 544	Euroshield

6.3 Radiated Emission Measurement 9 kHz to 30 MHz

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, sections 15.205 and 15.209 IC RSS-210 Issue 7, sections 2.2 and 2.6
Guide:	ANSI C63.4
<p>Radiated emission in the frequency range 9 kHz to 30 MHz is measured using an active loop antenna. First the whole spectrum of emission caused by the equipment is recorded at a distance of 3 meters in a fully or semi anechoic room with the detector of the spectrum analyzer or EMI receiver set to peak. This configuration is also used for recording the spectrum of intentional radiators.</p> <p>Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.</p> <p>EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>If worst case emission of the EUT cannot be recorded with EUT in standard position and loop antenna in vertical polarization the EUT (or the radiating part of the EUT) is rotated by 90 degrees instead of changing the loop antenna to horizontal polarization. This procedure is selected to minimize the influence of the environment (e.g. effects caused by the floor especially with longer distances).</p> <p>Final measurement is performed at a test distance D of 30 meters using an open field test site. In case the regulation requires testing at other distances, the result is extrapolated by either making measurements at an additional distance D of 10 meters to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). In cases of very low emissions measurements are performed at shorter distances and results are extrapolated to the required distance.</p> <p>The provisions of CFR 47 Part 15 sections 15.31(d) and (f)(2) apply. According to CFR 47 Part 15 section 15.209(d) final measurement is performed with detector function set to quasi-peak except for the frequency bands 9 to 90 kHz and 110 to 490 kHz where, for non-pulsed operation, average detector is employed.</p> <p>If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.</p>	

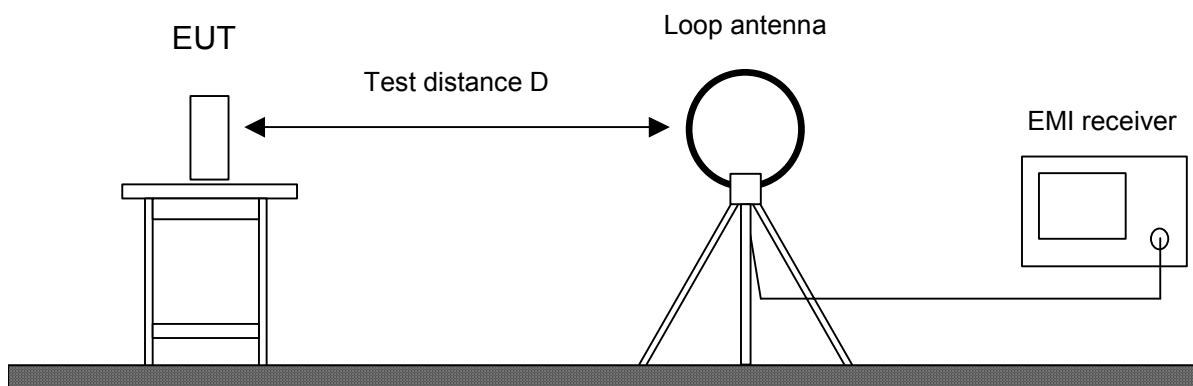


Test instruments used:

Used	Type	Model	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/>	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
<input type="checkbox"/>	EMI test receiver	ESMI	839379/013 839587/006	Rohde & Schwarz
<input checked="" type="checkbox"/>	Test receiver	ESHS 10	860043/016	Rohde & Schwarz
<input type="checkbox"/>	Preamplifier	CPA9231A	3393	Schaffner
<input type="checkbox"/>	Loop antenna	HFH2-Z2	882964/1	Rohde & Schwarz
<input checked="" type="checkbox"/>	Fully anechoic room	No. 2	1452	Albatross Projects
<input type="checkbox"/>	Semi-anechoic room	No. 3	1453	Siemens
<input checked="" type="checkbox"/>	Open field test site	EG 1	1450	Senton

6.4 Radiated Emission in Fully or Semi Anechoic Room

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, section 15.209 IC RSS-210 Issue 7, section 2.6
Guide:	ANSI C63.4
Radiated emission in fully or semi anechoic room is measured in the frequency range from 30 MHz to the maximum frequency as specified in CFR 47 Part 15 section 15.33.	
Measurements are made in both the horizontal and vertical planes of polarization in a fully anechoic room using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 100 kHz (below 1 GHz) or 1 MHz (above 1 GHz).	
Testing up to 1 GHz is performed with a linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna"). For testing above 1 GHz horn antennas are used.	
All tests below 18 GHz are performed at a test distance D of 3 meters. For higher frequencies the test distance is reduced (e.g. to 1 meter) due to the sensitivity of the measuring instrument(s) and the test results are calculated according to CFR 47 Part 15 section 15.31(f)(1) using an extrapolation factor of 20 dB/decade. If required, preamplifiers are used for the whole frequency range. Special care is taken to avoid overload, using appropriate attenuators and filters, if necessary.	
If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.	
Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.	
During testing the EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.	
For final testing below 1 GHz an open field test-site is used and the plots recorded in the fully or semi anechoic room are indicated as prescans.	

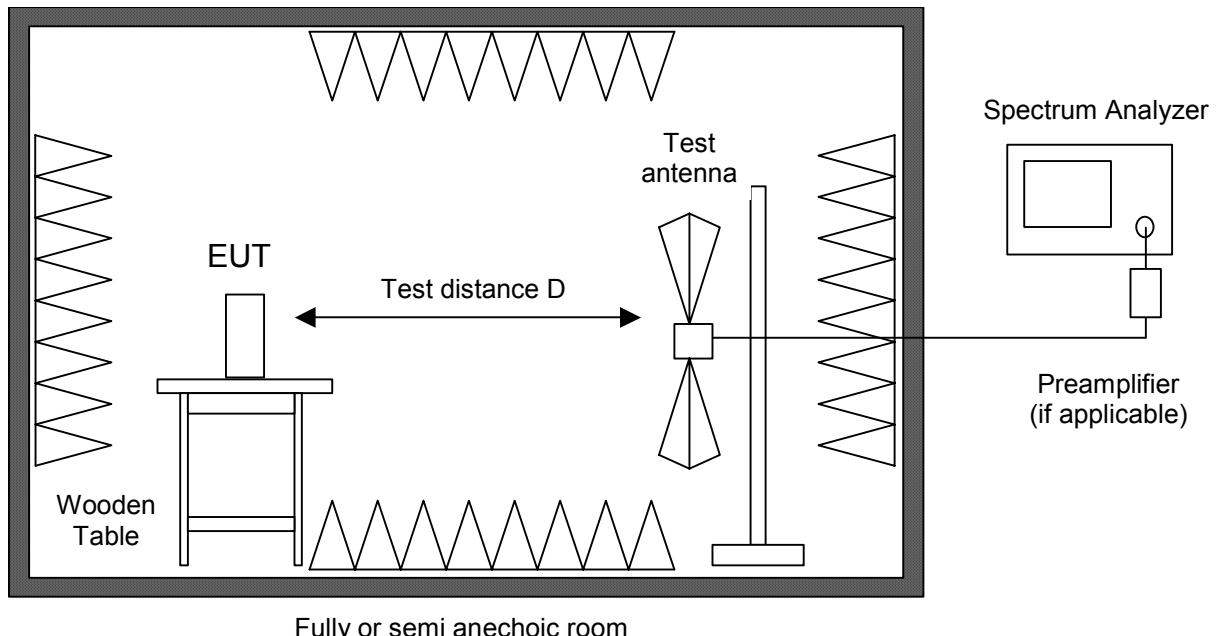


Test instruments used:

Used	Type	Model	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/>	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
<input type="checkbox"/>	Spectrum analyzer	R 3271	05050023	Advantest
<input type="checkbox"/>	EMI test receiver	ESMI	839379/013 839587/006	Rohde & Schwarz
<input checked="" type="checkbox"/>	Preamplifier	CPA9231A	3393	Schaffner
<input type="checkbox"/>	Preamplifier	R14601		Advantest
<input type="checkbox"/>	Preamplifier 1-8 GHz	AFS3-00100800-32-LN	847743	Miteq
<input type="checkbox"/>	Preamplifier 0.5-8 GHz	AMF-4D-005080-25-13P	860149	Miteq
<input type="checkbox"/>	Preamplifier 8-18 GHz	ACO/180-3530	32641	CTT
<input type="checkbox"/>	External Mixer	WM782A	845881/005	Tektronix
<input type="checkbox"/>	Harmonic Mixer	FS-Z30	843389/007	Rohde & Schwarz
	Accessories			
<input checked="" type="checkbox"/>	Trilog broadband antenna	VULB 9163	9163-188	Schwarzbeck
<input type="checkbox"/>	Horn antenna	3115	9508-4553	EMCO
<input type="checkbox"/>	Horn antenna	3160-03	9112-1003	EMCO
<input type="checkbox"/>	Horn antenna	3160-04	9112-1001	EMCO
<input type="checkbox"/>	Horn antenna	3160-05	9112-1001	EMCO
<input type="checkbox"/>	Horn antenna	3160-06	9112-1001	EMCO
<input type="checkbox"/>	Horn antenna	3160-07	9112-1008	EMCO
<input type="checkbox"/>	Horn antenna	3160-08	9112-1002	EMCO
<input type="checkbox"/>	Horn antenna	3160-09	9403-1025	EMCO
<input type="checkbox"/>	Horn antenna	3160-10	399185	EMCO
<input checked="" type="checkbox"/>	Fully anechoic room	No. 2	1452	Albatross Projects
<input type="checkbox"/>	Semi-anechoic room	No. 3	1453	Siemens

6.5 Radiated Emission at Open Field Test Site

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, section 15.209 IC RSS-210 Issue 7, section 2.6
Guide:	ANSI C63.4
Radiated emission at open field test site is measured in the frequency range 30 MHz to 1 GHz using a biconical antenna up to 300 MHz and a logarithmic periodic antenna above. The measurement bandwidth of the test receiver is set to 120 kHz with quasi-peak detector selected.	
If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.	
Hand-held or body-worn devices are tested in the position producing the highest emission relative to the limit as verified by prescans in the fully anechoic room. EUT is rotated all around and receiving antenna is raised and lowered within 1 meter to 4 meters to find the maximum levels of emission. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.	
For measuring emissions of intentional radiators and receivers a test distance D of 3 meters is selected. Testing of unintentional radiators is performed at a distance of 10 meters. If limits specified for 3 meters shall be used for measurements performed at 10 meters distance the limits are calculated according to CFR 47 Part 15 section 15.31(d) and (f)(1) using an inverse linear-distance extrapolation factor of 20 dB/decade.	

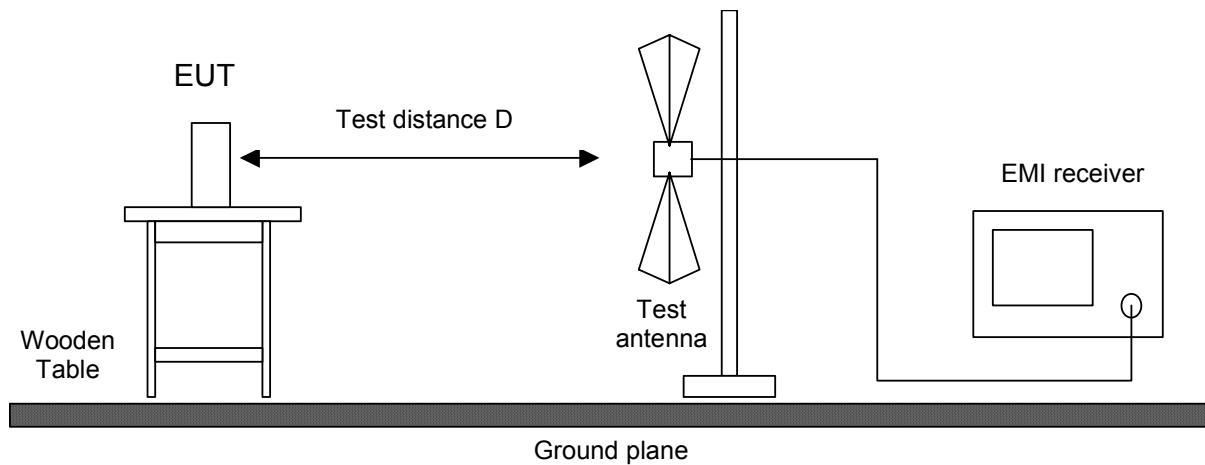


Test instruments used:


Used	Type	Model	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/>	EMI receiver	ESVP	881120/024	Rohde & Schwarz
<input checked="" type="checkbox"/>	Biconical antenna	EG 1	HK 116	Rohde & Schwarz
<input checked="" type="checkbox"/>	Log. per. antenna	EG 1	HL 223	Rohde & Schwarz
<input checked="" type="checkbox"/>	Open field test site	EG 1	1450	Senton

7 Photographs Taken During Testing

Test setup for conducted AC powerline emission measurement

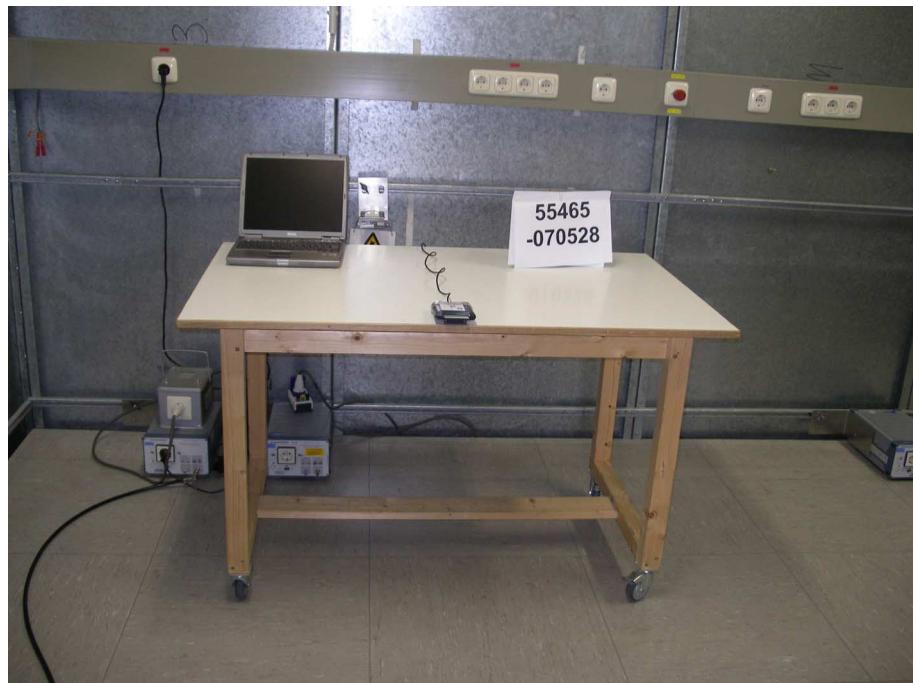

Test setup for radiated emission measurement 9 kHz – 30 MHz

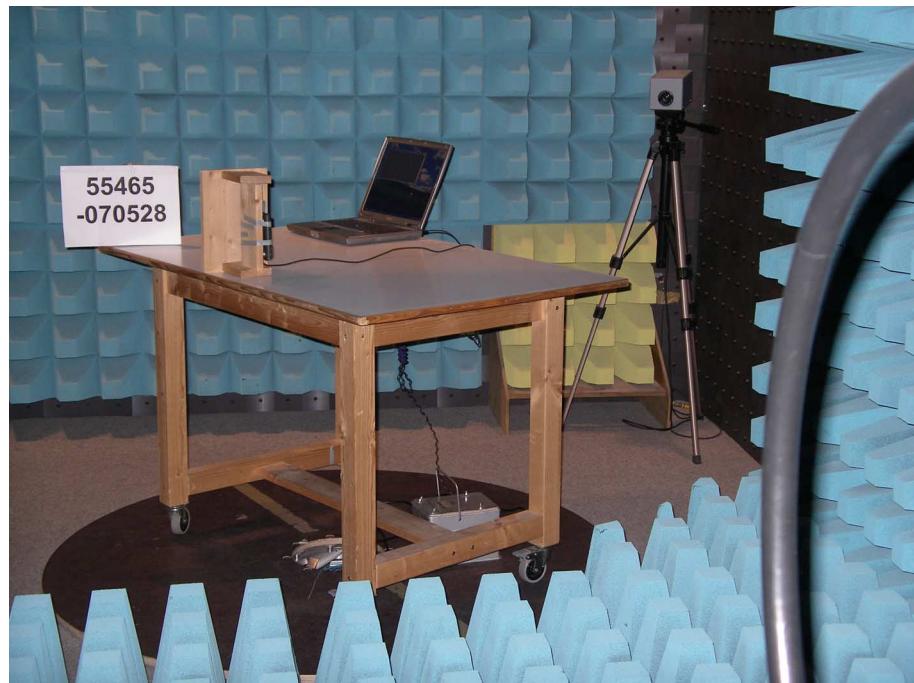

**Test setup for radiated emission measurement
(fully anechoic room)**



**Test setup for radiated emission measurement
(open field test site)**



**Test setup for radiated emission measurement
(open field test site) - continued -**



8 Test Results

FCC CFR 47 Parts 2 and 15			
Section(s)	Test	Page	Result
2.1046(a)	Conducted output power	---	Not applicable
2.202(a)	Occupied bandwidth	24	Recorded
2.201, 2.202	Class of emission	28	Calculated
15.35(c)	Pulse train measurement for pulsed operation	---	Not applicable
15.205(a)	Restricted bands of operation	29	Test passed
15.207	Conducted AC powerline emission 150 kHz to 30 MHz	30	Test passed
15.205(b) 15.209	Radiated emission 9 kHz to 30 MHz	32	Test passed
15.205(b) 15.209	Radiated emission 30 MHz to 1 GHz	35	Test passed

IC RSS-Gen Issue 2			
<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
4.8	Transmitter output power (conducted)	---	Not applicable
4.6.1	Occupied Bandwidth	24	Recorded
3.2(h), 8	Designation of emissions	28	Calculated
4.5	Pulsed operation	---	Not applicable
7.2.2	Transmitter AC power lines conducted emissions 150 kHz to 30 MHz	30	Test passed
5.5	Exposure of Humans to RF Fields	36	Exempted from SAR and RF evaluation


IC RSS-210 Issue 7			
<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
2.2(a)	Restricted bands and unwanted emission frequencies	29	Test passed
2.2(b)(c) 2.6	Unwanted emissions 9 kHz to 30 MHz	32	Test passed
2.2(b)(c) 2.6	Unwanted emissions 30 MHz to 1 GHz	35	Test passed

8.1 Occupied Bandwidth

Rules and specifications:	CFR 47 Part 2, section 2.202(a) ANSI C63.4, annex H.6								
Guide:	ANSI C63.4								
Description:	<p>The occupied bandwidth according to CFR 47 Part 2, section 2.202(a), is measured as the 99% emission bandwidth, i.e. below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission.</p> <p>The occupied bandwidth according to ANSI C63.4, annex H.6; is measured as the frequency range defined by the points that are 26 dB down relative to the maximum level of the modulated carrier.</p> <p>The resolution bandwidth of the spectrum analyzer shall be set to a value greater than 5.0% of the allowed bandwidth. If no bandwidth specifications are given, the following guidelines are used:</p> <table border="1"><thead><tr><th>Fundamental frequency</th><th>Minimum resolution bandwidth</th></tr></thead><tbody><tr><td>9 kHz to 30 MHz</td><td>1 kHz</td></tr><tr><td>30 MHz to 1000 MHz</td><td>10 kHz</td></tr><tr><td>1000 MHz to 40 GHz</td><td>100 kHz</td></tr></tbody></table> <p>The video bandwidth shall be at least three times greater than the resolution bandwidth.</p>	Fundamental frequency	Minimum resolution bandwidth	9 kHz to 30 MHz	1 kHz	30 MHz to 1000 MHz	10 kHz	1000 MHz to 40 GHz	100 kHz
Fundamental frequency	Minimum resolution bandwidth								
9 kHz to 30 MHz	1 kHz								
30 MHz to 1000 MHz	10 kHz								
1000 MHz to 40 GHz	100 kHz								
Measurement procedure:	Bandwidth Measurements (6.1)								

Comment:	
Date of test:	October 9, 2007
Test site:	Fully anechoic room, cabin no. 2

Occupied Bandwidth (99 %):

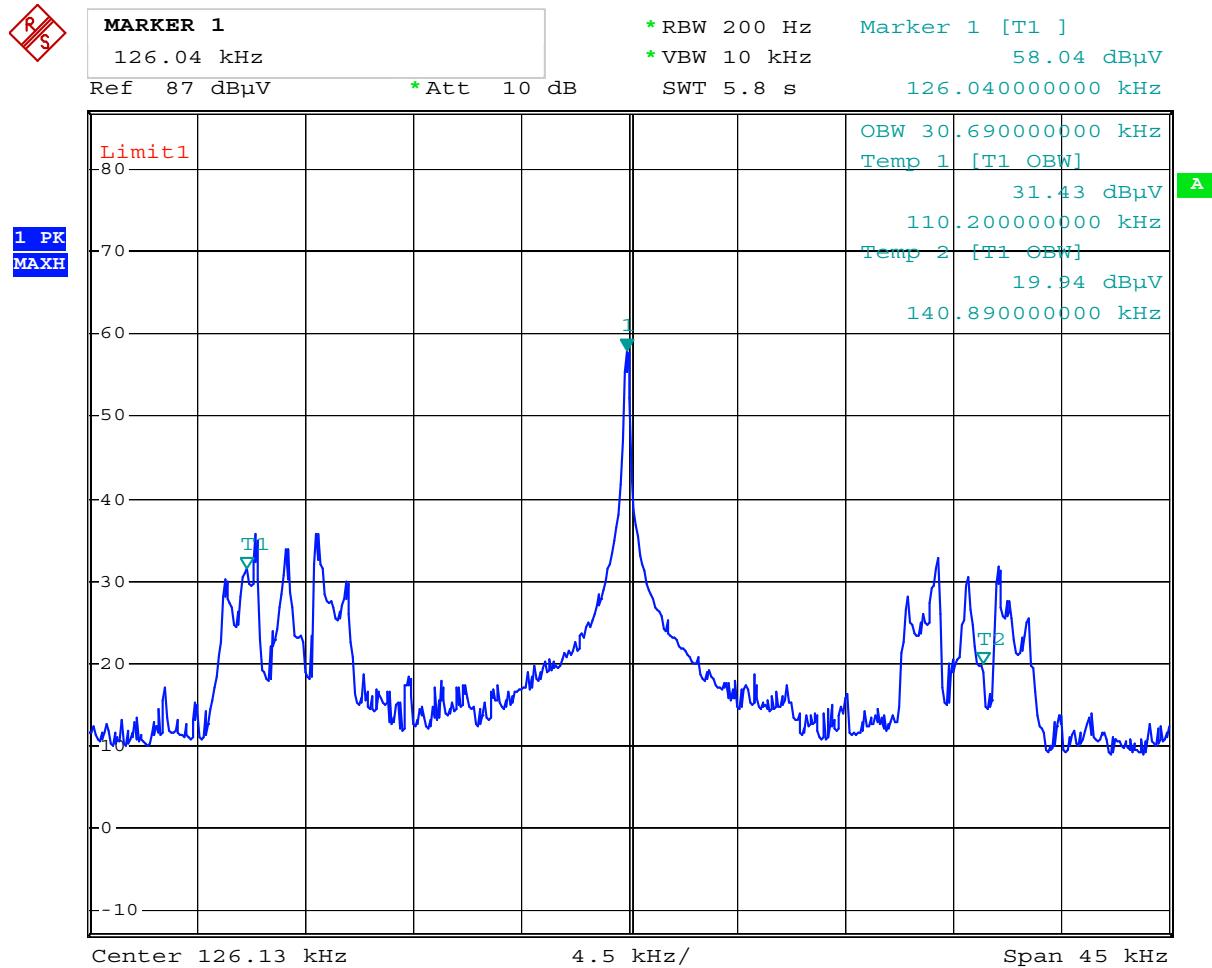

Date: 9.OCT.2007 17:45:40


Occupied Bandwidth (99 %): **30.69 kHz**

Occupied Bandwidth (continued)

Rules and specifications:	IC RSS-Gen Issue 2, section 4.6.1
Guide:	IC RSS-Gen Issue 2, section 4.6.1
Description:	<p>If not specified in the applicable RSS the occupied bandwidth is measured as the 99% emission bandwidth.</p> <p>The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth.</p> <p>The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is also recorded. The span between the two recorded frequencies is the occupied bandwidth.</p>
Measurement procedure:	Bandwidth Measurements (6.1)

Comment:	
Date of test:	October 9, 2007
Test site:	Fully anechoic room, cabin no. 2

Occupied Bandwidth (99 %):

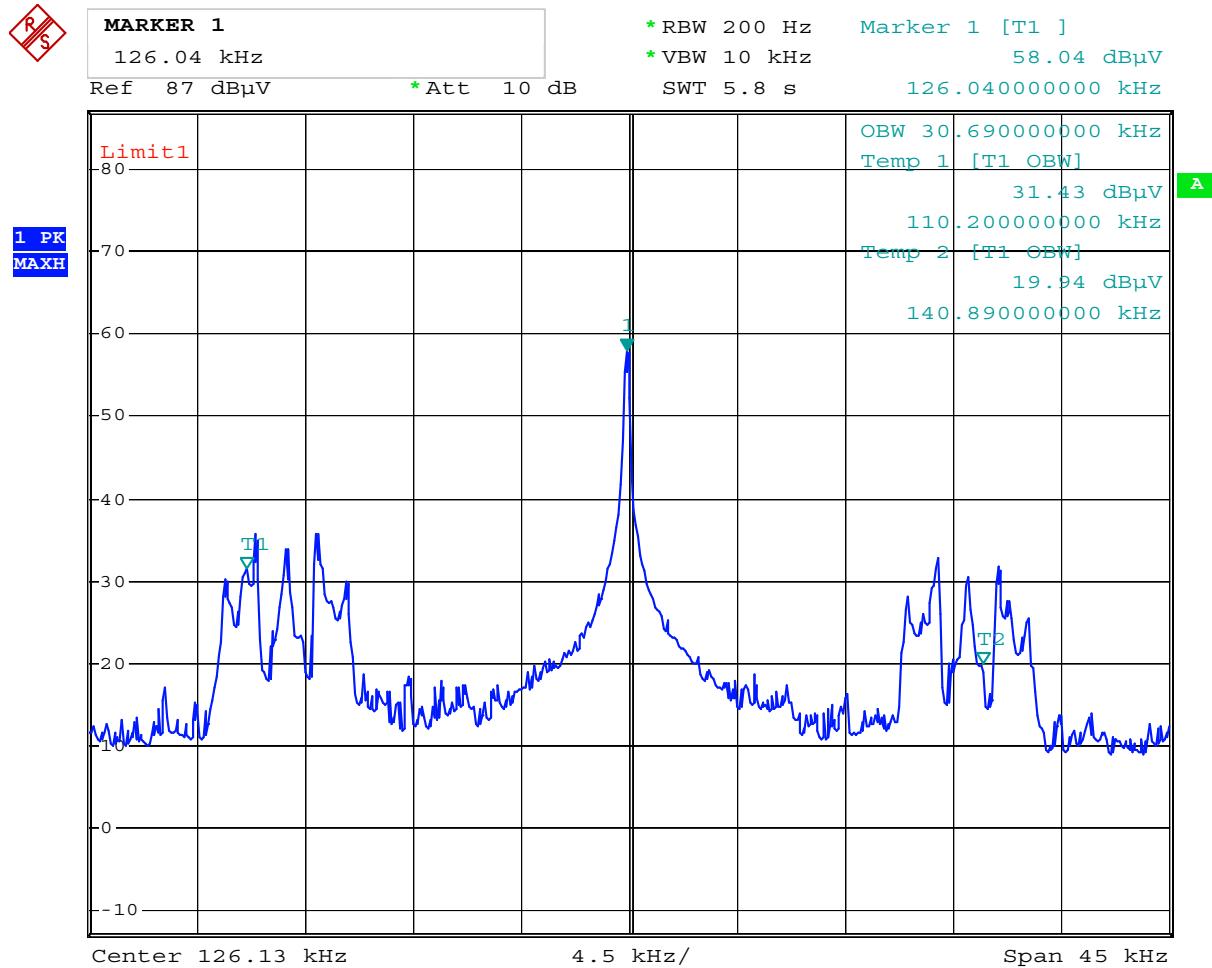

Date: 9.OCT.2007 17:45:40

Occupied Bandwidth (99 %): **30.69 kHz**

8.2 Designation of Emissions

Rules and specifications:	CFR 47 Part 2, sections 2.201 and 2.202 IC RSS-Gen Issue 2, sections 3.2(h) and 8
Guide:	ANSI C63.4 / TRC-43

Type of modulation:	Amplitude Modulation
---------------------	----------------------


B_n = Necessary Bandwidth	$B_n = 2BK$
B = Modulation rate	$B = 5.0$ kHz
K = Overall numerical factor	$K = 1$
Calculation:	$B_n = 2 \cdot (5.0 \text{ kHz}) \cdot 1 = 10.0 \text{ kHz}$

Designation of Emissions:	10k0A1D
---------------------------	----------------

8.3 Restricted Bands of Operation

Rules and specifications:	CFR 47 Part 15, section 15.205(a) IC RSS-210 Issue 7, section 2.2(a)
Guide:	ANSI C63.4
Limit:	Only spurious emissions are permitted in any of the frequency bands listed in CFR 47 Part 15, section 15.205(a) or IC RSS-210 Issue 7, section 2.2(a).
Measurement procedure:	Radiated Emission Measurement 9 kHz to 30 MHz (6.3)

Comment:	Transponder-card in 1 cm distance to EUT.
Date of test:	October 30, 2007
Test site:	Semi anechoic room, cabin no. 3
Test distance:	8.5 meters

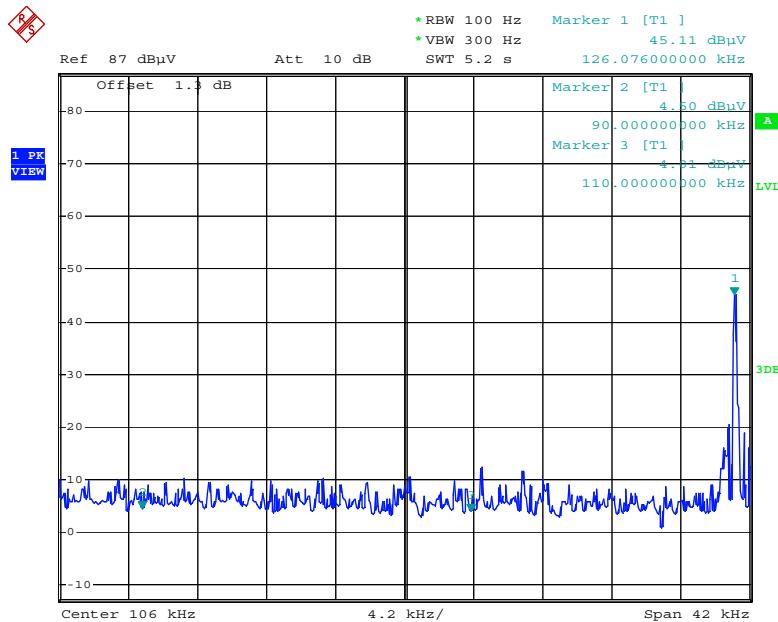

Date: 30.OCT.2007 16:27:46

Test Result:

Test passed

8.4 Conducted Powerline Emission Measurement 150 kHz to 30 MHz

Rules and specifications:	CFR 47 Part 15, section 15.207 IC RSS-Gen Issue 2, section 7.2.2		
Guide:	ANSI C63.4 / CISPR 22		
Limit:	Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
		Quasi-peak	Average
		0.15 - 0.5 0.5 - 5 5 - 30	66 to 56 56 60
Measurement procedure:	Conducted AC Powerline Emission (6.2)		

Comment:		
Date of test:	October 16, 2007	
Test site:	Shielded room, cabin no. 4	

Test Result:	Test passed
--------------	-------------

Tested on:	L1
------------	----

Frequency (MHz)	Detector	Reading Value (dB μ V)	Correction Factor (dB)	Final Value (dB μ V)	Limit (dB μ V)	Margin (dB)
0.205	Quasi-Peak	50.5	0.0	50.5	63.4	12.9
0.205	Average	39.3	0.0	39.3	53.4	14.1
0.310	Quasi-Peak	40.3	0.0	40.3	60.0	19.7
0.310	Average	34.7	0.0	34.7	50.0	15.3
0.415	Average	31.8	0.0	31.8	47.5	15.7
0.530	Average	29.8	0.0	29.8	46.0	16.2
0.620	Quasi-Peak	39.3	0.0	39.3	56.0	16.7
0.635	Average	35.0	0.0	35.0	46.0	11.0
0.725	Average	29.3	0.0	29.3	46.0	16.7
0.825	Average	16.9	0.0	16.9	46.0	29.1
1.050	Average	28.2	0.0	28.2	46.0	17.8
1.275	Average	29.0	0.0	29.0	46.0	17.0
1.865	Average	21.2	0.0	21.2	46.0	24.8
8.950	Average	24.0	0.0	24.0	50.0	26.0
10.050	Quasi-Peak	36.3	0.0	36.3	60.0	23.7
12.225	Average	25.8	0.0	25.8	50.0	24.2
21.305	Average	24.4	0.0	24.4	50.0	25.6
24.010	Quasi-Peak	30.2	0.0	30.2	60.0	29.8
24.340	Average	19.6	0.0	19.6	50.0	30.4

Tested on:	N
------------	---

Frequency (MHz)	Detector	Reading Value (dB μ V)	Correction Factor (dB)	Final Value (dB μ V)	Limit (dB μ V)	Margin (dB)
0.205	Quasi-Peak	48.8	0.0	48.8	63.4	14.6
0.205	Average	43.0	0.0	43.0	53.4	10.4
0.310	Quasi-Peak	41.4	0.0	41.4	60.0	18.6
0.310	Average	38.2	0.0	38.2	50.0	11.8
0.415	Quasi-Peak	39.1	0.0	39.1	57.5	18.4
0.430	Average	36.7	0.0	36.7	47.3	10.6
0.520	Quasi-Peak	41.1	0.0	41.1	56.0	14.9
0.530	Average	36.3	0.0	36.3	46.0	9.7
0.620	Quasi-Peak	35.8	0.0	35.8	56.0	20.2
0.635	Average	34.8	0.0	34.8	46.0	11.2
0.725	Quasi-Peak	43.3	0.0	43.3	56.0	12.7
0.740	Average	38.6	0.0	38.6	46.0	7.4
0.845	Average	36.3	0.0	36.3	46.0	9.7
0.930	Quasi-Peak	41.1	0.0	41.1	56.0	14.9
1.035	Quasi-Peak	43.7	0.0	43.7	56.0	12.3
1.065	Average	34.2	0.0	34.2	46.0	11.8
1.345	Quasi-Peak	43.1	0.0	43.1	56.0	12.9
1.480	Average	33.6	0.0	33.6	46.0	12.4
1.585	Average	32.1	0.0	32.1	46.0	13.9
1.760	Quasi-Peak	41.2	0.0	41.2	56.0	14.8
1.910	Average	31.1	0.0	31.1	46.0	14.9
2.070	Quasi-Peak	41.0	0.0	41.0	56.0	15.0
2.385	Quasi-Peak	38.8	0.0	38.8	56.0	17.2
2.485	Average	23.5	0.0	23.5	46.0	22.5
3.320	Average	27.6	0.0	27.6	46.0	18.4
4.145	Average	28.6	0.0	28.6	46.0	17.4
4.350	Quasi-Peak	37.8	0.0	37.8	56.0	18.2
4.565	Average	30.2	0.0	30.2	46.0	15.8
5.280	Quasi-Peak	36.5	0.0	36.5	60.0	23.5
6.730	Quasi-Peak	36.9	0.0	36.9	60.0	23.1
7.355	Quasi-Peak	39.4	0.0	39.4	60.0	20.6
7.460	Average	24.6	0.0	24.6	50.0	25.4
12.225	Average	26.4	0.0	26.4	50.0	23.6
23.910	Average	22.5	0.0	22.5	50.0	27.5
24.025	Quasi-Peak	30.5	0.0	30.5	60.0	29.5
26.455	Average	19.5	0.0	19.5	50.0	30.5

Sample calculation of final values:

$$\text{Final Value (dB}\mu\text{V)} = \text{Reading Value (dB}\mu\text{V)} + \text{Correction Factor (dB)}$$

8.5 Radiated Emission Measurement 9 kHz to 30 MHz

Rules and specifications:	CFR 47 Part 15, sections 15.205 and 15.209 IC RSS-210 Issue 7, sections 2.2 and 2.6			
Guide:	ANSI C63.4			
Limit:	Frequency of Emission (MHz)	Field Strength (μ V/m)	Field Strength (dB μ V/m)	Measurement Distance d (meters)
	0.009 - 0.490	2400/F(kHz)	67.6 - 20 · log(F(kHz))	300
	0.490 - 1.705	24000/F(kHz)	87.6 - 20 · log(F(kHz))	30
	1.705 - 30.000	30	29.5	30
Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.				
Measurement procedure:	Radiated Emission Measurement 9 kHz to 30 MHz (6.3)			

Test Result:	Test passed
--------------	-------------

Comment:	Reading Tag continuously
Date of test:	October 14, 2007
Test site:	Open field test site

Extrapolation factor: -40 dB/decade										
Frequency (MHz)	Detector	Distance d1 (m)	d (m)	Reading Value (dB μ V)	Correction Factor (dB/m)	Extrapolation Factor (dB)	Pulse Train Correction (dB)	Final Value (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
0.12600	Peak	10	300	36.8	20.0	-59.1		-2.3	25.6	27.9

Sample calculation of final values:

$$\text{Extrapolation Factor (dB)} = (\text{Log}(d) - \text{Log}(d_1)) \cdot \text{Extrapolation Factor (dB/decade)}$$

$$\text{Final Value (dB}\mu\text{V/m)} = \text{Reading Value } d_1 \text{ (dB}\mu\text{V)} + \text{Correction Factor (dB/m)} + \text{Extrapolation Factor (dB)} + \text{Pulse Train Correction (dB)}$$

Note: Extrapolation factor (dB) and final value (dB μ V/m) are relating to distance d.

Comment:	Transmitting continuously without tag
Date of test:	October 14, 2007
Test site:	Open field test site

Extrapolation factor: -40 dB/decade										
Frequency (MHz)	Detector	Distance d1 (m)	d (m)	Reading Value (dB μ V)	Correction Factor (dB/m)	Extrapolation Factor (dB)	Pulse Train Correction (dB)	Final Value (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
0.12600	Peak	10	300	43.4	20.0	-59.1		4.3	25.6	21.3

Sample calculation of final values:

$$\text{Extrapolation Factor (dB)} = (\log(d) - \log(d_1)) \cdot \text{Extrapolation Factor (dB/decade)}$$

$$\begin{aligned} \text{Final Value (dB}\mu\text{V/m)} &= \text{Reading Value } d_1 \text{ (dB}\mu\text{V)} + \text{Correction Factor (dB/m)} \\ &+ \text{Extrapolation Factor (dB)} + \text{Pulse Train Correction (dB)} \end{aligned}$$

Note: Extrapolation factor (dB) and final value (dB μ V/m) are relating to distance d.

8.6 Radiated Emission Measurement 30 MHz to 1 GHz

Rules and specifications:	CFR 47 Part 15, section 15.209 IC RSS-210 Issue 7, section 2.6		
Guide:	ANSI C63.4		
Limit:	Frequency of Emission (MHz)	Field Strength (μ V/m)	Field Strength (dB μ V/m)
	30 - 88	100	40.0
	88 - 216	150	43.5
	216 - 960	200	46.0
	Above 960	500	54.0
Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.			
Measurement procedures:	Radiated Emission in Fully or Semi Anechoic Room (6.4) Radiated Emission at Open Field Test Site (6.5)		

Comment:	
Date of test:	October 17, 2007
Test site:	Frequencies \leq 1 GHz: Open field test site Frequencies $>$ 1 GHz: Fully anechoic room, cabin no. 2
Test distance:	3 meters

Test Result:	Test passed
--------------	-------------

Frequency (MHz)	Antenna Polarization	Detector	Receiver Reading (dB μ V)	Correction Factor (dB/m)	Pulse Train Correction (dB)	Final Value (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
32.920	vertical	Quasi-Peak	15.2	13.7		28.9	40.0	11.1
35.380	vertical	Quasi-Peak	13.6	13.1		26.7	40.0	13.3
42.450	vertical	Quasi-Peak	17.7	11.4		29.1	40.0	10.9
42.470	horizontal	Quasi-Peak	15.1	11.4		26.5	40.0	13.5
45.000	vertical	Quasi-Peak	19.4	11.0		30.4	40.0	9.6
48.000	vertical	Quasi-Peak	17.2	10.6		27.8	40.0	12.2
51.290	vertical	Quasi-Peak	20.1	10.3		30.4	40.0	9.6
53.580	vertical	Quasi-Peak	20.4	10.1		30.5	40.0	9.5
57.350	vertical	Quasi-Peak	15.0	9.8		24.8	40.0	15.2
133.250	horizontal	Quasi-Peak	21.6	13.4		35.0	43.5	8.5
384.170	horizontal	Quasi-Peak	17.5	18.2		35.7	46.0	10.3

Sample calculation of final values:

$$\text{Final Value (dB}\mu\text{V/m)} = \text{Reading Value (dB}\mu\text{V)} + \text{Correction Factor (dB/m)} + \text{Pulse Train Correction (dB)}$$

8.7 Exposure of Humans to RF Fields

Rules and specifications:	IC RSS-Gen Issue 2, section 5.5
Guide:	IC RSS-102 Issue 2, section 2.5

Exposure of Humans to RF Fields		Applicable	Declared by applicant	Measured	Exemption
The antenna is					
<input type="checkbox"/> detachable					
The conducted output power (CP in watts) is measured at the antenna connector: $CP = \dots \text{W}$					<input type="checkbox"/>
The effective isotropic radiated power (EIRP in watts) is calculated using <input type="checkbox"/> the numerical antenna gain: $G = \dots$ $EIRP = G \cdot CP \Rightarrow EIRP = \dots \text{W}$			<input type="checkbox"/>		
<input type="checkbox"/> the field strength ⁵ in V/m: $FS = \dots \text{V/m}$ $EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = \dots \text{W}$				<input type="checkbox"/>	
with: Distance between the antennas in m: $D = \dots \text{m}$					
<input checked="" type="checkbox"/> not detachable					
A field strength measurement is used to determine the effective isotropic radiated power (EIRP in watts) given by ⁵ : $EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = 42.4 \cdot 10^{-6} \text{W}$					
with: Field strength in V/m: $FS = 11.9 \cdot 10^{-3} \text{V/m}$ Distance between the two antennas in m: $D = 3 \text{m}$					
Selection of output power					
The output power TP is the higher of the conducted or effective isotropic radiated power (e.i.r.p.): $TP = \dots \text{W}$					

⁵ The conversion formula is valid only for properly matched antennas. In other cases the transmitter output power may have to be measured by a terminated measurement when applying the exemption clauses. If an open area test site is used for field strength measurement, the effect due to the metal ground reflecting plane should be subtracted from the maximum field strength value in order to reference it to free space, before calculating TP.

Exposure of Humans to RF Fields (continued)		Applicable	Declared by applicant	Measured	Exemption
Separation distance between the user and the transmitting device is					
<input type="checkbox"/> less than or equal to 20 cm <input checked="" type="checkbox"/> greater than 20 cm			<input checked="" type="checkbox"/>	<input type="checkbox"/>	
Transmitting device is					
<input type="checkbox"/> in the vicinity of the human head <input type="checkbox"/> body-worn			<input checked="" type="checkbox"/>	<input type="checkbox"/>	
SAR evaluation					
SAR evaluation is required if the separation distance between the user and the device is less than or equal to 20 cm.					
<input type="checkbox"/> The device operates from 3 kHz up to 1 GHz inclusively and its source-based time-averaged output power is less than, or equal to 200 mW for General Public Use and 1000 mW for Controlled Use.					<input type="checkbox"/>
<input type="checkbox"/> The device operates above 1 GHz up to 2.2 GHz inclusively and its source-based time-averaged output power is less than, or equal to 100 mW for General Public Use and 500 mW for Controlled Use.					<input type="checkbox"/>
<input type="checkbox"/> The device operates above 2.2 GHz up to 3 GHz inclusively and its source-based time-averaged output power is less than, or equal to 20 mW for General Public Use and 100 mW for Controlled Use.					<input type="checkbox"/>
<input type="checkbox"/> The device operates above 3 GHz up to 6 GHz inclusively and its source-based time-averaged output power) is less than, or equal to 10 mW for General Public Use and 50 mW for Controlled Use.					<input type="checkbox"/>
<input type="checkbox"/> SAR evaluation is documented in test report no.					
RF exposure evaluation					
RF exposure evaluation is required if the separation distance between the user and the device is greater than 20 cm.					
<input checked="" type="checkbox"/> The device operates below 1.5 GHz and its e.i.r.p. is equal to or less than 2.5 W.				<input checked="" type="checkbox"/>	
<input type="checkbox"/> The device operates at or above 1.5 GHz and the e.i.r.p. of the device is equal to or less than 5 W.				<input type="checkbox"/>	
<input type="checkbox"/> RF exposure evaluation is documented in test report no.					

9 Referenced Regulations

All tests were performed with reference to the following regulations and standards:

<input checked="" type="checkbox"/>	CFR 47 Part 2	Code of Federal Regulations Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC)	October 1, 2007
<input checked="" type="checkbox"/>	CFR 47 Part 15	Code of Federal Regulations Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC)	September 20, 2007
<input checked="" type="checkbox"/>	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	December 11, 2003 (published on January 30, 2004)
<input checked="" type="checkbox"/>	RSS-Gen	Radio Standards Specification RSS-Gen Issue 2 containing General Requirements and Information for the Certification of Radiocommunication Equipment, published by Industry Canada	June 2007
<input checked="" type="checkbox"/>	RSS-210	Radio Standards Specification RSS-210 Issue 7 for Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, published by Industry Canada	June 2007
<input type="checkbox"/>	RSS-310	Radio Standards Specification RSS-310 Issue 1 for Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category II Equipment, published by Industry Canada	September 2005
<input checked="" type="checkbox"/>	RSS-102	Radio Standards Specification RSS-102 Issue 2: Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)	November 2005
<input type="checkbox"/>	ICES-003	Interference-Causing Equipment Standard ICES-003 Issue 4 for Digital Apparatus, published by Industry Canada	February 7, 2004
<input checked="" type="checkbox"/>	CISPR 22	Third Edition of the International Special Committee on Radio Interference (CISPR), Pub. 22, "Information Technology Equipment – Radio Disturbance Characteristics – Limits and Methods of Measurement"	1997
<input type="checkbox"/>	CAN/CSA-CEI/IEC CISPR 22	Limits and Methods of Measurement of Radio Disturbance Characteristics of Information Technology Equipment	2002
<input checked="" type="checkbox"/>	TRC-43	Notes Regarding Designation of Emission (Including Necessary Bandwidth and Classification), Class of Station and Nature of Service, published by Industry Canada	October 9, 1982

10 Revision History


Revision History			
<i>Edition</i>	<i>Date</i>	<i>Issued by</i>	<i>Modifications</i>
1	October 31, 2007	M. Steindl (cj)	First Edition
2	June 18, 2008	C. Jäger	Edition 2 Model name changed to "OMNIKEY 5325" according to Mr. Kastner's email of June 17, 2008 Page "Referenced Regulations" updated (required for FCC-/IC Certification)

11 Charts taken during testing

Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart C

Model: OMNIKEY 5325	Mode: - with DELL laptop
Serial no.: SN OKCM 532525070006	- reading both cards
Applicant: OMNIKEY GmbH	
Test site: Shielded room, cabin no. 4	
Tested on: Linecord AC 115V input Phase L1	
Date of test: 10/16/2007	Operator: M. Steindl
Test performed: semi automatically	File name:

Detector: Peak / Final Results: QP	Final results: 20 dB Margin	25 Subranges
---------------------------------------	--------------------------------	--------------

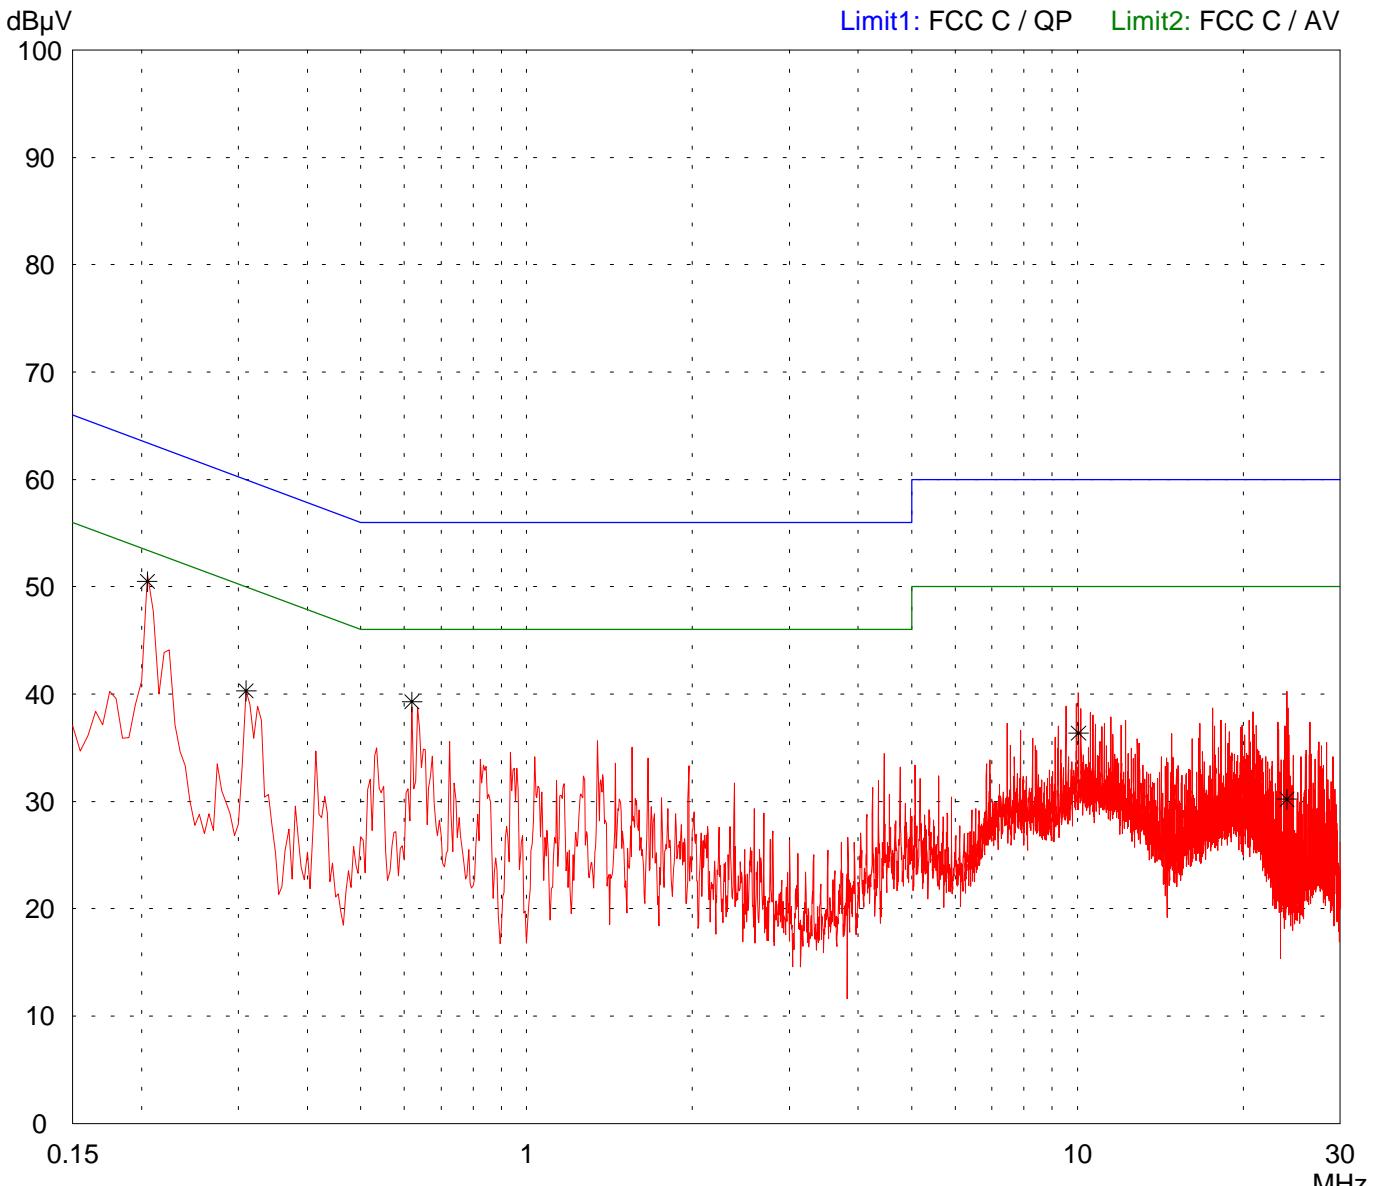


Result: Limit kept

Project file: 55465-070528-1

Conducted Emission Test 150 kHz - 30 MHz
according to FCC Part 15 Subpart C

Model: OMNIKEY 5325	Mode: - with DELL laptop
Serial no.: SN OKCM 532525070006	- reading both cards
Applicant: OMNIKEY GmbH	
Test site: Shielded room, cabin no. 4	
Tested on: Linecord AC 115V input Phase L1	
Date of test: 10/16/2007	Operator: M. Steindl
Test performed: automatically	File name:

Detector: Average / Final Results: AV	Final results: 20 dB Margin	25 Subranges
--	--------------------------------	--------------

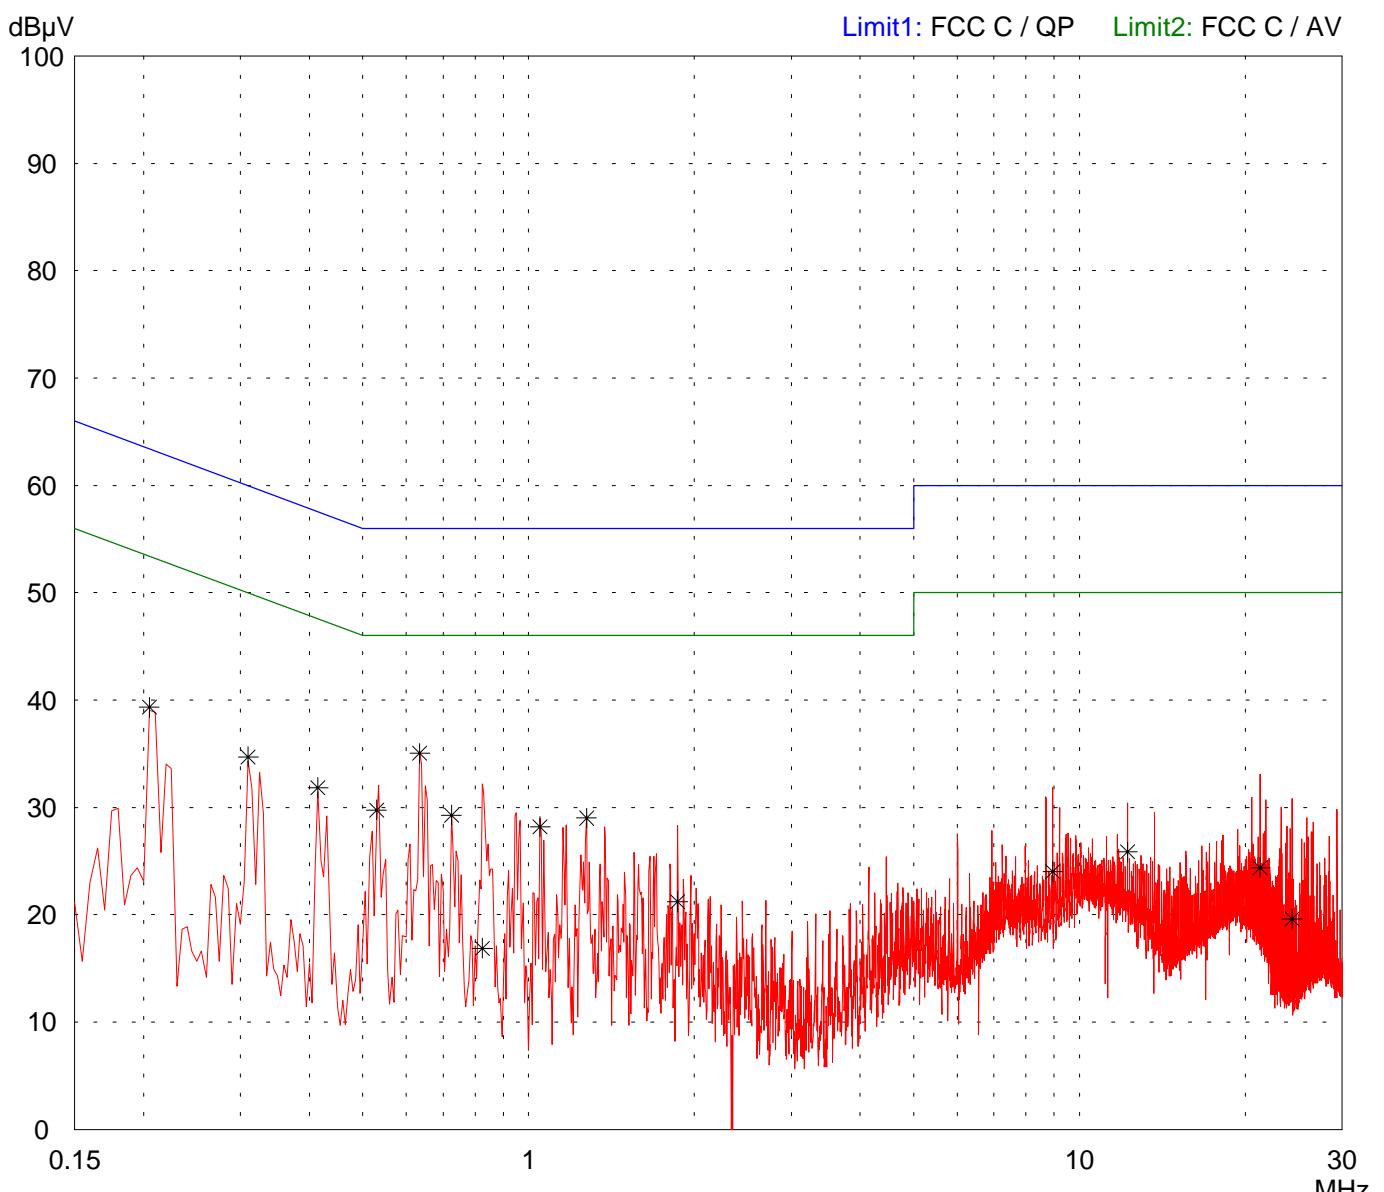

Result: Limit kept

Project file: 55465-070528-1


Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart C

Model: OMNIKEY 5325	
Serial no.: SN OKCM 532525070006	
Applicant: OMNIKEY GmbH	
Test site: Shielded room, cabin no. 4	
Tested on: Linecord AC 115V input Phase N	
Date of test: 10/16/2007	Operator: M. Steindl
Test performed: automatically	File name:

Mode: - with DELL laptop - reading both cards

Detector: Peak / Final Results: QP

Final results: 20 dB Margin	25 Subranges
--------------------------------	--------------

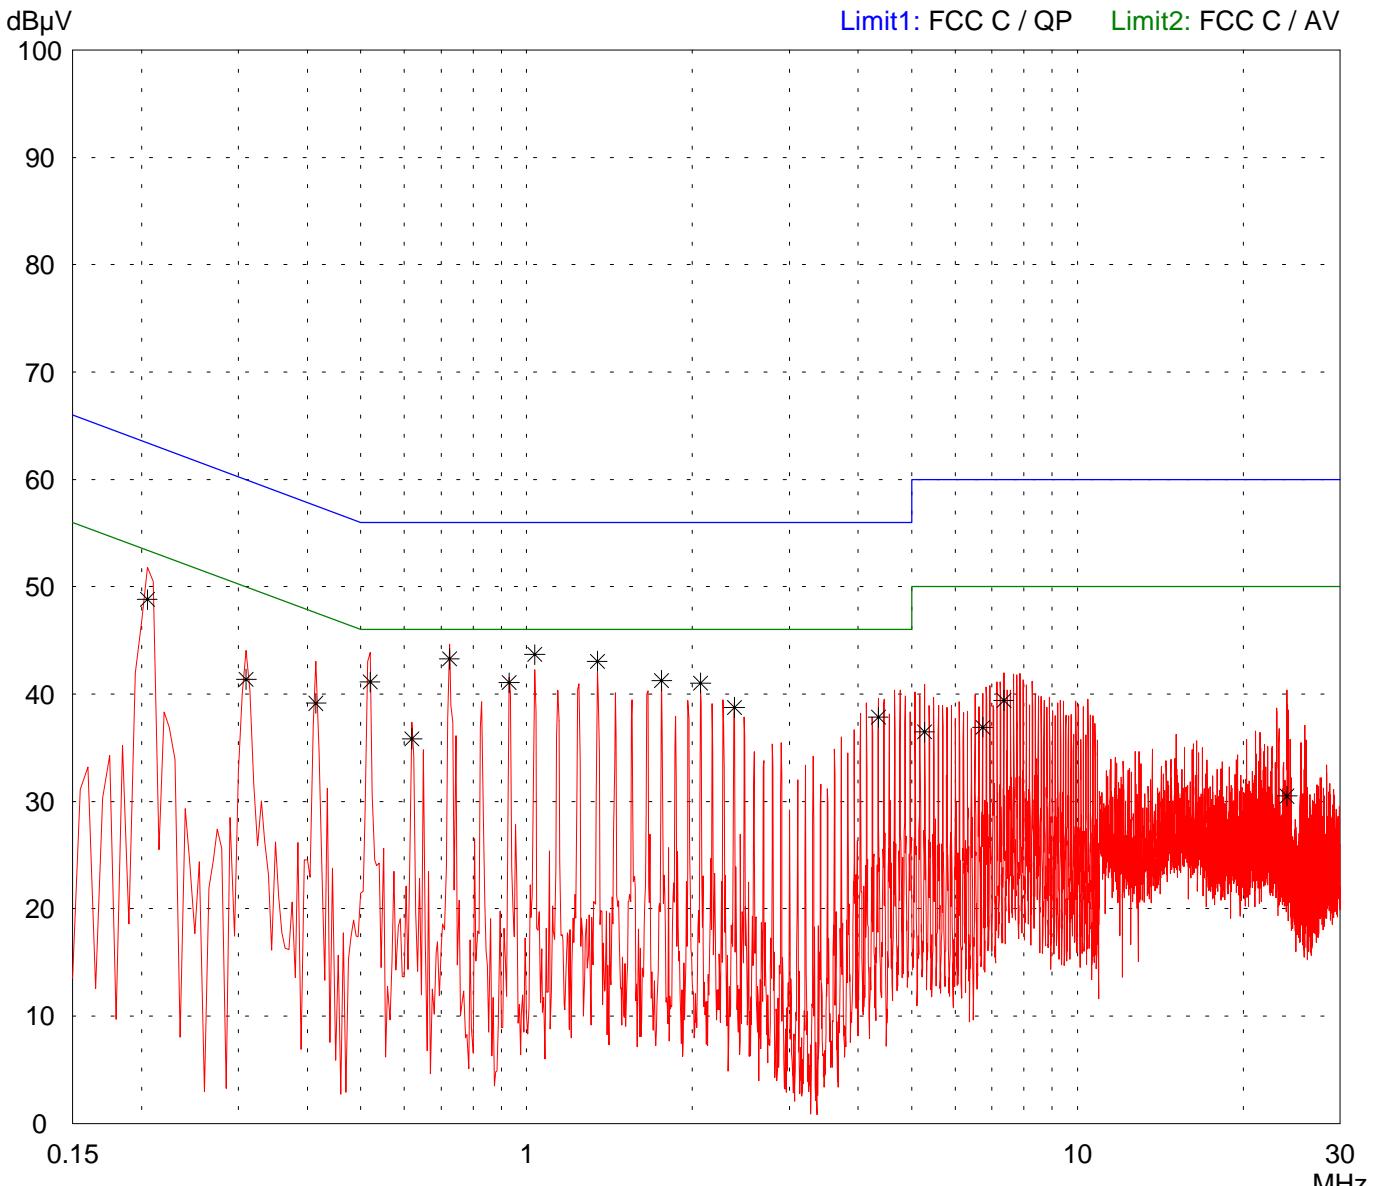


Result: Limit kept

Project file: 55465-070528-1

Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart C

Model: OMNIKEY 5325	Mode: - with DELL laptop
Serial no.: SN OKCM 532525070006	- reading both cards
Applicant: OMNIKEY GmbH	
Test site: Shielded room, cabin no. 4	
Tested on: Linecord AC 115V input Phase N	
Date of test: 10/16/2007	Operator: M. Steindl
Test performed: automatically	File name:

Detector: Average / Final Results: AV	Final results: 20 dB Margin	25 Subranges
--	--------------------------------	--------------

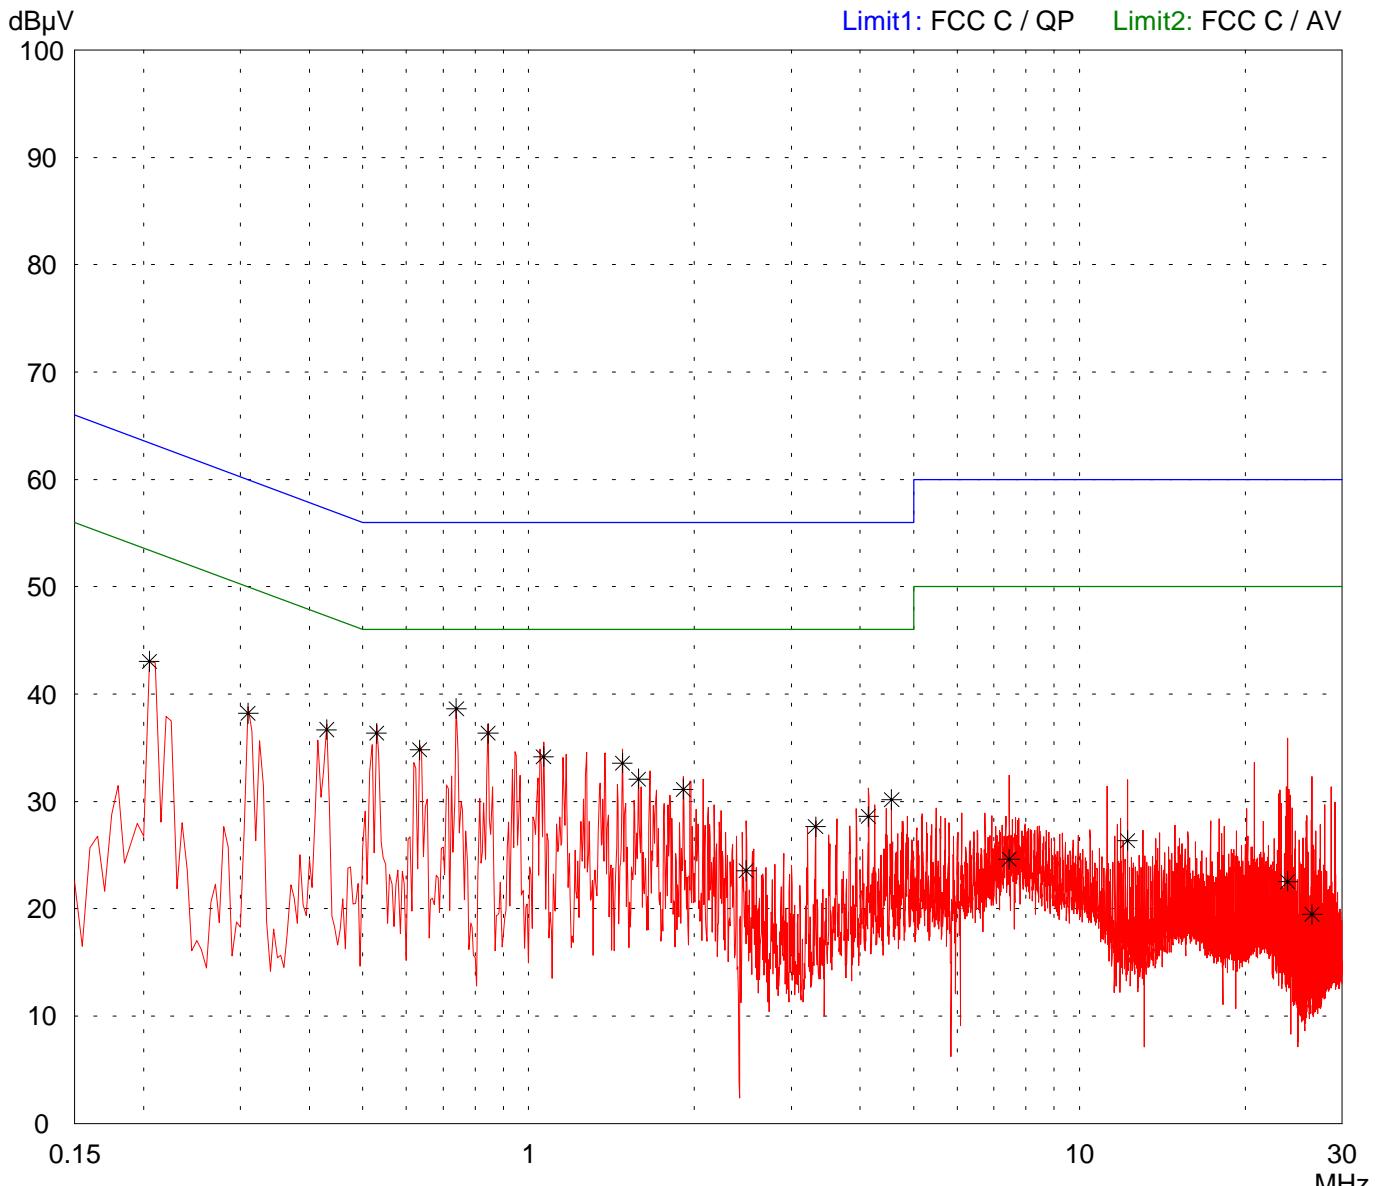

Result: Limit kept

Project file: 55465-070528-1

Radiated Emission Test 9 kHz - 30 MHz acc. to FCC Part 15 Subpart C (FAR)

Model:
OMNIKEY 5325

Serial no.:
SN OKCM 532525070006

Applicant:
OMNIKEY GmbH

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres

Date of test: 10/09/2007	Operator: M. Steindl
Test performed: by hand	File name: default.emi

Comment:

- with DELL laptop
- reading both cards

Detector:
Peak

List of values:
Selected by hand

The figure is a spectral plot showing the measured data (red line) against the FCC Part 15 limit (blue line). The x-axis represents frequency in MHz on a logarithmic scale, with major ticks at 0.009, 0.02, 0.04, 0.1, 0.2, 0.4, 1, 2, 4, 10, and 20. The y-axis represents power density in dB μ V/m, ranging from 0 to 140. The blue line represents the limit, which is 130 dB μ V/m at 0.009 MHz, decreases linearly on the log-log scale to approximately 93 dB μ V/m at 0.4 MHz, then drops to 62 dB μ V/m at 1.8 MHz, and remains flat thereafter. The red line represents the measured data, which shows several peaks. A vertical dashed line is drawn at 0.125 MHz, where a red asterisk marks a peak in the measured data that exceeds the FCC limit. The measured data generally stays below the limit, except for this one peak.

Result:
Prescan


Project file:
55465-070528-1

Radiated Emission Test 30 MHz - 1 GHz

acc. to FCC Part 15 Subpart C (FAR)

Model: OMNIKEY 5325	Comment: - with DELL laptop
Serial no.: SN OKCM 532525070006	- reading both cards
Applicant: OMNIKEY GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 10/09/2007	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: 10 dB Margin	50 Subranges
-------------------	---------------------------------	--------------

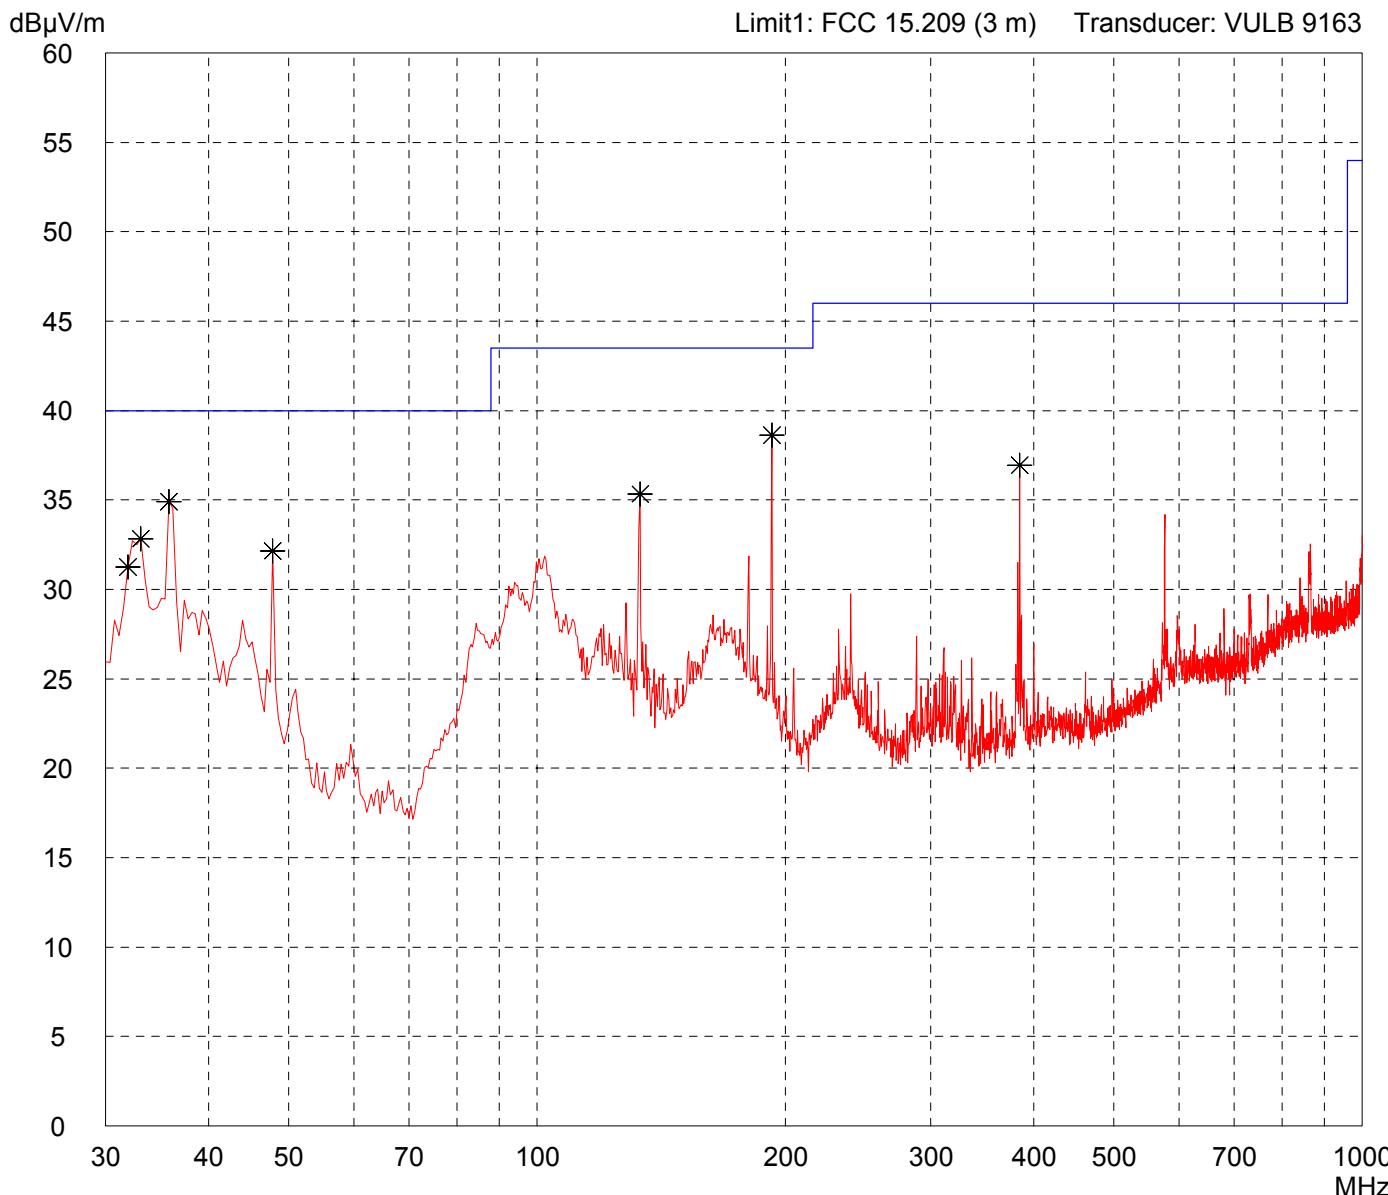

Result: Prescan

Project file: 55465-070528-1

Radiated Emission Test 30 MHz - 1 GHz


acc. to FCC Part 15 Subpart C (FAR)

Model: OMNIKEY 5325	
Serial no.: SN OKCM 532525070006	
Applicant: OMNIKEY GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 10/09/2007	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment: - with DELL laptop - reading both cards
--

Detector: Peak

List of values: Selected by hand

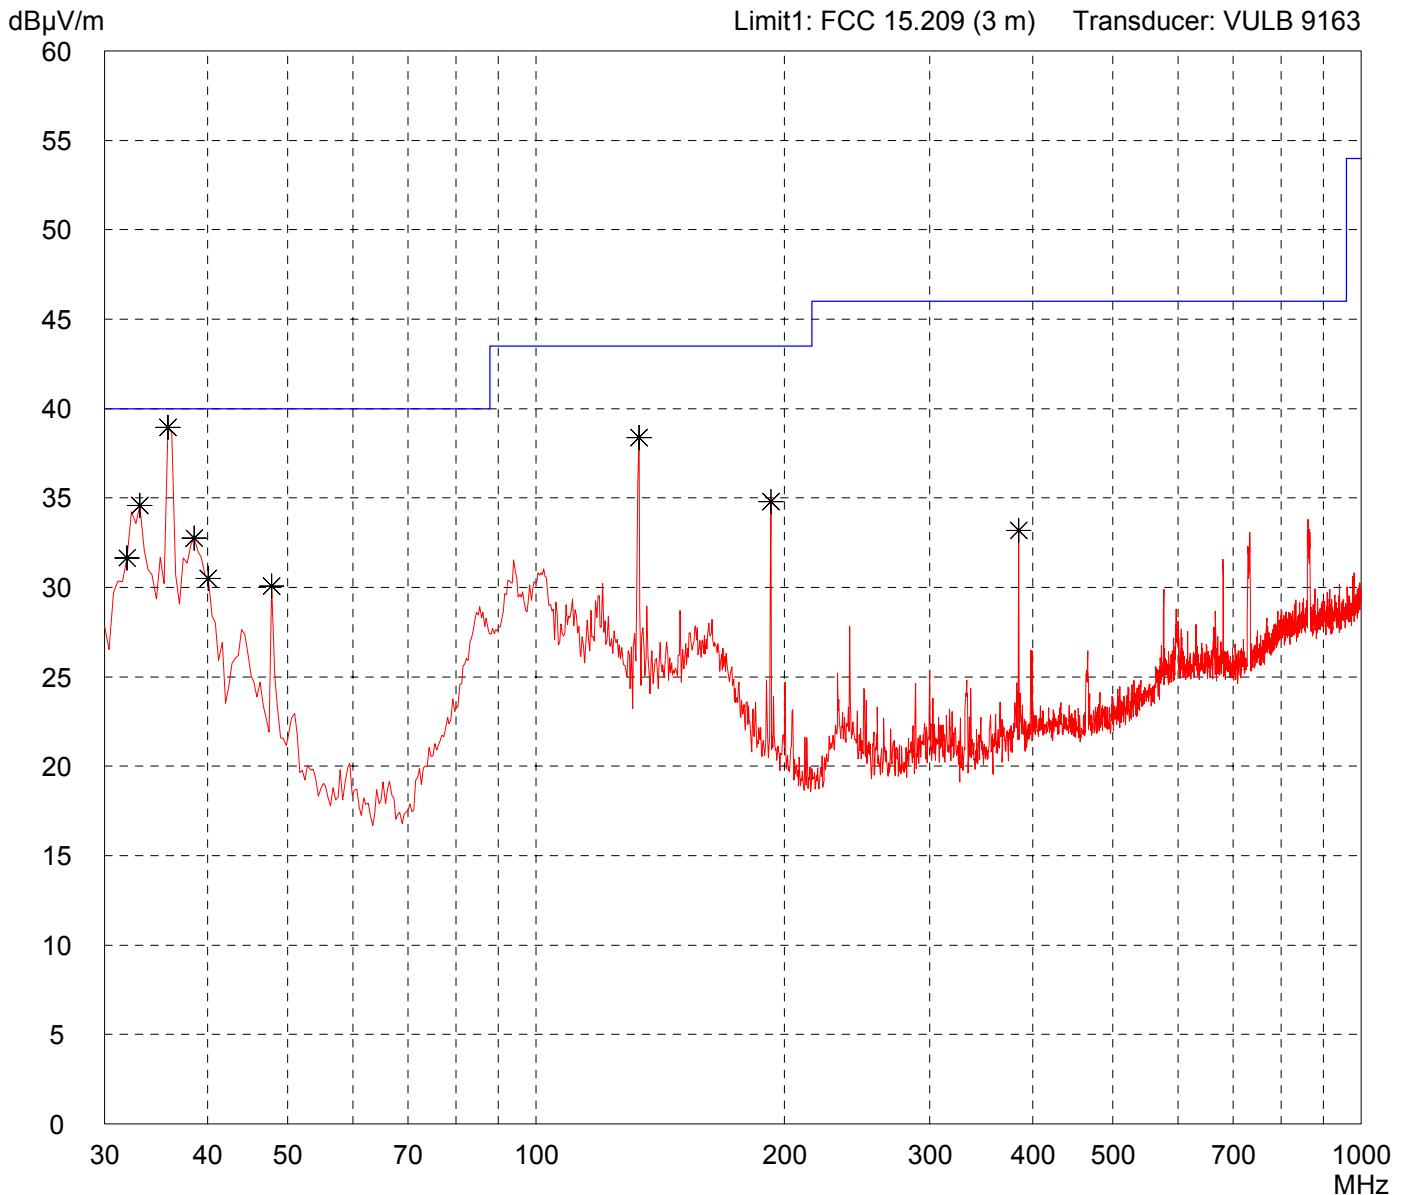

Result: Prescan

Project file: 55465-070528-1
