

TEST REPORT FROM RFI GLOBAL SERVICES LTD.

Test Of: Draeger Safety UK
460MHz Repeater Unit

To: FCC Part 90: 2004

Test Report Serial No:
RFI\MPTE1\RP47086JD01C
Supersedes Test Report Serial No:
RFI\MPTE1\RP46068JD10A

This Test Report Is Issued Under The Authority
Of Andrew Brown, Operations Manager:



Tested By: Steven Wong	Checked By: Tony Henriques
	
Report Copy No: PDF01	
Issue Date: 15 March 2005	Test Dates: 25 August to 08 September 2004 and 07 March 2005

This report is issued in Adobe Acrobat portable document format (PDF). It is only a valid copy of the report if it is being viewed in PDF format with the following security options not allowed: Changing the document, Selecting text and graphics, Adding or changing notes and form fields. Furthermore, the date of creation must match the issue date stated above.

This report may be copied in full. The results in this report apply only to the sample(s) tested.

RFI GLOBAL SERVICES LTD.

TEST REPORT

S.No. RFI\MPTE1\RP47086JD01C

Page 2 of 46

Issue Date: 15 March 2005

Test Of: **Draeger Safety UK**
460MHz Repeater Unit
To: **FCC Part 90: 2004**

This page has been left intentionally blank.

Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004

Table of Contents

1. Client Information	4
2. Equipment Under Test (EUT)	5
3. Test Specification, Methods And Procedures	8
4. Deviations From The Test Specification.....	9
5. Operation Of The EUT During Testing	10
6. Test Results.....	11
7. Measurements, Examinations And Derived Results	12
8. Additional Test Results For Repackaged Unit	32
9. Measurement Uncertainty	36
10. Measurement Methods – Part 90	37
Appendix 1. Test Equipment Used	44
Appendix 2. Test Configuration Drawings.....	45

Test Report Serial No: RFI\MPTE1\RP47086JD01C

Supersedes Test Report Serial No: RFI\MPTE1\RP46068JD10A

Test Of: **Draeger Safety UK**
460MHz Repeater Unit
To: **FCC Part 90: 2004**

1. Client Information

Company Name:	Draeger Safety UK
Address:	Kitty Brewster Estate Blyth Northumberland NE24 4RG United Kingdom
Contact Name:	Mr M Berney-Smith

Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004

2. Equipment Under Test (EUT)

The following information (with the exception of the Date of Receipt) has been supplied by the client:

2.1. Identification Of Equipment Under Test (EUT)

Brand Name:	DrägerMan PSS Merlin
Model Name or Number:	460 MHz Repeater Unit
Serial Number:	BRSK-0123
Country of Manufacture:	UK
FCC ID Number:	SIZ003
Date of Receipt:	25 August 2004

Brand Name:	DrägerMan PSS Merlin
Model Name or Number:	460 MHz Repeater Unit
Serial Number:	BRSK-0186
Country of Manufacture:	UK
FCC ID Number:	SIZ003
Date of Receipt:	07 March 2005

2.2. Accessories

The following accessories were supplied with the EUT:

Description:	6.5V NiMH Battery Pack
Brand Name:	Dräger
Model Name or Number:	33 50752
Serial Number:	BRSF-0104
Country of Manufacture:	UK

Description:	In-vehicle battery charger (12V DC input)
Brand Name:	None Stated
Model Name or Number:	None Stated
Serial Number:	None Stated
Country of Manufacture:	UK

2.3. Description Of EUT

The equipment under test is a data only telemetry radio built in a rugged housing. It's function is to repeat data packets in both directions (using the store and forward method) between an ECB (Entry Control Board) transceiver and Portable Radio Units.

Test Of: Draeger Safety UK
 460MHz Repeater Unit
To: FCC Part 90: 2004

2.4. Modifications Incorporated In EUT

The originally submitted test sample was fully tested to the relevant requirements of Part 90. The client then decided to slightly modify the equipment by repackaging the unit i.e. it is now surrounded by a foam lined 'bag' and the switch is now external to the transceiver housing. This was implemented to make the unit more robust and easier to handle. The external antenna remains identical to that of the original unit but is now on a shorter length of coax cable. Refer to Section 7.1 *General Comments* of this report for details of the testing performed on the modified sample.

2.5. Support Equipment

The following support equipment was used to exercise the EUT during testing:

Description:	Test Box*
Brand Name:	None Stated
Model Name or Number:	None Stated
Serial Number:	None Stated
Cable Length And Type:	1.5m, 4 Core
Connected to Port:	Data

Description:	Laptop PC**
Brand Name:	IBM
Model Name or Number:	ThinkPad 600E
Serial Number:	55184D8 02/99
Cable Length And Type:	1.5m, 4 Core
Connected to Port:	Data

*The test box was used to allow the changing of channels and entering the receive or transmit condition on the original, unmodified, sample.

**The lap top PC was used to allow the changing of channels and entering the receive or transmit condition on the modified sample and was not connected during testing.

Test Of: Draeger Safety UK
 460MHz Repeater Unit
To: FCC Part 90: 2004

2.6. Additional Information Related To Testing

Power Supply Requirement:	Nominal 6V NiMH Battery Supply		
Intended Operating Environment:	Public Emergency Services (Fire)		
Equipment Category:	Portable / In-Vehicle		
Type of Unit:	Transceiver		
Interface Ports:	Data connection port (service port only)		
Transmit Frequency Range	450 MHz to 470 MHz		
Transmit Channels Tested	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	Not stated	450
	Middle	Not stated	460
	Top	Not stated	470
Receive Frequency Range	450 MHz to 470 MHz		
Receive Channels Tested	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	Not stated	450
	Middle	Not stated	460
	Top	Not stated	470
Occupied Bandwidth	11.25 kHz		
Highest Unintentionally Generated Frequency	470 MHz		

Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004

3. Test Specification, Methods And Procedures

3.1. Test Specifications

Reference:	FCC Part 90: 2004 (Private Land Mobile Radio Services)
Title:	Code of Federal Regulations, Part 90 (47CFR90) Private Land Mobile Radio Services
Purpose of Test:	To determine whether the equipment complied with the requirements of the specification for the purposes of certification.

3.2. Methods And Procedures

The methods and procedures used were as detailed in:

ANSI/TIA-603-B-2003

Land Mobile Communications Equipment, Measurements and performance Standards.

ANSI C63.2 (1996)

Title: American National Standard for Instrumentation - Electromagnetic noise and field strength.

ANSI C63.4 (2003)

Title: American National Standard for Methods of Measurement of Radio-Noise Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

ANSI C63.5 (1988)

Title: American National Standard for the Calibration of antennas used for Radiated Emission measurements in Electromagnetic Interference (EMI) control.

ANSI C63.7 (1988)

Title: American National Standard Guide for Construction of Open Area Test Sites for performing Radiated Emission Measurements.

CISPR 16-1: (1999)

Title: Specification For Radio Disturbance and Immunity Measuring Apparatus and Methods. Part 1: Radio Disturbance and Immunity Measuring Apparatus.

DA00-705 (2000)

Title: Filing and Frequency Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

3.3. Definition Of Measurement Equipment

The measurement equipment used complied with the requirements of the standards referenced in the Methods & Procedures section above. Appendix 1 contains a list of the test equipment used.

Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004

4. Deviations From The Test Specification

None.

Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004

5. Operation Of The EUT During Testing

5.1. Operating Conditions

During testing, the EUT was powered by its integral nominal 6 V battery supply which, in turn, was being continually charged by a directly connectable in-vehicle 12V DC battery charger*.

**Note: The in-vehicle charger was only connected for testing of ERP, radiated spurious emissions and Frequency Stability tests (as specified in this report) on the original unit.*

5.2. Operating Modes

The EUT was tested in the following operating modes, unless otherwise stated:

Preliminary radiated spurious emissions pre-scan tests were performed in transmit and receive modes on the highest operating frequency of the EUT (top channel) with the in-vehicle battery charger detailed in section 2.2 of this report connected (charging the battery) and disconnected. The combination that exhibited the worst case mode of operation was then used to perform final measurements. This was found to be with the EUT connected to in-vehicle battery charger below 400 MHz (above this frequency the emissions levels were identical with and without the charger attached). Final measurements were performed on the top, middle and bottom channels if an emission was identified.

For all other transmit mode measurements the EUT was set to transmit on the top, middle and bottom channels as necessary.

5.3. Configuration And Peripherals

The EUT was tested in the following configuration:

*Configured with the in-vehicle battery charger attached.

**Note: For emissions testing of the repackaged unit, tests were performed without the in-vehicle charger connected as compliance was previously demonstrated during the original testing with the in-vehicle charger connected.*

Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004

6. Test Results

Summary Of Part 90 Tests

Range Of Measurements	Specification Reference	Port Type	Compliance Status
Receiver Radiated Spurious Emissions (30 MHz to 2 GHz)	C.F.R. 47 FCC Part 15: 2004 Section 15.109	Enclosure	Complied
Transmitter Carrier Output Power (ERP)	C.F.R. 47 FCC Part 90: 2004 Sections 90.205/90.267 TIA-603-B Section 2.2.17	Antenna*	Complied
Transmitter Occupied Bandwidth (Bandwidth Limitations)	C.F.R. 47 FCC Part 90: 2004 Sections 90.209/90.267/2.1049	Antenna Terminals	Complied
Transmitter Conducted Emissions Masks	C.F.R. 47 FCC Part 90: 2004 Sections 90.210 TIA-603-B Section 2.2.13	Antenna Terminals	Complied
Transmitter Conducted Emissions (Out of Band) (9 kHz to 5 GHz)	C.F.R. 47 FCC Part 90: 2004 Sections 90.210 TIA-603-B Section 2.2.13	Antenna Terminals	Complied
Transmitter Radiated Emissions Masks	C.F.R. 47 FCC Part 90: 2004 Sections 90.210 TIA-603-B Section 2.2.12	Antenna*	Complied
Transmitter Radiated Emissions (Out of Band) (30 MHz to 5 GHz)	C.F.R. 47 FCC Part 90: 2004 Sections 90.210 TIA-603-B Section 2.2.12	Antenna*	Complied
Transmitter Frequency Stability (Temperature & Voltage Variation)	C.F.R. 47 FCC Part 90: 2004 Sections 90.213/2.1055 TIA-603-B Section 2.2.2	Antenna Terminals	Complied
Transmitter Transient Frequency Behaviour	C.F.R. 47 FCC Part 90: 2004 Sections 90.214 TIA-603-B Section 2.2.19	Antenna Terminals	Complied

**Note: As the EUT is intended to be used with only one dedicated antenna, tests of carrier power and radiated emissions were performed with the antenna fitted i.e. not via the antenna connector and not into a non-radiating load respectively. The reasoning for this was that this is the true operating condition in the field i.e. the most representative.*

6.1. Location Of Tests

All the measurements described in this report were performed at the premises of RFI Global Services Ltd., Ewhurst Park, Ramsdell, Basingstoke, Hampshire, RG26 5RQ, England.

Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004

7. Measurements, Examinations And Derived Results

7.1. General Comments

7.1.1. This section contains test results only.

7.1.2. Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to Section 9 for details of measurement uncertainties.

7.1.3. Full testing was performed on the original test sample during the period 25 August to 8 September 2004. The client then decided to slightly modify the equipment by repackaging the unit and shortening the coax cable connected to the antenna. It was decided that only the re-measurement of radiated spurious emissions was necessary and therefore these tests were performed on the revised sample on 7 March 2005. Additional radiated spurious emissions test results are detailed in Section 8 of this report for the revised sample.

Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004

7.2. Receiver Radiated Spurious Emissions: Section 15.109

7.2.1. Electric Field Strength Measurements (Frequency Range: 30 to 1000 MHz)


7.2.1.1. The EUT was configured as for receiver radiated emissions testing as described in Section 10 of this report.

7.2.1.2. Tests were performed to identify the maximum receiver or standby radiated emissions levels.

Result: Top Channel

Frequency (MHz)	Ant. Pol.	Q-P Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
72.611	Vert.	23.0	40.0	17.0	Complied
84.876	Vert.	26.4	40.0	13.6	Complied
389.874	Vert.	29.1	46.0	16.9	Complied

Note: The preliminary scans showed similar emission levels for each mode below 1 GHz, therefore final radiated emissions measurements were performed with the EUT set to the top channel only.

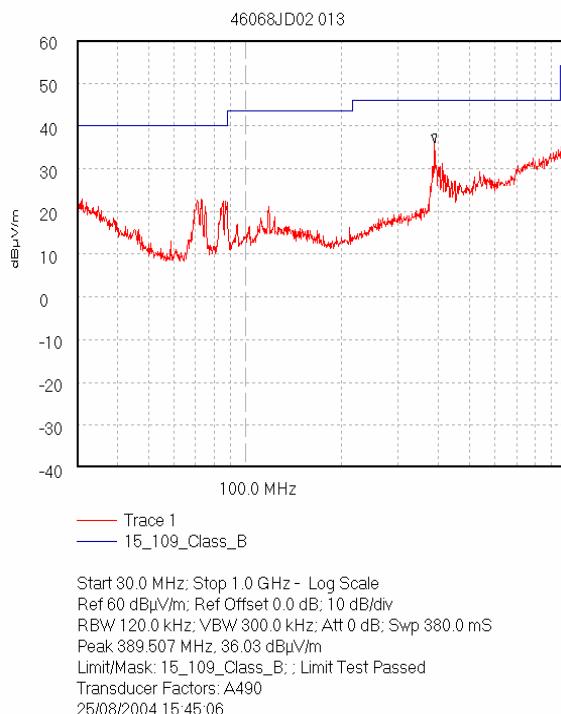

Note : this plot is a pre-scan and for indication purposes only. For final measurements, see accompanying tables.

Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004

Receiver Radiated Emissions: Section 15.109 (Continued)


7.2.2. Electric Field Strength Measurements (Frequency Range: 1 to 2 GHz)

Highest Peak Level:

Frequency (GHz)	Antenna Polarity (H/V)	Peak Detector level (dB μ V)	Antenna factor (dB)	Cable loss (dB)	Actual Peak Level (dB μ V/m)	**Average Limit (dB μ V/m)	Margin (dB)	Result
1.821*	Vert.	21.4	21.6	0.7	43.7	54.0	10.3	Complied

*Note: No spurious emissions were detected above the noise floor of the measuring receiver; therefore, the highest peak noise floor reading of the measuring receiver was recorded as shown in the table above.

**Note: The peak level was compared to the average limit as opposed to being compared to the peak limit because this is the more onerous limit.

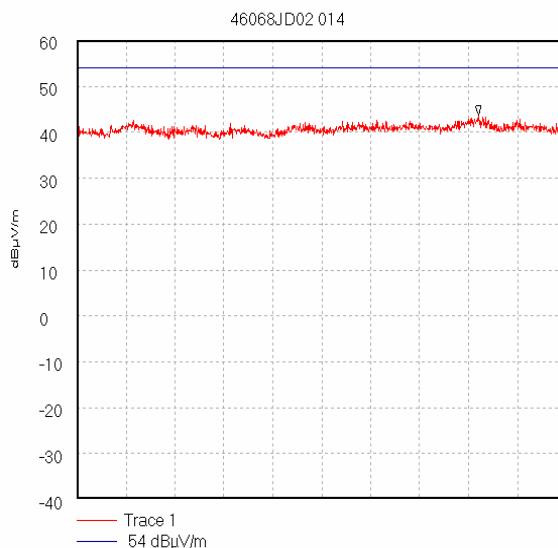

Start 1.0 GHz; Stop 2.0 GHz
Ref 60 dB μ V/m; Ref Offset 0.0 dB; 10 dB/div
RBW 1000.0 kHz; VBW 1.0 MHz; Att 0 dB; Swp 20.0 mS
Peak 1.821 GHz, 43.73 dB μ V/m
Display Line: 54 dB μ V/m; Limit Test Passed
Transducer Factors: A490
25/08/2004 15:54:37

Note : this plot is a pre-scan and for indication purposes only. For final measurements, see accompanying tables.

Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004

7.3. Transmitter Carrier Output Power (ERP): Sections 90.205/90.267

7.3.1. The EUT was configured as for transmitter radiated emissions as described in Section 10 of this report.

7.3.2. Tests were performed to identify the EUT's maximum radiated transmit power.

Results:

Channel	Frequency (MHz)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
Bottom	450	27.7	33.0	5.3	Complied
Middle	460	28.2	33.0	4.8	Complied
Top	470	26.3	33.0	4.7	Complied

Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004

7.4. Transmitter Occupied Bandwidth (Bandwidth Limitations): Sections 90.209/90.267/2.1049

7.4.1. The EUT was configured as for Occupied Bandwidth measurements as described in Section 10 of this report.


7.4.2. Tests were performed to identify the bandwidth occupied by the fundamental frequency of the EUT.

Result:


Channel	Frequency (MHz)	RBW (kHz)	VBW kHz	Occupied Bandwidth (kHz)	Limit (kHz)	Margin (kHz)	Result
Bottom	450	0.3	1	3.833	11.25	7.417	Complied
Middle	460	0.3	1	3.983	11.25	7.267	Complied
Top	470	0.3	1	4.058	11.25	7.192	Complied

Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004


Transmitter Occupied Bandwidth (Bandwidth Limitations): Sections 90.209/90.267/2.1049 (Continued)

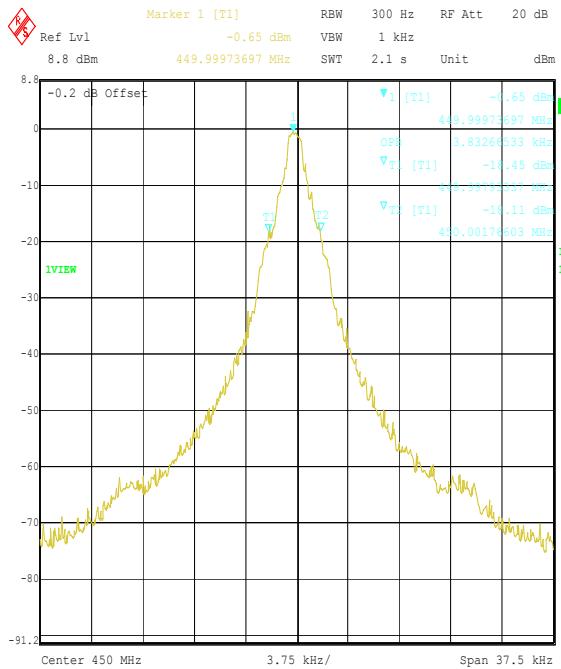

Title: Draeger EUT: Repeater Unit. FCC P90 Occupied Bandwidth
 Comment A: 46068JD10 Bottom Channel.
 Date: 1.SEP.2004 10:57:41

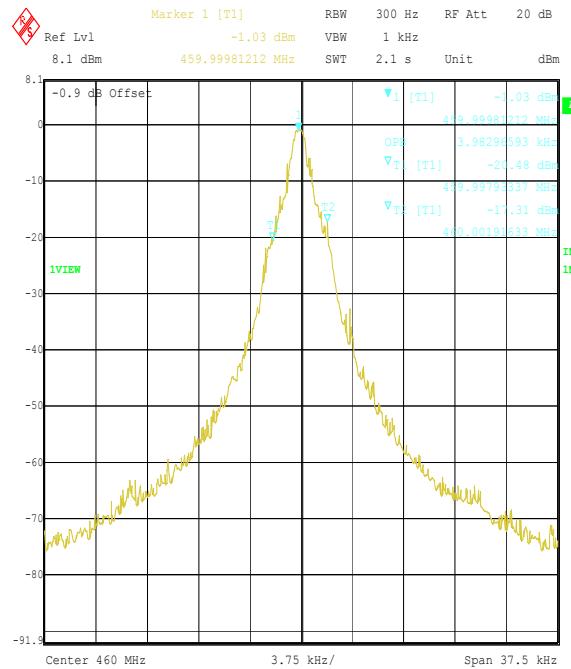

Title: Draeger EUT: Repeater Unit. FCC P90 Occupied Bandwidth
 Comment A: 46068JD10 Middle Channel.
 Date: 1.SEP.2004 10:52:39

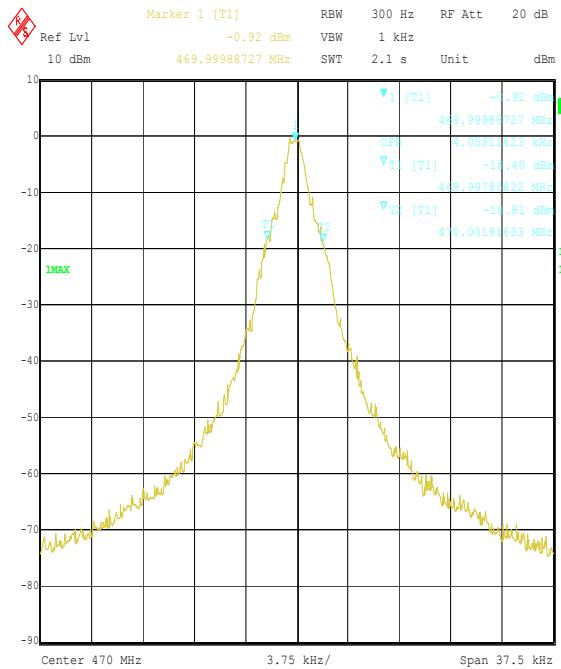

Title: Draeger EUT: Repeater Unit. FCC P90 Occupied Bandwidth
 Comment A: 46068JD10 Top Channel.
 Date: 1.SEP.2004 10:49:06

Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004

7.5. Transmitter Conducted Emissions Masks: Section 90.210

7.5.1. The EUT was configured as for transmitter conducted emissions measurements as described in Section 10 of this report.


7.5.2. Tests were performed to determine compliance with the out of band power requirements at frequencies adjacent to the channel occupied by the fundamental frequency of the EUT.

Results:


Results are presented graphically in the following graphs. As can be seen from the plots the EUT complies with the requirements of relevant part of the regulations.

Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004


Transmitter Conducted Emissions Masks: Section 90.210 (Continued)

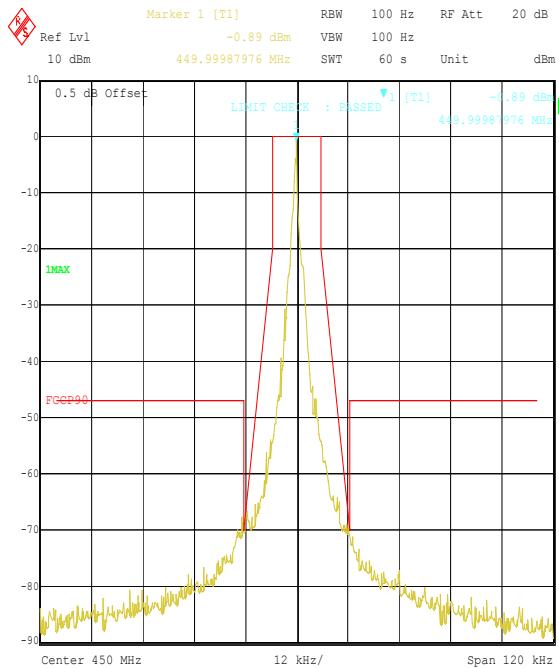

Title: Draeger EUT: Repeater Unit. FCC P90 Cond. Emission Mask
Comment A: 46068JD10 Bottom Channel.
Date: 1.SEP.2004 15:30:23

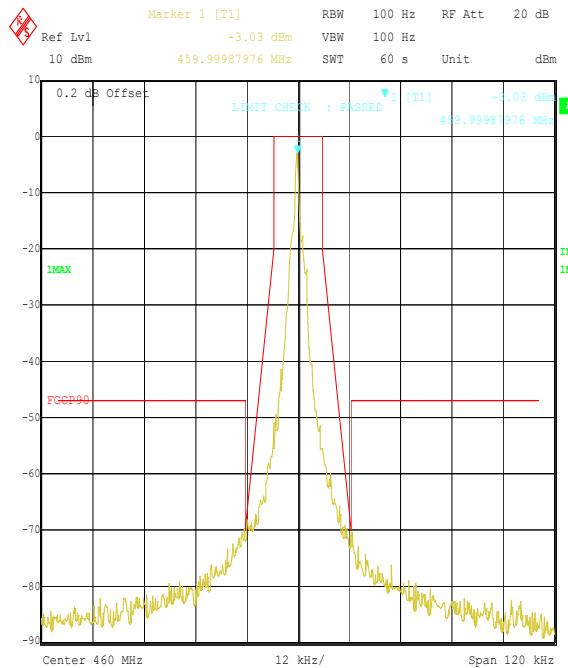

Title: Draeger EUT: Repeater Unit. FCC P90 Cond. Emission Mask
Comment A: 46068JD10 Middle Channel.
Date: 1.SEP.2004 15:49:06

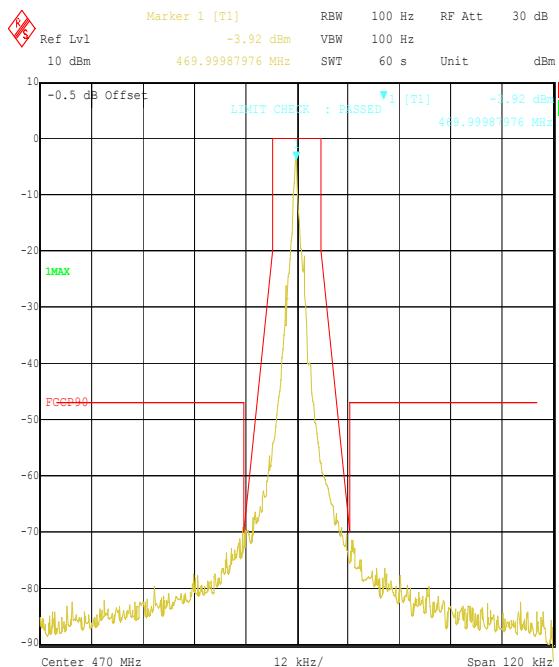

Title: Draeger EUT: Repeater Unit. FCC P90 Cond. Emission Mask
Comment A: 46068JD10 Top Channel.
Date: 1.SEP.2004 15:51:55

Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004

7.6. Transmitter Conducted Emissions (Out of Band): Section 90.210

7.6.1. The EUT was configured as for transmitter conducted emissions measurements as described in Section 10 of this report.

7.6.2. Tests were performed to identify the maximum transmitter conducted emission levels.

Result: Bottom Channel



Frequency (MHz)	Peak Emission Level (dBm)	Peak Emission Level (dBc)	Limit (dBc)	Margin (dB)	Result
4959.920	-39.7	-66.8	-47.1	19.7	Complied

Result: Middle Channel

Frequency (MHz)	Peak Emission Level (dBm)	Peak Emission Level (dBc)	Limit (dBc)	Margin (dB)	Result
3196.393	-39.1	-66.3	-47.2	19.1	Complied

Result: Top Channel

Frequency (MHz)	Peak Emission Level (dBm)	Peak Emission Level (dBc)	Limit (dBc)	Margin (dB)	Result
4703.407	-37.5	-65.0	-47.5	17.5	Complied

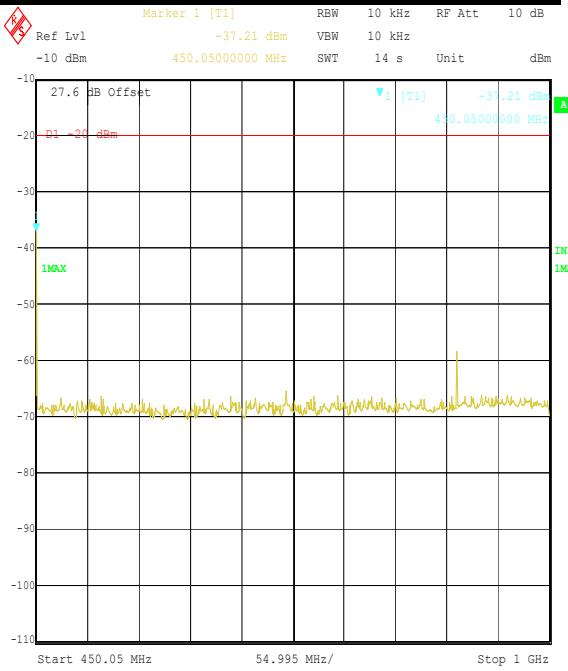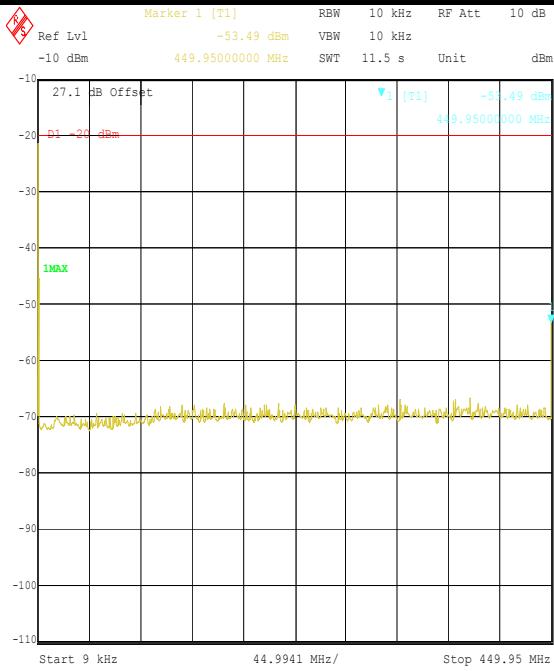


Title: Draeger EUT: Repeater Unit. FCC P90 Cond. Emission
Comment A: 46068JD10 Bottom Channel.
Date: 1.SEP.2004 15:11:23

Title: Draeger EUT: Repeater Unit. FCC P90 Cond. Emission
Comment A: 46068JD10 Bottom Channel.
Date: 1.SEP.2004 15:12:25

Note: these plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004


Transmitter Conducted Emissions (Out of Band): Section 90.210 (Continued)

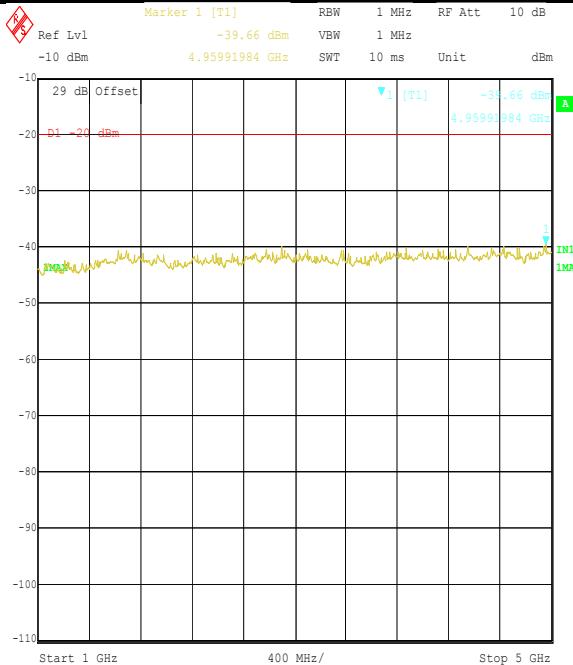

Title: Draeger EUT: Repeater Unit, FCC P90 Cond. Emission

Comment A: 46068JD10 Bottom Channel.


Date: 1.SEP.2004 15:15:03

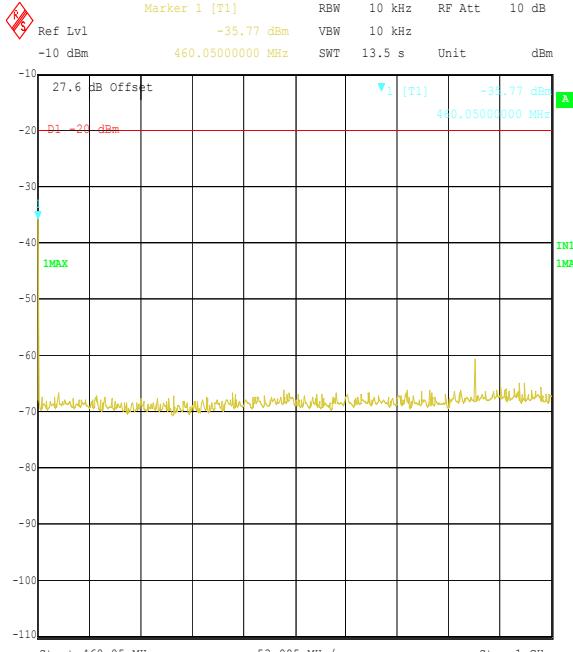

Title: Draeger EUT: Repeater Unit, FCC P90 Cond. Emission

Comment A: 46068JD10 Middle Channel.


Date: 1.SEP.2004 15:13:01

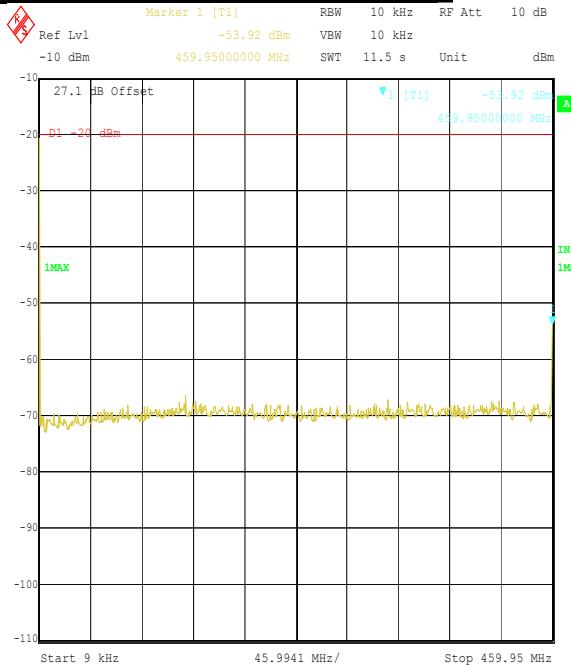

Title: Draeger EUT: Repeater Unit, FCC P90 Cond. Emission

Comment A: 46068JD10 Middle Channel.

Date: 1.SEP.2004 15:10:50

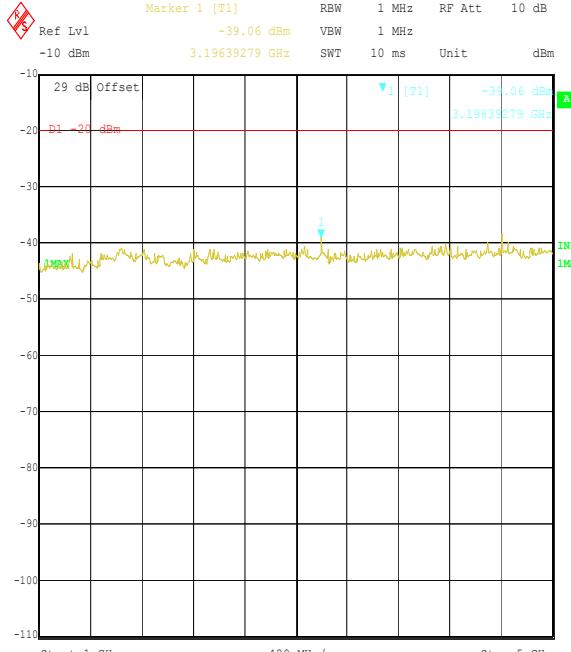

Title: Draeger EUT: Repeater Unit, FCC P90 Cond. Emission


Comment A: 46068JD10 Middle Channel.

Date: 1.SEP.2004 15:14:30

Note: these plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004


Transmitter Conducted Emissions (Out of Band): Section 90.210 (Continued)

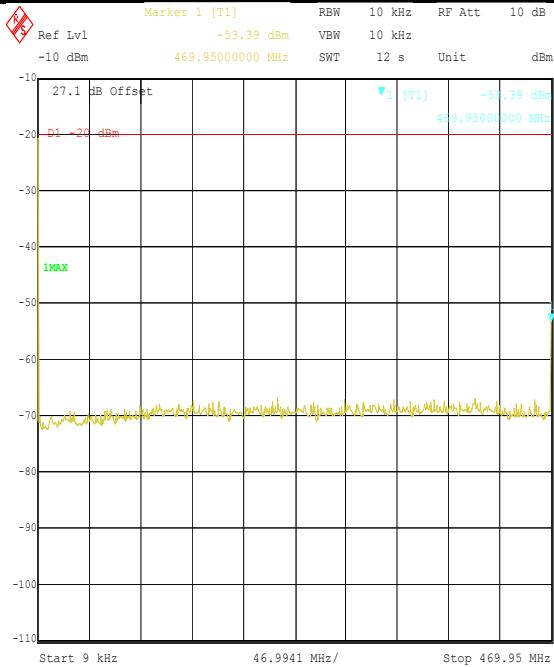

Title: Draeger EUT: Repeater Unit. FCC P90 Cond. Emission

Comment A: 46068JD10 Top Channel.

Date: 1.SEP.2004 15:09:56

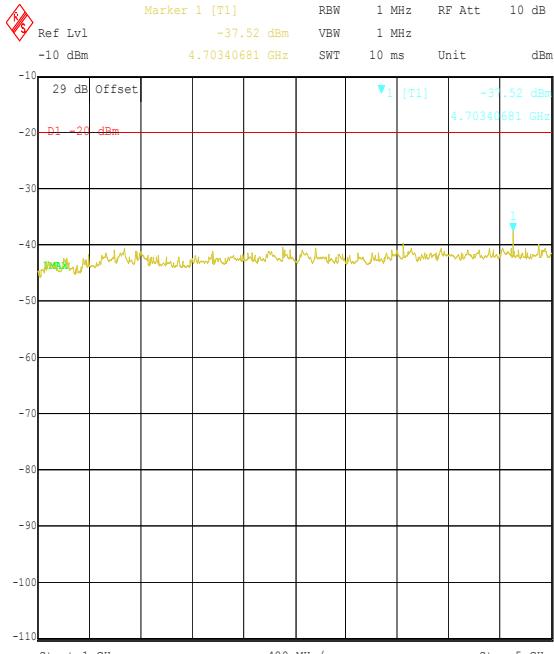


Title: Draeger EUT: Repeater Unit. FCC P90 Cond. Emission

Comment A: 46068JD10 Top Channel.

Date: 1.SEP.2004 15:14:07

Note: these plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Note: Six of the above plots show emissions at 449.95 MHz, 450.05 MHz, 459.95 MHz, 460.05 MHz, 469.95 MHz and 470.05 MHz respectively. These are, in the fact, the fundamental carrier frequencies for each channel. It is confirmed that these carrier frequency emissions lie within the operating frequency band.

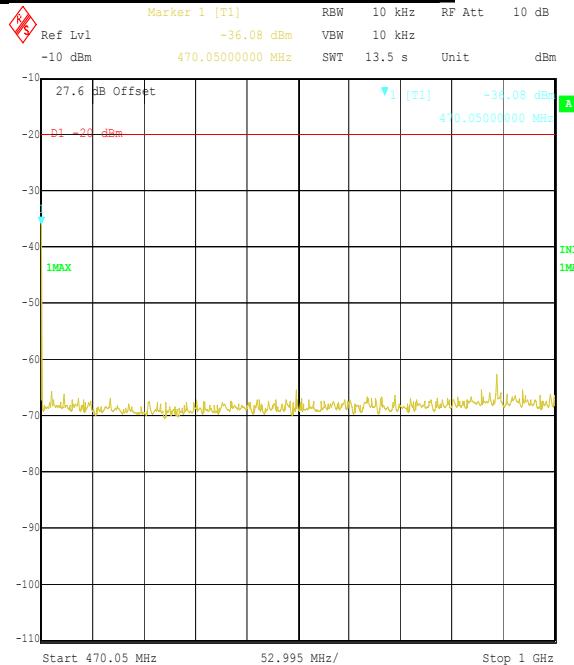

Title: Draeger EUT: Repeater Unit. FCC P90 Cond. Emission

Comment A: 46068JD10 Top Channel.

Date: 1.SEP.2004 15:13:25

Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004

7.7. Transmitter Radiated Emissions Masks: Section 90.210

7.7.1. The EUT was configured as for transmitter radiated emissions measurements as described in Section 10 of this report.


7.7.2. Tests were performed to determine compliance with the out of band power requirements at frequencies adjacent to the channel occupied by the fundamental frequency of the EUT.

Results:

Results are presented graphically in the following graphs. As can be seen from the plots the EUT complies with the requirements of relevant part of the regulations.

Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004


Transmitter Radiated Emissions Masks: Section 90.210 (Continued)

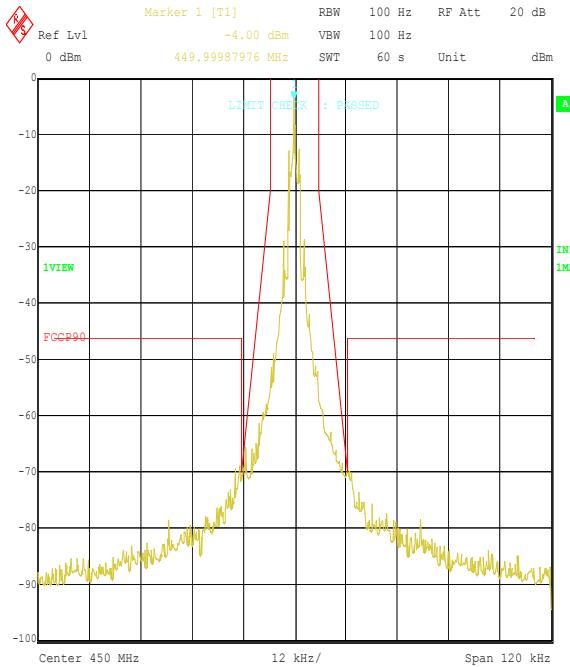

Title: Draeger EUT: Repeater Unit. FCC P90.210 Emission Mask

Comment A: 46068JD10 Bottom Channel.


Date: 1.SEP.2004 10:28:11

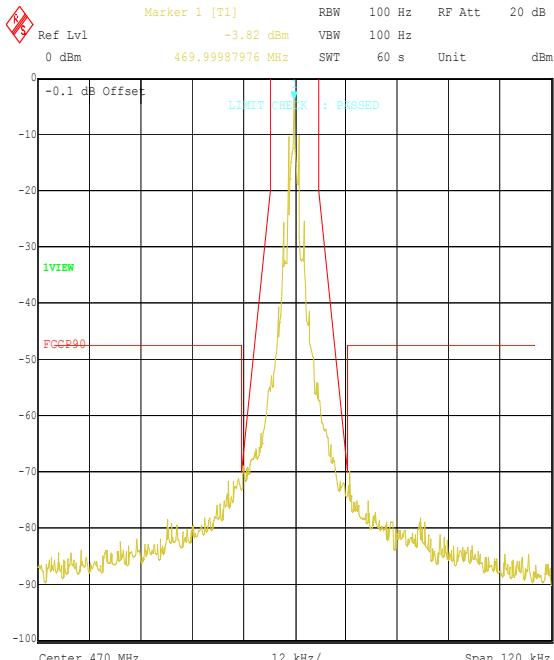

Title: Draeger EUT: Repeater Unit. FCC P90.210 Emission Mask

Comment A: 46068JD10 Middle Channel.

Date: 1.SEP.2004 10:33:27

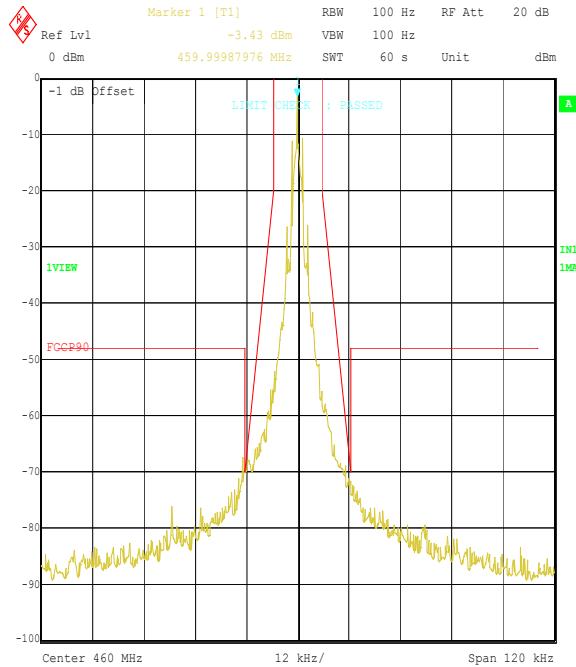

Title: Draeger EUT: Repeater Unit. FCC P90.210 Emission Mask

Comment A: 46068JD10 Top Channel.

Date: 1.SEP.2004 10:40:42

Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004

7.8. Transmitter Radiated Emissions (Out of Band): Section 90.210

7.8.1. The EUT was configured as for transmitter radiated emissions measurements as described in Section 10 of this report.

7.8.2. Tests were performed to identify the maximum transmitter radiated emissions levels.

Result: Bottom Channel

Frequency (MHz)	Peak Emission Level (dBm)	Peak Emission Level (dBc)	Limit (dBc)	Margin (dB)	Result
900.004	-30.2	-57.9	-47.7	10.2	Complied
1350.002	-49.2	-76.9	-47.7	29.2	Complied

Result: Middle Channel

Frequency (MHz)	Peak Emission Level (dBm)	Peak Emission Level (dBc)	Limit (dBc)	Margin (dB)	Result
920.003	-28.2	-56.4	-48.2	8.2	Complied
1380.133	-47.9	-76.1	-48.2	27.9	Complied


Result: Top Channel

Frequency (MHz)	Peak Emission Level (dBm)	Peak Emission Level (dBc)	Limit (dBc)	Margin (dB)	Result
940.004	-23.4	-49.7	-46.3	3.4	Complied
1410.016	-49.5	-75.8	-46.3	29.5	Complied


Note: Plot 46068JD02 012 shows an emission at 469.608 MHz. This is the fundamental transmission frequency of the top channel i.e. it is the wanted emission and lies within the allowed operating frequency band.

Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004


Transmitter Radiated Emissions (Out of Band): Section 90.210 (Continued)

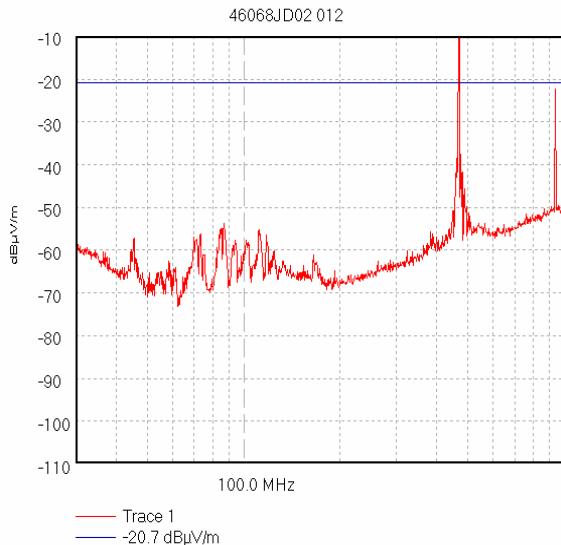


Start 30.0 MHz; Stop 1.0 GHz - Log Scale
Ref -10 dB μ V/m; Ref Offset 9.6 dB; 10 dB/div
RBW 100.0 kHz; VBW 100.0 kHz; Att 0 dB; Swp 100.0 mS
Peak 469.608 MHz, -6.02 dB μ V/m
Display Line: -20.7 dB μ V/m; ; Limit Test Passed
Transducer Factors: A490
25/08/2004 15:40:55

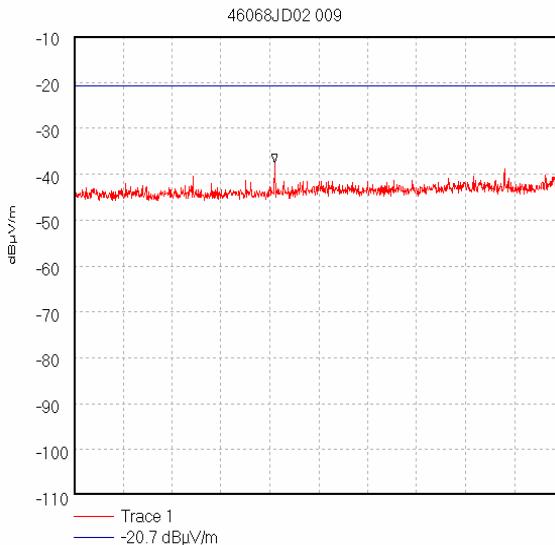

Start 1.0 GHz; Stop 2.0 GHz
Ref -10 dB μ V/m; Ref Offset 9.6 dB; 10 dB/div
RBW 1000.0 kHz; VBW 1.0 MHz; Att 0 dB; Swp 20.0 mS
Peak 1.41 GHz, -37.6 dB μ V/m
Display Line: -20.7 dB μ V/m; ; Limit Test Passed
Transducer Factors: A490
25/08/2004 15:28:34

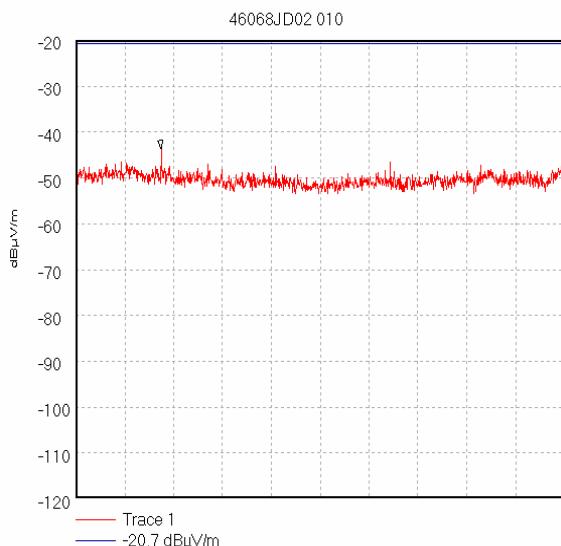

Start 2.0 GHz; Stop 4.0 GHz
Ref -20 dB μ V/m; Ref Offset 9.6 dB; 10 dB/div
RBW 1000.0 kHz; VBW 1.0 MHz; Att 0 dB; Swp 20.0 mS
Peak 2.349 GHz, -43.74 dB μ V/m
Display Line: -20.7 dB μ V/m; ; Limit Test Passed
Transducer Factors: A490
25/08/2004 15:34:11

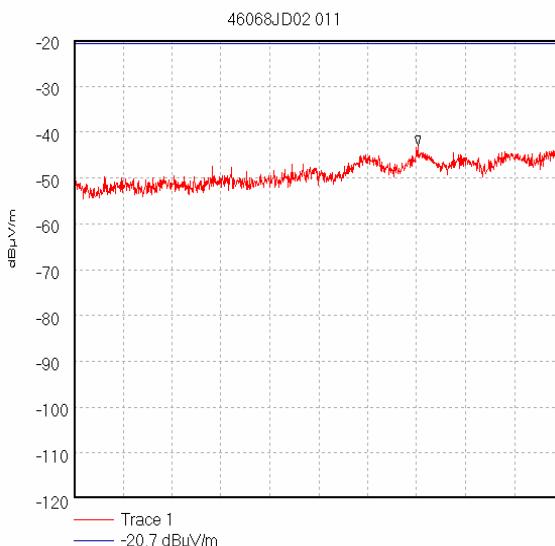

Start 4.0 GHz; Stop 5.0 GHz
Ref -20 dB μ V/m; Ref Offset 9.6 dB; 10 dB/div
RBW 1000.0 kHz; VBW 1.0 MHz; Att 0 dB; Swp 20.0 mS
Peak 4.703 GHz, -42.9 dB μ V/m
Display Line: -20.7 dB μ V/m; ; Limit Test Passed
Transducer Factors: A490
25/08/2004 15:37:26

Note 1: these plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Note 2: All the above plots incorrectly show the -(50+ 10 log (P)) dBc limit as -20.7 dB μ V/m, it should have been -20 dBm. The incorrectly displayed unit of measurement was due to a glitch in the software used to transpose the on-screen image on the spectrum analyser to the PC holding the soft copy of the plot. It is confirmed that the measurements were made using the correct measurement unit i.e. dBm.

Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004

7.9. Transmitter Frequency Stability (Temperature Variation): Sections 90.213/2.1055

7.9.1. The EUT was configured as for frequency stability measurements as described in Section 10 of this report.

7.9.2. Tests were performed to identify the maximum frequency error of the EUT with variations in ambient temperature.

Results: Bottom Channel (450.0 MHz)

Temp (°C)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	Margin (ppm)	Result
-30	450.00030	300	0.7	2.5	1.8	Complied
-20	450.00028	280	0.6	2.5	1.9	Complied
-10	450.00026	260	0.6	2.5	1.9	Complied
0	450.00024	240	0.5	2.5	2.0	Complied
10	450.00018	180	0.4	2.5	2.1	Complied
20	450.00001	10	<0.1	2.5	>2.4	Complied
30	450.00001	10	<0.1	2.5	>2.4	Complied
40	449.99984	-60	0.1	2.5	2.4	Complied
50	449.99977	-230	0.5	2.5	2.0	Complied

Results: Middle Channel (460.0 MHz)

Temp (°C)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	Margin (ppm)	Result
-30	460.00030	300	0.7	2.5	1.8	Complied
-20	460.00027	290	0.6	2.5	1.9	Complied
-10	460.00028	280	0.6	2.5	1.9	Complied
0	460.00023	230	0.5	2.5	2.0	Complied
10	460.00013	130	0.3	2.5	2.2	Complied
20	459.99998	-20	<0.1	2.5	>2.4	Complied
30	459.99997	-30	0.1	2.5	2.4	Complied
40	459.99994	-60	0.1	2.5	2.4	Complied
50	459.99973	-270	0.6	2.5	1.9	Complied

Test Of: **Draeger Safety UK**
460MHz Repeater Unit
To: **FCC Part 90: 2004**

Transmitter Frequency Stability (Temperature Variation) (continued)

Results: Top Channel (470.0 MHz)

Temp (°C)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	Margin (ppm)	Result
-30	470.00030	300	0.6	2.5	1.9	Complied
-20	470.00029	290	0.6	2.5	1.9	Complied
-10	470.00028	280	0.6	2.5	1.9	Complied
0	470.00024	240	0.5	2.5	2.0	Complied
10	470.00015	150	0.3	2.5	2.2	Complied
20	469.99997	-30	0.1	2.5	2.4	Complied
30	469.99994	-60	0.1	2.5	2.4	Complied
40	469.99985	-150	0.3	2.5	2.2	Complied
50	469.99972	-280	0.6	2.5	1.9	Complied

Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004

7.10. Transmitter Frequency Stability (Voltage Variation): Sections 90.213/2.1055

Battery Voltage Variation

7.10.1. The EUT was configured as for frequency stability measurements as described in Section 10 of this report.

7.10.2. Tests were performed to identify the maximum frequency error of the EUT with variations in supply voltage directly to the EUT i.e. the battery was replaced with a 'dummy' battery allowing direct connection to a DC power supply.

Results: Bottom Channel (450.0 MHz)

Supply Voltage (V)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	Margin (ppm)	Result
6.0	450.00001	10	<0.1	2.5	>2.4	Complied
5.0	449.99908	-920	2.0	2.5	0.5	Complied

Results: Middle Channel (460.0 MHz)

Supply Voltage (V)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	Margin (ppm)	Result
6.0	459.99998	20	<0.1	2.5	>2.4	Complied
5.0	459.99904	-960	2.1	2.5	0.4	Complied

Results: Top Channel (470.0 MHz)

Supply Voltage (V)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	Margin (ppm)	Result
6.0	469.99997	30	0.1	2.5	2.4	Complied
5.0	469.99896	-1040	2.2	2.5	0.3	Complied

Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004

7.11. Transmitter Frequency Stability (Voltage Variation): Sections 90.213/2.1055

In-Vehicle Battery Charger Voltage Variation

7.11.1. The EUT was configured as for frequency stability measurements as described in Section 10 of this report.

7.11.2. Tests were performed to identify the maximum frequency error of the EUT with variations in supply voltage to the in-vehicle battery charger i.e. across the entire DC input voltage range of the battery charger (8 Volts to 24 Volts).

Results: Bottom Channel (450.0 MHz)

Supply Voltage (V)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	Margin (ppm)	Result
8.0	450.00001	10	<0.1	2.5	>2.4	Complied
12.0	450.00001	10	<0.1	2.5	>2.4	Complied
24.0	450.00001	10	<0.1	2.5	>2.4	Complied

Results: Middle Channel (460.0 MHz)

Supply Voltage (V)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	Margin (ppm)	Result
8.0	459.99998	-20	<0.1	2.5	>2.4	Complied
12.0	459.99998	-20	<0.1	2.5	>2.4	Complied
24.0	459.99998	-20	<0.1	2.5	>2.4	Complied

Results: Top Channel (470.0 MHz)

Supply Voltage (V)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	Margin (ppm)	Result
8.0	469.99997	-30	<0.1	2.5	>2.4	Complied
12.0	469.99997	-30	<0.1	2.5	>2.4	Complied
24.0	469.99997	-30	<0.1	2.5	>2.4	Complied

Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004

7.12. Transmitter Transient Frequency Behaviour: Sections 90.214

7.12.1. The EUT was configured as for transient frequency behaviour measurements as described in Section 10 of this report.

7.12.2. Tests were performed to identify the EUT's transient frequency behaviour.

Results:

Time Intervals	FREQUENCY DIFFERENCE (kHz)		
	Bottom Channel	Middle Channel	Top Channel
t1	5.2	1.2	7.7
t2	1.2	1.2	1.2
t3	6.1	11.7	1.2

LIMITS		
Time Intervals	Maximum frequency difference	Frequency Range
		421 to 512 MHz
t1	+/-12.5 kHz	\leq 10.0 mS
t2	+/-6.25 kHz	\leq 25.0 mS
t3	+/-12.5 kHz	\leq 10.0 mS

Confirm that during the period from the end of t2 to the beginning of t3 the frequency difference does not exceed 2.5 ppm (1125 Hz) of the bottom channel carrier frequency YES

Confirm that during the period from the end of t2 to the beginning of t3 the frequency difference does not exceed 2.5 ppm (1150 Hz) of the middle channel carrier frequency YES

Confirm that during the period from the end of t2 to the beginning of t3 the frequency difference does not exceed 2.5 ppm (1175 Hz) of the top channel carrier frequency YES

Note: If the transmitter carrier output power rating is 6 Watts or less the frequency difference during time periods t1 and t3 may exceed the maximum frequency difference for these time periods.

The following graphs are graphical representations of the above results but are not included in the number of pages in this report.

Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004

8. Additional Test Results For Repackaged Unit

8.1. Receiver Radiated Spurious Emissions: Section 15.109

8.1.1. Electric Field Strength Measurements (Frequency Range: 30 to 1000 MHz)

8.1.1.1. The EUT was configured as for receiver radiated emissions testing as described in Section 10 of this report.


8.1.1.2. Tests were performed to identify the maximum receiver or standby radiated emissions levels.

Results: Top Channel


Frequency (MHz)	Ant. Pol.	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
197.615*	Vert.	29.1	43.5	14.4	Complied

**Note: No spurious emissions were detected above the noise floor of the measuring receiver; therefore, the highest peak noise floor reading of the measuring receiver was recorded as shown in the table above.*

Note: The preliminary scans showed similar emission levels for each channel below 1 GHz, therefore final radiated emissions measurements were performed with the EUT set to the top channel only.

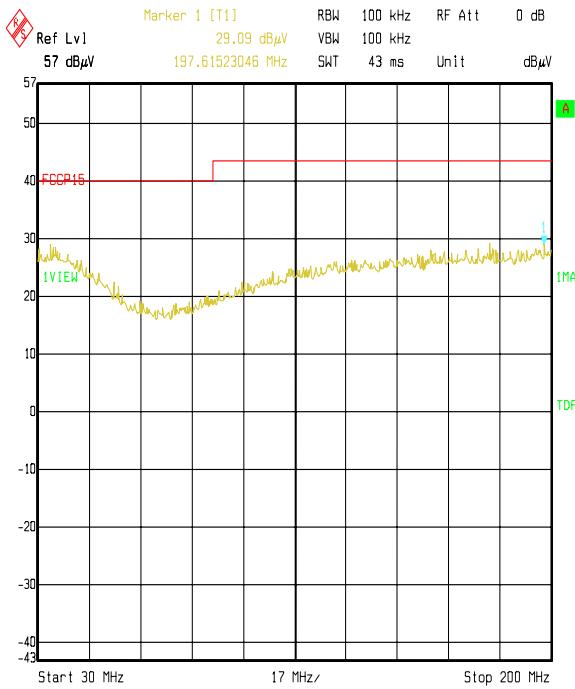

Comment A: Repeater Unit TX Mode
 Date: 07.MAR.2005 17:56:57

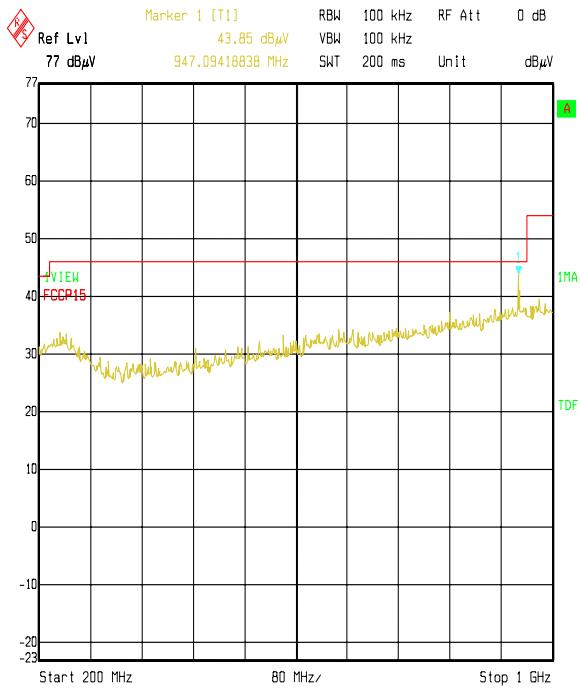

Comment A: Repeater Unit TX Mode
 Date: 07.MAR.2005 17:54:19

Note: the emission shown in the 200 MHz to 1 GHz plot at 947.094 MHz is an ambient and does not emanate from the EUT. Because the emission is not from the EUT no level has been recorded in the preceding result table.

Note: these plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables. It is confirmed that although the scans indicate a RBW of 100 kHz final measurements were performed using the appropriate CISPR bandwidth i.e. 120 kHz

Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004

Receiver Radiated Emissions: Section 15.109 (Continued)

8.1.2. Electric Field Strength Measurements (Frequency Range: 1 to 2 GHz)


Results: Top Channel

Highest Peak Level

Frequency (GHz)	Antenna. Polarity	Peak Detector Level (dB μ V)	Antenna Factor	Cable Loss	Actual Peak Level (dB μ V/m)	**Average Limit (dB μ V/m)	Margin (dB)	Result
1.784*	Vert.	11.0	21.6	1.1	33.7	54.0	20.3	Complied

*Note: No spurious emissions were detected above the noise floor of the measuring receiver; therefore, the highest peak noise floor reading of the measuring receiver was recorded as shown in the table above.

**Note: The peak level was compared to the average limit as opposed to being compared to the peak limit because this is the more onerous limit.

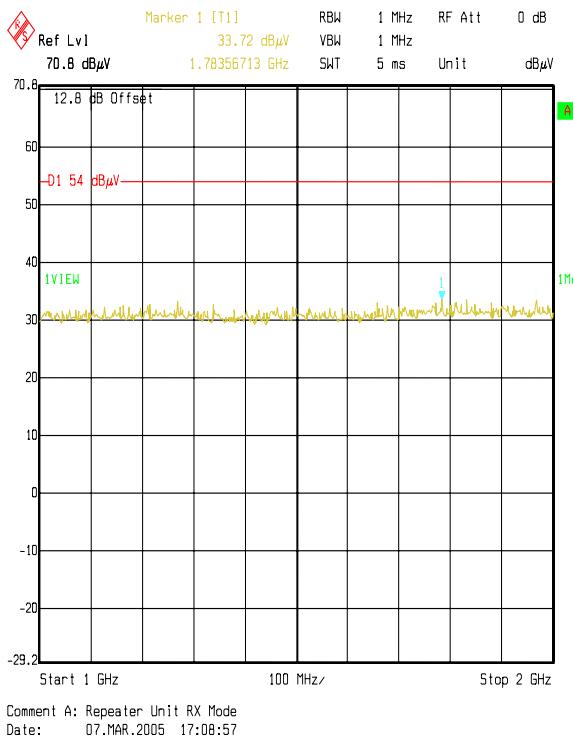

Note: this plot is a pre-scan and for indication purposes only. For final measurements, see accompanying tables.

Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004

8.2. Transmitter Radiated Emissions (Out of Band): Section 90.210

8.2.1. The EUT was configured as for transmitter radiated emissions measurements as described in Section 10 of this report.

8.2.2. Tests were performed to identify the maximum transmitter radiated emission levels.

Result: Bottom Channel


Frequency (MHz)	Peak Emission Level (dBm)	Peak Emission Level (dBc)	Limit (dBc)	Margin (dB)	Result
900.004	-28.5	-56.2	-47.7	8.8	Complied
1350.00`	-38.1	-65.8	-47.7	18.1	Complied

Result: Middle Channel

Frequency (MHz)	Peak Emission Level (dBm)	Peak Emission Level (dBc)	Limit (dBc)	Margin (dB)	Result
920.000	-27.9	-56.1	-48.2	7.9	Complied
1380.000	-46.5	-74.7	-48.2	26.5	Complied

Result: Top Channel


Frequency (MHz)	Peak Emission Level (dBm)	Peak Emission Level (dBc)	Limit (dBc)	Margin (dB)	Result
940.001	-33.9	-60.2	-46.3	13.9	Complied
1410.001	-52.4	-78.7	-46.3	32.4	Complied

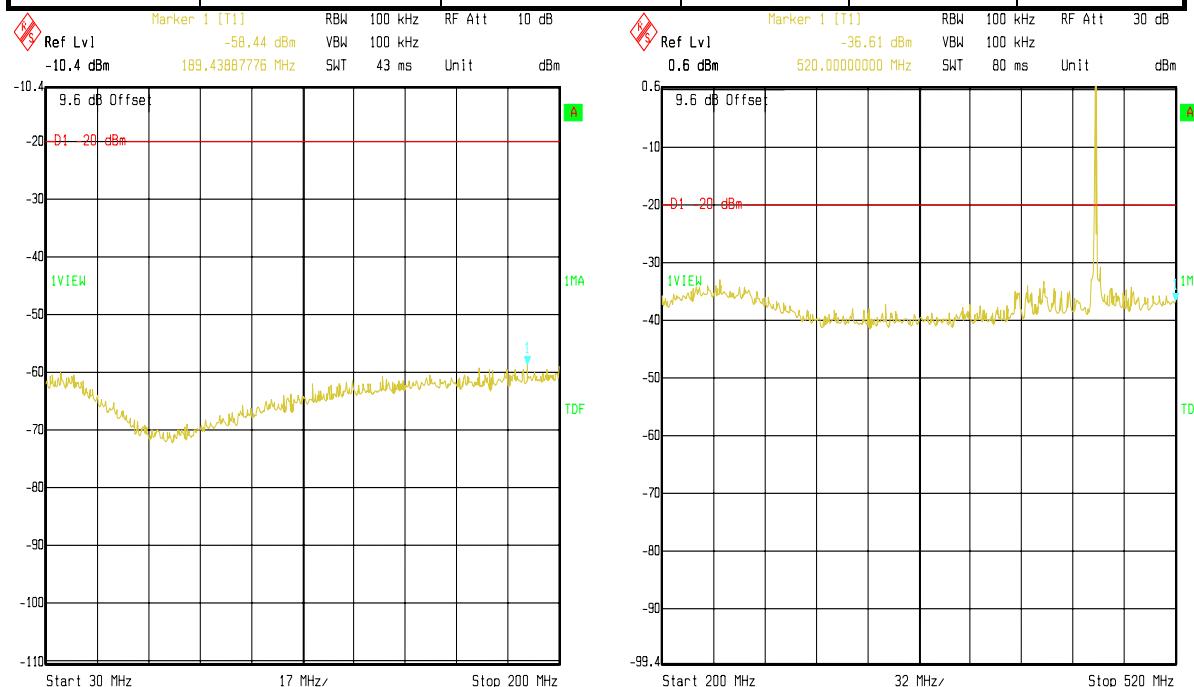

Note: The 200 MHz to 520 MHz plot shows an emission at 470 MHz. This is the fundamental transmission frequency of the top channel i.e. it is the wanted emission and lies within the allowed operating frequency band.


Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004

Transmitter Radiated Emissions (Out of Band): Section 90.210 (Continued)

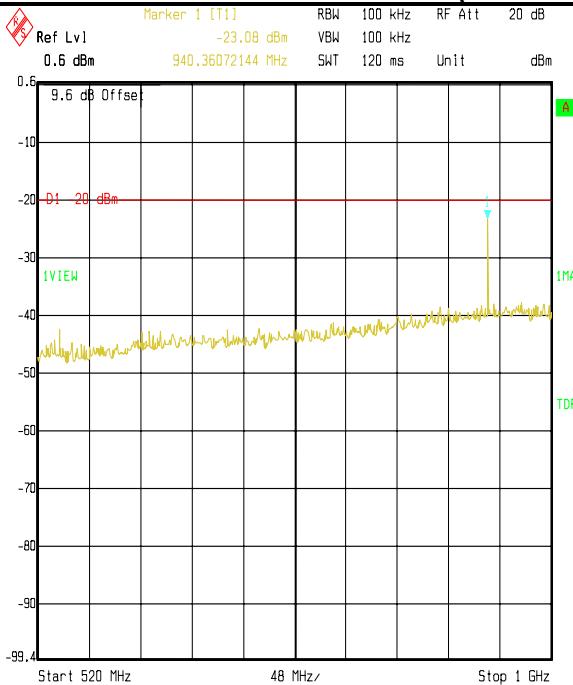

Comment A: Repeater Unit TX Mode


Date: 07.MAR.2005 17:40:49

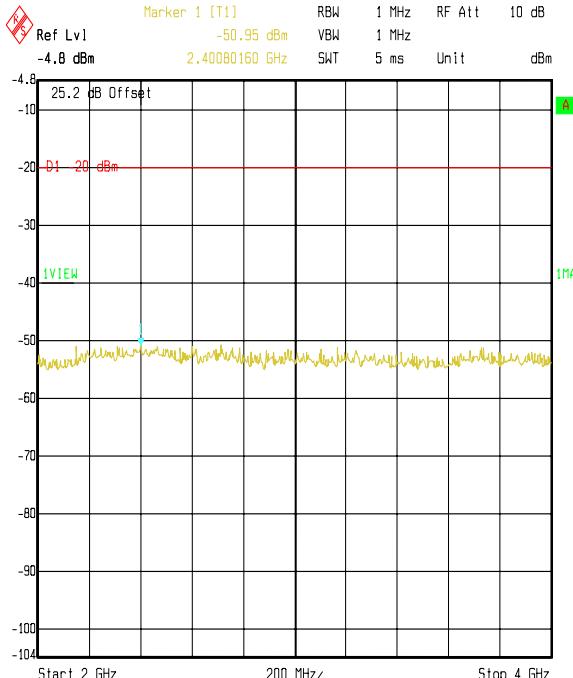

Comment A: REPEATER UNIT TX MODE


Date: 08.MAR.2005 11:53:06

Note: these plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

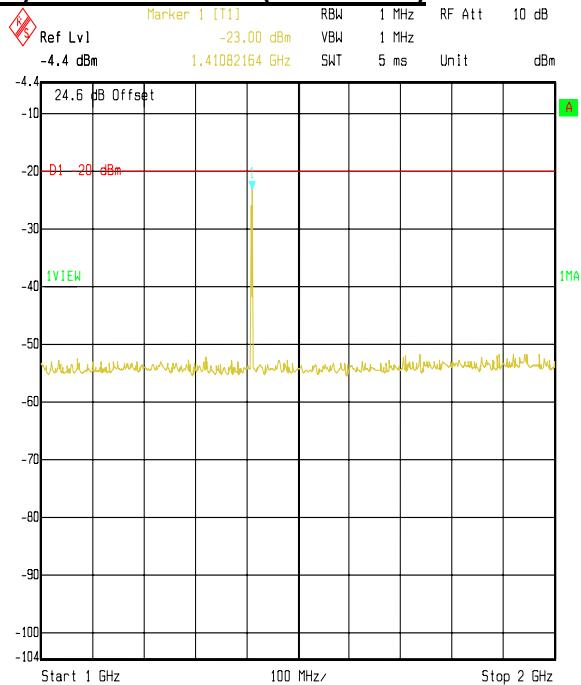

Comment A: Repeater Unit TX Mode

Date: 07.MAR.2005 17:38:44

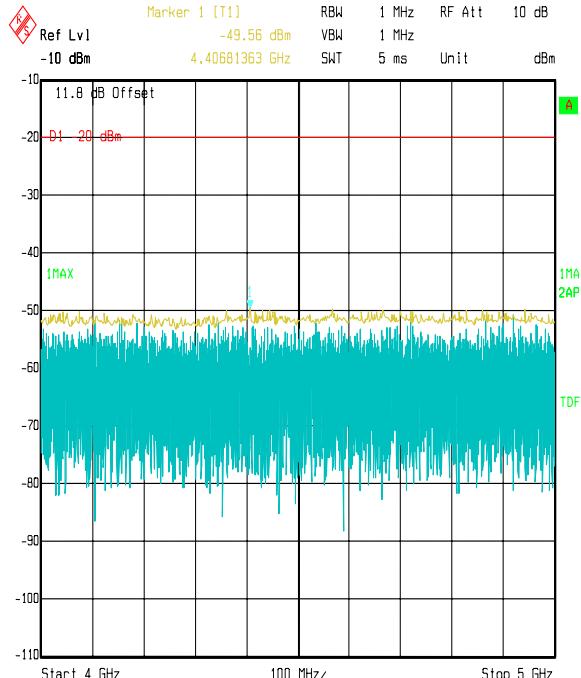

Comment A: Repeater Unit TX Mode

Date: 07.MAR.2005 18:43:02

Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004

9. Measurement Uncertainty

9.1. No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently, the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

9.2. The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

9.3. The uncertainty of the result may need to be taken into account when interpreting the measurement results.

9.4. The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor, such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
Radiated Spurious Emissions	30 MHz to 1000 MHz	95%	+/- 5.26 dB
Radiated Spurious Emissions	1 GHz to 18 GHz	95%	+/- 4.18 dB
Carrier Output Power (ERP)	30 MHz to 1000 MHz	95%	+/- 1.78 dB
Occupied Bandwidth	N/A	95%	+/- 0.12%
Conducted Emissions Antenna Port	9 kHz to 26 GHz	95%	+/- 1.2 dB
Frequency Stability	N/A	95%	+/- 20 Hz
Fundamental Fieldstrength	30 MHz to 1000 MHz	95%	+/- 5.26 dB
Occupied Bandwidth	Not applicable	95%	+/- 0.12%
Transient Frequency Behaviour	Not applicable	95%	+/- 10%

9.5. The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty, the published guidance of the appropriate accreditation body is followed.

Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004

10. Measurement Methods

10.1. Receiver Radiated Emissions

Radiated emissions measurements were performed in accordance with the standard, against appropriate limits for each detector function.

Initial pre-scans covering the entire measurement band from the lowest generated frequency declared up to the upper frequency detailed in Section 15.33(b) were performed within a screened chamber in order to identify frequencies on which the EUT was generating interference. This determined the frequencies from the EUT that required further examination. In order to minimise the time taken for the swept measurements, a peak detector was used in conjunction with the appropriate detector measuring bandwidth (see table below). Repetitive scans were performed to allow for emissions with low repetition rates, and for the duty cycle of the EUT.

The initial scans were performed using an antenna height of 1.5 m and a measurement distance of 3 m. A limit line was set to the specification limit. Levels within 20 dB of this limit were measured where possible, on occasion, the receiver noise floor came within the 20 dB boundary. On these occasions, the system noise floor may have been recorded.

An open area test site using the appropriate test distance and measuring receiver with a Quasi-Peak detector was used for measurements below 1000 MHz, for measurements above 1000 MHz average and peak detectors were used.

For the final measurements the EUT was arranged on a non-conducting turn table on a standard test site compliant with ANSI C63.4 - 2003 Clause 5.4.

On the open area test site, at each frequency where a signal was found, the levels were maximised by initially rotating the turntable through 360° and then varying the antenna height between 1 m and 4 m in the horizontal polarisation. At this point, any signals found to be between the limit and a level 6 dB below it were further maximised by changing the configuration of the EUT, e.g. re-routing cables to peripherals and moving peripherals with respect to the EUT. The procedure was repeated for the vertical polarisation.

The final field strength was determined as the indicated level in dB μ V plus cable loss and antenna factor.

The test equipment settings for radiated emissions measurements were as follows:

Receiver Function	Initial Scan	Final Measurements Below 1 GHz	Final Measurements Above 1 GHz
Detector Type:	Peak	Quasi-Peak (CISPR)	Peak/Average
Mode:	Max Hold	Not applicable	Not applicable
Bandwidth:	(120 kHz < 1 GHz) (1 MHz > 1 GHz)	120 kHz	1 MHz
Amplitude Range:	100 dB	100 dB	100 dB
Step Size:	Continuous sweep	Not applicable	Not applicable
Sweep Time:	Coupled	Not applicable	Not applicable

Test Of: **Draeger Safety UK**
460MHz Repeater Unit
To: **FCC Part 90: 2004**

10.2. Occupied (20 dB) Bandwidth

The EUT was connected to a spectrum analyser enabled with an occupied bandwidth function via a direct connection (via suitable attenuation).

Measurements were performed to determine the Occupied Bandwidth in accordance with FCC Part 2.1049. The Occupied Bandwidth was measured from the fundamental emission at the bottom and top channels. The Occupied Bandwidth was measured in line with the requirements of 2.1049 i.e. with the EUT modulated with a signal representing the maximum rated conditions under which it will operate (worst case)

The occupied bandwidth was measured using the built in occupied bandwidth function of the Rohde and Schwarz FSEB or ESIB spectrum analyser. It was set to measure the bandwidth where 99% of the signal power was contained. The analyser automatically configures the measurement bandwidths to make an accurate measurement based on the channel bandwidth and channel spacing of the EUT.

Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004

10.3. Transmitter Conducted Emissions

The EUT and spectrum analyser were configured as per ANSI TIA-603-B, Land Mobile FM or PM Communications Equipment; Measurement and Performance Standards.

Spurious emission measurements at the antenna port were performed from the lowest declared frequency to 10 times the highest EUT fundamental frequency.

A spectrum analyser was connected to the antenna port of the EUT via a suitable cable and RF attenuator. The total loss of both the cable and the attenuator was measured and entered as a reference level offset into the measuring receiver to correct for the losses.

The frequency band described above was investigated with the transmitter operating at full power on the bottom, middle and top channels. Any spurious emissions noted were then measured.

The recorded emission level was then calculated as a spurious attenuation level using the following formula as described in TIA-603-B.

$$dB = 10 \log_{10} \left(\frac{TX \text{ power in watts}}{0.001} \right) - \text{spurious level (dBm)}$$

For frequencies further than 12.5 kHz from the centre of the authorised bandwidth (fc) the emissions shall be attenuated by at least $50 + 10 \log(P \text{ in Watts})$ dB or 70 dB (whichever is the lesser attenuation) relative to the transmitter output power level measured for the channel under test. The tabulated results in the results section of this report show the spurious emission in dBm and as attenuation relative to the carrier in dBc.

For the frequency ranges close to and including the fundamental frequency, plots of the spectral distribution (emission masks) were recorded using a spectrum analyser for the EUT transmitting on bottom, middle and top channels. The method used was in accordance with the methods detailed in FCC Part 90.210.

FCC Part 90.210 states the appropriate emission mask that shall be used for a given channel bandwidth. Measurements were performed using the appropriate emission mask for the channel bandwidth declared i.e. Emission Mask D for a channel bandwidth of 12.5 kHz.

The test equipment settings for conducted antenna port measurements were as follows:

Receiver Function	Settings
Detector Type:	Peak
Mode:	Max Hold
Bandwidth:	As per Part 90.210 <50 kHz away from fc
Bandwidth:	1 MHz >1 GHz
Bandwidth:	10 kHz <1 GHz
Amplitude Range:	100 dB
Sweep Time:	Coupled

Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004

10.4. Transmitter Radiated Emissions

The EUT and spectrum analyser were configured as per ANSI TIA-603-B, Land Mobile FM or PM Communications Equipment; Measurement and Performance Standards.

Radiated emissions measurements were performed in accordance with the standard, against appropriate limits for each detector function.

Initial pre-scans covering the entire measurement band from the lowest generated frequency declared up to 10 times the highest fundamental frequency were performed in order to identify frequencies on which the EUT was generating spurious emissions. This determined the frequencies from the EUT that required further examination. Repetitive scans were performed to allow for emissions with low repetition rates, and for the duty cycle of the EUT.

The initial scans were performed using an antenna height of 1.5 m and a measurement distance of 3 m, below 4 GHz; above 4 GHz a 1 m measurement distance was used. A limit line was set to the specification limit. Levels within 20 dB of this limit were measured where possible, on occasion; the receiver noise floor came within the 20 dB boundary. On these occasions, the system noise floor may have been recorded.

For the final measurements the EUT was arranged on a non-conducting turn table on a standard test site compliant with ANSI C63.4 – 2003 Clause 5.4.

An open area test site using the appropriate test distance and spectrum analyser with an peak detector was used for final measurements. All measurements on the open area test site were performed using broadband antennas.

On the open area test site, at each frequency where a signal was found, the levels were maximised by initially rotating the turntable through 360° and then varying the antenna height between 1 m and 4 m in the horizontal polarisation. At this point, any signals found to be between the limit and a level 6 dB below it were further maximised by changing the configuration of the EUT, e.g. re-routing cables to peripherals and moving peripherals with respect to the EUT. The procedure was repeated for the vertical polarisation.

Once the final amplitude (maximised) had been obtained and noted, the EUT was replaced by a substitution antenna, and a substitution method applied. The substitution antennas used were a horn antenna for measurements greater than or equal to 1 GHz and a dipole for measurements below 1 GHz. The centre of the substitution antenna was set to approximately the same centre location as the EUT. The substitution antenna was set to the horizontal polarity. The substitution antenna was matched into a signal generator using a 6 dB or greater attenuator. The signal generator was tuned to the EUT's frequency under test.

The test antenna was then raised and lowered to obtain a maximum reading on the spectrum analyser. The level of the signal generator output was then adjusted until the maximum recorded EUT level was observed. The signal generator level was noted. This procedure was repeated with both test antenna and substitution antenna vertically polarised. The EIRP was calculated as:-

$$\text{ERP} = \text{Signal Generator Level} - \text{Cable Loss} + \text{Antenna Gain}$$

Once the ERP was obtained, the difference between it and the level of the fundamental emission for the ERP of the channel under test was noted at the spurious attenuation level in dBc. The following formula was used as described in TIA-603-B.

$$\text{dB} = 10 \log_{10} \left(\frac{\text{TX power in watts}}{0.001} \right) - \text{spurious level (dBm)}$$

For frequencies further than 12.5 kHz from the centre of the authorised bandwidth (fc) the emissions shall be attenuated by at least $50 + 10 \log (P \text{ in Watts})$ dB or 70 dB (whichever is the lesser attenuation) relative to the transmitter output power level measured for the channel under test. The tabulated results in the results section of this report show the spurious emission in dBm and as attenuation relative to the carrier in dBc.

Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004

Transmitter Radiated Emissions (continued)

For the frequency ranges close to and including the fundamental frequency, plots of the spectral distribution (emission masks) were recorded using a spectrum analyser for the EUT transmitting on bottom, middle and top channels. The method used was in accordance with the methods detailed in FCC Part 90.210.

FCC Part 90.210 states the appropriate emission mask that shall be used for a given channel bandwidth. Measurements were performed using the appropriate emission mask for the channel bandwidth declared i.e. Emission Mask D for a channel bandwidth of 12.5 kHz.

Receiver Function	Settings
Detector Type:	Peak
Mode:	Max Hold
Bandwidth:	As per Part 90.210 <50 kHz away from fc
Bandwidth:	1 MHz >1 GHz
Bandwidth:	10 kHz <1 GHz
Amplitude Range:	100 dB
Sweep Time:	Coupled

Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004

10.5. Transmitter Frequency Stability

The EUT and communications analyser were configured as per ANSI TIA-603-B, Land Mobile FM or PM Communications Equipment; Measurement and Performance Standards.

The EUT was situated within an environmental test chamber and monitored on the communications analyser via a direct connection.

Measurements were performed with the EUT operating under extremes of temperature in 10 degree increments within the range -30°C to 50°C.

Measurements were also performed at voltage extremes between the declared nominal supply voltage and at the declared endpoint voltage (for hand carried battery operated equipment) or by varying the primary supply voltage from 85% to 115% of the nominal value for all other equipment types.

The requirement was to determine the frequency stability of the device under specified environmental operating conditions.

The EUT was switched off for a minimum of 30 minutes between each stage of testing while the environmental chamber stabilised at the next temperature within the stated temperature range.

Once the environmental chamber had reached thermal equilibrium, the nominal frequency of the EUT was measured and recorded. The recorded frequency was compared to the declared nominal operating frequency of the channel being tested.

The frequency error measured was converted to an error in ppm using the following formula as defined by TIA-603-B:-

$$\text{ppm error} = \left(\frac{MCF_{MHz}}{ACF_{MHz}} - 1 \right) * 10^6$$

where MCF_{MHz} is the measured carrier frequency in MHz
ACF_{MHz} is the assigned carrier frequency in MHz

The measured ppm had to be less than the relevant limits in order to comply.


Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004

10.6. Transmitter Transient Frequency Behaviour

The EUT and test equipment were configured as per ANSI TIA-603-B, Land Mobile FM or PM Communications Equipment; Measurement and Performance Standards.

The EUT was connected to a communications analyser in the configuration shown in Figure 1 below.

Figure 1

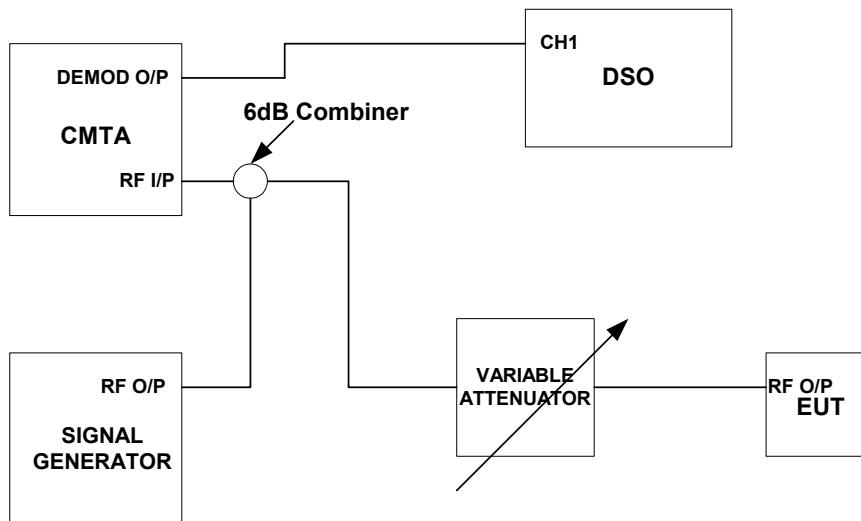

The test equipment settings were as follows:

Oscilloscope Function	Settings
Coupling:	DC
Sweep Time:	10ms/Division
Trigger Mode:	Normal
Attack Trigger Position:	1/8 th Pre-trigger
Release Trigger Position	7/8 th Pre-trigger
Trigger Slope:	+ or - dependant on whether attack or release

CMTA Test Receiver Function	Settings
Centre Frequency (Set)	EUT's Nominal Frequency
Channel Spacing:	12.5 kHz
Special Function:	SPEC 72 (CMTA Squelch disable)

Signal Generator Function	Settings
Centre Frequency:	EUT's Nominal Frequency
Amplitude:	30 dB down on EUT's carrier power at the combiner
Audio Frequency:	1 kHz
FM Deviation	12.5 kHz

Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004

Appendix 1. Test Equipment Used

RFI No.	Instrument	Manufacturer	Type No.	Serial No.
A027	Horn Antenna	Eaton	9188-2	301
A030	Step Attenuator	Narda	745-69	01544
A031	Horn Antenna	Eaton	91889-2	557
A059	Log Periodic Antenna	EMCO	3146	8902-2378
A091	Biconical Antenna	EMCO	3110	9008-1182
A253	Horn Antenna	Flann Microwave	12240-20	128
A259	Bilog Antenna	Chase	CBL6111	1513
A392	Attenuator	Suhner	6803.17.B	None
A451	Log Spiral Antenna	EMCO	3101	3751
E013	Environmental Chamber	Sanyo	ATMOS chamber	None
G046	Signal Generator	Gigatronics	7100/.01-20	749474
G513	Signal Generator	Rohde & Schwarz	SMH	839858/001
M003	Spectrum Monitor	Rohde & Schwarz	EZM	883 580/008
M027	Radiocommunications Analyser	Rohde & Schwarz	CMTA	883 574/004
M028	Spectrum Analyser	Rohde & Schwarz	FSB	860 001/009 (RF); 860 161/007 (DU)
M029	Digital Storage Oscilloscope	Tektronix	2440	0120850
M044	Test Receiver	Rohde & Schwarz	ESVP	891 845/026
M069	Spectrum Analyser/ Receiver	Rohde & Schwarz	ESMI	829 808/007 (DU); 827 063/008 (RU)
M127	Spectrum Analyser	Rohde & Schwarz	FSEB 30	842 659/016
M1122	Power Head	Boonton Electronics	57340	3297
M1123	Power Meter	Boonton Electronics	4531	138201
M1124	Spectrum Analyser	Rohde & Schwarz	ESIB26	100046K
M128	DVM	Fluke	76	65340273
S010	DC Power Supply	INSTEK	PC-3060	9401927
S201	Site 1	RFI	1	
S202	Site 2	RFI	2	S202-15011990

NB In accordance with UKAS requirements, all the measurement equipment is on a calibration schedule.

Test Of: Draeger Safety UK
460MHz Repeater Unit
To: FCC Part 90: 2004

Appendix 2. Test Configuration Drawings

This appendix contains the following drawings:

Drawing Reference Number	Title
DRG\46068JD10\EMIRAD	Test configuration for measurement of radiated emissions

Test Of: Draeger Safety UK
 460MHz Repeater Unit
To: FCC Part 90: 2004

DRG\46068JD10\EMIRAD

