



TEST REPORT

Product Name: 802.11b/g WLAN Mini-PCI Card
Model No.: GW-WCMPRG-1
Applicant: GAWELL TECHNOLOGIES CORP.
3F, NO. 102, SEC. 3, JUNG SHAN RD., JUNG HO CITY,
TAIPEI HSIEN, TAIWAN 235, R.O.C.
Date of Receipt: Jul. 07, 2004
Finished date of Test: Jul. 30, 2004
Applicable Standards: 47 CFR Part 15, Subpart C
ANSI C63.4:2003

We, **Spectrum Research & Testing Laboratory Inc.**, hereby certify that one sample of the above was tested in our laboratory with positive results according to the above-mentioned standards. The records in the report are an accurate account of the results. Details of the results are given in the subsequent pages of this report.

Checked By :

Sunyou Chen
(Sunyou Chen)

Date:

9/27/2004

Approved By :

Johnson Ho
(Johnson Ho, Director)

Date:

Sep. 27, 2004



Table of Contents

1. DOCUMENT POLICY AND TEST STATEMENT	4
1.1 DOCUMENT POLICY.....	4
1.2 TEST STATEMENT.....	4
1.3 EUT MODIFICATION	4
2. DESCRIPTION OF EUT AND TEST MODE.....	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 DESCRIPTION OF EUT INTERNAL DEVICE.....	5
2.3 DESCRIPTION OF TEST MODE.....	6
2.4 DESCRIPTION OF SUPPORT UNIT	6
3. DESCRIPTION OF APPLIED STANDARDS.....	7
4. TECHNICAL CHARACTERISTICS TEST	8
4.1 CONDUCTED EMISSION TEST	8
4.1.1 LIMIT	8
4.1.2 TEST EQUIPMENT	8
4.1.3 TEST SETUP.....	9
4.1.4 TEST PROCEDURE.....	9
4.1.5 EUT OPERATING CONDITION	9
4.1.6 TEST RESULT.....	10
4.2 RADIATED EMISSION TEST.....	16
4.2.1 LIMIT	16
4.2.2 TEST EQUIPMENT	17
4.2.3 TEST SET-UP.....	18
4.2.4 TEST PROCEDURE.....	19
4.2.5 EUT OPERATING CONDITION	19
4.2.6 TEST RESULT.....	20
4.3 6DBC BANDWIDTH TEST	27
4.3.1 LIMIT	27
4.3.2 TEST EQUIPMENT	27
4.3.3 TEST SET-UP.....	27
4.3.4 TEST PROCEDURE.....	27
4.3.5 EUT OPERATING CONDITION	27
4.3.6 TEST RESULT.....	28
4.4 PEAK POWER TEST	34
4.4.1 LIMIT	34
4.4.2 TEST EQUIPMENT	34
4.4.3 TEST SET-UP.....	35
4.4.4 TEST PROCEDURE.....	35
4.4.5 EUT OPERATING CONDITION	35
4.4.6 TEST RESULT.....	36
4.5 BAND EDGE TEST.....	42
4.5.1 LIMIT	42
4.5.2 TEST EQUIPMENT	43
4.5.3 TEST SET-UP.....	44
4.5.4 TEST PROCEDURE.....	45
4.5.5 EUT OPERATING CONDITION	45
4.5.6 TEST RESULT.....	46



TEST REPORT

4.6 POWER DENSITY TEST	52
4.6.1 LIMIT	52
4.6.2 TEST EQUIPMENT	52
4.6.3 TEST SET-UP.....	52
4.6.4 TEST PROCEDURE.....	52
4.6.5 EUT OPERATING CONDITION	52
4.6.6 TEST RESULT.....	53
4.7 RF POWER EXPOSURE EVALUATION TEST	59
4.7.1 LIMIT	59
4.7.2 TEST EQUIPMENT	60
4.7.3 TEST SET-UP.....	60
4.7.4 TEST PROCEDURE.....	61
4.7.5 EUT OPERATING CONDITION	61
4.7.6 RESULT	62
5. ANTENNA APPLICATION	63
5.1 ANTENNA REQUIREMENT.....	63
5.2 RESULT	63
6. PHOTOS OF TESTING	64
7. TERMS OF ABRIVATION	67



1. DOCUMENT POLICY AND TEST STATEMENT

1.1 DOCUMENT POLICY

- The report shall not be reproduced except in full, without the written approval of SRT Lab, Inc.
- The report must not be used by the applicant to claim that the product is endorsed by NVLAP, TÜV, NEMKO and SRT.
- The NVLAP logo applies only to the applicable standards specified in this report.

1.2 TEST STATEMENT

- The test results in the report apply only to the unit tested by SRT Lab.
- There was no deviation from the requirements of test standards during the test.
- AC power source, 120 VAC/60 Hz, was used during the test.

1.3 EUT MODIFICATION

- No modification in SRT Lab.

	Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan	TEST REPORT	Reference No.:A04070702 Report No.:FCCA04070702 Page:5 of 67 Date:Sep. 27, 2004
---	---	----------------------	--

2. DESCRIPTION OF EUT AND TEST MODE

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	802.11b/g WLAN Mini-PCI Card
MODEL NO.	GW-WCMPRG-1
POWER SUPPLY	DC 3.3V from PCI slot of PC system
CABLE	N/A
I/O PORT	PCI interface
FREQUENCY BAND	2400 ~ 2483.5MHz
CARRIER FREQUENCY	CH1: 2412MHz ~ CH11: 2462MHz
NUMBER OF CHANNEL	11
CHANNEL SPACING	5MHz
RATED RF OUTPUT POWER	13dBm
I.F. & L.O.	I.F.: 0MHz, L.O.: 2412~2484MHz
MODULATION TYPE	IEEE 802.11b: DBPSK/DQPSK/CCK IEEE 802.11g: BPSK/QPSK/16QAM/64QAM
BIT RATE OF TRANSMISSION	IEEE 802.11b: 1, 2, 5.5, 11Mbps IEEE 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps

NOTE : For more detailed features, please refer to the manufacturer' s specification or User' s Manual of EUT.

2.2 DESCRIPTION OF EUT INTERNAL DEVICE

DEVICE	BRAND / MAKER	MODEL #	FCC ID/DOC	REMARK
N/A				

	Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan	TEST REPORT	Reference No.:A04070702 Report No.:FCCA04070702 Page:6 of 67 Date:Sep. 27, 2004
---	---	----------------------	--

2.3 DESCRIPTION OF TEST MODE

11 channels are provided by EUT. The 3 channels of lower, medium and higher were chosen for test.

There are test mode for each test configuration as below:

Mode		Modulation Type	Channel	Frequency (MHz)
1	IEEE 802.11b	CCK	CH1	2412
2			CH6	2437
3			CH11	2462
4	IEEE 802.11g	64QAM	CH1	2412
5			CH6	2437
6			CH11	2462

NOTE :

- Below 1 GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for conducted and radiated emission test.
- Above 1 GHz, the channel 1, 6 and 11 were tested individually

2.4 DESCRIPTION OF SUPPORT UNIT

The transmitter part of EUT was tested with a PC system and configured by the requirement of ANSI C63.4:2003. All interface ports were connected to the appropriate support units via specific cables. The support units and cables are listed below:

NO	DEVICE	BRAND	MODEL #	FCC ID/DOC	CABLE
1	NOTEBOOK	DELL	PP01L	DOC	1.8m unshielded power cord
2	PRINTER	EPSON	STYLUS C20SX	DOC	1.5m unshielded power cord 1.5m shielded data cable
3	MODEM	ACEEX	DM-1414	DOC	1.8m unshielded DC power cable 1.5m shielded data cable
4	ROUTER	MSI	MS-6824	I4L-MS6824	N/A
5	ROUTER ADAPTER	APD	WA-10E05U	DOC	1.5m unshielded power cable

NOTE: For the actual test configuration, please refer to the photos of testing.



3. DESCRIPTION OF APPLIED STANDARDS

The EUT is a kind of wireless product and to be connected with a PC system for normal use. According to the specifications provided by the applicant, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C
ANSI C63.4:2003

All tests have been performed and recorded as the above standards.



4. TECHNICAL CHARACTERISTICS TEST

4.1 CONDUCTED EMISSION TEST

4.1.1 LIMIT

Frequency (MHz)	Class A (dB μ V)		Class B (dB μ V)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

NOTE :

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.1.2 TEST EQUIPMENT


The following test equipment was used for the test:

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
EMI TEST RECEIVER	9 kHz TO 30 MHz	ROHDE & SCHWARZ	ESHS30/ 826003/008	AUG. 2005 ETC
LISN (for EUT)	50 μ H, 50 ohm	SOLAR ELECTRONICS	FCC-LISN-50-25-2 / 01018	NOV. 2004 ETC
LISN (for Peripheral)	50 μ H, 50 ohm	SOLAR ELECTRONICS	9252-50-R-24-BNC / 951318	JUN. 2005 ETC
50 ohm TERMINATOR	50 ohm	HP	11593A/ 2	MAR. 2005 ETC
COAXIAL CABLE	3m	SUNCITY	J400/ 3M	JUL. 2005 SRT
ISOLATION TRANSFORMER	N/A	APC	AFC-11015/ F102040016	N/A
FILTER	2 LINE, 30A	FIL.COIL	FC-943/ 771	N/A
GROUND PLANE	2.3M (H) x 2.4M (W)	SRT	N/A	N/A
GROUND PLANE	2.4M (H) x 2.4M (W)	SRT	N/A	N/A

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.



4.1.3 TEST SETUP

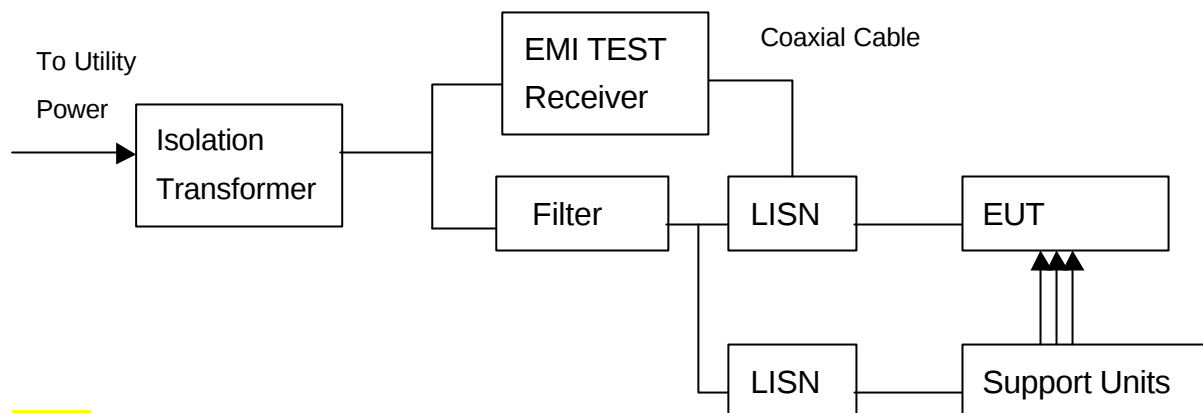

NOTE:

1. The EUT was put on a wooden table with 0.8m height above ground plane, and 0.4m away from reference ground plane (> 2mx2m).
2. For the actual test configuration, please refer to the photos of testing.
3. The serial no. of the LISN connected to EUT is 951318.
4. The serial no. of the LISN connected to support units is 924839.

4.1.4 TEST PROCEDURE

The EUT was tested according to the requirement of ANSI C63.4:2003 and CISRP22:2003. The frequency spectrum from 0.15 MHz to 30 MHz was investigated. The LISN used was 50 ohm/50μH as specified. All readings were quasi-peak and average values with 10 kHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. Both lines of the power mains of EUT were measured and the cables connected to EUT and support units were moved to find the maximum emission levels for each frequency. First, Find the margin or higher points at least 6 points by software, then use manual to find the maximum data. The procedure is referred on the test procedure of SRT LAB.

4.1.5 EUT OPERATING CONDITION

1. Set the EUT under normal condition continuously at the link mode.
2. The EUT used programs to control channels when it was tested for RF power and emission.



4.1.6 TEST RESULT

Temperature:	26 °C	Humidity:	50 %RH
Frequency Range:	0.15 – 30 MHz	Tested Mode:	IEEE 802.11b
Receiver Detector:	Q.P. and AV.	Modulation Type:	CCK
Tested By:	Hugo Yeh	Tested Channel:	CH1: 2412MHz
Tested Date:	Jul. 22, 2004		

Power Line Measured : Line

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dBmV)		Emission Level (dBmV)		Limit (dBmV)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.174	0.20	45.90	36.90	46.10	37.10	64.75	54.75	-18.65	-17.65
3.585	0.20	22.96	13.80	23.16	14.00	56.00	46.00	-32.84	-32.00
3.873	0.20	26.40	16.40	26.60	16.60	56.00	46.00	-29.40	-29.40
11.273	0.20	18.70	12.80	18.90	13.00	60.00	50.00	-41.10	-37.00
14.084	0.20	21.60	8.20	21.80	8.40	60.00	50.00	-38.20	-41.60
19.879	0.20	23.50	16.80	23.70	17.00	60.00	50.00	-36.30	-33.00

Power Line Measured : Neutral

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dBmV)		Emission Level (dBmV)		Limit (dBmV)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.177	0.20	47.90	38.20	48.10	38.40	64.61	54.61	-16.51	-16.21
3.873	0.20	28.40	22.20	28.60	22.40	56.00	46.00	-27.40	-23.60
4.041	0.20	26.60	17.90	26.80	18.10	56.00	46.00	-29.20	-27.90
11.384	0.20	22.80	14.80	23.00	15.00	60.00	50.00	-37.00	-35.00
12.024	0.20	22.40	16.50	22.60	16.70	60.00	50.00	-37.40	-33.30
18.608	0.20	26.40	20.50	26.60	20.70	60.00	50.00	-33.40	-29.30

NOTE :

1. Measurement uncertainty is +/-1.32dB
2. Emission level = Reading value + Correction factor
3. Correction Factor = Cable loss + Insertion loss of LISN
4. Margin value = Emission level - Limit
5. The emission of other frequencies were very low against the limit.
6. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.



TEST REPORT

Temperature:	26 °C	Humidity:	50 %RH
Ferquency Range:	0.15 – 30 MHz	Tested Mode:	IEEE 802.11b
Receiver Detector:	Q.P. and AV.	Modulation Type:	CCK
Tested By:	Hugo Yeh	Tested Channel:	CH6: 2437MHz
Tested Date:	Jul. 22, 2004		

Power Line Measured : Line

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dBmV)		Emission Level (dBmV)		Limit (dBmV)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.174	0.20	45.20	37.90	45.40	38.10	64.75	54.75	-19.35	-16.65
2.249	0.20	27.80	24.60	28.00	24.80	56.00	46.00	-28.00	-21.20
4.210	0.20	23.60	15.60	23.80	15.80	56.00	46.00	-32.20	-30.20
7.375	0.20	21.80	15.60	22.00	15.80	60.00	50.00	-38.00	-34.20
10.258	0.20	23.30	17.70	23.50	17.90	60.00	50.00	-36.50	-32.10
17.634	0.20	24.90	18.70	25.10	18.90	60.00	50.00	-34.90	-31.10

Power Line Measured : Neutral

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dBmV)		Emission Level (dBmV)		Limit (dBmV)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.174	0.20	47.80	37.40	48.00	37.60	64.75	54.75	-16.75	-17.15
4.031	0.20	31.70	25.20	31.90	25.40	56.00	46.00	-24.10	-20.60
4.319	0.20	30.70	24.20	30.90	24.40	56.00	46.00	-25.10	-21.60
10.024	0.20	27.35	27.30	27.55	27.50	60.00	50.00	-32.45	-22.50
10.887	0.20	27.00	23.45	27.20	23.65	60.00	50.00	-32.80	-26.35
17.675	0.20	26.20	20.40	26.40	20.60	60.00	50.00	-33.60	-29.40

NOTE :

1. Measurement uncertainty is +/-1.32dB
2. Emission level = Reading value + Correction factor
3. Correction Factor = Cable loss + Insertion loss of LISN
4. Margin value = Emission level - Limit
5. The emission of other frequencies were very low against the limit.
6. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.



TEST REPORT

Temperature:	26 °C	Humidity:	50 %RH
Ferquency Range:	0.15 – 30 MHz	Tested Mode:	IEEE 802.11b
Receiver Detector:	Q.P. and AV.	Modulation Type:	CCK
Tested By:	Hugo Yeh	Tested Channel:	CH11: 2462MHz
Tested Date:	Jul. 22, 2004		

Power Line Measured : Line

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dBmV)		Emission Level (dBmV)		Limit (dBmV)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.174	0.20	46.70	36.20	46.90	36.40	64.75	54.75	-17.85	-18.35
4.150	0.20	33.10	24.40	33.30	24.60	56.00	46.00	-22.70	-21.40
4.437	0.20	31.00	22.60	31.20	22.80	56.00	46.00	-24.80	-23.20
5.244	0.20	27.90	22.23	28.10	22.43	60.00	50.00	-31.90	-27.57
6.918	0.20	27.90	22.30	28.10	22.50	60.00	50.00	-31.90	-27.50
23.590	0.20	23.40	18.10	23.60	18.30	60.00	50.00	-36.40	-31.70

Power Line Measured : Neutral

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dBmV)		Emission Level (dBmV)		Limit (dBmV)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.174	0.20	48.40	40.60	48.60	40.80	64.75	54.75	-16.15	-13.95
1.210	0.20	29.60	24.85	29.80	25.05	56.00	46.00	-26.20	-20.95
1.844	0.20	29.00	25.10	29.20	25.30	56.00	46.00	-26.80	-20.70
5.070	0.20	26.80	21.80	27.00	22.00	60.00	50.00	-33.00	-28.00
12.968	0.20	22.20	16.20	22.40	16.40	60.00	50.00	-37.60	-33.60
17.696	0.20	27.10	21.80	27.30	22.00	60.00	50.00	-32.70	-28.00

NOTE :

1. Measurement uncertainty is +/-1.32dB
2. Emission level = Reading value + Correction factor
3. Correction Factor = Cable loss + Insertion loss of LISN
4. Margin value = Emission level - Limit
5. The emission of other frequencies were very low against the limit.
6. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.



TEST REPORT

Temperature:	26 °C	Humidity:	50 %RH
Ferquency Range:	0.15 – 30 MHz	Tested Mode:	IEEE 802.11g
Receiver Detector:	Q.P. and AV.	Modulation Type:	64QAM
Tested By:	Hugo Yeh	Tested Channel:	CH1: 2412MHz
Tested Date:	Jul. 22, 2004		

Power Line Measured : Line

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dBmV)		Emission Level (dBmV)		Limit (dBmV)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.174	0.20	45.26	36.10	45.46	36.30	64.75	54.75	-19.29	-18.45
3.516	0.20	22.60	14.30	22.80	14.50	56.00	46.00	-33.20	-31.50
4.091	0.20	26.60	15.90	26.80	16.10	56.00	46.00	-29.20	-29.90
7.781	0.20	19.90	14.00	20.10	14.20	60.00	50.00	-39.90	-35.80
14.764	0.20	20.00	14.40	20.20	14.60	60.00	50.00	-39.80	-35.40
17.173	0.20	22.90	17.40	23.10	17.60	60.00	50.00	-36.90	-32.40

Power Line Measured : Neutral

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dBmV)		Emission Level (dBmV)		Limit (dBmV)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.177	0.20	44.00	34.50	44.20	34.70	64.61	54.61	-20.41	-19.91
3.853	0.20	23.60	16.10	23.80	16.30	56.00	46.00	-32.20	-29.70
3.922	0.20	23.10	17.00	23.30	17.20	56.00	46.00	-32.70	-28.80
11.171	0.20	22.10	17.10	22.30	17.30	60.00	50.00	-37.70	-32.70
14.094	0.20	22.80	8.20	23.00	8.40	60.00	50.00	-37.00	-41.60
17.747	0.20	25.30	19.40	25.50	19.60	60.00	50.00	-34.50	-30.40

NOTE :

1. Measurement uncertainty is +/-1.32dB
2. Emission level = Reading value + Correction factor
3. Correction Factor = Cable loss + Insertion loss of LISN
4. Margin value = Emission level - Limit
5. The emission of other frequencies were very low against the limit.
6. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.



TEST REPORT

Temperature:	26 °C	Humidity:	50 %RH
Ferquency Range:	0.15 – 30 MHz	Tested Mode:	IEEE 802.11g
Receiver Detector:	Q.P. and AV.	Modulation Type:	64QAM
Tested By:	Hugo Yeh	Tested Channel:	CH6: 2437MHz
Tested Date:	Jul. 22, 2004		

Power Line Measured : Line

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dBmV)		Emission Level (dBmV)		Limit (dBmV)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.174	0.20	44.20	35.10	44.40	35.30	64.75	54.75	-20.35	-19.45
3.913	0.20	27.30	16.20	27.50	16.40	56.00	46.00	-28.50	-29.60
3.972	0.20	26.40	18.45	26.60	18.65	56.00	46.00	-29.40	-27.35
5.000	0.20	15.20	6.60	15.40	6.80	56.00	46.00	-40.60	-39.20
5.122	0.20	21.80	12.40	22.00	12.60	60.00	50.00	-38.00	-37.40
25.681	0.21	23.70	18.00	23.91	18.21	60.00	50.00	-36.09	-31.79

Power Line Measured : Neutral

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dBmV)		Emission Level (dBmV)		Limit (dBmV)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.174	0.20	47.60	38.40	47.80	38.60	64.75	54.75	-16.95	-16.15
3.744	0.20	25.50	15.70	25.70	15.90	56.00	46.00	-30.30	-30.10
3.853	0.20	24.20	19.10	24.40	19.30	56.00	46.00	-31.60	-26.70
12.369	0.20	20.30	14.40	20.50	14.60	60.00	50.00	-39.50	-35.40
12.785	0.20	19.20	12.40	19.40	12.60	60.00	50.00	-40.60	-37.40
18.014	0.20	25.80	20.30	26.00	20.50	60.00	50.00	-34.00	-29.50

NOTE :

1. Measurement uncertainty is +/-1.32dB
2. Emission level = Reading value + Correction factor
3. Correction Factor = Cable loss + Insertion loss of LISN
4. Margin value = Emission level - Limit
5. The emission of other frequencies were very low against the limit.
6. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.



TEST REPORT

Temperature:	26 °C	Humidity:	50 %RH
Ferquency Range:	0.15 – 30 MHz	Tested Mode:	IEEE 802.11g
Receiver Detector:	Q.P. and AV.	Modulation Type:	64QAM
Tested By:	Hugo Yeh	Tested Channel:	CH11: 2462MHz
Tested Date:	Jul. 22, 2004		

Power Line Measured : Line

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dBmV)		Emission Level (dBmV)		Limit (dBmV)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.174	0.20	46.00	35.90	46.20	36.10	64.75	54.75	-18.55	-18.65
3.744	0.20	22.70	10.50	22.90	10.70	56.00	46.00	-33.10	-35.30
4.259	0.20	18.50	9.00	18.70	9.20	56.00	46.00	-37.30	-36.80
10.420	0.20	17.90	11.90	18.10	12.10	60.00	50.00	-41.90	-37.90
14.917	0.20	18.20	12.80	18.40	13.00	60.00	50.00	-41.60	-37.00
24.625	0.20	22.50	16.60	22.70	16.80	60.00	50.00	-37.30	-33.20

Power Line Measured : Neutral

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dBmV)		Emission Level (dBmV)		Limit (dBmV)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.174	0.20	48.40	39.50	48.60	39.70	64.75	54.75	-16.15	-15.05
3.517	0.20	24.10	16.70	24.30	16.90	56.00	46.00	-31.70	-29.10
4.091	0.20	26.80	17.20	27.00	17.40	56.00	46.00	-29.00	-28.60
10.654	0.20	20.60	15.30	20.80	15.50	60.00	50.00	-39.20	-34.50
11.009	0.20	22.50	17.10	22.70	17.30	60.00	50.00	-37.30	-32.70
20.412	0.20	21.70	16.00	21.90	16.20	60.00	50.00	-38.10	-33.80

NOTE :

1. Measurement uncertainty is +/-1.32dB
2. Emission level = Reading value + Correction factor
3. Correction Factor = Cable loss + Insertion loss of LISN
4. Margin value = Emission level - Limit
5. The emission of other frequencies were very low against the limit.
6. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.



4.2 RADIATED EMISSION TEST

4.2.1 LIMIT

FCC Part15, Subpart C Section 15.209 limit of radiated emission for frequency below1000MHz. The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

FREQUENCY (MHz)	DISTANCE (m)	FIELD STRENGTH (dB _m V/m)
30 - 88	3	40.0
88 - 216	3	43.5
216 - 960	3	46.0
Above 960	3	54.0

NOTE :

1. In the emission tables above , the tighter limit applies at the band edges.
2. Distance refers to the distance between measuring instrument, antenna, and the closest point of any part of the device or system.

FCC Part 15, Section15.35(b) limit of radiated emission for frequency above 1000 MHz

FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80.0	60.0	74.0	54.0



TEST REPORT

4.2.2 TEST EQUIPMENT

The following test equipment was used during the radiated emission test:


EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
EMI TEST RECEIVER	20 kHz TO 1 GHz	ROHDE & SCHWARZ	ESVS30/ 841977/003	SEP. 2005 ETC
BI-LOG ANTENNA	25 MHz TO 2 GHz	EMCO	3142/ 9701-1124	APR. 2005 SRT
DIPOLE ANTENNA	30 MHz TO 1 GHz	EMCO	3121C/ 9611-1239	MAR. 2005 ETC
SPECTRUM ANALYZER	9 KHz TO 26.5 GHz	HP	8593E/ 3710A03220	MAY 2005 ETC
PRE-AMPLIFIER	1 GHz TO 26.5 GHz	HP	8449B/ 3008A01019	DEC. 2004 ETC
HORN ANTENNA	1 GHz TO 18 GHz	EMCO	3115/ 9602-4681	NOV. 2004 ETC
OATS	3 – 10 M MEASUREMENT	SRT	SRT-1	APR. 2005 SRT
COAXIAL CABLE	25M	SUNCITY	J400/ 25M	AUG. 2005 SRT
FILTER	2 LINE, 30A	FIL.COIL	FC-943/ 869	N/A
FREQUENCY CONVERTER	N/A	APC	AFC-2KBB/ F100030031	AUG. 2005 SRT

NOTE:

1. The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.
2. The Open Area Test Site (SRT-1) is registered by FCC with No. 90957 and VCCI with No. R-1081.
3. The Open Area Test Site (SRT-2) is registered by FCC with No. 98458 and VCCI with No. R-1168.



4.2.3 TEST SET-UP

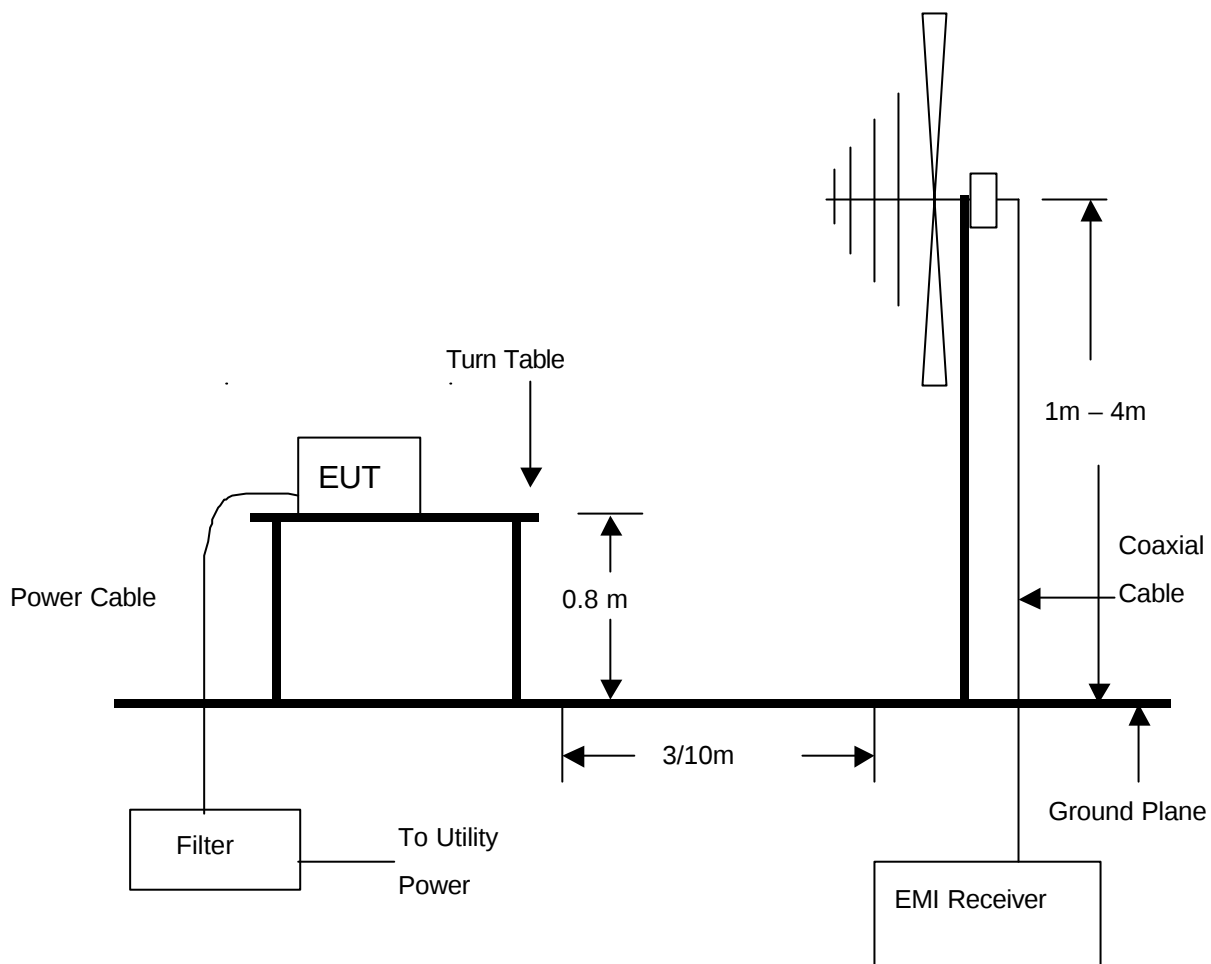

NOTE :

1. The EUT system was put on a wooden table with 0.8m heights above a ground plane.
2. For the actual test configuration, please refer to the photos of testing.



4.2.4 TEST PROCEDURE

The EUT was tested according to the requirement of ANSI C63.4:2003 and CISPR 22:2003. The measurements were made at an open area test site with 10 meter measurement distance under 1 GHz and with 3m distance above 1GHz. The frequency spectrum measured started from 30 MHz. Under 1 GHz, all readings were quasi-peak values with 120 kHz resolution bandwidth of the test receiver. Above 1 GHz, the measurements were made at an open area test site with 3 meter measurement distance and all readings were peak or average values with 1 MHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. The cables connected to EUT and support units were moved to find the maximum emission levels for each frequency.

First, Find the margin or higher points at least 6 points by software, then use manual to find the maximum data. The procedure is referred on the test procedure of SRT LAB.

4.2.5 EUT OPERATING CONDITION

Same as section 4.1.5 of this report.



TEST REPORT

4.2.6 TEST RESULT

Temperature:	22 °C	Humidity:	55 %RH
Ferquency Range:	30 – 1000 MHz	Measured Distance:	3m
Receiver Detector:	Q.P.	Tested Mode:	RX
Tested By:	Hugo Yeh	Tested Date:	Jul. 28, 2004

Antenna Polarization:Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
172.8140	1.44	8.92	17.3	27.7	43.5	-15.8	82.7	1.27
451.5717	2.51	16.79	13.5	32.8	46.0	-13.2	12.4	1.43
500.8068	2.67	21.30	12.6	36.6	46.0	-9.4	175.1	1.84
665.9920	3.11	21.25	10.1	34.5	46.0	-11.5	152.4	1.72
930.1600	3.94	24.30	6.7	34.9	46.0	-11.1	248.6	1.46
601.2416	2.88	20.71	8.3	31.9	46.0	-14.1	75.5	1.51

Antenna Polarization:Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
184.3200	1.46	10.28	17.3	29.0	43.5	-14.5	81.3	1.00
298.6740	1.93	14.10	16.7	32.7	46.0	-13.3	57.6	1.12
451.3120	2.51	16.79	16.8	36.1	46.0	-9.9	347.6	1.00
500.4629	2.67	21.30	9.1	33.1	46.0	-12.9	52.7	1.20
666.3248	3.10	21.26	11.4	35.8	46.0	-10.2	167.8	1.27
920.0019	3.88	24.20	7.2	35.3	46.0	-10.7	92.4	1.52

NOTE :

1. Measurement uncertainty is +/-2dB.
2. "": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss.
4. The field strength of other emission frequencies were very low against the limit.



TEST REPORT

Temperature:	22 °C	Humidity:	55 %RH
Ferquency Range:	1 – 25 GHz	Measured Distance:	3m
Receiver Detector:	PK. or AV.	Tested Mode:	IEEE 802.11b
Tested By:	Hugo Yeh	Modulation Type:	CCK
Tested Date:	Jul. 28, 2004	Tested Channel:	CH1: 2412MHz

Antenna Polarization : Horizontal

Frequency (MHz)	Correct Factor (dB)	Ant. Factor (dB/m)	Reading Data (dBμV)		Emission Level (dBμV/m)		Limit (dBμV/m)		Margin (dB)		AZ (°)	EL (m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
2412.0000(F)	-32.18	28.02	101.4	83.2	97.2	79.0	N/A	N/A	N/A	N/A	168.6	1.00
2400.0000	-32.16	28.00	60.5	47.9	56.3	43.8	74.0	54.0	-17.7	-10.3	173.4	1.05
2402.2500	-32.16	28.00	68.5	54.0	64.3	49.8	74.0	54.0	-9.7	-4.2	164.9	1.00
2421.6300	-32.19	28.04	69.8	49.5	65.6	45.3	74.0	54.0	-8.4	-8.7	96.4	1.00
4824.0000	-30.41	33.66	47.4	*	50.6	*	74.0	54.0	-23.4	*	103.5	1.24
7236.0000	-28.98	36.29	46.1	*	53.4	*	74.0	54.0	-20.6	*	246.8	1.30

Antenna Polarization : Vertical

Frequency (MHz)	Correct Factor (dB)	Ant. Factor (dB/m)	Reading Data (dBμV)		Emission Level (dBμV/m)		Limit (dBμV/m)		Margin (dB)		AZ (°)	EL (m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
2412.0000(F)	-32.18	28.56	98.3	82.1	94.7	78.5	N/A	N/A	N/A	N/A	179.9	2.19
2400.0000	-32.16	28.00	57.9	46.1	53.7	41.9	74.0	54.0	-20.3	-12.1	182.4	1.84
2403.1300	-32.16	28.01	68.2	50.9	64.1	46.7	74.0	54.0	-9.9	-7.3	182.3	1.83
2422.0000	-32.20	28.04	67.5	50.3	63.3	46.1	74.0	54.0	-10.7	-7.9	180.9	1.89
4824.0000	-30.41	33.66	48.6	*	51.8	*	74.0	54.0	-22.2	*	154.7	1.14
7236.0000	-28.98	36.29	44.1	*	51.4	*	74.0	54.0	-22.6	*	341.6	1.11

NOTE :

1. Measurement uncertainty is +/-2dB.
2. "*": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Correct Factor (incl.:Cable Loss and Pre-Amplifier Gain)
4. The field strength of other emission frequencies were very low against the limit.
5. (F):The field stregh of fundamental frequency.



TEST REPORT

Temperature:	22 °C	Humidity:	55 %RH
Ferquency Range:	1 – 25 GHz	Measured Distance:	3m
Receiver Detector:	PK. or AV.	Tested Mode:	IEEE 802.11b
Tested By:	Hugo Yeh	Modulation Type:	CCK
Tested Date:	Jul. 28, 2004	Tested Channel:	CH6: 2437MHz

Antenna Polarization : Horizontal

Frequency (MHz)	Correct Factor (dB)	Ant. Factor (dB/m)	Reading Data (dBμV)		Emission Level (dBμV/m)		Limit (dBμV/m)		Margin (dB)		AZ (°)	EL (m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
2437.0000(F)	-32.22	28.07	98.4	79.1	94.3	74.9	N/A	N/A	N/A	N/A	191.3	1.00
2427.5100	-32.20	28.05	58.9	50.8	54.7	46.6	74.0	54.0	-19.3	-7.4	180.6	1.00
2425.3800	-32.20	28.05	60.9	44.2	56.8	40.1	74.0	54.0	-17.2	-13.9	186.4	1.14
2447.6300	-32.24	28.09	63.7	45.9	59.6	41.7	74.0	54.0	-14.4	-12.3	185.3	1.00
4874.0000	-30.28	33.70	49.6	*	53.0	*	74.0	54.0	-21.0	*	13.8	1.34
7311.0000	-29.07	36.35	48.4	*	55.7	*	74.0	54.0	-18.3	*	42.9	1.02

Antenna Polarization : Vertical

Frequency (MHz)	Correct Factor (dB)	Ant. Factor (dB/m)	Reading Data (dBμV)		Emission Level (dBμV/m)		Limit (dBμV/m)		Margin (dB)		AZ (°)	EL (m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
2437.0000(F)	-32.22	28.61	96.2	80.5	92.6	76.9	N/A	N/A	N/A	N/A	271.3	1.57
2427.4900	-32.20	28.05	65.0	50.4	60.9	46.3	74.0	54.0	-13.1	-7.7	82.3	1.62
2425.0000	-32.20	28.05	56.8	45.7	52.6	41.5	74.0	54.0	-21.4	-12.5	76.1	1.51
2446.2500	-32.23	28.09	63.9	51.0	59.7	46.9	74.0	54.0	-14.3	-7.1	86.7	1.53
4874.0000	-30.28	33.70	47.6	*	51.0	*	74.0	54.0	-23.0	*	112.4	1.34
7311.0000	-29.07	36.35	45.1	*	52.4	*	74.0	54.0	-21.6	*	270.6	1.84

NOTE :

1. Measurement uncertainty is +/-2dB.
2. "*": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Correct Factor (incl.:Cable Loss and Pre-Amplifier Gain)
4. The field strength of other emission frequencies were very low against the limit.
5. (F):The field stregh of fundamental frequency.



TEST REPORT

Temperature:	22 °C	Humidity:	55 %RH
Ferquency Range:	1 – 25 GHz	Measured Distance:	3m
Receiver Detector:	PK. or AV.	Tested Mode:	IEEE 802.11b
Tested By:	Hugo Yeh	Modulation Type:	CCK
Tested Date:	Jul. 28, 2004	Tested Channel:	CH11: 2462MHz

Antenna Polarization : Horizontal

Frequency (MHz)	Correct Factor (dB)	Ant. Factor (dB/m)	Reading Data (dBμV)		Emission Level (dBμV/m)		Limit (dBμV/m)		Margin (dB)		AZ (°)	EL (m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
2462.0000(F)	-32.22	28.12	98.1	80.6	94.0	76.5	N/A	N/A	N/A	N/A	23.7	1.00
2472.2500	-32.20	28.14	65.7	51.0	61.6	46.9	74.0	54.0	-12.4	-7.1	329.7	1.00
2452.2500	-32.24	28.10	63.7	51.1	59.5	47.0	74.0	54.0	-14.5	-7.0	334.1	1.01
2483.5000	-32.19	28.17	53.6	43.3	49.6	39.3	74.0	54.0	-24.4	-14.7	304.5	1.50
4924.0000	-30.23	33.74	47.6	*	51.1	*	74.0	54.0	-22.9	*	158.4	1.08
7386.0000	-28.94	36.41	46.1	*	53.6	*	74.0	54.0	-20.4	*	238.1	1.15

Antenna Polarization : Vertical

Frequency (MHz)	Correct Factor (dB)	Ant. Factor (dB/m)	Reading Data (dBμV)		Emission Level (dBμV/m)		Limit (dBμV/m)		Margin (dB)		AZ (°)	EL (m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
2462.0000(F)	-32.22	28.69	95.4	76.9	91.9	73.4	N/A	N/A	N/A	N/A	349.1	1.15
2471.8800	-32.21	28.14	65.0	50.7	60.9	46.7	74.0	54.0	-13.1	-7.3	337.1	1.03
2483.5000	-32.19	28.17	53.3	43.2	49.2	39.2	74.0	54.0	-24.8	-14.8	329.7	1.05
2452.8800	-32.24	28.10	64.7	50.4	60.6	46.3	74.0	54.0	-13.4	-7.7	328.6	1.08
4924.0000	-30.23	33.74	46.8	*	50.3	*	74.0	54.0	-23.7	*	279.1	1.02
7386.0000	-28.94	36.41	46.1	*	53.6	*	74.0	54.0	-20.4	*	167.1	1.11

NOTE :

1. Measurement uncertainty is +/-2dB.
2. "*": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Correct Factor (incl.:Cable Loss and Pre-Amplifier Gain)
4. The field strength of other emission frequencies were very low against the limit.
5. (F):The field stregh of fundamental frequency.



TEST REPORT

Temperature:	22 °C	Humidity:	55 %RH
Ferquency Range:	1 – 25 GHz	Measured Distance:	3m
Receiver Detector:	PK. or AV.	Tested Mode:	IEEE 802.11g
Tested By:	Hugo Yeh	Modulation Type:	64QAM
Tested Date:	Jul. 28, 2004	Tested Channel:	CH1: 2412MHz

Antenna Polarization : Horizontal

Frequency (MHz)	Correct Factor (dB)	Ant. Factor (dB/m)	Reading Data (dBμV)		Emission Level (dBμV/m)		Limit (dBμV/m)		Margin (dB)		AZ (°)	EL (m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
2412.0000(F)	-32.18	28.02	97.8	60.4	93.6	56.2	N/A	N/A	N/A	N/A	182.1	1.00
2400.0000	-32.16	28.00	68.7	45.2	64.5	41.0	74.0	54.0	-9.5	-13.0	191.4	1.00
2397.5000	-32.17	27.99	69.8	46.2	65.6	42.0	74.0	54.0	-8.4	-12.0	167.3	1.00
2429.3100	-32.21	28.06	70.5	47.4	66.3	43.2	74.0	54.0	-7.7	-10.8	189.9	1.00
4824.0000	-30.41	33.66	47.9	*	51.1	*	74.0	54.0	-22.9	*	87.7	1.31
7236.0000	-28.98	36.29	46.5	*	53.8	*	74.0	54.0	-20.2	*	342.1	1.10

Antenna Polarization : Vertical

Frequency (MHz)	Correct Factor (dB)	Ant. Factor (dB/m)	Reading Data (dBμV)		Emission Level (dBμV/m)		Limit (dBμV/m)		Margin (dB)		AZ (°)	EL (m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
2412.0000(F)	-32.18	28.56	98.3	58.4	94.7	54.8	N/A	N/A	N/A	N/A	145.6	1.27
2400.0000	-32.16	28.00	68.2	45.7	64.0	41.5	74.0	54.0	-10.0	-12.5	162.3	1.58
2397.5000	-32.17	27.99	65.9	42.8	61.7	38.6	74.0	54.0	-12.3	-15.4	146.1	1.62
2430.1000	-32.21	28.06	67.2	43.5	63.1	39.4	74.0	54.0	-10.9	-14.6	158.9	1.28
4824.0000	-30.41	33.66	46.8	*	50.0	*	74.0	54.0	-24.0	*	57.3	1.52
7236.0000	-28.98	36.29	45.2	*	52.5	*	74.0	54.0	-21.5	*	160.8	1.13

NOTE :

1. Measurement uncertainty is +/-2dB.
2. "*": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Correct Factor (incl.:Cable Loss and Pre-Amplifier Gain)
4. The field strength of other emission frequencies were very low against the limit.
5. (F):The field stregh of fundamental frequency.



TEST REPORT

Temperature:	22 °C	Humidity:	55 %RH
Ferquency Range:	1 – 25 GHz	Measured Distance:	3m
Receiver Detector:	PK. or AV.	Tested Mode:	IEEE 802.11g
Tested By:	Hugo Yeh	Modulation Type:	64QAM
Tested Date:	Jul. 28, 2004	Tested Channel:	CH6: 2437MHz

Antenna Polarization : Horizontal

Frequency (MHz)	Correct Factor (dB)	Ant. Factor (dB/m)	Reading Data (dBμV)		Emission Level (dBμV/m)		Limit (dBμV/m)		Margin (dB)		AZ (°)	EL (m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
2437.0000(F)	-32.22	28.07	97.4	57.5	93.3	53.4	N/A	N/A	N/A	N/A	182.7	1.05
2415.7300	-32.18	28.03	71.2	50.1	67.1	45.9	74.0	54.0	-6.9	-8.1	195.2	1.00
2457.6400	-32.23	28.11	67.2	45.6	63.1	41.5	74.0	54.0	-10.9	-12.5	194.6	1.00
2483.5000	-32.19	28.17	52.4	44.7	48.4	40.7	74.0	54.0	-25.6	-13.3	124.3	1.14
4874.0000	-30.28	33.70	49.8	*	53.2	*	74.0	54.0	-20.8	*	162.8	1.21
7311.0000	-29.07	36.35	48.7	*	56.0	*	74.0	54.0	-18.0	*	247.6	1.17

Antenna Polarization : Vertical

Frequency (MHz)	Correct Factor (dB)	Ant. Factor (dB/m)	Reading Data (dBμV)		Emission Level (dBμV/m)		Limit (dBμV/m)		Margin (dB)		AZ (°)	EL (m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
2437.0000(F)	-32.22	28.61	96.3	55.3	92.7	51.7	N/A	N/A	N/A	N/A	176.1	1.71
2415.8600	-32.18	28.03	68.4	45.2	64.2	41.0	74.0	54.0	-9.8	-13.0	181.3	1.70
2457.3400	-32.23	28.11	65.8	44.4	61.7	40.3	74.0	54.0	-12.3	-13.7	178.6	1.67
2483.5000	-32.19	28.17	54.2	43.5	50.1	39.4	74.0	54.0	-23.9	-14.6	184.2	1.72
4874.0000	-30.28	33.70	49.1	*	52.5	*	74.0	54.0	-21.5	*	52.4	1.34
7311.0000	-29.07	36.35	48.5	*	55.8	*	74.0	54.0	-18.2	*	341.8	1.10

NOTE :

1. Measurement uncertainty is +/-2dB.
2. "*": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Correct Factor (incl.:Cable Loss and Pre-Amplifier Gain)
4. The field strength of other emission frequencies were very low against the limit.
5. (F):The field stregh of fundamental frequency.



TEST REPORT

Temperature:	22 °C	Humidity:	55 %RH
Ferquency Range:	1 – 25 GHz	Measured Distance:	3m
Receiver Detector:	PK. or AV.	Tested Mode:	IEEE 802.11g
Tested By:	Hugo Yeh	Modulation Type:	64QAM
Tested Date:	Jul. 28, 2004	Tested Channel:	CH11: 2462MHz

Antenna Polarization : Horizontal

Frequency (MHz)	Correct Factor (dB)	Ant. Factor (dB/m)	Reading Data (dBμV)		Emission Level (dBμV/m)		Limit (dBμV/m)		Margin (dB)		AZ (°)	EL (m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
2462.0000(F)	-32.22	28.12	98.4	60.1	94.3	56.0	N/A	N/A	N/A	N/A	182.4	1.00
2474.5000	-32.20	28.15	69.6	47.0	65.5	42.9	74.0	54.0	-8.5	-11.1	180.7	1.00
2483.5000	-32.19	28.17	62.9	44.6	58.9	40.6	74.0	54.0	-15.1	-13.4	176.8	1.05
2448.2500	-32.24	28.10	69.6	46.8	65.4	42.6	74.0	54.0	-8.6	-11.4	245.8	1.00
4924.0000	-30.23	33.74	47.8	*	51.3	*	74.0	54.0	-22.7	*	163.9	1.07
7386.0000	-28.94	36.41	46.3	*	53.8	*	74.0	54.0	-20.2	*	28.7	1.00

Antenna Polarization : Vertical

Frequency (MHz)	Correct Factor (dB)	Ant. Factor (dB/m)	Reading Data (dBμV)		Emission Level (dBμV/m)		Limit (dBμV/m)		Margin (dB)		AZ (°)	EL (m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
2462.0000(F)	-32.22	28.69	97.9	56.7	94.4	53.2	N/A	N/A	N/A	N/A	162.8	1.67
2474.0000	-32.20	28.15	66.9	46.3	62.8	42.3	74.0	54.0	-11.2	-11.7	163.4	1.68
2483.5000	-32.19	28.17	58.5	44.4	54.4	40.3	74.0	54.0	-19.6	-13.7	167.1	1.60
2450.2000	-32.24	28.10	72.4	47.7	68.3	43.6	74.0	54.0	-5.7	-10.4	175.6	1.59
4924.0000	-30.23	33.74	47.5	*	51.0	*	74.0	54.0	-23.0	*	114.2	1.42
7386.0000	-28.94	36.41	46.1	*	53.6	*	74.0	54.0	-20.4	*	24.3	1.37

NOTE :

1. Measurement uncertainty is +/-2dB.
2. "*": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Correct Factor (incl.:Cable Loss and Pre-Amplifier Gain)
4. The field strength of other emission frequencies were very low against the limit.
5. (F):The field stregh of fundamental frequency.



4.3 6dBc BANDWIDTH TEST

4.3.1 LIMIT

FCC Part15, Subpart C Section 15.247(2). The minimum 6 dB bandwidth shall be at least 500 kHz.


4.3.2 TEST EQUIPMENT

The following test equipment was used during the test:

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
SPECTRUM	9kHz-7GHz	ROHDE & SCHWARZ	FSP7/ 839511/010	MAR. 2005 ETC

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST SET-UP



The EUT was connected to a spectrum through a 50 RF cable.

4.3.4 TEST PROCEDURE

The EUT was operating in the transmitter mode and could control its channels.
The test result was printed by the hard copy function of the spectrum.

4.3.5 EUT OPERATING CONDITION

Same as section 4.1.5 of this report.




4.3.6 TEST RESULT

Temperature:	25°C	Humidity:	50%RH
Spectrum Detector:	PK.	Tested Mode:	IEEE 802.11b
Tested By:	Hugo Yeh	Modulation Type:	CCK
Tested Date:	Jul. 06, 2004		

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	6dB DOWN BW (MHz)	MINIMUM LIMIT (MHz)
1	2412	11.94	0.5
6	2437	12.30	0.5
11	2462	11.94	0.5

CH1:

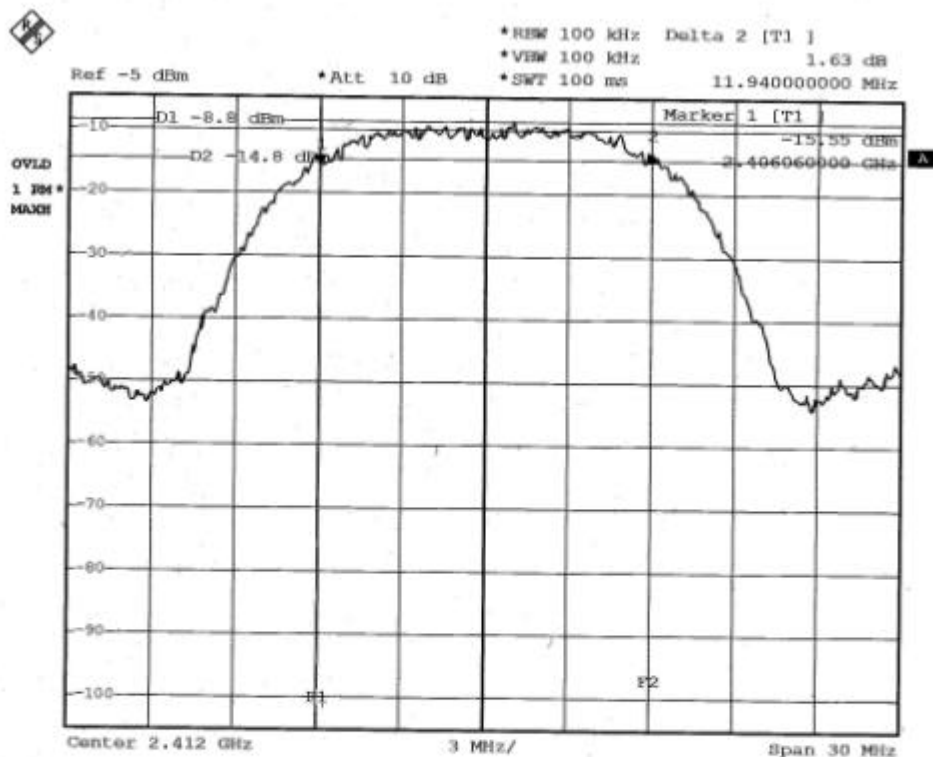


Date: 6.JUL.2004 11:03:38

6dB Bandwidth 11B
CH1 2412MHz
Hugo

6 dB Bandwidth 11B
CH 6 2437 MHz
Hugo



CH 11:

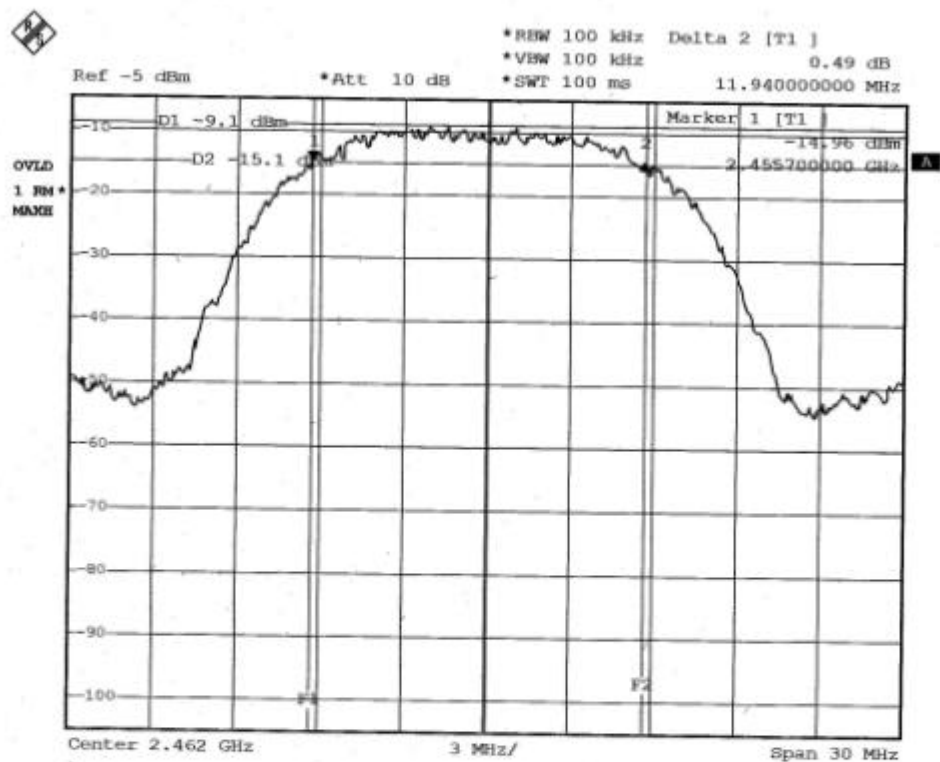

Date: 6.JUL.2004 10:52:45

6 dB Bandwidth 11B
CH 11 2462MHz
Hugo




TEST REPORT

Temperature: 25°C
Spectrum Detector: PK.
Tested By: Hugo Yeh
Tested Date: Jul. 06, 2004

Humidity: 50%RH
Tested Mode: IEEE 802.11g
Modulation Type: 64QAM

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	6dB DOWN BW (MHz)	MINIMUM LIMIT (MHz)
1	2412	16.54	0.5
6	2437	16.50	0.5
11	2462	16.38	0.5

CH1:

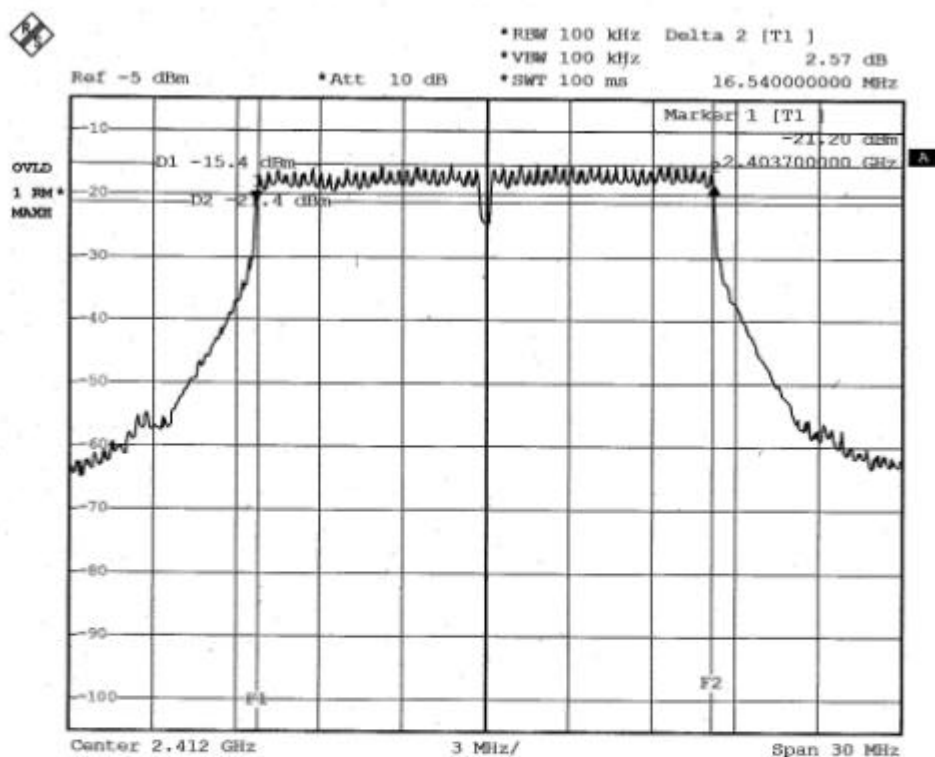


Date: 6 JUL 2004 11:10:03

6 dB Bandwidth 11G
CH1 2412MHz
Hugo



CH 6:

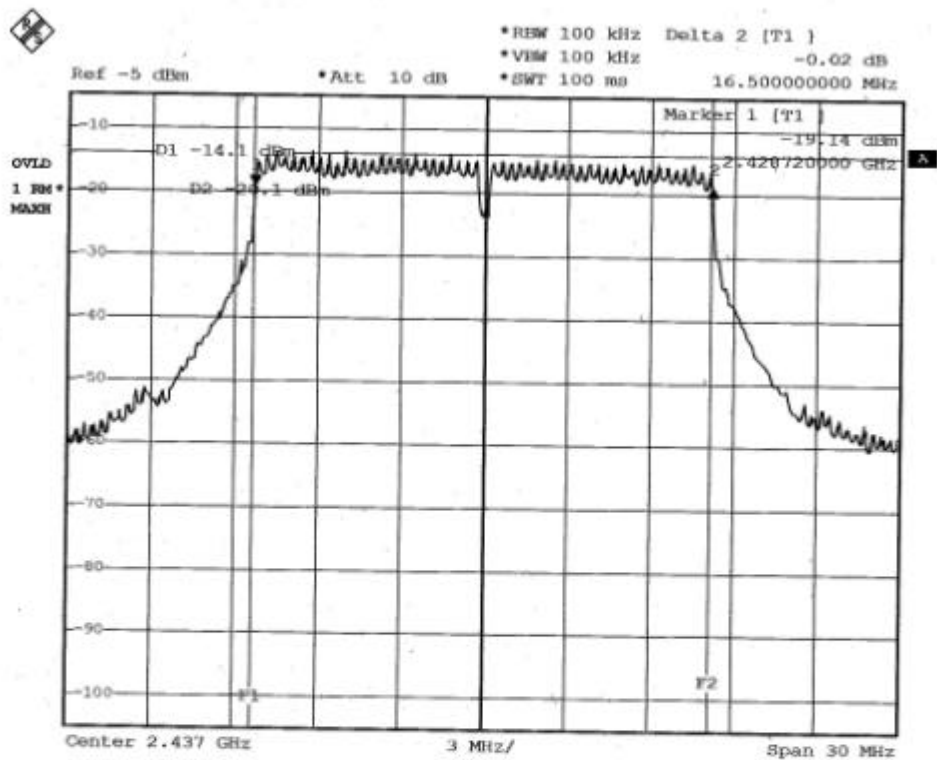


Date: 6.JUL.2004 11:12:13

6 dB Bandwidth 11G
CH6 2439MHz
Hugo



CH 11:

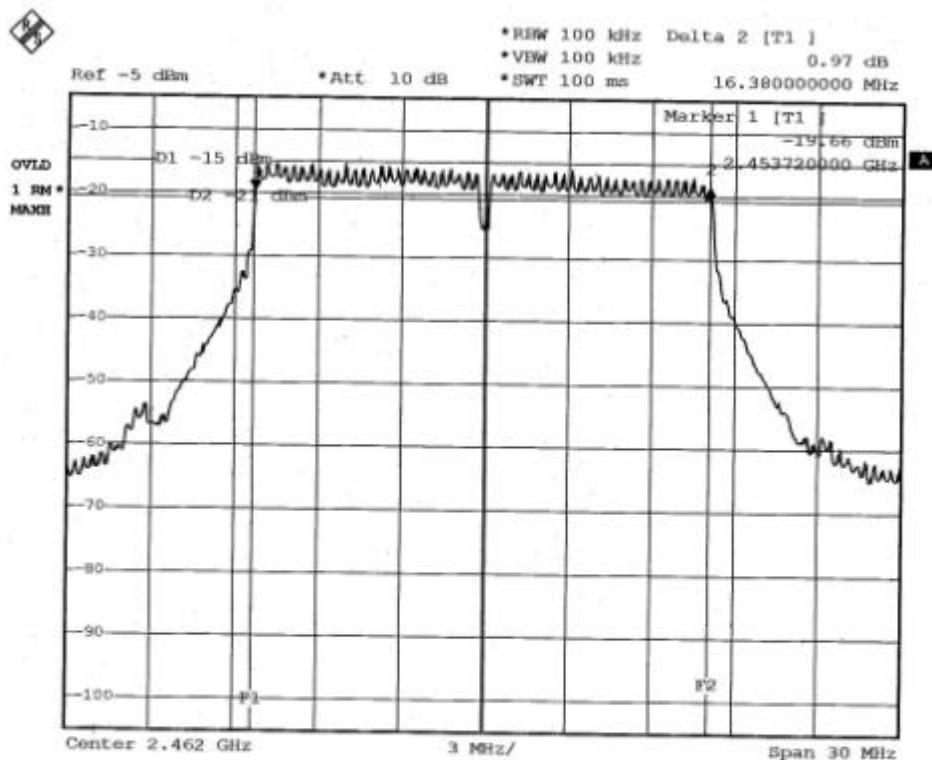

Date: 6.JUL.2004 11:14:29

6 dB Bandwidth 1/6
CH11 2462 MHz
Hugo

	Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan	TEST REPORT	Reference No.:A04070702 Report No.:FCCA04070702 Page:34 of 67 Date:Sep. 27, 2004
---	---	--------------------	---

4.4 PEAK POWER TEST

4.4.1 LIMIT

FCC Part15, Subpart C Section 15.247

FREQUENCY RANGE (MHz)	LIMIT (W)
902 - 928	1(30dBm)
2400 - 2483.5	1(30dBm)
5725 - 5850	1(30dBm)

4.4.2 TEST EQUIPMENT


The following test equipment was used during the test:

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
SPECTRUM	9kHz-7GHz	ROHDE & SCHWARZ	FSP7/ 839511/010	MAR. 2005 ETC
POWER METER	N/A	BOONTON	4232A/ 29001	MAY 2005 ETC
POWER SENSOR	DC-8GHz 50	BOONTON	51011EMC/ 31181	NOV. 2004 BOONTON

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.



4.4.3 TEST SET-UP

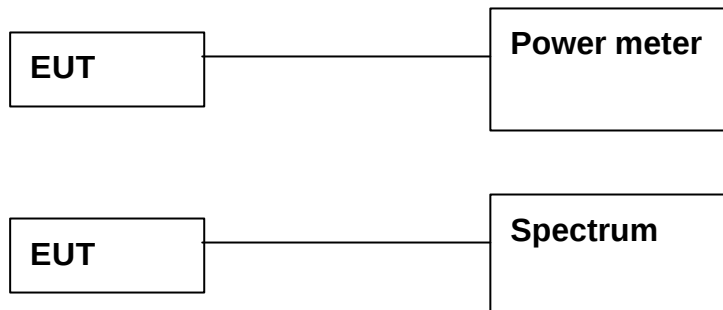

The EUT was connected to a spectrum through a 50 RF cable.

4.4.4 TEST PROCEDURE

The EUT was operating in transmitter mode and could control its channel.
Printed out the test result from the spectrum by hard copy function.
Recorded the read value of the power meter.

4.4.5 EUT OPERATING CONDITION

Same as section 4.1.5 of this report.




4.4.6 TEST RESULT

Temperature:	26°C	Humidity:	50%RH
Spectrum Detector:	PK.	Tested Mode:	IEEE 802.11b
Tested By:	Hugo Yeh	Modulation Type:	CCK
Tested Date:	Jul. 12, 2004		

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)
1	2412	12.25	30
6	2437	13.14	30
11	2462	12.11	30

CH 1:

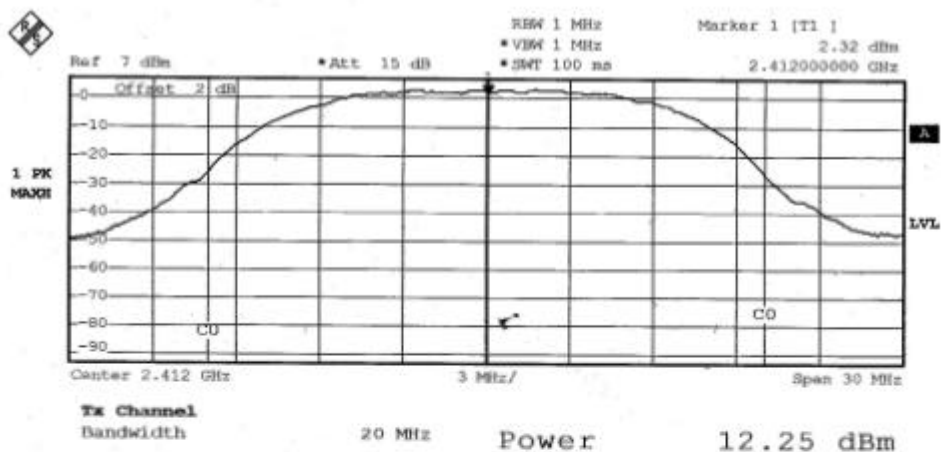

Date: 12.JUL.2004 14:40:33


Peak Power 11B

CH1 2412MHz

Hugo



CH 6:

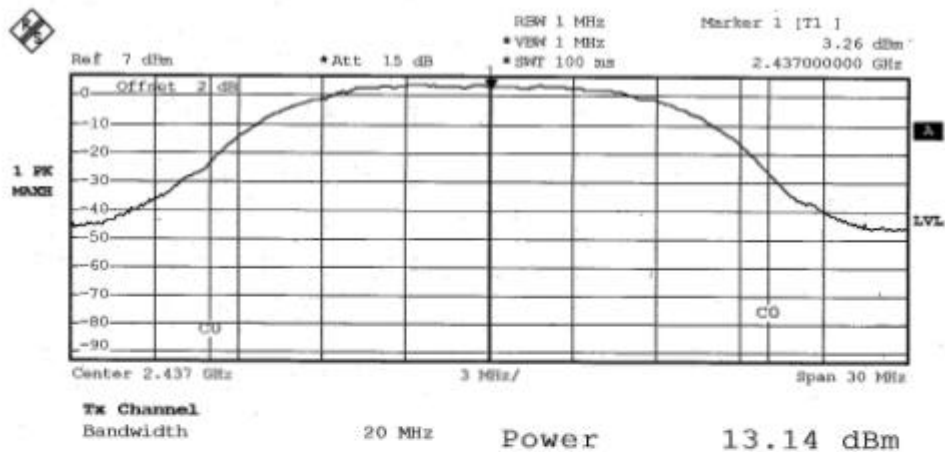

Date: 12.JUL.2004 14:37:37


Peak Power 118

CH6 2437 MHz

Hugo



CH 11:

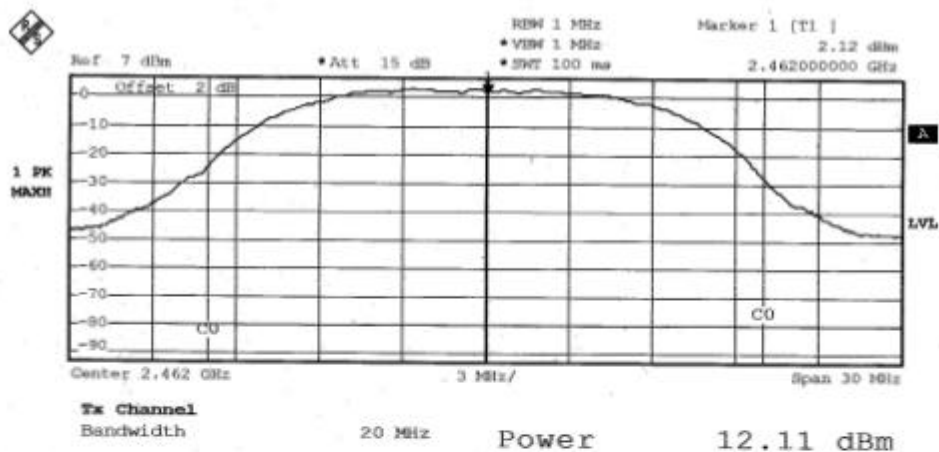

Date: 12.JUL.2004 14:43:22

Peak Power 118
CH 11 2462 MHz
Hugo




TEST REPORT

Temperature:	26°C	Humidity:	50%RH
Spectrum Detector:	PK.	Tested Mode:	IEEE 802.11g
Tested By:	Hugo Yeh	Modulation Type:	64QAM
Tested Date:	Jul. 12, 2004		

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)
1	2412	9.47	30
6	2437	10.23	30
11	2462	9.24	30

CH 1:

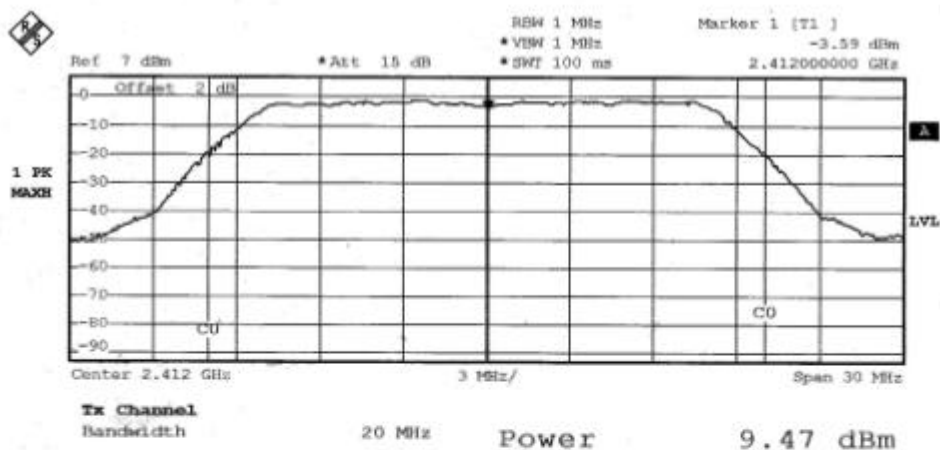


Date: 12.JUL.2004 15:03:46

Peak Power 11G
CH1 2412MHz
Hugo



CH 6:

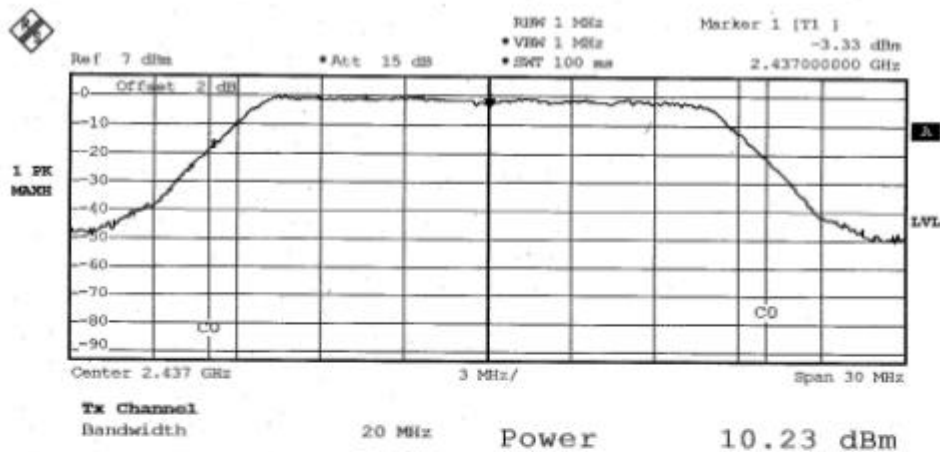


Date: 12.JUL.2004 15:00:25

Peak Power 11G
CH 6 2437 MHz
Hugo



CH 11:

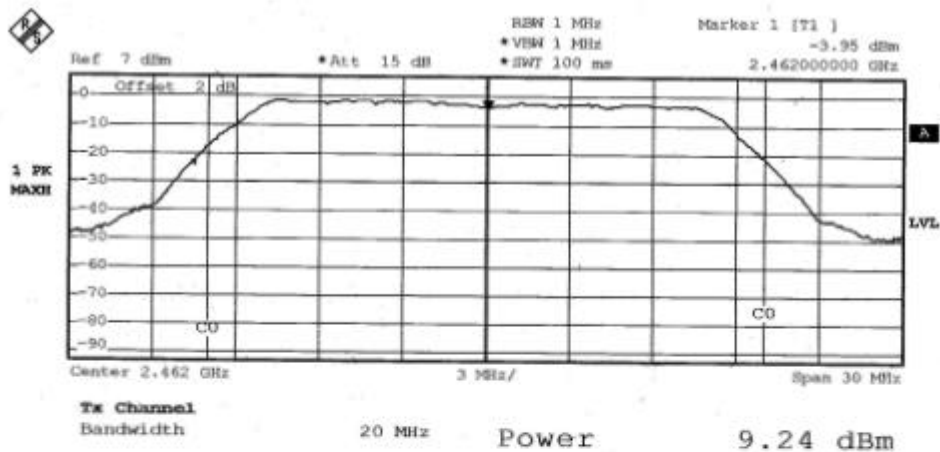

Date: 12.JUL.2004 14:57:28

Peak Power 11G
CH 11 2462 MHz
Hugo



4.5 BAND EDGE TEST

4.5.1 LIMIT

FCC Part15, Subpart C Section 15.247. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

OPERATING FREQUENCY RANGE (MHz)	SPURIOUS EMISSION FREQUENCY (MHz)	LIMIT	
		Peak power ration to emission(dBc)	Emission level(dBuV/m)
902 - 928	<902	>20	NA
	>928	>20	NA
	960-1240	NA	54
2400 - 2483.5	<2400	>20	NA
	>2483.5-2500	NA	54
5725 - 5850	<5350-5460	NA	54
	<5725	>20	NA
	>5850	>20	NA



4.5.2 TEST EQUIPMENT

The following test equipment was used during the test:


EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
SPECTRUM	9kHz-7GHz	ROHDE & SCHWARZ	FSP7/ 839511/010	MAR. 2005 ETC
SPECTRUM	9KHz-26.5GHz	HP	8953E/ 3710A03220	MAY 2005 ETC
PRE-AMPLIFIER	1GHz-26.5GHz Gain:30dB(typ.)	HP	8449B/ 3008A01019	DEC. 2004 ETC
HORN ANTENNA	1GHz to 18GHz	EMCO	3115/ 9602-4681	NOV. 2004 ETC
OATS	3 - 10 M measurement	SRT	SRT-1	APR. 2005 SRT

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.




4.5.3 TEST SET-UP

FOR RF CONDUCTED TEST (dBc)



The EUT was connected to a spectrum through a 50 Ω RF cable.

FOR RADIATED EMISSION TEST

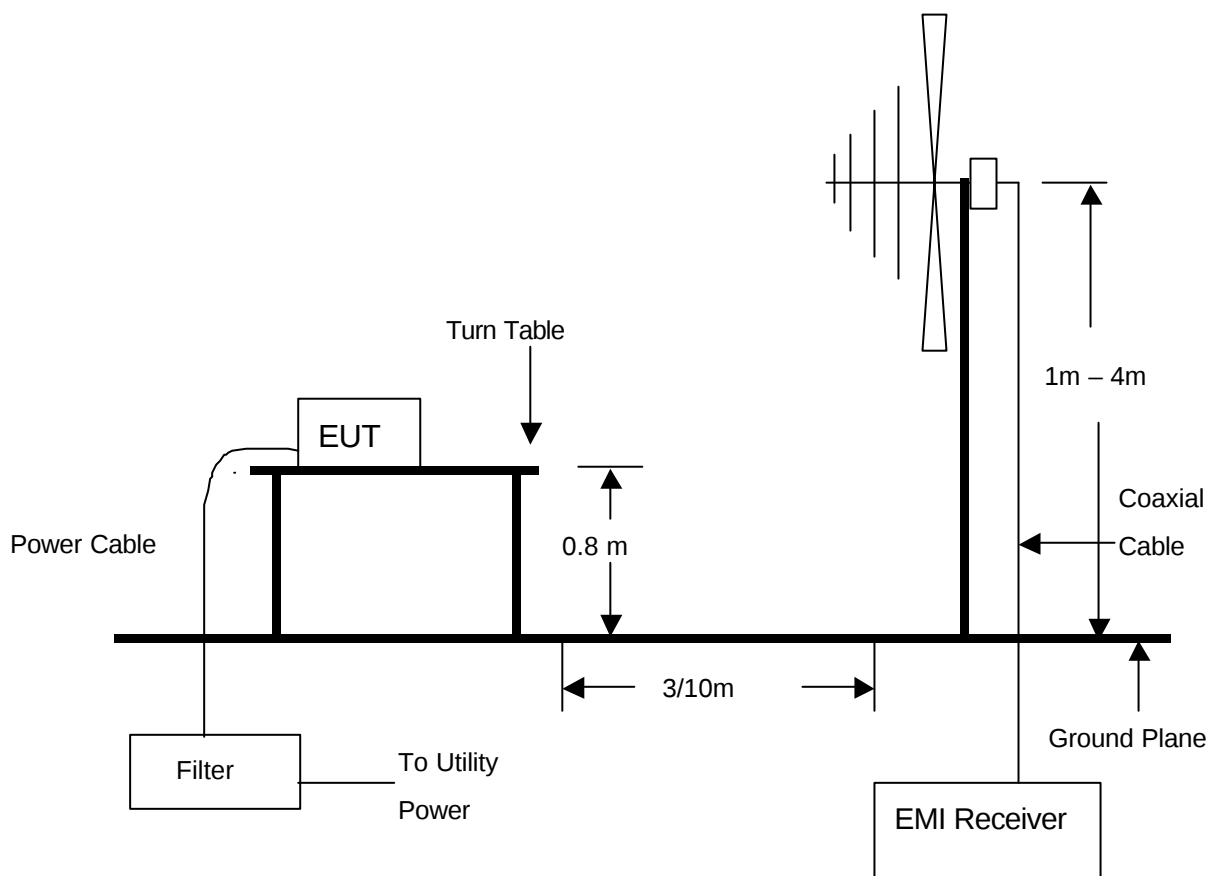

NOTE :

1. The EUT system was put on a wooden table with 0.8m heights above a ground plane.
2. For the actual test configuration, please refer to the photos of testing.



4.5.4 TEST PROCEDURE

1. The EUT was operating in transmitter mode and could be controlled its channel. Printed out the test result from the spectrum by hard copy function.
2. The EUT was tested according to the requirement of ANSI C63.4:2003 and CISPR 22:2003. The measurements were made at an open area test site with 10 meter measurement distance under 1 GHz and with 3m distance above 1GHz. The frequency spectrum measured started from 30 MHz. Under 1 GHz. All readings were quasi-peak values with 120 kHz resolution bandwidth of the test receiver. Above 1 GHz, the measurements were made at an open area test site with 3 meter measurement distance and all readings were peak and average values with 1 MHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. The cables connected to EUT and support units were moved to find the maximum emission levels for each frequency.

4.5.5 EUT OPERATING CONDITION

Same as section 4.1.5 of this report.



4.5.6 TEST RESULT

Temperature:	<u>25° C</u>	Humidity:	<u>50%RH</u>
Spectrum Detector:	<u>PK. & AV.</u>	Tested Mode:	<u>IEEE 802.11b</u>
Tested By:	<u>Hugo Yeh</u>	Modulation Type:	<u>CCK</u>
Tested Date:	<u>Jul. 06, 2004</u>		

1. Conducted test


Frequency (MHz)	PEAK POWER OUTPUT (dBm)	Emission read Value(dBm)	Result of Band edge (dBc)	Band edge LIMIT (dBc)
<2400	0.11	-52.76	52.87	>20dBc
>2483.5	-1.81	-56.03	54.22	>20dBc

2. Radiated emission test

Frequency (MHz)	Antenna polarization (H/V)	PEAK POWER OUTPUT (dBuV/m)	Emission read Value(dBuV/m)	Band edge LIMIT (dBuV/m)
<2400	H	79.00	49.80	54
>2483.5	H	76.50	47.00	54



<2400MHz

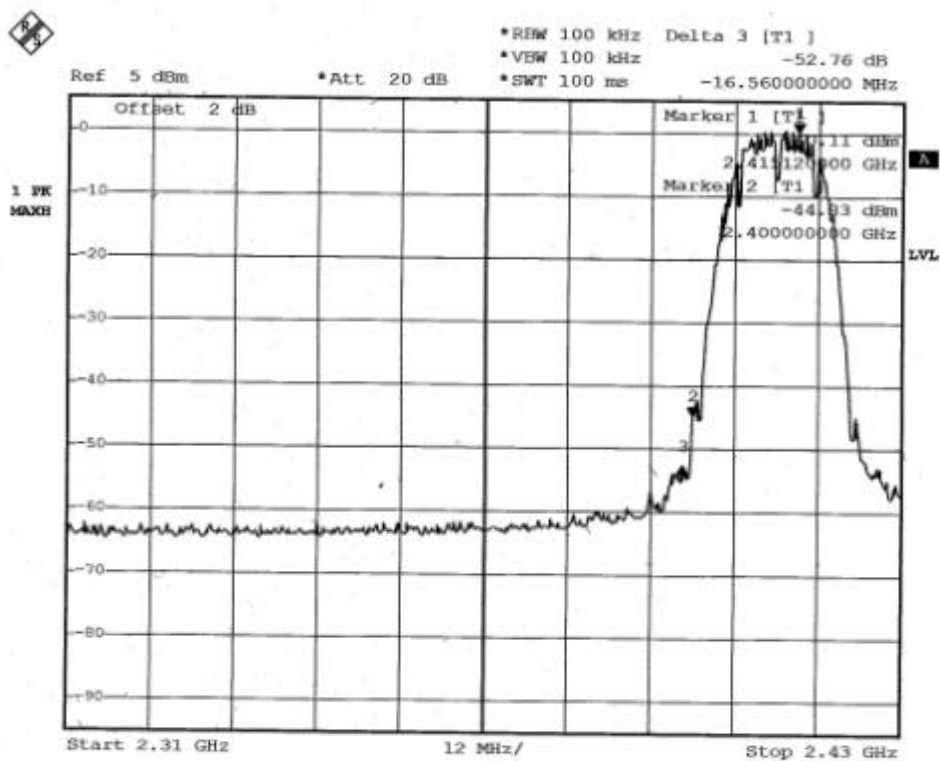

Date: 6.JUL.2004 12:04:04

Bandedge 11B


CH1

Hugo



TEST REPORT

>2483.5MHz

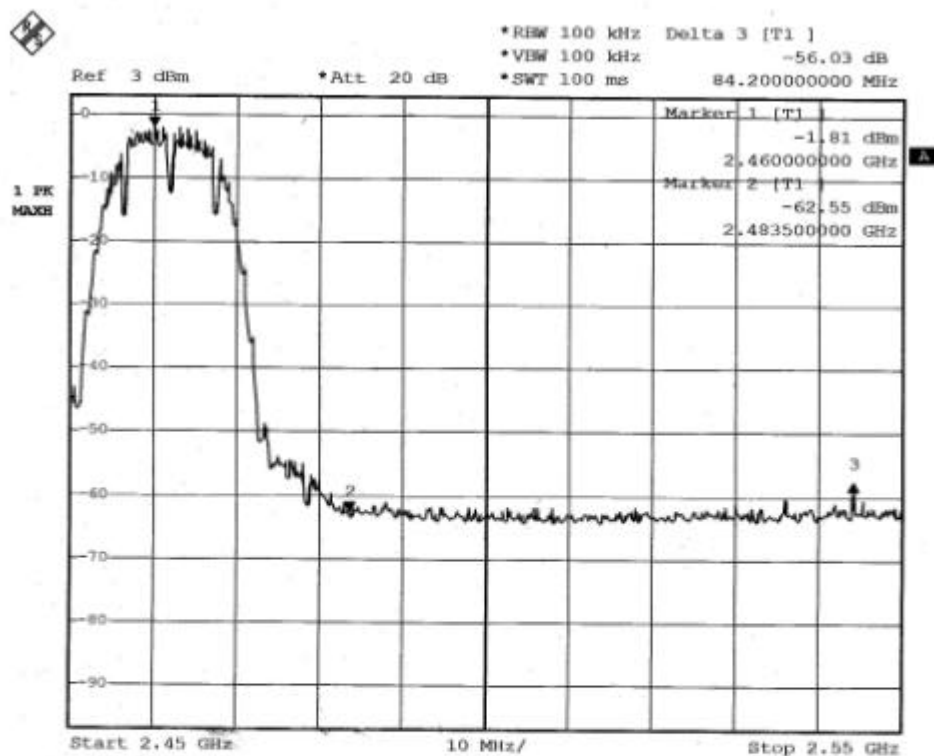

Date: 6.JUL.2004 12:13:34

Bandedge 11B
CH11
Hugo



TEST REPORT

Temperature: 25° C
Spectrum Detector: PK. & AV.
Tested By: Hugo Yeh
Tested Date: Jul. 06, 2004

Humidity: 50%RH
Tested Mode: IEEE 802.11g
Modulation Type: 64QAM

1. Conducted test


Frequency (MHz)	PEAK POWER OUTPUT (dBm)	Emission read Value(dBm)	Result of Band edge (dBc)	Band edge LIMIT (dBc)
<2400	-5.21	-54.11	48.90	>20dBc
>2483.5	-5.17	-49.78	44.61	>20dBc

2. Radiated emission test

Frequency (MHz)	Antenna polarization (H/V)	PEAK POWER OUTPUT (dBuV/m)	Emission read Value(dBuV/m)	Band edge LIMIT (dBuV/m)
<2400	H	56.2	43.20	54
>2483.5	V	53.20	43.60	54



<2400MHz

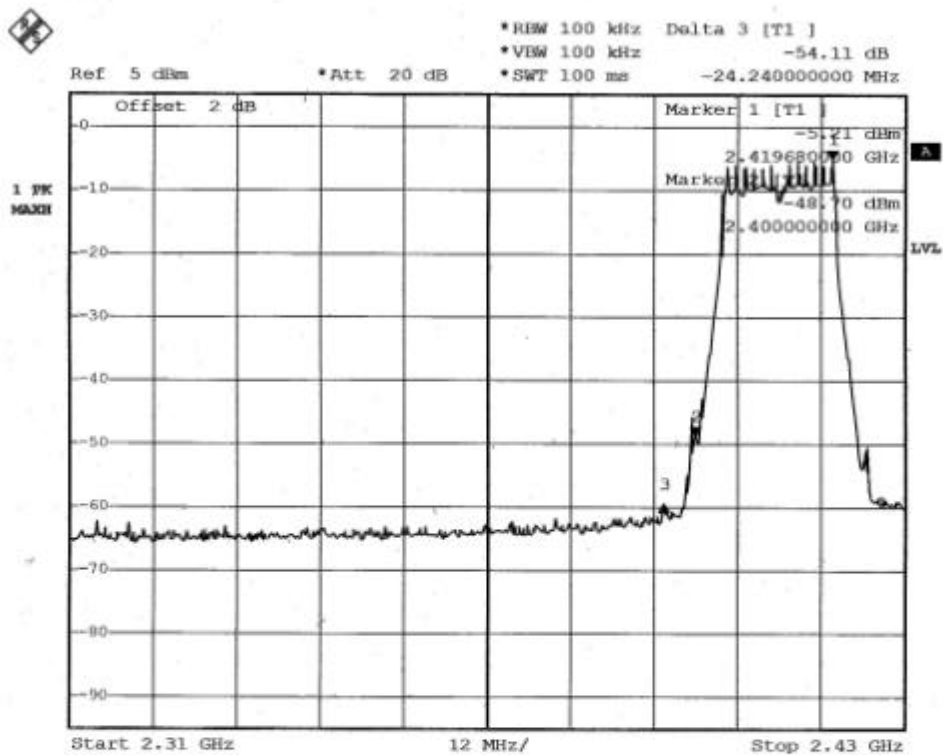

Date: 6.JUL.2004 12:06:30


Bankledge 11G

CH1

Hugo



>2483.5MHz

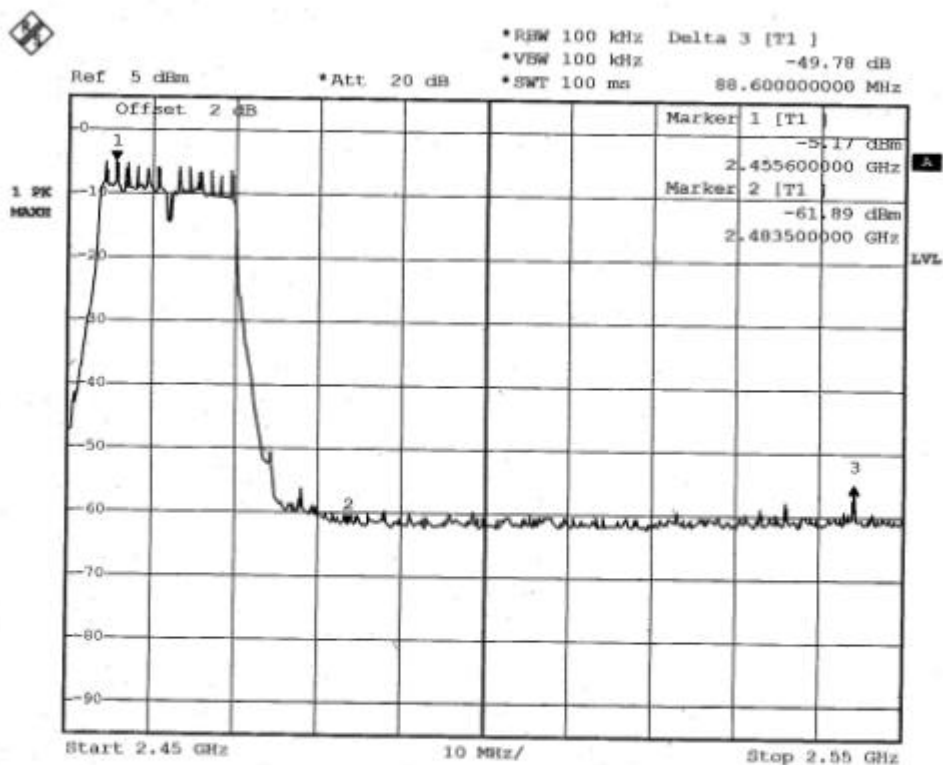

Date: 6.JUL.2004 12:11:05

Bandedge 116

CH 11

Hugo



4.6 POWER DENSITY TEST

4.6.1 LIMIT

FCC Part15, Subpart C Section 15.247

FREQUENCY RANGE (MHz)	Limit(dBm/kHz)
902-928	8dBm/3kHz
2400-2483.5	
5725-5850	


4.6.2 TEST EQUIPMENT

The following test equipment was used during the radiated emission test:

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
SPECTRUM	9kHz-7GHz	ROHDE & SCHWARZ	FSP7/ 839511/010	MAR. 2005 ETC

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST SET-UP



The EUT was connected to a spectrum through a 50 RF cable.

4.6.4 TEST PROCEDURE

The EUT was operating in transmitter mode and could be controlled its channel.
Printed out the test result from the spectrum by hard copy function.

4.6.5 EUT OPERATING CONDITION

Same as section 4.1.5 of this report.




4.6.6 TEST RESULT

Temperature:	23°C	Humidity:	65%RH
Spectrum Detector:	PK.	Tested Mode:	IEEE 802.11b
Tested By:	Hugo Yeh	Modulation Type:	CCK
Tested Date:	Jul. 30, 2004		

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3KHz BW (dBm/3kHz)	MAXIMUM LIMIT (dBm/3kHz)
1	2412	-18.45	8
6	2437	-20.27	8
11	2462	-21.72	8

CH 1:

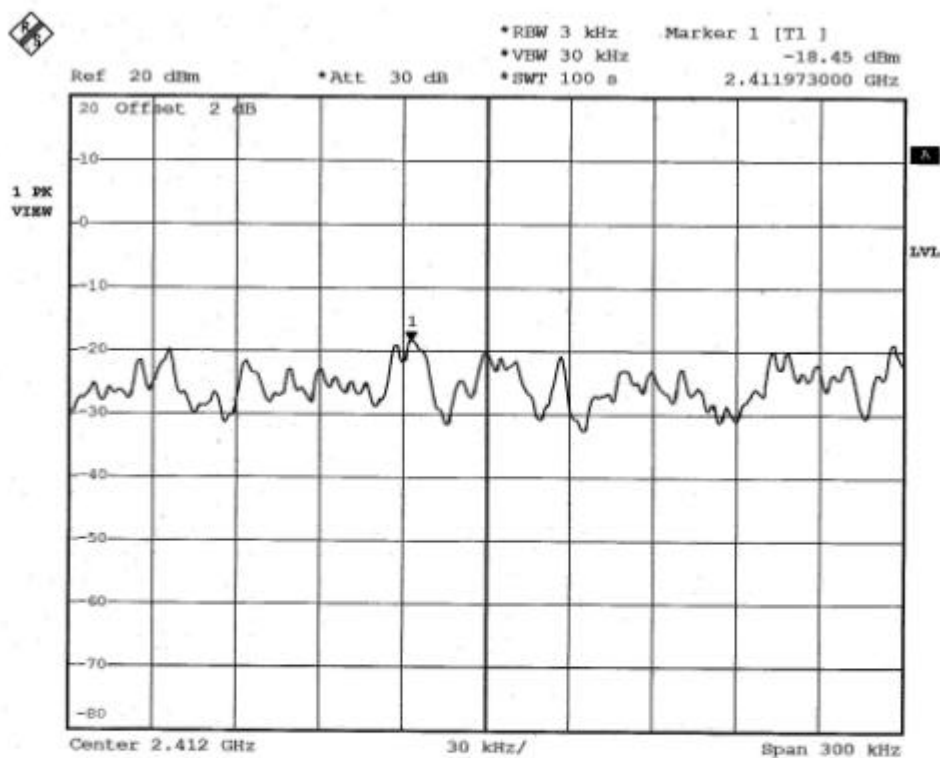


Date: 30.JUL.2004 10:53:25

Power density 11B
CH1 2412MHz
Hugo



CH 6:

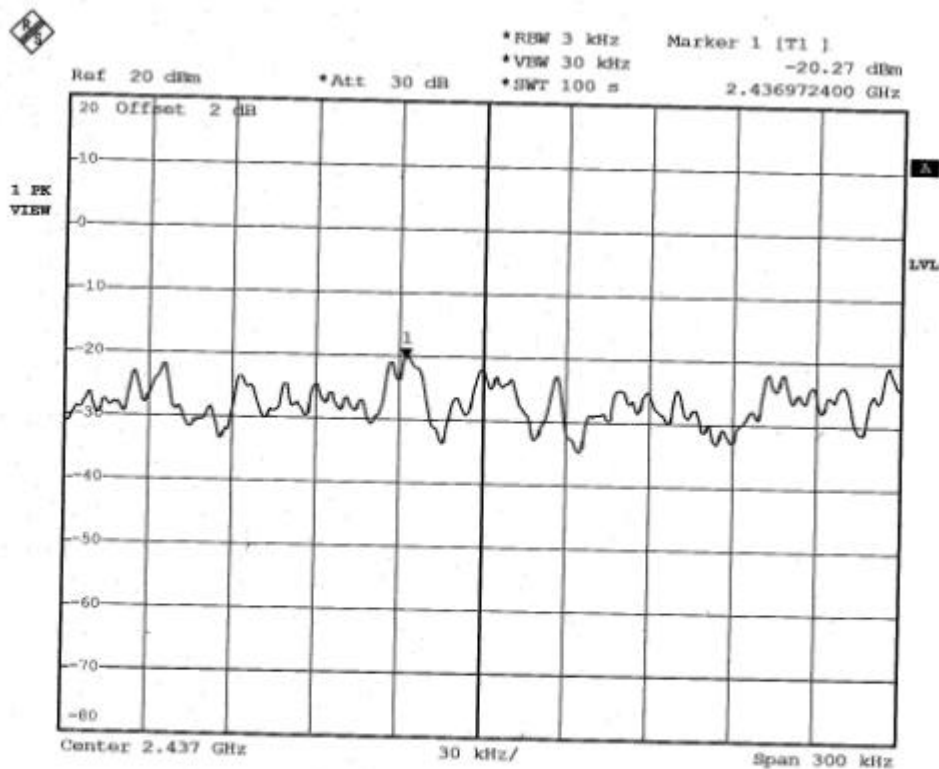


Date: 30.JUL.2004 10:36:43

Power density 1/B
CH6 2437MHz
Hugo



TEST REPORT

CH 11:

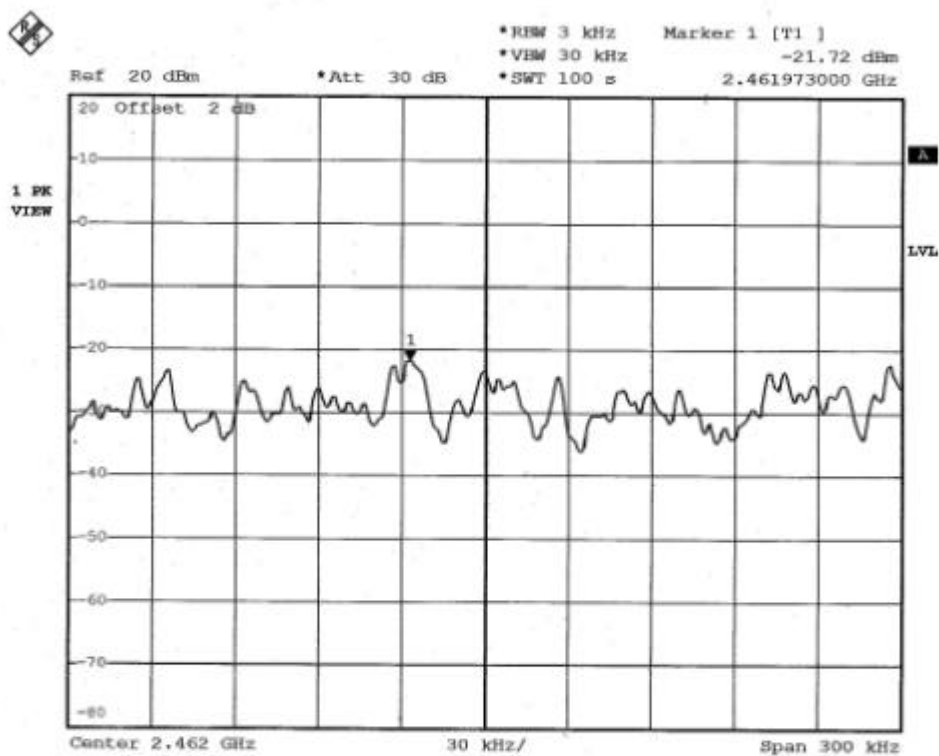

Date: 30.JUL.2004 10:49:32

Power density 110
CH 11 2462 MHz
Hugo



**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.:A04070702
Report No.:FCCA04070702
Page:56 of 67
Date:Sep. 27, 2004

Temperature: 23°C

Humidity: 65%RH

Spectrum Detector: PK.

Tested Mode: IEEE 802.11g


Tested By: Hugo Yeh

Modulation Type: 64QAM

Tested Date: Jul. 30, 2004

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3KHz BW (dBm/3kHz)	MAXIMUM LIMIT (dBm/3kHz)
1	2412	-32.02	8
6	2437	-30.54	8
11	2462	-33.82	8

CH 1:

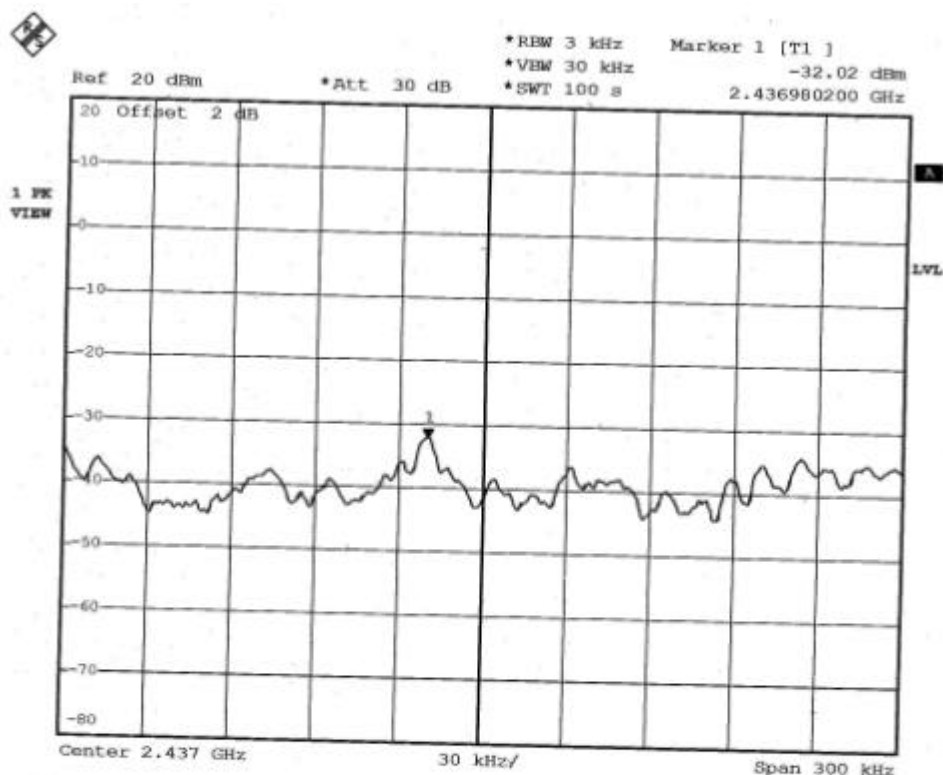

Date: 30.JUL.2004 11:02:23


Power density 11G

CH6 2437MHz

Hugo



CH 6:

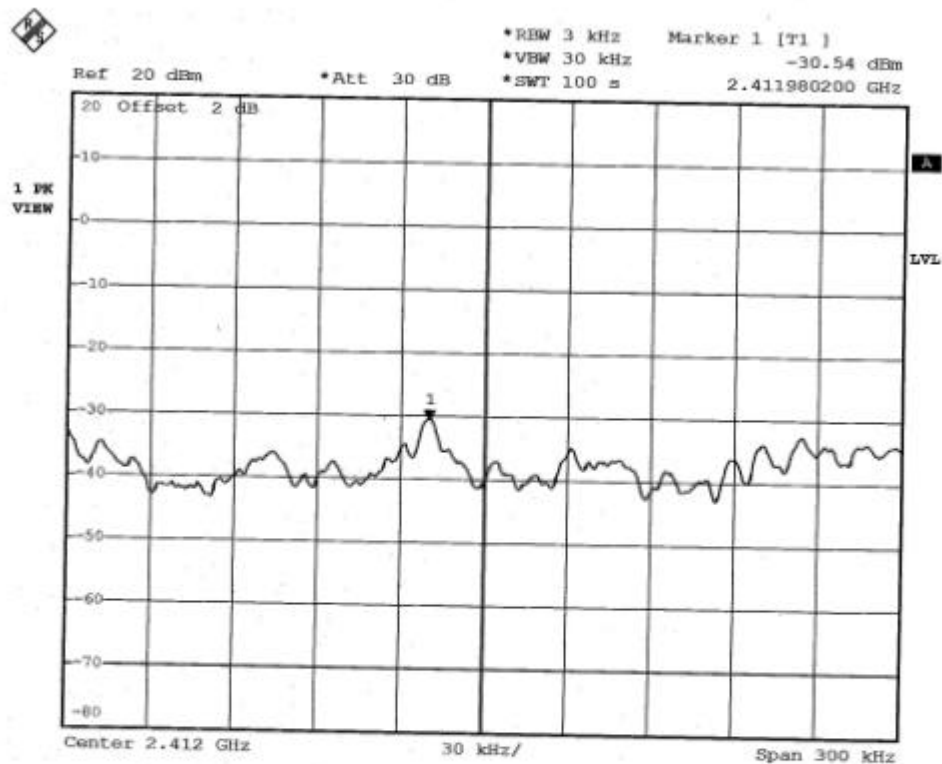


Date: 30.JUL.2004 10:57:59

Power density 11G
CH1 2412MHz
Hugo



CH 11:

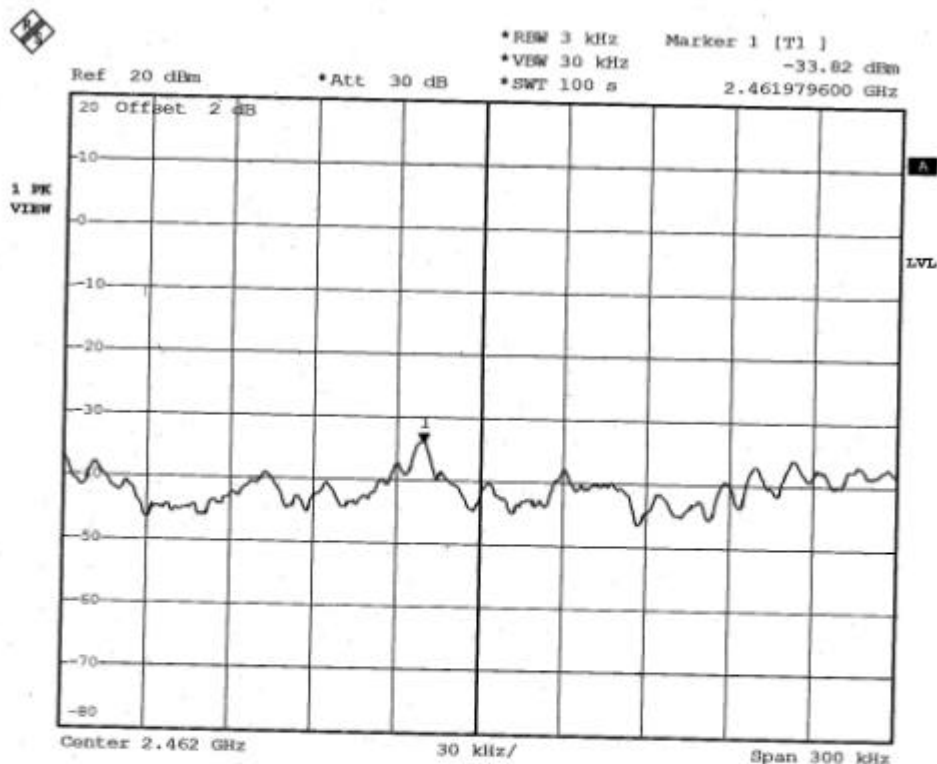

Date: 30.JUL.2004 11:06:35

Power density 11G
CH11 2462MHz
Hugo



4.7 RF POWER EXPOSURE EVALUATION TEST

4.7.1 LIMIT

According to the requirement of IEEE C95.1 and FCC OET Bulletin 65.

Limits for Occupational/Controlled Exposure

Frequency Range (MHz)	Electric Field Strength(E) (V/m)	Magnetic Field Strength(H) (A/m)	Power density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842/f	4.89/f	(900/f ²)*	6
30-300	61.4	0.163	1.0	6
300-1500	--	--	f/300	6
1500-100,000	--	--	5	6

Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength(E) (V/m)	Magnetic Field Strength(H) (A/m)	Power density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f ²)*	30
30-300	27.5	0.073	0.2	30
300-1500	--	--	f/1500	30
1500-100,000	--	--	1.0	30

f = frequency in MHz *Plane-wave equivalent power density

NOTE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

	Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan	TEST REPORT	Reference No.:A04070702 Report No.:FCCA04070702 Page:60 of 67 Date:Sep. 27, 2004
---	---	----------------------	---


4.7.2 TEST EQUIPMENT

The following test equipment was used during the test:

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
POWER METER	N/A	BOONTON	4232A/ 29001	MAY 2005 ETC
POWER SENSOR	DC-8GHz 50	BOONTON	51011EMC/ 31181	NOV. 2004 BOONTON

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

4.7.3 TEST SET-UP



The EUT was connected to a spectrum through a 50 RF cable.



4.7.4 TEST PROCEDURE

1. The EUT was operating in transmitter mode and could be controlled its channel. The power meter read power value.
2. The EUT uses notebook' s antenna and the antenna gain is $\leq 0.5\text{dBi}$ declared by manufacturer.
3. As discussed in OET Bulletin 65, calculations can be made to predict RF field strength and power density levels around typical RF sources. For example, in the case of a non-directional antenna, a prediction for power density in the far-field of the antenna can be made by use of the general Equations (1) or (2) below [for conversion to electric or magnetic field strength see Equation (3) above]. These equations are generally accurate in the far-field of an antenna but will over-predict power density in the near field, where it could be used for making a "worst case" or conservative prediction.

$$S = PG / 4 \pi R^2 \quad (\text{Eq.1})$$

$$S = \text{EIRP} / 4 \pi R^2 \quad (\text{Eq. 2})$$

$$S = E^2 / 3770 = 37.7 H^2 \quad (\text{Eq. 3})$$

where: S = power density (mW/cm²)

E = electric field strength (V/m)

H = magnetic field strength (A/m)

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW)

G = power gain of the antenna in the direction of interest relative to an isotropic radiator (dBi)

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

where: EIRP = equivalent (or effective) isotropically radiated power

4.7.5 EUT OPERATING CONDITION

Same as section 4.1.5 of this report.



4.7.6 RESULT

Temperature:	23° C	Humidity:	65%RH
Spectrum Detector:	PK.	Tested Mode:	IEEE 802.11b
Tested By:	Hugo Yeh	Modulation Type:	CCK
Tested Date:	Jul. 30, 2004		

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF Output Power (mW)	Result calculated when nearby person (cm)	Limit when nearby person (cm)
1	2412	16.79	1.16	20
6	2437	20.60	1.28	20
11	2462	16.26	1.14	20

Temperature:	23° C	Humidity:	65%RH
Spectrum Detector:	PK.	Tested Mode:	IEEE 802.11g
Tested By:	Hugo Yeh	Modulation Type:	64QAM
Tested Date:	Jul. 30, 2004		

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF Output Power (mW)	Result calculated when nearby person (cm)	Limit when nearby person (cm)
1	2412	8.85	0.84	20
6	2437	10.54	0.92	20
11	2462	8.39	0.82	20

NOTE : The EUT uses a dipole antenna and the antenna gain is 0.5dBi (1.12 numeric)



5. ANTENNA APPLICATION

5.1 ANTENNA REQUIREMENT

The EUT uses antenna is met the requirement of FCC part15C section15.203 and 15.204.

FCC part15C section15.247 requirement:

Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

5.2 RESULT



The EUT without antenna. The notebook' s antenna gain is $\leq 0.5\text{dBi}$ and meets the EUT.

The location of the antenna as show in the attached EUT PHOTOS.



6. PHOTOS OF TESTING

- Conducted test

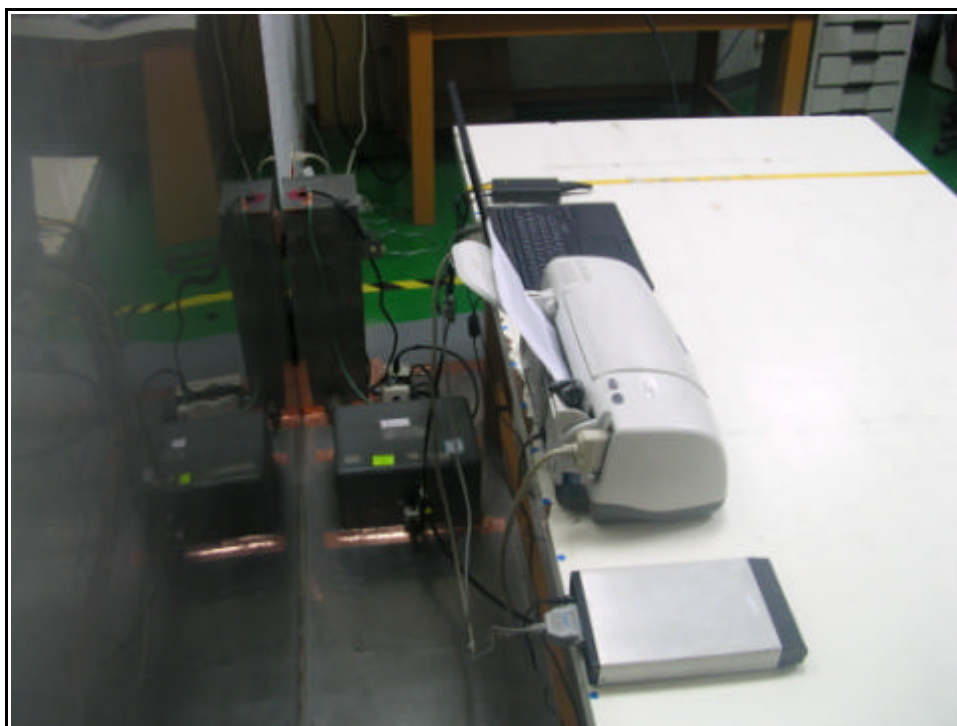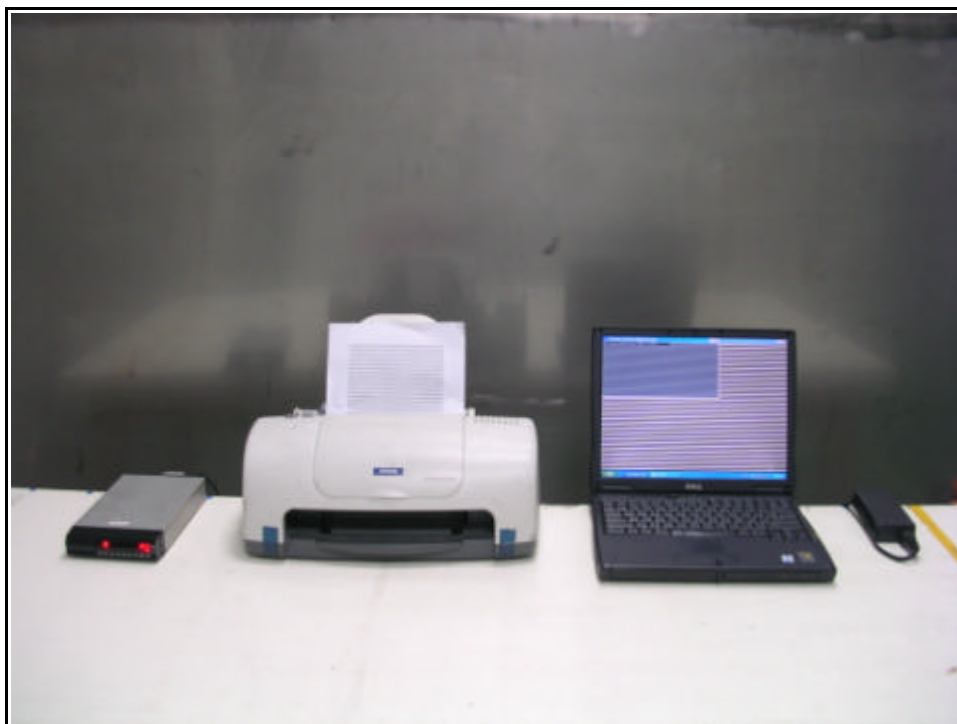



- Radiated test (RX)





- Radiated test (TX)





7. TERMS OF ABRIVATION

AV.	Average detection
AZ(°)	Turn table azimuth
Correct.	Correction
EL(m)	Antenna height (meter)
EUT	Equipment Under Test
Horiz.	Horizontal direction
LISN	Line Impedance Stabilization Network
NSA	Normalized Site Attenuation
PK.	Peak detection
Q.P.	Quasi-peak detection
SRT Lab	Spectrum Research & Testing Laboratory, Inc.
Vert.	Vertical direction