

**MULTILAYER CERAMIC ANTENNA
FOR BLUETOOTH & WLAN IEEE 802.11b (2.45G Hz ISM Band)
(Long Shape)**

Product Specification¹

QUICK REFERENCE DATA

Dimension	7.8* 3.6 * 0.9 mm
Central Frequency*	2.45 GHz
Bandwidth	>100 MHz
Gain	2.5 dBi max
VSWR	2.0 max
Polarization	Linear
Azimuth	Omni-directional
Impedance	50Ω
Operating Temperature	-55~125 °C
Termination	Ni/Sn (Environmentally-Friendly Leadless)
Resistance to soldering heats	260°C, 10 sec.
Maximum Power	1W

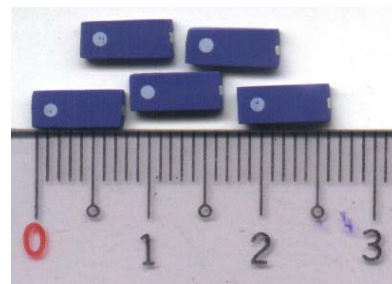

* Three types of antenna are available for central frequency adjustment (type 245, type 260, type 270)




Special Environmental Concerns- Green Products Design: The foil making process is using environmentally-friendly aqueous solvent technology. Termination is lead free (Pb free) and packing materials can be re-cycled

¹ All the technical data and information contained herein are subject to change without prior notice


HF R&D	Print date 04/02/04				Preliminary internal use only			
	Long Shape Multilayer Ceramic Antenna for Bluetooth (ISM Band 2.45GHz)			CAN431111500245/260/2701K			Mar. 26, 02	
							Apr. 24, 02	
Grant Lin/Cliff		2002-04-24		Page 1	sheet 190-1			A4
spec.doc	Phycomp Taiwan Ltd.							

APPLICATION

Suggested Layout I.

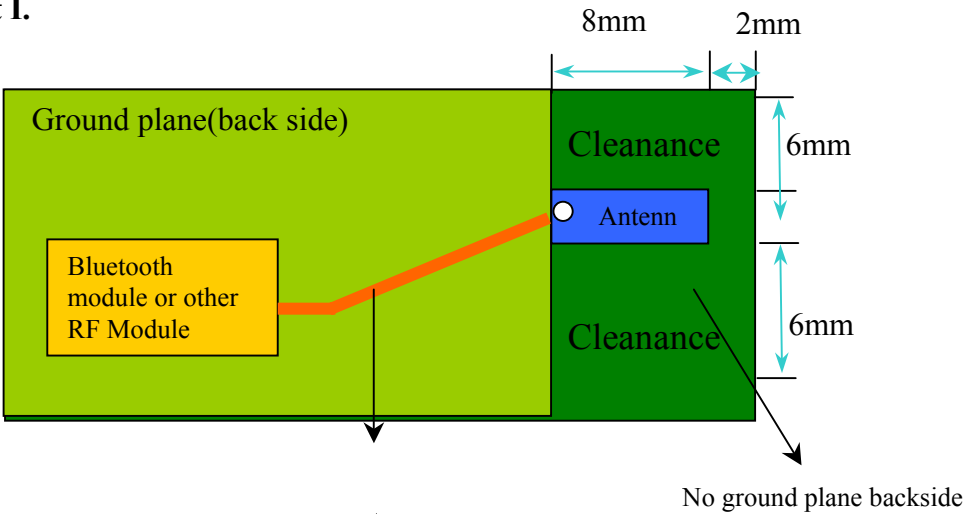


Suggested Layout II.

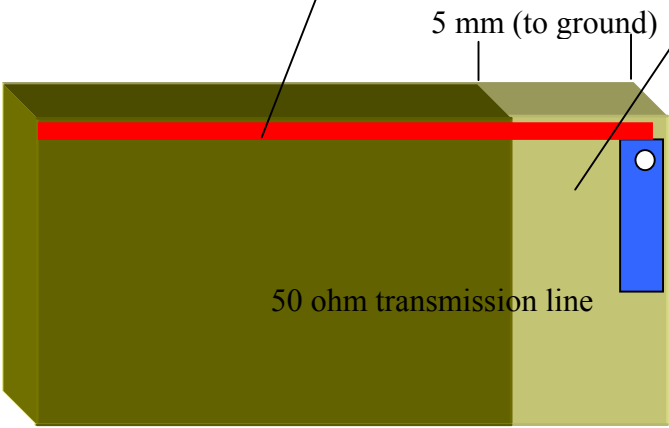


HF R&D	Print date 04/02/04		Preliminary internal use only			
	Long Shape Multilayer Ceramic Antenna for Bluetooth (ISM Band 2.45GHz)		CAN431111500245/260/2701K		Mar. 26, 02	
					Apr. 24, 02	
Grant Lin/Cliff		2002-04-24	Page 2	sheet 190-2		A4
spec.doc	Phycomp Taiwan Ltd.					

DIMENSIONAL DATA

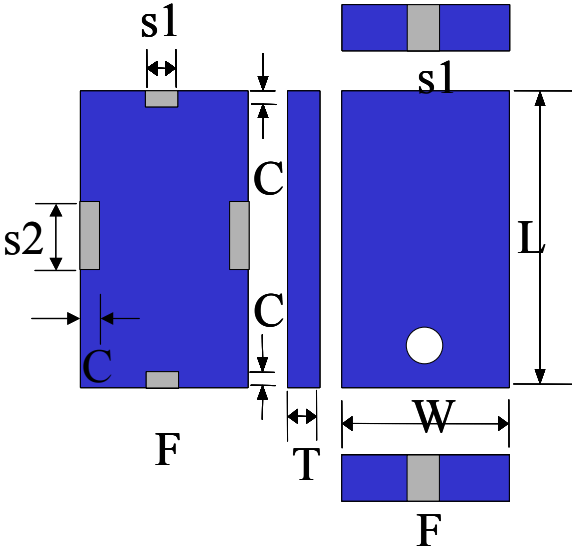Figure	Dimension	Port
	L	7.8±0.25 mm
	W	3.6±0.2 mm
	T	0.9±0.2 mm
	F	1.25±0.25 mm
	C	0.4±0.2 mm
	S1	1.25±0.25 mm
	S2	1.40 ±0.25 mm
		Feed Termination - NC Solder Termination Only Optional NC Solder Termination Only

SOLDER LAND PATTERN


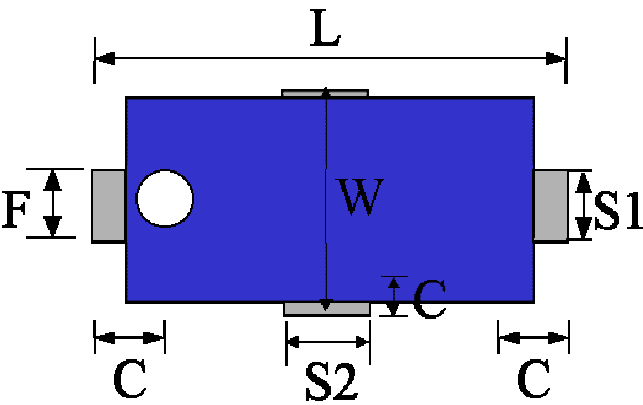
Figure	Dimensions		Remark
	L	9 ± 0.10 mm	Feed Pad
	W	4.4 ± 0.20 mm	
	F	1.40 ± 0.25 mm	
	C	0.80 ± 0.20 mm	NC Mount Pad Only
	S1	1.40 ± 0.25 mm	
	S2	1.60 ± 0.25 mm	Optional NC Mount Pad Only

HF R&D	Print date 04/02/04		Preliminary internal use only			
	Long Shape Multilayer Ceramic Antenna for Bluetooth (ISM Band 2.45GHz)		CAN431111500245/260/2701K		Mar. 26, 02	
					Apr. 24, 02	
Grant Lin/Cliff		2002-04-24	Page 3	sheet 190-3		A4
spec.doc	Phycomp Taiwan Ltd.					



HF R&D	Print date 04/02/04										Preliminary internal use only											
	Long Shape Multilayer Ceramic Antenna for Bluetooth (ISM Band 2.45GHz)										CAN431111500245/260/2701K										Mar. 26, 02	
																					Apr. 24, 02	
Grant Lin/Cliff		2002-04-24				Page 4			sheet 190-4					A4								
spec.doc	Phycomp Taiwan Ltd.																					

STANDARD TEST BOARD FOR SWR

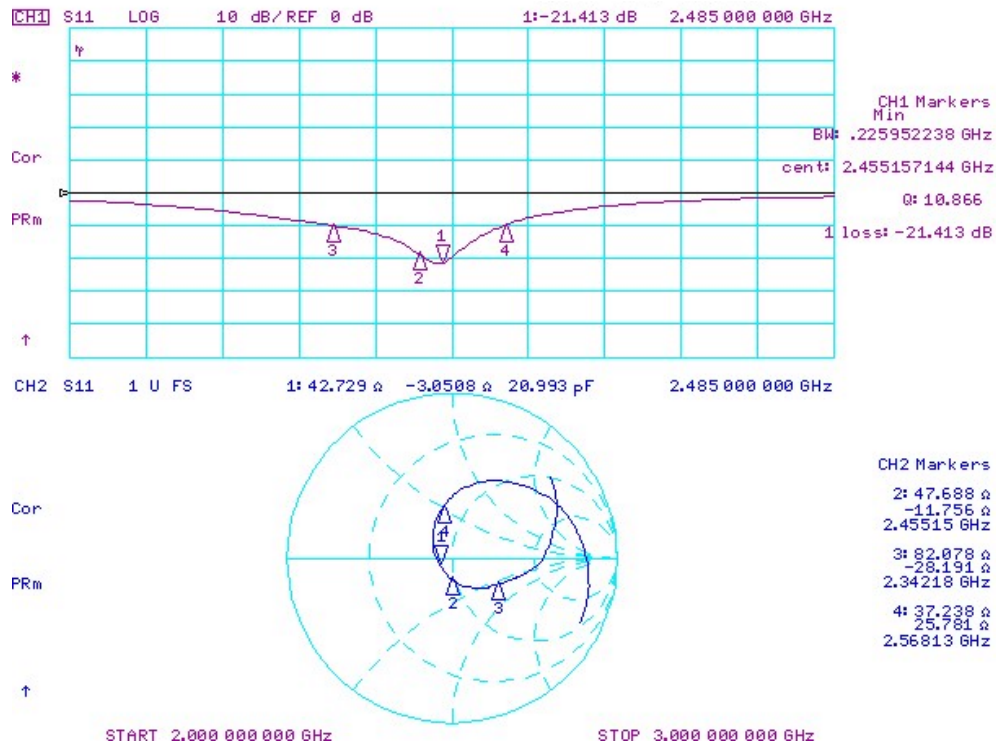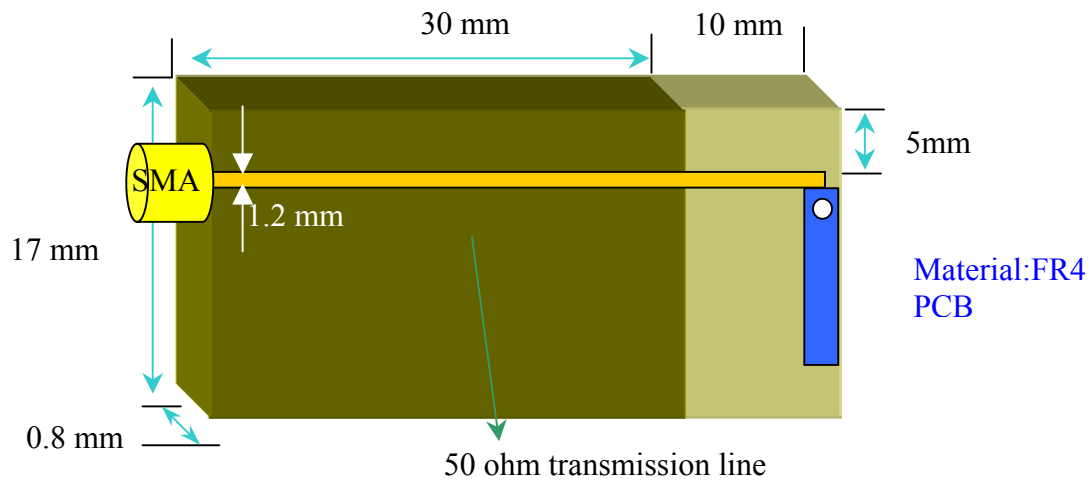

HF R&D	Print date 04/02/04		Preliminary internal use only			
	Long Shape Multilayer Ceramic Antenna for Bluetooth (ISM Band 2.45GHz)		CAN431111500245/260/2701K		Mar. 26, 02	
					Apr. 24, 02	
Grant Lin/Cliff		2002-04-24	Page 5	sheet 190-5		A4
spec.doc	Phycomp Taiwan Ltd.					

RELIABILITY DATA (Reference to IEC Specification)

IEC 384-10/ CECC 32 100 CLAUSE	IEC 60068-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
4.4		Mounting	The antenna can be mounted on printed-circuit boards or ceramic substrates by applying wave soldering, reflow soldering (including vapour phase soldering) or conductive adhesive	No visible damage
4.5		Visual inspection and dimension check	Any applicable method using $\times 10$ magnification	In accordance with specification (chip off 4mm)
4.6.1		Antenna	Central Frequency at 20 °C	Standard test board in page 4
4.8		Adhesion	A force of 3 N applied for 10 s to the line joining the terminations and in a plane parallel to the substrate	No visible damage
4.9		Bond strength of plating on end face	Mounted in accordance with CECC 32 100, paragraph 4.4	No visible damage
			Conditions: bending 0.5 mm at a rate of 1mm/s, radius jig. 340 mm, 2mm warp on FR4 board of 90 mm length	No visible damage

HF R&D	Print date 04/02/04										Preliminary internal use only									
	Long Shape Multilayer Ceramic Antenna for Bluetooth (ISM Band 2.45GHz)					CAN431111500245/260/2701K					Mar. 26, 02									
											Apr. 24, 02									
Grant Lin/Cliff		2002-04-24			Page 6			sheet 190-6					A4							
spec.doc	Phycomp Taiwan Ltd.																			

IEC 384-10/ CECC 32 100 CLAUSE	IEC 60068-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
4.10	20(Tb)	Resistance to soldering heat	260 ± 5 °C for 10 ± 0.5 s in a static solder bath	The terminations shall be well tinned after recovery and Central Freq. Change $\pm 6\%$
		Resistance to leaching	260 ± 5 °C for 30 ± 1 s in a static solder bath	Using visual enlargement of $\times 10$, dissolution of the termination shall not exceed 10%
4.11	20(Ta)	Solderability	Zero hour test, and test after storage (20 to 24 months) in original atmosphere; un-mounted chips completely immersed for 2 ± 0.5 s in $235 \pm 5^\circ\text{C}$.	The termination must be well tinned, at least 75% is well tinned at termination
4.12	4(Na)	Rapid change of temperature	-55 °C (30 minutes) to $+125$ °C (30 minutes); 100 cycles	No visible damage Central Freq. Change $\pm 6\%$
4.14	3(Ca)	Damp heat	500 ± 12 hours at 60 °C; 90 to 95 % RH	No visible damage 2 hours recovery Central Freq. Change $\pm 6\%$
4.15		Endurance	500 ± 12 hours at 125 °C;	No visible damage 2 hours recovery Central Freq. Change $\pm 6\%$

HF R&D	Print date 04/02/04										Preliminary internal use only											
	Long Shape Multilayer Ceramic Antenna for Bluetooth (ISM Band 2.45GHz)										CAN431111500245/260/2701K										Mar. 26, 02	
																					Apr. 24, 02	
Grant Lin/Cliff		2002-04-24				Page 7			sheet 190-7					A4								
spec.doc	Phycomp Taiwan Ltd.																					

The antennas may be ordered by using the Yageo ordering code. These code numbers can be determined by the following rules:

CAN = Yageo Part No. for Antenna

43 = Antenna

11 = 180 mm/ 7" blister (1000pcs) , **12** = 330 mm/13" blister (4000 pcs)

13 = Bulk (1000 pcs)

1 = High Frequency Material

$$15 = 7.8 * 3.6 * 0.9 \text{ mm}$$

00 = larger than 100 M Hz Band Width

245 = 2.45 GHz

260 = (2.45+0.15) GHz * Intention for shift up 150MHz

270 = (2.45+0.25) GHz * Intention for shift up 250MHz


Type 245

Type 260 (Marking 6)

Type 270 (Marking 7)

HF R&D	Print date 04/02/04										Preliminary internal use only											
	Long Shape Multilayer Ceramic Antenna for Bluetooth (ISM Band 2.45GHz)										CAN431111500245/260/2701K										Mar. 26, 02	
																					Apr. 24, 02	
Grant Lin/Cliff		2002-04-24					Page 8				sheet 190-8						A4					
spec.doc	Phycomp Taiwan Ltd.																					

Taping Blister Tape

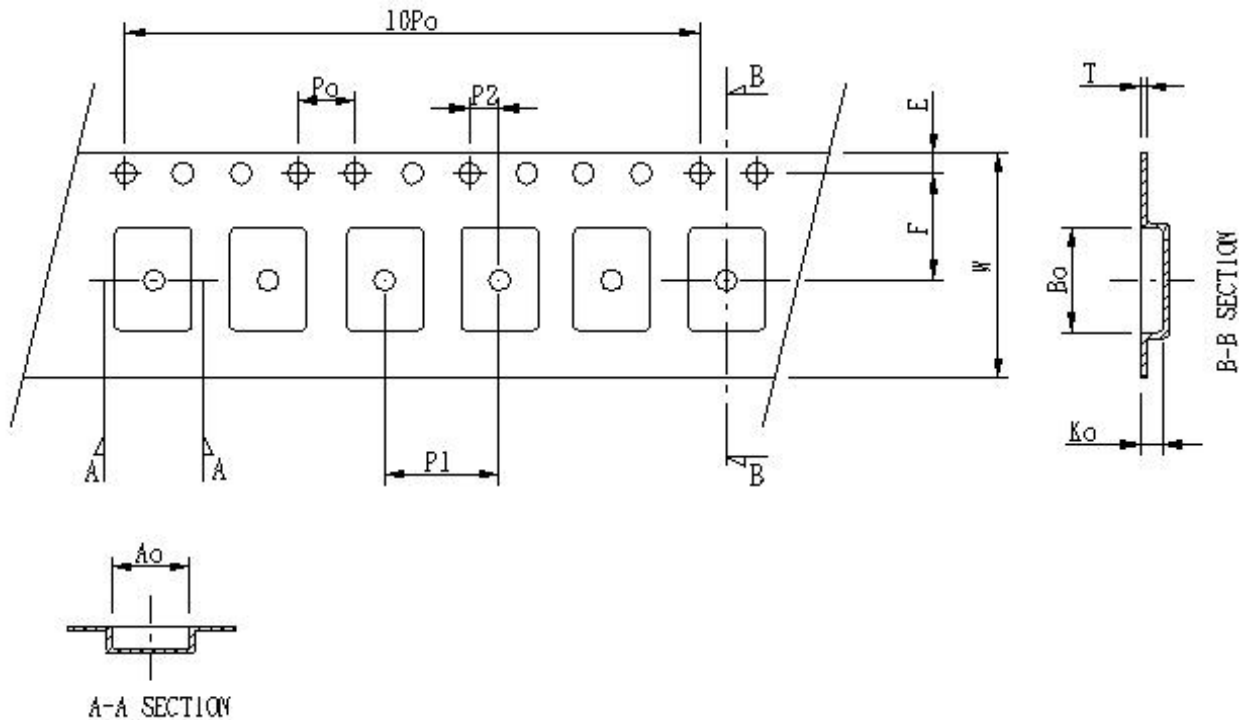


DIMENSION:

Serial no	Cecking note	Index	Spec(mm)
1	Sprocket hole	Do	1.55±0.10
2	Pocket hole	D1	1.50±0.10
3	Distance sprocket hole/sprocket hole	Po	4.0±0.10
4	Distance pocket/pocket	P1	8.0±0.10
5	Distance sprocket hole/pocket	P2	2.0±0.10
6	Tape width	W	16.0±0.30
7	Distance sprocket hole/outside	E	1.75±0.10
8	Distance sprocket hole/pocket	F	7.50±0.10
9	Pocket length	Ao	3.86±0.10
10	Pocket length	Bo	8.15±0.10
11	Pocket depth	Ko	1.20±0.10
12	Thickness of tape	T	0.25±0.10
13	10x sprocket hole pitch	10Po	40.0±0.20

HF R&D	Print date 04/02/04										Preliminary internal use only											
	Long Shape Multilayer Ceramic Antenna for Bluetooth (ISM Band 2.45GHz)										CAN431111500245/260/2701K										Mar. 26, 02	
																					Apr. 24, 02	
Grant Lin/Cliff		2002-04-24				Page 9			sheet 190-9					A4								
spec.doc	Phycomp Taiwan Ltd.																					

7”(180mm) Reel Specifications

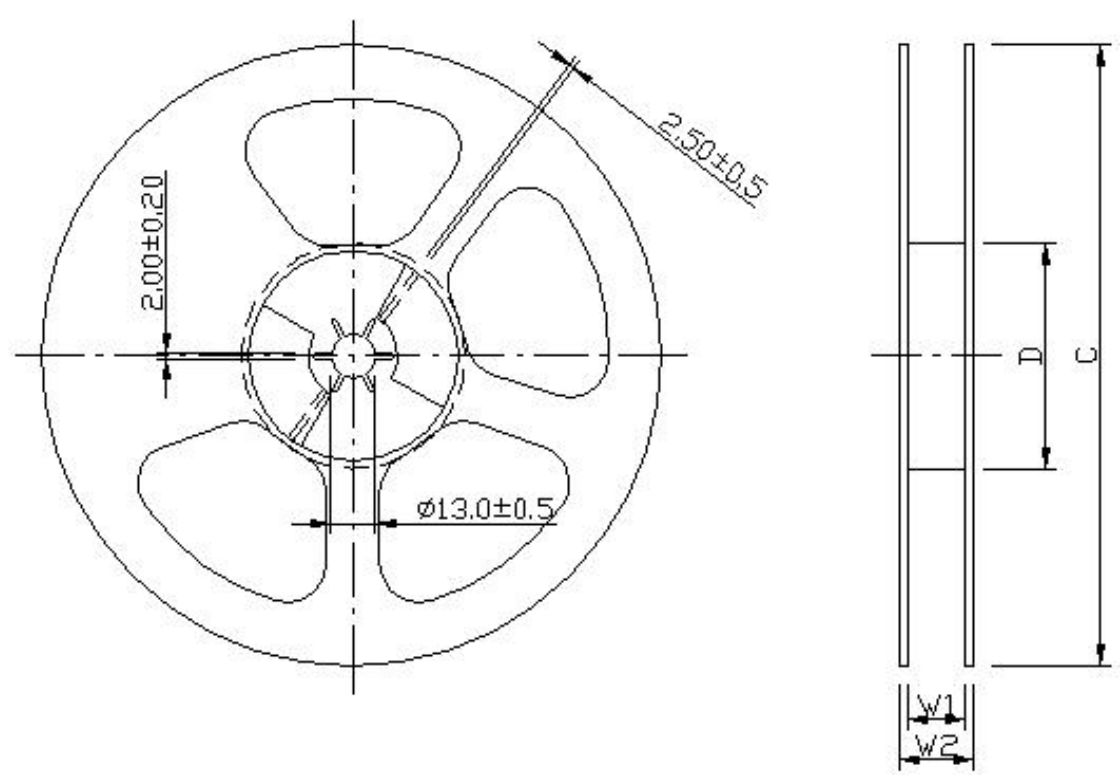

Product size code	Units per Reel	Tape Width (mm)	C (mm)	D (mm)	W ₁ (mm)	W ₂ (mm)
Antenna	1000	16	180.0±1.0	62±0.5	16.0 ⁺¹ ₋₀	20.5±0.2

HF R&D	Print date 04/02/04										Preliminary internal use only				
	Long Shape Multilayer Ceramic Antenna for Bluetooth (ISM Band 2.45GHz)					CAN431111500245/260/2701K					Mar. 26, 02				
											Apr. 24, 02				
Grant Lin/Cliff		2002-04-24			Page 10		sheet 190-10				A4				
spec.doc	Phycomp Taiwan Ltd.														