



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Xirrus, Inc.
Applicant Address	2101 Corporate Center Drive, Thousand Oaks, CA 91320 USA
FCC ID	SK6-X2120
Manufacturer's company	Lite-On Network Communication (Dongguan) Limited
Manufacturer Address	30#Keji Rd., Yin Hu Industrial Area, Qingxi Town, DongGuan City, Guangdong, China

Product Name	Wireless Access Point
Brand Name	XIRRUS
Model No.	X2120
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5250 ~ 5350MHz / 5470 ~ 5725MHz
Received Date	Jul. 29, 2015
Final Test Date	Aug. 25, 2015
Submission Type	Class II Change

Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a/ac of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart E, KDB789033 D02 v01, KDB662911 D01 v02r01, KDB644545 D03 v01.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. VERIFICATION OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies	7
3.5. Table for Test Modes	8
3.6. Table for Testing Locations.....	10
3.7. Table for Class II Change	10
3.8. Table for Supporting Units	10
3.9. Table for Parameters of Test Software Setting	11
3.10. EUT Operation during Test	11
3.11. Duty Cycle	11
3.12. Test Configurations	12
4. TEST RESULT	13
4.1. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	13
4.2. 6dB Spectrum Bandwidth Measurement	28
4.3. Maximum Conducted Output Power Measurement.....	32
4.4. Power Spectral Density Measurement	44
4.5. Radiated Emissions Measurement	58
4.6. Band Edge Emissions Measurement	85
4.7. Frequency Stability Measurement	95
4.8. Antenna Requirements	102
5. LIST OF MEASURING EQUIPMENTS	103
6. MEASUREMENT UNCERTAINTY.....	104
APPENDIX A. TEST PHOTOS	A1 ~ A5

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR580626-01	Rev. 01	Initial issue of report	Sep. 04, 2015

1. VERIFICATION OF COMPLIANCE

Product Name : Wireless Access Point
Brand Name : XIRRUS
Model No. : X2120
Applicant : Xirrus, Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jul. 29, 2015 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.2	15.407(e)	6dB Spectrum Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	0.09 dB
4.4	15.407(a)	Power Spectral Density	Complies	0.04 dB
4.5	15.407(b)	Radiated Emissions	Complies	3.00 dB
4.6	15.407(b)	Band Edge Emissions	Complies	0.02 dB
4.7	15.407(g)	Frequency Stability	Complies	-
4.8	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From PoE
Modulation	IEEE 802.11a: OFDM IEEE 802.11n/ac: see the below table
Data Modulation	IEEE 802.11a/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) IEEE 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	IEEE 802.11a: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n/ac: see the below table
Frequency Range	5250 ~ 5350MHz / 5470 ~ 5725MHz
Channel Number	16 for 20MHz bandwidth ; 8 for 40MHz bandwidth 4 for 80MHz bandwidth
Channel Band Width (99%)	Band 2: IEEE 802.11a: 18.76 MHz IEEE 802.11ac MCS0/Nss1 (VHT20): 20.67 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 40.09 MHz IEEE 802.11ac MCS0/Nss1 (VHT80): 76.41 MHz Band 3: IEEE 802.11a: 19.62 MHz IEEE 802.11ac MCS0/Nss1 (VHT20): 24.23 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 45.88 MHz IEEE 802.11ac MCS0/Nss1 (VHT80): 94.33 MHz
Maximum Conducted Output Power	Band 2: IEEE 802.11a: 23.85 dBm IEEE 802.11ac MCS0/Nss1 (VHT20): 23.91 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 23.74 dBm IEEE 802.11ac MCS0/Nss1 (VHT80): 16.86 dBm Band 3: IEEE 802.11a: 22.86 dBm IEEE 802.11ac MCS0/Nss1 (VHT20): 22.87 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 23.27 dBm IEEE 802.11ac MCS0/Nss1 (VHT80): 22.74 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Communication Mode	☒ IP Based (Load Based)	☐ Frame Based
TPC Function	☒ With TPC	☐ Without TPC
Weather Band (5600~5650MHz)	☒ With 5600~5650MHz	☐ Without 5600~5650MHz
Beamforming Function	☐ With beamforming	☒ Without beamforming
Operating Mode	☐ Outdoor access point	
	☒ Indoor access point	
	☐ Fixed point-to-point access points	
	☐ Mobile and portable client devices	

Antenna and Band width

Antenna	Two (TX)		
Band width Mode	20 MHz	40 MHz	80 MHz
IEEE 802.11a	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	2	MCS 0-15
802.11n (HT40)	2	MCS 0-15
802.11ac (VHT20)	2	MCS 0-9/Nss1-2
802.11ac (VHT40)	2	MCS 0-9/Nss1-2
802.11ac (VHT80)	2	MCS 0-9/Nss1-2

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).

Then EUT supports HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT supports VHT20, VHT40 and VHT80.

Note 3: Modulation modes consist of below configuration:

HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

3.2. Accessories

Others
Wall-mounted rack*1

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	
					2.4GHz	5GHz
1	-	-	Printed Antenna	N/A	Note 1	Note 2
2	-	-	Printed Antenna	N/A		
3	-	-	Printed Antenna	N/A		
4	-	-	Printed Antenna	N/A		

Note 1:

Antenna \ Frequency	Antenna Gain (dBi)			Directional Gain (dBi)					
				For Output Power Gain			For PSD Gain		
	2412 MHz	2437 MHz	2462 MHz	2412 MHz	2437 MHz	2462 MHz	2412 MHz	2437 MHz	2462 MHz
1	2.63	1.12	2.66	1.72	1.30	1.57	4.56	3.72	4.50
2	4.38	4.05	4.36						

Note 2:

Antenna \ Band	Antenna Gain (dBi)				Directional Gain (dBi)							
					For Output Power Gain				For PSD Gain			
	B1	B2	B3	B4	B1	B2	B3	B4	B1	B2	B3	B4
1	4.55	3.47	4.54	5.59	4.06	3.21	4.17	5.03	7.06	6.10	7.18	8.00
2	4.97	4.49	4.45	6.05								

Note 3: B1 = Band 1, B2 = Band 2, B3 = Band 3, B4 = Band 4

Note 4: The EUT has four Antennas.

For 2.4GHz function:

For IEEE 802.11b/g/n mode (2TX/2RX):

Ant.1 and Ant.2 can be used as transmitting/receiving antenna.


Ant.1 and Ant.2 could transmit/receive simultaneously.

For 5GHz function:

For IEEE 802.11a/n/ac mode (2TX/2RX):

Ant.1 and Ant.2 can be used as transmitting/receiving antenna.

Ant.1 and Ant.2 could transmit/receive simultaneously.

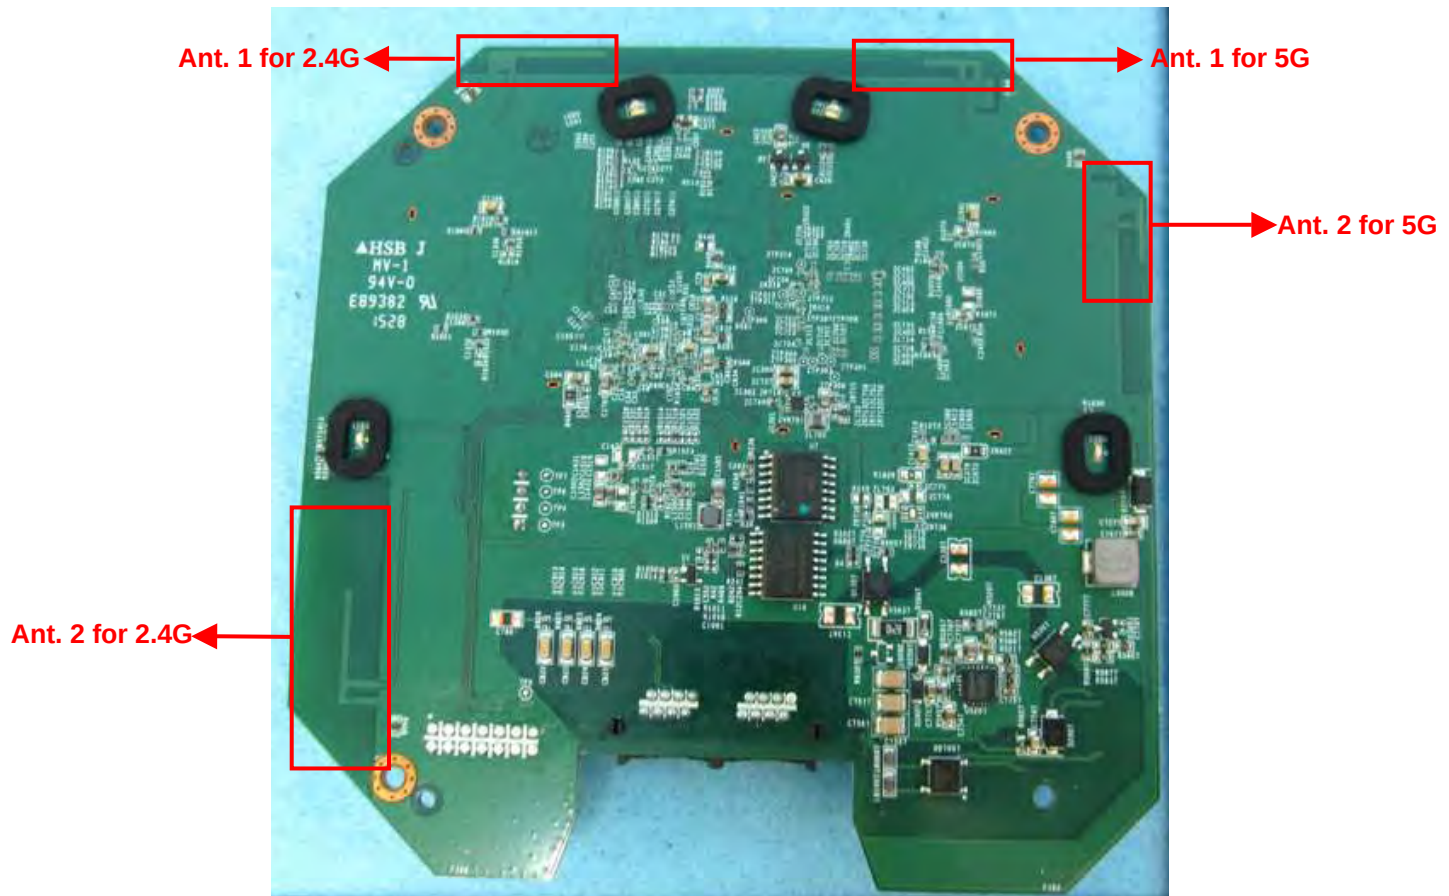

3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 52, 56, 60, 64, 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140, 144.

For 40MHz bandwidth systems, use Channel 54, 62, 102, 110, 118, 126, 134, 142.

For 80MHz bandwidth systems, use Channel 58, 106, 122, 138.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5250~5350 MHz Band 2	52	5260 MHz	60	5300 MHz
	54	5270 MHz	62	5310 MHz
	56	5280 MHz	64	5320 MHz
	58	5290 MHz	-	-
5470~5725 MHz Band 3	100	5500 MHz	124	5620 MHz
	102	5510 MHz	126	5630 MHz
	104	5520 MHz	128	5640 MHz
	106	5530 MHz	132	5660 MHz
	108	5540 MHz	134	5670 MHz
	110	5550 MHz	136	5680 MHz
	112	5560 MHz	138	5690 MHz
	116	5580 MHz	140	5700 MHz
	118	5590 MHz	142	5710 MHz
	120	5600 MHz	144	5720 MHz
	122	5610 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Ant.
Max. Conducted Output Power	11a/BPSK	Band 2-3	6Mbps	52/60/64/100/ 116/140/144	1+2
	11ac VHT20	Band 2-3	MCS0/Nss1	52/60/64/100/ 116/140/144	1+2
	11ac VHT40	Band 2-3	MCS0/Nss1	54/62/102/110/ 134/142	1+2
	11ac VHT80	Band 2-3	MCS0/Nss1	58/106/122/138	1+2
Power Spectral Density	11a/BPSK	Band 2-3	6Mbps	52/60/64/100/ 116/140/144	1+2
	11ac VHT20	Band 2-3	MCS0/Nss1	52/60/64/100/ 116/140/144	1+2
	11ac VHT40	Band 2-3	MCS0/Nss1	54/62/102/110/ 134/142	1+2
	11ac VHT80	Band 2-3	MCS0/Nss1	58/106/122/138	1+2
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement	11a/BPSK	Band 2-3	6Mbps	52/60/64/100/ 116/140/144	1+2
	11ac VHT20	Band 2-3	MCS0/Nss1	52/60/64/100/ 116/140/144	1+2
	11ac VHT40	Band 2-3	MCS0/Nss1	54/62/102/110/ 134/142	1+2
	11ac VHT80	Band 2-3	MCS0/Nss1	58/106/122/138	1+2
6dB Spectrum Bandwidth Measurement	11a/BPSK	Band 4	6Mbps	144	1+2
	11ac VHT20	Band 4	MCS0/Nss1	144	1+2
	11ac VHT40	Band 4	MCS0/Nss1	142	1+2
	11ac VHT80	Band 4	MCS0/Nss1	138	1+2

Radiated Emission Above 1GHz	11a/BPSK	Band 2-3	6Mbps	52/60/64/100/ 116/140/144	1+2
	11ac VHT20	Band 2-3	MCS0/Nss1	52/60/64/100/ 116/140/144	1+2
	11ac VHT40	Band 2-3	MCS0/Nss1	54/62/102/110/ 134/142	1+2
	11ac VHT80	Band 2-3	MCS0/Nss1	58/106/122/138	1+2
Band Edge Emission	11a/BPSK	Band 2-3	6Mbps	52/60/64/100/ 116/140/144	1+2
	11ac VHT20	Band 2-3	MCS0/Nss1	52/60/64/100/ 116/140/144	1+2
	11ac VHT40	Band 2-3	MCS0/Nss1	54/62/102/110/ 134/142	1+2
	11ac VHT80	Band 2-3	MCS0/Nss1	58/106/122/138	1+2
Frequency Stability	20 MHz	Band 2-3	-	60/116	1
	40 MHz	Band 2-3	-	62/110	1
	80 MHz	Band 2-3	-	58/106	1

Note: VHT20/VHT40 covers HT20/HT40, due to same modulation. The power setting for 802.11n HT20 and HT40 are the same or lower than 802.11ac VHT20 and VHT40.

The following test modes were performed for all tests:

For Radiated Emission test (Above 1GHz):

The EUT was performed at Y axis and Z axis position for Radiated emission above 1GHz test, and the worst case was found at Y axis. So the measurement will follow this same test configuration.

Mode 1: CTX - Y axis

For Co-location MPE Test:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to FA: 580626-01) tests is added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

Note: The PoE is for measurement only, would not be marketed.

The PoE information as below:

Power	Brand	Model
PoE	PowerDsine	7001G

3.6. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
TEL:	886-3-656-9065				
FAX:	886-3-656-9085				
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	262045	IC 4086D	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Class II Change

This product is an extension of original one reported under Sporton project number: FR580626AB.

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
Add Band 2 and Band 3 (5250~5350 MHz, 5470~5725 MHz) for this device.	26dB Spectrum Bandwidth and 99% Occupied Bandwidth 6dB Spectrum Bandwidth Measurement - Maximum Conducted Output Power - Power Spectral Density - Radiated Emissions (Above 1GHz) - Band Edge Emissions - Frequency Stability

3.8. Table for Supporting Units

For Test Site No: 03CH01-CB (Above 1GHz) and TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E4300	DoC
PoE	PowerDsine	7001G	N/A

3.9. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Test Software Version	ART2-GUI Version 2.3						
Mode	Test Frequency (MHz)						
	NCB: 20MHz						
	5260 MHz	5300 MHz	5320 MHz	5500 MHz	5580 MHz	5700 MHz	5720MHz
802.11a	22	22	21.5	20.5	20.5	18.5	20
802.11ac MCS0/Nss1 VHT20	22	22.5	22	20	20.5	17.5	20.5
Mode	NCB: 40MHz						
802.11ac MCS0/Nss1 VHT40	5270 MHz	5310 MHz	5510 MHz	5550 MHz	5670 MHz	5710MHz	
	23	18.5	16.5	22.5	19	25	
Mode	NCB: 80MHz						
802.11ac MCS0/Nss1 VHT80	5290 MHz		5530 MHz		5610 MHz		5690 MHz
	15.5		13.5		13		23.5

3.10. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


3.11. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11a	2.017	2.086	96.69%	0.15	0.50
802.11ac MCS0/Nss1 VHT20	1.620	1.953	82.95%	0.81	0.62
802.11ac MCS0/Nss1 VHT40	0.876	1.005	87.16%	0.60	1.14
802.11ac MCS0/Nss1 VHT80	1.138	1.199	94.91%	0.23	0.88

3.12. Test Configurations

3.12.1. Radiation Emissions Test Configuration

Test Configuration: above 1GHz

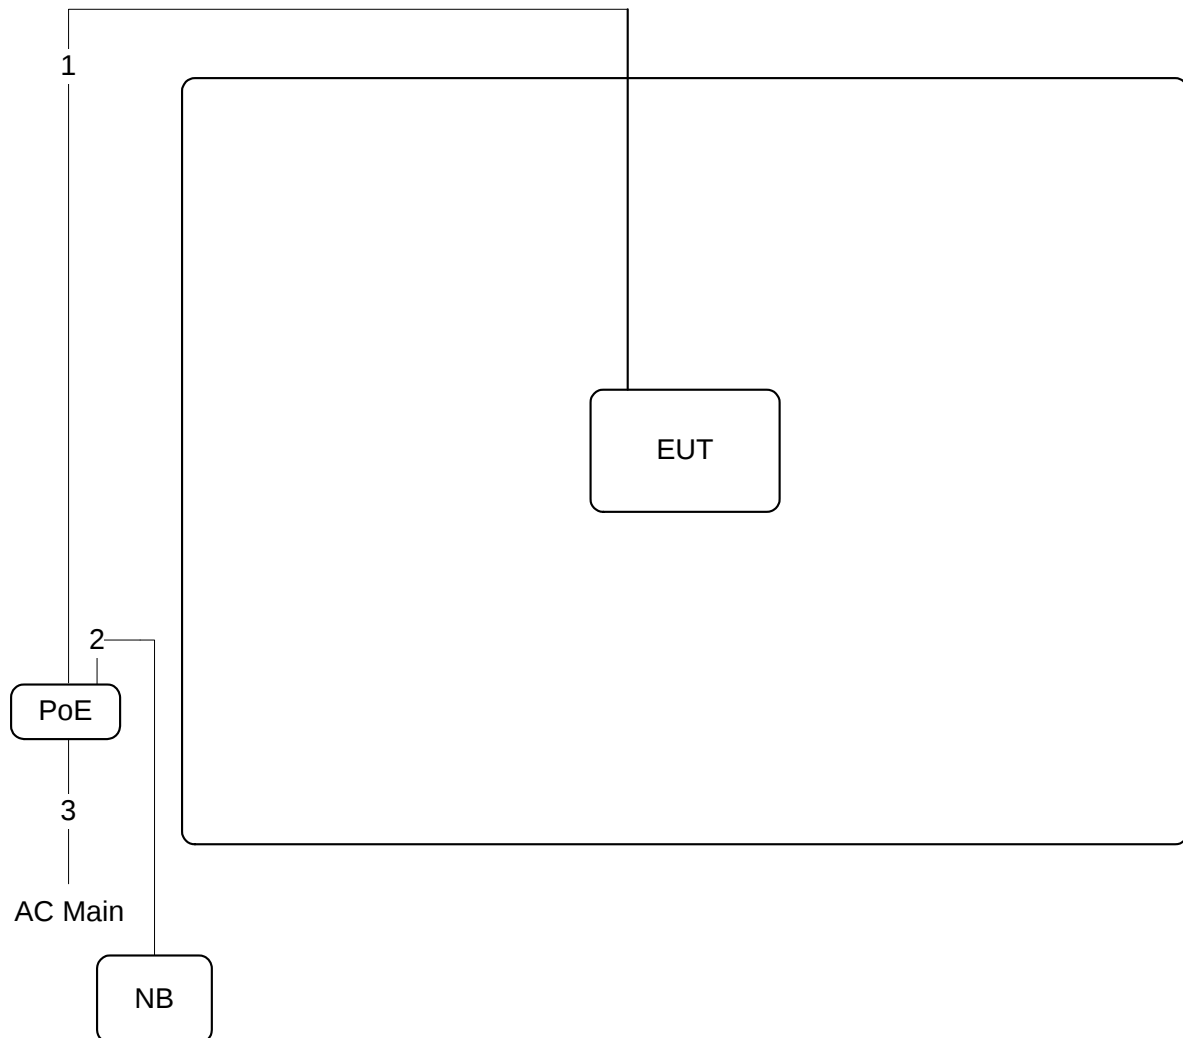

Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	RJ-45 cable	No	1.5m
3	Power cable	No	1.8m

4. TEST RESULT

4.1. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

4.1.1. Limit

No restriction limits.

4.1.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.1.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.1.4. Test Setup Layout

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.1.5. Test Deviation

There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.1.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth


Temperature	25°C	Humidity	45%
Test Engineer	Roki Liu		

Mode	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5260 MHz	31.91	18.76
	5300 MHz	31.30	18.32
	5320 MHz	30.96	17.02
	5500 MHz	31.30	18.15
	5580 MHz	32.00	19.62
	5700 MHz	22.52	16.41
802.11ac MCS0/Nss1 VHT20	5260 MHz	30.43	19.97
	5300 MHz	30.52	20.67
	5320 MHz	29.22	19.28
	5500 MHz	28.26	19.02
	5580 MHz	33.22	24.23
	5700 MHz	24.26	18.41
802.11ac MCS0/Nss1 VHT40	5270 MHz	83.04	40.09
	5310 MHz	46.23	37.77
	5510 MHz	46.23	37.63
	5550 MHz	87.25	45.88
	5670 MHz	47.54	38.06
802.11ac MCS0/Nss1 VHT80	5290 MHz	85.51	76.41
	5530 MHz	85.80	76.41
	5610 MHz	144.93	77.86

Straddle Channel


Mode	Frequency	26dB BW (MHz)	99% OBW (MHz)	26dB BW F1 (MHz)	99% OBW T1 (MHz)	UNII 2C 26dB BW (MHz)	UNII 3 26dB BW (MHz)	UNII 2C 99% BW (MHz)	UNII 3 99% BW (MHz)
802.11a	5720 MHz	35.65	18.58	5702.00	5710.97	23.00	12.65	14.03	4.55
802.11ac MCS0/Nss1 VHT20	5720 MHz	27.04	18.76	5705.91	5710.62	19.09	7.96	14.38	4.38
802.11ac MCS0/Nss1 VHT40	5710 MHz	84.35	43.56	5666.81	5688.44	58.19	26.16	36.56	7.00
802.11ac MCS0/Nss1 VHT80	5690 MHz	186.09	116.35	5602.17	5630.67	122.83	63.26	94.33	22.02

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5260 MHz

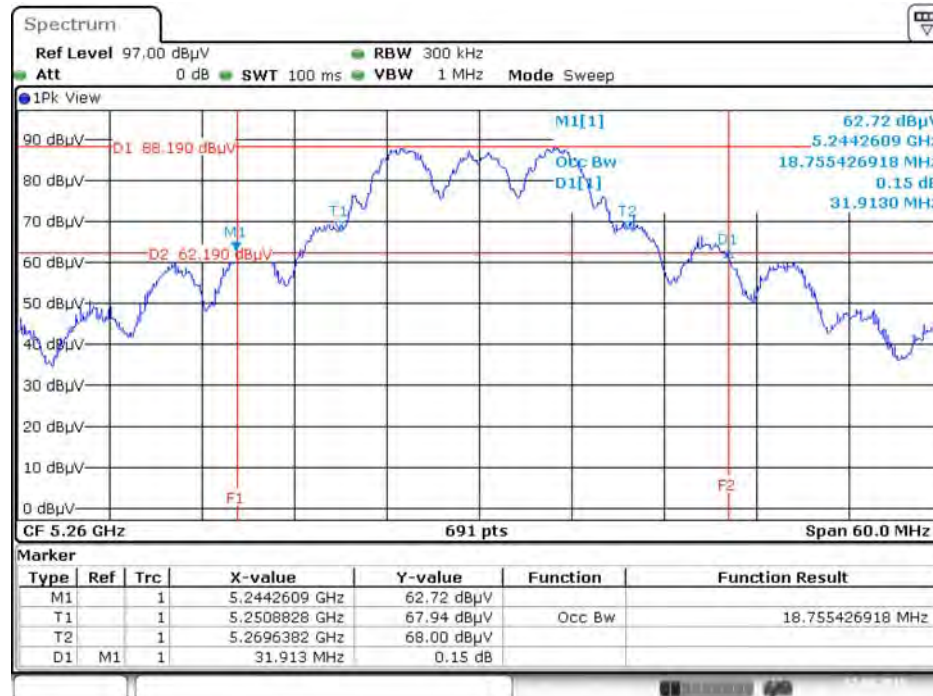


Date: 22.AUG.2015 09:16:22

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5300 MHz

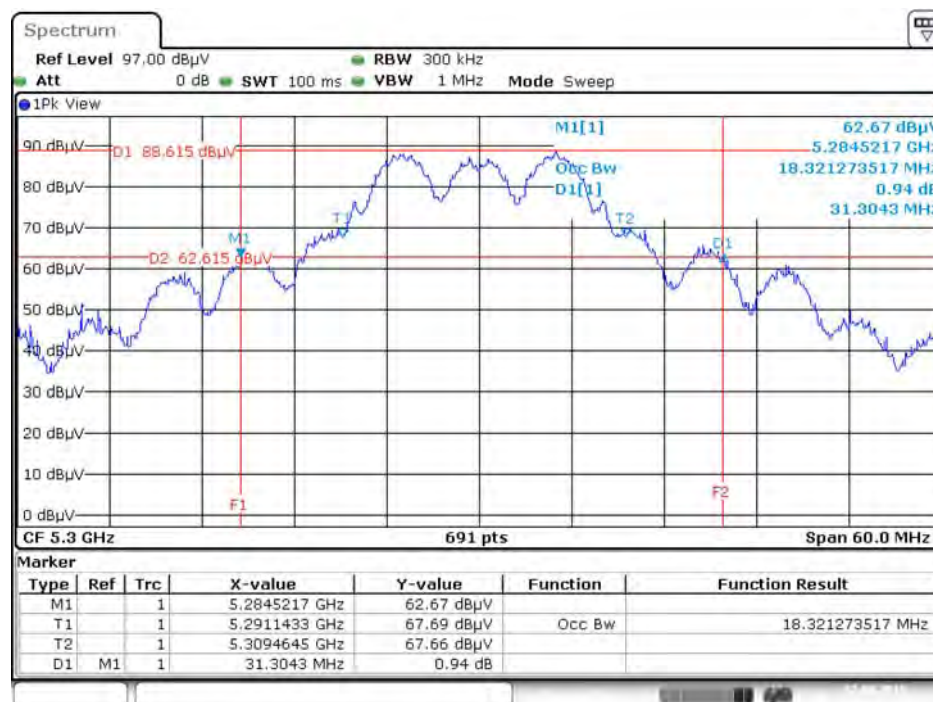


Date: 22.AUG.2015 09:17:08

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5320 MHz

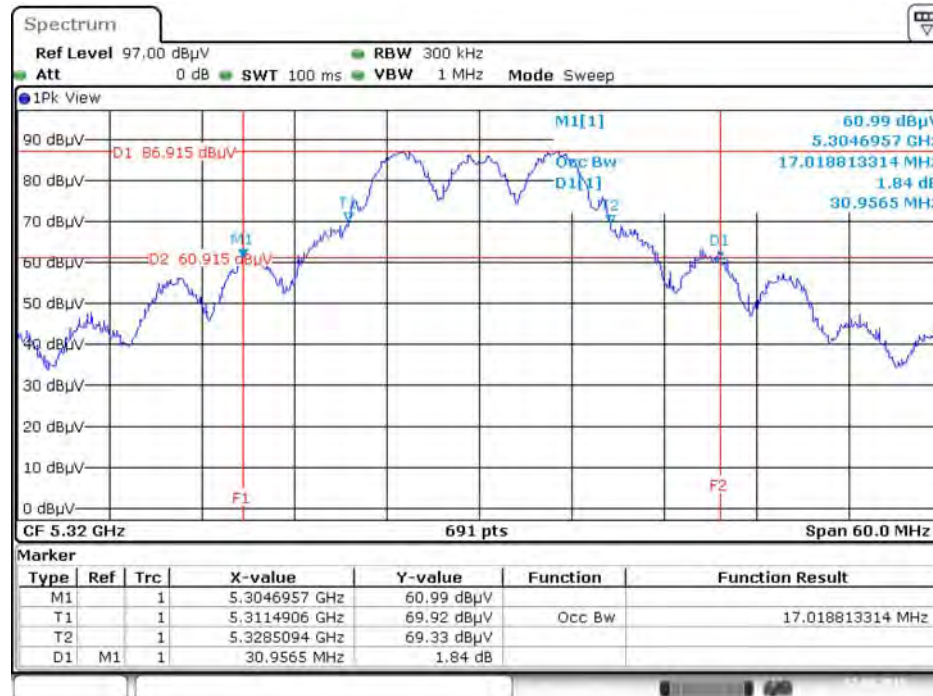


Date: 22.AUG.2015 09:19:03

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5500 MHz

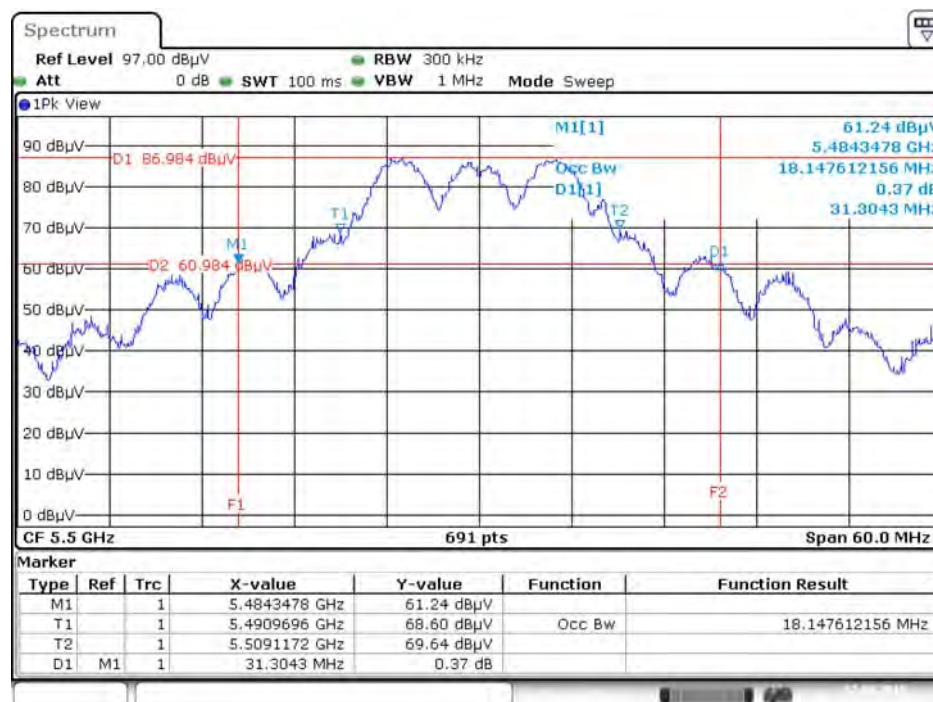


Date: 22.AUG.2015 09:20:12

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5580 MHz

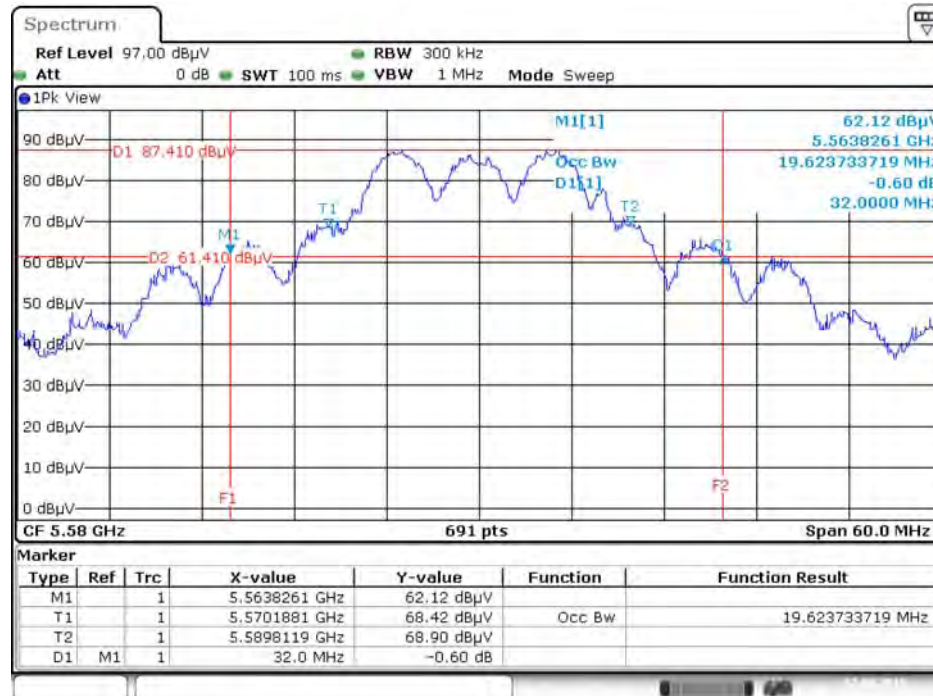


Date: 22.AUG.2015 09:21:29

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5700 MHz

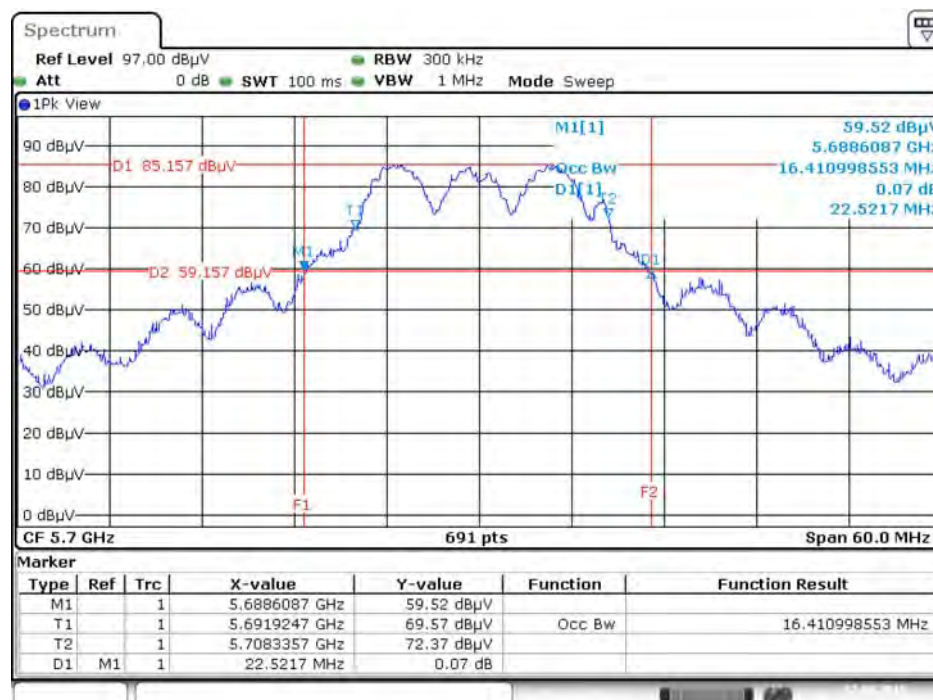


Date: 22.AUG.2015 09:22:37

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 /
Ant. 1 + Ant. 2 / 5260 MHz

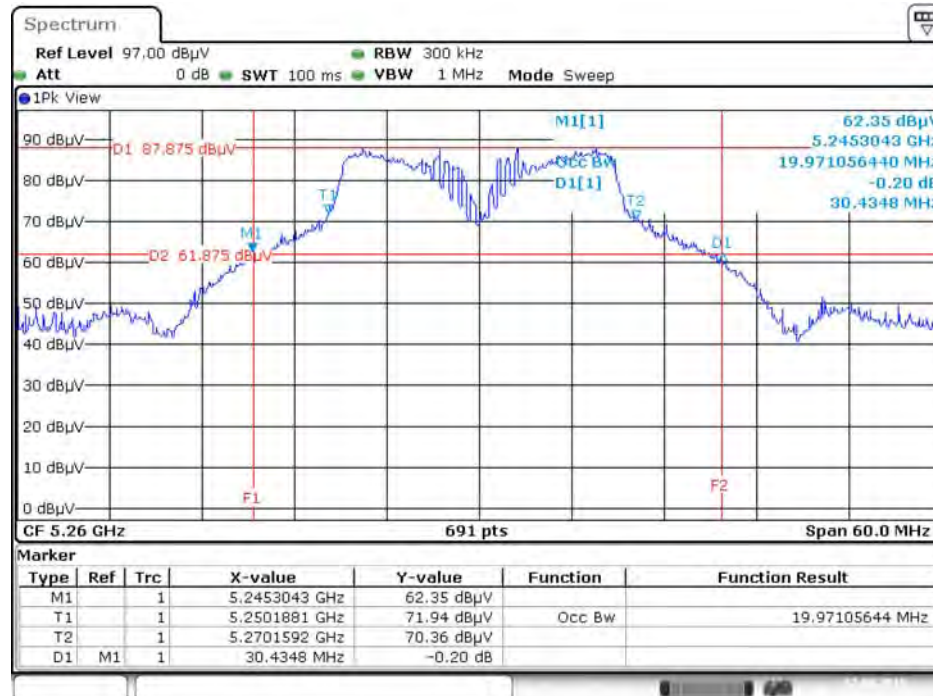


Date: 22.AUG.2015 09:30:09

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 /
Ant. 1 + Ant. 2 / 5300 MHz

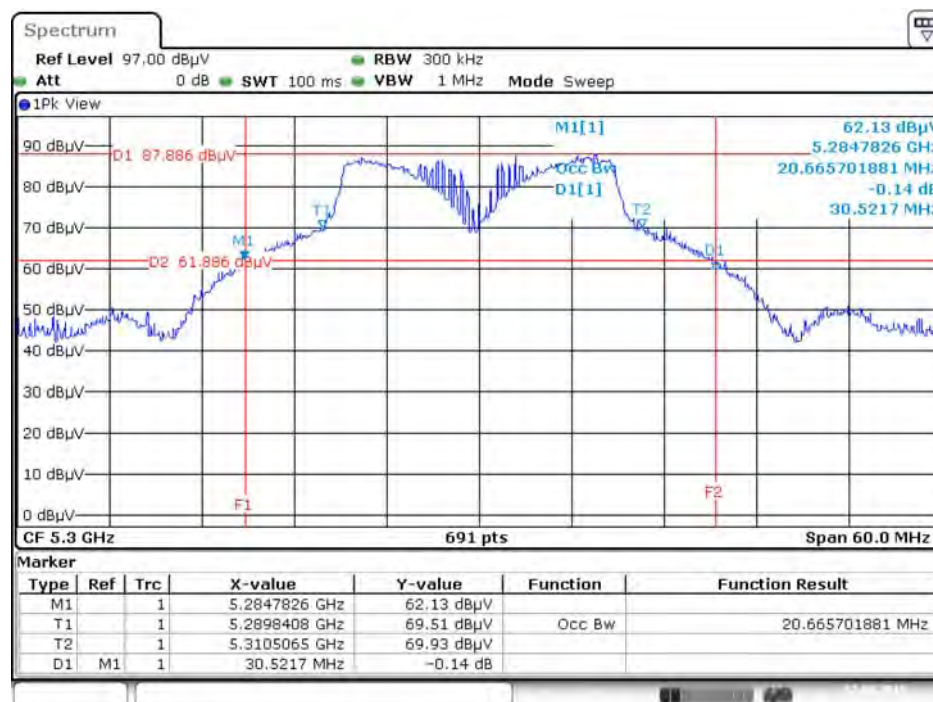


Date: 22.AUG.2015 09:42:47

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 /
Ant. 1 + Ant. 2 / 5320 MHz

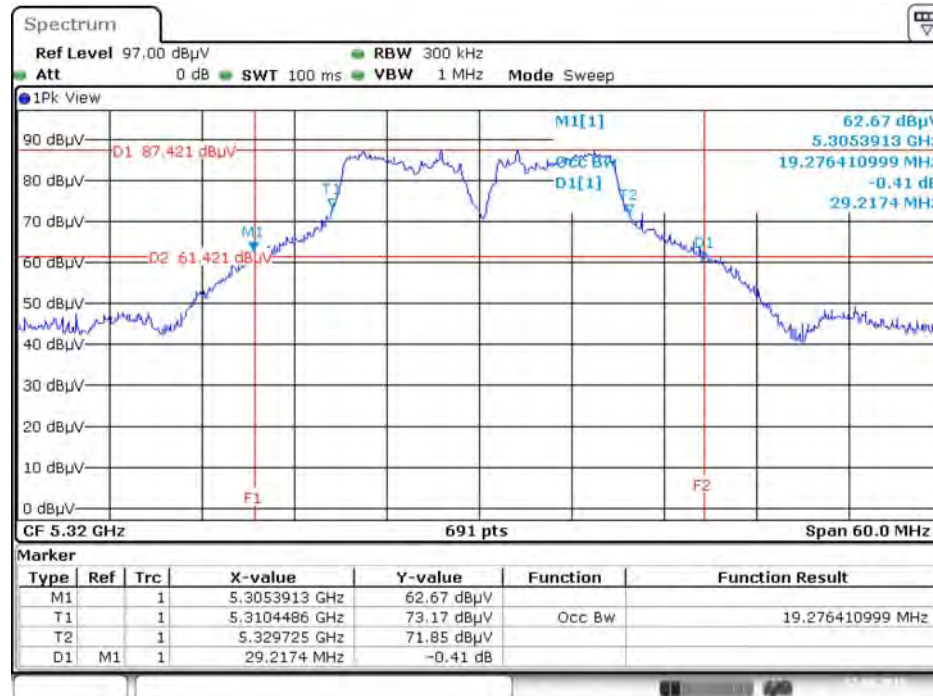


Date: 22.AUG.2015 09:54:26

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 /
Ant. 1 + Ant. 2 / 5500 MHz

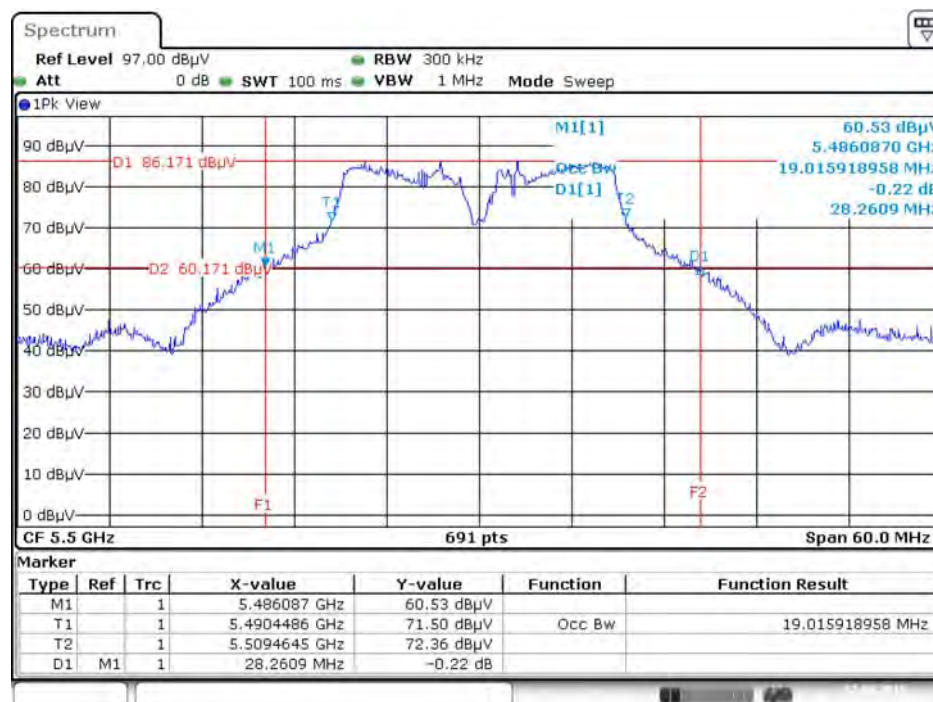


Date: 22.AUG.2015 09:52:33

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 /
Ant. 1 + Ant. 2 / 5580 MHz

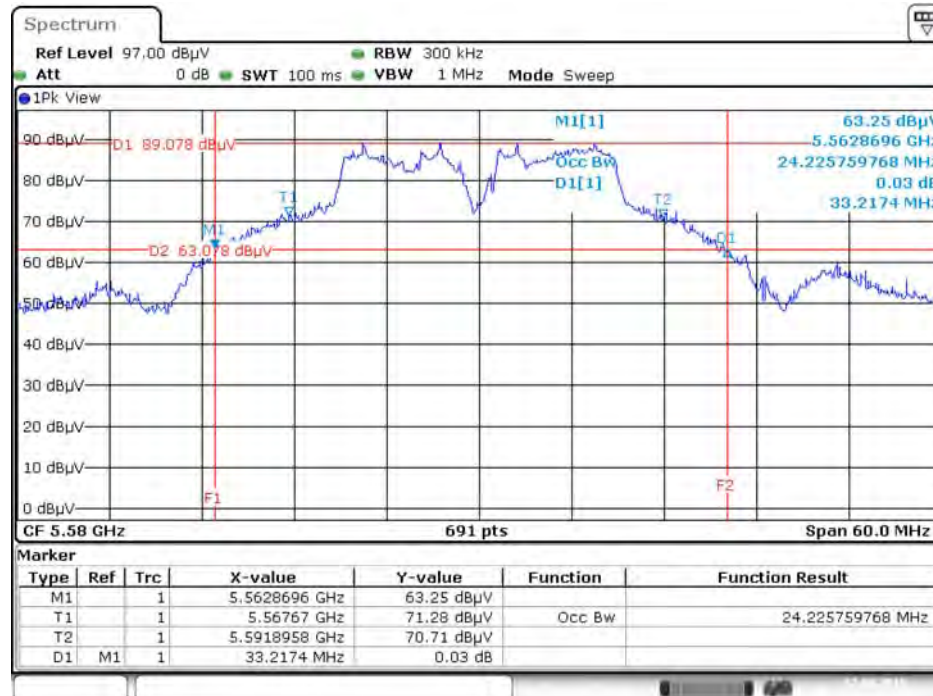


Date: 22.AUG.2015 09:56:17

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 /
Ant. 1 + Ant. 2 / 5700 MHz

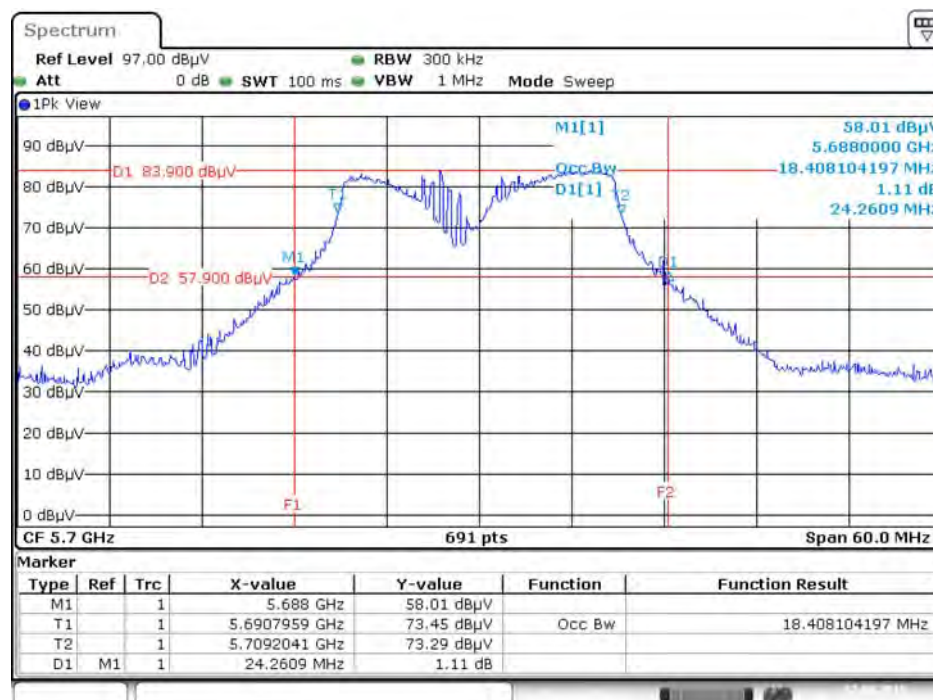


Date: 22.AUG.2015 09:57:28

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 /
Ant. 1 + Ant. 2 / 5270 MHz

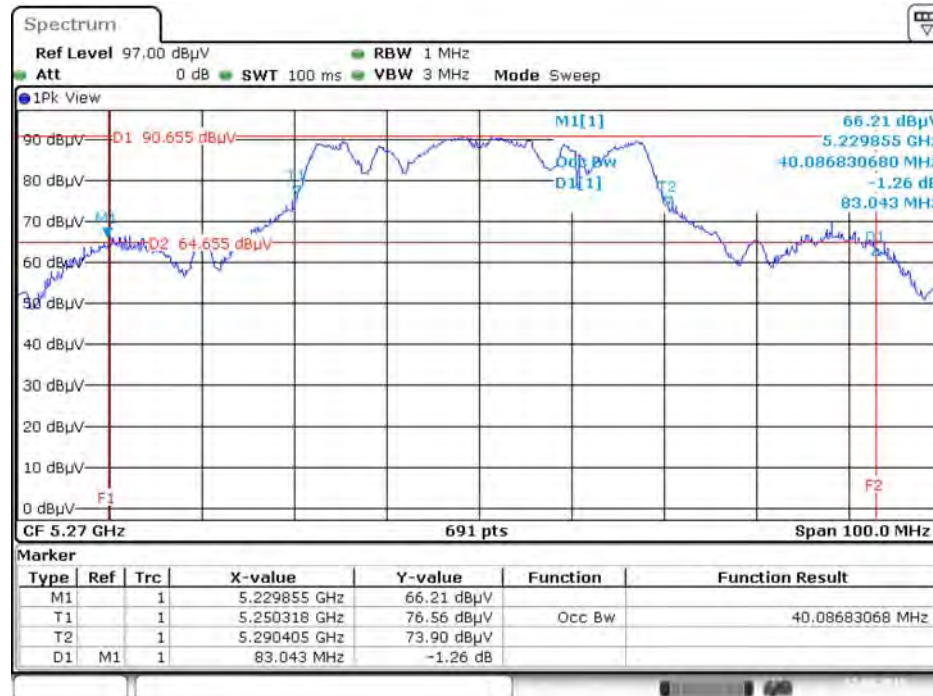


Date: 22.AUG.2015 10:13:50

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 /
Ant. 1 + Ant. 2 / 5310 MHz

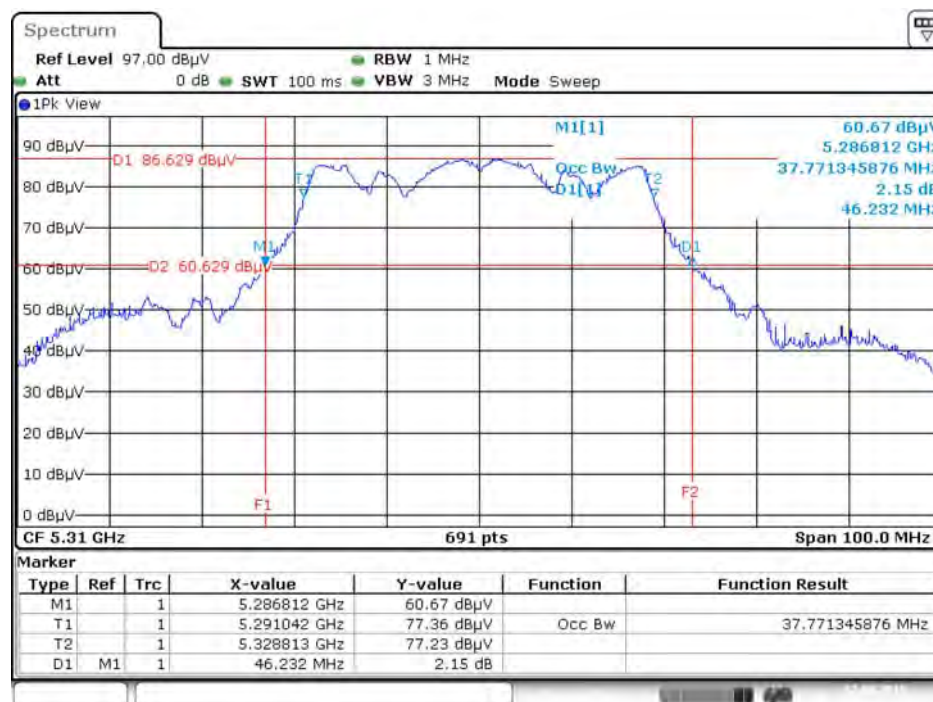


Date: 22.AUG.2015 10:14:59

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 /
Ant. 1 + Ant. 2 / 5510 MHz

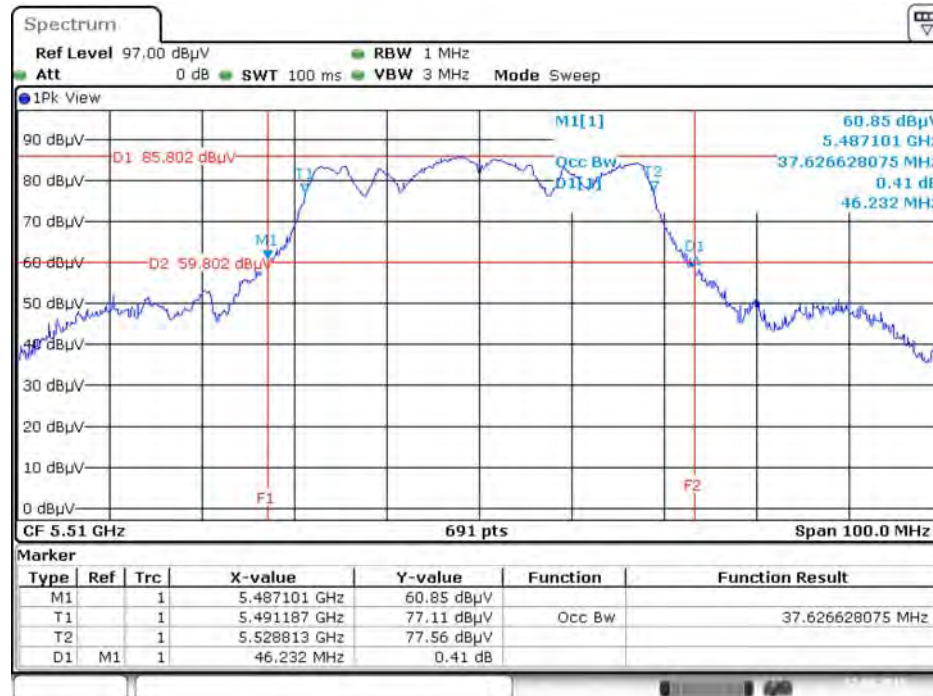


Date: 22.AUG.2015 10:15:57

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 /
Ant. 1 + Ant. 2 / 5550 MHz

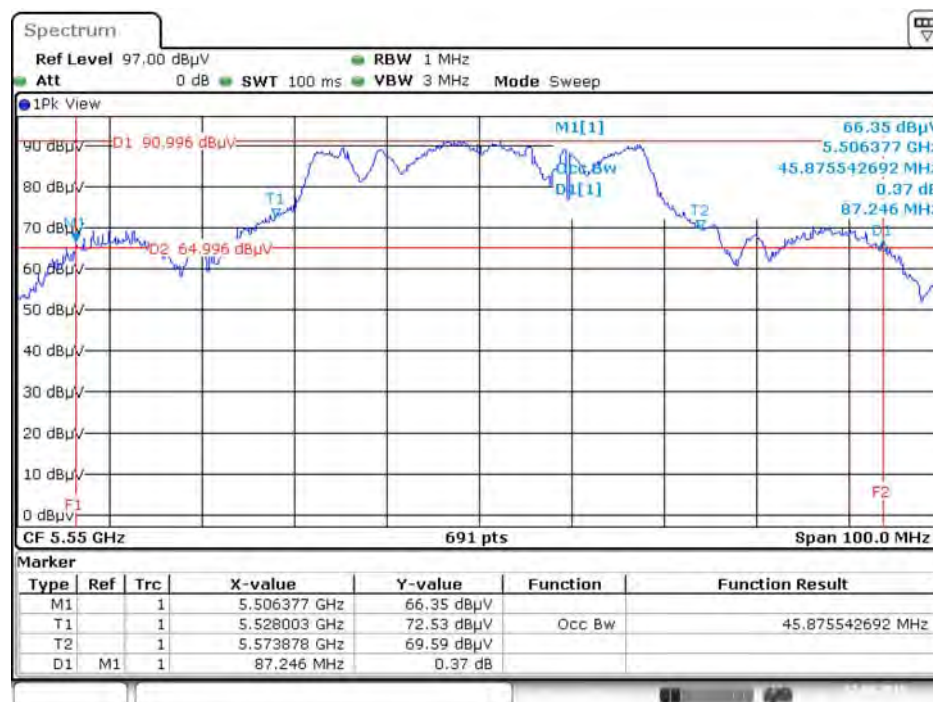


Date: 22.AUG.2015 10:17:08

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 /
Ant. 1 + Ant. 2 / 5670 MHz

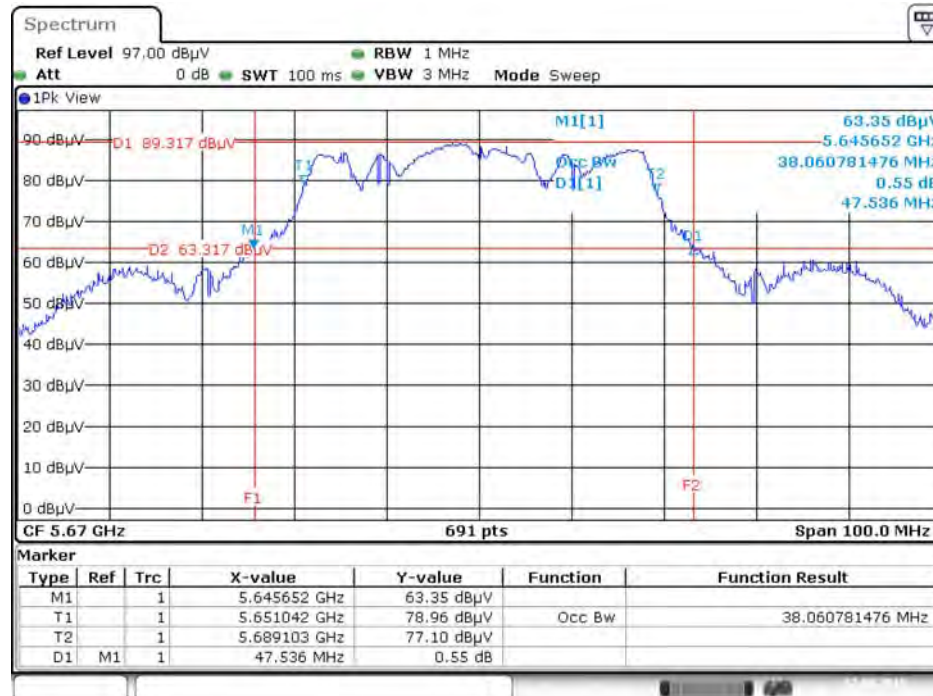


Date: 22.AUG.2015 10:18:25

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 /
Ant. 1 + Ant. 2 / 5290 MHz

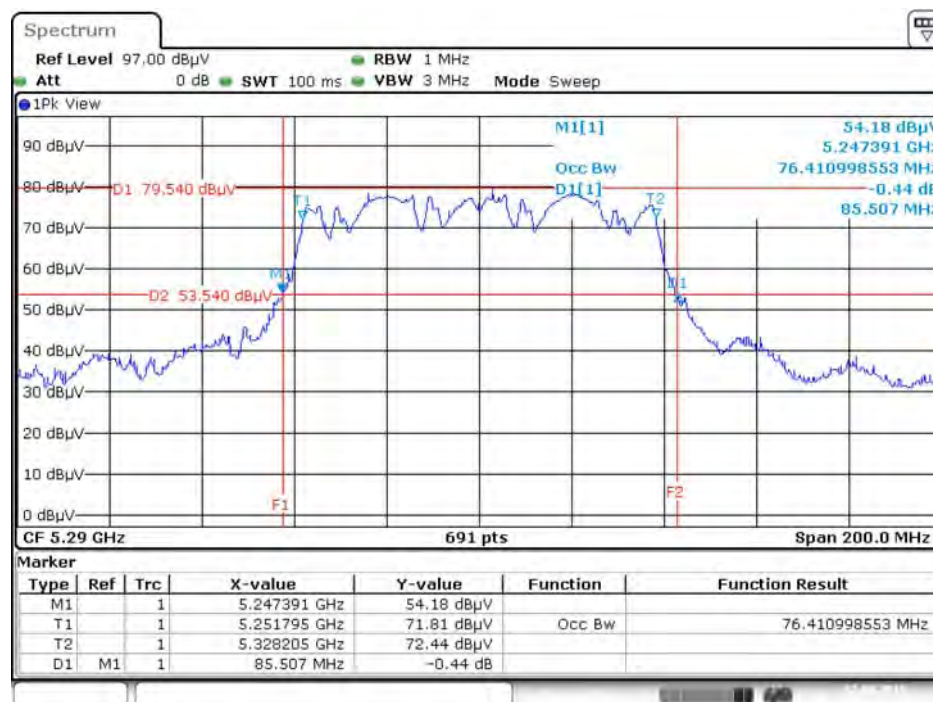


Date: 22.AUG.2015 10:41:52

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 /
Ant. 1 + Ant. 2 / 5530 MHz

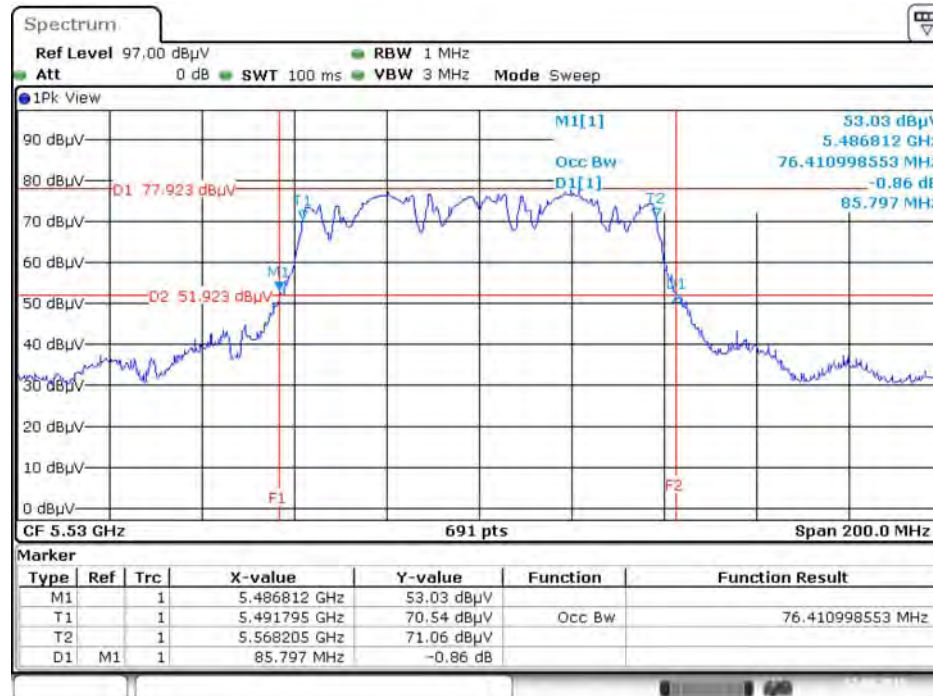

Date: 22.AUG.2015 10:42:50


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 /
Ant. 1 + Ant. 2 / 5610 MHz

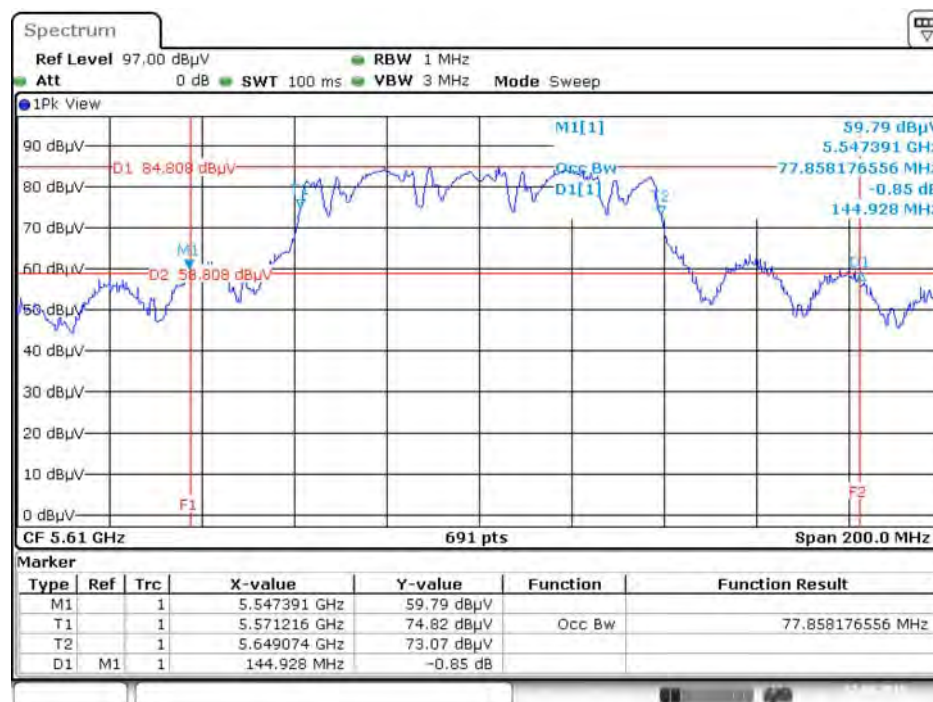

Date: 22.AUG.2015 10:44:35


Straddle Channel

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5720 MHz

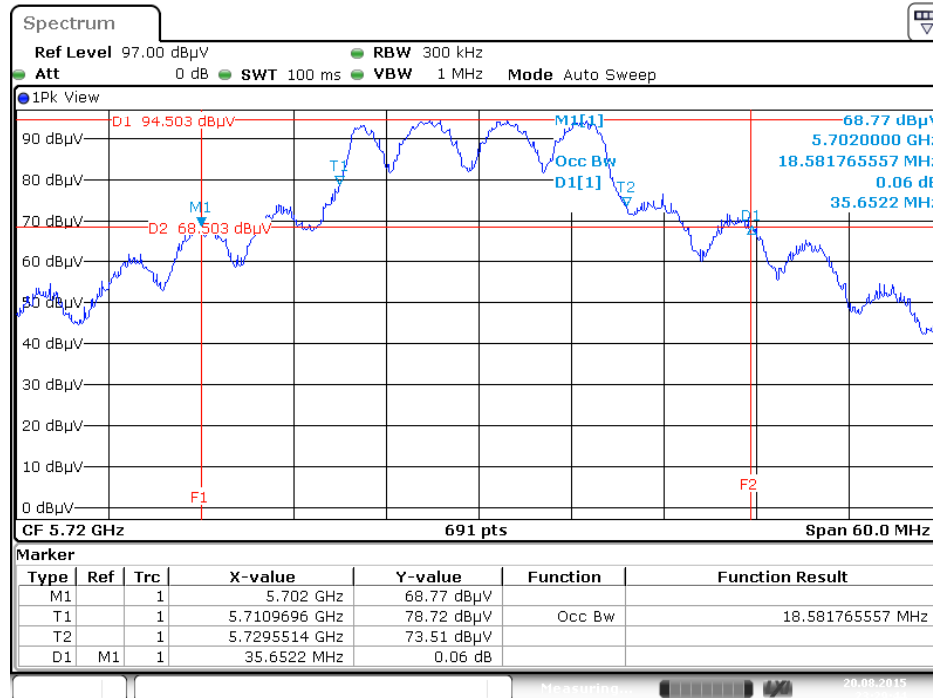


Date: 20 AUG .2015 23:29:44

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 / 5720 MHz

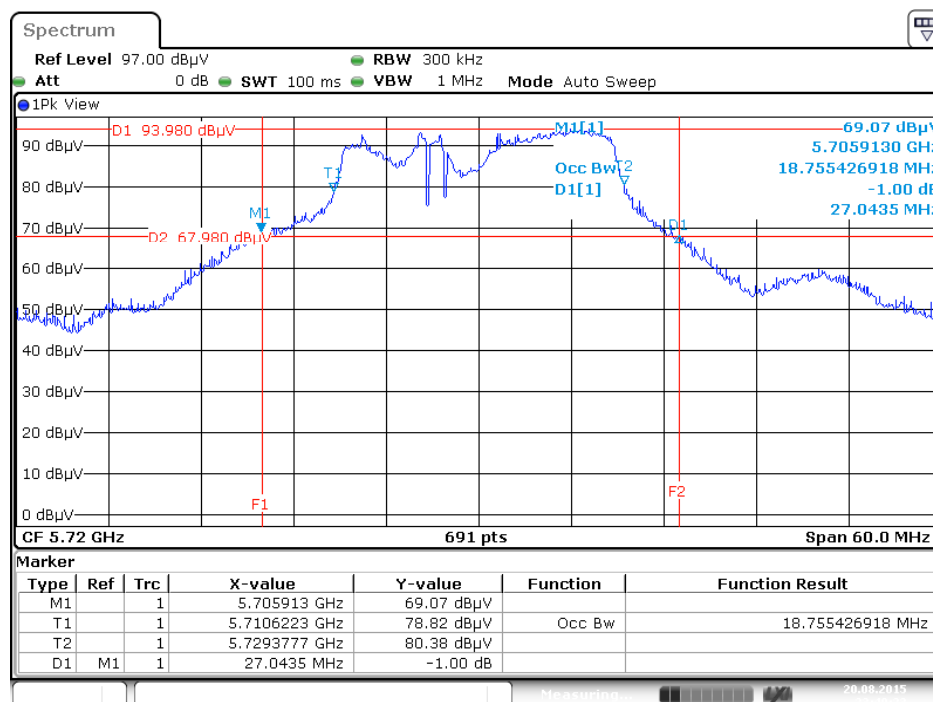


Date: 20 AUG .2015 23:40:23

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 /
Ant. 1 + Ant. 2 / 5710 MHz

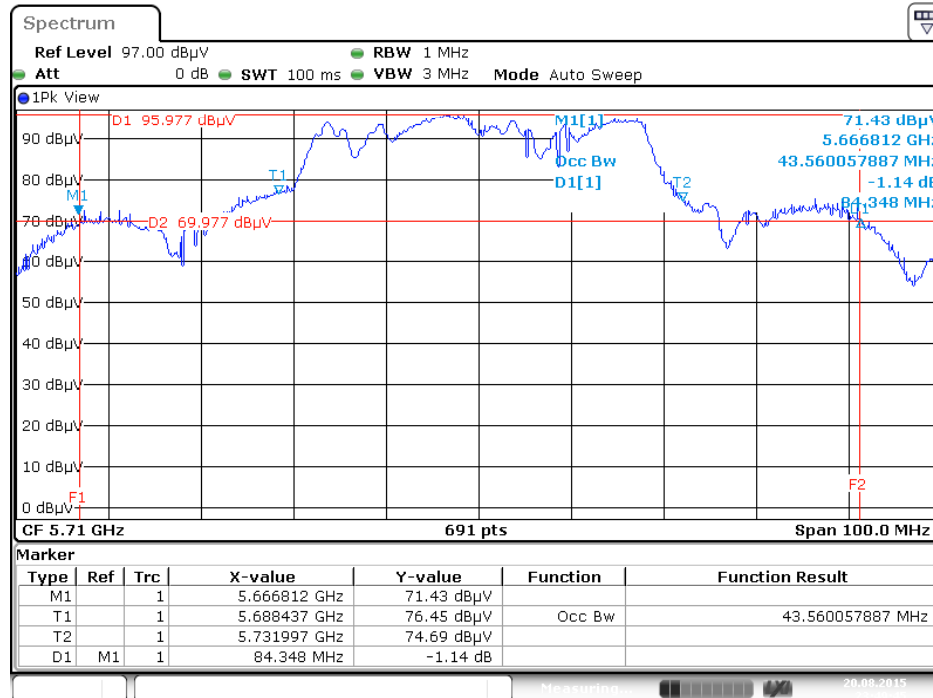

Date: 20 AUG .2015 23:49:46

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 /
Ant. 1 + Ant. 2 / 5690 MHz

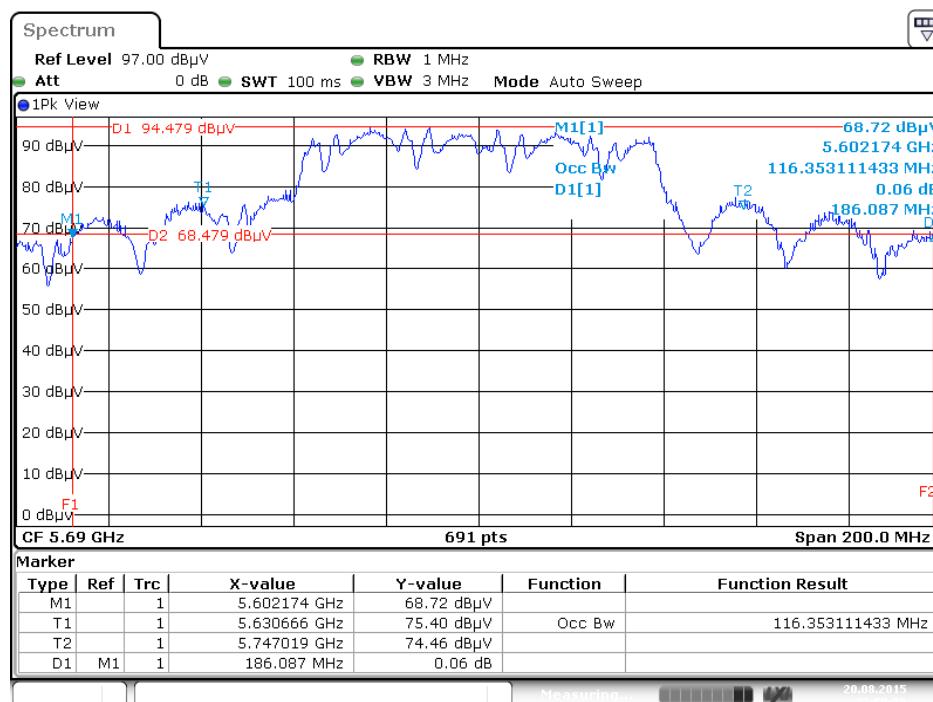

Date: 20 AUG .2015 23:59:50

4.2. 6dB Spectrum Bandwidth Measurement

4.2.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.2.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (C) Emission Bandwidth.
3. Multiple antenna system was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.2.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of 6dB Spectrum Bandwidth


Temperature	25°C	Humidity	45%
Test Engineer	Roki Liu		

Straddle Channel

Mode	Frequency	6dB BW (MHz)	6dB BW M1 (MHz)	UNII 3 BW (MHz)	Min. Limit (kHz)	Test Result
802.11a	5720 MHz	16.06	5712.06	3.12	500	Complies
802.11ac MCS0/Nss1 VHT20	5720 MHz	16.93	5711.19	3.12	500	Complies
802.11ac MCS0/Nss1 VHT40	5710 MHz	35.13	5692.38	2.51	500	Complies
802.11ac MCS0/Nss1 VHT80	5690 MHz	75.07	5653.32	3.39	500	Complies


Straddle Channel

6 dB Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5720 MHz

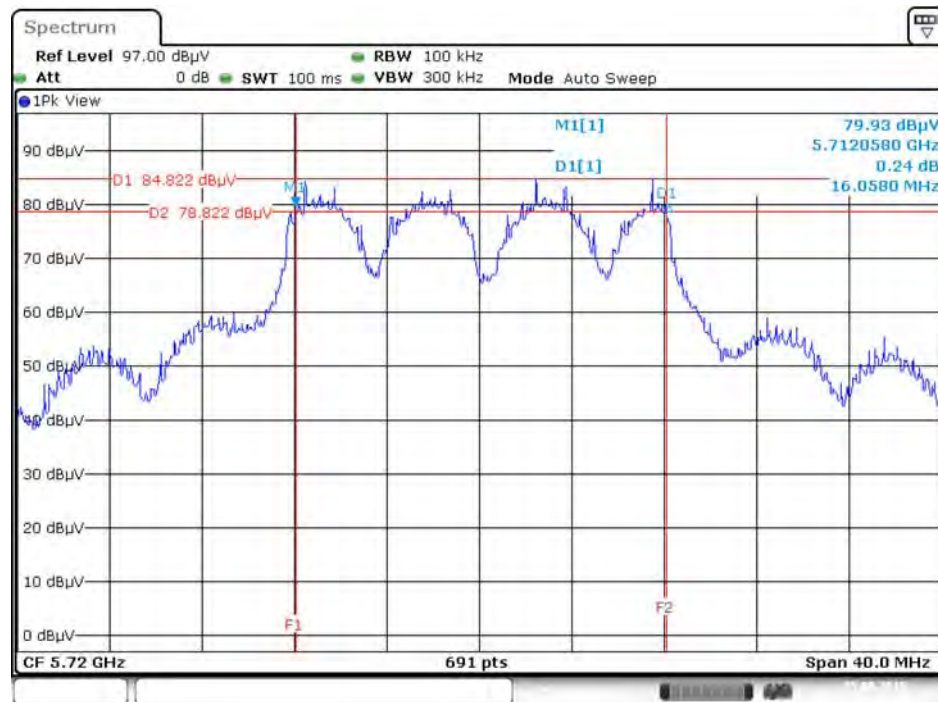


Date: 25.AUG.2015 10:01:11

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 / 5720 MHz

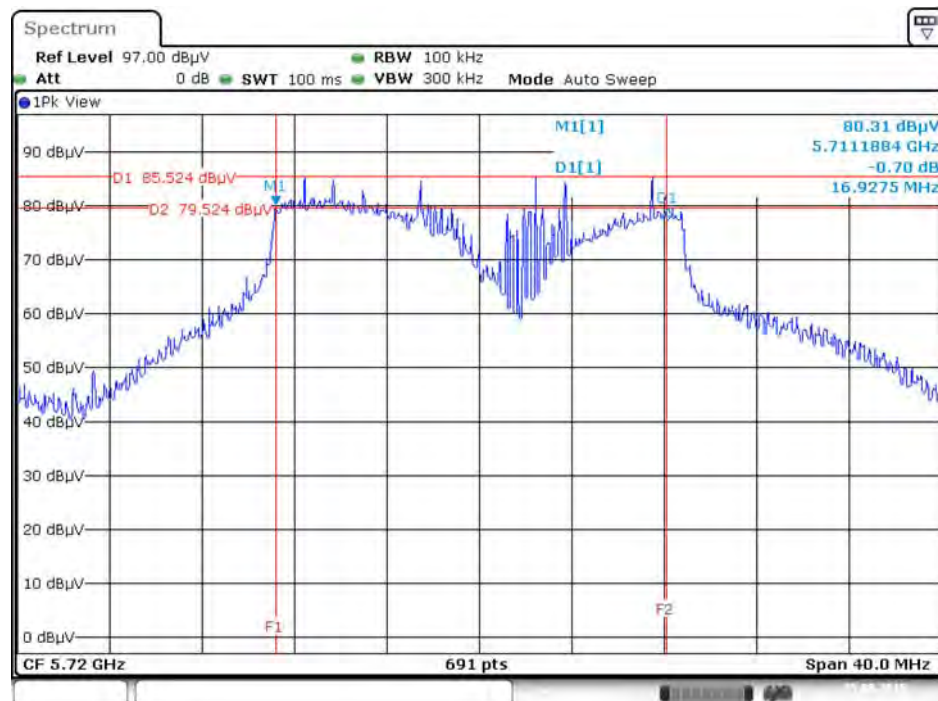


Date: 25.AUG.2015 10:01:41

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 / 5710 MHz

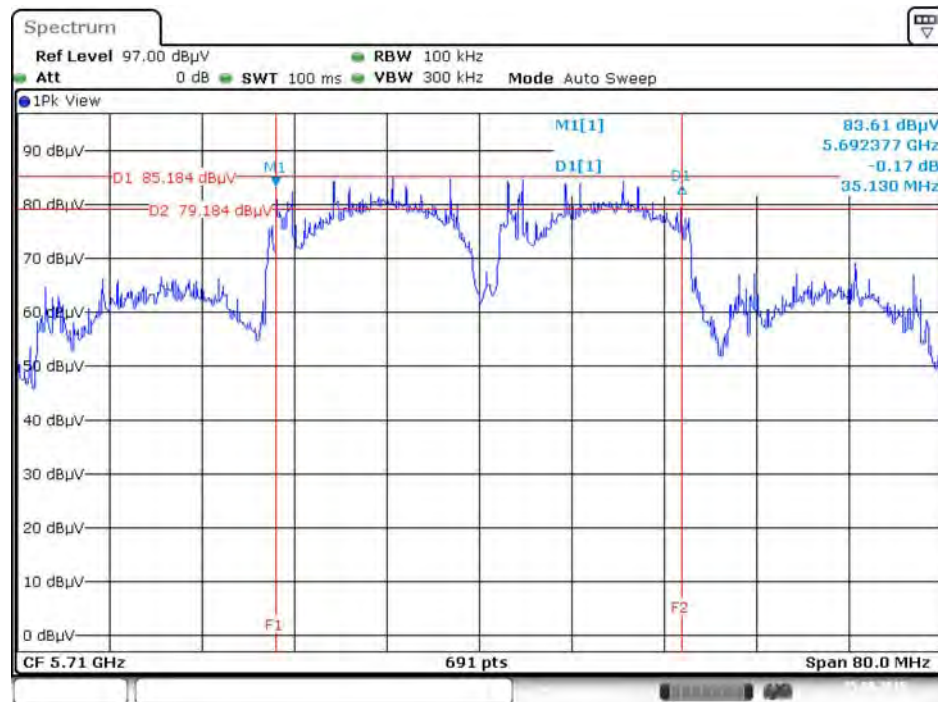

Date: 25.AUG.2015 10:00:25

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 / 5690 MHz

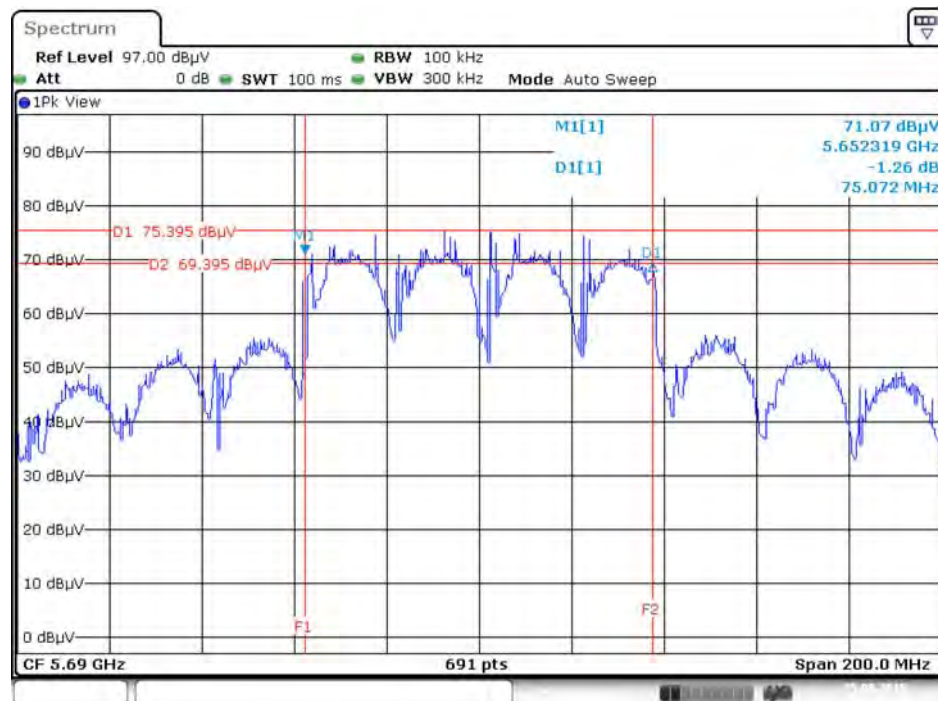

Date: 25.AUG.2015 10:09:02

4.3. Maximum Conducted Output Power Measurement

4.3.1. Limit

Frequency Band		Limit
☒	5.25-5.35 GHz	The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW (24dBm) or 11 dBm $10 \log B$, where B is the 26 dB emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
☒	5.470-5.725 GHz	

4.3.2. Measuring Instruments and Setting

For other channel:

Please refer to section 5 of equipments list in this report The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

For straddle channel:

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	Average Sweep count 100
Sweep Time	Auto

4.3.3. Test Procedures

For other channel:


1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (E) Maximum conducted output power =>3. Measurement using a Power Meter (PM) =>b) Method PM-G (Measurement using a gated RF average power meter).
3. Multiple antenna systems was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

For straddle channel:


1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Test was performed in accordance with FCC Public Notice DA 02-2138, August 30, 2002.

4.3.4. Test Setup Layout

For other channel:

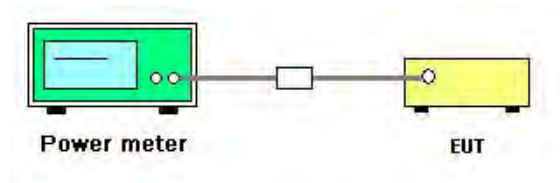

For straddle channel:

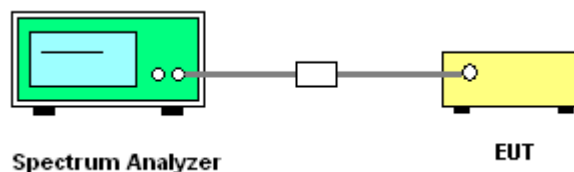

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	45%
Test Engineer	Roki Liu	Test Date	Aug. 20, 2015 ~ Aug. 25, 2015

Mode	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Total		
802.11a	5260 MHz	20.85	20.83	23.85	24.00	Complies
	5300 MHz	20.76	20.63	23.71	24.00	Complies
	5320 MHz	20.24	20.16	23.21	24.00	Complies
	5500 MHz	19.49	19.76	22.64	24.00	Complies
	5580 MHz	19.98	19.72	22.86	24.00	Complies
	5700 MHz	18.23	18.50	21.38	24.00	Complies
802.11ac MCS0/Nss1 VHT20	5260 MHz	20.55	21.03	23.81	24.00	Complies
	5300 MHz	20.72	21.08	23.91	24.00	Complies
	5320 MHz	20.60	20.21	23.42	24.00	Complies
	5500 MHz	19.06	19.61	22.35	24.00	Complies
	5580 MHz	20.09	19.62	22.87	24.00	Complies
	5700 MHz	17.27	17.32	20.31	24.00	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	20.67	20.79	23.74	24.00	Complies
	5310 MHz	17.49	16.74	20.14	24.00	Complies
	5510 MHz	15.46	15.68	18.58	24.00	Complies
	5550 MHz	20.07	20.45	23.27	24.00	Complies
	5670 MHz	18.34	18.49	21.43	24.00	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	14.07	13.62	16.86	24.00	Complies
	5530 MHz	12.51	12.78	15.66	24.00	Complies
	5610 MHz	19.39	19.45	22.43	24.00	Complies

Straddle Channel


Mode	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Total		
802.11a	5720 MHz (UNII 2C)	16.82	17.39	20.12	24.00	Complies
	5720 MHz (UNII 3)	10.80	11.08	13.95	30.00	Complies
802.11ac MCS0/Nss1 VHT20	5720 MHz (UNII 2C)	16.79	17.70	20.28	23.81	Complies
	5720 MHz (UNII 3)	11.50	11.77	14.65	30.00	Complies
802.11ac MCS0/Nss1 VHT40	5710 MHz (UNII 2C)	19.47	20.02	22.76	24.00	Complies
	5710 MHz (UNII 3)	9.14	9.30	12.23	30.00	Complies
802.11ac MCS0/Nss1 VHT80	5690 MHz (UNII 2C)	19.35	20.08	22.74	24.00	Complies
	5690 MHz (UNII 3)	5.63	5.73	8.69	30.00	Complies

Note 1:

802.11ac MCS0/Nss1 VHT20: 5720MHz power limit=24dBm or $11 + 10\log(B)$; $11 + 10\log(19.09) = 23.81\text{dBm} < 24\text{dBm}$, so power limit=23.81dBm.


Straddle Channel

Conducted Output Power Plot on Configuration IEEE 802.11a / Ant. 1 / 5720 MHz (UNII 2C)

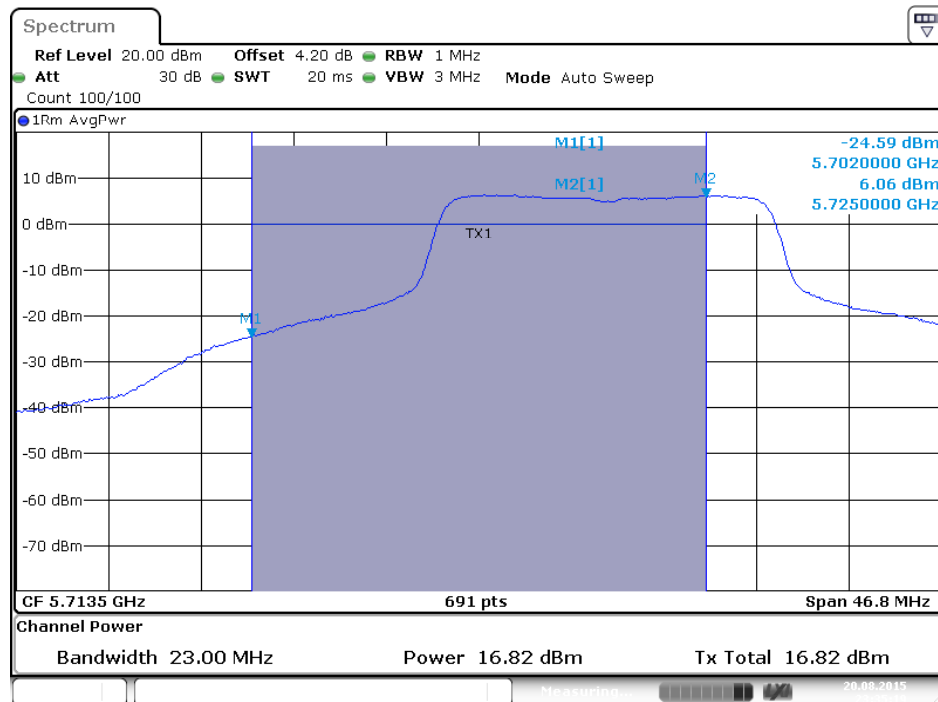


Date: 20 AUG. 2015 23:35:19

Conducted Output Power Plot on Configuration IEEE 802.11a / Ant. 2 / 5720 MHz (UNII 2C)

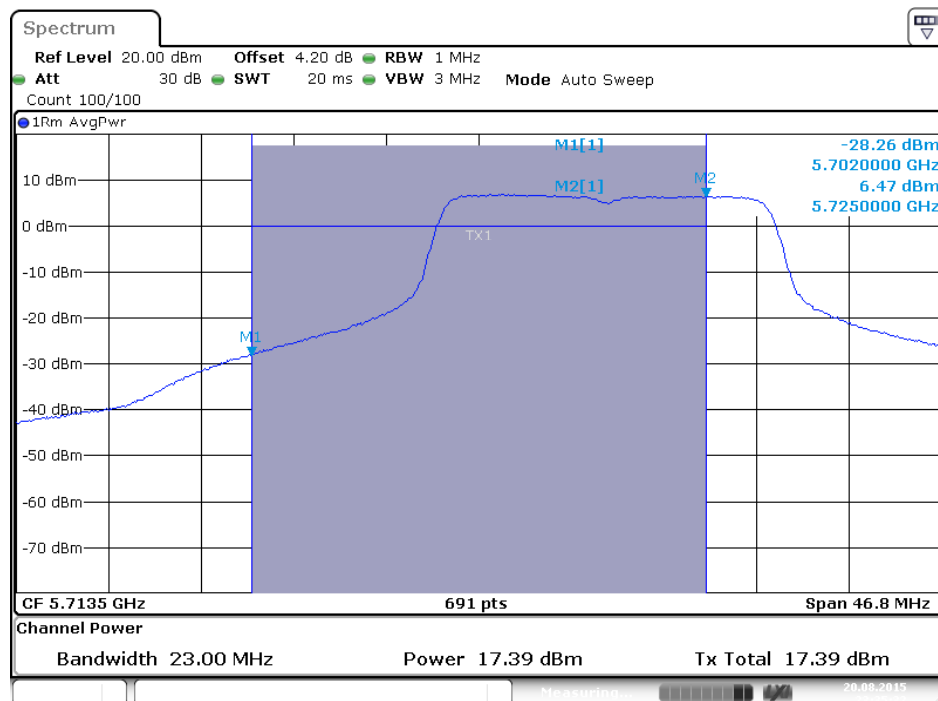


Date: 20 AUG. 2015 23:35:32

Conducted Output Power Plot on Configuration IEEE 802.11a / Ant. 1 / 5720 MHz (UNII 3)

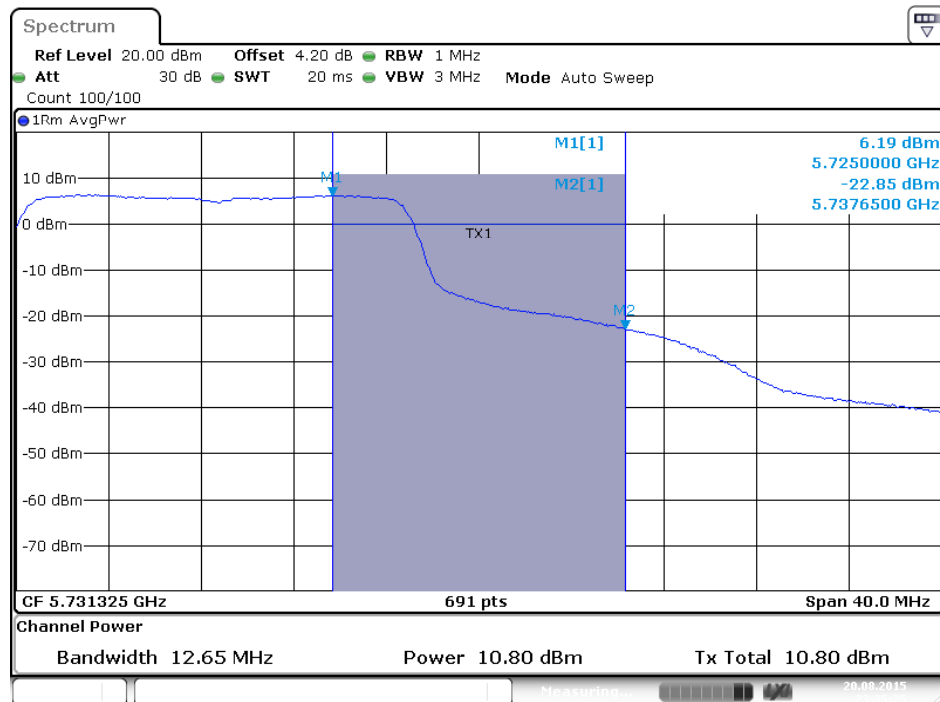


Date: 20 AUG .2015 23:35:25

Conducted Output Power Plot on Configuration IEEE 802.11a / Ant. 2 / 5720 MHz (UNII 3)

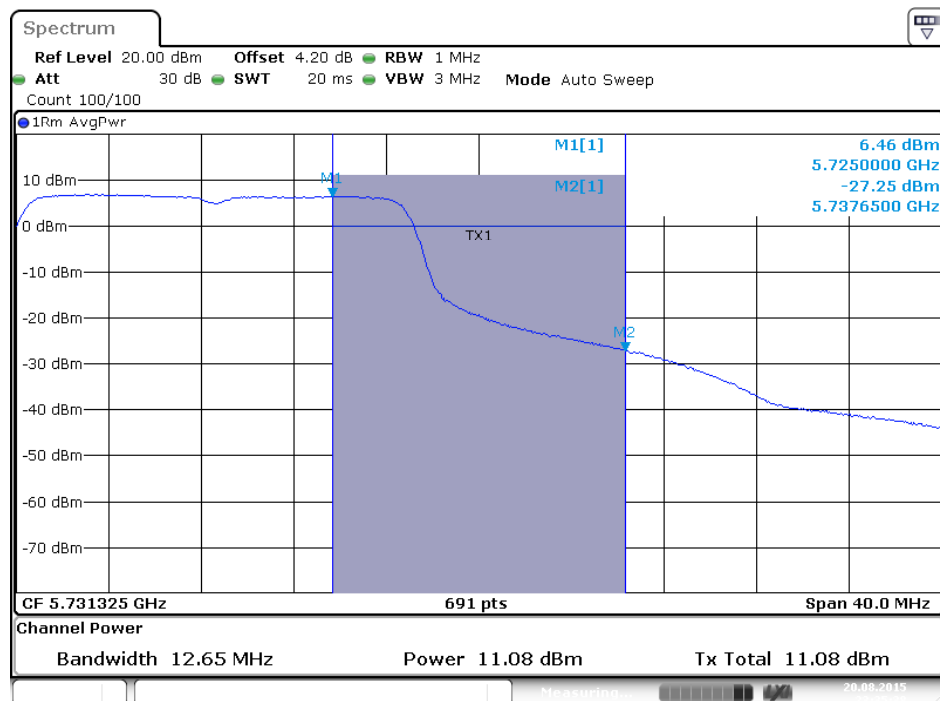


Date: 20 AUG .2015 23:35:38

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 / 5720 MHz (UNII 2C)

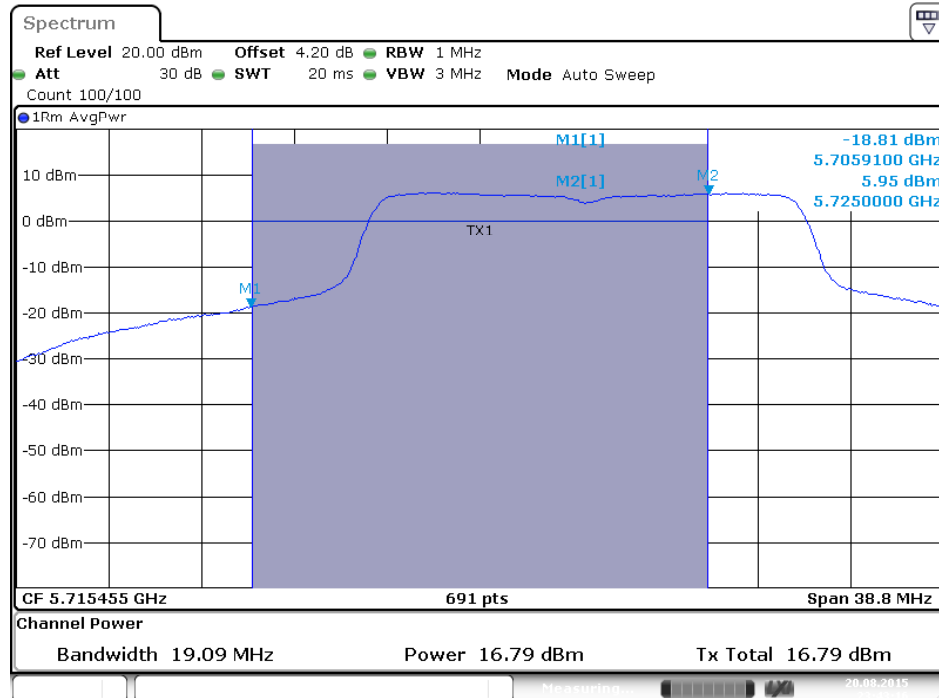


Date: 20 AUG 2015 23:43:16

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 2 / 5720 MHz (UNII 2C)

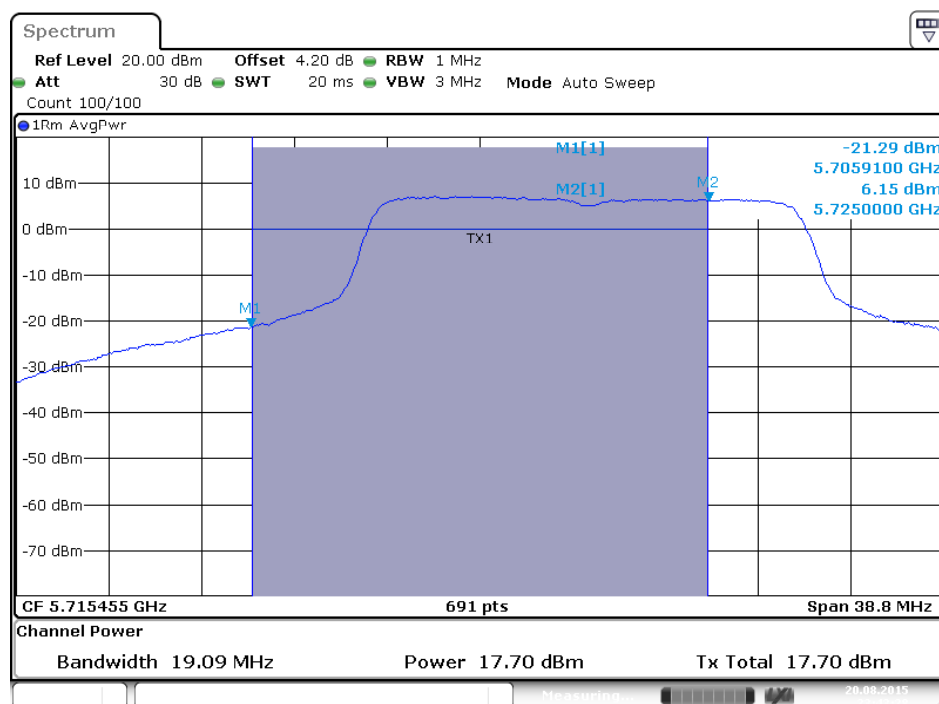


Date: 20 AUG 2015 23:43:29

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 / 5720 MHz (UNII 3)

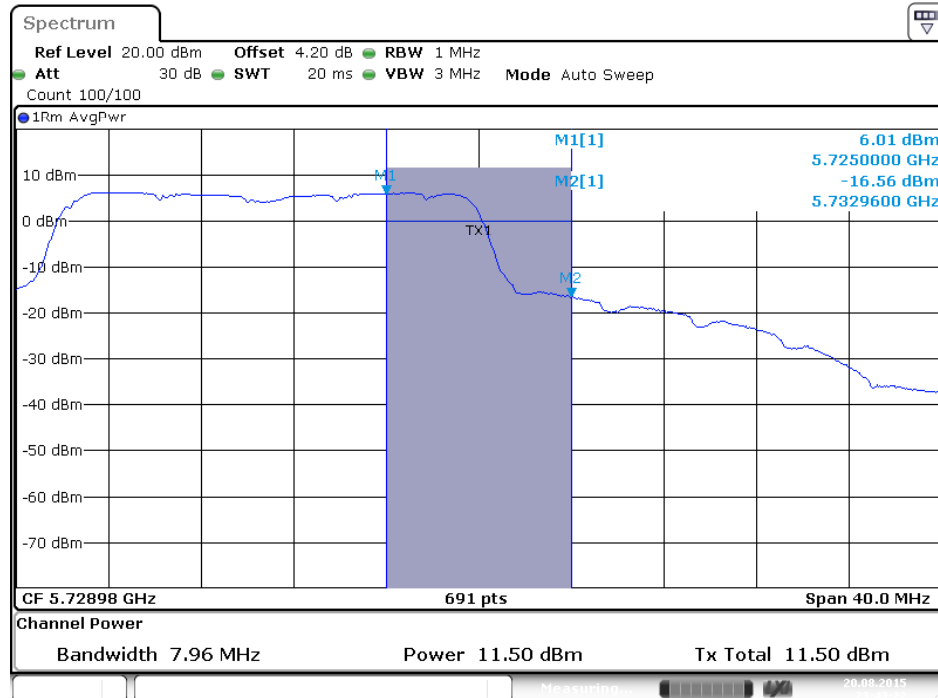


Date: 20 AUG .2015 23:43:22

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 2 / 5720 MHz (UNII 3)

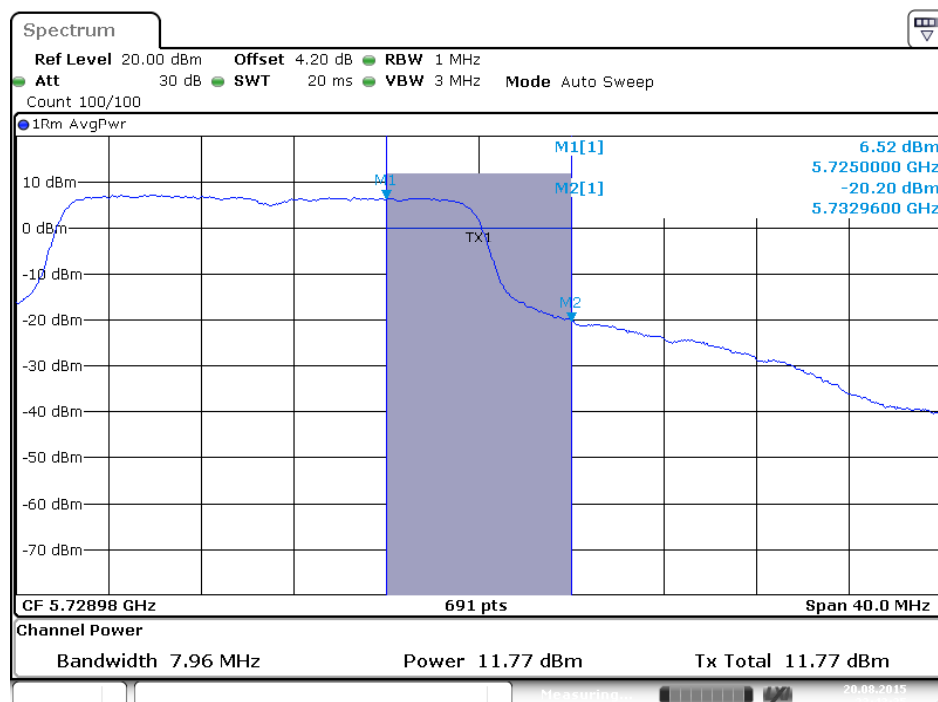


Date: 20 AUG .2015 23:43:35

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 / 5710 MHz (UNII 2C)

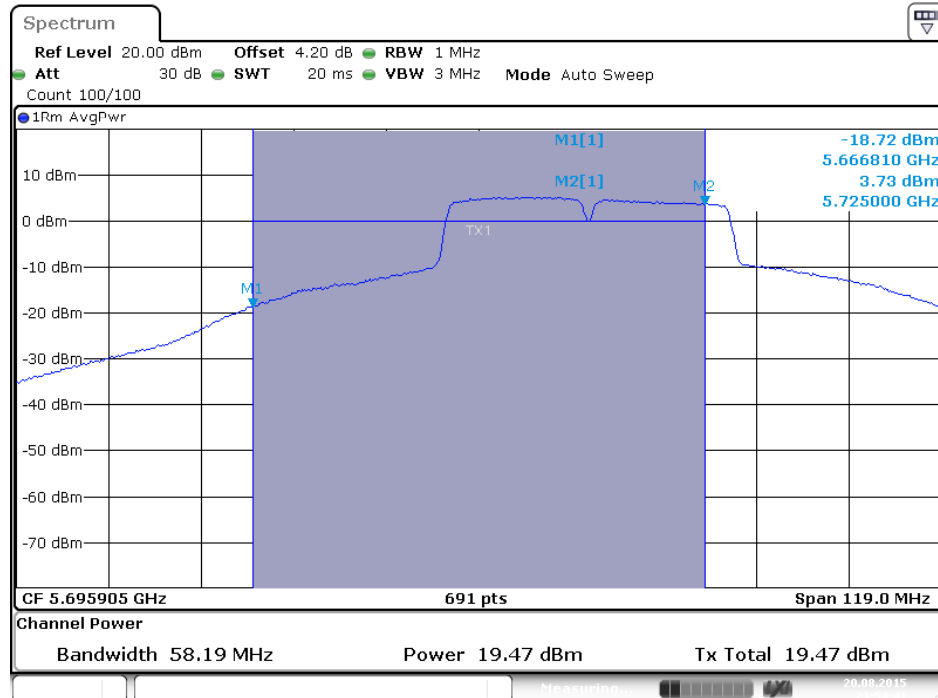


Date: 20 AUG .2015 23:54:40

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 2 / 5710 MHz (UNII 2C)

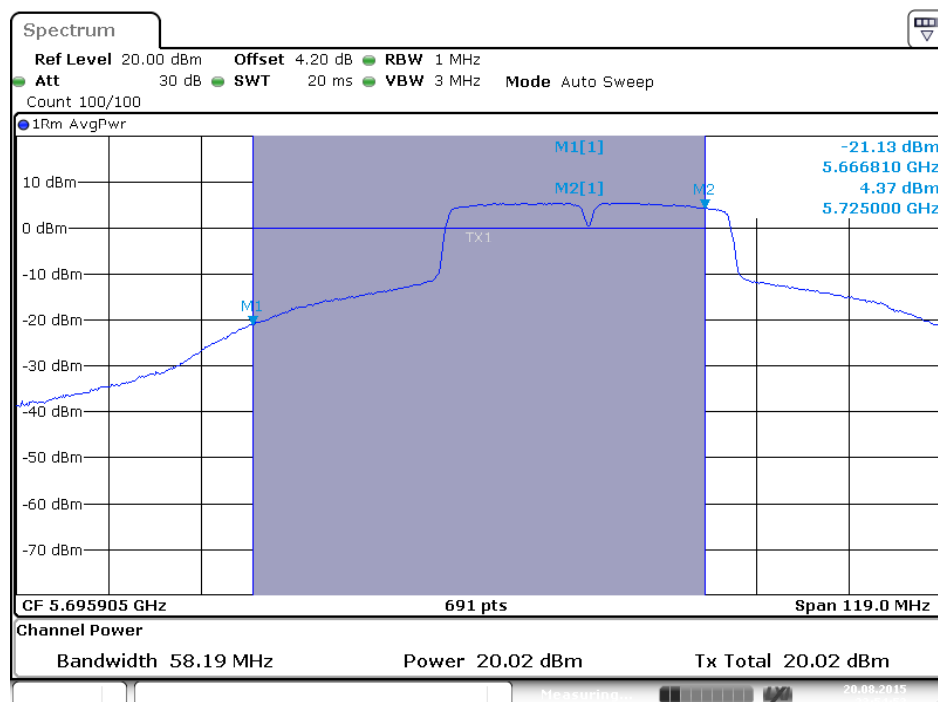


Date: 20 AUG .2015 23:54:53

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 / 5710 MHz (UNII 3)

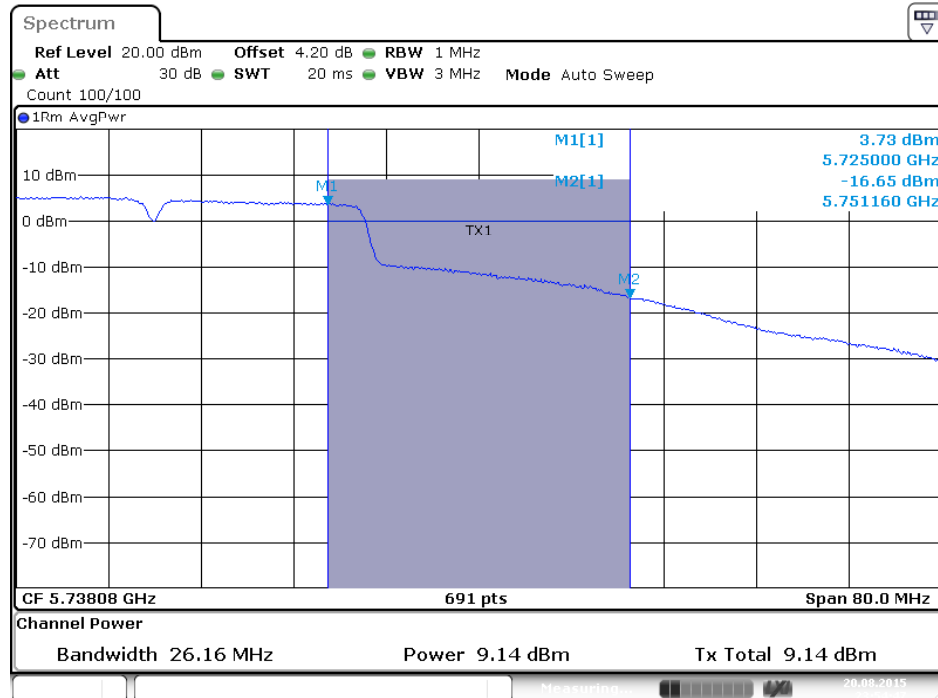


Date: 20 AUG .2015 23:54:47

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 2 / 5710 MHz (UNII 3)

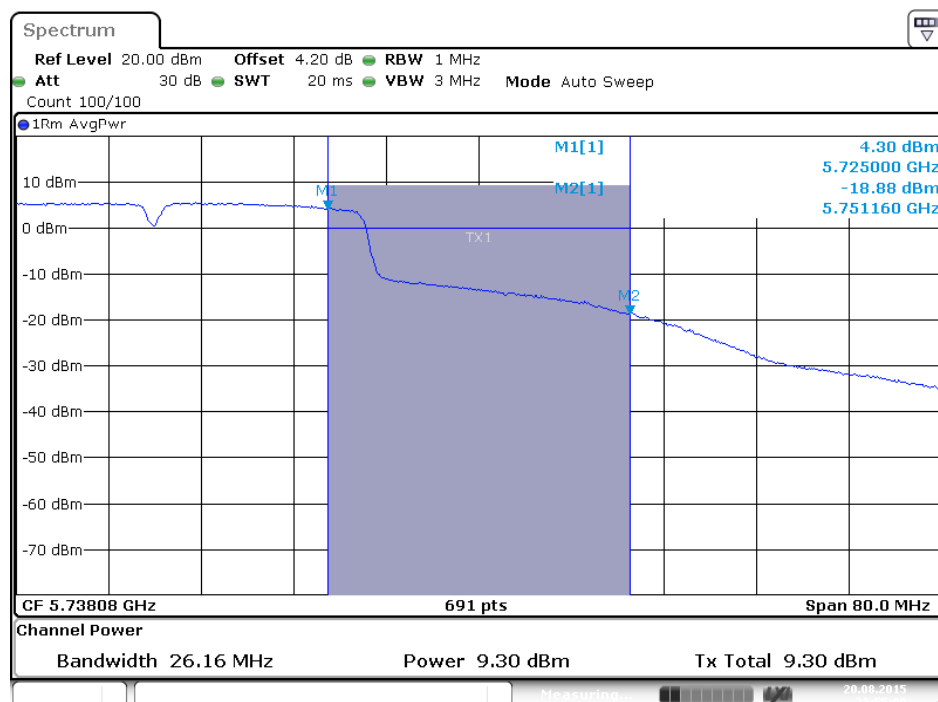


Date: 20 AUG .2015 23:55:00

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 / 5690 MHz (UNII 2C)

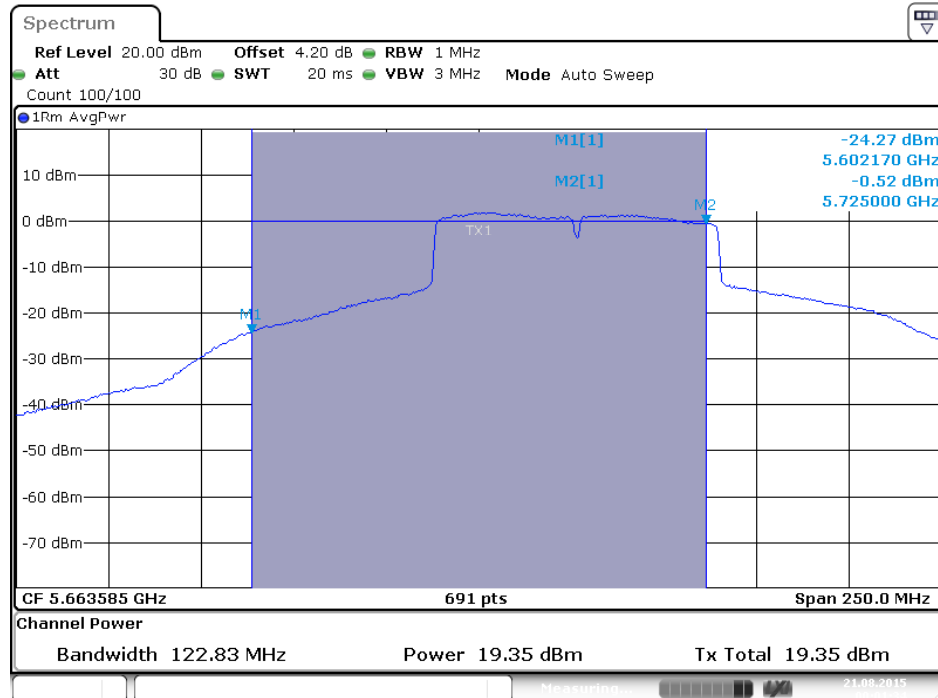


Date: 21.AUG.2015 00:01:35

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 2 / 5690 MHz (UNII 2C)

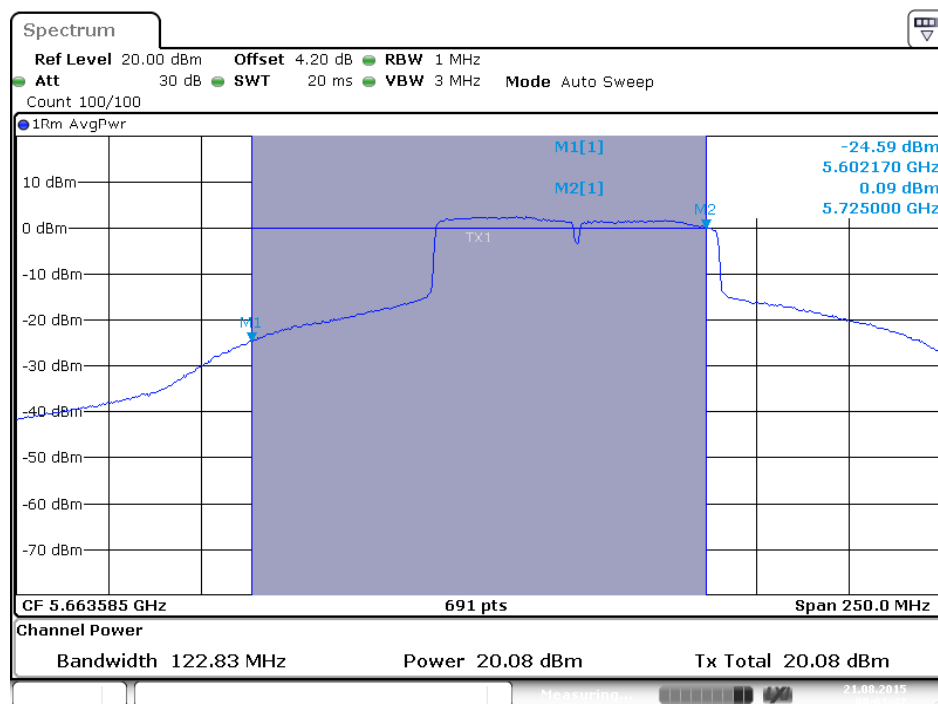


Date: 21.AUG.2015 00:01:48

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 / 5690 MHz (UNII 3)

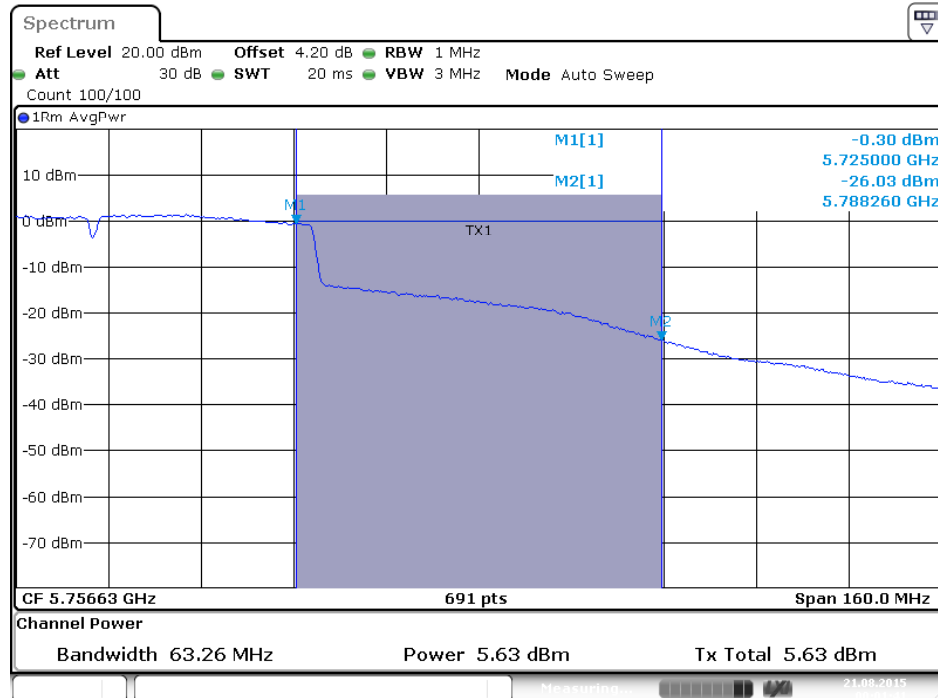

Date: 21.AUG.2015 00:01:41

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 2 / 5690 MHz (UNII 3)

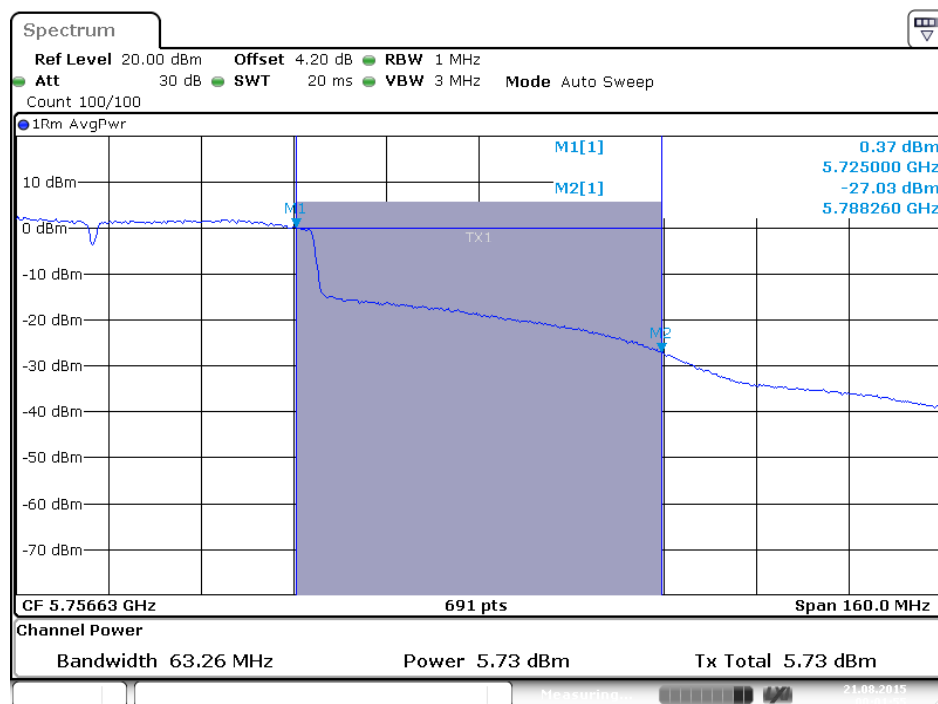

Date: 21.AUG.2015 00:01:54

4.4. Power Spectral Density Measurement

4.4.1. Limit

The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Band		Limit
☒	5.25-5.35 GHz	11 dBm/MHz
☒	5.470-5.725 GHz	11 dBm/MHz

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD).
3. Multiple antenna systems was performed in accordance KDB662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.

4.4.4. Test Setup Layout

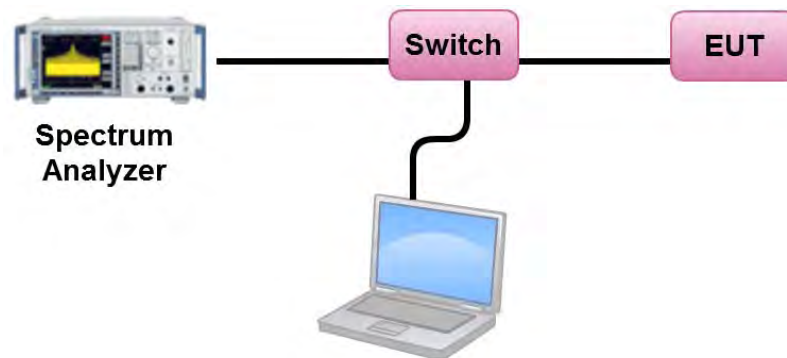

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Power Spectral Density

Temperature	25°C	Humidity	45%
Test Engineer	Roki Liu		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5260 MHz	10.46	10.90	Complies
	5300 MHz	10.43	10.90	Complies
	5320 MHz	10.11	10.90	Complies
	5500 MHz	9.48	9.82	Complies
	5580 MHz	9.73	9.82	Complies
	5700 MHz	8.21	9.82	Complies
802.11ac MCS0/Nss1 VHT20	5260 MHz	10.64	10.90	Complies
	5300 MHz	10.74	10.90	Complies
	5320 MHz	10.41	10.90	Complies
	5500 MHz	9.35	9.82	Complies
	5580 MHz	9.72	9.82	Complies
	5700 MHz	7.21	9.82	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	7.65	10.90	Complies
	5310 MHz	4.02	10.90	Complies
	5510 MHz	2.51	9.82	Complies
	5550 MHz	7.11	9.82	Complies
	5670 MHz	5.37	9.82	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-2.21	10.90	Complies
	5530 MHz	-3.33	9.82	Complies
	5610 MHz	3.36	9.82	Complies

Note:

Band 2: Directional gain = 6.10 dBi > 6 dBi, so limit = $11 - (6.10 - 6) = 10.90$ dBm/MHz.

Band 3: Directional gain = 7.18 dBi > 6 dBi, so limit = $11 - (7.18 - 6) = 9.82$ dBm/MHz.

Straddle Channel

Configuration IEEE 802.11a / Ant. 1 + Ant. 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	9.63	9.82	Complies

Note: Band 3: Directional gain = 7.18 dBi > 6 dBi, so limit = $11 - (7.18 - 6) = 9.82$ dBm/MHz.

Channel	Frequency	Power Density (dBm/MHz)	$10\log(500\text{kHz}/\text{RBW})$ Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	9.42	-3.01	6.41	28.00	Complies

Note: Band 4: Directional gain = 8.00 dBi > 6 dBi, so limit = $30 - (8 - 6) = 28.00$ dBm/500kHz.

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	9.78	9.82	Complies

Note: Band 3: Directional gain = 7.18 dBi > 6 dBi, so limit = $11 - (7.18 - 6) = 9.82$ dBm/MHz.

Channel	Frequency	Power Density (dBm/MHz)	$10\log(500\text{kHz}/\text{RBW})$ Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	9.35	-3.01	6.34	28.82	Complies

Note: Band 4: Directional gain = 8.00 dBi > 6 dBi, so limit = $30 - (8 - 6) = 28.00$ dBm/500kHz.

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	8.39	9.82	Complies

Note: Band 3: Directional gain=7.18dBi >6dBi, so limit = 11 – (7.18 – 6) = 9.82 dBm/MHz.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/R BW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	7.18	-3.01	4.17	28.82	Complies

Note: Band 4: Directional gain=8.00dBi >6dBi, so limit = 30 – (8 – 6) = 28.00 dBm/500kHz.

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	5.24	9.82	Complies

Note: Band 3: Directional gain=7.18dBi >6dBi, so limit = 11 – (7.18 – 6) = 9.82 dBm/MHz.


Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/R BW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	2.95	-3.01	-0.06	28.82	Complies

Note: Band 4: Directional gain=8.00dBi >6dBi, so limit = 30 – (8 – 6) = 28.00 dBm/500kHz.


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


Power Density Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5260 MHz

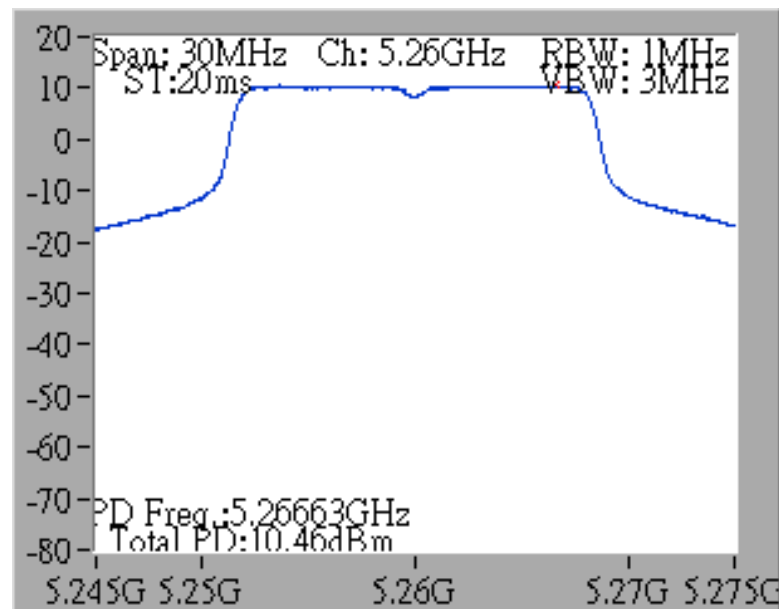


Power Density Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5580 MHz

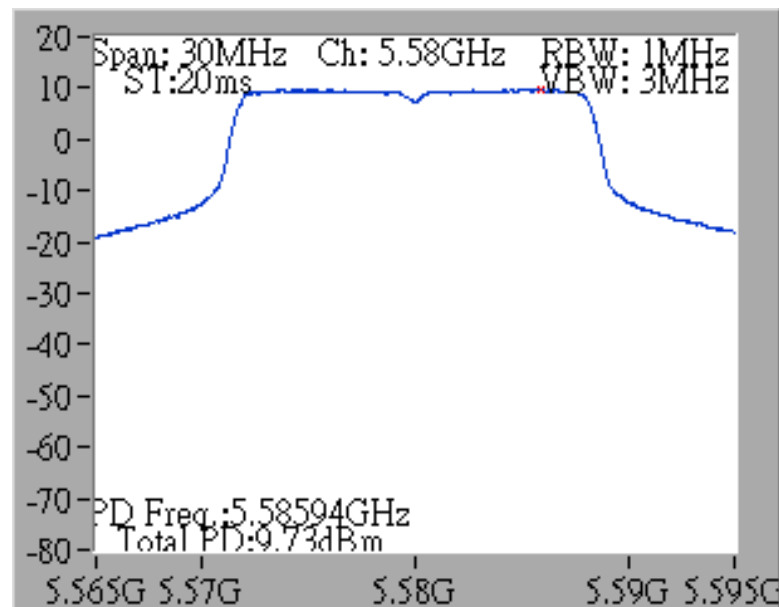


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 / 5300 MHz

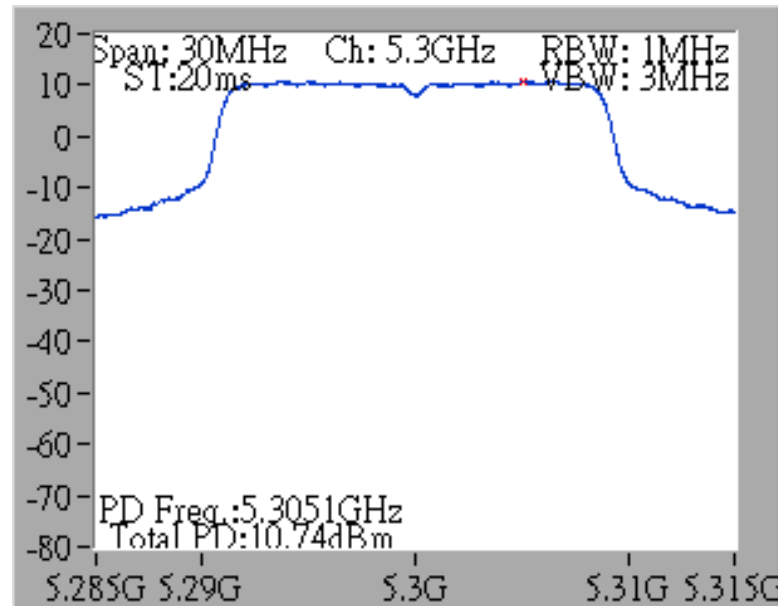


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 / 5580 MHz

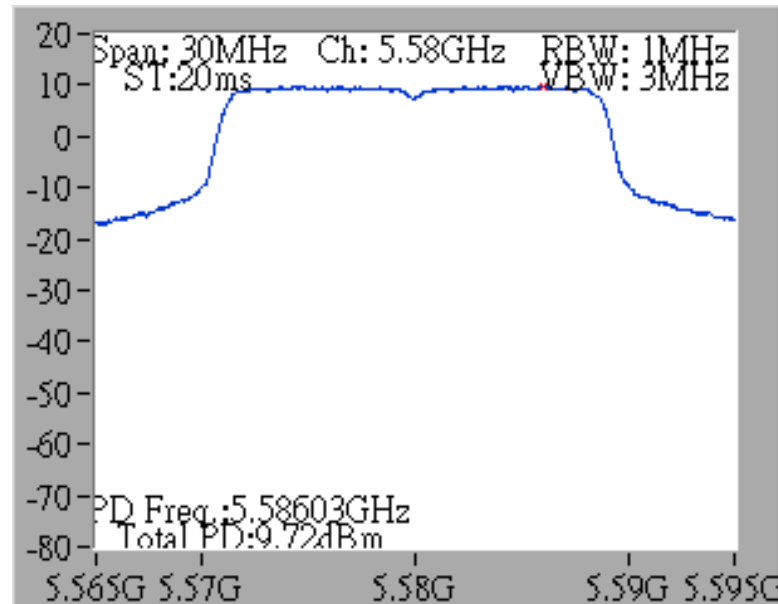


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 / 5270 MHz

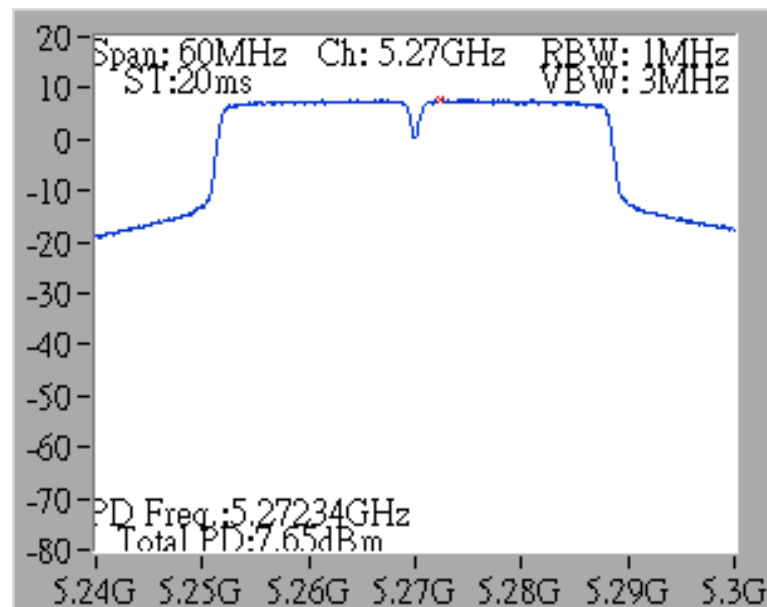


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 / 5550 MHz

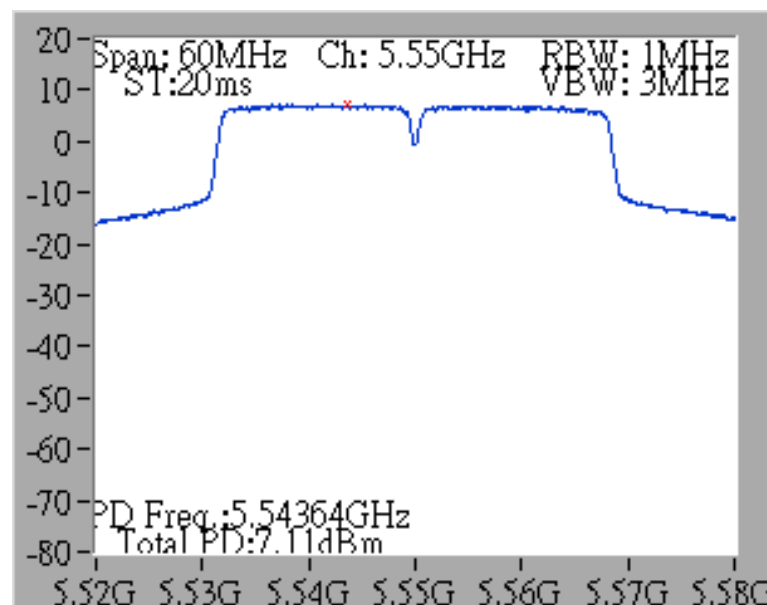


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 / 5290 MHz

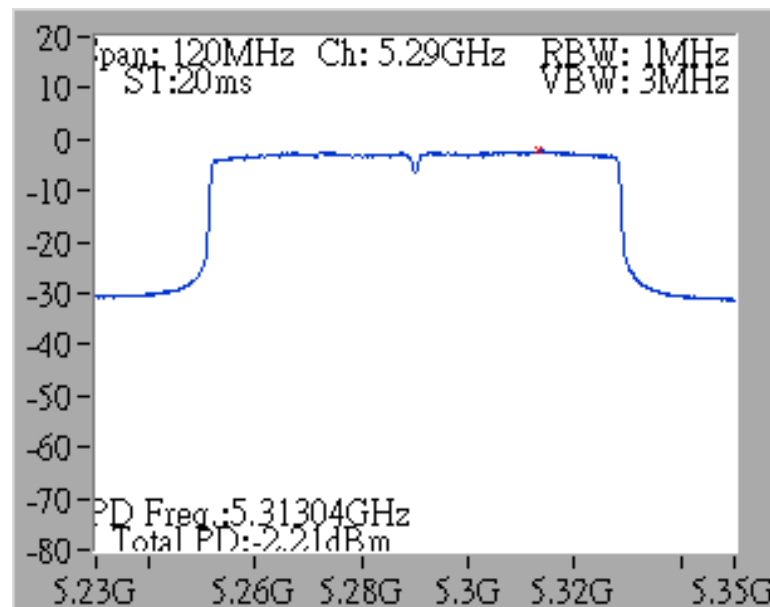

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 / 5530 MHz

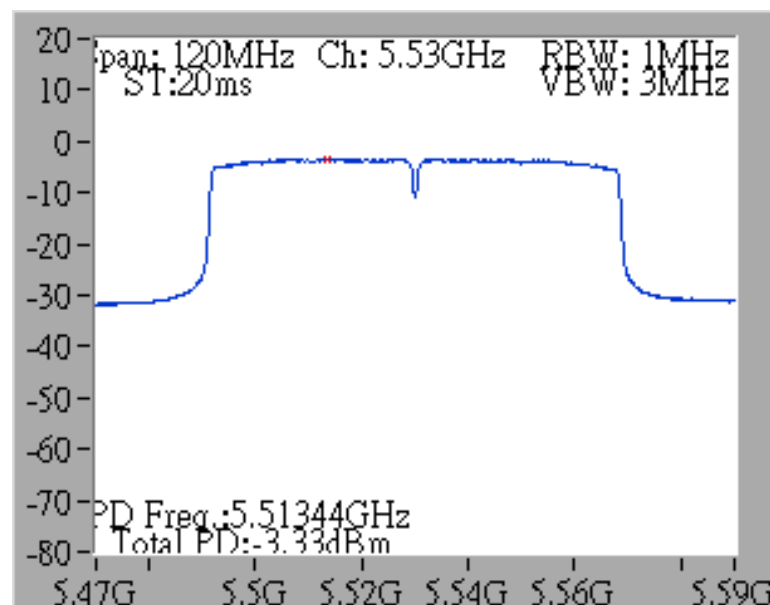


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 / 5610 MHz

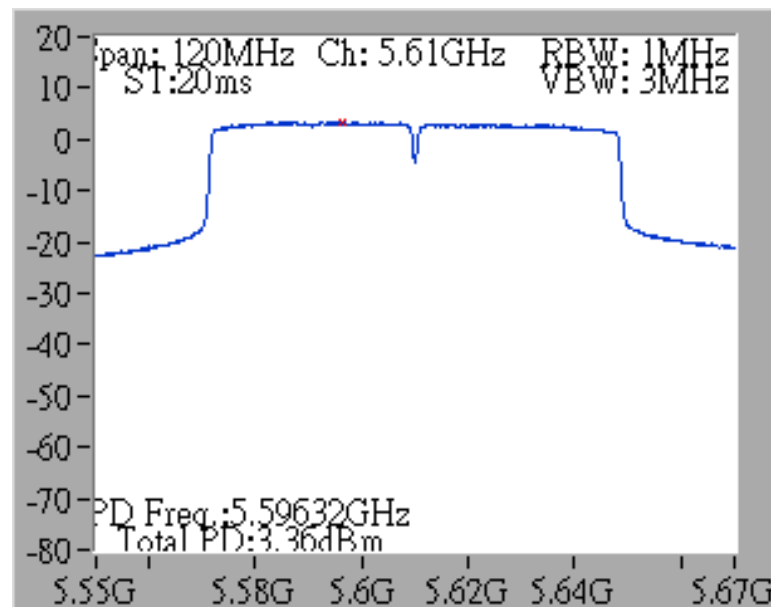


Straddle Channel


Power Density Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5720 MHz (UNII 2C)

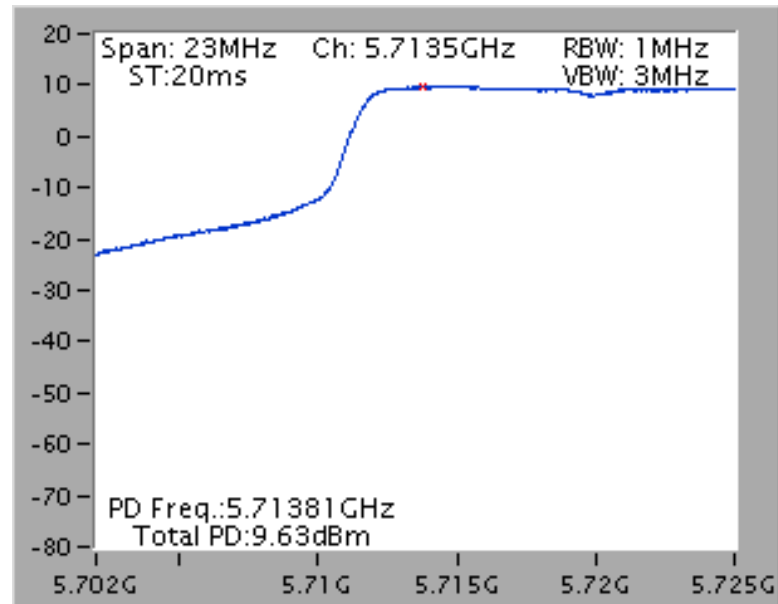


Power Density Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5720 MHz (UNII 3)

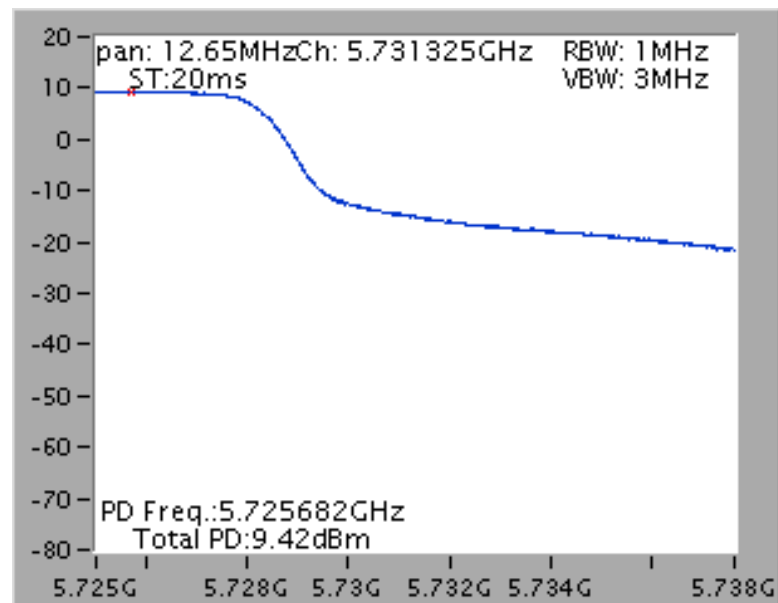


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 / 5720 MHz
(UNII 2C)

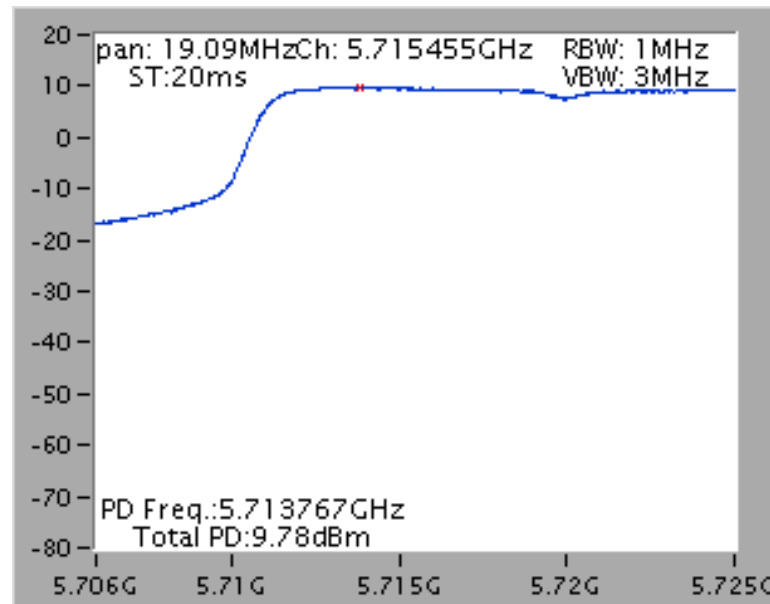


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 / 5720 MHz (UNII 3)

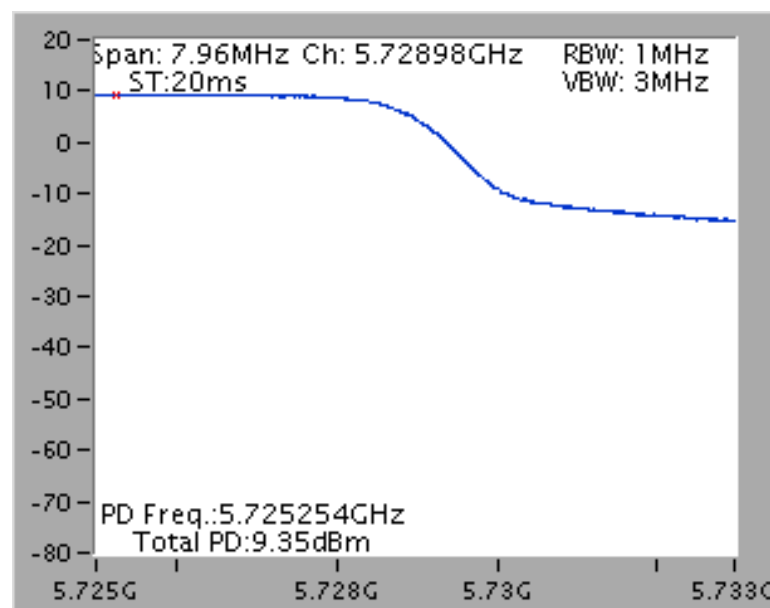


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 / 5710 MHz
(UNII 2C)

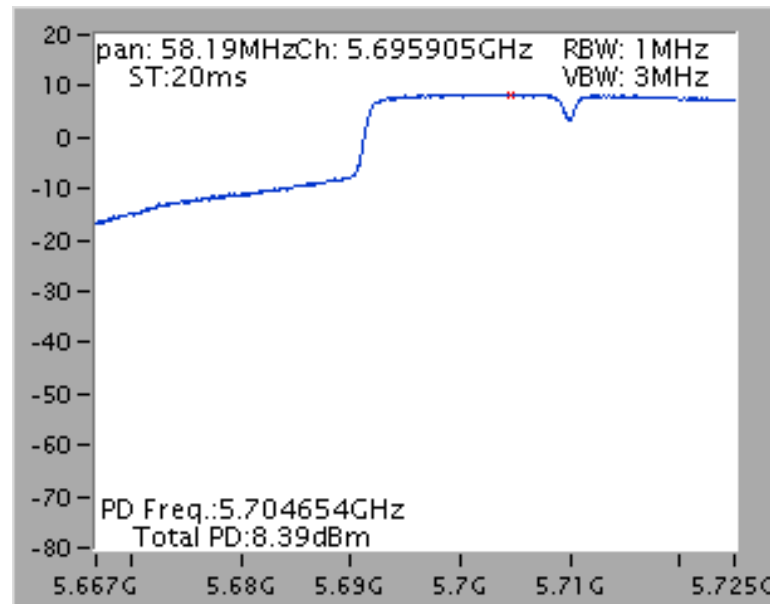


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 / 5710 MHz (UNII 3)

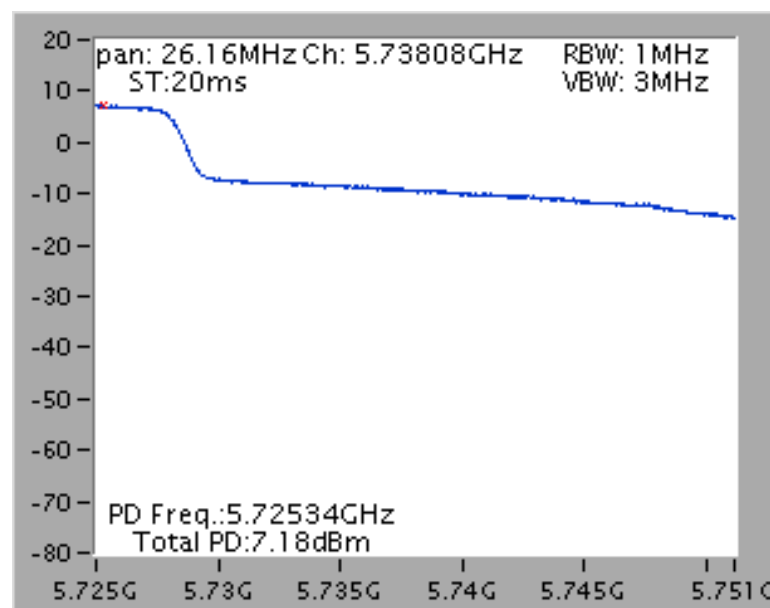

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 / 5690 MHz
(UNII 2C)

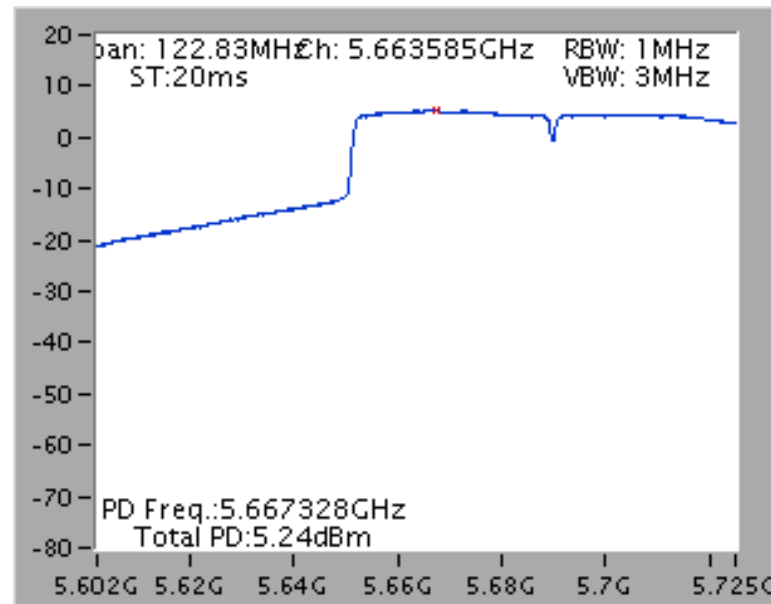

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 / 5690 MHz (UNII 3)

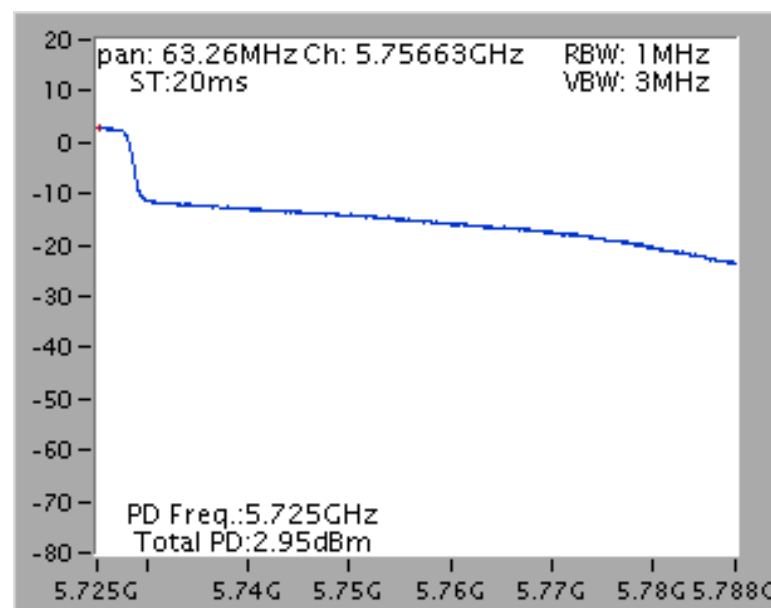

4.5. Radiated Emissions Measurement

4.5.1. Limit

For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.470-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.5.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout

For Radiated Emissions: Above 1GHz

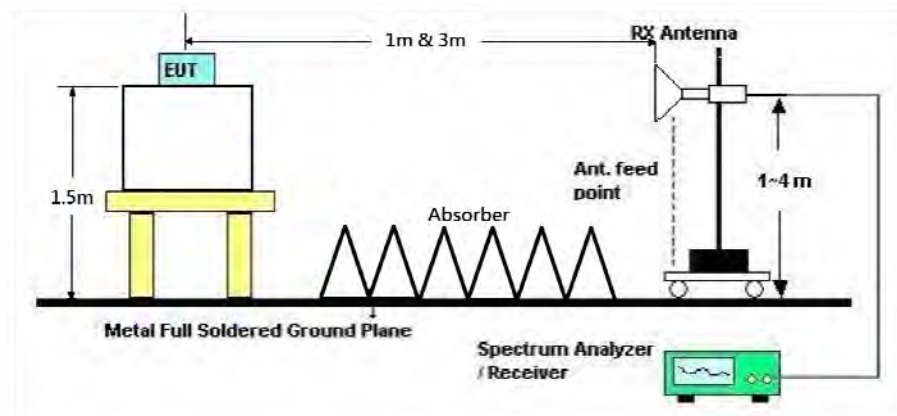

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results for Radiated Emissions (1GHz~40GHz)

Temperature	24°C	Humidity	57%
Test Engineer	Alvin Li	Configurations	IEEE 802.11a CH 52 / Ant. 1 + Ant. 2
Test Date	Aug. 12, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15792.50	60.39	74.00	-13.61	44.04	12.57	37.73	33.95	158	253	Peak	HORIZONTAL
2	15801.40	47.80	54.00	-6.20	31.48	12.57	37.70	33.95	158	253	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15768.20	60.29	74.00	-13.71	43.89	12.57	37.76	33.93	152	184	Peak	VERTICAL
2	15799.60	47.62	54.00	-6.38	31.30	12.57	37.70	33.95	152	184	Average	VERTICAL

Temperature	24°C	Humidity	57%
Test Engineer	Alvin Li	Configurations	IEEE 802.11a CH 60 / Ant. 1 + Ant. 2
Test Date	Aug. 12, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	10600.60	55.00	74.00	-19.00	40.07	10.16	38.40	33.63	163	303	Peak	HORIZONTAL
2	10600.90	42.90	54.00	-11.10	27.93	10.19	38.40	33.62	163	303	Average	HORIZONTAL
3	15875.70	60.10	74.00	-13.90	43.97	12.57	37.59	34.03	144	274	Peak	HORIZONTAL
4	15897.60	47.60	54.00	-6.40	31.51	12.57	37.57	34.05	144	274	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	10596.80	42.33	54.00	-11.67	27.40	10.16	38.40	33.63	154	299	Average	VERTICAL
2	10612.30	54.98	74.00	-19.02	40.01	10.19	38.40	33.62	154	299	Peak	VERTICAL
3	15907.00	47.51	54.00	-6.49	31.49	12.56	37.54	34.08	151	147	Average	VERTICAL
4	15913.60	60.21	74.00	-13.79	44.19	12.56	37.54	34.08	151	147	Peak	VERTICAL

Temperature	24°C	Humidity	57%
Test Engineer	Alvin Li	Configurations	IEEE 802.11a CH 64 / Ant. 1 + Ant. 2
Test Date	Aug. 05, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	10640.52	48.50	54.00	-5.50	32.90	39.98	10.61	34.99	165	34	HORIZONTAL	Average
2	10640.91	60.99	74.00	-13.01	45.39	39.98	10.61	34.99	165	34	HORIZONTAL	Peak
3	15960.80	47.59	54.00	-6.41	32.06	37.76	13.18	35.41	150	3	HORIZONTAL	Average
4	15961.88	59.89	74.00	-14.11	44.36	37.76	13.18	35.41	150	3	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	10637.95	59.10	74.00	-14.90	43.48	39.98	10.61	34.97	153	358	VERTICAL	Peak
2	10640.33	46.46	54.00	-7.54	30.86	39.98	10.61	34.99	153	358	VERTICAL	Average
3	15961.51	60.17	74.00	-13.83	44.64	37.76	13.18	35.41	167	78	VERTICAL	Peak
4	15961.77	47.56	54.00	-6.44	32.03	37.76	13.18	35.41	167	78	VERTICAL	Average

Temperature	24°C	Humidity	57%
Test Engineer	Alvin Li	Configurations	IEEE 802.11a CH 100 / Ant. 1 + Ant. 2
Test Date	Aug. 05, 2015		

Horizontal

	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	10998.93	49.52	54.00	-4.48	33.75	40.20	10.74	35.17	138	353	HORIZONTAL Average
2	11001.16	64.34	74.00	-9.66	48.57	40.20	10.74	35.17	138	353	HORIZONTAL Peak

Vertical

	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	10999.28	61.63	74.00	-12.37	45.86	40.20	10.74	35.17	133	4	VERTICAL Peak
2	11000.94	47.83	54.00	-6.17	32.06	40.20	10.74	35.17	133	4	VERTICAL Average

Temperature	24°C	Humidity	57%
Test Engineer	Alvin Li	Configurations	IEEE 802.11a CH 116 / Ant. 1 + Ant. 2
Test Date	Aug. 12, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11158.80	63.04	74.00	-10.96	47.25	10.60	38.57	33.38	146	317	Peak	HORIZONTAL
2	11160.20	47.85	54.00	-6.15	32.06	10.60	38.57	33.38	146	317	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11148.50	57.11	74.00	-16.89	41.34	10.60	38.55	33.38	157	8	Peak	VERTICAL
2	11158.90	43.77	54.00	-10.23	27.98	10.60	38.57	33.38	157	8	Average	VERTICAL

Temperature	24°C	Humidity	57%
Test Engineer	Alvin Li	Configurations	IEEE 802.11a CH 140 / Ant. 1 + Ant. 2
Test Date	Aug. 05, 2015		

Horizontal

	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	11391.35	64.26	74.00	-9.74	48.54	39.96	10.98	35.22	219	41	HORIZONTAL Peak
2	11398.73	50.46	54.00	-3.54	34.74	39.96	10.98	35.22	219	41	HORIZONTAL Average

Vertical

	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	11398.41	60.55	74.00	-13.45	44.83	39.96	10.98	35.22	126	337	VERTICAL Peak
2	11400.55	47.78	54.00	-6.22	32.06	39.96	10.98	35.22	126	337	VERTICAL Average

Temperature	24°C	Humidity	57%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 52 / Ant. 1 + Ant. 2
Test Date	Aug. 12, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15788.22	60.85	74.00	-13.15	44.50	12.57	37.73	33.95	156	182	Peak	HORIZONTAL
2	15789.90	47.62	54.00	-6.38	31.27	12.57	37.73	33.95	156	182	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15774.78	60.56	74.00	-13.44	44.16	12.57	37.76	33.93	158	204	Peak	VERTICAL
2	15793.86	47.39	54.00	-6.61	31.04	12.57	37.73	33.95	158	204	Average	VERTICAL

Temperature	24°C	Humidity	57%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 60 / Ant. 1 + Ant. 2
Test Date	Aug. 12, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	10590.46	54.91	74.00	-19.09	39.98	10.16	38.40	33.63	160	225	Peak	HORIZONTAL
2	10603.42	42.00	54.00	-12.00	27.03	10.19	38.40	33.62	160	225	Average	HORIZONTAL
3	15898.86	61.02	74.00	-12.98	44.93	12.57	37.57	34.05	158	239	Peak	HORIZONTAL
4	15908.76	47.21	54.00	-6.79	31.19	12.56	37.54	34.08	158	239	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	10601.44	41.96	54.00	-12.04	26.99	10.19	38.40	33.62	159	271	Average	VERTICAL
2	10603.78	55.07	74.00	-18.93	40.10	10.19	38.40	33.62	159	271	Peak	VERTICAL
3	15907.08	60.20	74.00	-13.80	44.18	12.56	37.54	34.08	156	254	Peak	VERTICAL
4	15911.94	47.23	54.00	-6.77	31.21	12.56	37.54	34.08	156	254	Average	VERTICAL

Temperature	24°C	Humidity	57%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 64 / Ant. 1 + Ant. 2
Test Date	Aug. 11, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	10651.43	59.62	74.00	-14.38	44.01	10.62	34.99	39.98	HORIZONTAL	232	151	Peak
2	10670.54	46.75	54.00	-7.25	31.13	10.62	34.99	39.99	HORIZONTAL	232	151	Average
3	15934.24	61.68	74.00	-12.32	46.17	13.16	35.41	37.76	HORIZONTAL	352	181	Peak
4	15963.04	47.42	54.00	-6.58	31.89	13.18	35.41	37.76	HORIZONTAL	306	181	Average

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	10609.75	59.43	74.00	-14.57	43.84	10.60	34.97	39.96	VERTICAL	268	178	Peak
2	10672.85	46.42	54.00	-7.58	30.80	10.62	34.99	39.99	VERTICAL	268	178	Average
3	15937.86	60.98	74.00	-13.02	45.47	13.16	35.41	37.76	VERTICAL	274	132	Peak
4	15967.09	47.82	54.00	-6.18	32.35	13.18	35.41	37.70	VERTICAL	274	132	Average

Temperature	24°C	Humidity	57%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 100 / Ant. 1 + Ant. 2
Test Date	Aug. 11, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	10993.05	61.83	74.00	-12.17	46.08	10.74	35.17	40.18	HORIZONTAL	353	127	Peak
2	10995.22	47.94	54.00	-6.06	32.19	10.74	35.17	40.18	HORIZONTAL	353	127	Average

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	10984.08	45.80	54.00	-8.20	30.04	10.73	35.15	40.18	VERTICAL	182	185	Average
2	11022.72	59.94	74.00	-14.06	44.16	10.75	35.17	40.20	VERTICAL	182	185	Peak

Temperature	24°C	Humidity	57%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 116 / Ant. 1 + Ant. 2
Test Date	Aug. 12, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11156.52	63.95	74.00	-10.05	48.18	10.60	38.55	33.38	168	324	Peak	HORIZONTAL
2	11158.92	46.96	54.00	-7.04	31.17	10.60	38.57	33.38	168	324	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11147.40	43.75	54.00	-10.25	27.98	10.60	38.55	33.38	163	338	Average	VERTICAL
2	11156.28	61.52	74.00	-12.48	45.75	10.60	38.55	33.38	163	338	Peak	VERTICAL

Temperature	24°C	Humidity	57%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 140 / Ant. 1 + Ant. 2
Test Date	Aug. 11, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11397.90	47.14	54.00	-6.86	31.42	10.98	35.22	39.96	HORIZONTAL	297	143	Average
2	11404.56	60.34	74.00	-13.66	44.62	10.98	35.22	39.96	HORIZONTAL	297	143	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11399.49	46.99	54.00	-7.01	31.27	10.98	35.22	39.96	VERTICAL	269	180	Average
2	11401.81	59.61	74.00	-14.39	43.89	10.98	35.22	39.96	VERTICAL	269	180	Peak

Temperature	24°C	Humidity	57%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 54 / Ant. 1 + Ant. 2
Test Date	Aug. 12, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15817.38	46.11	54.00	-7.89	29.84	12.57	37.68	33.98	100	234 Average	HORIZONTAL
2	15818.22	59.75	74.00	-14.25	43.48	12.57	37.68	33.98	100	234 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15802.79	60.03	74.00	-13.97	43.74	12.57	37.70	33.98	154	216 Peak	VERTICAL
2	15808.58	45.95	54.00	-8.05	29.66	12.57	37.70	33.98	154	216 Average	VERTICAL

Temperature	24°C	Humidity	57%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 62 / Ant. 1 + Ant. 2
Test Date	Aug. 11, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	15545.69	47.71	54.00	-6.29	31.80	12.92	35.35	38.34	HORIZONTAL	250	124	Average
2	15553.07	60.45	74.00	-13.55	44.53	12.93	35.35	38.34	HORIZONTAL	250	124	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	15557.84	47.71	54.00	-6.29	31.86	12.93	35.35	38.27	VERTICAL	279	171	Average
2	15613.42	60.34	74.00	-13.66	44.52	12.97	35.36	38.21	VERTICAL	279	171	Peak

Temperature	24°C	Humidity	57%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 102 / Ant. 1 + Ant. 2
Test Date	Aug. 12, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11025.76	56.85	74.00	-17.15	41.24	10.56	38.43	33.38	150	244	Peak	HORIZONTAL
2	11028.16	43.59	54.00	-10.41	27.98	10.56	38.43	33.38	150	244	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11010.80	56.19	74.00	-17.81	40.59	10.56	38.42	33.38	153	263	Peak	VERTICAL
2	11028.54	43.59	54.00	-10.41	27.98	10.56	38.43	33.38	153	263	Average	VERTICAL

Temperature	24°C	Humidity	57%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 110 / Ant. 1 + Ant. 2
Test Date	Aug. 12, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11098.67	58.89	74.00	-15.11	43.19	10.58	38.50	33.38	157	293	Peak	HORIZONTAL
2	11107.26	45.01	54.00	-8.99	29.29	10.58	38.52	33.38	157	293	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11098.38	58.04	74.00	-15.96	42.34	10.58	38.50	33.38	158	315	Peak	VERTICAL
2	11101.39	44.19	54.00	-9.81	28.49	10.58	38.50	33.38	158	315	Average	VERTICAL

Temperature	24°C	Humidity	57%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 134 / Ant. 1 + Ant. 2
Test Date	Aug. 11, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11293.26	46.05	54.00	-7.95	30.32	10.92	35.21	40.02	HORIZONTAL	212	181	Average
2	11341.01	59.68	74.00	-14.32	43.94	10.95	35.21	40.00	HORIZONTAL	212	181	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11308.74	59.56	74.00	-14.44	43.82	10.93	35.21	40.02	VERTICAL	161	149	Peak
2	11314.82	46.91	54.00	-7.09	31.17	10.93	35.21	40.02	VERTICAL	161	149	Average

Temperature	24°C	Humidity	57%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 58 / Ant. 1 + Ant. 2
Test Date	Aug. 07, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	15870.54	60.91	74.00	-13.09	44.77	13.12	34.86	37.88	HORIZONTAL	269	145	Peak
2	15871.01	48.11	54.00	-5.89	31.97	13.12	34.86	37.88	HORIZONTAL	269	145	Average

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	15870.50	61.59	74.00	-12.41	45.44	13.12	34.86	37.89	VERTICAL	310	143	Peak
2	15870.90	47.60	54.00	-6.40	31.45	13.12	34.86	37.89	VERTICAL	310	143	Average

Temperature	24°C	Humidity	57%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 106 / Ant. 1 + Ant. 2
Test Date	Aug. 11, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Pol/Phase	deg	cm	Remark
1	11088.94	58.20	74.00	-15.80	42.43	10.79	35.18	40.16	HORIZONTAL	350	163	Peak
2	11089.67	45.66	54.00	-8.34	29.89	10.79	35.18	40.16	HORIZONTAL	350	163	Average

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Pol/Phase	deg	cm	Remark
1	11014.99	45.61	54.00	-8.39	29.83	10.75	35.17	40.20	VERTICAL	285	150	Average
2	11040.75	58.51	74.00	-15.49	42.74	10.76	35.17	40.18	VERTICAL	285	150	Peak

Temperature	24°C	Humidity	57%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 122 / Ant. 1 + Ant. 2
Test Date	Aug. 12, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11240.00	56.15	74.00	-17.85	40.26	10.64	38.63	33.38	159	95	Peak	HORIZONTAL
2	11241.90	43.14	54.00	-10.86	27.25	10.64	38.63	33.38	159	95	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11215.50	55.27	74.00	-18.73	39.40	10.63	38.62	33.38	131	192	Peak	VERTICAL
2	11232.90	43.07	54.00	-10.93	27.19	10.63	38.63	33.38	131	192	Average	VERTICAL

Straddle Channel

Temperature	24°C	Humidity	57%
Test Engineer	Alvin Li	Configurations	IEEE 802.11a CH 144 / Ant. 1 + Ant. 2
Test Date	Aug. 12, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11437.80	66.17	74.00	-7.83	50.02	10.69	38.83	33.37	146	29	Peak	HORIZONTAL
2	11442.30	50.44	54.00	-3.56	34.28	10.70	38.83	33.37	146	29	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11436.40	64.50	74.00	-9.50	48.35	10.69	38.83	33.37	149	318	Peak	VERTICAL
2	11441.80	48.05	54.00	-5.95	31.90	10.69	38.83	33.37	149	318	Average	VERTICAL

Temperature	24°C	Humidity	57%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 144 / Ant. 1 + Ant. 2
Test Date	Aug. 12, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11436.46	68.43	74.00	-5.57	52.28	10.69	38.83	33.37	205	45	Peak	HORIZONTAL
2	11446.12	50.76	54.00	-3.24	34.60	10.70	38.83	33.37	205	45	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11441.14	66.06	74.00	-7.94	49.91	10.69	38.83	33.37	242	309	Peak	VERTICAL
2	11441.20	48.61	54.00	-5.39	32.46	10.69	38.83	33.37	242	309	Average	VERTICAL

Temperature	24°C	Humidity	57%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 142 / Ant. 1 + Ant. 2
Test Date	Aug. 12, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11427.38	69.23	74.00	-4.77	53.09	10.69	38.82	33.37	228	25	Peak	HORIZONTAL
2	11427.47	51.00	54.00	-3.00	34.86	10.69	38.82	33.37	228	25	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11420.38	57.78	74.00	-16.22	41.64	10.69	38.82	33.37	218	273	Peak	VERTICAL
2	11426.02	44.64	54.00	-9.36	28.50	10.69	38.82	33.37	218	273	Average	VERTICAL

Temperature	24°C	Humidity	57%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 138 / Ant. 1 + Ant. 2
Test Date	Aug. 12, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11388.70	47.26	54.00	-6.74	31.17	10.68	38.78	33.37	200	33	Average	HORIZONTAL
2	11396.60	64.21	74.00	-9.79	48.09	10.69	38.80	33.37	200	33	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11364.70	56.23	74.00	-17.77	40.16	10.67	38.77	33.37	182	334	Peak	VERTICAL
2	11401.10	44.00	54.00	-10.00	27.88	10.69	38.80	33.37	182	334	Average	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Band Edge Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.470-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1MHz / 3MHz for Peak

4.6.3. Test Procedures

1. The test procedure is the same as section 4.5.3.

4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	24°C	Humidity	57%
Test Engineer	Alvin Li	Configurations	IEEE 802.11a CH 52, 60, 64 / Ant. 1 + Ant. 2
Test Date	Aug. 04, 2015, Aug. 11, 2015		

Channel 52

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	5146.53	60.86	74.00	-13.14	54.95	7.33	32.94	31.52	HORIZONTAL	301	159	Peak
2	5150.00	46.36	54.00	-7.64	40.45	7.33	32.94	31.52	HORIZONTAL	301	159	Average
3	5255.95	106.98			100.87	7.43	32.93	31.61	HORIZONTAL	301	159	Average
4	5256.53	118.23			112.12	7.43	32.93	31.61	HORIZONTAL	301	159	Peak
5	5350.00	47.26	54.00	-6.74	40.99	7.52	32.93	31.68	HORIZONTAL	301	159	Average
6	5350.00	59.75	74.00	-14.25	53.48	7.52	32.93	31.68	HORIZONTAL	301	159	Peak

Item 3, 4 are the fundamental frequency at 5260 MHz.

Channel 60

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	5305.79	106.66			100.47	7.48	32.93	31.64	HORIZONTAL	310	169	Average
2	5306.37	117.47			111.28	7.48	32.93	31.64	HORIZONTAL	310	169	Peak
3	5350.58	52.83	54.00	-1.17	46.56	7.52	32.93	31.68	HORIZONTAL	310	169	Average
4	5350.87	69.14	74.00	-4.86	62.87	7.52	32.93	31.68	HORIZONTAL	310	169	Peak

Item 1, 2 are the fundamental frequency at 5300 MHz.

Channel 64

	Freq	Level	Limit	Over	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	5313.49	105.56			99.35	31.65	7.49	32.93	175	304	HORIZONTAL	Average
2	5317.54	116.14			109.93	31.65	7.49	32.93	175	304	HORIZONTAL	Peak
3	5352.60	53.74	54.00	-0.26	47.47	31.68	7.52	32.93	175	304	HORIZONTAL	Average
4	5353.18	71.41	74.00	-2.59	65.14	31.68	7.52	32.93	175	304	HORIZONTAL	Peak

Item 1, 2 are the fundamental frequency at 5320 MHz.

Temperature	24°C	Humidity	57%
Test Engineer	Alvin Li	Configurations	IEEE 802.11a CH 100, 116, 140 / Ant. 1 + Ant. 2
Test Date	Aug. 04, 2015, Aug. 11, 2015		

Channel 100

	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	Level	Loss	Factor	cm	deg		
1	5460.00	60.83	74.00	-13.17	54.37	31.76	7.62	32.92	189	15 VERTICAL	Peak
2	5460.00	47.82	54.00	-6.18	41.36	31.76	7.62	32.92	189	15 VERTICAL	Average
3	5467.11	72.64	74.00	-1.36	66.15	31.78	7.63	32.92	189	15 VERTICAL	Peak
4	5470.00	53.33	54.00	-0.67	46.84	31.78	7.63	32.92	189	15 VERTICAL	Average
5	5496.82	114.86			108.32	31.80	7.66	32.92	189	15 VERTICAL	Peak
6	5496.82	102.97			96.43	31.80	7.66	32.92	189	15 VERTICAL	Average

Item 5, 6 are the fundamental frequency at 5500 MHz.

Channel 116

	Freq	Level	Limit	Over	Read	Cable	PreampAntenna	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	Level	Loss	Factor	dB/m	deg	cm	
1	5385.33	61.39	74.00	-12.61	55.05	7.55	32.93	31.72	HORIZONTAL	301 170	Peak
2	5460.00	46.74	54.00	-7.26	40.28	7.62	32.92	31.76	HORIZONTAL	301 170	Average
3	5461.90	60.64	74.00	-13.36	54.18	7.62	32.92	31.76	HORIZONTAL	301 170	Peak
4	5470.00	46.87	54.00	-7.13	40.38	7.63	32.92	31.78	HORIZONTAL	301 170	Average
5	5585.79	107.57			100.92	7.71	32.96	31.90	HORIZONTAL	301 170	Average
6	5586.37	118.72			112.07	7.71	32.96	31.90	HORIZONTAL	301 170	Peak
7	5725.00	47.27	54.00	-6.73	40.40	7.79	33.00	32.08	HORIZONTAL	301 170	Average
8	5741.79	60.31	74.00	-13.69	53.42	7.80	33.01	32.10	HORIZONTAL	301 170	Peak

Item 5, 6 are the fundamental frequency at 5580 MHz.

Channel 140

	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	Level	Loss	Factor	cm	deg		
1	5693.92	115.19			108.37	32.04	7.78	33.00	181	306 HORIZONTAL	Peak
2	5703.18	104.74			97.92	32.04	7.78	33.00	181	306 HORIZONTAL	Average
3	5727.46	70.17	74.00	-3.83	63.30	32.08	7.80	33.01	181	306 HORIZONTAL	Peak
4	5728.18	53.87	54.00	-0.13	47.00	32.08	7.80	33.01	181	306 HORIZONTAL	Average

Item 1, 2 are the fundamental frequency at 5700 MHz.

Temperature	24°C	Humidity	57%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 52, 60, 64 / Ant. 1 + Ant. 2
Test Date	Aug. 04, 2015, Aug. 11, 2015		

Channel 52

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	5117.58	59.86	74.00	-14.14	54.00	7.30	32.94	31.50	HORIZONTAL	310	170	Peak
2	5150.00	46.86	54.00	-7.14	40.95	7.33	32.94	31.52	HORIZONTAL	310	170	Average
3	5263.47	107.85			101.72	7.44	32.93	31.62	HORIZONTAL	310	170	Average
4	5264.05	118.23			112.10	7.44	32.93	31.62	HORIZONTAL	310	170	Peak
5	5354.63	47.72	54.00	-6.28	41.43	7.53	32.93	31.69	HORIZONTAL	310	170	Average
6	5361.58	61.04	74.00	-12.96	54.75	7.53	32.93	31.69	HORIZONTAL	310	170	Peak

Item 3, 4 are the fundamental frequency at 5260 MHz.

Channel 60

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	5304.05	118.47			112.28	7.48	32.93	31.64	HORIZONTAL	310	166	Peak
2	5304.63	108.00			101.81	7.48	32.93	31.64	HORIZONTAL	310	166	Average
3	5360.13	51.74	54.00	-2.26	45.45	7.53	32.93	31.69	HORIZONTAL	310	166	Average
4	5361.87	68.24	74.00	-5.76	61.95	7.53	32.93	31.69	HORIZONTAL	310	166	Peak

Item 1, 2 are the fundamental frequency at 5300 MHz.

Channel 64

	Freq	Level	Limit	Over	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	5323.33	116.40			110.16	31.67	7.50	32.93	175	307	HORIZONTAL	Peak
2	5324.34	105.91			99.67	31.67	7.50	32.93	175	307	HORIZONTAL	Average
3	5350.43	72.40	74.00	-1.60	66.13	31.68	7.52	32.93	175	307	HORIZONTAL	Peak
4	5356.37	53.64	54.00	-0.36	47.35	31.69	7.53	32.93	175	307	HORIZONTAL	Average

Item 1, 2 are the fundamental frequency at 5320 MHz.

Temperature	24°C	Humidity	57%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 100, 116, 140 / Ant. 1 + Ant. 2
Test Date	Aug. 05, 2015, Aug. 11, 2015		

Channel 100

	Freq	Level	Limit Line	Over Limit	ReadAntenna Level Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	5459.28	64.53	74.00	-9.47	58.07	31.76	7.62	32.92	178	310	HORIZONTAL Peak
2	5460.00	50.42	54.00	-3.58	43.96	31.76	7.62	32.92	178	310	HORIZONTAL Average
3	5466.53	53.92	54.00	-0.08	47.43	31.78	7.63	32.92	178	310	HORIZONTAL Average
4	5467.68	71.49	74.00	-2.51	65.00	31.78	7.63	32.92	178	310	HORIZONTAL Peak
5	5503.18	114.45			107.91	31.80	7.66	32.92	178	310	HORIZONTAL Peak
6	5504.78	104.31			97.77	31.80	7.66	32.92	178	310	HORIZONTAL Average

Item 5, 6 are the fundamental frequency at 5500 MHz.

Channel 116

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	5424.11	60.29	74.00	-13.71	53.88	7.59	32.92	31.74	HORIZONTAL	302	155	Peak
2	5460.00	47.16	54.00	-6.84	40.70	7.62	32.92	31.76	HORIZONTAL	302	155	Average
3	5467.11	61.23	74.00	-12.77	54.74	7.63	32.92	31.78	HORIZONTAL	302	155	Peak
4	5470.00	47.36	54.00	-6.64	40.87	7.63	32.92	31.78	HORIZONTAL	302	155	Average
5	5582.89	120.14			113.49	7.71	32.96	31.90	HORIZONTAL	302	155	Peak
6	5583.47	107.75			101.10	7.71	32.96	31.90	HORIZONTAL	302	155	Average
7	5725.00	47.72	54.00	-6.28	40.85	7.79	33.00	32.08	HORIZONTAL	302	155	Average
8	5728.47	60.82	74.00	-13.18	53.95	7.80	33.01	32.08	HORIZONTAL	302	155	Peak

Item 5, 6 are the fundamental frequency at 5580 MHz.

Channel 140

	Freq	Level	Limit Line	Over Limit	ReadAntenna Level Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	5703.47	114.31			107.49	32.04	7.78	33.00	182	309	HORIZONTAL Peak
2	5705.50	104.17			97.35	32.04	7.78	33.00	182	309	HORIZONTAL Average
3	5725.00	53.61	54.00	-0.39	46.74	32.08	7.79	33.00	182	309	HORIZONTAL Average
4	5726.74	68.49	74.00	-5.51	61.63	32.08	7.79	33.01	182	309	HORIZONTAL Peak

Item 1, 2 are the fundamental frequency at 5700 MHz.

Temperature	24°C	Humidity	57%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 54, 62 / Ant. 1 + Ant. 2
Test Date	Aug. 05, 2015, Aug. 12, 2015		

Channel 54

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5262.40	113.52			106.31	6.34	33.93	33.06	174	306	Peak	HORIZONTAL
2	5262.80	103.06			95.85	6.34	33.93	33.06	174	306	Average	HORIZONTAL
3	5352.80	67.79	74.00	-6.21	60.32	6.47	34.06	33.06	174	306	Peak	HORIZONTAL
4	5360.80	53.23	54.00	-0.77	45.73	6.47	34.09	33.06	174	306	Average	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5270 MHz.

Channel 62

	Freq	Level	Limit	Over	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	5303.63	99.97			93.78	31.64	7.48	32.93	184	303	HORIZONTAL	Average
2	5305.95	110.23			104.04	31.64	7.48	32.93	184	303	HORIZONTAL	Peak
3	5350.00	53.55	54.00	-0.45	47.28	31.68	7.52	32.93	184	303	HORIZONTAL	Average
4	5350.29	66.13	74.00	-7.87	59.86	31.68	7.52	32.93	184	303	HORIZONTAL	Peak

Item 1, 2 are the fundamental frequency at 5310 MHz.

Temperature	24°C	Humidity	57%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 102, 110, 134 / Ant. 1 + Ant. 2
Test Date	Aug. 05, 2015, Aug. 12, 2015, Aug. 14, 2015		

Channel 102

	Freq	Level	Limit	Over	Read	Cable	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	5459.42	62.48	74.00	-11.52	56.02	31.76	7.62	32.92	177	306	HORIZONTAL Peak
2	5460.00	49.89	54.00	-4.11	43.43	31.76	7.62	32.92	177	306	HORIZONTAL Average
3	5468.26	68.58	74.00	-5.42	62.09	31.78	7.63	32.92	177	306	HORIZONTAL Peak
4	5469.42	53.87	54.00	-0.13	47.38	31.78	7.63	32.92	177	306	HORIZONTAL Average
5	5503.92	98.02			91.48	31.80	7.66	32.92	177	306	HORIZONTAL Average
6	5523.60	108.03			101.47	31.82	7.67	32.93	177	306	HORIZONTAL Peak

Item 5, 6 are the fundamental frequency at 5510 MHz.

Channel 110

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5459.60	52.41	54.00	-1.59	44.65	6.60	34.22	33.06	172	305	Average	HORIZONTAL
2	5459.60	66.84	74.00	-7.16	59.08	6.60	34.22	33.06	172	305	Peak	HORIZONTAL
3	5464.00	67.95	68.20	-0.25	60.16	6.60	34.25	33.06	172	305	Peak	HORIZONTAL
4	5541.20	114.98			107.06	6.68	34.32	33.08	172	305	Peak	HORIZONTAL
5	5544.80	102.77			94.85	6.68	34.32	33.08	172	305	Average	HORIZONTAL

Item 4, 5 are the fundamental frequency at 5550 MHz.

Channel 134

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	5663.63	101.50			94.72	7.76	32.98	32.00	HORIZONTAL	306	188	Average
2	5663.63	111.67			104.89	7.76	32.98	32.00	HORIZONTAL	306	188	Peak
3	5728.18	67.49	68.20	-0.71	60.62	7.80	33.01	32.08	HORIZONTAL	306	188	Peak

Item 1, 2 are the fundamental frequency at 5670 MHz.

Temperature	24°C	Humidity	57%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 58, 106, 122 / Ant. 1 + Ant. 2
Test Date	Aug. 05, 2015, Aug. 12, 2015		

Channel 58

	Freq	Level	Limit	Over	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	5129.74	63.00	74.00	-11.00	57.12	31.51	7.31	32.94	176	304	HORIZONTAL	Peak
2	5150.00	49.91	54.00	-4.09	44.00	31.52	7.33	32.94	176	304	HORIZONTAL	Average
3	5278.42	103.72			97.57	31.63	7.45	32.93	176	304	HORIZONTAL	Peak
4	5304.47	93.56			87.37	31.64	7.48	32.93	176	304	HORIZONTAL	Average
5	5361.58	66.87	74.00	-7.13	60.58	31.69	7.53	32.93	176	304	HORIZONTAL	Peak
6	5363.02	53.62	54.00	-0.38	47.33	31.69	7.53	32.93	176	304	HORIZONTAL	Average

Item 3, 4 are the fundamental frequency at 5290 MHz.

Channel 106

	Freq	Level	Limit	Over	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	5460.00	66.94	74.00	-7.06	60.48	31.76	7.62	32.92	175	308	HORIZONTAL	Peak
2	5460.00	53.02	54.00	-0.98	46.56	31.76	7.62	32.92	175	308	HORIZONTAL	Average
3	5464.93	53.89	54.00	-0.11	47.40	31.78	7.63	32.92	175	308	HORIZONTAL	Average
4	5465.66	66.74	74.00	-7.26	60.25	31.78	7.63	32.92	175	308	HORIZONTAL	Peak
5	5524.93	103.98			97.41	31.82	7.68	32.93	175	308	HORIZONTAL	Peak
6	5544.47	92.99			86.38	31.86	7.69	32.94	175	308	HORIZONTAL	Average
7	5725.00	51.78	54.00	-2.22	44.91	32.08	7.79	33.00	175	308	HORIZONTAL	Average
8	5730.07	63.51	74.00	-10.49	56.64	32.08	7.80	33.01	175	308	HORIZONTAL	Peak

Item 5, 6 are the fundamental frequency at 5530 MHz.

Channel 122

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5459.00	65.59	74.00	-8.41	57.83	6.60	34.22	33.06	185	299	Peak	HORIZONTAL
2	5460.00	51.31	54.00	-2.69	43.55	6.60	34.22	33.06	185	299	Average	HORIZONTAL
3	5463.00	65.26	68.20	-2.94	57.47	6.60	34.25	33.06	185	299	Peak	HORIZONTAL
4	5582.00	108.64			100.66	6.72	34.35	33.09	185	299	Peak	HORIZONTAL
5	5583.00	98.74			90.76	6.72	34.35	33.09	185	299	Average	HORIZONTAL
6	5725.00	68.18	68.20	-0.02	60.05	6.83	34.43	33.13	185	299	Peak	HORIZONTAL

Item 4, 5 are the fundamental frequency at 5610 MHz.

Straddle Channel

Temperature	24°C	Humidity	57%
Test Engineer	Alvin Li	Configurations	IEEE 802.11a CH 144 / Ant. 1 + Ant. 2
Test Date	Jun. 29, 2015		

Channel 144

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Pol/Phase	deg	cm	
1	5715.37	117.68			110.83	7.79	33.00	32.06	HORIZONTAL	300	155	Peak
2	5725.79	106.47			99.60	7.79	33.00	32.08	HORIZONTAL	300	155	Average
3	5850.00	47.60	54.00	-6.40	40.56	7.87	33.05	32.22	HORIZONTAL	300	155	Average
4	5851.16	59.81	74.00	-14.19	52.77	7.87	33.05	32.22	HORIZONTAL	300	155	Peak

Item 1, 2 are the fundamental frequency at 5720 MHz.

Temperature	24°C	Humidity	57%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 144 / Ant. 1 + Ant. 2

Channel 144

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Pol/Phase	deg	cm	
1	5715.37	118.44			111.59	7.79	33.00	32.06	HORIZONTAL	301	172	Peak
2	5723.47	106.57			99.70	7.79	33.00	32.08	HORIZONTAL	301	172	Average
3	5850.00	47.93	54.00	-6.07	40.89	7.87	33.05	32.22	HORIZONTAL	301	172	Average
4	5860.42	62.37	74.00	-11.63	55.32	7.87	33.06	32.24	HORIZONTAL	301	172	Peak

Item 1, 2 are the fundamental frequency at 5720 MHz.

Temperature	24°C	Humidity	57%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 142 / Ant. 1 + Ant. 2
Test Date	Jun. 29, 2015		

Channel 141

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor			
			dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5702.00	113.88			105.77	6.81	34.42	33.12	164	300 Peak	HORIZONTAL
2	5702.80	102.47			94.36	6.81	34.42	33.12	164	300 Average	HORIZONTAL
3	5861.20	50.23	54.00	-3.77	41.92	6.97	34.52	33.18	164	300 Average	HORIZONTAL
4	5862.00	63.42	74.00	-10.58	55.11	6.97	34.52	33.18	164	300 Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5710 MHz.

Temperature	24°C	Humidity	57%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 138 / Ant. 1 + Ant. 2
Test Date	Jun. 29, 2015		

Channel 138

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor			
			dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5694.00	109.46			101.36	6.81	34.41	33.12	184	348 Peak	HORIZONTAL
2	5706.00	97.70			89.58	6.83	34.42	33.13	184	348 Average	HORIZONTAL
3	5850.00	67.95	68.20	-0.25	59.66	6.95	34.51	33.17	184	348 Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5690 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

4.7. Frequency Stability Measurement

4.7.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

4.7.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

4.7.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
7. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
8. Extreme temperature is $0^\circ\text{C} \sim 45^\circ\text{C}$.

4.7.4. Test Setup Layout

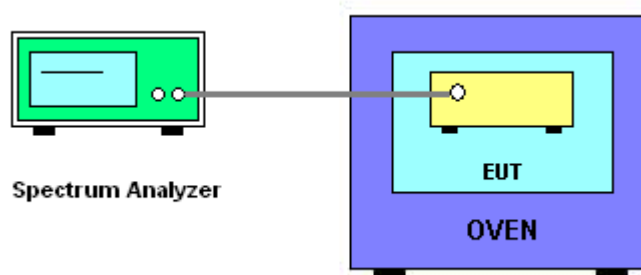

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.7.7. Test Result of Frequency Stability

Temperature	25°C	Humidity	45%
Test Engineer	Roki Liu	Test Date	Aug. 20, 2015 ~ Aug. 25, 2015

Mode: 20 MHz / Ant. 1

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5300 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5299.9864	5299.9770	5299.9882	5299.9854
110.00	5299.9854	5299.9792	5299.9905	5299.9868
93.50	5299.9847	5299.9789	5299.9864	5299.9887
Max. Deviation (MHz)	0.0153	0.0230	0.0136	0.0146
Max. Deviation (ppm)	2.89	4.34	2.57	2.75
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5300 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5299.9854	5299.9882	5299.9854	5299.9854
10	5299.9982	5299.9881	5299.9814	5299.9815
20	5299.9618	5299.9617	5299.9526	5299.9528
30	5299.9527	5299.9526	5299.9512	5299.9510
40	5299.9553	5299.9552	5299.9638	5299.9640
45	5299.9882	5299.9894	5299.9882	5299.9882
Max. Deviation (MHz)	0.0473	0.0474	0.0488	0.0490
Max. Deviation (ppm)	8.93	8.94	9.21	9.25
Result	Complies			

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5580 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5579.9786	5579.9856	5579.9786	5579.9786
110.00	5579.9802	5579.9862	5579.9806	5579.9808
93.50	5579.9786	5579.9893	5579.9786	5579.9786
Max. Deviation (MHz)	0.0214	0.0144	0.0214	0.0214
Max. Deviation (ppm)	3.84	2.58	3.84	3.84
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5580 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5579.9988	5579.9891	5579.9813	5579.9814
10	5579.9596	5579.9596	5579.9559	5579.9559
20	5579.9505	5579.9505	5579.9498	5579.9498
30	5579.9531	5579.9535	5579.9642	5579.9642
40	5579.9504	5579.9492	5579.9642	5579.9628
45	5579.9882	5579.9891	5579.9882	5579.9845
Max. Deviation (MHz)	0.0496	0.0508	0.0502	0.0502
Max. Deviation (ppm)	8.89	9.10	9.00	9.00
Result	Complies			

Mode: 40 MHz / Ant. 1

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5310 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5309.9783	5309.9882	5309.9930	5309.9826
110.00	5309.9756	5309.9804	5309.9806	5309.9808
93.50	5309.9882	5309.9849	5309.9882	5309.9882
Max. Deviation (MHz)	0.0244	0.0196	0.0194	0.0192
Max. Deviation (ppm)	4.60	3.69	3.65	3.62
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5310 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5309.9882	5309.9827	5309.9952	5310.0012
10	5309.9784	5309.9827	5309.9954	5310.0014
20	5309.9756	5309.9954	5309.9906	5309.9869
30	5309.9755	5309.9952	5310.0019	5310.0079
40	5309.9762	5309.9869	5310.0031	5310.0091
45	5309.9882	5309.9745	5310.0082	5310.0142
Max. Deviation (MHz)	0.0245	0.0255	0.0094	0.0142
Max. Deviation (ppm)	4.61	4.80	1.77	2.67
Result	Complies			

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5550 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5549.9893	5549.9936	5549.9871	5549.9854
110.00	5549.9865	5549.9925	5549.9854	5549.9964
93.50	5549.9854	5549.9846	5549.9783	5549.9932
Max. Deviation (MHz)	0.0146	0.0154	0.0217	0.0146
Max. Deviation (ppm)	2.63	2.77	3.91	2.63
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5550 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5549.9794	5549.9943	5550.0003	5550.0003
10	5549.9825	5549.9945	5550.0005	5550.0005
20	5549.9725	5549.9897	5549.9860	5549.9860
30	5549.9824	5550.0010	5550.0070	5550.0070
40	5549.9930	5550.0022	5550.0082	5550.0082
45	5549.9930	5550.0073	5550.0133	5550.0133
Max. Deviation (MHz)	0.0275	0.0103	0.0140	0.0140
Max. Deviation (ppm)	4.95	1.86	2.52	2.52
Result	Complies			

Mode: 80 MHz / Ant. 1

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5290 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5289.9921	5289.9951	5290.0011	5290.0041
110.00	5289.9923	5289.9953	5290.0013	5290.0043
93.50	5289.9937	5289.9905	5289.9868	5289.9836
Max. Deviation (MHz)	0.0079	0.0095	0.0132	0.0164
Max. Deviation (ppm)	1.49	1.80	2.50	3.10
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5290 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5289.9921	5289.9951	5290.0011	5290.0041
10	5289.9923	5289.9953	5290.0013	5290.0043
20	5289.9937	5289.9905	5289.9868	5289.9836
30	5289.9988	5290.0018	5290.0078	5290.0108
40	5290.0000	5290.0030	5290.0090	5290.0120
45	5290.0051	5290.0081	5290.0141	5290.0171
Max. Deviation (MHz)	0.0079	0.0095	0.0141	0.0171
Max. Deviation (ppm)	1.49	1.80	2.67	3.23
Result	Complies			

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5530 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5529.9972	5530.0002	5530.0062	5530.0092
110.00	5529.9974	5530.0004	5530.0064	5530.0094
93.50	5529.9988	5529.9956	5529.9919	5529.9887
Max. Deviation (MHz)	0.0028	0.0044	0.0081	0.0113
Max. Deviation (ppm)	0.51	0.80	1.46	2.04
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5530 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5529.9972	5530.0002	5530.0062	5530.0092
10	5529.9974	5530.0004	5530.0064	5530.0094
20	5529.9988	5529.9956	5529.9919	5529.9887
30	5530.0039	5530.0069	5530.0129	5530.0159
40	5530.0051	5530.0081	5530.0141	5530.0171
45	5530.0102	5530.0132	5530.0192	5530.0222
Max. Deviation (MHz)	0.0102	0.0132	0.0192	0.0222
Max. Deviation (ppm)	1.84	2.39	3.47	4.01
Result	Complies			

4.8. Antenna Requirements

4.8.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.8.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 28, 2014	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 12, 2015	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Nov. 25, 2014	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Nov. 06, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100979	9kHz~40GHz	Dec. 12, 2014	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 03, 2014	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%