



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Xirrus, Inc.
Applicant Address	2101 Corporate Center Drive, Thousand Oaks, CA 91320 USA
FCC ID	SK6-XDR240
Manufacturer's company	Lite-On Network Communication (Dongguan) Limited
Manufacturer Address	30#Keji Rd., Yin Hu Industrial Area, Qingxi Town, DongGuan City, Guangdong, China

Product Name	Wireless Access Point Radio module
Brand Name	XIRRUS
Model No.	XDR240
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Dec. 10, 2015
Final Test Date	Apr. 02, 2016
Submission Type	Original Equipment

Statement

Test result included in this report is for the IEEE 802.11n and IEEE 802.11b/g/ac of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart C, KDB558074 D01 v03r04 and KDB 662911 D01 v02r01, KDB644545 D03 v01.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. VERIFICATION OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies	5
3.5. Table for Test Modes	6
3.6. Table for Testing Locations.....	8
3.7. Table for Supporting Units	8
3.8. Table for Parameters of Test Software Setting	9
3.9. EUT Operation during Test	9
3.10. Duty Cycle.....	10
3.11. Test Configurations	11
4. TEST RESULT	14
4.1. AC Power Line Conducted Emissions Measurement.....	14
4.2. Maximum Conducted Output Power Measurement.....	18
4.3. Power Spectral Density Measurement	21
4.4. 6dB Spectrum Bandwidth Measurement	37
4.5. Radiated Emissions Measurement	47
4.6. Emissions Measurement	72
4.7. Antenna Requirements	98
5. LIST OF MEASURING EQUIPMENTS	99
6. MEASUREMENT UNCERTAINTY.....	100
APPENDIX A. TEST PHOTOS	A1 ~ A5


History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR5D1826AA	Rev. 01	Initial issue of report	Apr. 11, 2016

1. VERIFICATION OF COMPLIANCE

Product Name : Wireless Access Point Radio module
Brand Name : XIRRUS
Model No. : XDR240
Applicant : Xirrus, Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Dec. 10, 2015 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

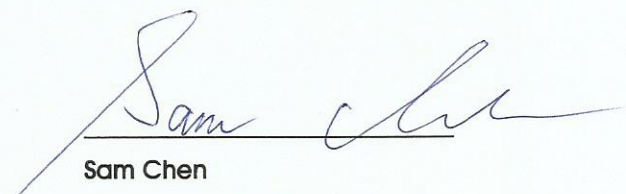

Sam Chen
SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	21.76 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	2.74 dB
4.3	15.247(e)	Power Spectral Density	Complies	3.10 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	0.14 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.01 dB
4.7	15.203	Antenna Requirements	Complies	-

Note: 1. The EUT is a limited module which only limited to the Wireless Access Point (brand: XIRRUS / model: XD4240).

2. The EUT was installed to the Wireless Access Point (brand: XIRRUS / model: XD4240) to perform all the tests.

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Product Type	WLAN (4TX, 4RX)
Radio Type	Intentional Transceiver
Power Type	From host system
Modulation	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n/ac: see the below table
Data Modulation	IEEE 802.11b: DSSS (BPSK / QPSK / CCK) IEEE 802.11g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) IEEE 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM, 1024QAM)
Data Rate (Mbps)	IEEE 802.11b: DSSS (1/ 2/ 5.5/11) IEEE 802.11g: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n/ac: see the below table
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Band Width (99%)	<u>For non-beamforming function:</u> IEEE 802.11b: 14.06 MHz IEEE 802.11g: 16.58 MHz IEEE 802.11ac MCS0/Nss1 (VHT20): 23.70 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 37.05 MHz <u>For beamforming function:</u> IEEE 802.11ac MCS0/Nss1 (VHT20): 20.38 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 36.90 MHz
Maximum Conducted Output Power	<u>For non-beamforming function:</u> IEEE 802.11b: 27.51 dBm IEEE 802.11g: 27.00 dBm IEEE 802.11ac MCS0/Nss1 (VHT20): 26.58 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 22.45 dBm <u>For beamforming function:</u> IEEE 802.11ac MCS0/Nss1 (VHT20): 27.05 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 21.36 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description
Beamforming Function	☒ With beamforming ☐ Without beamforming
	The product has beamforming function for 802.11n in 5GHz band / 802.11ac in 2.4GHz band and 5GHz band.

Antenna and Band width

Antenna	Four (TX)	
Band width Mode	20 MHz	40 MHz
IEEE 802.11b	V	X
IEEE 802.11g	V	X
IEEE 802.11n	V	V
IEEE 802.11ac	V	V

IEEE 11n Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	4	MCS 0-31
802.11n (HT40)	4	MCS 0-31
802.11ac (VHT20)	4	MCS0-11/Nss1-4
802.11ac (VHT40)	4	MCS0-11/Nss1-4
Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT supports HT20 and HT40. Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT supports VHT20 and VHT40 for 2.4GHz band. Note 2: Modulation modes consist of below configuration: HT20/HT40: IEEE 802.11n, VHT20/VHT40: IEEE 802.11ac		

3.2. Accessories

N/A


3.3. Table for Filed Antenna

Ant.	Brand	Model No.	Type	Connector	Gain (dBi)		
					2.4GHz Band	5GHz Band 1	5GHz Band 4
1	Walsin	30100006976D	PIFA	I-PEX	-3.0	3.8	4.3
2	Walsin	30100006976D	PIFA	I-PEX	-1.1	4.6	2.4
3	Walsin	30100006976D	PIFA	I-PEX	-0.6	4.6	4.7
4	Walsin	30100006976D	PIFA	I-PEX	3.9	1.5	5.2

Note: The EUT has four antennas (4TX, 4RX).

Chain 1, Chain 2, Chain 3 and Chain 4 could transmit/receive simultaneously.

Chain 1: Connect to Ant. 1, Chain 2: Connect to Ant. 2, Chain 3: Connect to Ant. 3, Chain 4: Connect to Ant. 4.

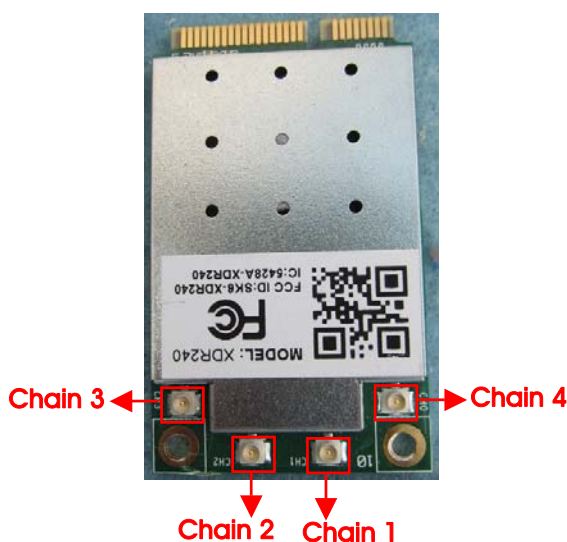

3.4. Table for Carrier Frequencies

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

For 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	CTX	-	-	-
Maximum Conducted Output Power	<u>For non-beamforming function:</u>			
	11b/CCK	1 Mbps	1/6/11	1+2+3+4
	11g/BPSK	6 Mbps	1/6/11	1+2+3+4
	11ac VHT20	MCS0/Nss1	1/6/11	1+2+3+4
	11ac VHT40	MCS0/Nss1	3/6/9	1+2+3+4
	<u>For beamforming function:</u>			
	11ac VHT20	MCS0/Nss1	1/6/11	1+2+3+4
	11ac VHT40	MCS0/Nss1	3/6/9	1+2+3+4
Power Spectral Density	<u>For non-beamforming function:</u>			
	11b/CCK	1 Mbps	1/6/11	1+2+3+4
	11g/BPSK	6 Mbps	1/6/11	1+2+3+4
	11ac VHT20	MCS0/Nss1	1/6/11	1+2+3+4
	11ac VHT40	MCS0/Nss1	3/6/9	1+2+3+4
	<u>For beamforming function:</u>			
	11ac VHT20	MCS0/Nss1	1/6/11	1+2+3+4
	11ac VHT40	MCS0/Nss1	3/6/9	1+2+3+4
6dB Spectrum Bandwidth	<u>For non-beamforming function:</u>			
	11b/CCK	1 Mbps	1/6/11	1+2+3+4
	11g/BPSK	6 Mbps	1/6/11	1+2+3+4
	11ac VHT20	MCS0/Nss1	1/6/11	1+2+3+4
	11ac VHT40	MCS0/Nss1	3/6/9	1+2+3+4
	<u>For beamforming function:</u>			
	11ac VHT20	MCS0/Nss1	1/6/11	1+2+3+4
	11ac VHT40	MCS0/Nss1	3/6/9	1+2+3+4
Radiated Emissions 9kHz~1GHz	CTX	-	-	-

Radiated Emissions 1GHz~10 th Harmonic	<u>For non-beamforming function:</u>			
	11b/CCK	1 Mbps	1/6/11	1+2+3+4
	11g/BPSK	6 Mbps	1/6/11	1+2+3+4
	11ac VHT20	MCS0/Nss1	1/6/11	1+2+3+4
	11ac VHT40	MCS0/Nss1	3/6/9	1+2+3+4
	<u>For beamforming function:</u>			
	11ac VHT20	MCS0/Nss1	1/6/11	1+2+3+4
	11ac VHT40	MCS0/Nss1	3/6/9	1+2+3+4
Band Edge Emissions	<u>For non-beamforming function:</u>			
	11b/CCK	1 Mbps	1/6/11	1+2+3+4
	11g/BPSK	6 Mbps	1/6/11	1+2+3+4
	11ac VHT20	MCS0/Nss1	1/6/11	1+2+3+4
	11ac VHT40	MCS0/Nss1	3/6/9	1+2+3+4
	<u>For beamforming function:</u>			
	11ac VHT20	MCS0/Nss1	1/6/11	1+2+3+4
	11ac VHT40	MCS0/Nss1	3/6/9	1+2+3+4

Note: 1. VHT20/VHT40 covers HT20/HT40, due to same modulation. The power setting for 802.11n HT20 and HT40 are the same or lower than 802.11ac VHT20 and VHT40.

2. There are two functions of EUT, one is beamforming function, and the other is non-beamforming function for 802.11n in 5GHz band / 802.11ac in 2.4GHz band and 5GHz band. All test results were recorded in the report.

The following test modes were performed for all tests:

For Radiated Emissions 9kHz~1GHz test:

Mode 1. EUT Z axis

Mode 2. EUT Y axis

Mode 1 is the worst case, so it was selected to record in this test report.

For Radiated Emissions 1GHz~10th Harmonic test:

The EUT was performed at X axis, Y axis and Z axis position for Radiated emission above 1GHz test, and the worst case was found at Z axis. So the measurement will follow this same test configuration.

Note: The Wireless Access Point (brand: XIRRUS / model: XD4240) will install four radio modules. These four radios will be operated in different bands. If they are used in the same band, the output power of each radio will be reduced to make sure that total power is equal to max output power of single radio module.

3.6. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Designation No.	IC File No.
03CH01-CB	SAC	Hsin Chu	TW0006	IC 4086D
CO01-CB	Conduction	Hsin Chu	TW0006	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Supporting Units

For Test Site No: 03CH01-CB

For non-beamforming function:

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E4300	DoC
Wireless Access Point	XIRRUS	XD4240	SK6-XDR240
PoE	Microsemi	PD-9501-10G	N/A

For beamforming function:

Support Unit	Brand	Model	FCC ID
Notebook*2	DELL	E4300	DoC
Wireless Access Point	XIRRUS	XD4240	SK6-XDR240
PoE	Microsemi	PD-9501-10G	N/A
WLAN ac Dongle (RX Device)	Broadcom	Bcm4366	DoC

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	DoC
Wireless Access Point	XIRRUS	XD4240	SK6-XDR240
PoE	Microsemi	PD-9501-10G	N/A

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	DoC
Wireless Access Point	XIRRUS	XD4240	SK6-XDR240
PoE	Microsemi	PD-9501-10G	N/A

3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Test Function	Non-beamforming function					
Test Software Version	Xircon V1.0.2.25					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11b	78	81	75	-	-	-
802.11g	69	81	69	-	-	-
802.11ac MCS0/Nss1 VHT20	65	81	63	-	-	-
802.11ac MCS0/Nss1 VHT40	-	-	-	57	62	56

Test Function	Beamforming function					
Test Software Version	Xircon V1.0.2.25					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11ac MCS0/Nss1 VHT20	64	81	63	-	-	-
802.11ac MCS0/Nss1 VHT40	-	-	-	54	60	53

3.9. EUT Operation during Test

For non-beamforming function:

The EUT was programmed to be in continuously transmitting mode.

For beamforming function:

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN XP were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe" to link with the remote workstation to receive and transmit packet by RX Device and transmit duty cycle no less 98%

3.10. Duty Cycle

For non-beamforming function:


Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11b	2.059	2.083	98.85	0.05	0.01
802.11g	2.060	2.083	98.90	0.05	0.01
802.11ac MCS0/Nss1 VHT20	1.920	1.950	98.46	0.07	0.01
802.11ac MCS0/Nss1 VHT40	0.930	0.955	97.38	0.12	1.08

For beamforming function:

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11ac MCS0/Nss1 VHT20	4.056	4.128	98.26	0.08	0.01
802.11ac MCS0/Nss1 VHT40	3.690	3.990	92.48	0.34	0.27

3.11. Test Configurations


3.11.1. AC Power Line Conduction Emissions Test Configuration

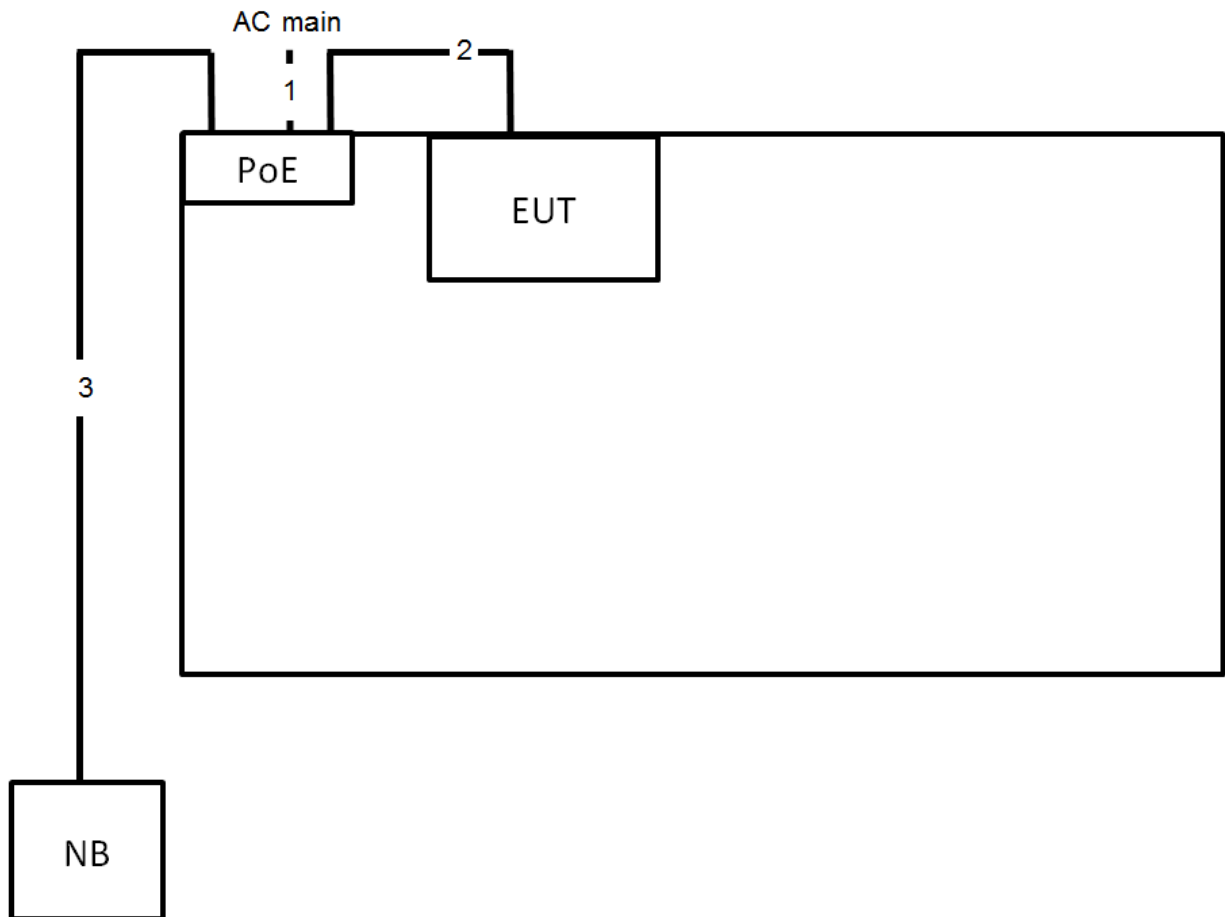

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	1.5m
3	RJ-45 cable	No	10m


3.11.2. Radiation Emissions Test Configuration

For non-beamforming function:

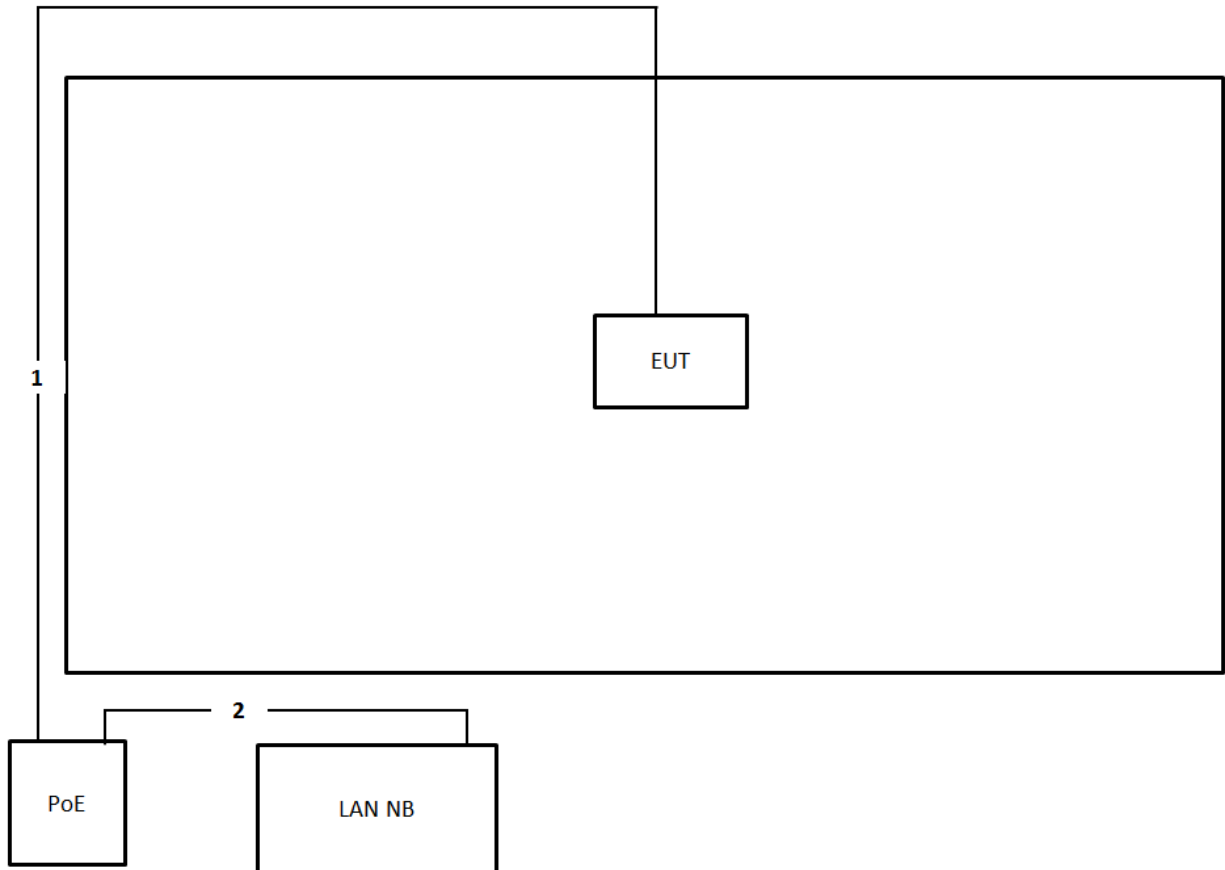

Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	RJ-45 cable	No	1.5m

For beamforming function:

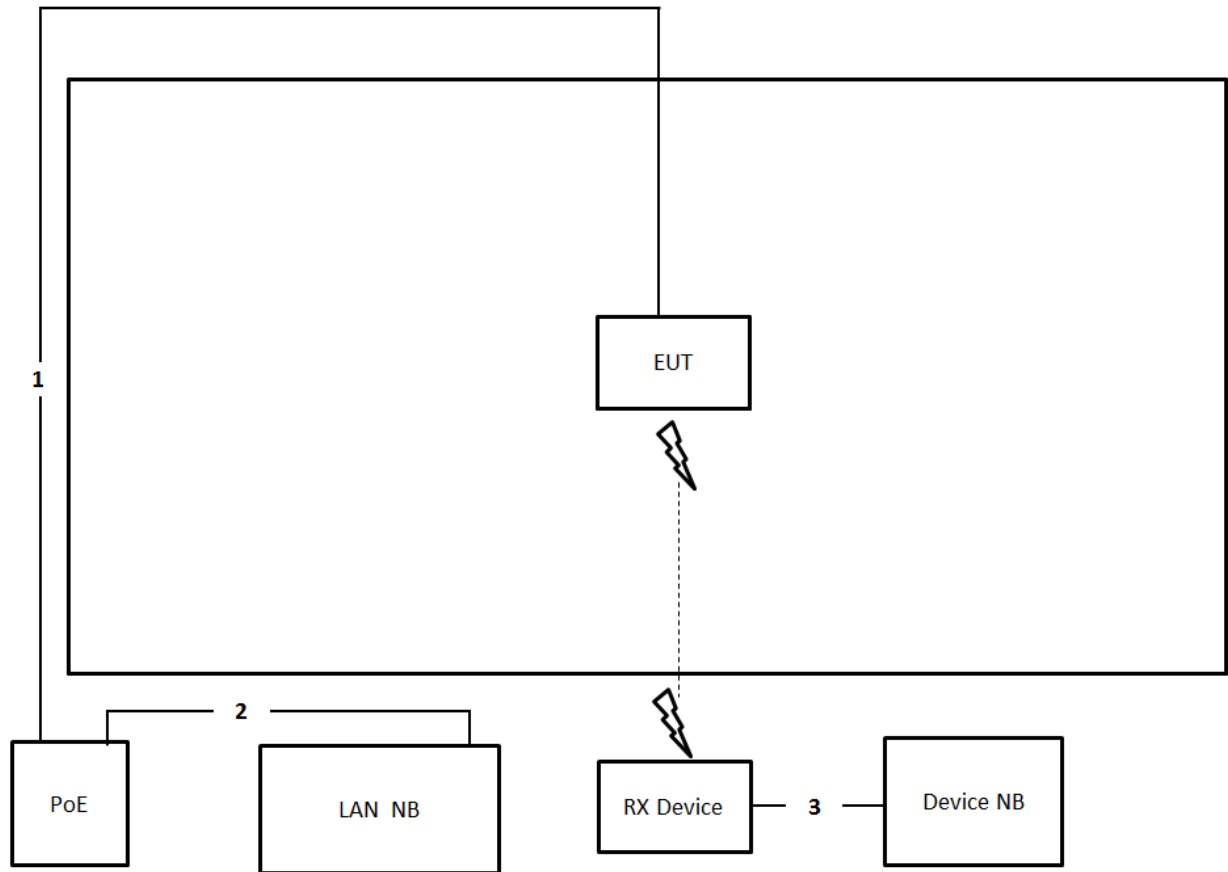

Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	RJ-45 cable	No	1.5m
3	RJ-45 cable	No	1.5m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

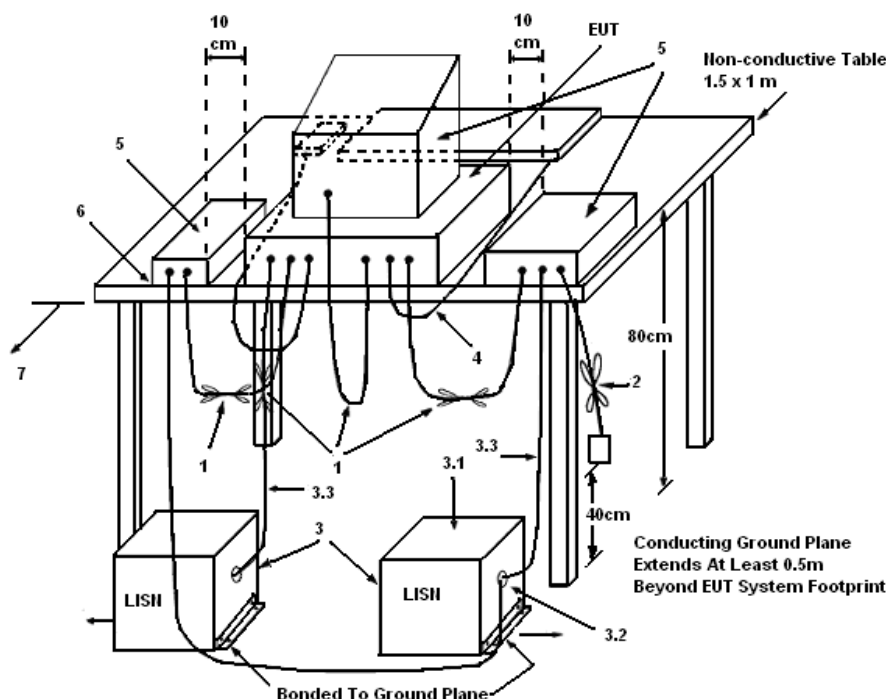

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	22°C	Humidity	57%
Test Engineer	Deven Huang	Phase	Line
Configuration	CTX		

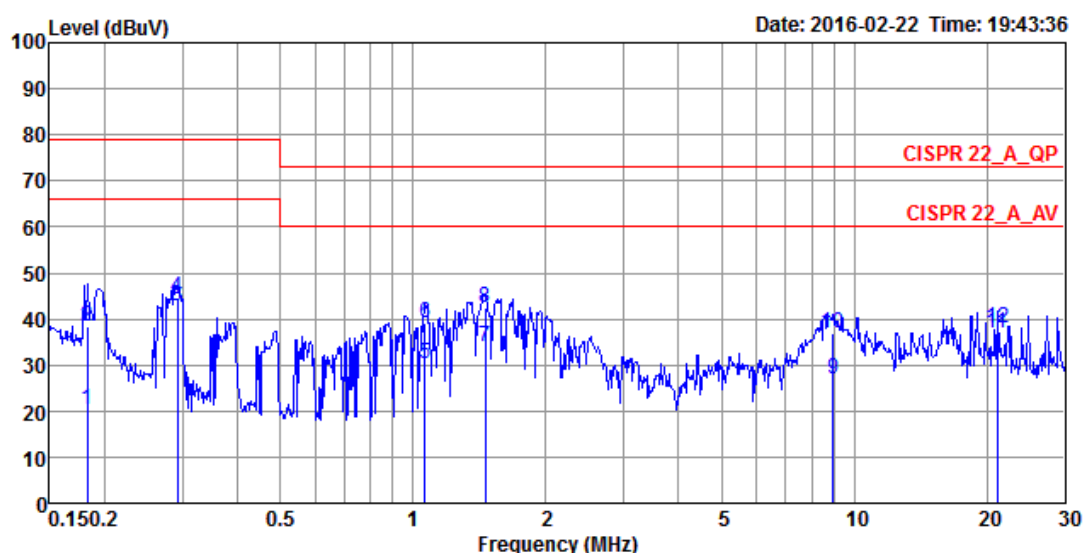

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1825	20.42	-45.58	66.00	10.47	9.93	0.02	LINE	Average
2	0.1825	38.40	-40.60	79.00	28.45	9.93	0.02	LINE	QP
3	0.2924	42.86	-23.14	66.00	32.89	9.93	0.04	LINE	Average
4	0.2924	44.82	-34.18	79.00	34.85	9.93	0.04	LINE	QP
5	1.0653	30.25	-29.75	60.00	20.24	9.96	0.05	LINE	Average
6	1.0653	39.24	-33.76	73.00	29.23	9.96	0.05	LINE	QP
7	1.4562	33.90	-26.10	60.00	23.86	9.98	0.06	LINE	Average
8	1.4562	42.31	-30.69	73.00	32.27	9.98	0.06	LINE	QP
9	8.9637	26.89	-33.11	60.00	16.52	10.16	0.21	LINE	Average
10	8.9637	36.95	-36.05	73.00	26.58	10.16	0.21	LINE	QP
11	21.0977	36.73	-23.27	60.00	26.00	10.47	0.26	LINE	Average
12	21.0977	37.97	-35.03	73.00	27.24	10.47	0.26	LINE	QP

Temperature	22°C	Humidity	57%
Test Engineer	Deven Huang	Phase	Neutral
Configuration	CTX		

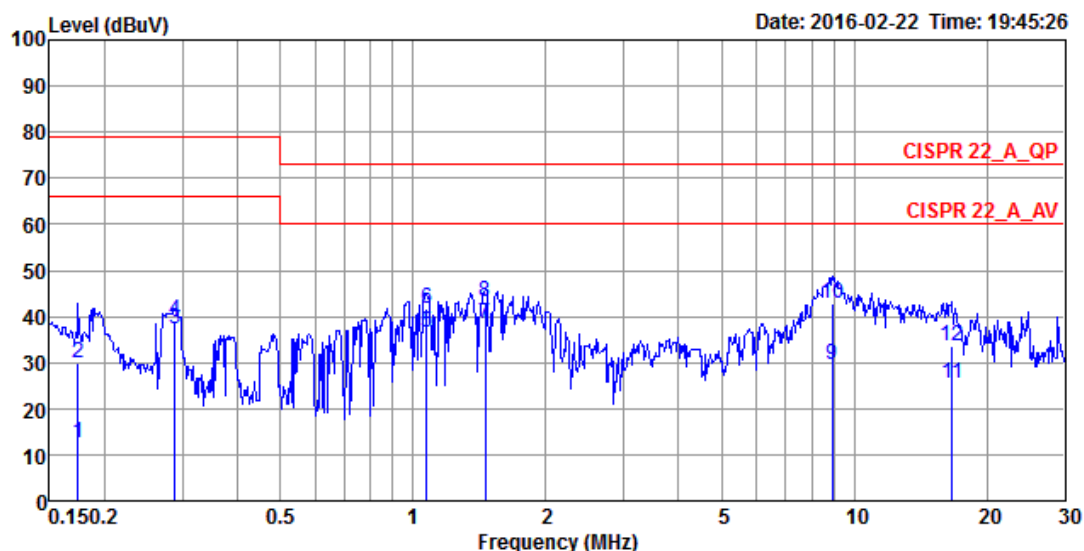

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1740	12.60	-53.40	66.00	2.79	9.79	0.02	NEUTRAL	Average
2	0.1740	29.91	-49.09	79.00	20.10	9.79	0.02	NEUTRAL	QP
3	0.2878	37.16	-28.84	66.00	27.33	9.79	0.04	NEUTRAL	Average
4	0.2878	39.23	-39.77	79.00	29.40	9.79	0.04	NEUTRAL	QP
5	1.0710	36.41	-23.59	60.00	26.55	9.81	0.05	NEUTRAL	Average
6	1.0710	41.71	-31.29	73.00	31.85	9.81	0.05	NEUTRAL	QP
7	1.4562	38.24	-21.76	60.00	28.35	9.83	0.06	NEUTRAL	Average
8	1.4562	43.21	-29.79	73.00	33.32	9.83	0.06	NEUTRAL	QP
9	8.9163	29.70	-30.30	60.00	19.50	9.99	0.21	NEUTRAL	Average
10	8.9163	42.96	-30.04	73.00	32.76	9.99	0.21	NEUTRAL	QP
11	16.6612	25.43	-34.57	60.00	15.04	10.13	0.26	NEUTRAL	Average
12	16.6612	33.47	-39.53	73.00	23.08	10.13	0.26	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

The limit for output power is 30dBm.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

4.2.3. Test Procedures

1. Test procedures refer KDB558074 D01 v03r04 section 9.2.3.2 Measurement using a power meter (PM).
2. Multiple antenna systems was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

4.2.4. Test Setup Layout

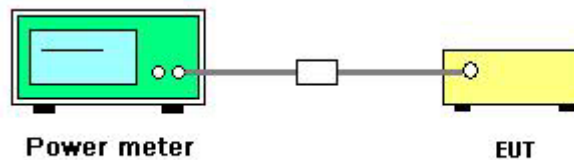

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	59%
Test Engineer	Peter Wu	Test Date	Feb. 25, 2016~Feb. 26, 2016
Test Function	Non-beamforming function		

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	20.68	20.25	19.94	20.55	26.38	30.00	Complies
	2437 MHz	21.91	21.02	21.12	21.82	27.51	30.00	Complies
	2462 MHz	19.85	19.51	19.32	19.67	25.61	30.00	Complies
802.11g	2412 MHz	18.49	18.19	17.58	18.14	24.13	30.00	Complies
	2437 MHz	21.44	20.77	20.70	20.96	27.00	30.00	Complies
	2462 MHz	18.26	17.98	17.39	18.03	23.95	30.00	Complies
802.11ac	2412 MHz	17.62	17.15	17.11	17.44	23.36	30.00	Complies
MCS0/Nss1	2437 MHz	21.15	20.27	20.22	20.53	26.58	30.00	Complies
VHT20	2462 MHz	17.28	16.89	16.31	16.45	22.77	30.00	Complies
802.11ac	2422 MHz	15.18	15.15	14.77	15.35	21.14	30.00	Complies
MCS0/Nss1	2437 MHz	16.42	16.39	16.37	16.52	22.45	30.00	Complies
VHT40	2452 MHz	14.88	14.92	14.69	14.87	20.86	30.00	Complies

Temperature	25°C	Humidity	59%
Test Engineer	Peter Wu	Test Date	Mar. 29, 2016
Test Function	Beamforming function		

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11ac	2412 MHz	16.27	15.92	15.68	15.81	21.95	29.79	Complies
MCS0/Nss1	2437 MHz	21.66	20.59	21.02	20.75	27.05	29.79	Complies
VHT20	2462 MHz	16.07	15.82	15.36	15.75	21.78	29.79	Complies
802.11ac	2422 MHz	14.08	13.99	13.24	14.01	19.86	29.79	Complies
MCS0/Nss1	2437 MHz	15.61	15.25	14.96	15.49	21.36	29.79	Complies
VHT40	2452 MHz	13.97	13.62	12.93	13.77	19.61	29.79	Complies

Note: $Directional\ Gain = 10 \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{K=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.21\text{ dBi} > 6\text{ dBi}$, so limit = $30 - (6.21 - 6) = 29.79\text{ dBm}$.

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

4.3.3. Test Procedures

1. Test was performed in accordance with KDB558074 D01 v03r04 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$ (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be $\leq 8 \text{ dBm}$.

4.3.4. Test Setup Layout

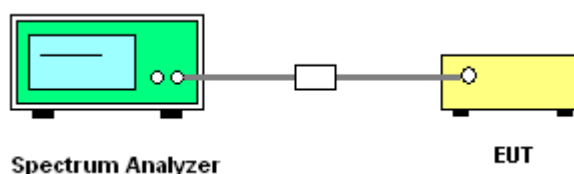

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	25°C	Humidity	59%
Test Engineer	Peter Wu	Test Function	Non-beamforming function

Mode	Frequency	Power Density (dBm/3kHz)					Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	-2.26	-2.77	-3.54	-1.74	3.49	7.79	Complies
	2437 MHz	-1.20	-2.36	-1.71	-0.31	4.69	7.79	Complies
	2462 MHz	-2.76	-2.02	-3.55	-3.98	3.01	7.79	Complies
802.11g	2412 MHz	-6.96	-7.69	-8.03	-8.29	-1.69	7.79	Complies
	2437 MHz	-4.42	-4.57	-5.89	-5.20	1.04	7.79	Complies
	2462 MHz	-6.83	-6.15	-6.67	-6.66	-0.55	7.79	Complies
802.11ac MCS0/Nss1 VHT20	2412 MHz	-11.07	-10.71	-9.69	-10.44	-4.43	7.79	Complies
	2437 MHz	-5.23	-4.63	-3.40	-5.08	1.50	7.79	Complies
	2462 MHz	-9.04	-9.20	-9.78	-8.32	-3.03	7.79	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	-14.09	-14.71	-14.15	-14.99	-8.45	7.79	Complies
	2437 MHz	-13.44	-13.19	-13.13	-12.28	-6.97	7.79	Complies
	2452 MHz	-14.74	-14.95	-15.37	-13.78	-8.65	7.79	Complies

Note: $Directional\ Gain = 10 \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{K=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.21\text{ dBi} > 6\text{ dBi}$, so limit = $8 - (6.21 - 6) = 7.79\text{ dBm/3kHz}$.

Temperature	25°C	Humidity	59%
Test Engineer	Peter Wu	Test Function	Beamforming function

Mode	Frequency	Power Density (dBm/3kHz)					Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11ac MCS0/Nss1 VHT20	2412 MHz	-7.57	-8.77	-9.39	-10.33	-2.88	7.79	Complies
	2437 MHz	-2.15	-3.27	-5.80	-4.75	2.25	7.79	Complies
	2462 MHz	-7.65	-8.15	-9.58	-9.27	-2.57	7.79	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	-12.08	-16.10	-15.79	-14.94	-8.39	7.79	Complies
	2437 MHz	-12.92	-13.71	-14.01	-13.80	-7.57	7.79	Complies
	2452 MHz	-13.52	-14.19	-16.69	-15.07	-8.69	7.79	Complies

Note: $Directional\ Gain = 10 \log \left[\frac{\sum_{j=1}^{N_{SS}} \left(\sum_{K=1}^{N_{ANT}} g_{j,k} \right)^2}{N_{ANT}} \right] = 6.21\text{ dBi} > 6\text{dBi}$, so limit = $8 - (6.21 - 6) = 7.79\text{dBm/3kHz}$.

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

For non-beamforming function:

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1



Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 3




Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 3




Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 4




Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1

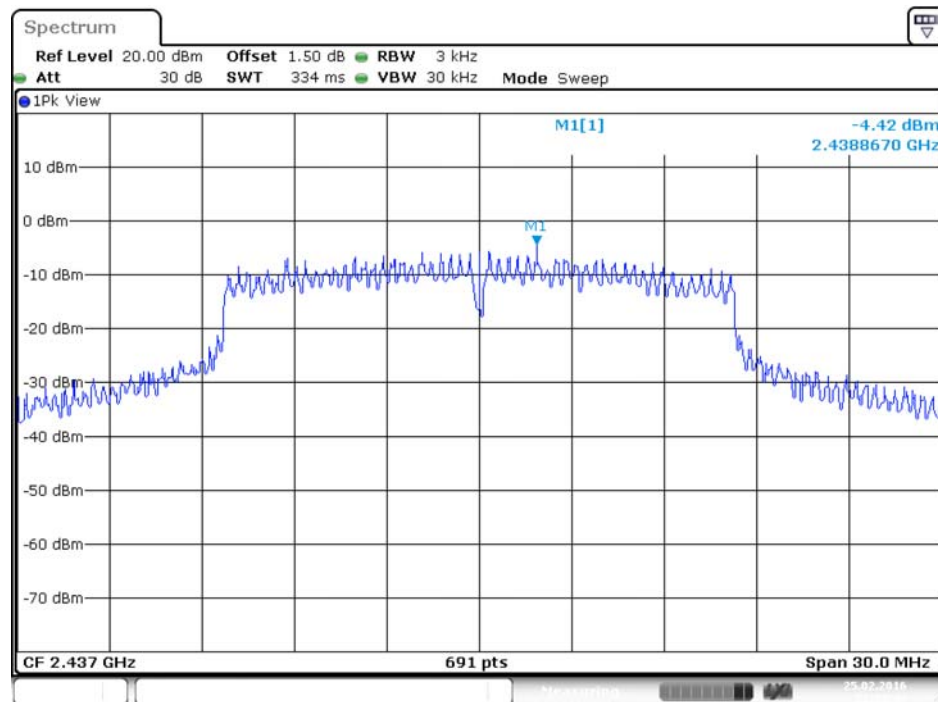


Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 2

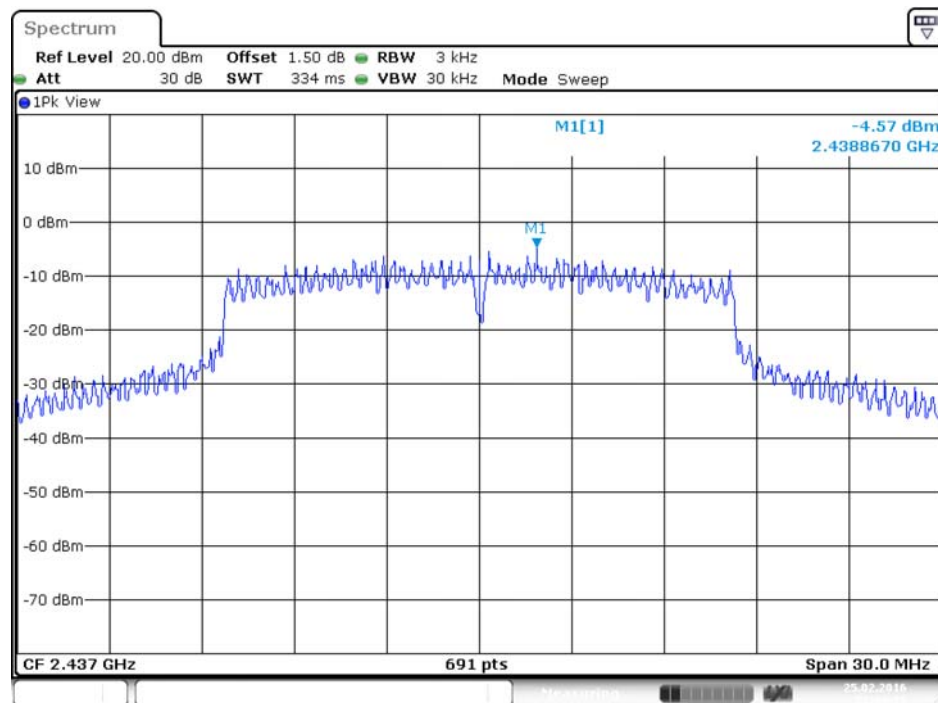


Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 3

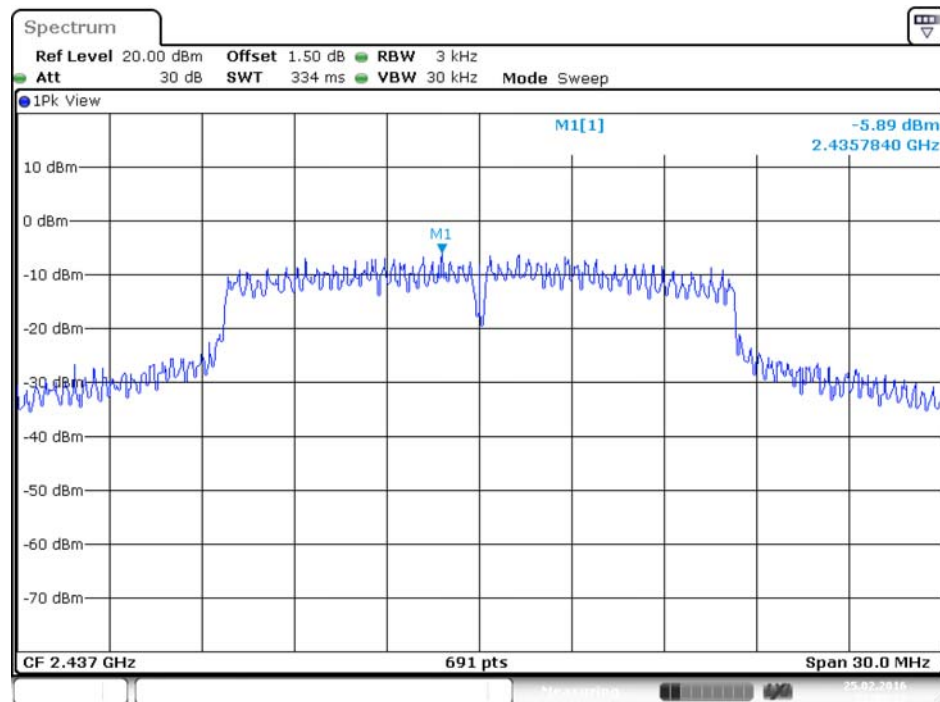


Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 4

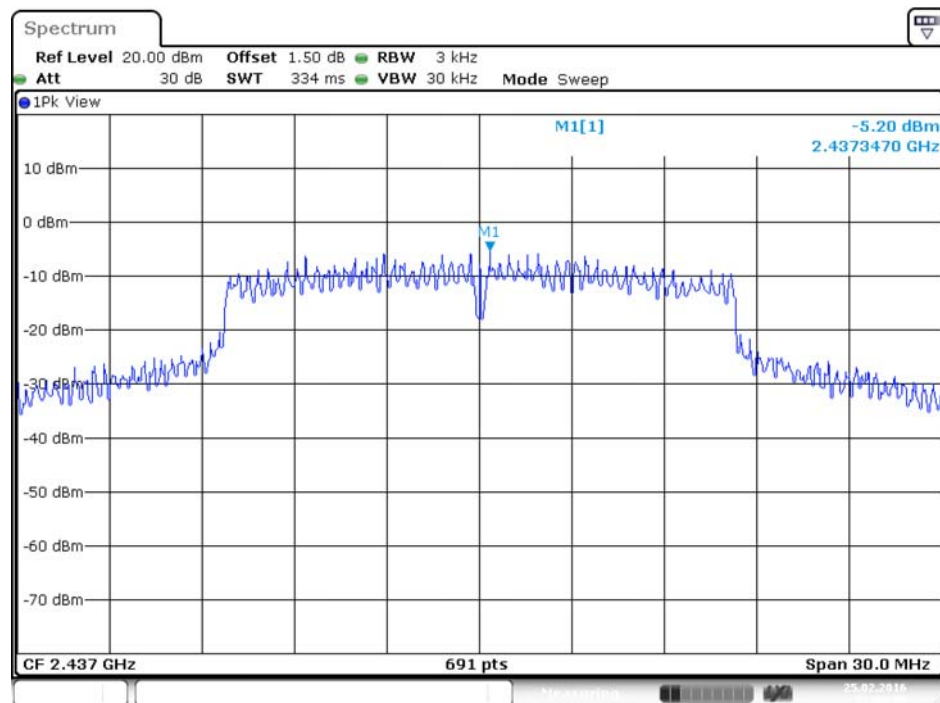


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1

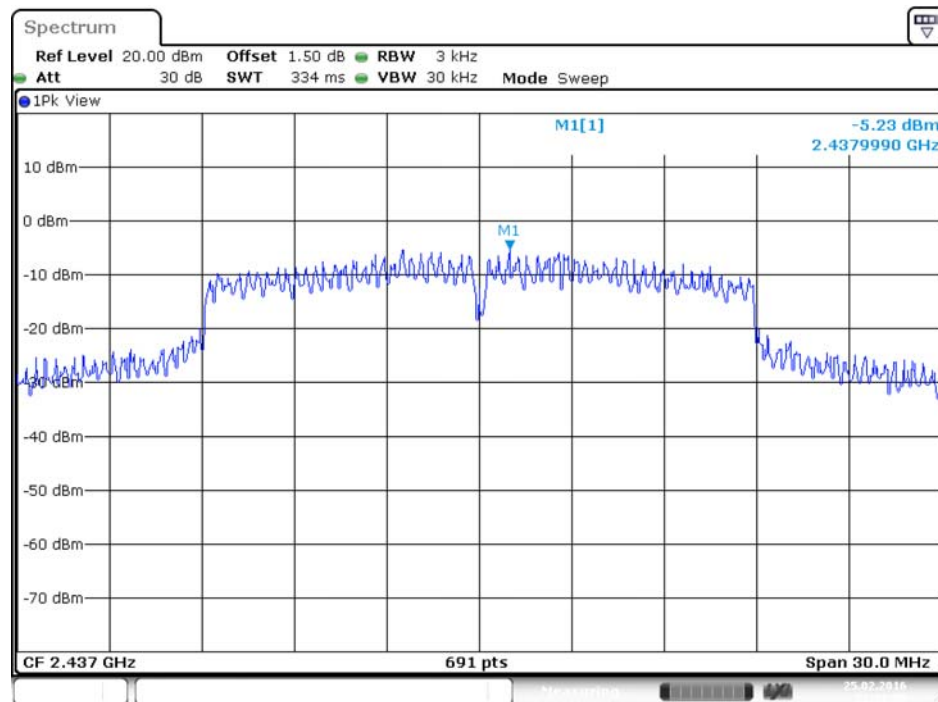


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 2

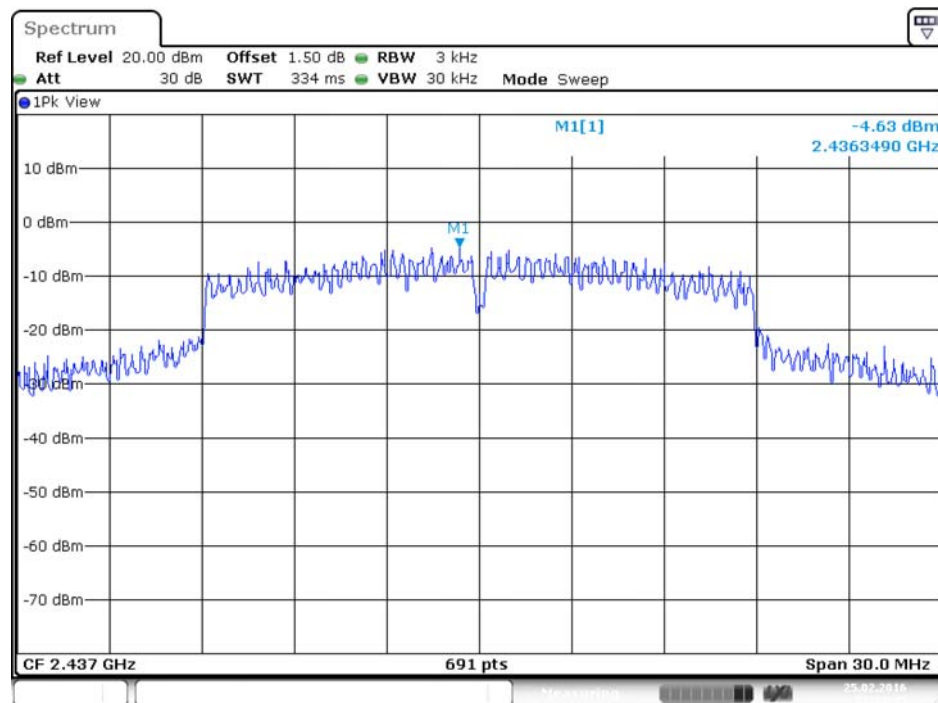


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 3

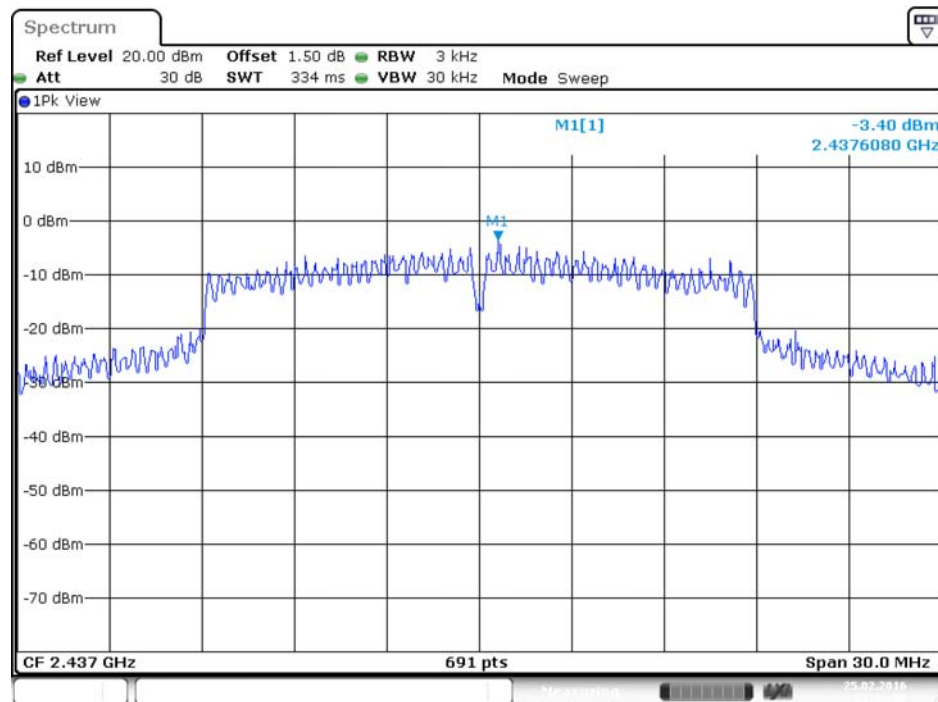


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 4

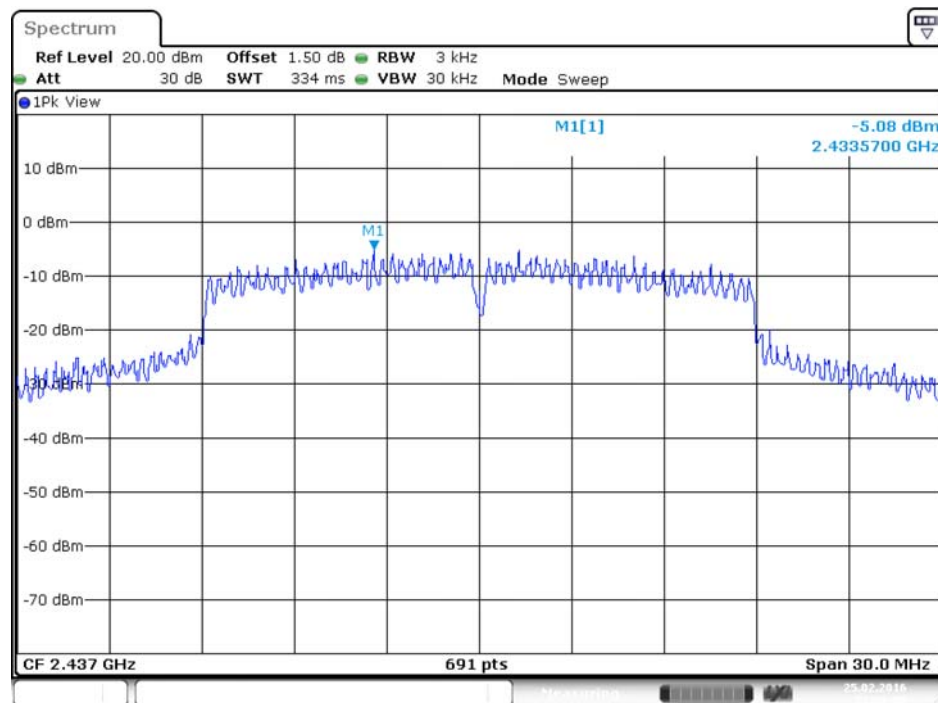


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 1

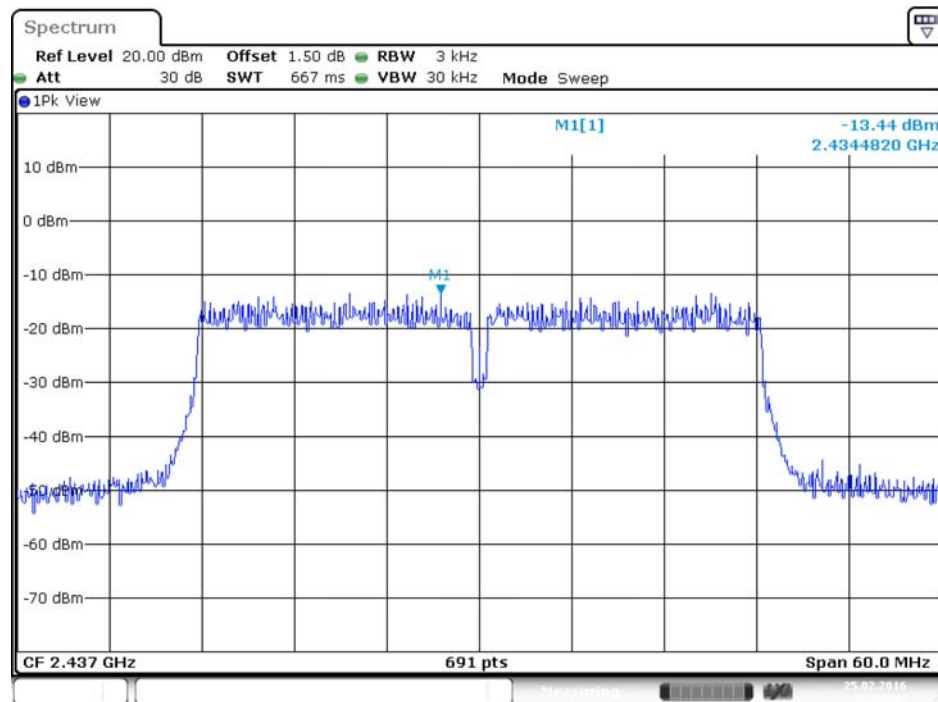


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 2

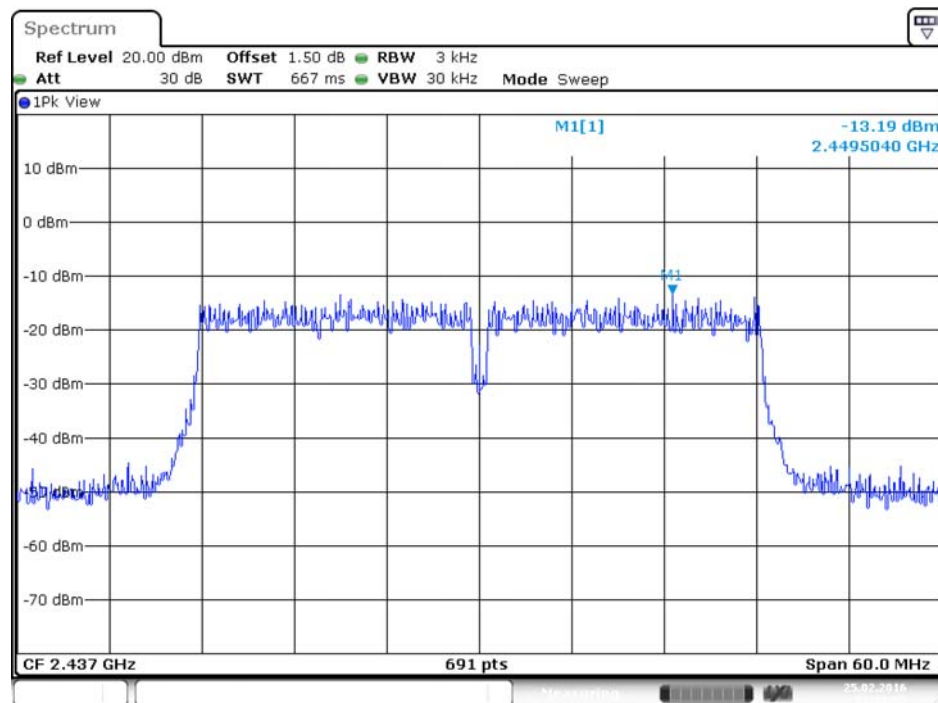

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 3

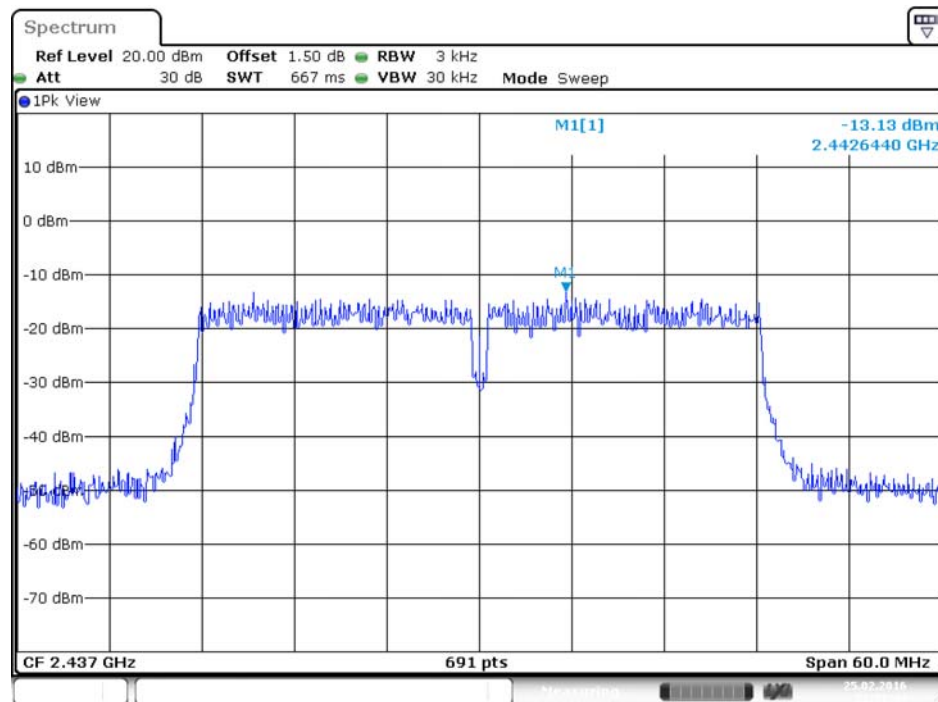


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 4

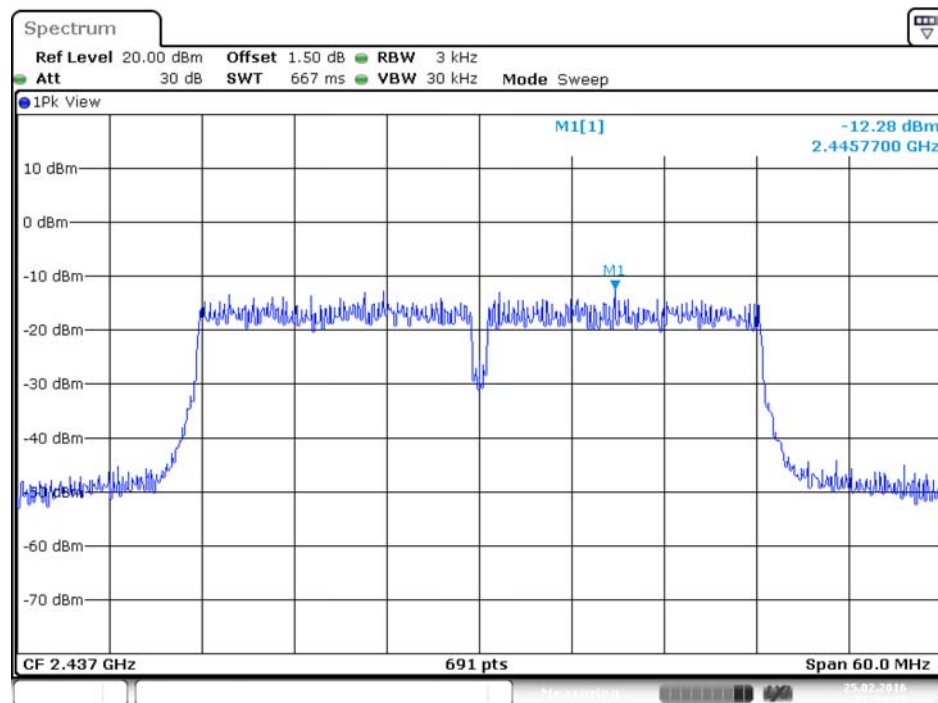


For beamforming function:


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1

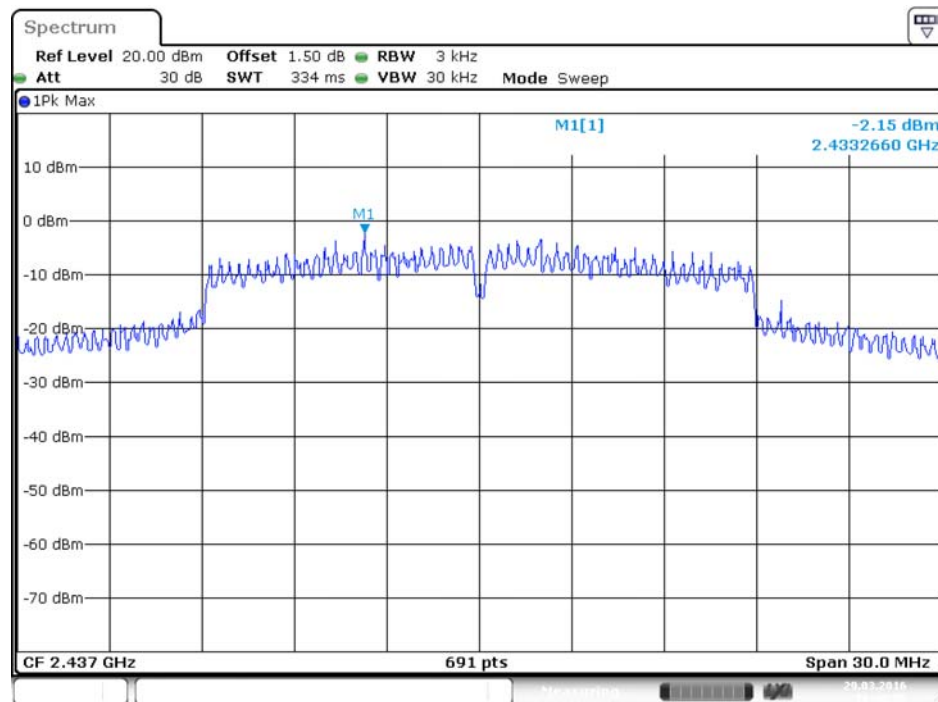

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 2

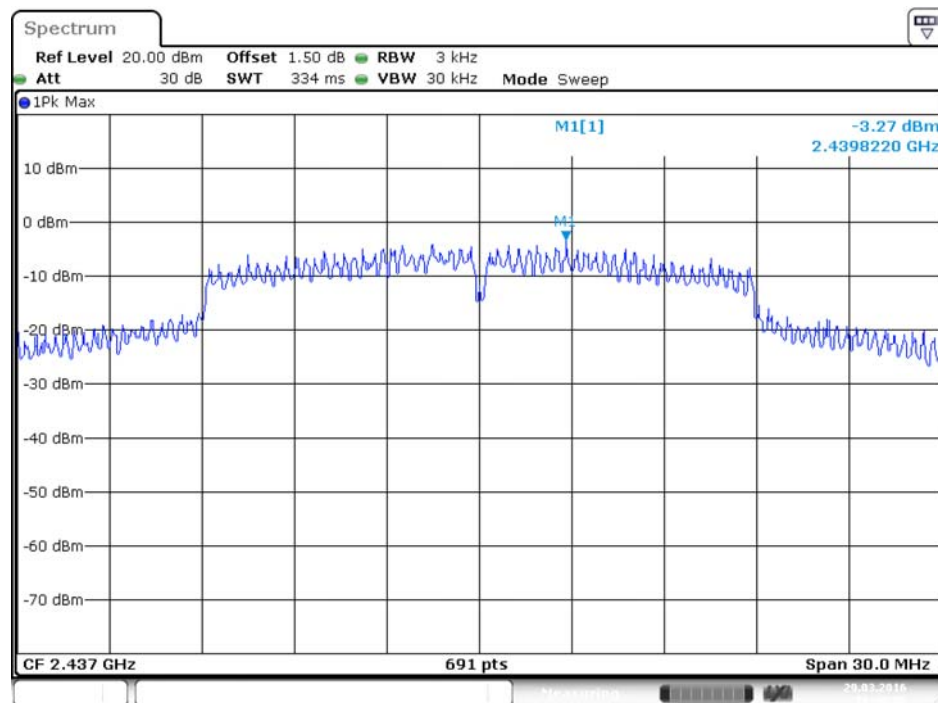


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 3

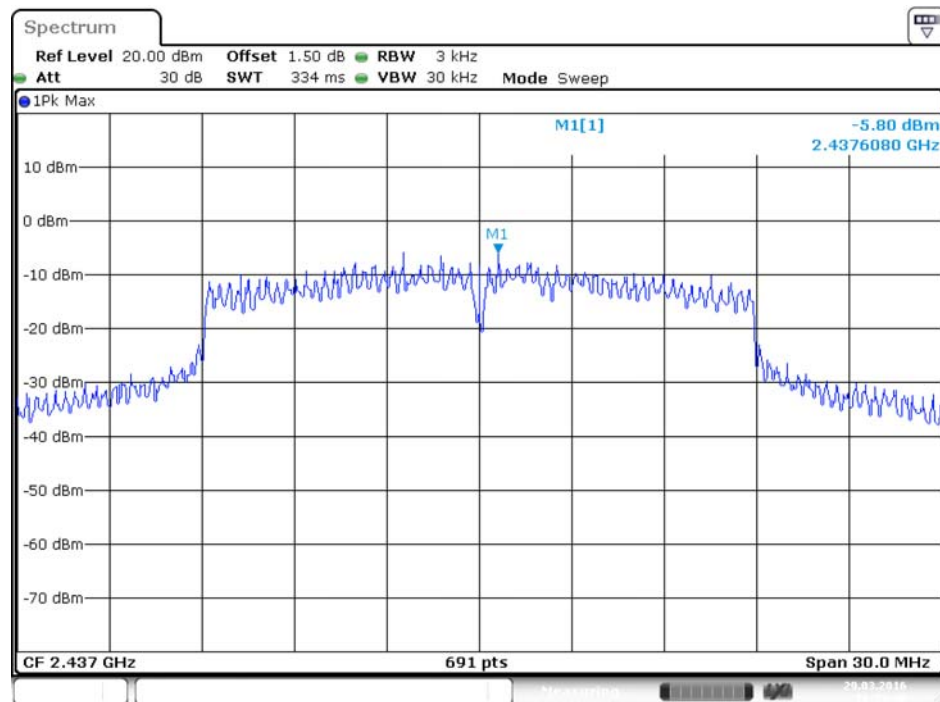


Date: 29.MAR.2016 16:39:48

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 4

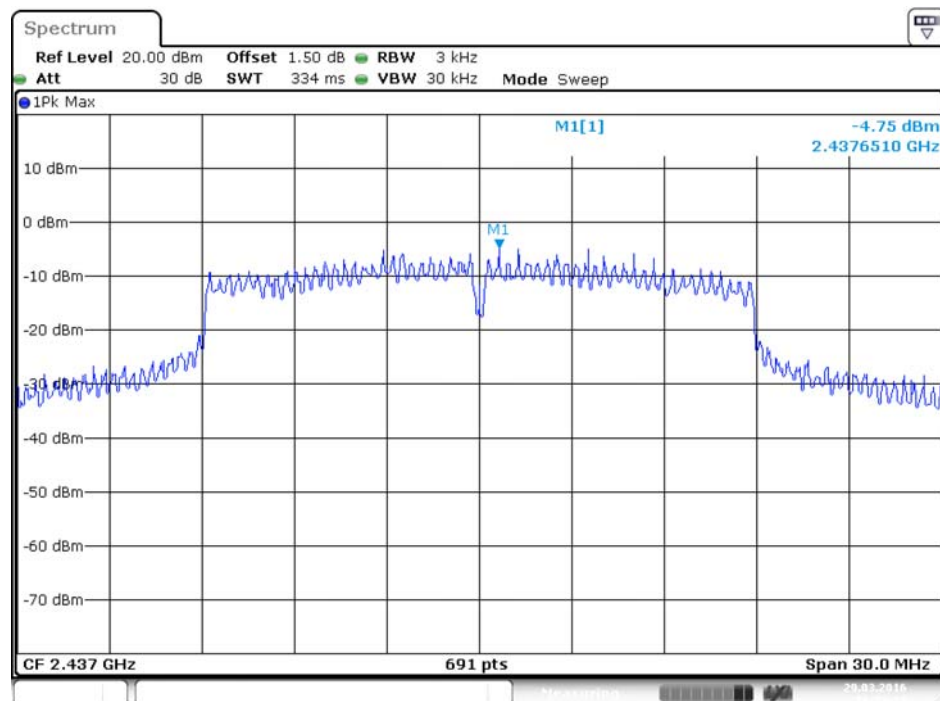


Date: 29.MAR.2016 16:39:18

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 1

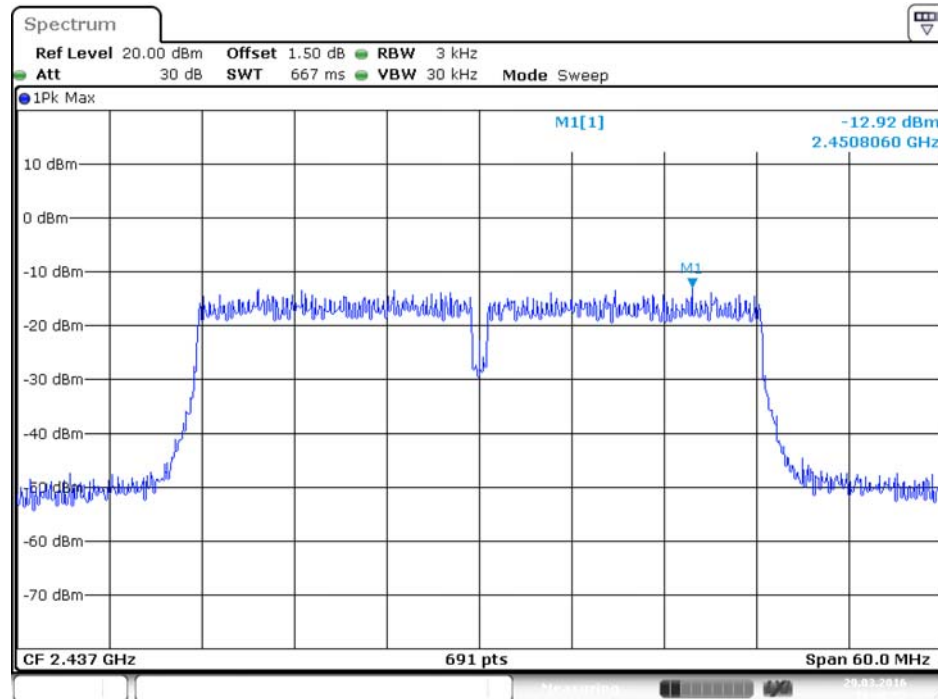


Date: 29.MAR.2016 16:48:52

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 2

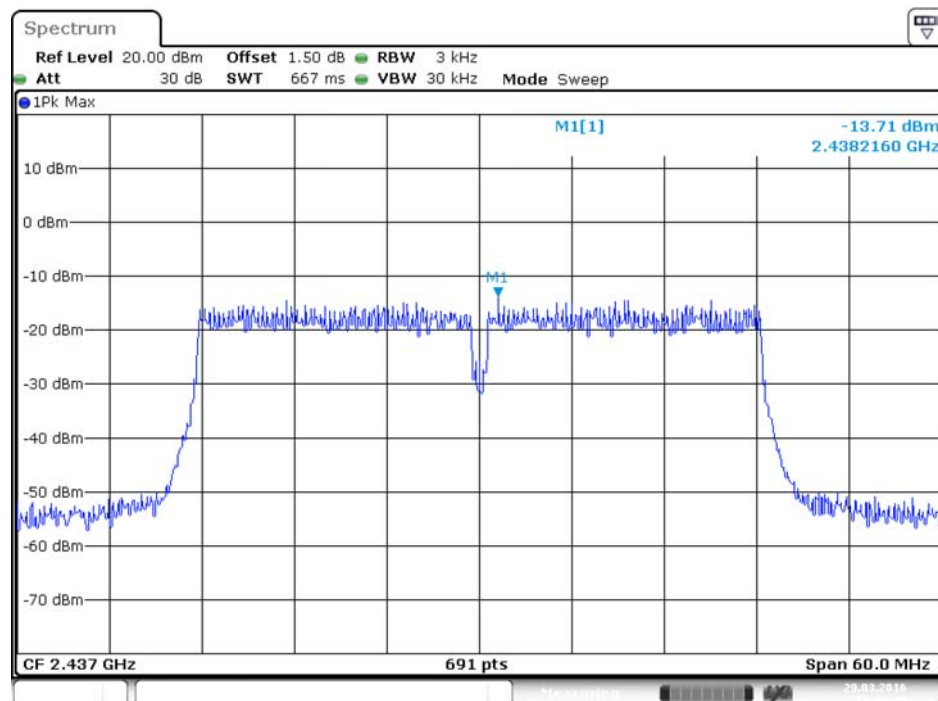


Date: 29.MAR.2016 16:49:23

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 3

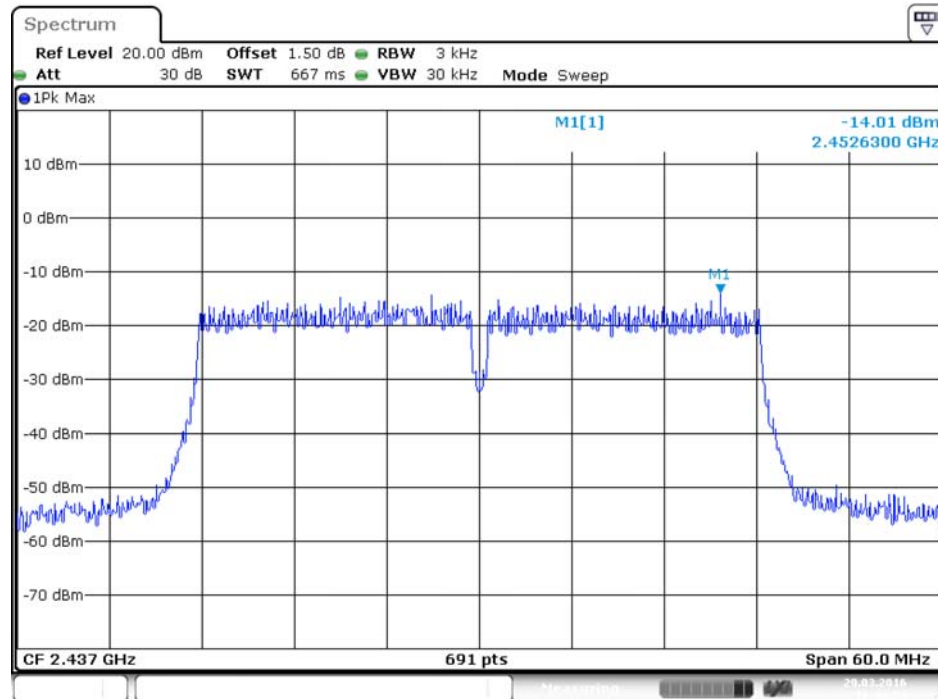

Date: 29.MAR.2016 16:49:55

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 4

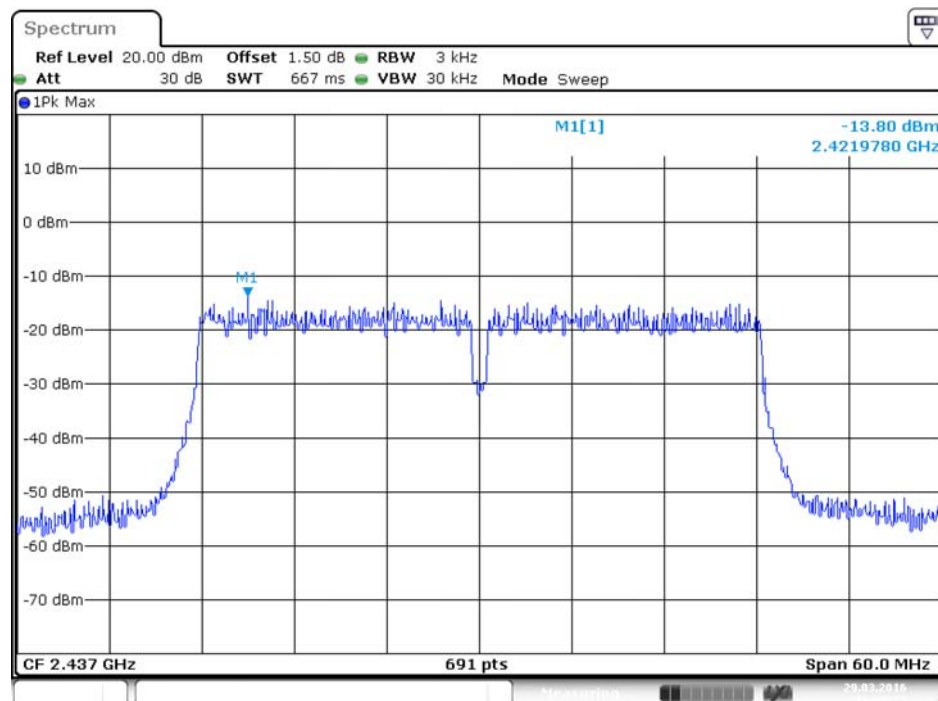

Date: 29.MAR.2016 16:50:27

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB558074 D01 v03r04 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 8.0 DTS bandwidth = > 8.1 Option 1.
3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	25°C	Humidity	59%
Test Engineer	Peter Wu	Test Function	Non-beamforming function

Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11b	2412 MHz	8.06	12.07	500	Complies
	2437 MHz	9.74	14.06	500	Complies
	2462 MHz	7.07	11.55	500	Complies
802.11g	2412 MHz	5.51	15.80	500	Complies
	2437 MHz	5.45	16.58	500	Complies
	2462 MHz	5.45	16.15	500	Complies
802.11ac MCS0/Nss1 VHT20	2412 MHz	11.01	16.76	500	Complies
	2437 MHz	10.84	23.70	500	Complies
	2462 MHz	11.30	17.02	500	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	35.71	36.90	500	Complies
	2437 MHz	35.83	37.05	500	Complies
	2452 MHz	35.71	36.76	500	Complies

Temperature	25°C	Humidity	59%
Test Engineer	Peter Wu	Test Function	Beamforming function


Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11ac MCS0/Nss1 VHT20	2412 MHz	15.01	17.71	500	Complies
	2437 MHz	13.62	20.38	500	Complies
	2462 MHz	12.58	17.63	500	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	36.41	36.90	500	Complies
	2437 MHz	36.29	36.90	500	Complies
	2452 MHz	36.17	36.76	500	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

For non-beamforming function:


6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

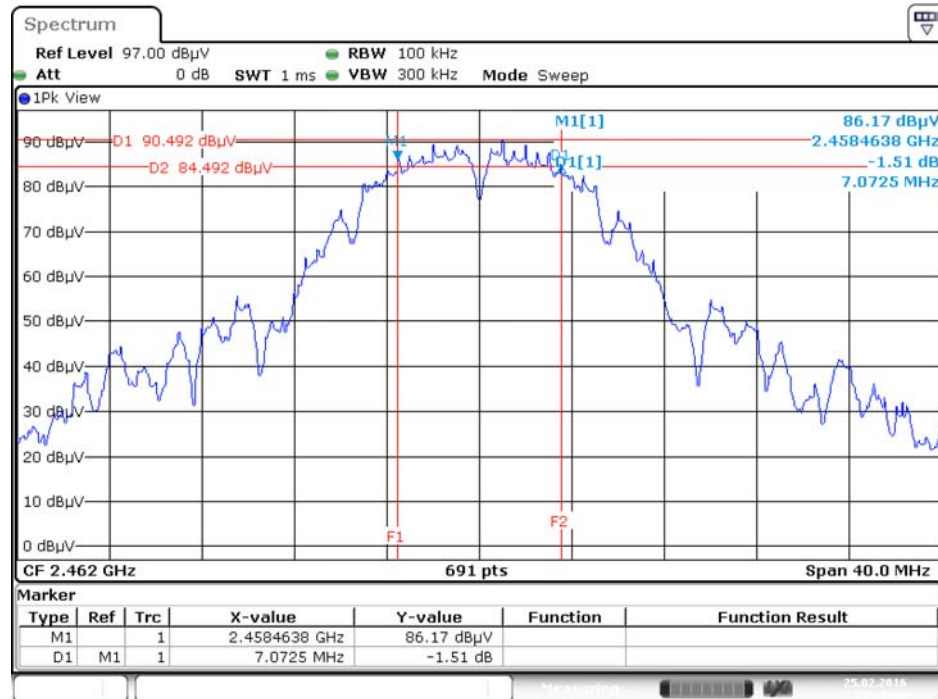


99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

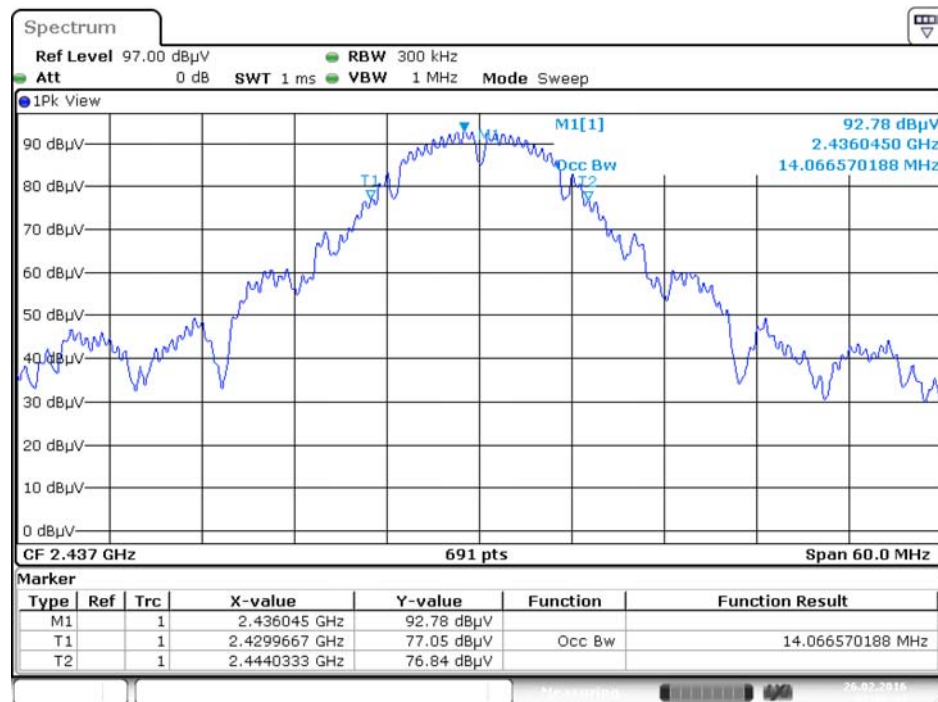


6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

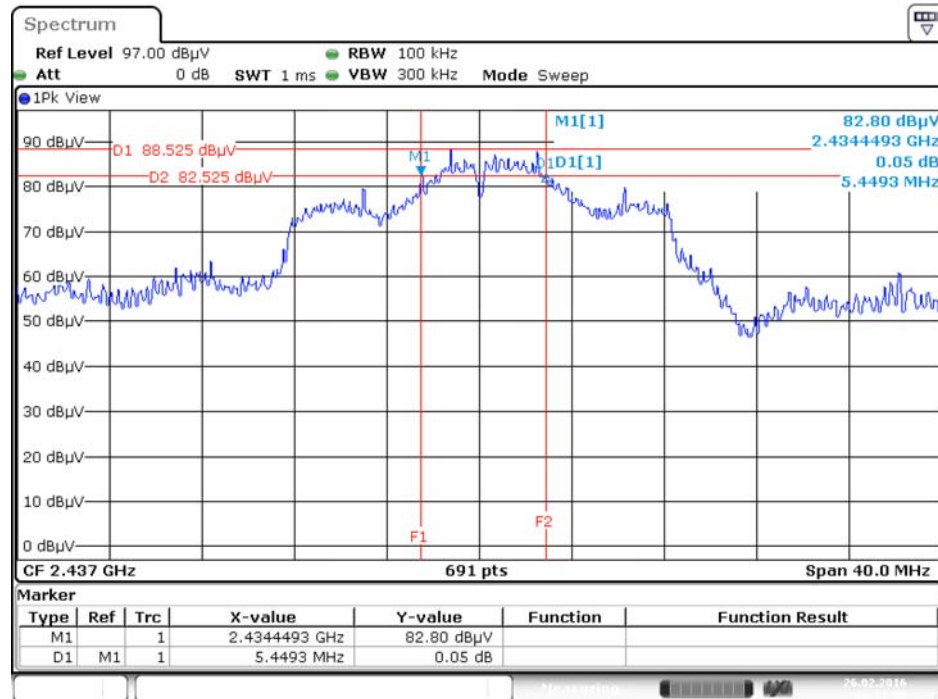

99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

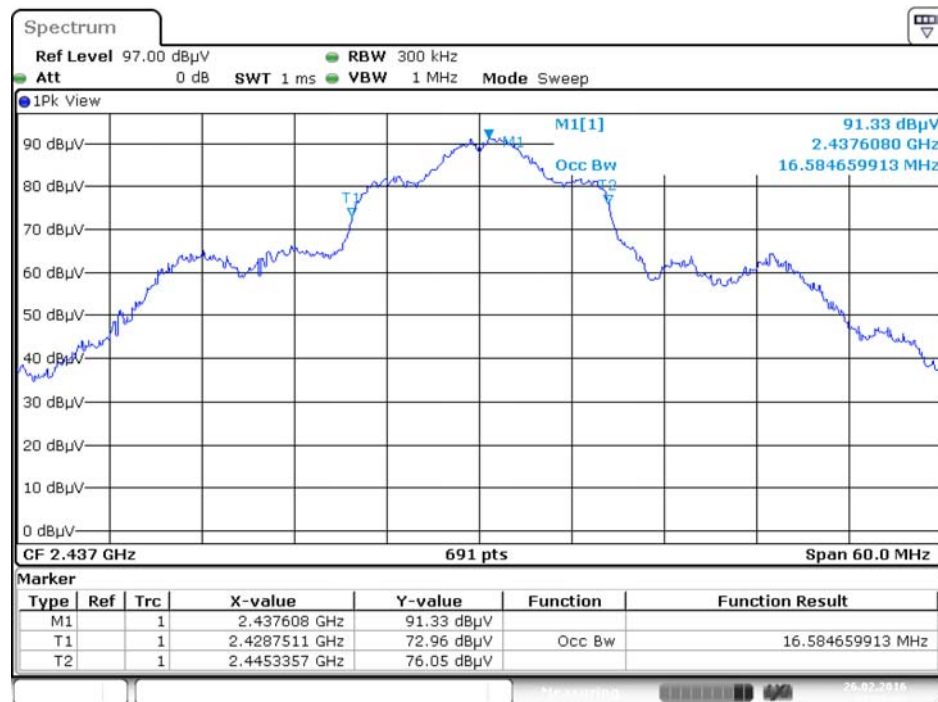

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz /
Chain 1 + Chain 2 + Chain 3 + Chain 4

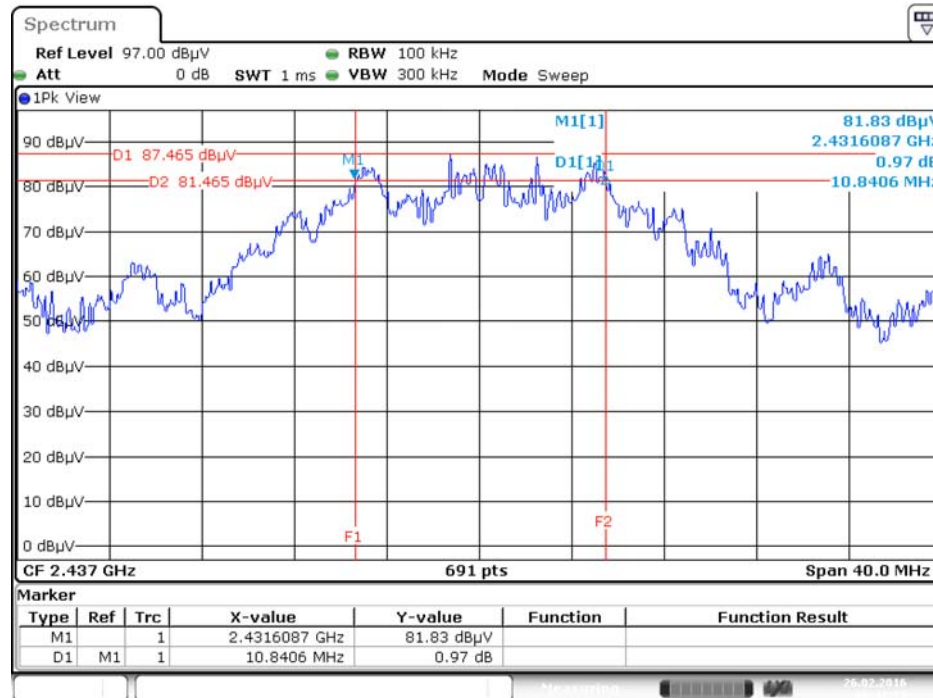


Date: 26.FEB.2016 00:41:39

99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz /
Chain 1 + Chain 2 + Chain 3 + Chain 4




Date: 26.FEB.2016 01:01:17

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2422 MHz /
Chain 1 + Chain 2 + Chain 3 + Chain 4

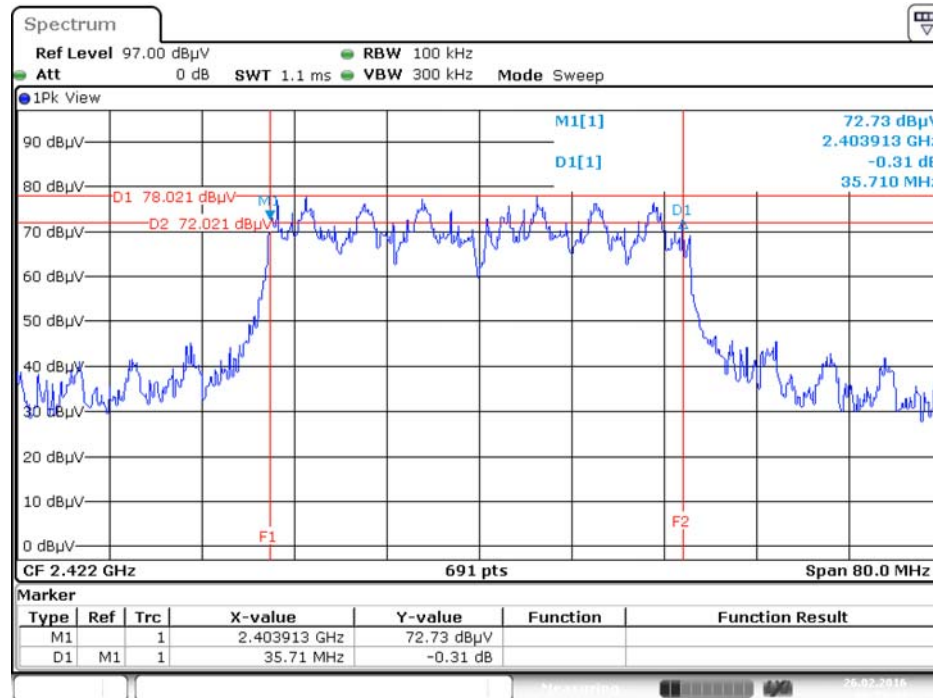

Date: 26.FEB.2016 00:54:44

99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz /
Chain 1 + Chain 2 + Chain 3 + Chain 4

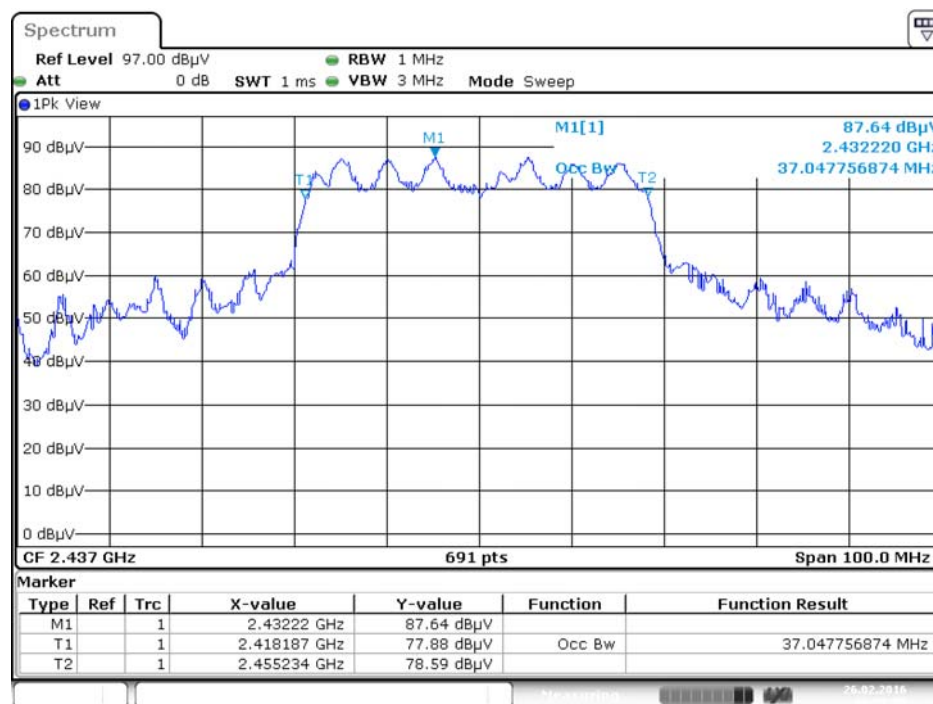


Date: 26.FEB.2016 00:58:51

For beamforming function:

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz /


Chain 1 + Chain 2 + Chain 3 + Chain 4

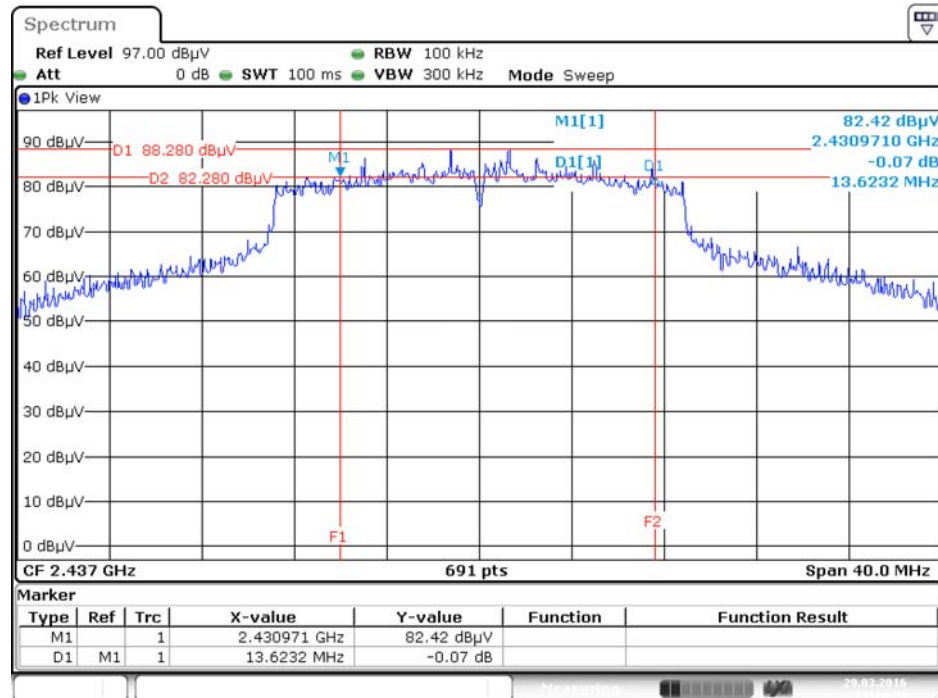

Date: 29.MAR.2016 17:14:25


99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz /

Chain 1 + Chain 2 + Chain 3 + Chain 4

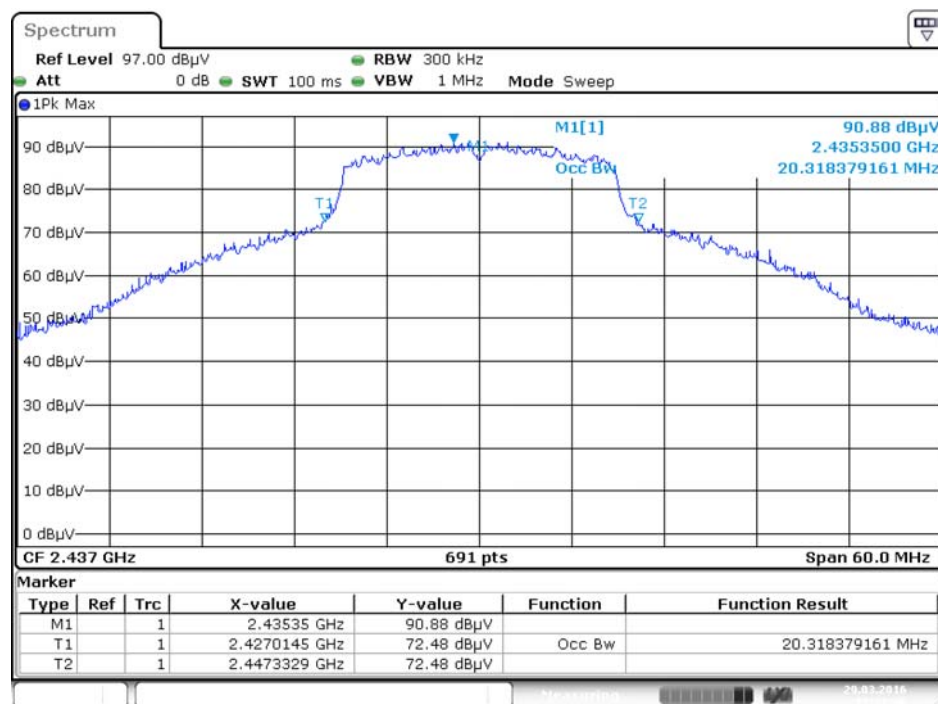


Date: 29.MAR.2016 17:22:46

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2422 MHz /
Chain 1 + Chain 2 + Chain 3 + Chain 4

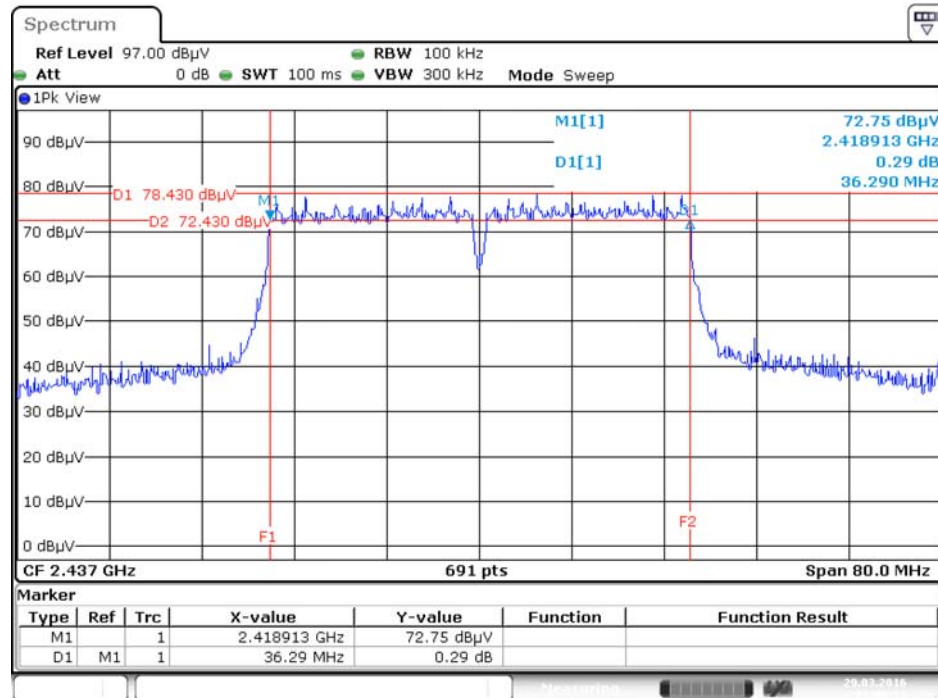

99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz /
Chain 1 + Chain 2 + Chain 3 + Chain 4

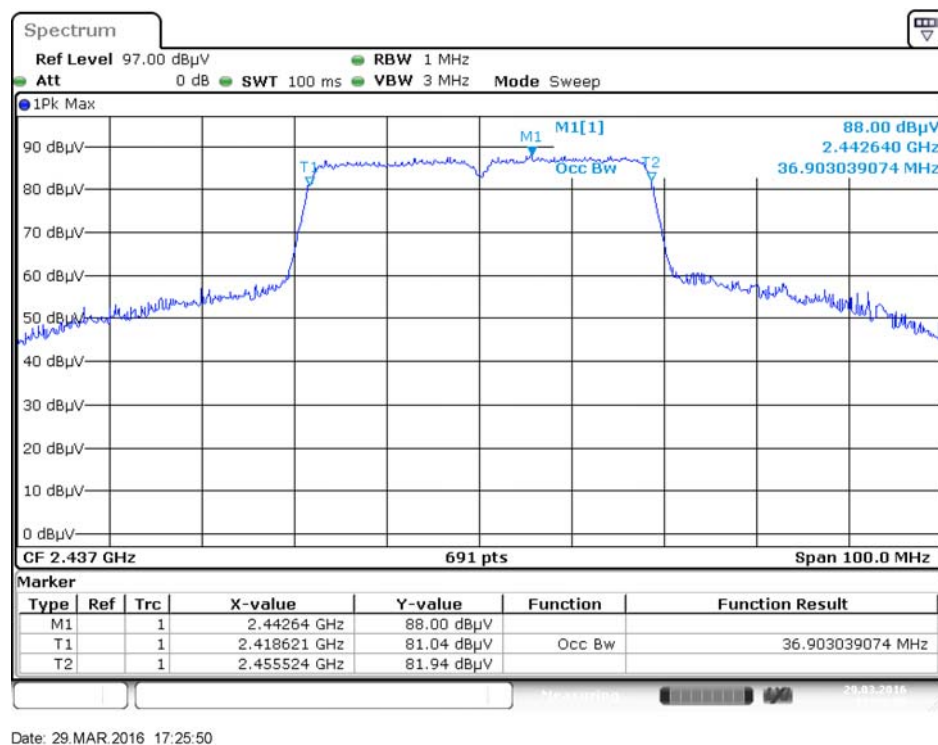

4.5. Radiated Emissions Measurement

4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

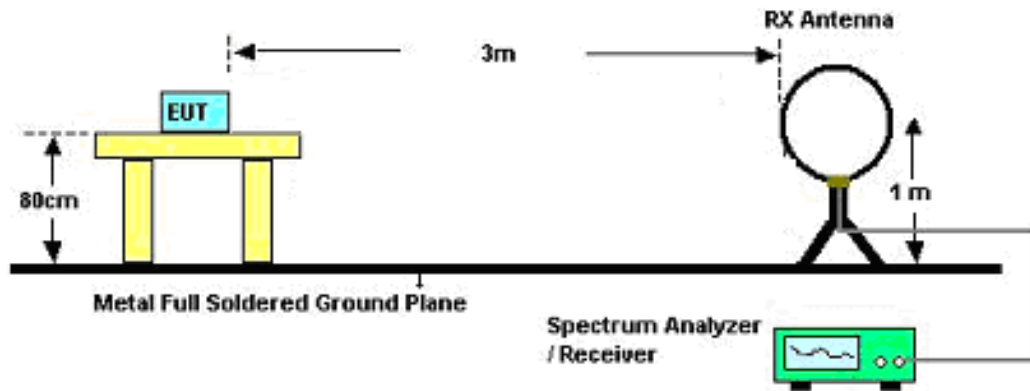

For Radiated Emissions: 30MHz~1GHz

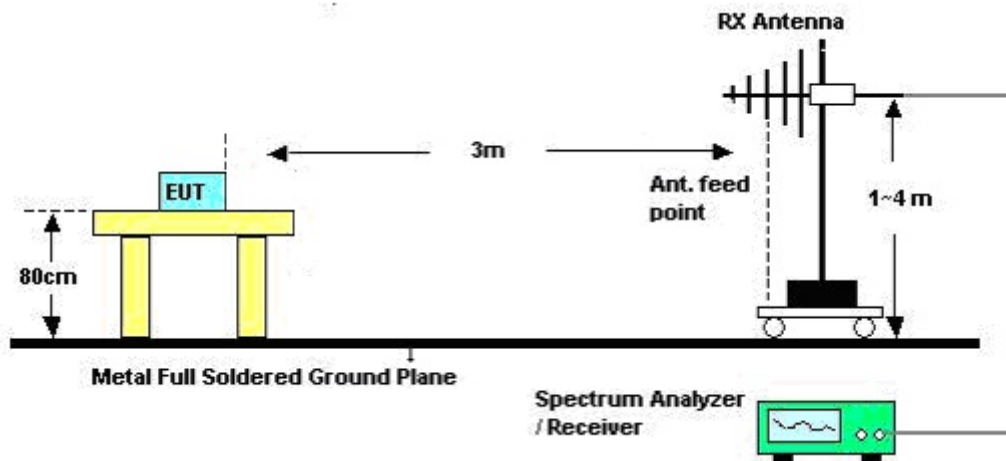

For Radiated Emissions: Above 1GHz

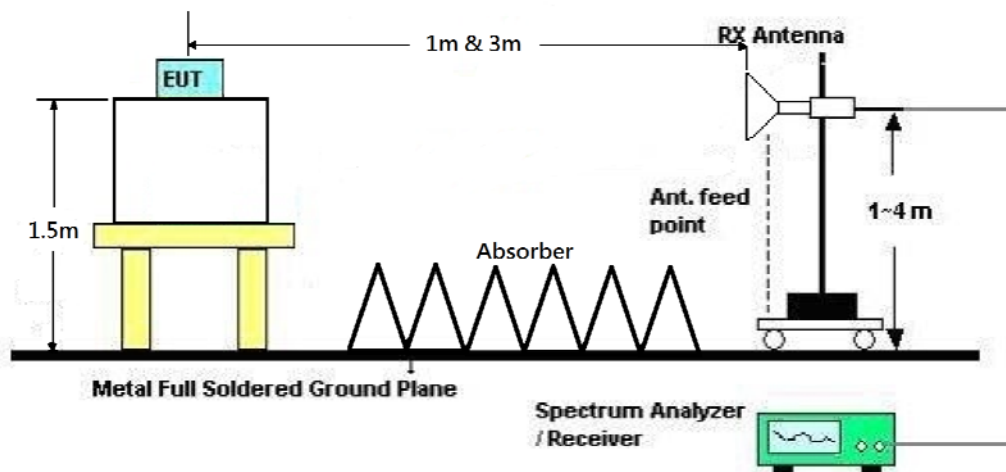

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

For non-beamforming function:

The EUT was programmed to be in continuously transmitting mode.

For beamforming function:

The EUT was programmed to be in beamforming transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	22°C	Humidity	54%
Test Engineer	Taka Hsu	Configurations	CTX
Test Date	Apr. 02, 2016		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	22°C	Humidity	54%
Test Engineer	Taka Hsu	Configurations	CTX

Horizontal

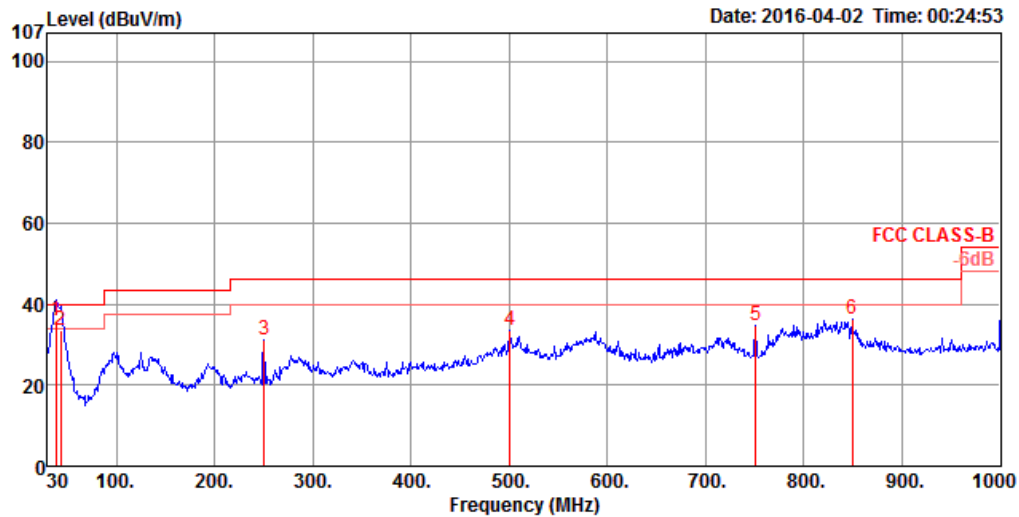

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	38.73	36.00	40.00	-4.00	47.15	0.53	20.01	31.69	300	272 QP	HORIZONTAL
2	43.58	33.52	40.00	-6.48	47.33	0.59	17.32	31.72	300	280 QP	HORIZONTAL
3	250.19	31.07	46.00	-14.93	43.29	1.25	18.60	32.07	110	0 Peak	HORIZONTAL
4	500.45	33.47	46.00	-12.53	40.34	1.76	23.73	32.36	200	143 Peak	HORIZONTAL
5	750.71	34.73	46.00	-11.27	39.01	2.19	26.10	32.57	110	162 Peak	HORIZONTAL
6	849.65	36.29	46.00	-9.71	39.49	2.35	27.00	32.55	110	233 Peak	HORIZONTAL

Vertical

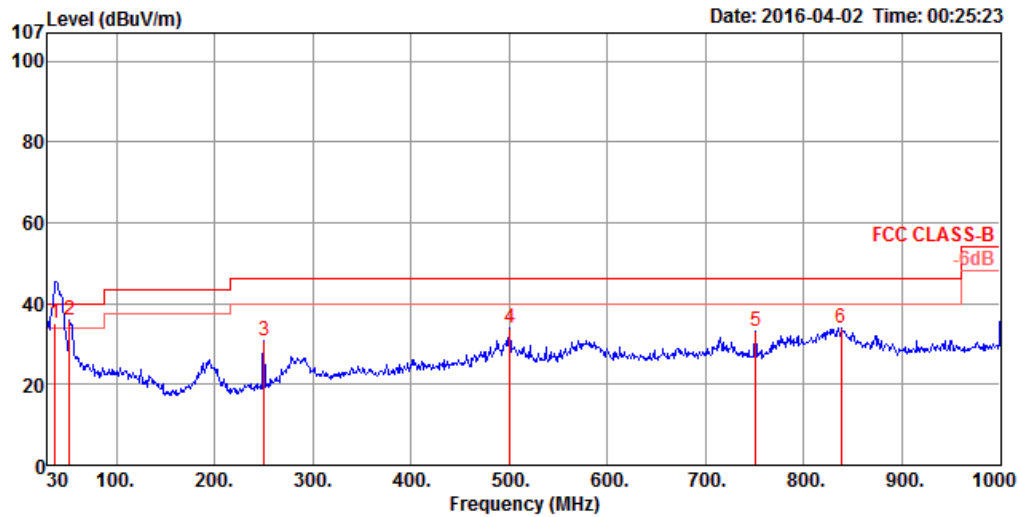

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	37.76	35.26	40.00	-4.74	45.85	0.53	20.56	31.68	110	17 QP	VERTICAL
2	52.31	35.89	40.00	-4.11	53.25	0.61	13.80	31.77	150	45 Peak	VERTICAL
3	250.19	30.67	46.00	-15.33	42.89	1.25	18.60	32.07	110	262 Peak	VERTICAL
4	500.45	33.82	46.00	-12.18	40.69	1.76	23.73	32.36	110	227 Peak	VERTICAL
5	750.71	32.99	46.00	-13.01	37.27	2.19	26.10	32.57	110	194 Peak	VERTICAL
6	838.01	33.98	46.00	-12.02	37.30	2.34	26.89	32.55	110	191 Peak	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Temperature	22°C	Humidity	54%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11b CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Dec. 10, 2015	Test Function	Non-beamforming function

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4824.02	49.55	54.00	-4.45	46.33	7.18	32.58	36.54	100	110	HORIZONTAL Average
2	4824.08	52.78	74.00	-21.22	49.56	7.18	32.58	36.54	100	110	HORIZONTAL Peak
3	12059.39	53.74	54.00	-0.26	39.60	11.21	38.81	35.88	220	111	HORIZONTAL Average
4	12059.70	61.21	74.00	-12.79	47.07	11.21	38.81	35.88	220	111	HORIZONTAL Peak

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4824.00	55.97	74.00	-18.03	52.75	7.18	32.58	36.54	101	92	VERTICAL Peak
2	4824.02	53.76	54.00	-0.24	50.54	7.18	32.58	36.54	101	92	VERTICAL Average
3	12059.12	60.90	74.00	-13.10	46.76	11.21	38.81	35.88	228	102	VERTICAL Peak
4	12059.44	53.38	54.00	-0.62	39.24	11.21	38.81	35.88	228	102	VERTICAL Average

Temperature	22°C	Humidity	54%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11b CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Dec. 10, 2015	Test Function	Non-beamforming function

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4874.03	46.85	54.00	-7.15	43.58	7.12	32.68	36.53	174	106	HORIZONTAL Average
2	4874.06	51.25	74.00	-22.75	47.98	7.12	32.68	36.53	174	106	HORIZONTAL Peak
3	12184.13	61.08	74.00	-12.92	46.90	11.23	38.84	35.89	219	119	HORIZONTAL Peak
4	12185.82	53.64	54.00	-0.36	39.46	11.23	38.84	35.89	219	119	HORIZONTAL Average

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4873.98	53.17	54.00	-0.83	49.90	7.12	32.68	36.53	100	88	VERTICAL Average
2	4874.08	55.23	74.00	-18.77	51.96	7.12	32.68	36.53	100	88	VERTICAL Peak
3	12183.53	61.26	74.00	-12.74	47.08	11.23	38.84	35.89	216	105	VERTICAL Peak
4	12185.85	53.86	54.00	-0.14	39.68	11.23	38.84	35.89	216	105	VERTICAL Average

Temperature	22°C	Humidity	54%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11b CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Dec. 10, 2015	Test Function	Non-beamforming function

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4924.02	44.35	54.00	-9.65	41.05	7.05	32.78	36.53	220	102	HORIZONTAL Average
2	4924.10	51.78	74.00	-22.22	48.48	7.05	32.78	36.53	220	102	HORIZONTAL Peak
3	12309.14	62.78	74.00	-11.22	48.56	11.25	38.86	35.89	222	117	HORIZONTAL Peak
4	12309.36	53.67	54.00	-0.33	39.45	11.25	38.86	35.89	222	117	HORIZONTAL Average

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4923.98	55.29	74.00	-18.71	51.99	7.05	32.78	36.53	113	82	VERTICAL Peak
2	4924.09	51.35	54.00	-2.65	48.05	7.05	32.78	36.53	113	82	VERTICAL Average
3	12308.37	61.21	74.00	-12.79	47.00	11.24	38.86	35.89	194	99	VERTICAL Peak
4	12309.34	53.61	54.00	-0.39	39.39	11.25	38.86	35.89	194	99	VERTICAL Average

Temperature	22°C	Humidity	54%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11g CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Dec. 15, 2015	Test Function	Non-beamforming function

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4823.08	34.13	54.00	-19.87	28.63	7.10	33.41	35.01	Average	140	5 HORIZONTAL
2	4823.86	46.96	74.00	-27.04	41.46	7.10	33.41	35.01	Peak	140	5 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4823.47	33.84	54.00	-20.16	28.34	7.10	33.41	35.01	Average	148	232 VERTICAL
2	4824.68	46.73	74.00	-27.27	41.23	7.10	33.41	35.01	Peak	148	232 VERTICAL

Temperature	22°C	Humidity	54%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11g CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Dec. 15, 2015	Test Function	Non-beamforming function

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4873.59	45.88	74.00	-28.12	40.24	7.12	33.53	35.01	Peak	141	340 HORIZONTAL
2	4874.06	35.17	54.00	-18.83	29.53	7.12	33.53	35.01	Average	141	340 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4873.24	35.10	54.00	-18.90	29.46	7.12	33.53	35.01	Average	140	205 VERTICAL
2	4874.98	46.88	74.00	-27.12	41.24	7.12	33.53	35.01	Peak	140	205 VERTICAL

Temperature	22°C	Humidity	54%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11g CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Dec. 15, 2015	Test Function	Non-beamforming function

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4924.03	34.31	54.00	-19.69	28.53	7.14	33.65	35.01	Average	138	239 HORIZONTAL
2	4924.59	47.26	74.00	-26.74	41.48	7.14	33.65	35.01	Peak	138	239 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4923.95	34.53	54.00	-19.47	28.75	7.14	33.65	35.01	Average	134	46 VERTICAL
2	4924.52	46.86	74.00	-27.14	41.08	7.14	33.65	35.01	Peak	134	46 VERTICAL

Temperature	22°C	Humidity	54%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Dec. 16, 2015	Test Function	Non-beamforming function

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4823.00	34.06	54.00	-19.94	28.56	7.10	33.41	35.01	Average	140	225	HORIZONTAL
2	4823.64	46.44	74.00	-27.56	40.94	7.10	33.41	35.01	Peak	140	225	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4823.02	34.34	54.00	-19.66	28.84	7.10	33.41	35.01	Average	143	295	VERTICAL
2	4823.83	47.41	74.00	-26.59	41.91	7.10	33.41	35.01	Peak	143	295	VERTICAL

Temperature	22°C	Humidity	54%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Dec. 16, 2015	Test Function	Non-beamforming function

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.09	34.42	54.00	-19.58	28.78	7.12	33.53	35.01	Average	134	23	HORIZONTAL
2	4873.15	46.69	74.00	-27.31	41.05	7.12	33.53	35.01	Peak	134	23	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4874.87	47.01	74.00	-26.99	41.37	7.12	33.53	35.01	Peak	138	285	VERTICAL
2	4874.98	33.98	54.00	-20.02	28.34	7.12	33.53	35.01	Average	138	285	VERTICAL

Temperature	22°C	Humidity	54%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Dec. 16, 2015	Test Function	Non-beamforming function

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4923.62	47.15	74.00	-26.85	41.37	7.14	33.65	35.01	Peak	135	237	HORIZONTAL
2	4924.18	34.43	54.00	-19.57	28.65	7.14	33.65	35.01	Average	135	237	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4923.05	46.96	74.00	-27.04	41.21	7.14	33.62	35.01	Peak	146	87	VERTICAL
2	4924.13	34.48	54.00	-19.52	28.70	7.14	33.65	35.01	Average	146	87	VERTICAL

Temperature	22°C	Humidity	54%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 3 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Dec. 16, 2015	Test Function	Non-beamforming function

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4843.12	33.68	54.00	-20.32	28.11	7.11	33.47	35.01	Average	133	249	HORIZONTAL
2	4843.66	46.36	74.00	-27.64	40.79	7.11	33.47	35.01	Peak	133	249	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4843.10	33.45	54.00	-20.55	27.88	7.11	33.47	35.01	Average	129	166	VERTICAL
2	4843.82	46.44	74.00	-27.56	40.87	7.11	33.47	35.01	Peak	129	166	VERTICAL

Temperature	22°C	Humidity	54%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Dec. 16, 2015	Test Function	Non-beamforming function

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4874.45	33.34	54.00	-20.66	27.70	7.12	33.53	35.01	Average	149	114	HORIZONTAL
2	4874.62	46.90	74.00	-27.10	41.26	7.12	33.53	35.01	Peak	149	114	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.04	33.33	54.00	-20.67	27.69	7.12	33.53	35.01	Average	150	350	VERTICAL
2	4874.75	46.36	74.00	-27.64	40.72	7.12	33.53	35.01	Peak	150	350	VERTICAL

Temperature	22°C	Humidity	54%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 9 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Dec. 16, 2015	Test Function	Non-beamforming function

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4903.63	33.85	54.00	-20.15	28.14	7.13	33.59	35.01	Average	135	273 HORIZONTAL
2	4904.52	47.37	74.00	-26.63	41.66	7.13	33.59	35.01	Peak	135	273 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4904.26	48.59	74.00	-25.41	42.88	7.13	33.59	35.01	Peak	130	73 VERTICAL
2	4904.57	33.88	54.00	-20.12	28.17	7.13	33.59	35.01	Average	130	73 VERTICAL

Temperature	22°C	Humidity	54%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Mar. 24, 2016	Test Function	Beamforming function

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4829.48	33.47	54.00	-20.53	29.90	7.50	32.61	36.54	147	227 Average	HORIZONTAL
2	4832.60	46.34	74.00	-27.66	42.77	7.50	32.61	36.54	147	227 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4823.92	34.35	54.00	-19.65	30.83	7.48	32.58	36.54	165	300 Average	VERTICAL
2	4833.08	46.81	74.00	-27.19	43.24	7.50	32.61	36.54	165	300 Peak	VERTICAL

Temperature	22°C	Humidity	54%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Mar. 24, 2016	Test Function	Beamforming function

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4864.72	46.20	74.00	-27.80	42.53	7.54	32.66	36.53	156	360	Peak	HORIZONTAL
2	4874.04	44.37	54.00	-9.63	40.66	7.56	32.68	36.53	156	360	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4874.00	42.93	54.00	-11.07	39.22	7.56	32.68	36.53	129	111	Average	VERTICAL
2	4874.08	60.90	74.00	-13.10	57.19	7.56	32.68	36.53	129	111	Peak	VERTICAL

Temperature	22°C	Humidity	54%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Mar. 24, 2016	Test Function	Beamforming function

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4916.12	33.83	54.00	-20.17	29.98	7.63	32.75	36.53	188	236 Average	HORIZONTAL
2	4920.12	47.29	74.00	-26.71	43.44	7.63	32.75	36.53	188	236 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4917.64	47.18	74.00	-26.82	43.33	7.63	32.75	36.53	178	264 Peak	VERTICAL
2	4918.72	34.09	54.00	-19.91	30.24	7.63	32.75	36.53	178	264 Average	VERTICAL

Temperature	22°C	Humidity	54%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 3 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Mar. 24, 2016	Test Function	Beamforming function

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4844.36	46.98	74.00	-27.02	43.37	7.52	32.63	36.54	186	81 Peak	HORIZONTAL
2	4847.44	33.69	54.00	-20.31	30.07	7.52	32.63	36.53	186	81 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4850.88	46.66	74.00	-27.34	43.04	7.52	32.63	36.53	152	160 Peak	VERTICAL
2	4851.36	34.21	54.00	-19.79	30.59	7.52	32.63	36.53	152	160 Average	VERTICAL

Temperature	22°C	Humidity	54%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Mar. 24, 2016	Test Function	Beamforming function

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4871.00	37.30	54.00	-16.70	33.59	7.56	32.68	36.53	175	138 Average	HORIZONTAL
2	4873.84	53.03	74.00	-20.97	49.32	7.56	32.68	36.53	175	138 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4869.60	46.12	74.00	-27.88	42.41	7.56	32.68	36.53	144	176 Peak	VERTICAL
2	4871.00	38.93	54.00	-15.07	35.22	7.56	32.68	36.53	144	176 Average	VERTICAL

Temperature	22°C	Humidity	54%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 9 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Mar. 24, 2016	Test Function	Beamforming function

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4897.28	46.61	74.00	-27.39	42.80	7.61	32.73	36.53	218	176 Peak	HORIZONTAL
2	4913.12	33.28	54.00	-20.72	29.43	7.63	32.75	36.53	218	176 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4897.88	47.15	74.00	-26.85	43.34	7.61	32.73	36.53	168	85 Peak	VERTICAL
2	4913.24	34.44	54.00	-19.56	30.59	7.63	32.75	36.53	168	85 Average	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Emissions Measurement

4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (30dBc in any 100 kHz bandwidth emission)	100 kHz / 300 kHz for Peak

4.6.3. Test Procedures

For Radiated band edges Measurement:

1. The test procedure is the same as section 4.5.3.

For Radiated Out of Band Emission Measurement:

1. Test was performed in accordance with KDB558074 D01 v03r04 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure.

4.6.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

For non-beamforming function:

The EUT was programmed to be in continuously transmitting mode.

For beamforming function:

The EUT was programmed to be in beamforming transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	22°C	Humidity	54%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11b CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Dec. 14, 2015	Test Function	Non-beamforming function

Channel 1

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2387.40	61.61	74.00	-12.39	28.44	4.96	28.21	0.00	249	236	HORIZONTAL
2	2387.60	53.89	54.00	-0.11	20.72	4.96	28.21	0.00	249	236	HORIZONTAL
3	2411.20	103.78			70.53	4.99	28.26	0.00	249	236	HORIZONTAL
4	2413.00	107.74			74.49	4.99	28.26	0.00	249	236	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2389.00	60.19	74.00	-13.81	27.02	4.96	28.21	0.00	298	203	HORIZONTAL
2	2390.00	51.92	54.00	-2.08	18.75	4.96	28.21	0.00	298	203	HORIZONTAL
3	2435.40	105.17			71.87	5.01	28.29	0.00	298	203	HORIZONTAL
4	2438.20	108.87			75.57	5.01	28.29	0.00	298	203	HORIZONTAL
5	2484.60	58.36	74.00	-15.64	24.92	5.06	28.38	0.00	298	203	HORIZONTAL
6	2485.40	47.62	54.00	-6.38	14.18	5.06	28.38	0.00	298	203	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2461.20	106.54			73.16	5.04	28.34	0.00	138	30	VERTICAL
2	2461.20	110.24			76.86	5.04	28.34	0.00	138	30	VERTICAL
3	2483.50	53.83	54.00	-0.17	20.39	5.06	28.38	0.00	138	30	VERTICAL
4	2484.80	60.23	74.00	-13.77	26.79	5.06	28.38	0.00	138	30	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	22°C	Humidity	54%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11g CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Dec. 14, 2015 / Dec. 15, 2015	Test Function	Non-beamforming function

Channel 1

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	2389.60	71.85	74.00	-2.15	38.68	4.96	28.21	0.00	Peak	168	199	VERTICAL
2	2390.00	53.93	54.00	-0.07	20.76	4.96	28.21	0.00	Average	168	199	VERTICAL
3	2409.60	102.42			69.19	4.98	28.25	0.00	Average	168	199	VERTICAL
4	2410.40	112.83			79.60	4.98	28.25	0.00	Peak	168	199	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	2389.80	69.15	74.00	-4.85	35.98	4.96	28.21	0.00	Peak	247	22	HORIZONTAL
2	2390.00	52.57	54.00	-1.43	19.40	4.96	28.21	0.00	Average	247	22	HORIZONTAL
3	2433.40	102.13			68.83	5.01	28.29	0.00	Average	247	22	HORIZONTAL
4	2433.40	112.81			79.51	5.01	28.29	0.00	Peak	247	22	HORIZONTAL
5	2483.50	53.59	54.00	-0.41	20.15	5.06	28.38	0.00	Average	247	22	HORIZONTAL
6	2484.20	72.99	74.00	-1.01	39.55	5.06	28.38	0.00	Peak	247	22	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	2457.20	102.08			68.72	5.03	28.33	0.00	Average	100	130	VERTICAL
2	2457.60	113.00			79.64	5.03	28.33	0.00	Peak	100	130	VERTICAL
3	2484.40	53.81	54.00	-0.19	20.37	5.06	28.38	0.00	Average	100	130	VERTICAL
4	2484.40	70.93	74.00	-3.07	37.49	5.06	28.38	0.00	Peak	100	130	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	22°C	Humidity	54%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Dec. 15, 2015	Test Function	Non-beamforming function

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2387.60	73.98	74.00	-0.02	40.81	4.96	28.21	0.00	Peak	200	199 VERTICAL
2	2389.80	51.87	54.00	-2.13	18.70	4.96	28.21	0.00	Average	200	199 VERTICAL
3	2413.20	100.68			67.43	4.99	28.26	0.00	Average	200	199 VERTICAL
4	2415.40	111.44			78.19	4.99	28.26	0.00	Peak	200	199 VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2390.00	53.63	54.00	-0.37	20.46	4.96	28.21	0.00	Average	210	207 VERTICAL
2	2390.00	69.98	74.00	-4.02	36.81	4.96	28.21	0.00	Peak	210	207 VERTICAL
3	2438.20	106.51			73.21	5.01	28.29	0.00	Average	210	207 VERTICAL
4	2440.20	114.58			81.25	5.02	28.31	0.00	Peak	210	207 VERTICAL
5	2483.50	68.23	74.00	-5.77	34.79	5.06	28.38	0.00	Peak	210	207 VERTICAL
6	2483.80	47.89	54.00	-6.11	14.45	5.06	28.38	0.00	Average	210	207 VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2459.20	100.55			67.19	5.03	28.33	0.00	Average	100	134 VERTICAL
2	2459.60	110.42			77.06	5.03	28.33	0.00	Peak	100	134 VERTICAL
3	2483.80	71.54	74.00	-2.46	38.10	5.06	28.38	0.00	Peak	100	134 VERTICAL
4	2484.00	53.73	54.00	-0.27	20.29	5.06	28.38	0.00	Average	100	134 VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	22°C	Humidity	54%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 3, 6, 9 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Dec. 15, 2015	Test Function	Non-beamforming function

Channel 3

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	2388.80	70.18	74.00	-3.82	37.01	4.96	28.21	0.00	Peak	126	45 HORIZONTAL
2	2390.00	53.99	54.00	-0.01	20.82	4.96	28.21	0.00	Average	126	45 HORIZONTAL
3	2424.40	94.37			61.10	5.00	28.27	0.00	Average	126	45 HORIZONTAL
4	2425.20	103.00			69.71	5.01	28.28	0.00	Peak	126	45 HORIZONTAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	2389.00	53.78	54.00	-0.22	20.61	4.96	28.21	0.00	Average	100	129 VERTICAL
2	2389.40	71.70	74.00	-2.30	38.53	4.96	28.21	0.00	Peak	100	129 VERTICAL
3	2429.00	97.51			64.22	5.01	28.28	0.00	Average	100	129 VERTICAL
4	2434.20	106.70			73.40	5.01	28.29	0.00	Peak	100	129 VERTICAL
5	2484.60	53.70	54.00	-0.30	20.26	5.06	28.38	0.00	Average	100	129 VERTICAL
6	2485.80	69.75	74.00	-4.25	36.31	5.06	28.38	0.00	Peak	100	129 VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 9

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	2449.20	106.04			72.69	5.03	28.32	0.00	Peak	100	133 VERTICAL
2	2454.00	96.46			63.10	5.03	28.33	0.00	Peak	100	133 VERTICAL
3	2484.40	53.83	54.00	-0.17	20.39	5.06	28.38	0.00	Average	100	133 VERTICAL
4	2484.80	72.18	74.00	-1.82	38.74	5.06	28.38	0.00	Peak	100	133 VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Temperature	22°C	Humidity	54%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Mar. 22, 2016 / Mar. 23, 2016	Test Function	Beamforming function

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2389.60	71.38	74.00	-2.62	38.63	4.85	27.90	0.00	108	135	Peak	VERTICAL
2	2390.00	53.76	54.00	-0.24	21.01	4.85	27.90	0.00	108	135	Average	VERTICAL
3	2408.40	114.20			81.44	4.88	27.88	0.00	108	135	Peak	VERTICAL
4	2409.60	103.47			70.71	4.88	27.88	0.00	108	135	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2388.60	61.92	74.00	-12.08	29.17	4.85	27.90	0.00	151	47	Peak	HORIZONTAL
2	2390.00	48.80	54.00	-5.20	16.05	4.85	27.90	0.00	151	47	Average	HORIZONTAL
3	2437.40	101.96			69.17	4.93	27.86	0.00	151	47	Average	HORIZONTAL
4	2439.40	113.91			81.12	4.94	27.85	0.00	151	47	Peak	HORIZONTAL
5	2483.50	47.87	54.00	-6.13	15.05	5.01	27.81	0.00	151	47	Average	HORIZONTAL
6	2483.50	61.81	74.00	-12.19	28.99	5.01	27.81	0.00	151	47	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	2460.60	102.32			69.51	4.98	27.83	0.00	154	132	Average	VERTICAL
2	2464.60	111.49			78.68	4.98	27.83	0.00	154	132	Peak	VERTICAL
3	2483.50	53.78	54.00	-0.22	20.96	5.01	27.81	0.00	154	132	Average	VERTICAL
4	2483.50	73.57	74.00	-0.43	40.75	5.01	27.81	0.00	154	132	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	22°C	Humidity	54%
Test Engineer	Taka Hsu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 3, 6, 9 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Mar. 23, 2016	Test Function	Beamforming function

Channel 3

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2387.20	71.58	74.00	-2.42	38.83	4.85	27.90	0.00	135	33 Peak	VERTICAL
2	2388.40	53.80	54.00	-0.20	21.05	4.85	27.90	0.00	135	33 Average	VERTICAL
3	2414.40	99.11			66.34	4.89	27.88	0.00	135	33 Average	VERTICAL
4	2414.80	108.80			76.03	4.89	27.88	0.00	135	33 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2389.80	67.23	74.00	-6.77	34.48	4.85	27.90	0.00	105	130 Peak	VERTICAL
2	2390.00	51.88	54.00	-2.12	19.13	4.85	27.90	0.00	105	130 Average	VERTICAL
3	2428.20	112.36			79.58	4.92	27.86	0.00	105	130 Peak	VERTICAL
4	2430.60	101.89			69.11	4.92	27.86	0.00	105	130 Average	VERTICAL
5	2483.50	53.12	54.00	-0.88	20.30	5.01	27.81	0.00	105	130 Average	VERTICAL
6	2483.50	68.72	74.00	-5.28	35.90	5.01	27.81	0.00	105	130 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 9

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2434.80	99.50			66.71	4.93	27.86	0.00	104	130 Average	VERTICAL
2	2434.80	109.16			76.37	4.93	27.86	0.00	104	130 Peak	VERTICAL
3	2484.40	53.76	54.00	-0.24	20.94	5.01	27.81	0.00	104	130 Average	VERTICAL
4	2485.60	73.59	74.00	-0.41	40.77	5.01	27.81	0.00	104	130 Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For Emission not in Restricted Band


For non-beamforming function:

Plot on Configuration IEEE 802.11b / Reference Level

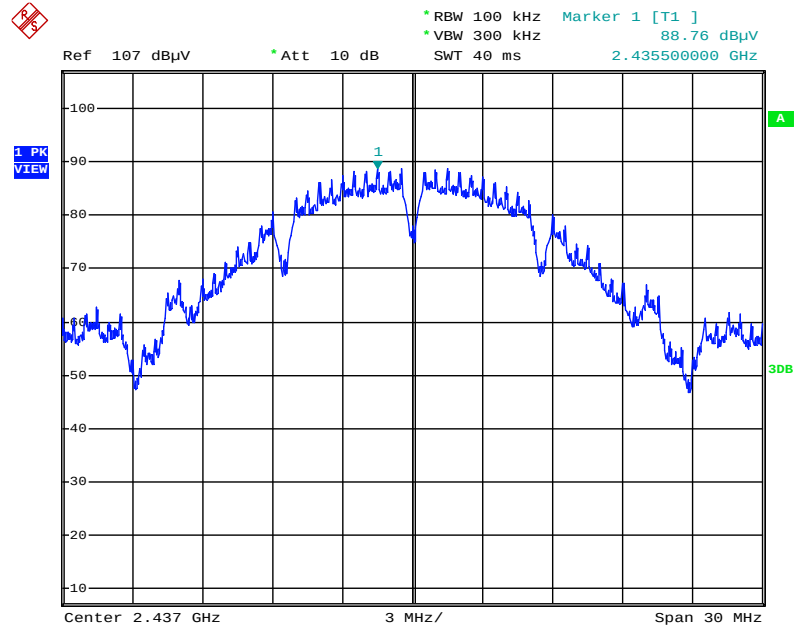


Date: 16.DEC.2015 00:32:13

Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc)

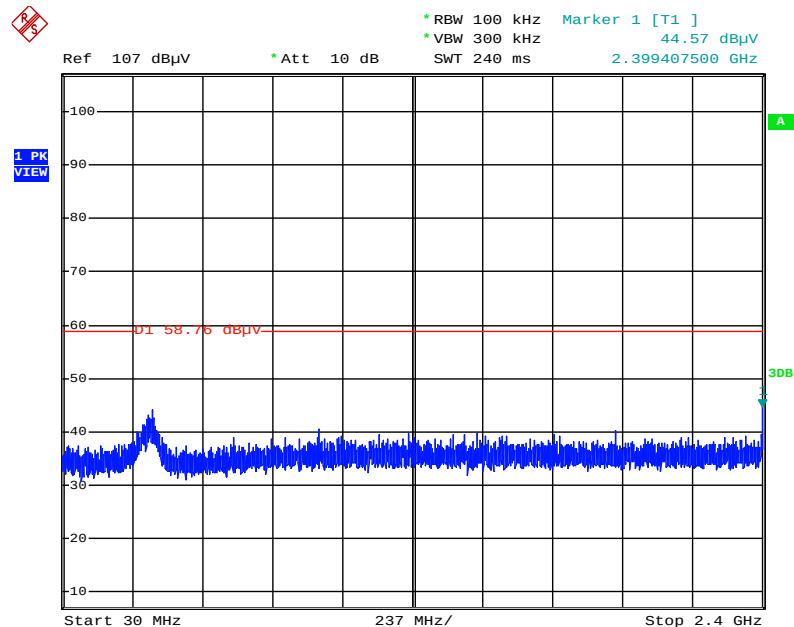


Date: 16.DEC.2015 00:33:32

Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc)

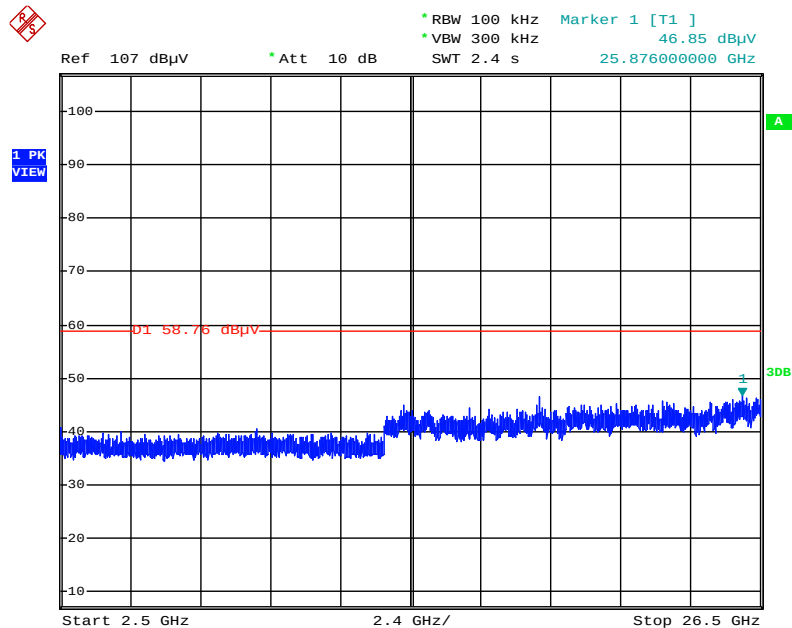


Date: 16.DEC.2015 00:34:10

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc)

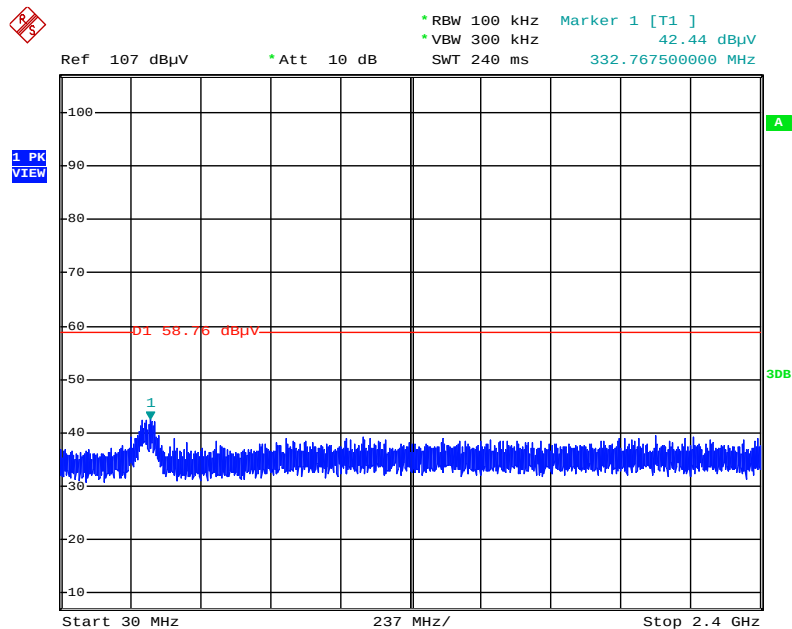


Date: 16.DEC.2015 00:35:27

Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 30dBc)

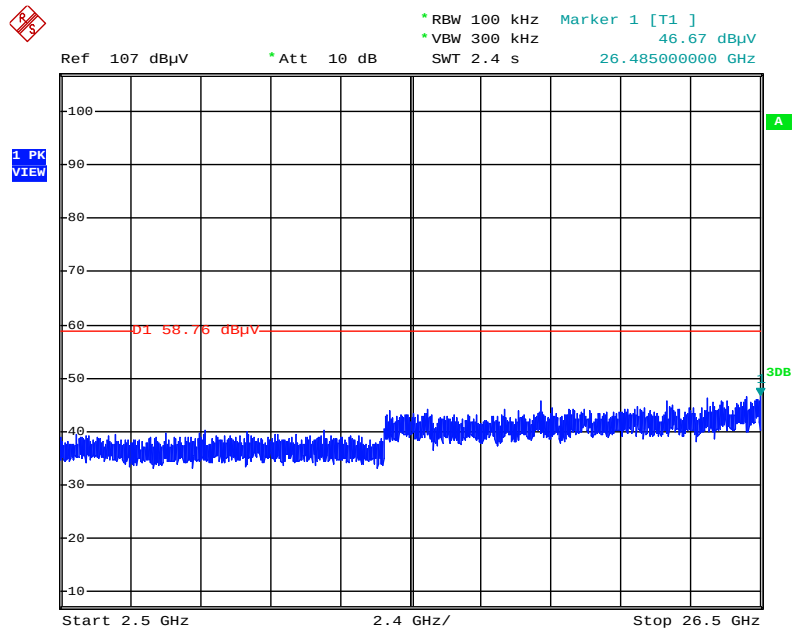


Date: 16.DEC.2015 00:35:04

Plot on Configuration IEEE 802.11g / Reference Level

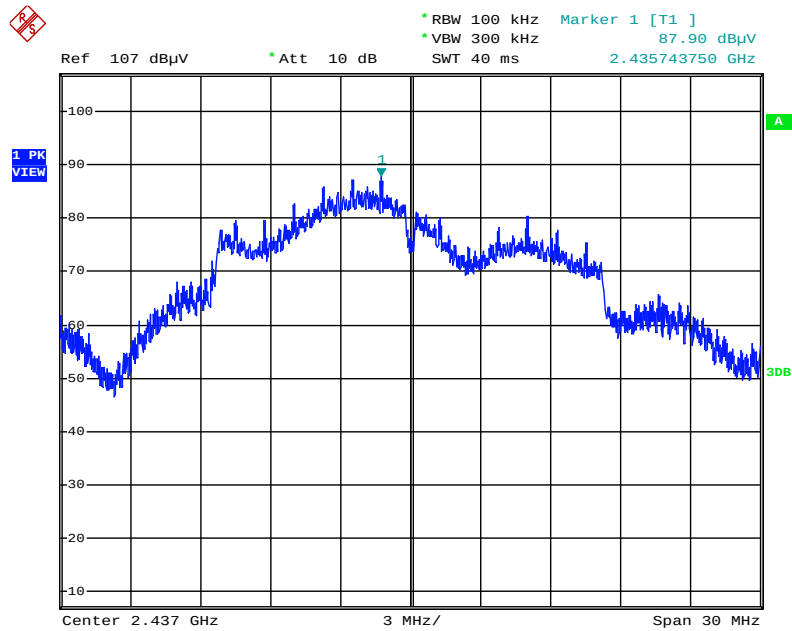


Date: 16.DEC.2015 00:37:19

Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc)

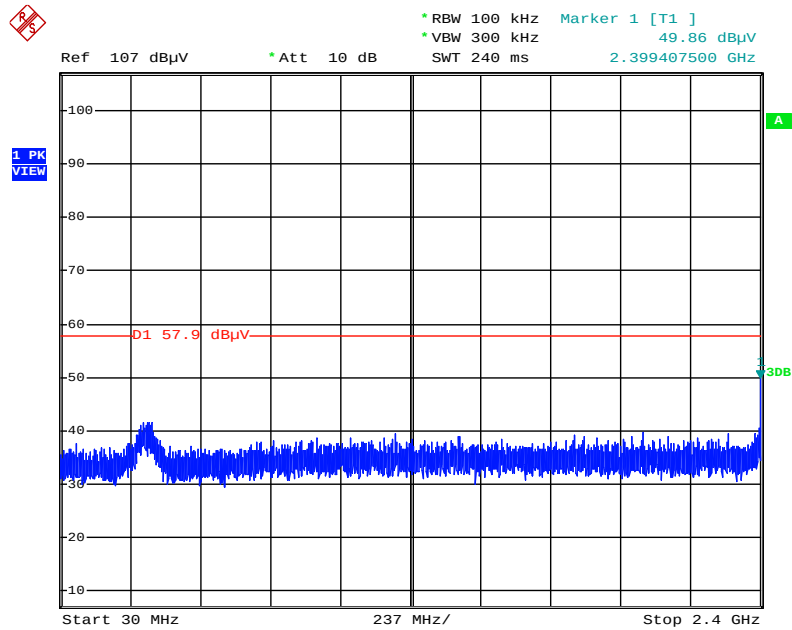


Date: 16.DEC.2015 00:41:21

Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 30dBc)

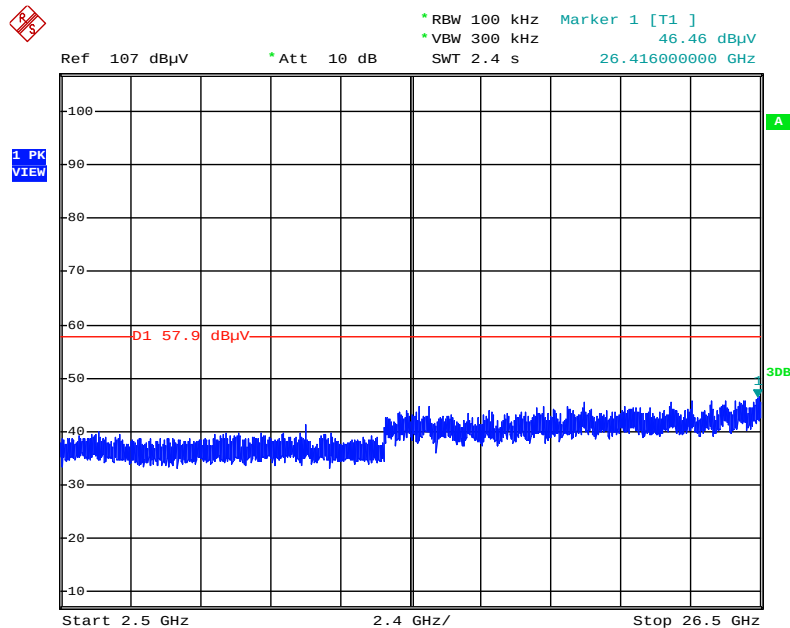


Date: 16.DEC.2015 00:41:48

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc)

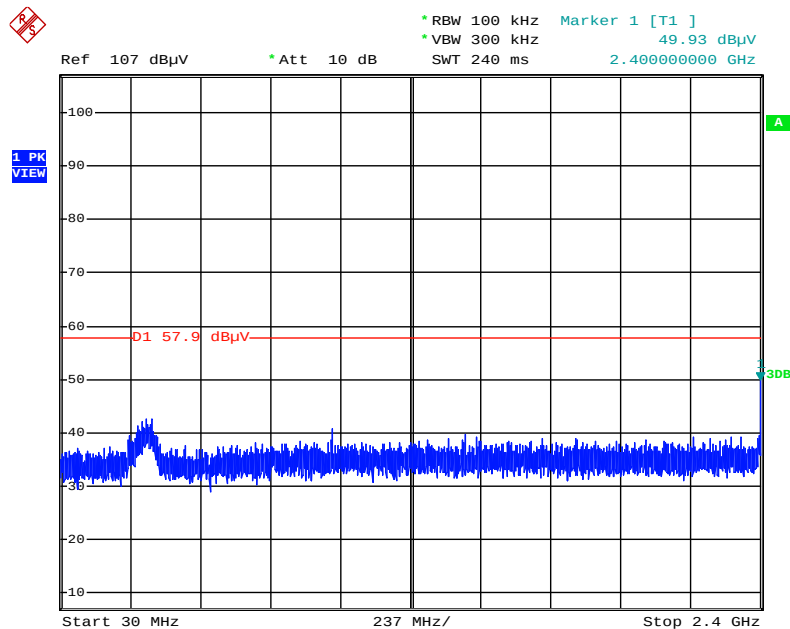


Date: 16.DEC.2015 00:42:32

Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 30dBc)

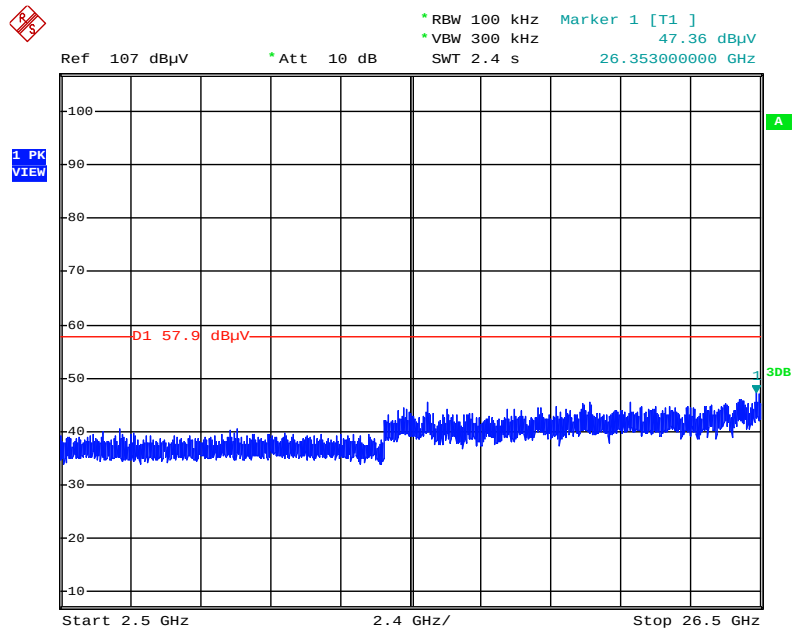


Date: 16.DEC.2015 00:43:20

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Reference Level

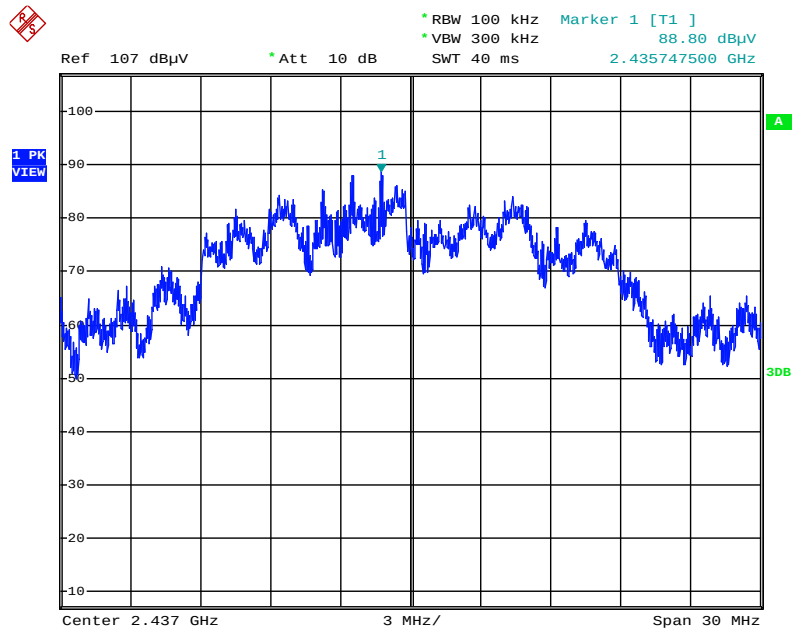


Date: 16.DEC.2015 00:45:19

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

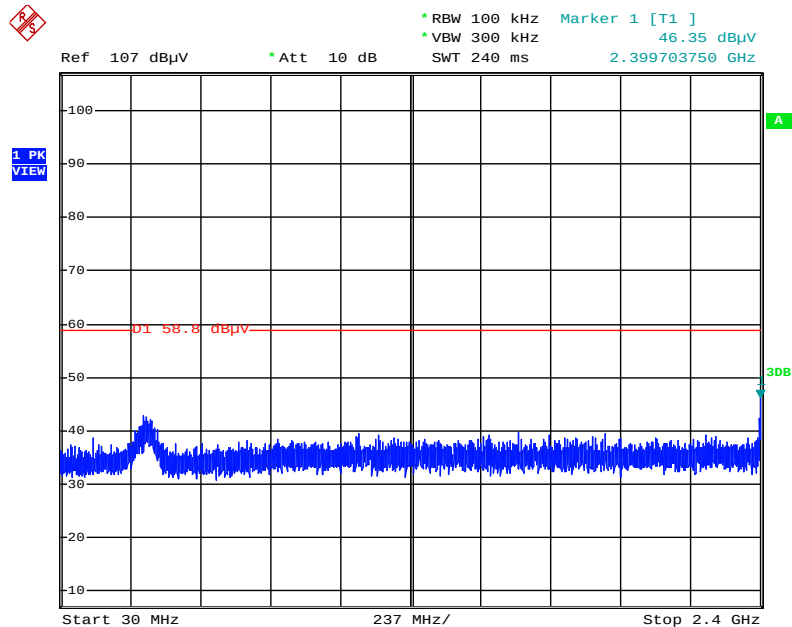


Date: 16.DEC.2015 00:47:03

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 1 / 2500MHz~26500MHz (down 30dBc)

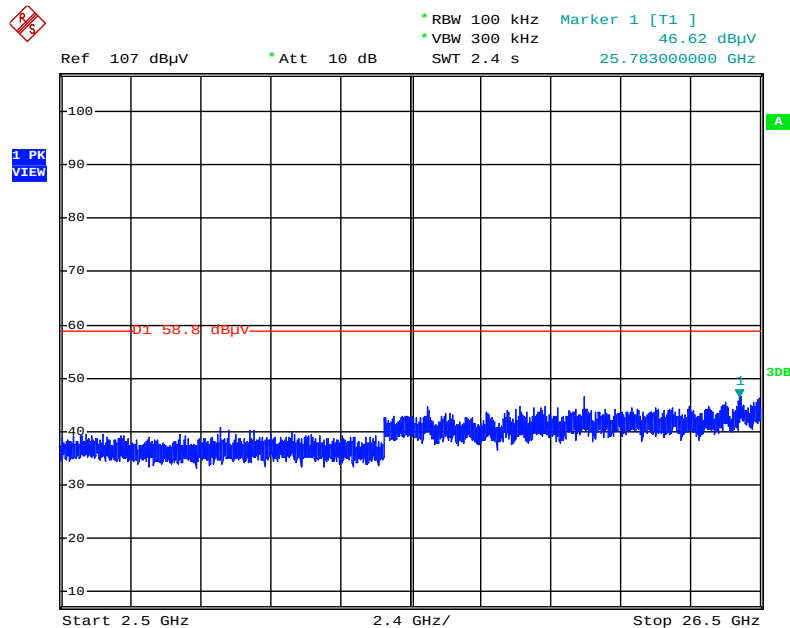


Date: 16.DEC.2015 00:47:47

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 11 / 30MHz~2400MHz (down 30dBc)

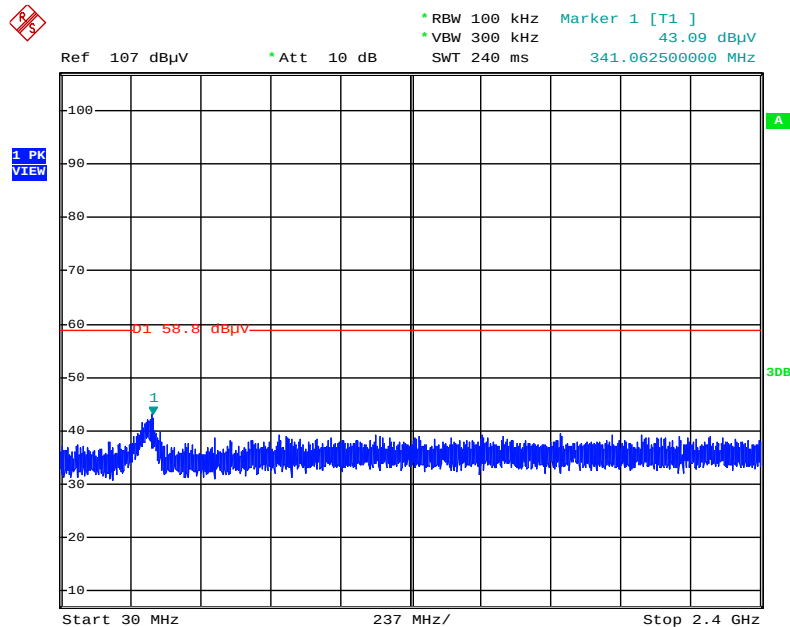


Date: 16.DEC.2015 00:49:02

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 11 / 2500MHz~26500MHz (down 30dBc)

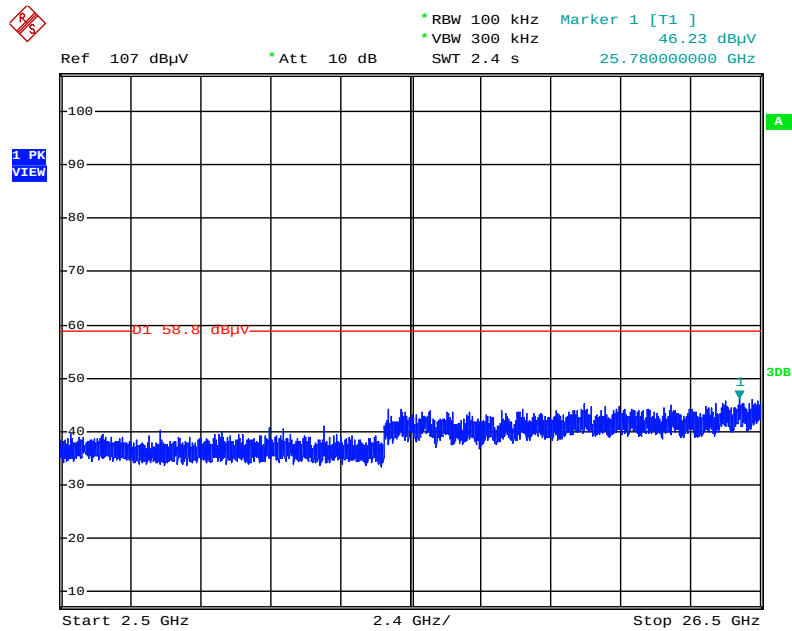


Date: 16.DEC.2015 00:48:42

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Reference Level

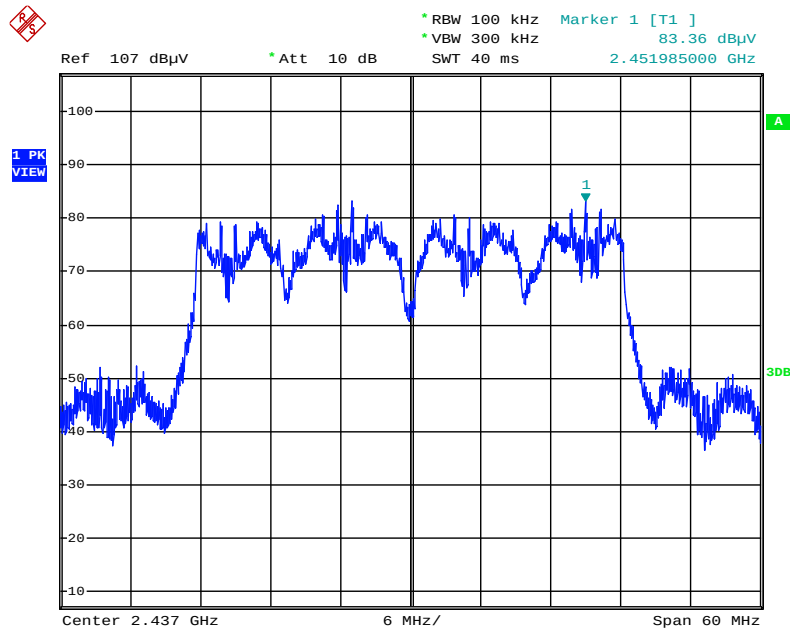


Date: 16.DEC.2015 00:50:56

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 3 / 30MHz~2400MHz (down 30dBc)

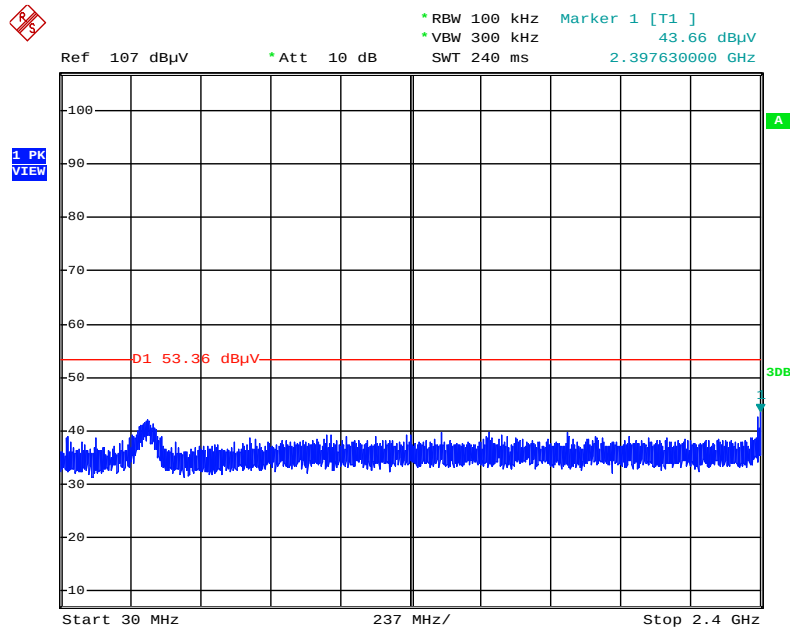


Date: 16.DEC.2015 00:52:18

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 3 / 2500MHz~26500MHz (down 30dBc)

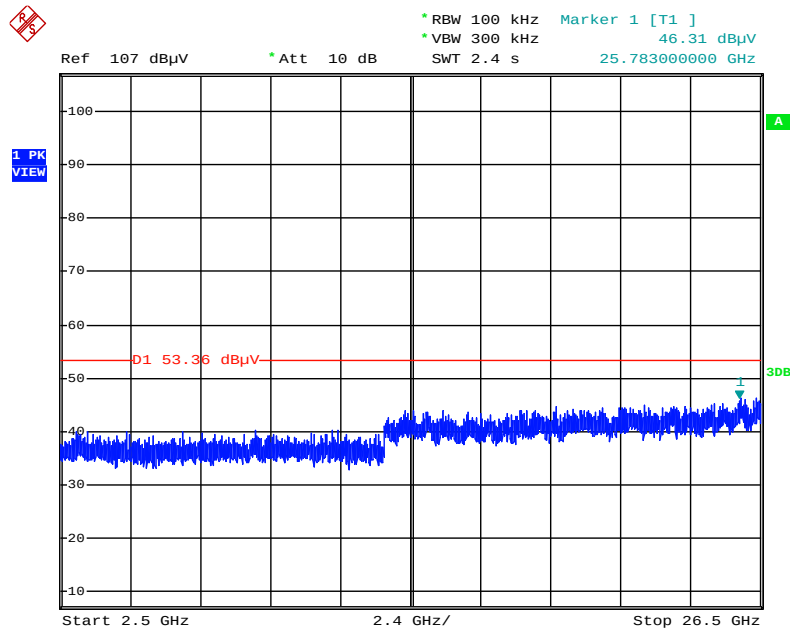


Date: 16.DEC.2015 00:52:45

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 9 / 30MHz~2400MHz (down 30dBc)

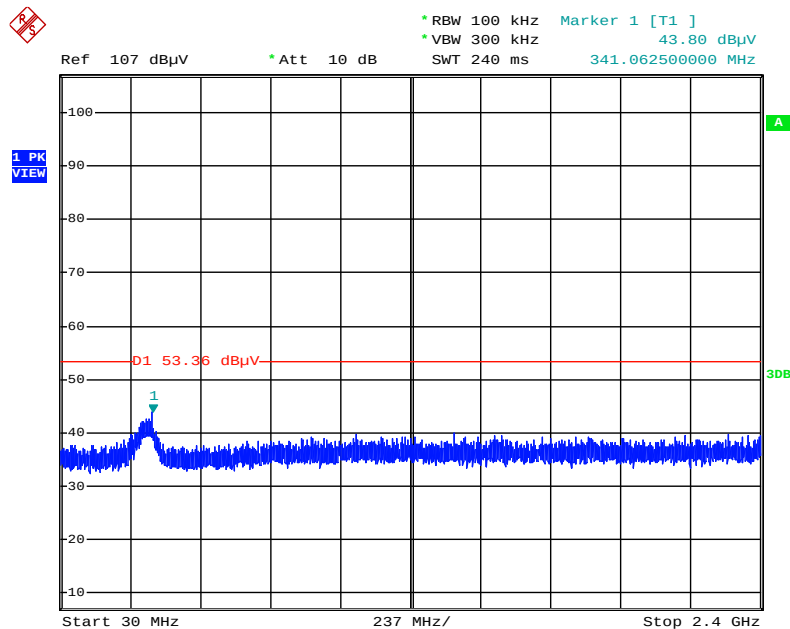

Date: 16.DEC.2015 00:54:30


Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 9 / 2500MHz~26500MHz (down 30dBc)

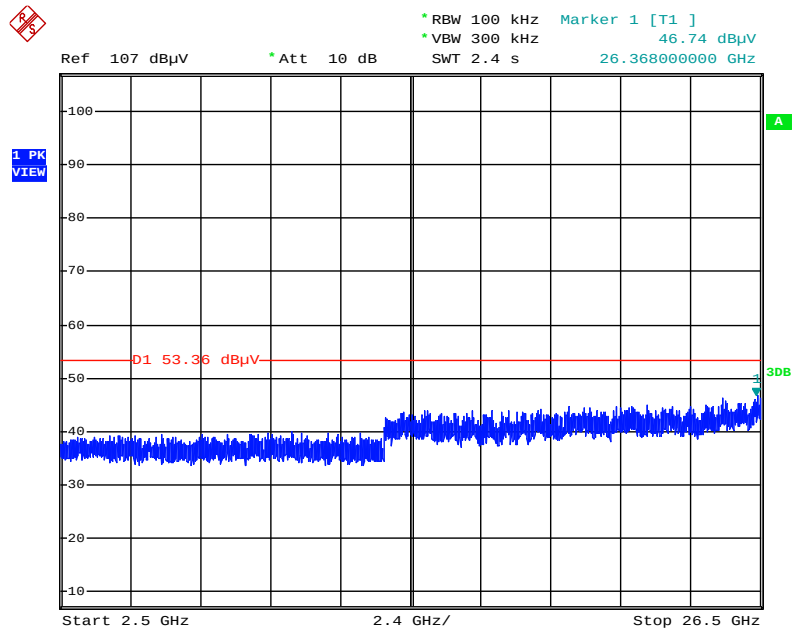

Date: 16.DEC.2015 00:53:52


For beamforming function:

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Reference Level

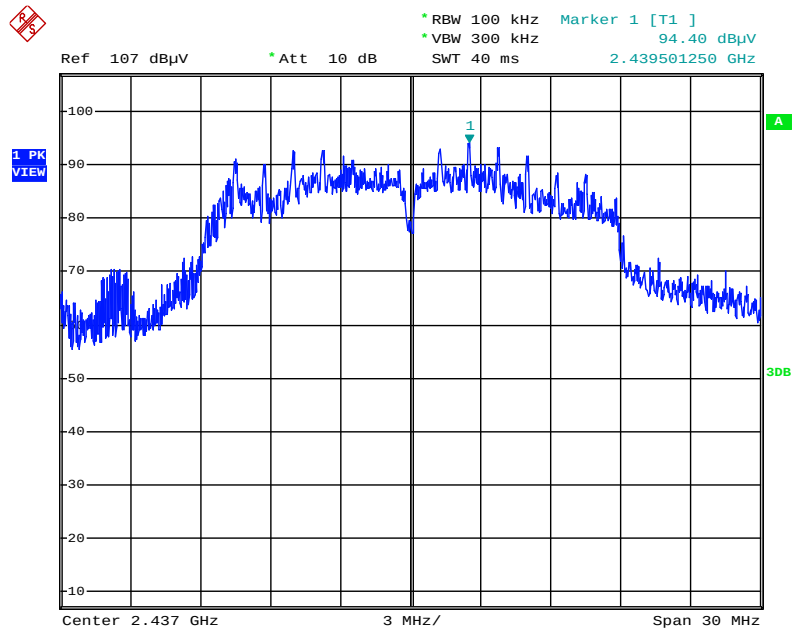


Date: 24.MAR.2016 01:49:21

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

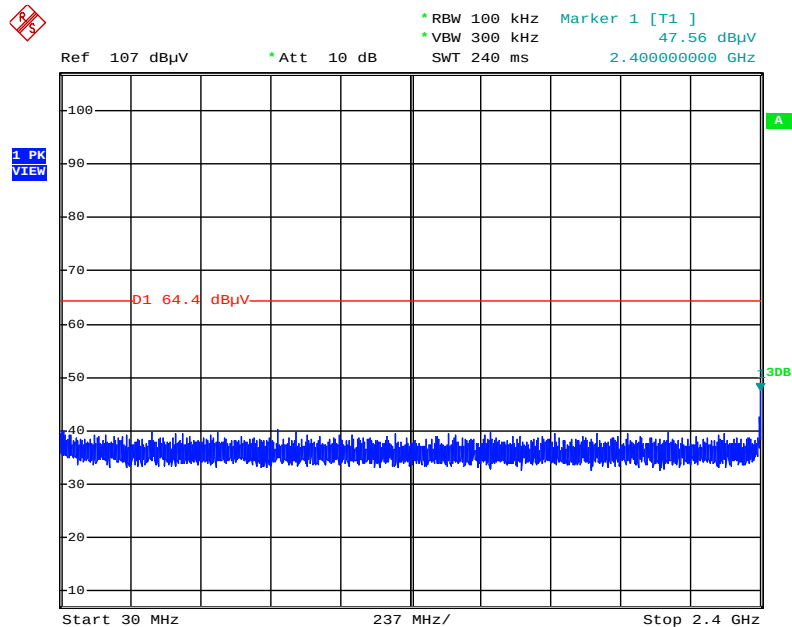


Date: 24.MAR.2016 01:51:07

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 1 / 2500MHz~26500MHz (down 30dBc)

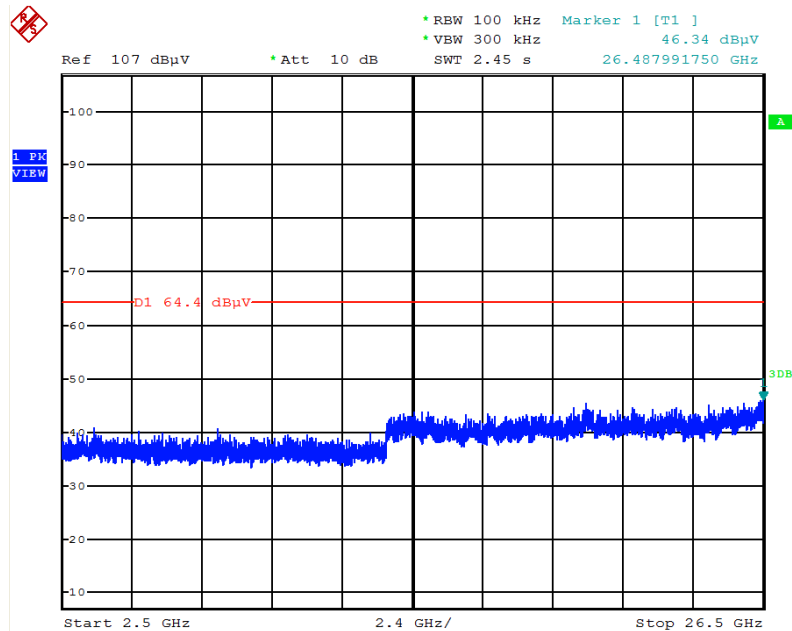


Date: 24.MAR.2016 01:55:46

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 11 / 30MHz~2400MHz (down 30dBc)

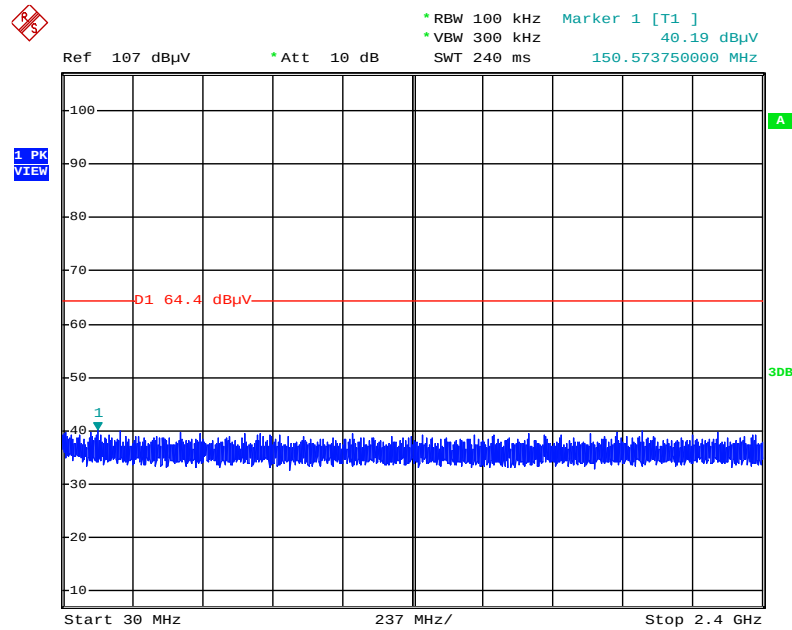


Date: 24.MAR.2016 01:57:28

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 11 / 2500MHz~26500MHz (down 30dBc)

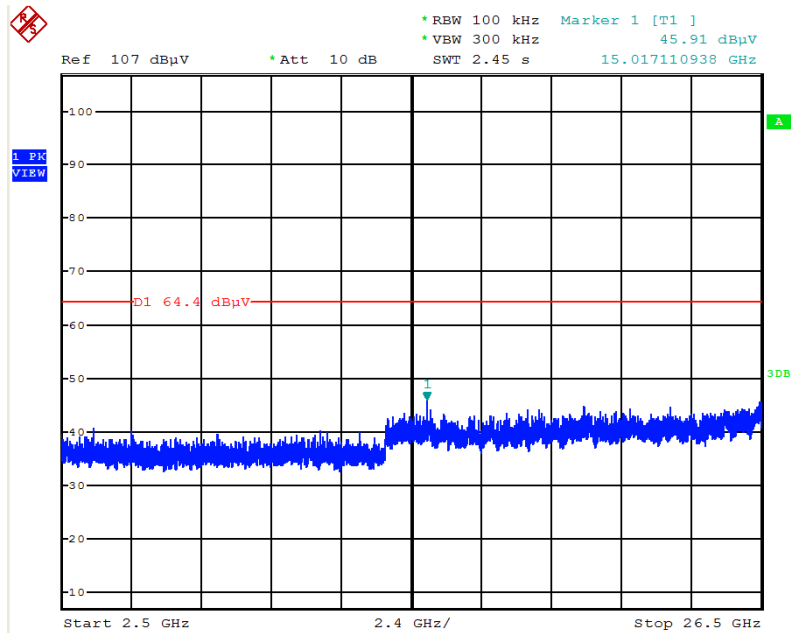


Date: 24.MAR.2016 01:57:58

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Reference Level

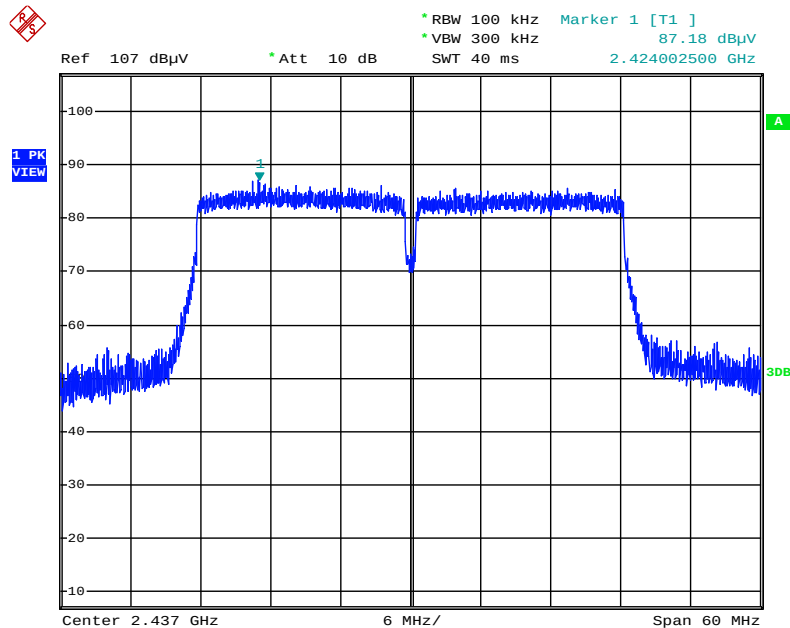


Date: 24.MAR.2016 02:02:13

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 3 / 30MHz~2400MHz (down 30dBc)

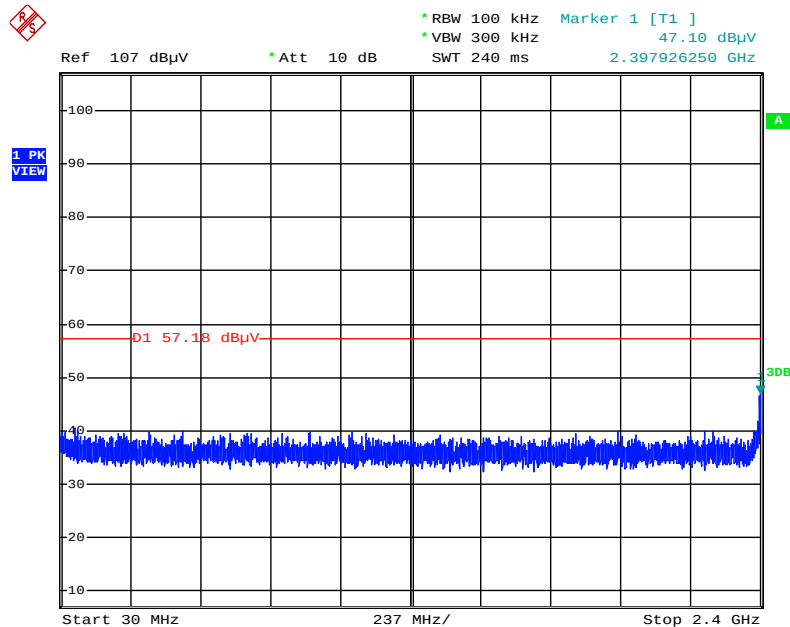


Date: 24.MAR.2016 02:04:16

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 3 / 2500MHz~26500MHz (down 30dBc)

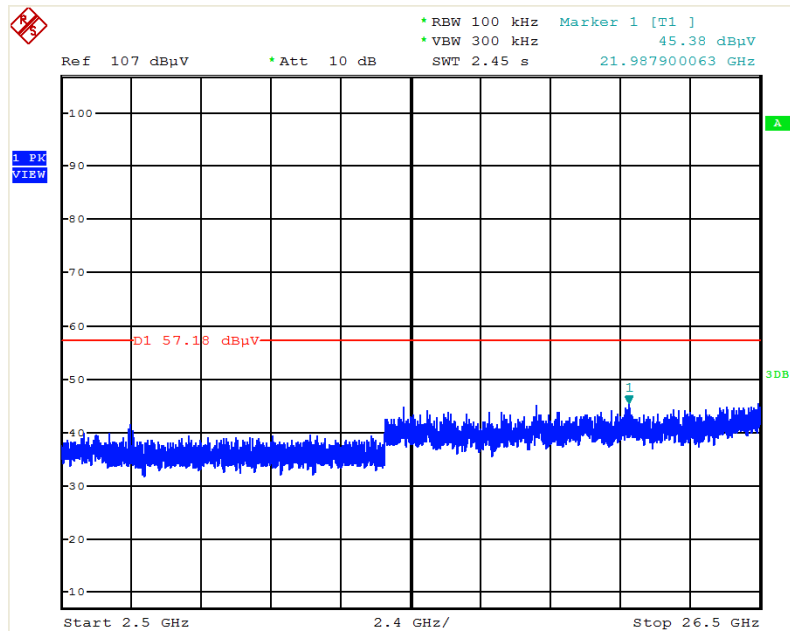


Date: 24.MAR.2016 02:04:42

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 9 / 30MHz~2400MHz (down 30dBc)

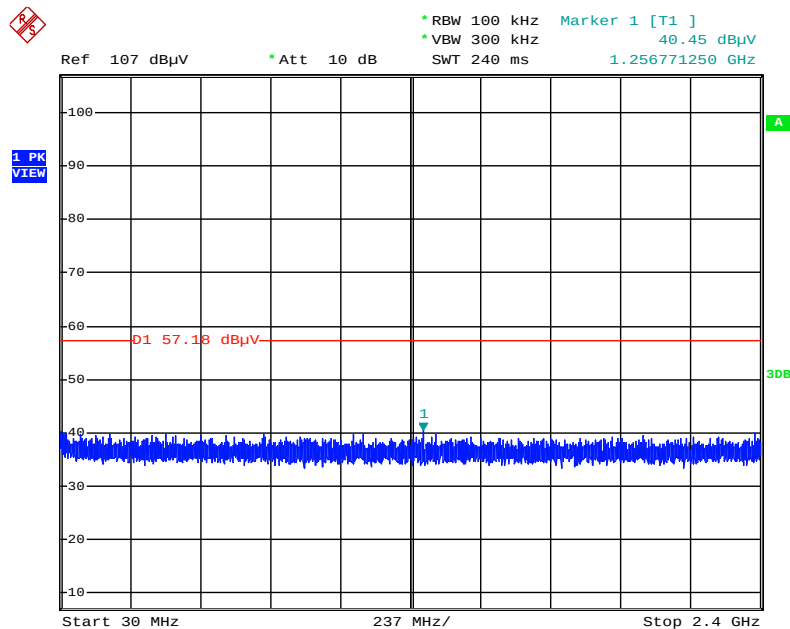

Date: 24.MAR.2016 02:05:58

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 9 / 2500MHz~26500MHz (down 30dBc)

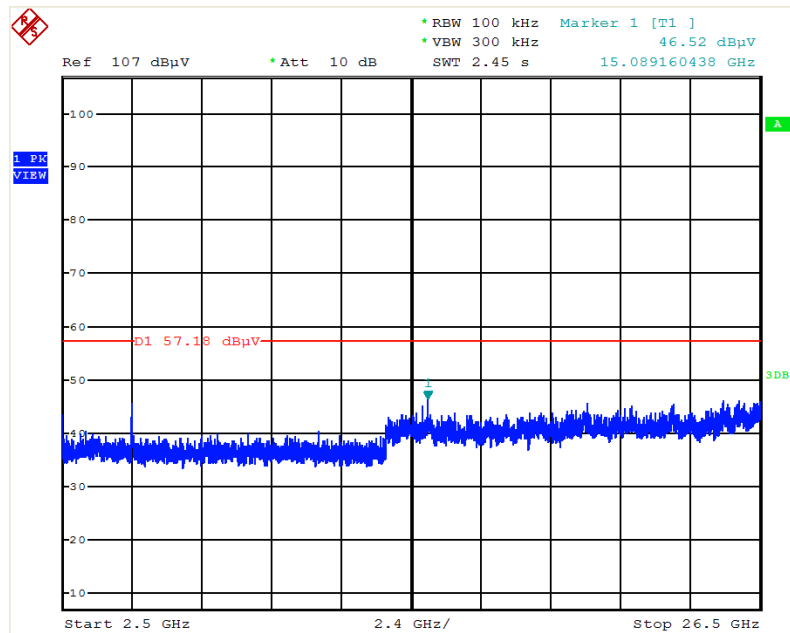

Date: 24.MAR.2016 02:06:26

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 22, 2015	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 08, 2015	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 23, 2015	Conduction (CO01-CB)
Impedance Stabilization Network	Teseq	ISN T800	24557	150kHz ~ 230MHz	Oct. 27, 2015	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	May 25, 2015	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	37880	20MHz ~ 2GHz	Sep. 03, 2015	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 22, 2015	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Mar. 15, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 12, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 18, 2016	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Nov.13, 2015	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Oct. 27, 2015	Radiation (03CH01-CB)
EMI Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8.4GHz	Jan. 27, 2016	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-17	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 16, 2016*	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 09, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz ~ 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz ~ 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz ~ 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz ~ 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz ~ 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 02, 2015	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%