

# HYUNDAI CALIBRATION & CERTIFICATION TECH. CO., LTD.



PRODUCT COMPLIANCE DIVISION  
SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI, KYOUNGKI-DO, 467-701, KOREA  
TEL : +82 31 639 8518 FAX : +82 31 639 8525 [www.hct.co.kr](http://www.hct.co.kr)

## VERIFICATION

**KBT Mobile Co., Ltd.**  
4F POLARIS I, #15-3, JEONGJA-DONG,  
BUNDANG-GUSEONGNAM-SI, GYEONGGI-DO, KOREA  
FRN: 0011629730

Date of Issue: November 17, 2004  
Test Report No.: HCT-SAR04-1110  
Test Site: HYUNDAI CALIBRATION & CERTIFICATION  
TECHNOLOGIES CO., LTD.  
FRN: 0005866421

**MODEL**

:

**G902**

FCC Rule Part(s): Part 15  
Classification: CLASS B  
Standard(s): CISPR 22 CLASS B  
Equipment (EUT) Type: Dual-Band GSM Phone  
Trade Name/Model(s): KBT MOBILE / G902  
Port/ Connector(s): DC Input Port

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-1992. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HYUNDAI C-Tech. certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse of 1988, 21 U.S.C.853(a).

Report prepared by : Ki-Soo Kim  
Manager of Product Compliance Team



## TABLE OF CONTENTS

|                                                       | PAGE  |
|-------------------------------------------------------|-------|
| 1. GENERAL INFORMATION.....                           | 3     |
| 1.1 Product Description.....                          | 3     |
| 1.2 Related submittal(s)/Grant(s).....                | 3     |
| 1.3 Tested System Details.....                        | 4     |
| 1.4 Test Methodology.....                             | 4     |
| 1.5 Test Facility.....                                | 4     |
| 2. SYSTEM TEST CONFIGURATION.....                     | 5     |
| 2.1 Cable Description.....                            | 5     |
| 2.2 Noise Suppression Parts on Cable.....             | 5     |
| 2.3 EUT Exercise Software.....                        | 6     |
| 2.4 Equipment Modifications.....                      | 6     |
| 2.5 Configuration of Tested System.....               | 7     |
| 3. CONDUCTED AND RADIATED EMISSION TESTS SUMMARY..... | 8     |
| 3.1 Conducted Emission Tests.....                     | 8-10  |
| 3.2 Radiated Emission Tests.....                      | 11    |
| 3.3 Test Setup Photos.....                            | 11-14 |
| 4. FIELD STRENGTH CALCULATION.....                    | 15    |
| 5. Test Equipment.....                                | 16    |
| 6. Conclusion.....                                    | 17    |

## 1. GENERAL INFORMATION

---

### 1.1 Product Description

The KBT MOBILE CO., LTD. G902 Dual-Band GSM Phone.

Its basic purpose is used for communications. It transmits from GSM850 (824.20 – 848.80MHz) and receives from GSM1900 (1850.20 – 1909.80MHz).

The RF power is rated at GSM850 (0.75W) and GSM1900 (0.583W).

|                      |                                                                  |
|----------------------|------------------------------------------------------------------|
| FCC ID               | SK8G902                                                          |
| EUT Type             | Dual-Band GSM Phone                                              |
| Model                | G902                                                             |
| TX Frequency         | GSM850 (824.20 – 848.80MHz)<br>GSM1900 (1850.20MHz – 1909.80MHz) |
| RX Frequency         | GSM850 (869.20 – 893.80MHz)<br>GSM1900 (1930.20MHz – 1989.80MHz) |
| FCC Classification   | Licensed Portable Transmitter Held to Ear (PCE)                  |
| Max RF. Output Power | 0.75 W ERP GSM850 (28.8 dBm)<br>0.583 W EIRP GSM1900 (27.7 dBm)  |
| Modulation           | GSM                                                              |

### 1.2 Related Submittal(s) / Grant(s)

ORIGINAL SUBMITTAL ONLY

### **1.3 Tested System Details**

The Model names for all equipment, plus descriptions used in the tested system (including inserted cards) are:

| DEVICE TYPE         | MANUFACTURER         | MODEL NUMBER | FCC ID / DoC | CONNECTED TO |
|---------------------|----------------------|--------------|--------------|--------------|
| Dual-Band GSM Phone | KBT MOBILE CO., LTD. | G902         | SK8G902      | Adaptor/ P.C |
| Adaptor             | KBT MOBILE CO., LTD. | -            | N/A          | GSM Phone    |

### **1.4 Test Methodology**

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4/1992. Radiated testing was performed at an antenna to EUT distance of 3 meters.

### **1.5 Test Facility**

The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1, Maekok-Ri, Hobup-Myun, Ichon-Si, Kyoungki-Do, 467-701, KOREA. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 23, 2003(Registration Number : 90661)

## 2.SYSTEM TEST CONFIGURATION

### 2.1 Cable Description

The marked "(D)" means the Data Cable and "(P)" means the Power Cable.

|           | Power Cord<br>Shielded (Y/N) | I/O Cable Shielded<br>(Y/N) | Length (M) |
|-----------|------------------------------|-----------------------------|------------|
| GSM PHONE | N/A                          | N/A                         | -          |
| EAR PHONE | N/A                          | N                           | 1.2(D)     |
| Adapter   | N                            | N/A                         | 1.8(P)     |

### 2.2 Noise Suppression Parts on Cable.

|           | Ferrite Bead<br>(Y/N) | Location | Metal Hood<br>(Y/N) | Location    |
|-----------|-----------------------|----------|---------------------|-------------|
| GSM PHONE | N                     | N/A      | N/A                 | Adapter END |
| EAR PHONE | N                     | N/A      | Y                   | CDMA PHONE  |
| Adapter   | Y                     | N/A      | Y                   | CDMA PHONE  |

## **2.3 EUT exercise Software**

The EUT was tested on the standby during the radiated and conducted emission testing


## **2.4 Equipment Modifications**

N/A

## 2.5 Configuration of Test system

Line Conducted Test : EUT was connected to LISN, all other supporting equipment were connected to another LISN. Preliminary Power line Conducted Emission tests were performed by using the procedure in ANSI C63.4/1992 7.2.3 to determine the worse operating conditions.

Radiated Emission Test : Preliminary Radiated Emissions tests were conducted using the procedure in ANSI C63.4/1992 8.3.1.1 to determine the worse pirating condition. Final Radiated Emission tests were conducted at 3 meter open area test site.

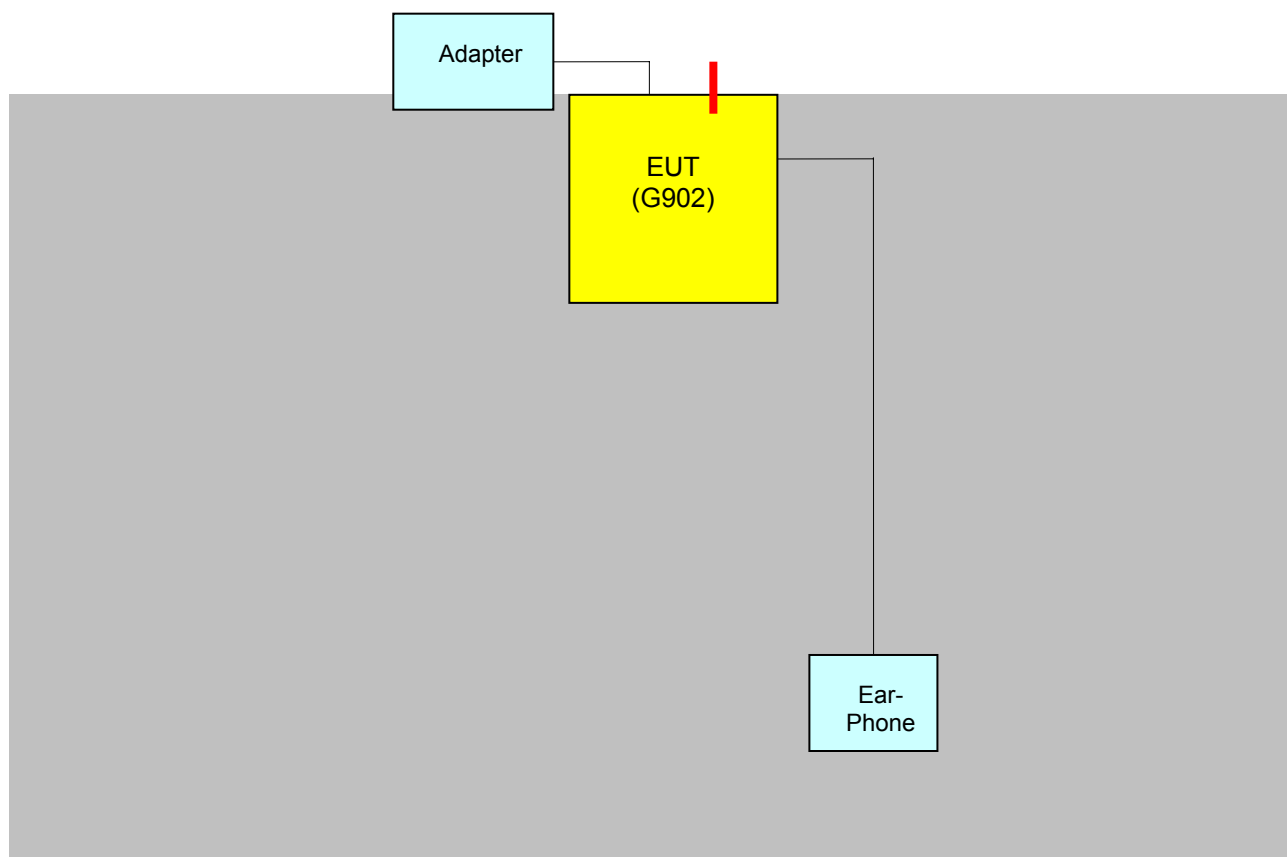

[Configuration of Tested System]

### 3. CONDUCTED AND RADIATED EMISSION TESTS SUMMARY

#### 3.1 Conducted Emissions Tests


The following table shows the highest levels of conducted emissions on both polarization of hot and neutral line.

=====

|                     |                                            |                      |
|---------------------|--------------------------------------------|----------------------|
| Humidity Level      | : 45 %                                     | Temperature: 22.1 °C |
| Limit apply to      | : CISPR 22                                 |                      |
| Type of Tests       | : CLASS B                                  |                      |
| Result              | : PASSED BY -4.1 dB                        |                      |
| Operating Condition | : CHARGING BATTERY                         |                      |
| Detector            | : CISPR Quasi-Peak (6 dB Bandwidth: 9 KHz) |                      |

| Power Line Conducted Emissions |                  |           |            | FCC Class B  |             |
|--------------------------------|------------------|-----------|------------|--------------|-------------|
| Frequency (MHz)                | Amplitude (dBuV) | Conductor | Result     | Limit (dBuV) | Margin (dB) |
| 0.425                          | 53.2             | NEUTRAL   | Quasi-Peak | 57           | -4.1        |
| 0.425                          | 42.9             | NEUTRAL   | Average    | 47           | -4.5        |
| 0.425                          | 48.3             | HOT       | Quasi-Peak | 57           | -9.0        |
| 0.425                          | 41.3             | HOT       | Average    | 47           | -6.0        |

Line Conducted Emissions Tabulated Data

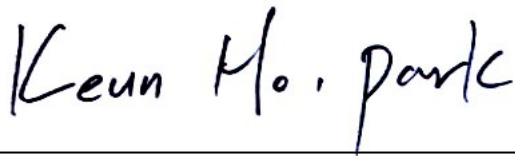

Measured by: Keun-Ho Park / Engineer

Date : November 15, 2004




**HCT**  
**EMC TESTING Laboratory**

EUT: G902  
Manufacturer: KBT  
Operating Condition: CHARGING MODE  
Test Site: SHIELD ROOM  
Operator: KEUN-HO PARK  
Test Specification: CISPR 22 CLASSB  
Comment: H

**SCAN TABLE: "CISPR 22 Voltage"**

| Short Description: |                |            | CISPR 22 Voltage |            |           |            |
|--------------------|----------------|------------|------------------|------------|-----------|------------|
| Start Frequency    | Stop Frequency | Step Width | Detector         | Meas. Time | IF Bandw. | Transducer |
| 150.0 kHz          | 500.0 kHz      | 5.0 kHz    | MaxPeak          | 10.0 ms    | 9 kHz     | None       |
|                    |                |            | Average          |            |           |            |
| 500.0 kHz          | 5.0 MHz        | 5.0 kHz    | MaxPeak          | 10.0 ms    | 9 kHz     | None       |
|                    |                |            | Average          |            |           |            |
| 5.0 MHz            | 30.0 MHz       | 5.0 kHz    | MaxPeak          | 10.0 ms    | 9 kHz     | None       |
|                    |                |            | Average          |            |           |            |

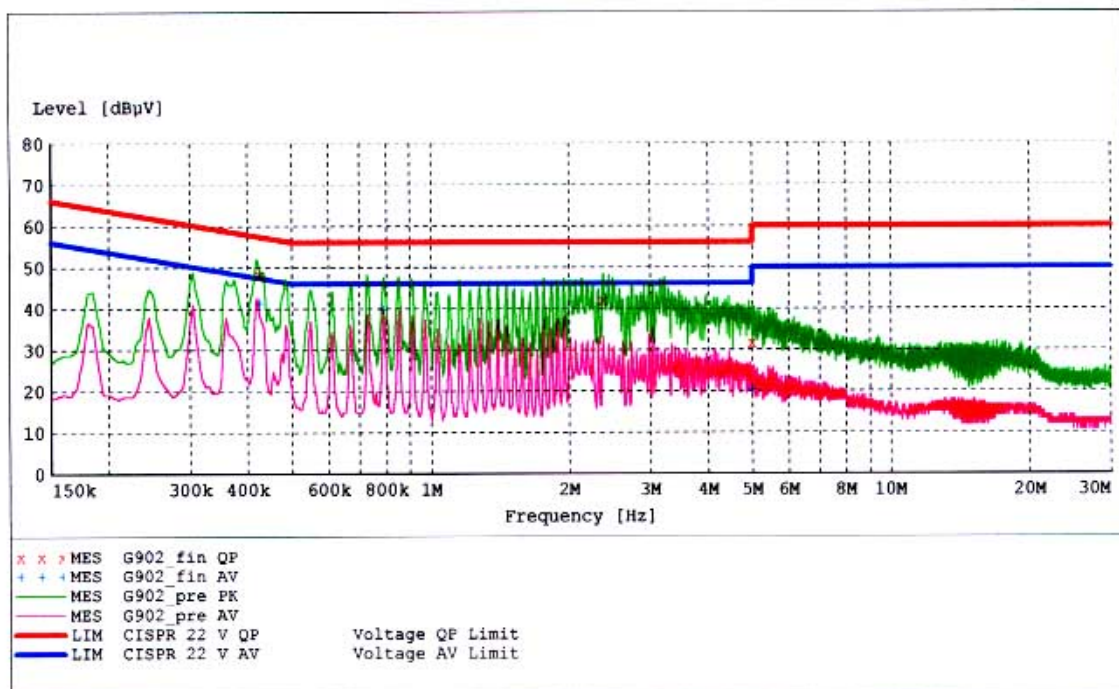

**MEASUREMENT RESULT: "G902\_fin QP"**

| Frequency MHz | Level dBpV | Transd dB | Limit dBpV | Margin dB | Line | PE  |
|---------------|------------|-----------|------------|-----------|------|-----|
| 0.425000      | 48.30      | 10.1      | 57         | 9.0       | 1    | --- |
| 2.375000      | 41.90      | 10.3      | 56         | 14.1      | 1    | --- |
| 5.000000      | 31.50      | 10.3      | 56         | 24.5      | 1    | --- |

**MEASUREMENT RESULT: "G902\_fin AV"**


| Frequency MHz | Level dBpV | Transd dB | Limit dBpV | Margin dB | Line | PE  |
|---------------|------------|-----------|------------|-----------|------|-----|
| 0.425000      | 41.30      | 10.1      | 47         | 6.0       | 1    | --- |
| 0.790000      | 39.80      | 10.2      | 46         | 6.2       | 1    | --- |
| 5.000000      | 20.40      | 10.3      | 46         | 25.6      | 1    | --- |

**HCT**  
**EMC TESTING Laboratory**

EUT: G902  
Manufacturer: KBT  
Operating Condition: CHARGING MODE  
Test Site: SHIELD ROOM  
Operator: KEUN-HO PARK  
Test Specification: CISPR 22 CLASSB  
Comment: N

**SCAN TABLE: "CISPR 22 Voltage"**

| Short Description: |                |            | CISPR 22 Voltage |            |           |            |
|--------------------|----------------|------------|------------------|------------|-----------|------------|
| Start Frequency    | Stop Frequency | Step Width | Detector         | Meas. Time | IF Bandw. | Transducer |
| 150.0 kHz          | 500.0 kHz      | 5.0 kHz    | MaxPeak          | 10.0 ms    | 9 kHz     | None       |
|                    |                |            | Average          |            |           |            |
| 500.0 kHz          | 5.0 MHz        | 5.0 kHz    | MaxPeak          | 10.0 ms    | 9 kHz     | None       |
|                    |                |            | Average          |            |           |            |
| 5.0 MHz            | 30.0 MHz       | 5.0 kHz    | MaxPeak          | 10.0 ms    | 9 kHz     | None       |
|                    |                |            | Average          |            |           |            |

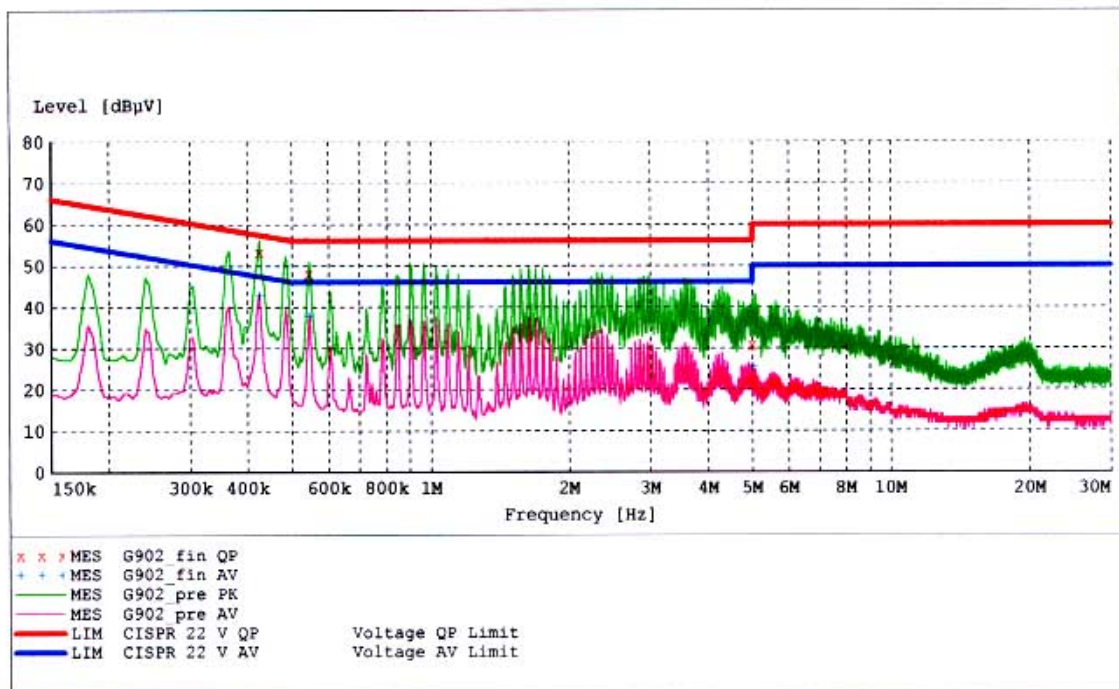

**MEASUREMENT RESULT: "G902\_fin QP"**

| Frequency MHz | Level dBμV | Transd dB | Limit dBμV | Margin dB | Line | PE  |
|---------------|------------|-----------|------------|-----------|------|-----|
| 0.425000      | 53.20      | 10.1      | 57         | 4.1       | 1    | --- |
| 0.545000      | 48.10      | 10.1      | 56         | 7.9       | 1    | --- |
| 5.000000      | 30.70      | 10.3      | 56         | 25.3      | 1    | --- |

**MEASUREMENT RESULT: "G902\_fin AV"**

| Frequency MHz | Level dBμV | Transd dB | Limit dBμV | Margin dB | Line | PE  |
|---------------|------------|-----------|------------|-----------|------|-----|
| 0.425000      | 42.90      | 10.1      | 47         | 4.5       | 1    | --- |
| 0.545000      | 37.90      | 10.1      | 46         | 8.1       | 1    | --- |
| 5.025000      | 25.40      | 10.3      | 50         | 24.6      | 1    | --- |



### **3.3 Test Setup Photos**

#### **3.3.1 Conducted Radiated Emission**





### **3.3.2 Radiated Emission**



## 4.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.

The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dBuV is obtained. The Antenna Factor of 7.4 and a Cable Factor of 1.1 is added. The 30 dBuV/m value was mathematically converted to its corresponding level in uV/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dBuV/m}$$

$$\text{Level in uV/m} = \text{Common Antilogarithm} [(30 \text{ dBuV/m})/20] = 31.6 \text{ uV/m}$$

## 5.1 Test Equipment

---

| Type                   | Manufacture      | Model Number    | CAL Date   |
|------------------------|------------------|-----------------|------------|
| EMI Test Receiver      | Rohde & Schwarz  | ESH3            | 2004.02    |
| EMI Test Receiver      | Rohde & Schwarz  | ESVP            | 2004.06    |
| EMI Test Receiver      | Rohde & Schwarz  | ESI40           | 2004.02    |
| EMI Test Receiver      | Rohde & Schwarz  | ESVS30          | 2004.06    |
| LISN                   | EMCO             | 3816/2          | 2004.11    |
| LISN                   | EMCO             | 3816/2          | 2004.08    |
| Amplifier              | Hewlett-Packard  | 8447E           | 2004.08    |
| Absorbing Clamp        | Rohde & Schwarz  | MDS-21          | 2004.04    |
| Dipole Antennas        | Rohde & Schwarz  | VHAP            | 2004.07    |
| Dipole Antennas        | Rohde & Schwarz  | UHAP            | 2004.07    |
| Biconical Antenna      | Rohde & Schwarz  | VHA9103         | 2004.07    |
| Log-Periodic Antenna   | Rohde & Schwarz  | UHALP9107       | 2004.07    |
| Antenna Position Tower | EMCO             | 1051-12         | N/A        |
| Turn Table             | EMCO             | 1060-06         | N/A        |
| Power Analyzer         | Voltech          | PM 3300         | 2004.02    |
| Reference Network      | ImpedanceVoltech | IEC 555         | N/A        |
| AC Power Source        | PACIFIC          | Magnetic Module | N/A        |
| AC Power Source        | PACIFIC          | 360AMX          | 2003.11.25 |
| Controller             | HD GmbH          | HD 100          | N/A        |
| EMI in Motion          | HD GmbH          | KMS 560         | N/A        |

## **6.1 Conclusion**

---

The data collected shows that the KBT MOBILE CO., LTD. Dual- Mode GSM Phone **FCC ID: SK8G902**. Complies with §15.107 and §15.109 of the FCC Rules.