

Certification Test Report

**FCC ID: SK9ITR9002
IC: 864G-ITR9002**

**FCC Rule Part: 15.247
IC Radio Standards Specification: RSS-210**

ACS Report Number: 11-0104.W06.11.C

**Manufacturer: Itron Electricity Metering, Inc.
Model: ITR9002**

**Test Begin Date: March 29, 2011
Test End Date: April 1, 2011**

Report Issue Date: April 14, 2011



FOR THE SCOPE OF ACCREDITATION UNDER LAB Code 200612-0

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

A handwritten signature in black ink, appearing to read "Kirby Munroe".

Reviewed by: _____
Kirby Munroe
Director, Wireless Certifications
ACS, Inc.

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

This report contains 29 pages

TABLE OF CONTENTS

1	GENERAL	4
1.1	PURPOSE.....	4
1.2	PRODUCT DESCRIPTION	4
1.3	TEST METHODOLOGY AND CONSIDERATIONS	4
2	TEST FACILITIES.....	5
2.1	LOCATION	5
2.2	LABORATORY ACCREDITATIONS/RECOGNITIONS/CERTIFICATIONS	5
2.3	RADIATED EMISSIONS TEST SITE DESCRIPTION	6
2.3.1	<i>Semi-Anechoic Chamber Test Site.....</i>	6
2.3.2	<i>Open Area Tests Site (OATS)</i>	7
2.4	CONDUCTED EMISSIONS TEST SITE DESCRIPTION	8
3	APPLICABLE STANDARD REFERENCES.....	8
4	LIST OF TEST EQUIPMENT	9
5	SUPPORT EQUIPMENT	10
6	EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM	10
7	SUMMARY OF TESTS.....	11
7.1	ANTENNA REQUIREMENT – FCC: SECTION 15.203	11
7.2	POWER LINE CONDUCTED EMISSIONS – FCC: SECTION 15.207 IC: RSS-GEN 7.2.4.....	11
7.2.1	<i>Measurement Procedure.....</i>	11
7.2.2	<i>Measurement Results</i>	11
7.3	PEAK OUTPUT POWER - FCC SECTION 15.247(B)(2) IC: RSS-210 A8.4(1).....	13
7.3.1	<i>Measurement Procedure (Conducted Method).....</i>	13
7.3.2	<i>Measurement Results</i>	13
7.4	CHANNEL USAGE REQUIREMENTS	15
7.4.1	<i>Carrier Frequency Separation – FCC: Section 15.247(a)(1) IC: RSS-210 A8.1(b).....</i>	15
7.4.1.1	Measurement Procedure.....	15
7.4.1.2	Measurement Results	15
7.4.2	<i>Number of Hopping Channels – FCC: Section 15.247(a)(1)(i) IC: RSS-210 A8.1(c).....</i>	17
7.4.3	<i>Channel Dwell Time – FCC: Section 15.247(a)(1)(i) IC: RSS-210 A8.1(c).....</i>	19
7.4.3.1	Measurement Procedure.....	19
7.4.3.2	Measurement Results	19
7.4.4	<i>20dB / 99% Bandwidth - FCC: Section 15.247(a)(1)(i) IC: RSS-210 A8.1(c)</i>	21
7.4.4.1	Measurement Procedure.....	21
7.4.4.2	Measurement Results	21
7.5	BAND-EDGE COMPLIANCE AND SPURIOUS EMISSIONS-FCC 15.247(D) IC:RSS-210 2.2, A8.5	24
7.5.1	<i>Band-Edge Compliance of RF Conducted Emissions.....</i>	24
7.5.1.1	Measurement Procedure.....	24
7.5.1.2	Measurement Results	24
7.5.2	<i>RF Conducted Spurious Emissions.....</i>	26
7.5.2.1	Measurement Procedure.....	26
7.5.2.2	Measurement Results	26
7.5.3	<i>Radiated Spurious Emissions - FCC Section 15.205 IC: RSS-210 2.2.....</i>	29
7.5.3.1	Measurement Procedure.....	29
7.5.3.2	Measurement Results	29
7.5.3.3	Sample Calculation:	30
8	CONCLUSION	30

1 GENERAL

1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations and Industry Canada's Radio Standards Specification RSS-210 for Certification of a single limited modular approval.

1.2 Product description

The Itron ITR9002 is a transmitter module that operates in the 902 MHz to 928 MHz unlicensed band. The module operates on direct current voltage which is supplied by a host device.

Manufacturer Information:

Itron Electricity Metering, Inc.
313 North Highway 11
West Union, SC 29696

Technical details:

Modulation	Frequency Range (MHz)	Number of Channels	Channel Separation (kHz)	Data Rates Supported (kbps)
FSK	902.25 - 927.75	52	500	19.2
FSK	902.25 - 927.75	52	500	152.3

Test Sample Serial Number(s): BRD 4 (16), BRD 6(12)

Test Sample Condition: The test samples were provided in good working order with no visible defects.

1.3 Test Methodology and Considerations

For the purpose of RF conducted measurements, the ITR9002 module was modified with a temporary 50 ohm antenna port.

All available data rates were evaluated and worst case presented in this report where applicable.

For radiated emissions, three different orientations were evaluated; X-Position, Y-Position, and Z-Position. Final emissions measurements were performed in the worst case orientation which was Y-Position.

2 TEST FACILITIES

2.1 Location

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions
5015 B.U. Bowman Drive
Buford, GA 30518
Phone: (770) 831-8048
Fax: (770) 831-8598

2.2 Laboratory Accreditations/Recognitions/Certifications

ACS is accredited to ISO/IEC 17025 by the National Institute of Standards and Technology under their National Voluntary Laboratory Accreditation Program (NVLAP), Lab Code 200612-0. Unless otherwise specified, all tests methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

The Semi-Anechoic Chamber Test Site, Open Area Test Site (OATS) and Conducted Emissions Site have been fully described, submitted to, and accepted by the FCC, Industry Canada and the Japanese Voluntary Control Council for Interference by information technology equipment.

FCC Registration Number: 894540

Industry Canada Lab Code: IC 4175A-1

VCCI Member Number: 1831

- VCCI OATS Registration Number R-1526
- VCCI Conducted Emissions Site Registration Number: C-1608

2.3 Radiated Emissions Test Site Description

2.3.1 Semi-Anechoic Chamber Test Site

The Semi-Anechoic Chamber Test Site consists of a 20' x 30' x 18' shielded enclosure. The chamber is lined with Toyo Ferrite Grid Absorber, model number FFG-1000. The ferrite tile grid is 101 x 101 x 19mm thick and weighs approximately 550 grams. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber.

The turntable is 150cm in diameter and is located 160cm from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is all steel, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Behind the turntable is a 3' x 6' x 4' deep shielded pit used for support equipment if necessary. The pit is equipped with 1 - 4" PVC chases from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3-1 below:

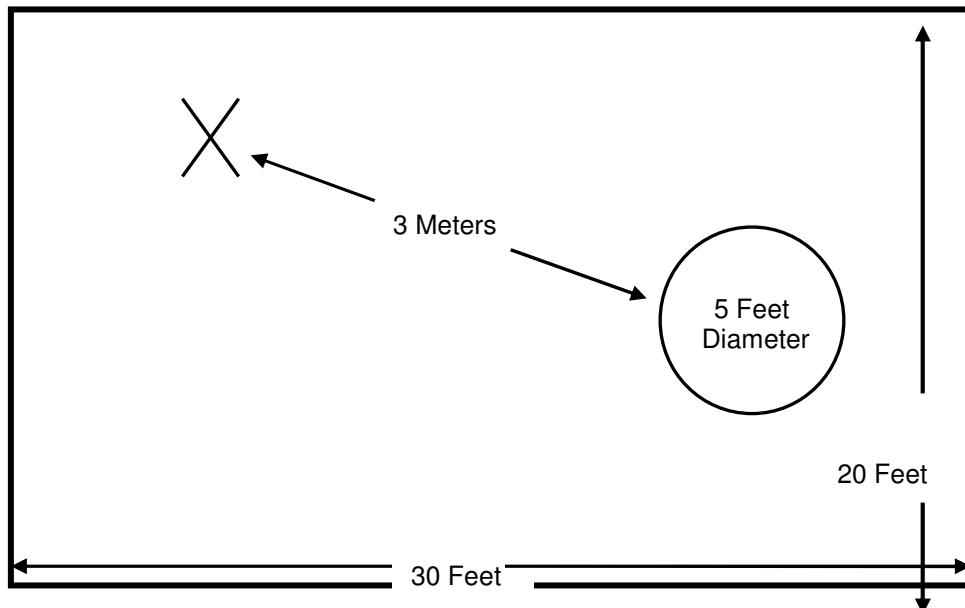


Figure 2.3-1: Semi-Anechoic Chamber Test Site

2.3.2 Open Area Tests Site (OATS)

The open area test site consists of a 40' x 66' concrete pad covered with a perforated electro-plated galvanized sheet metal. The perforations in the sheet metal are 1/8" holes that are staggered every 3/16". The individual sheets are placed to overlap each other by 1/4" and are riveted together to provide a continuous seam. Rivets are spaced every 3" in a 3 x 20 meter perimeter around the antenna mast and EUT area. Rivets in the remaining area are spaced as necessary to properly secure the ground plane and maintain the electrical continuity.

The entire ground plane extends 12' beyond the turntable edge and 16' beyond the antenna mast when set to a 10 meter measurement distance. The ground plane is grounded via 4 - 8' copper ground rods, each installed at a corner of the ground plane and bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is an all aluminum 10' flush mounted table installed in an all aluminum frame. The table is remotely operated from inside the control room located 40' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Adjacent to the turntable is a 7' x 7' square and 4' deep concrete pit used for support equipment if necessary. The pit is equipped with 5 - 4" PVC chases from the pit to the control room that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit. The pit is covered with 2 sheets of 1/4" diamond style re-enforced steel sheets. The sheets are painted to match the perforated steel ground plane; however the underside edges have been masked off to maintain the electrical continuity of the ground plane. All reflecting objects are located outside of the ellipse defined in ANSI C63.4.

A diagram of the Open Area Test Site is shown in Figure 2.3-2 below:

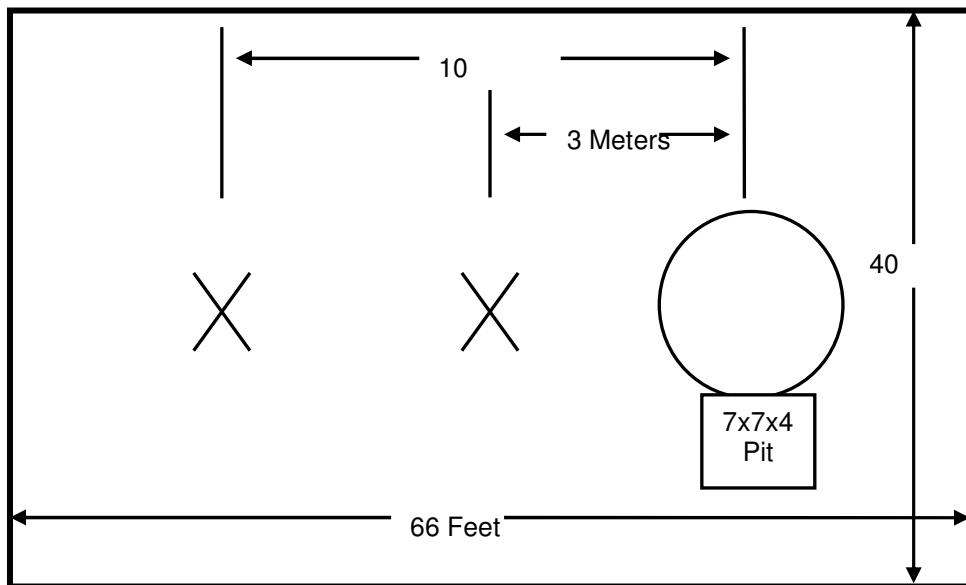


Figure 2.3-2: Open Area Test Site

2.4 Conducted Emissions Test Site Description

The AC mains conducted EMI site is located in the main EMC lab. It consists of an 8' x 8' solid aluminum horizontal group reference plane (GRP) bonded every 3" to an 8' X 8' vertical ground plane.

The site is of sufficient size to test table top and floor standing equipment in accordance with section 6.1.4 of ANSI C63.4.

A diagram of the room is shown below in figure 4.1.3-1:

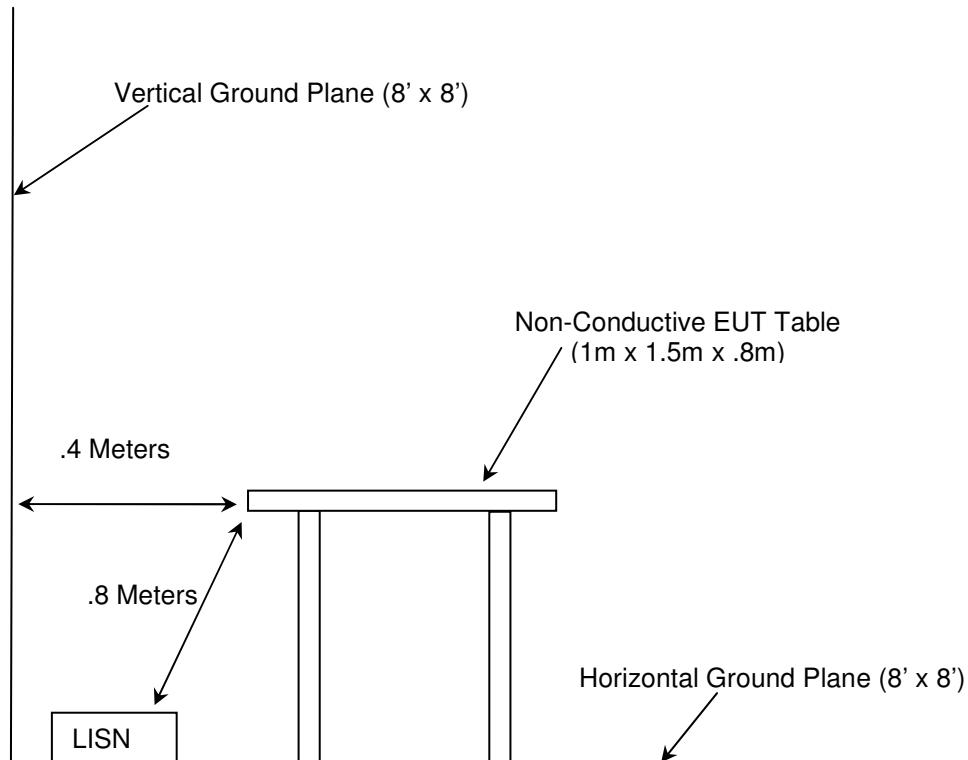


Figure 2.4-1: AC Mains Conducted EMI Site

3 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ❖ ANSI C63.4-2003: Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the 9KHz to 40GHz
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2010
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2010
- ❖ FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems, March 30, 2000
- ❖ Industry Canada Radio Standards Specification: RSS-210 - Low-power License-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, Issue 8 December 2010
- ❖ Industry Canada Radio Standards Specification: RSS-GEN – General Requirements and Information for the Certification of Radiocommunication Equipment, Issue 3 December 2010.

4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

Table 4-1: Test Equipment

AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
1	Rohde & Schwarz	ESMI - Display	Spectrum Analyzers	833771/007	9/23/2010	9/23/2012
2	Rohde & Schwarz	ESMI-Receiver	Spectrum Analyzers	839587/003	9/23/2010	9/23/2012
22	Agilent	8449B	Amplifiers	3008A00526	9/2/2010	8/30/2011
25	Chase	CBL6111	Antennas	1043	9/13/2010	9/13/2012
30	Spectrum Technologies	DRH-0118	Antennas	970102	5/8/2009	5/8/2011
73	Agilent	8447D	Amplifiers	2727A05624	3/21/2011	3/21/2012
152	EMCO	3825/2	LISN	9111-1905	11/2/2010	11/2/2012
167	ACS	Chamber EMI Cable Set	Cable Set	167	1/26/2011	1/26/2012
168	Hewlett Packard	11947A	Attenuators	44829	2/4/2011	2/4/2012
283	Rohde & Schwarz	FSP40	Spectrum Analyzers	1000033	8/31/2010	8/31/2011
291	Florida RF Cables	SMRE	Cables	None	12/7/2010	12/7/2011
324	ACS	Belden	Cables	8214	7/9/2010	7/9/2011
331	Microwave Circuits	H1G513G1	Filters	31417	7/16/2010	7/16/2011
340	Aeroflex/Weinschel	AS-20	Attenuators	7136	10/5/2010	10/5/2011
422	Florida RF	SMS-200AW-72.0-SMR	Cables	805	12/29/2010	12/29/2011
430	RF Cables	SMS-290AW-480-SMS	Cables	N/A	4/27/2010	4/27/2011
RE40	Agilent Technologies	E7405A	Spectrum Analyzers	US39150132	7/20/2010	7/20/2011

5 SUPPORT EQUIPMENT

Table 5-1: Support Equipment

Item	Equipment Type	Manufacturer	Model Number	Serial Number
1	EUT	Itron	ITR9002	4260000230
2	Laptop	Dell	PP18L	N/A
3	Laptop Power Supply	Dell	HP-OQ065B83	CN-0N2765-47890-3AN-4279
4	AC USB Adaptor	Seidi	BCS13-BK	NA

6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

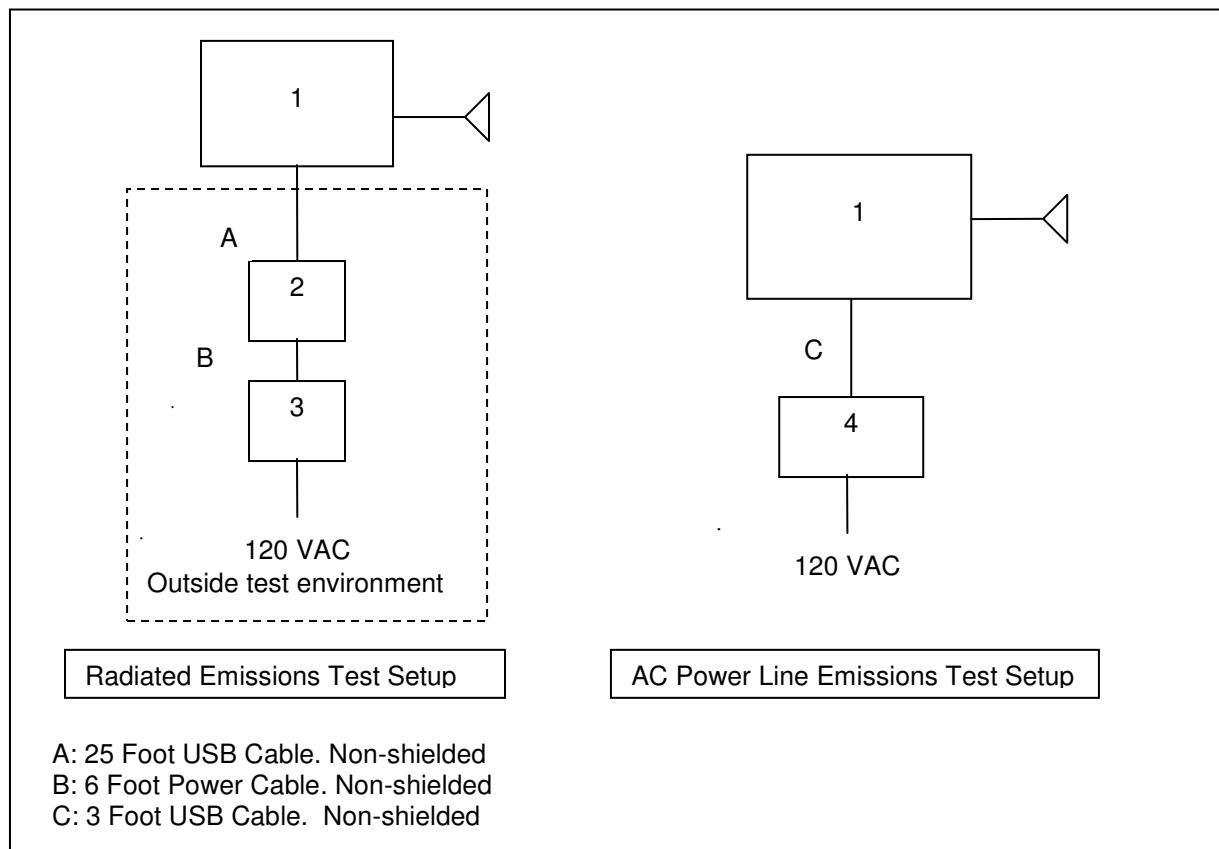


Figure 6-1: EUT Test Setup

7 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

7.1 Antenna Requirement – FCC: Section 15.203

The antenna is an omni-directional detachable antenna with gain of 5.1dBi. The EUT utilizes a standard SMA connector. Professional installation required.

7.2 Power Line Conducted Emissions – FCC: Section 15.207 IC: RSS-Gen 7.2.4

7.2.1 Measurement Procedure

ANSI C63.4 sections 6 and 7 were the guiding documents for this evaluation. Conducted emissions were performed from 150kHz to 30MHz with the spectrum analyzer's resolution bandwidth set to 9kHz and the video bandwidth set to 30kHz. The calculation for the conducted emissions is as follows:

Corrected Reading = Analyzer Reading + LISN Loss + Cable Loss

Margin = Applicable Limit - Corrected Reading

7.2.2 Measurement Results

Results of the test are shown below in and Tables 7.2.2-1 to 7.2.2-6.

Table 7.2.2-1: Line 1 Conducted EMI Results

Frequency (MHz)	Uncorrected Reading (dBuV)		Total Correction Factor (dB)	Corrected Level (dBuV)		Limit (dBuV)		Margin (dB)	
	Quasi-Peak	Average		Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
0.178	32.14	25.68	10.08	42.22	35.76	64.58	54.58	22.4	18.8
0.357	33.16	30.62	10.18	43.34	40.80	58.80	48.80	15.5	8.0
0.417	28.38	24.65	10.00	38.38	34.65	57.51	47.51	19.1	12.9
1.132	28.56	20.01	10.00	38.56	30.01	56.00	46.00	17.4	16.0
1.371	28.27	21.95	10.00	38.27	31.95	56.00	46.00	17.7	14.1
3.215	21.6	11.94	10.12	31.72	22.06	56.00	46.00	24.3	23.9

Table 7.2.2-2: Line 2 Conducted EMI Results

Frequency (MHz)	Uncorrected Reading (dBuV)		Total Correction Factor (dB)	Corrected Level (dBuV)		Limit (dBuV)		Margin (dB)	
	Quasi- Peak	Average		Quasi- Peak	Average	Quasi- Peak	Average	Quasi- Peak	Average
0.179	31.17	22.23	10.08	41.25	32.31	64.53	54.53	23.3	22.2
0.299	32.86	29.59	10.02	42.88	39.61	60.27	50.27	17.4	10.7
0.358	31.65	28.55	10.18	41.83	38.73	58.77	48.77	16.9	10.0
0.893	27.73	24.1	10.57	38.30	34.67	56.00	46.00	17.7	11.3
1.191	22.86	25.39	10.00	32.86	35.39	56.00	46.00	23.1	10.6
1.372	28.9	23.36	10.00	38.90	33.36	56.00	46.00	17.1	12.6

7.3 Peak Output Power - FCC Section 15.247(b)(2) IC: RSS-210 A8.4(1)

7.3.1 Measurement Procedure (Conducted Method)

The 20dB bandwidth of the EUT was within the resolution bandwidth of spectrum analyzer, therefore the power measurement was made using the spectrum analyzer method. The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The resolution and video bandwidth were set to > 20 dB bandwidth of the emission measured. The device employs >50 channels therefore the power is limited to 1 Watt.

7.3.2 Measurement Results

Results are shown in Table 7.3-1 and Figures 7.3-1 to 7.3-6 below.

Table 7.3.2-1: RF Output Power

Frequency [MHz]	Data Rate (kbps)	Level [dBm]
902.25	19.2	27.95
914.75	19.2	27.92
927.75	19.2	27.92
902.25	152.3	27.98
914.75	152.3	27.98
927.75	152.3	27.83

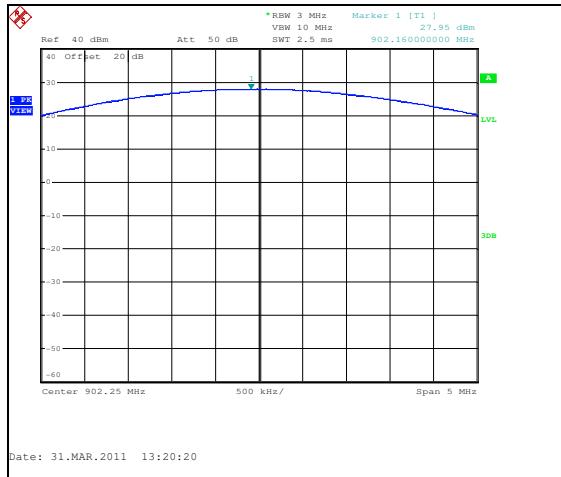


Figure 7.3.2-1: Output Power – LCH - 19.2kbps

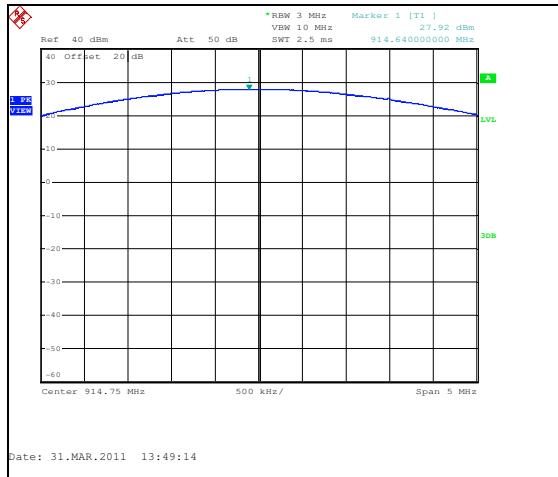


Figure 7.3.2-2: Output Power – MCH - 19.2kbps

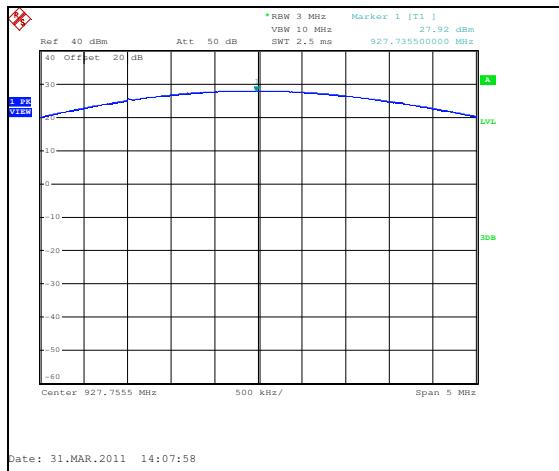


Figure 7.3.2-3: Output Power – HCH - 19.2kbps

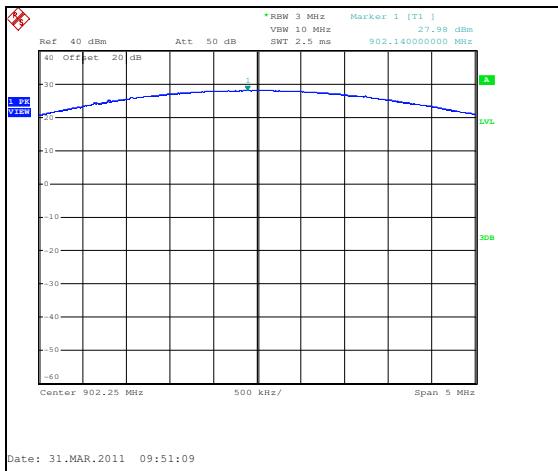


Figure 7.3.2-4: Output Power – LCH - 152.3kbps

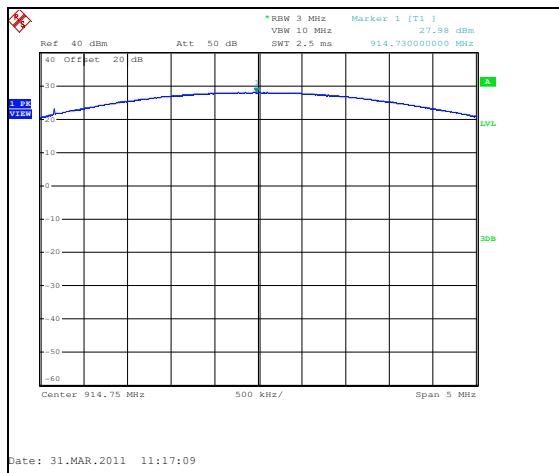


Figure 7.3.2-5: Output Power – MCH - 152.3kbps

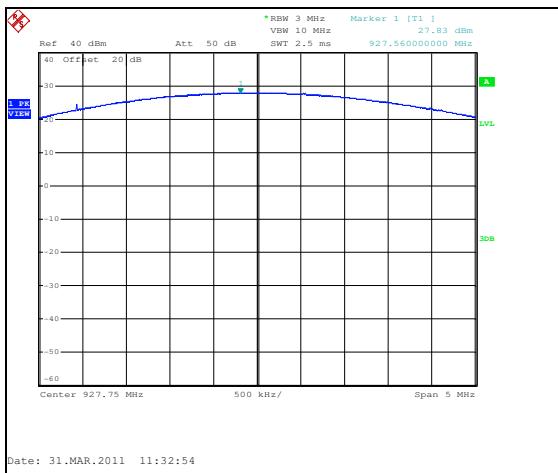


Figure 7.3.2-6: Output Power – HCH - 152.3kbps

7.4 Channel Usage Requirements

7.4.1 Carrier Frequency Separation – FCC: Section 15.247(a)(1) IC: RSS-210 A8.1(b)

7.4.1.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The span of the spectrum analyzer was set wide enough to capture two adjacent peaks and the RBW and VBW were set to $\geq 1\%$ of the span.

Carrier frequency separation was measured for all modulations and data presented in section 7.4.1.2 below.

7.4.1.2 Measurement Results

The adjacent channel separation was measured to be 500 kHz. Results are shown below in Figure 7.4.1.2-1 and 7.4.1.2.2.

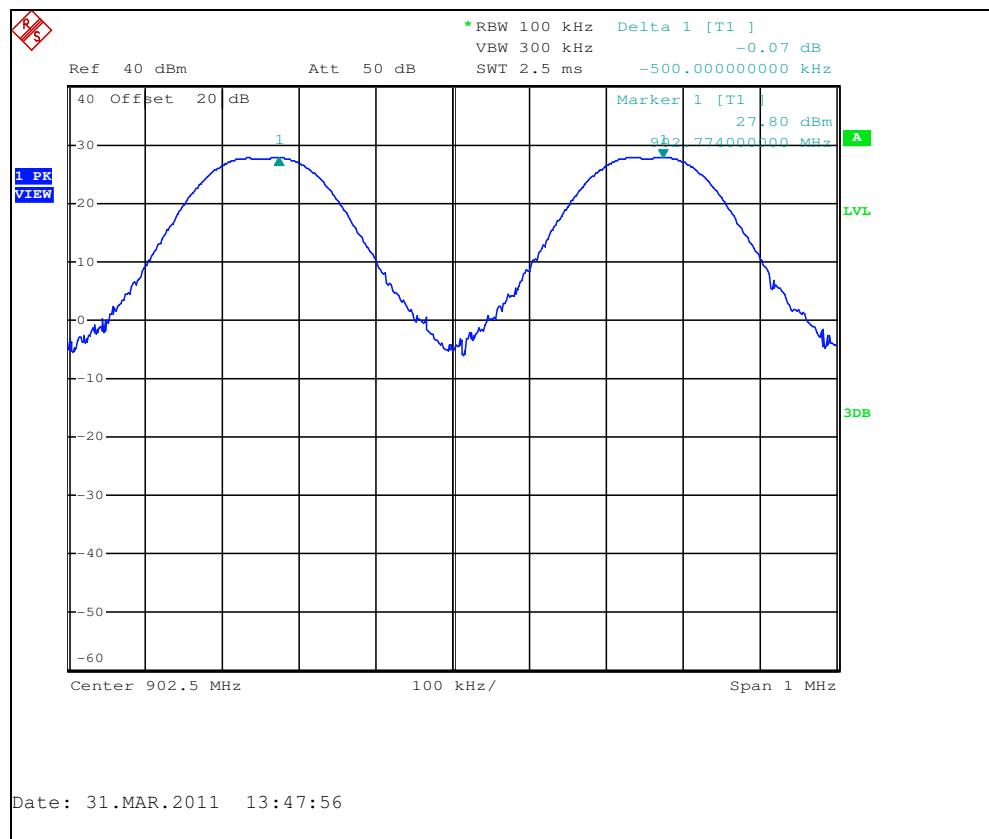


Figure 7.4.1.2-1: Channel Separation - 19.2kbps

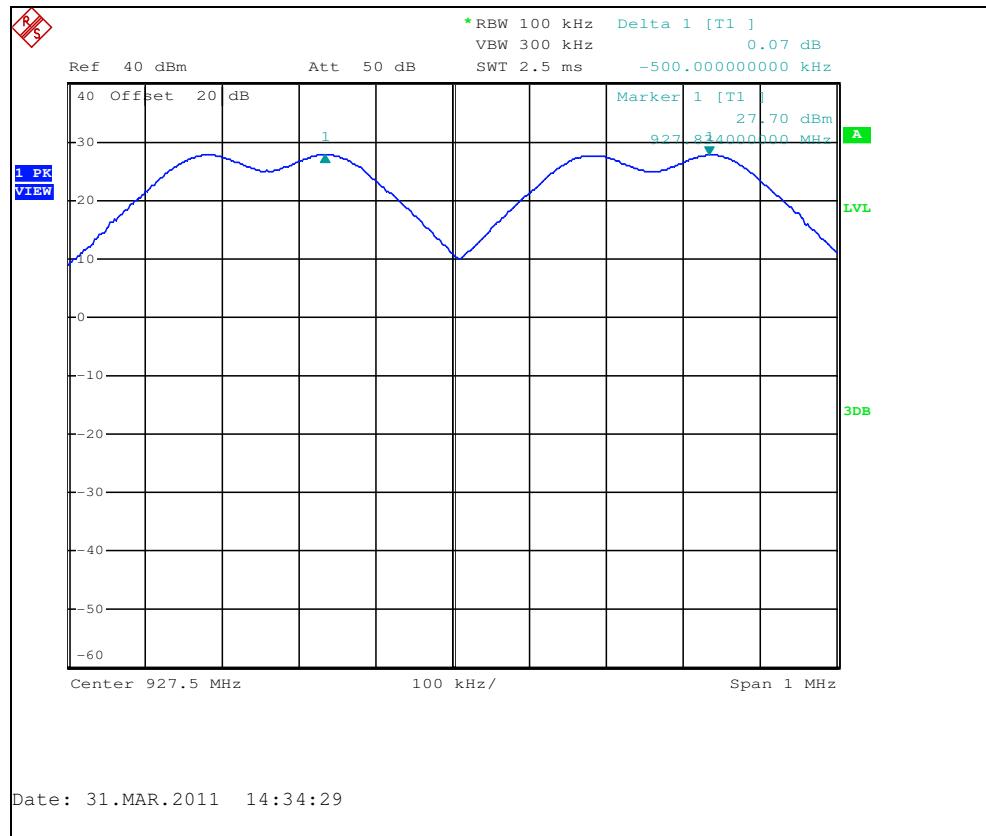
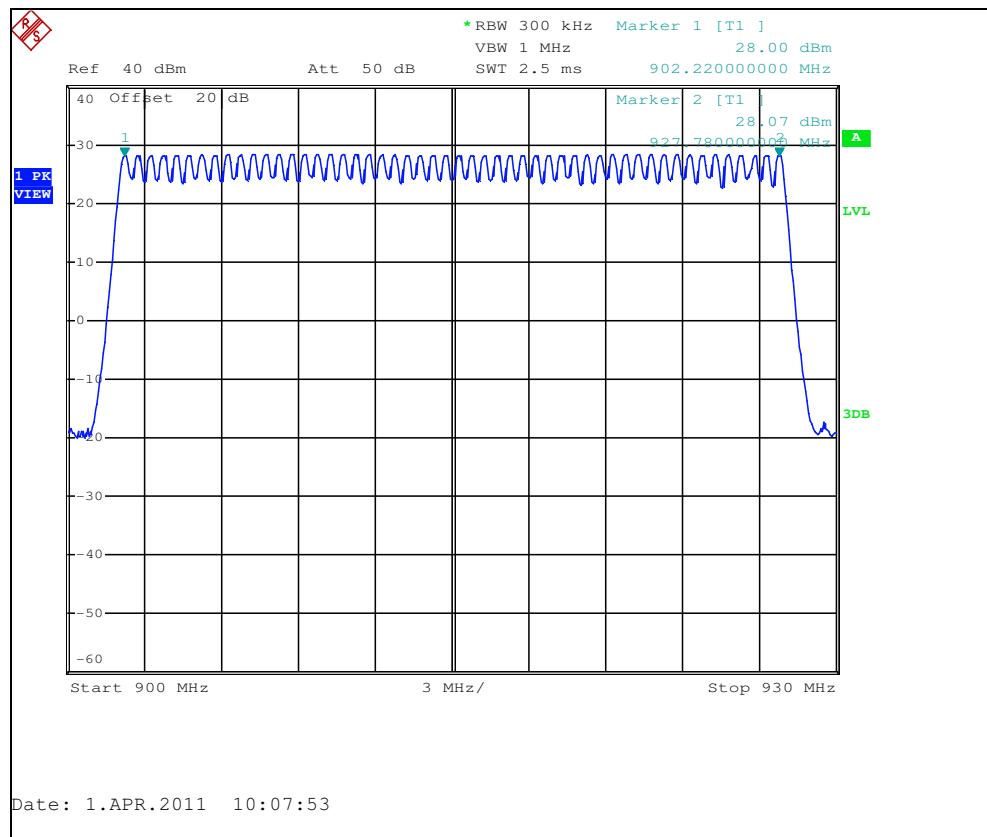


Figure 7.4.1.2-2: Channel Separation - 152.3kbps

7.4.2 Number of Hopping Channels – FCC: Section 15.247(a)(1)(i) IC: RSS-210 A8.1(c)

The 20dB bandwidth of the device is less than 250 kHz for 19.2kbps data rate and greater than 250 kHz for 152.3kbps data rate. The device employs > 50 hopping channels for both 19.2kbps and 153.2kbps data rates. Results are shown below in Figure 7.4.2-1.

**Figure 7.4.2-1: Hopping Channels LDR**

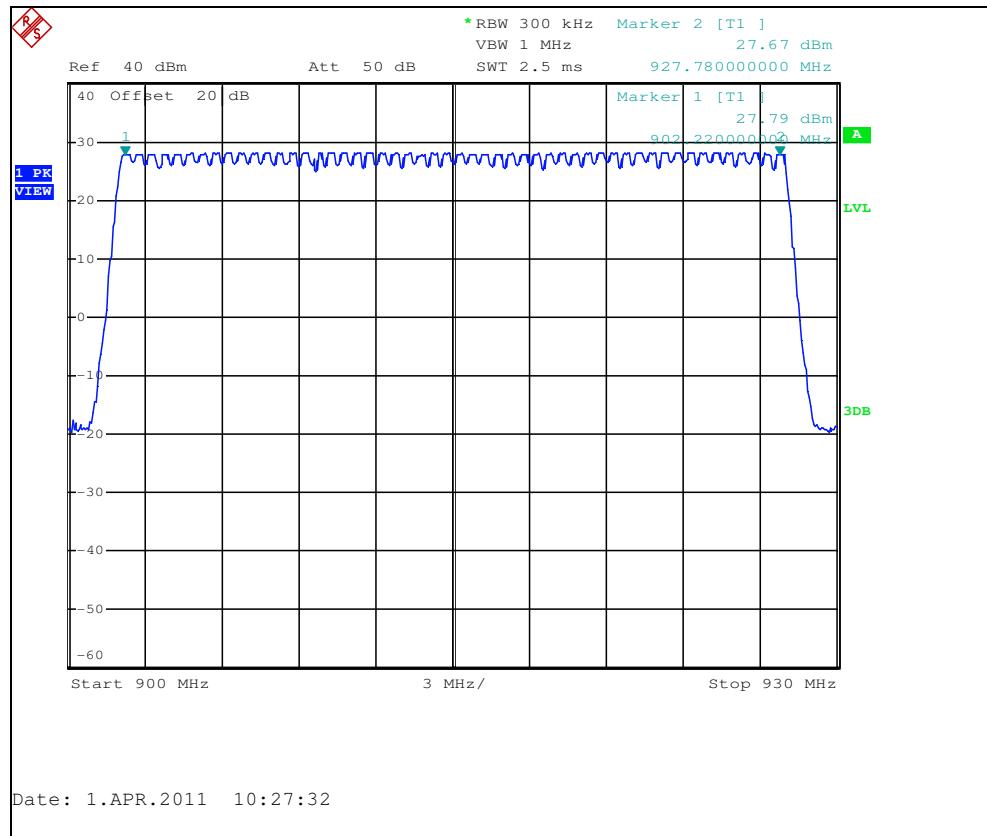


Figure 7.4.2-2: Hopping Channels HDR

7.4.3 Channel Dwell Time – FCC: Section 15.247(a)(1)(i) IC: RSS-210 A8.1(c)

7.4.3.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The hopping channel is centered on the analyzer and the span set to 0 Hz. The RBW was set to 1 MHz and the VBW to 3 MHz. Sweep time was adjusted to capture the burst duration of the emission. The marker -delta function of the analyzer was employed to measure the burst duration.

7.4.3.2 Measurement Results

The duration of the RF transmission was measured as 123.2 ms for FSK modulation using 19.2kbps data rate. The duration of the RF transmission was measured as 84.4 ms for FSK modulation using 152.3 kbps data rate. In a period of 20 seconds, each channel could be repeated a maximum of three times. Within a 20 second period, the total time for transmission on the same channel is $123.2 \times 3 = 369.6$ ms. For a more detailed explanation, please see the Theory of Operation.

A single transmission for each data rate is shown in figures 7.4.3.2-1 to 7.4.3.2-2 below.

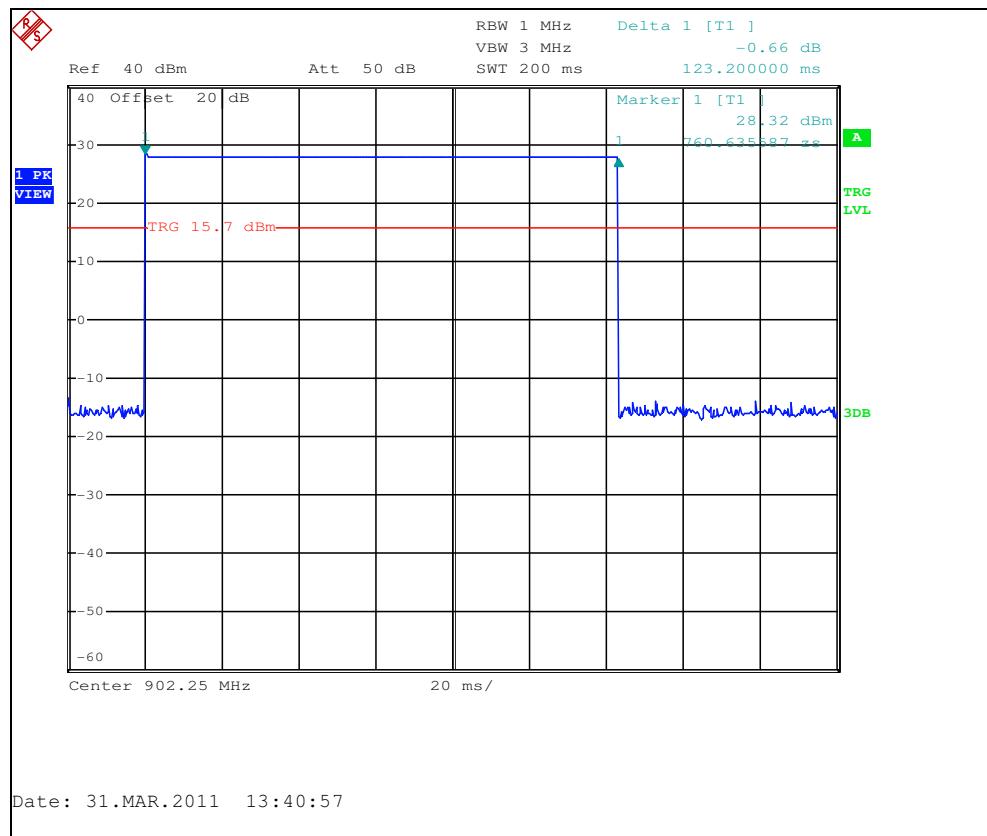


Figure 7.4.3.2-1: Dwell Time - 19.2kbps

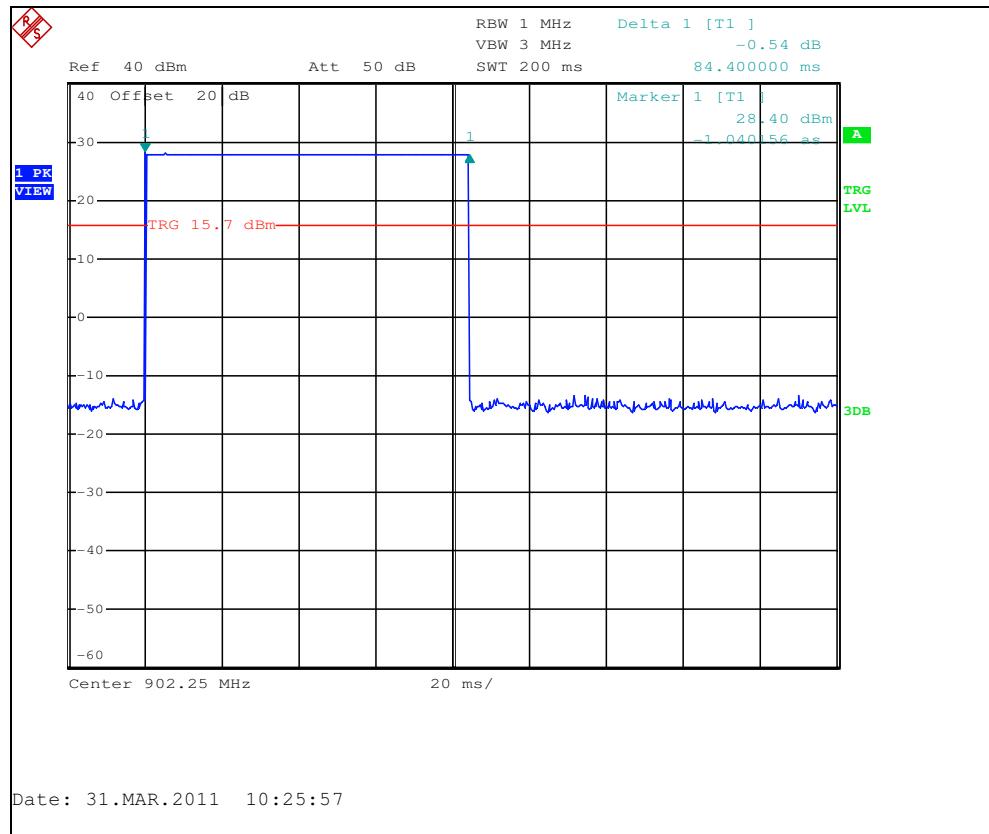


Figure 7.4.3.2-2: Dwell Time - 152.3kbps

7.4.4 20dB / 99% Bandwidth - FCC: Section 15.247(a)(1)(i) IC: RSS-210 A8.1(c)**7.4.4.1 Measurement Procedure**

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The spectrum analyzer span was set to 2 to 3 times the estimated bandwidth of the emission. The RBW was to $\geq 1\%$ of the estimated emission bandwidth. The trace was set to max hold with a peak detector active. The Delta function of the analyzer was utilized to determine the 20 dB bandwidth of the emission.






The 99% occupied bandwidth was measured with the spectrum analyzer span set to fully display the emission and approximately 20dB below the peak level. The RBW was to 1% to 3% of the approximate emission width. The trace was set to max hold with a peak detector active. The occupied bandwidth measurement function of the analyzer was used for the 99% bandwidth.

7.4.4.2 Measurement Results

Results are shown below in Table 7.4.4.2-1 and Figures 7.4.4.2-1 through 7.4.4.2-12.

Table 7.4.4.2-1: 20dB / 99% Bandwidth

Frequency [MHz]	20dB Bandwidth [kHz]	99% Bandwidth [kHz]	Data Rate
902.25	63.30	63.40	19.2 kbps
914.75	63.60	63.00	19.2 kbps
927.75	63.90	63.80	19.2 kbps
902.25	356.0	335.2	152.3 kbps
914.75	362.0	333.6	152.3 kbps
927.75	358.0	333.6	152.3 kbps

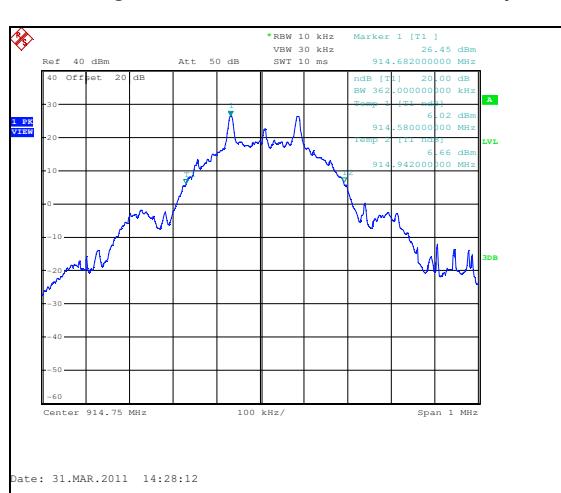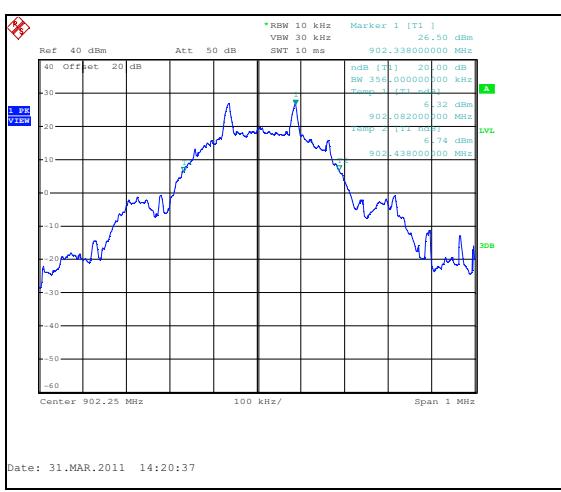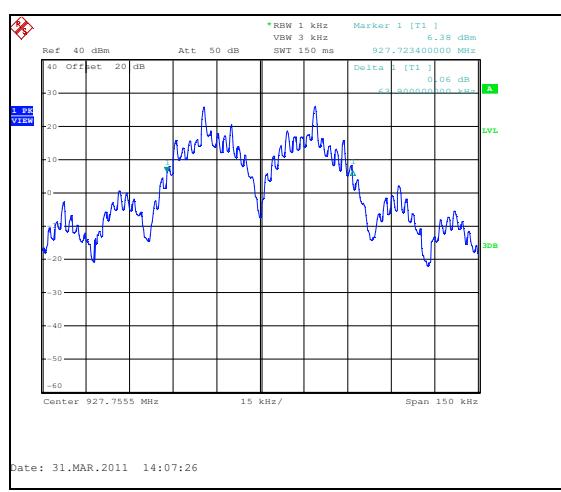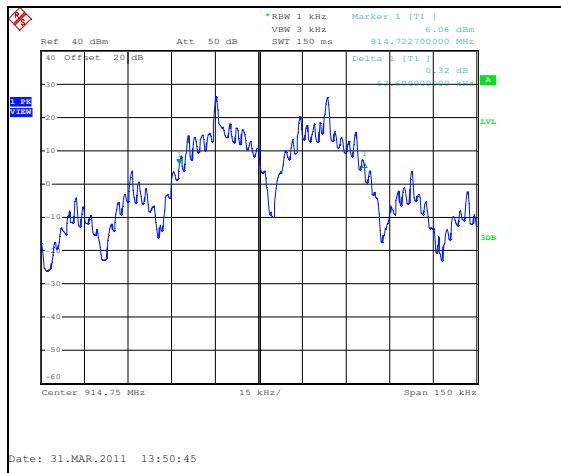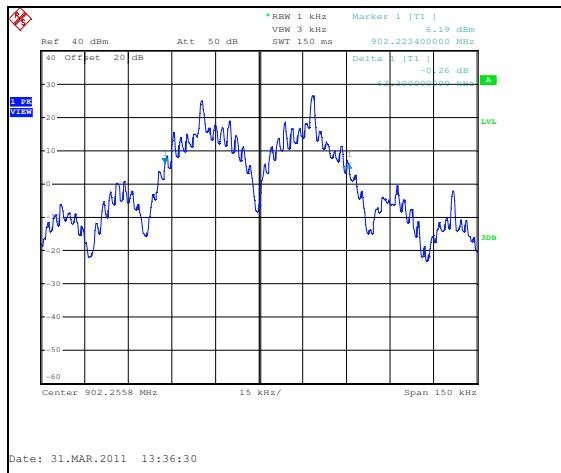

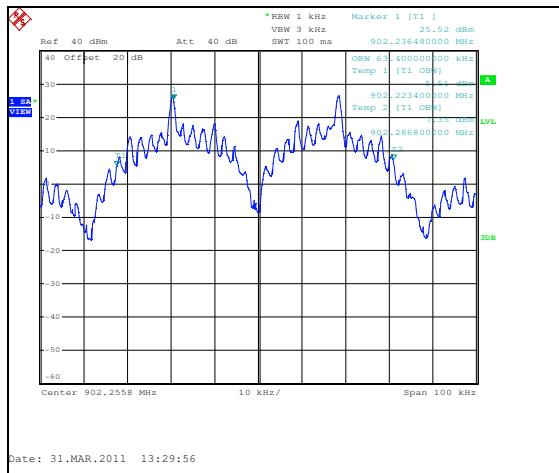


Figure 7.4.4.2-7: 99% BW LCH – 19.2kbps

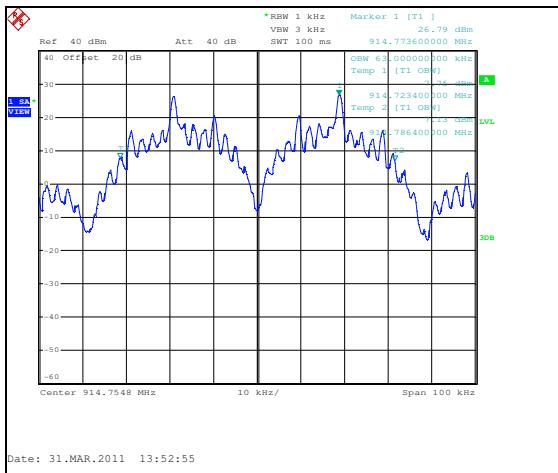


Figure 7.4.4.2-8: 99% BW MCH – 19.2kbps



Figure 7.4.4.2-9: 99% BW HCH – 19.2kbps

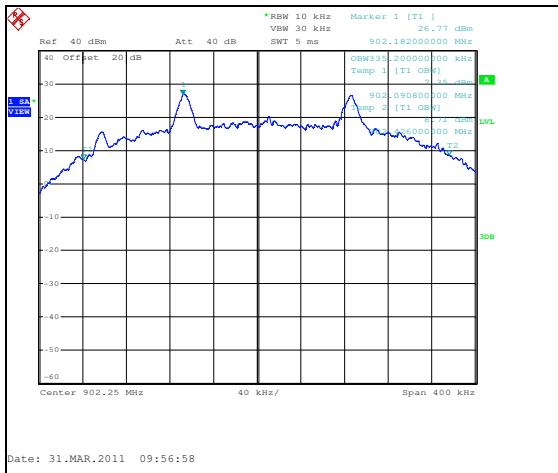


Figure 7.4.4.2-10: 99% BW LCH – 152.3kbps

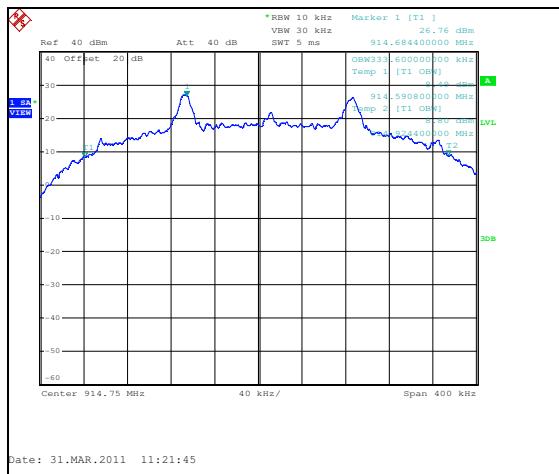


Figure 7.4.4.2-11: 99% BW MCH – 152.3kbps

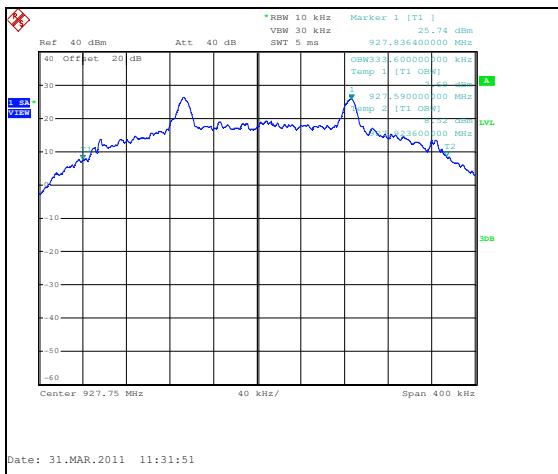


Figure 7.4.4.2-12: 99% BW HCH – 152.3kbps

7.5 Band-Edge Compliance and Spurious Emissions-FCC 15.247(d) IC:RSS-210 2.2, A8.5

7.5.1 Band-Edge Compliance of RF Conducted Emissions

7.5.1.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The EUT was investigated at the lowest and highest channel available to determine band-edge compliance. For each measurement the spectrum analyzer's RBW was set to $\geq 1\%$ of the span, and the VBW was set to ≥ 3 times RBW.

Band-edge was evaluated for all data rates.

7.5.1.2 Measurement Results

Results are shown in the figures 7.5.1.2-1 to 7.5.1.2.8 below.

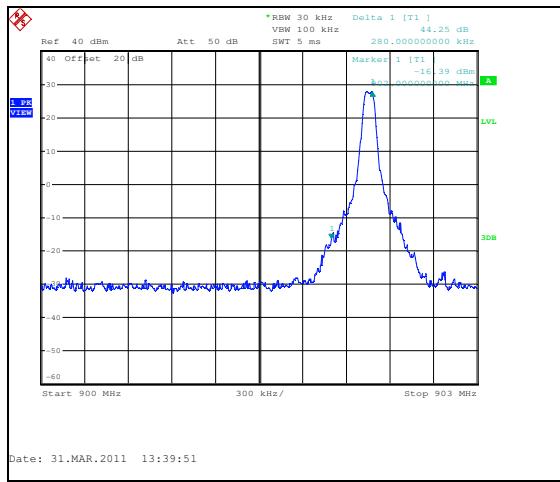


Figure 7.5.1.2-1: Lower Band-edge – 19.2 kbps

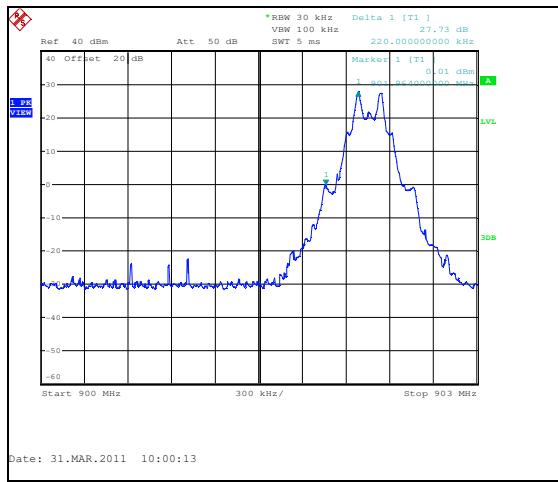


Figure 7.5.1.2-2: Lower Band-edge – 152.3 kbps

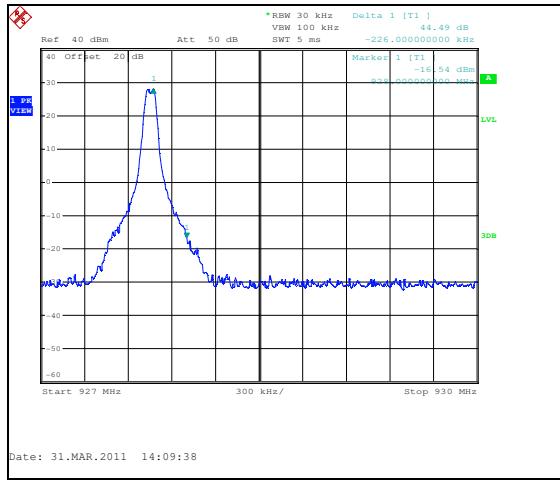


Figure 7.5.1.2-3: Upper Band-edge - 19.2 kbps

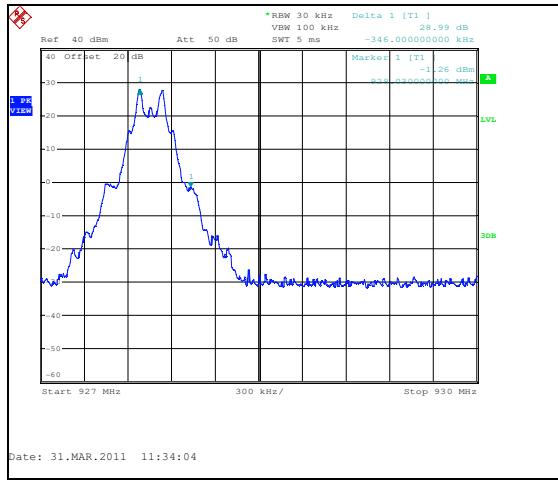


Figure 7.5.1.2-4: Upper Band-edge - 152.3 kbps

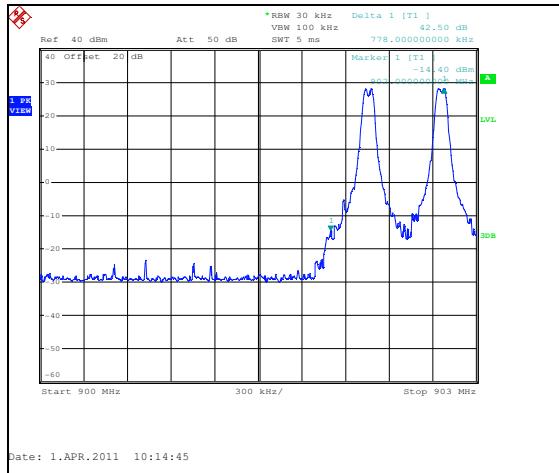
HOPPING MODE:

Figure 7.5.1.2-5: Lower Band-edge –19.2 kbps

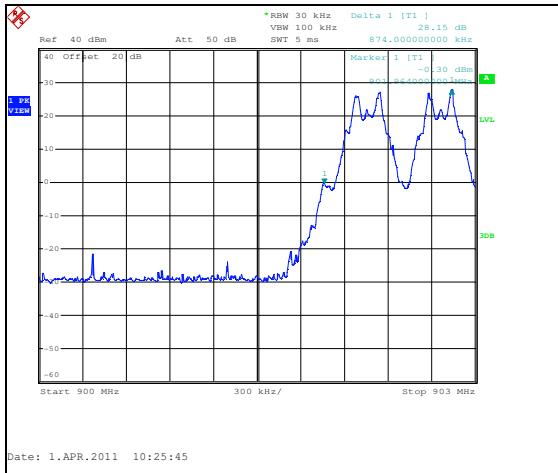


Figure 7.5.1.2-6: Lower Band-edge – 152.3 kbps

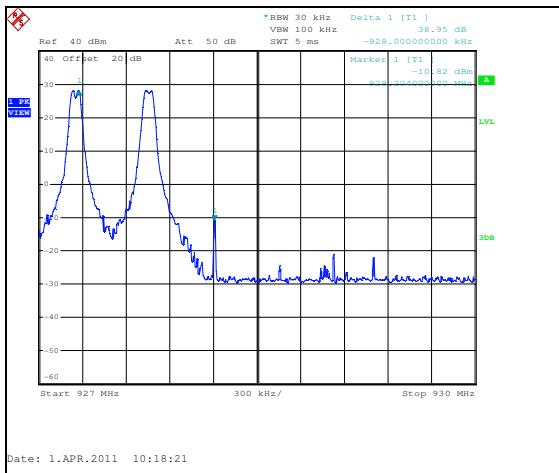


Figure 7.5.1.2-7: Upper Band-edge – 19.2 kbps

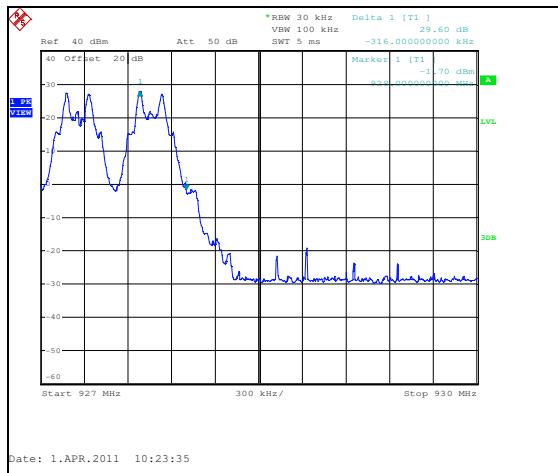


Figure 7.5.1.2-8: Upper Band-edge - 152.3 kbps

7.5.2 RF Conducted Spurious Emissions





7.5.2.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The EUT was investigated for conducted spurious emissions from 30MHz to 10GHz, 10 times the highest fundamental frequency. Measurements were made at the low, center and high channels of the EUT. For each measurement, the spectrum analyzer's RBW was set to 100kHz. A peak detector function was used with the trace set to max hold.

RF conducted spurious emissions were evaluated for all data rates.

7.5.2.2 Measurement Results

Results are shown below in Figures 7.5.2.2-1 to 7.5.2.2-12:

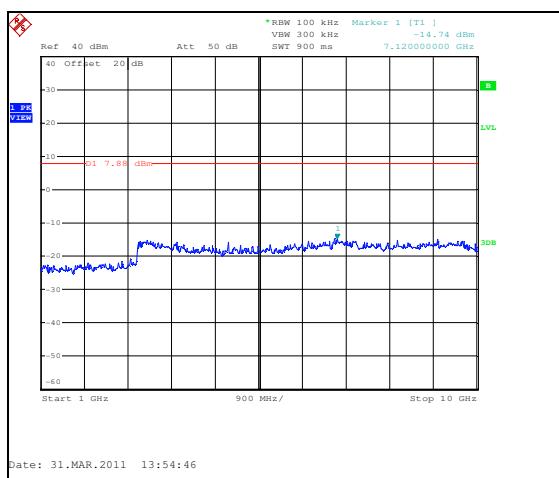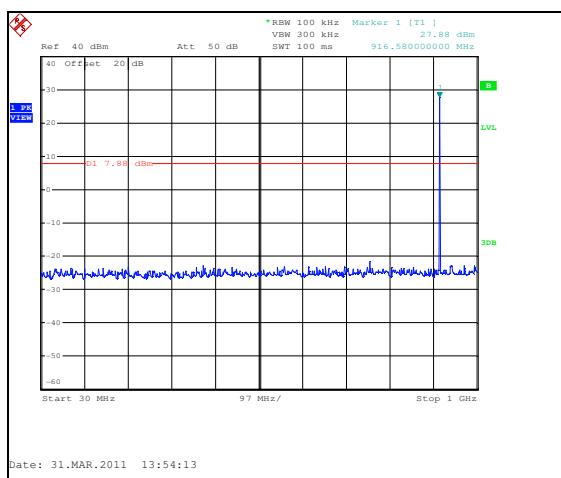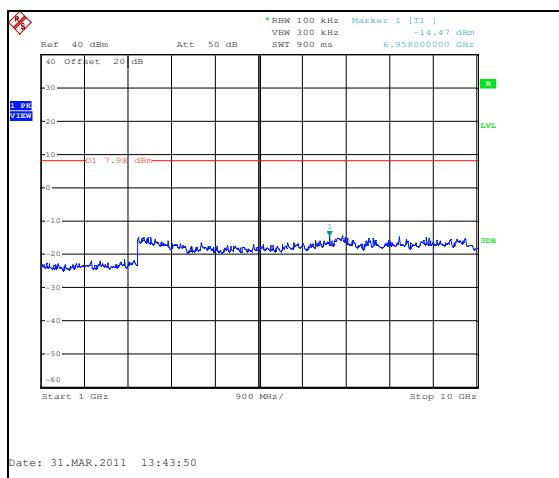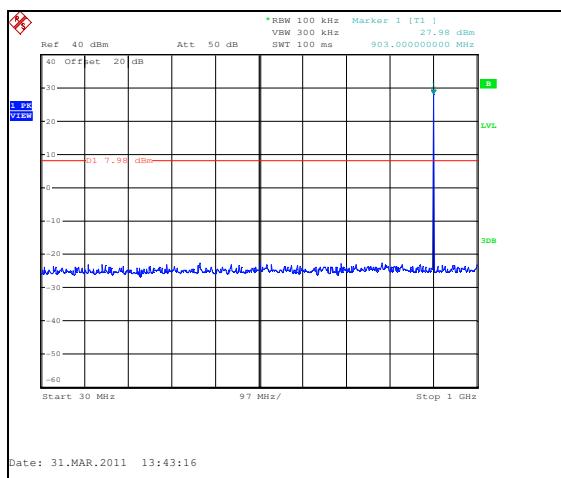

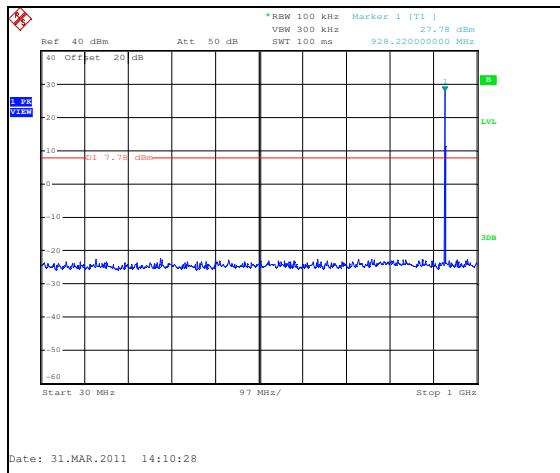


Figure 7.5.2.2-5: HCH – 19.2 kbps

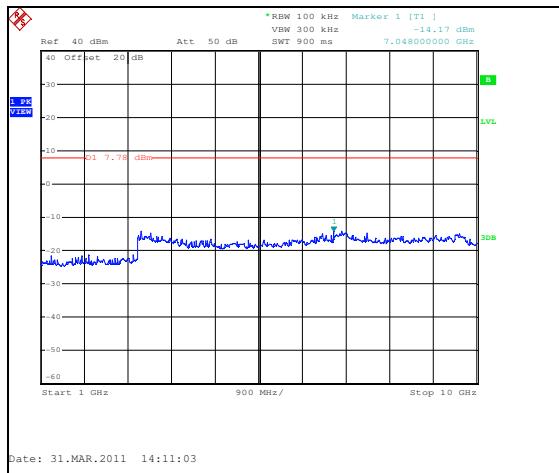


Figure 7.5.2.2-6: HCH – 19.2 kbps

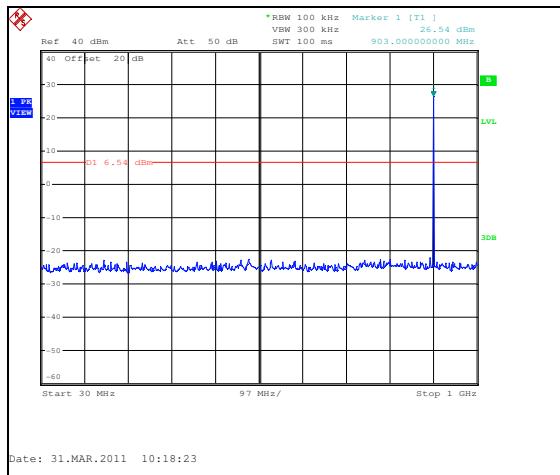


Figure 7.5.2.2-7: LCH – 152.3 kbps

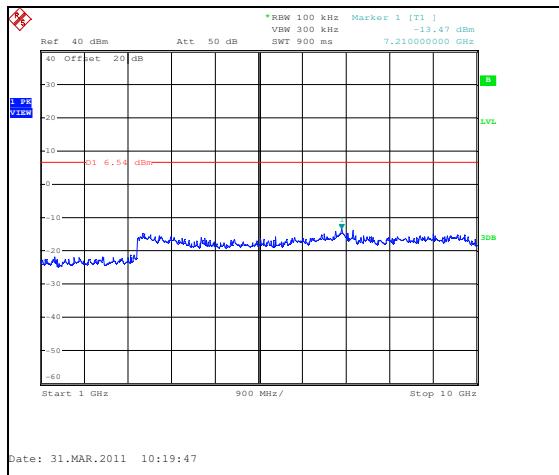


Figure 7.5.2.2-8: LCH – 152.3 kbps

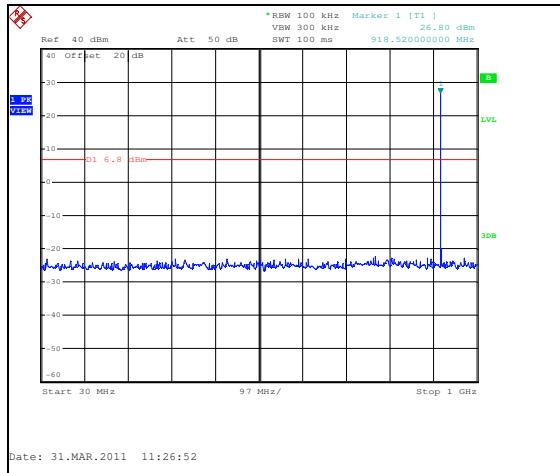


Figure 7.5.2.2-9: MCH – 152.3 kbps

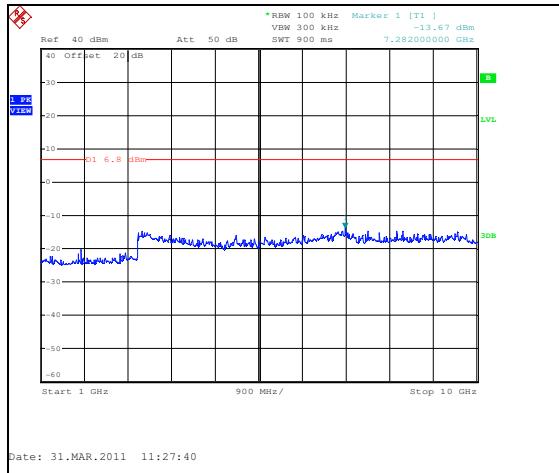


Figure 7.5.2.2-10: MCH – 152.3 kbps

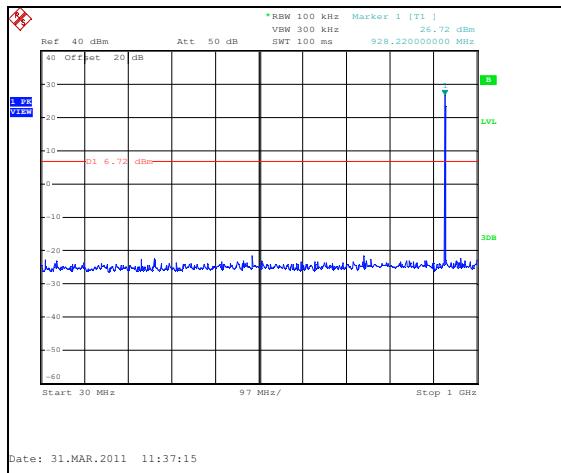


Figure 7.5.2.2-11: HCH – 152.3 kbps

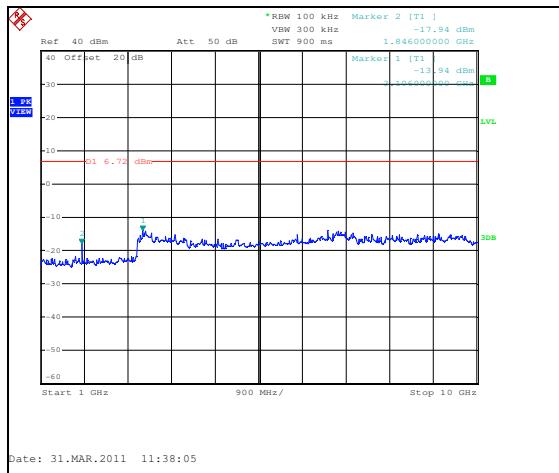


Figure 7.5.2.2-12: HCH – 152.3 kbps

7.5.3 Radiated Spurious Emissions - FCC Section 15.205 IC: RSS-210 2.2

7.5.3.1 Measurement Procedure

Radiated emissions tests were made over the frequency range of 30MHz to 10GHz, 10 times the highest fundamental frequency.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 120 kHz and a video bandwidth VBW of 300 kHz. For frequencies above 1000MHz, peak and average measurements were made with RBW and VBW of 1 MHz and 3 MHz respectively.

The EUT was caused to generate a continuous carrier signal on the hopping channel.

Radiated spurious emissions were evaluated for all data rates with worst case data provided. Worst case for FSK modulation was for 19.2 kbps data rate.

7.5.3.2 Measurement Results

Radiated spurious emissions found in the band of 30MHz to 10GHz are reported in the Table 7.5.3.2-1 below.

Table 7.5.3.2-1: Radiated Spurious Emissions – YPOS

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Antenna Height (cm)	Turntable Position (o)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg					pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Low Channel												
2706.75	46.96	41.79	H	110	183	1.94	48.90	43.73	74.0	54.0	25.1	10.3
5413.5	41.76	32.14	H	110	170	9.87	51.63	42.01	74.0	54.0	22.4	12.0
Middle Channel												
2744.25	49.61	45.80	H	130	208	2.07	51.68	47.87	74.0	54.0	22.3	6.1
7318	41.06	29.95	H	110	170	13.43	54.49	43.38	74.0	54.0	19.5	10.6
7318	44.22	37.70	V	301	279	13.43	57.65	51.13	74.0	54.0	16.4	2.9
High Channel												
2783.25	50.24	47.02	H	154	160	2.20	52.44	49.22	74.0	54.0	21.6	4.8
2783.25	45.12	38.23	V	179	249	2.20	47.32	40.43	74.0	54.0	26.7	13.6
7422	42.12	32.59	H	110	240	13.56	55.68	46.15	74.0	54.0	18.3	7.8
7422	46.28	40.18	V	309	217	13.56	59.84	53.74	74.0	54.0	14.2	0.3

7.5.3.3 Sample Calculation:

$$R_C = R_U + CF_T$$

Where:

CF _T	=	Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)
R _U	=	Uncorrected Reading
R _C	=	Corrected Level
AF	=	Antenna Factor
CA	=	Cable Attenuation
AG	=	Amplifier Gain
DC	=	Duty Cycle Correction Factor

Example Calculation: Peak

Corrected Level: $46.96 + 1.94 = 48.90\text{dBuV/m}$

Margin: $74\text{dBuV/m} - 48.90\text{dBuV/m} = 25.1\text{dB}$

Example Calculation: Average

Corrected Level: $41.79 + 1.94 - 0 = 43.73\text{dBuV}$

Margin: $54\text{dBuV} - 43.73\text{dBuV} = 10.3\text{dB}$

8 CONCLUSION

In the opinion of ACS, Inc. the ITR9002, manufactured by Itron Electricity Metering, Inc. meets the requirements of FCC Part 15 subpart C and Industry Canada's Radio Standards Specification RSS-210

END REPORT