

Report on the Testing of the

ITron, Inc.

NIC

In accordance with:
FCC 47 CFR part 15.247
ISED RSS-247 Issue 2, February 2017

Prepared for: Itron, Inc.
313 N Highway 11
West Union, South Carolina 29696 USA



Add value.
Inspire trust.

COMMERCIAL-IN-CONFIDENCE

Document Number: AT72186194.2P0

SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Kirby Munroe	Wireless / EMC Technical and Certification Manager, NA TÜV SUD America Inc.	Authorized Signatory	03/23/2023

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD America, Inc. document control rules.

FCC Accreditation Designation Number US1233
FCC Test Site Registration Number 967699
Innovation, Science, and Economic Development Canada Lab Code 23932

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with the standards listed above.



A2LA Cert. No. 2955.09

DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD America with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD America. No part of this document may be reproduced without the prior written approval of TÜV SÜD America. © TÜV SÜD.

ACCREDITATION

Our A2LA Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our A2LA Accreditation.

TÜV SÜD America
5945 Cabot Parkway, Suite 100
Alpharetta, GA 3005

Phone: 678-341-5900
www.tuv-sud-america.com

TÜV SÜD

TÜV®

Contents

1	Report Summary	3
1.1	Report Modification Record.....	3
1.2	Introduction.....	3
1.3	Brief Summary of Results	5
1.4	Product Information	6
1.5	Deviations from the Standard.....	9
1.6	EUT Modification Record	9
1.7	Test Location.....	9
2	Test Details	10
2.1	Antenna Requirement	10
2.2	Power Line Conducted Emissions	11
2.3	Peak Output Power	14
2.4	6dB / 99% Bandwidth	16
2.5	Maximum Power Spectral Density in the Fundamental Emission	19
2.6	Band-Edge Compliance of RF Conducted Emissions	21
2.7	RF Conducted Spurious Emissions	23
2.8	Radiated Spurious Emissions into Restricted Frequency Bands.....	25
2.9	Test Equipment Used.....	31
3	Diagram of Test Set-ups	32
4	Accreditation, Disclaimers and Copyright.....	34



1 Report Summary

1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Table 1.1-1 – Modification Record

Issue	Description of Change	Date of Issue
0	First Issue	03/23/2023

1.2 Introduction

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations Section 15.247 and Innovation Science and Economic Development Canada's Radio Standards Specification RSS-247 for the tests documented herein to add an additional mode to the 900 MHz DTS radio on pre-approved module having FCC ID: SK9NIC / IC: 864G-NIC.

Applicant	Christopher O'Steen
Manufacturer	ITRON, INC
Applicant's Email Address	Christopher.Osteen@itron.com
Model Name	NIC
Serial Number(s)	11090012006
FCC ID	SK9NIC
ISED Certification Number	864G-NIC
Hardware Version(s)	576035-003 (Rev3)
Software Version	101.12.1673
Number of Samples Tested	1
Test Specification/Issue/Date	US Code of Federal Regulation (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2022 ISED Canada Radio Standards Specification: RSS-247 – Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and License-Exempt Local Area Network (LE-LAN) Devices, Issue 2, February 2017.
Order Number	72186194
Date of Receipt of EUT	2/6/2023
Start of Test	2/6/2023
Finish of Test	2/28/2023



Related Document(s)

ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Device.

FCC OET KDB 558074 D01 15.247 Meas Guidance v05r02: Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under Section 15.247 of the FCC Rules, April 2, 2019

US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2022.

ISED Canada Radio Standards Specification: RSS-GEN – General Requirements for Compliance of Radio Apparatus, Issue 5, Amendment 1 (March 2019), Amendment 2 (February 2021)



1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC Part 15.247 and ISED Canada's RSS-247 is shown below.

Table 1.3-1: Test Result Summary

Test Parameter	Test Plan (Yes/No)	Test Result	FCC 47 CFR Rule Part	ISED Canada's RSS	Test Report Page No
Antenna Requirement	Yes	Pass	15.203, 15.204	-----	10
6 dB Bandwidth	Yes	Pass	15.247(a)(2)	RSS-247 5.2(a)	16
99% Bandwidth	Yes	Pass	-----	RSS-GEN 6.7	16
Average Output Power	Yes	Pass	15.247(b)(3)	RSS-247 5.4(d)	14
Band-Edge Compliance of RF Conducted Emissions	Yes	Pass	15.247(d)	RSS-247 5.5	21
RF Conducted Spurious Emissions	Yes	Pass	15.247(d)	RSS-247 5.5	23
Radiated Spurious Emissions into Restricted Frequency Bands	Yes	Pass	15.205, 15.209	RSS-GEN 8.9, 8.10	25
Power Spectral Density	Yes	Pass	15.247(e)	RSS-247 5.2(b)	19
Power Line Conducted Emissions	Yes	Pass	15.207	RSS-GEN 8.8	11
Duty Cycle	No	-----			-----



1.4 Product Information

1.4.1 Technical Description

The Itron HW 4.1 NIC is a network interface card which includes a 900MHz radio. The module operates on DC Voltage which is supplied by a host device.

This test report documents the compliance of the additional technical parameters identified below.

Table 1.4-1 – General Information

Detail	Description
FCC ID	SK9NIC
ISED Certification Number	864G-NIC
Model(s) / HVIN(s)	NIC
PMN(s)	HW 4.1 NIC
Operating Voltage	12Vdc
Antenna Type / Description:	*External Omnidirectional / 3 dBi (Laird, P/N: TRA9023P)

*Note: Only the External Omnidirectional / 3 dBi (Laird, P/N: TRA9023P) antenna is applicable to the additional modes included.

Table 1.4-2 – Technical Parameters

Frequency Range (MHz)	Number of Channels	Channel Separation (kHz)	Modulation Format	Data Rates Supported (kbps)
902.8 – 926.8	31	800	OFDM	1200
903.2 – 926*	20	1200	OFDM	2400

*Note: New modes to the original certification to be addressed in this report

A full description and detailed product specification details are available from the manufacturer.



Figure 1.4.1-1: Front Side of the EUT



Figure 1.4.1-2: Back Side of the EUT

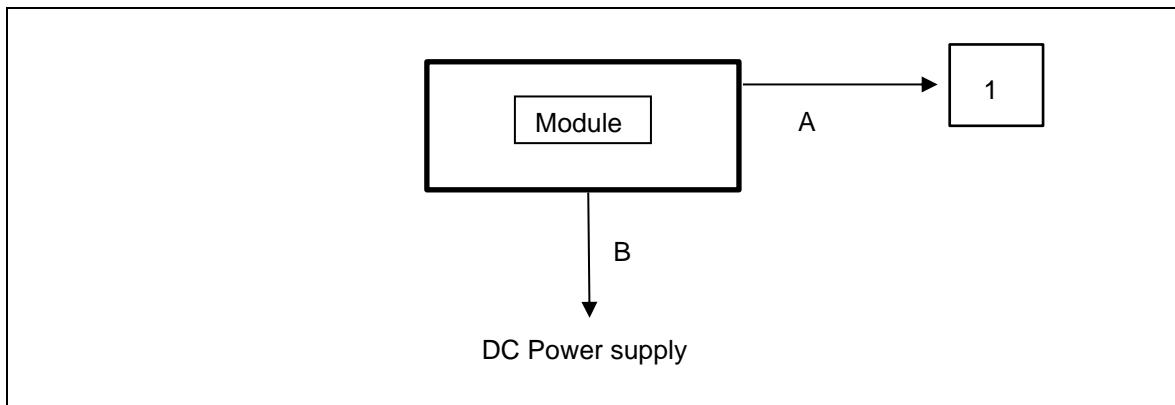


Figure 1.4.1-3 –Test Setup Block Diagram

Table 1.4.1-1 – Cable Descriptions

Item	Cable/Port	Description
A	USB Serial cable	Programming cable connected to laptop
B	DC Power Supply Cable	DC power supply

Table 1.4.1-2 – Support Equipment Descriptions

Item	Make/Model	Description
1	DELL	Laptop used for configuring module



1.4.2 Modes of Operation

The Itron HW 4.1 NIC is a network interface card which includes a 900MHz radio.

This test report documents the compliance of the 900 MHz Digital transmission systems mode of operation. NIC module provides the following modes of operation using DTS classification as outlined below and is an addition to the existing modes included in the original evaluation. See section 1.4.1 for additional detail.

Mode of Operation	Frequency Range (MHz)	Number of Channels	Channel Separation (kHz)	Modulation Format	Data Rates Supported (kbps)	Classification
1	903.2 – 926	20	1200	OFDM	2400	DTS

1.4.3 Monitoring of Performance

For radiated emissions, the EUT was evaluated in three orthogonal orientations. The worst-case orientation was X-position. See test setup photos for more information. The EUT was programmed to generate a continuously modulated signal on each channel evaluated.

For RF conducted measurements, the EUT was connected to the test equipment with a QMA to SMA adapter. The EUT was programmed to generate a continuously modulated signal on each channel evaluated.

Software power setting during test: 20



1.5 Deviations from the Standard

No deviations from the applicable test standard were made during testing.

1.6 EUT Modification Record

The table below details modifications made to the EUT during the test program. The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
0	Initial State		

The equipment was tested as provided without any modifications.

1.7 Test Location

TÜV SÜD conducted the following tests at our Alpharetta, GA test laboratory.

Test Name	Name of Engineer(s)	Accreditation
Antenna Requirement	Divya Adusumilli	A2LA
Power Line Conducted Emissions	Divya Adusumilli	A2LA
Peak Output Power	Divya Adusumilli	A2LA
6dB / 99% Bandwidth	Divya Adusumilli	A2LA
Peak Power Spectral Density	Divya Adusumilli	A2LA
Band-Edge Compliance of RF Conducted Emissions	Divya Adusumilli	A2LA
RF Conducted Spurious Emissions	Divya Adusumilli	A2LA
Radiated Spurious Emissions into Restricted Frequency Bands	Divya Adusumilli	A2LA

Office address:
 TÜV SÜD America
 5945 Cabot Parkway, Suite 100
 Alpharetta, GA 30005, USA



2 Test Details

2.1 Antenna Requirement

2.1.1 Specification Reference

FCC Section: 15.203, 15.204

2.1.2 Equipment Under Test and Modification State

As shown in §1.4 with modification state "0", as noted in §1.6.

2.1.3 Date of Observation

2/13/2023

2.1.4 Test Method

N/A

2.1.5 Environmental Conditions

N/A

2.1.6 Observation

The EUT utilizes external omnidirectional antenna with peak gain 3 dBi. Connection to the module is via female QMA connector, therefore satisfying the requirements of Section 15.203.



2.2 Power Line Conducted Emissions

2.2.1 Specification Reference

FCC Section: 15.207
ISED Canada: RSS-Gen 8.8

2.2.2 Equipment Under Test and Modification State

As shown in §1.4 with modification state “0”, as noted in §1.6.

2.2.3 Date of Test

2/13/2023

2.2.4 Test Method

ANSI C63.10 section 6 was the guiding documents for this evaluation. Conducted emissions were performed from 150kHz to 30MHz with the spectrum analyzer's resolution bandwidth set to 9kHz and the video bandwidth set to 30kHz. The calculation for the conducted emissions is as follows:

Corrected Reading = Analyzer Reading + LISN Loss + Cable Loss

Margin = Corrected Reading - Applicable Limit

2.2.5 Environmental Conditions

The EUT was evaluated within the temperature, humidity and pressure range of the EUT as specified by the standard. The laboratory shall have an ambient temperature range of 15°C to 35°C, relative humidity range of 30% to 60% and atmospheric pressure range of 86 kPa to 106 kPa.

Ambient Temperature	22.3 °C
Relative Humidity	53.8 %
Atmospheric Pressure	972.2 mbar



2.2.6 Test Results

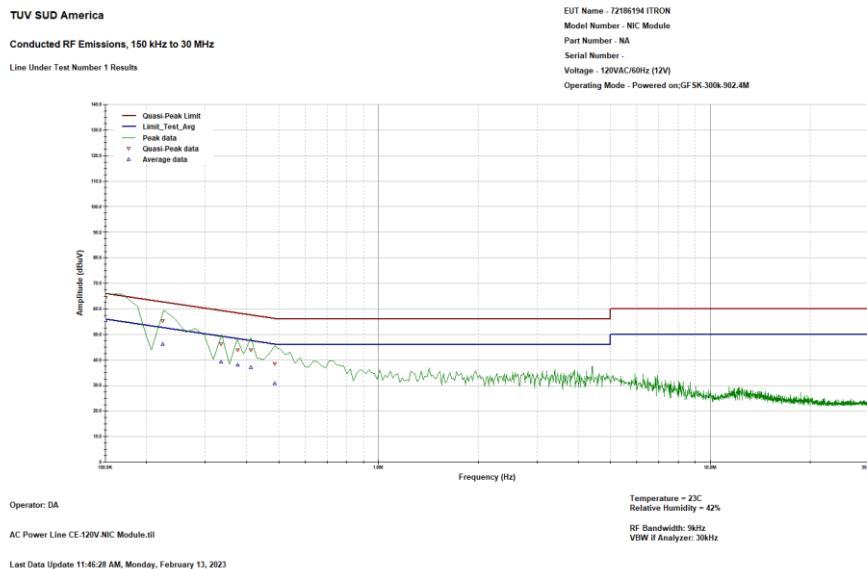


Figure 2.2.6-1: Conducted Emission Plot – Line 1

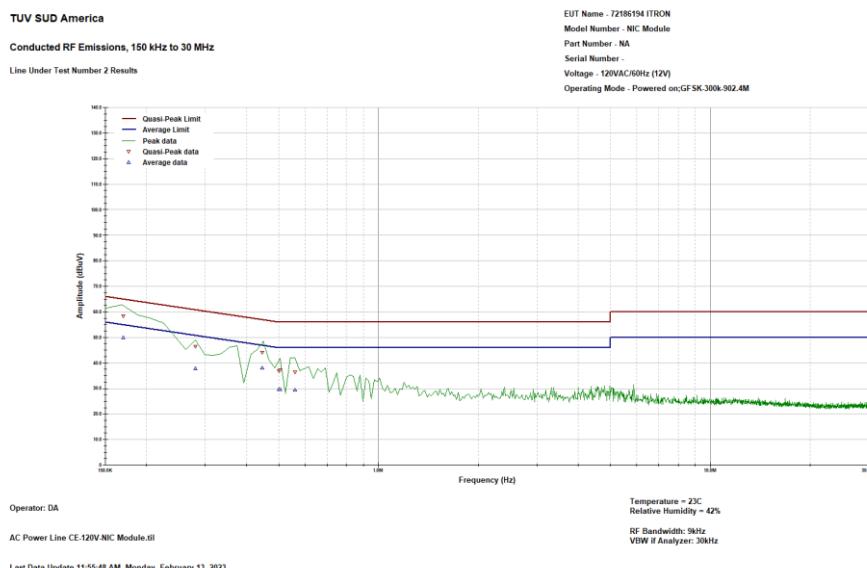


Figure 2.2.6-2: Conducted Emission Plot – Neutral

**Table 2.2.6-1: Conducted EMI Results-Avg – Line 1**

Frequency	Avg Limit	Avg Level Corr	Avg Level	CF	Avg Margin	Result
MHz	dBuV	dBuV	dBuV	dB	dB	
0.15	56	55.5	45.8	9.682	-0.5	PASS
0.22	53.9	46.1	36.4	9.671	-7.8	PASS
0.34	50.7	39.3	29.6	9.658	-11.4	PASS
0.38	49.6	38	28.4	9.656	-11.5	PASS
0.41	48.5	37.1	27.5	9.654	-11.4	PASS
0.49	46.4	30.9	21.2	9.651	-15.5	PASS

Table 2.2.6-2: Conducted EMI Results-QP – Line 1

Frequency	QP Limit	QP Level Corr	QP Level	CF	QP Margin	Result
MHz	dBuV	dBuV	dBuV	dB	dB	
0.15	66	64.1	54.4	9.682	-1.9	PASS
0.22	63.9	55.3	45.6	9.671	-8.6	PASS
0.34	60.7	46.2	36.6	9.658	-14.5	PASS
0.38	59.6	43.9	34.2	9.656	-15.7	PASS
0.41	58.5	43.7	34.1	9.654	-14.7	PASS
0.49	56.4	38.4	28.7	9.651	-18	PASS

Table 2.2.6-3: Conducted EMI Results-Avg – Neutral

Frequency	Avg Limit	Avg Level Corr	Avg Level	CF	Avg Margin	Result
MHz	dBuV	dBuV	dBuV	dB	dB	
0.17	55.4	49.8	40.1	9.673	-5.6	PASS
0.28	52.3	37.7	28.1	9.662	-14.5	PASS
0.45	47.5	38.1	28.5	9.638	-9.4	PASS
0.5	46	29.6	20	9.63	-16.4	PASS
0.5	46	29.6	20	9.63	-16.4	PASS
0.56	46	29.5	19.8	9.634	-16.5	PASS

Table 2.2.6-4: Conducted EMI Results-QP – Neutral

Frequency	QP Limit	QP Level Corr	QP Level	CF	QP Margin	Result
MHz	dBuV	dBuV	dBuV	dB	dB	
0.17	65.4	58.4	48.8	9.673	-7	PASS
0.28	62.3	46.5	36.8	9.662	-15.8	PASS
0.45	57.5	44	34.4	9.638	-13.5	PASS
0.5	56	36.8	27.2	9.63	-19.2	PASS
0.5	56	37.3	27.6	9.63	-18.7	PASS
0.56	56	36.4	26.8	9.634	-19.6	PASS



2.3 Average Output Power

2.3.1 Specification Reference

FCC Sections: 15.247(b)(3)
ISED Canada: RSS-247 5.4(d)

2.3.2 Equipment Under Test and Modification State

As shown in §1.4 with modification state "0", as noted in §1.6.

2.3.3 Date of Test

02/28/2023

2.3.4 Test Method

The Average conducted output power was measured in accordance with ANSI C63.10 Subclause 11.9.2.3.1 Method AVGPM (Average Power Meter). The RF output port of the EUT was directly connected to the input of an Average power meter. The resulting average value was recorded.

2.3.5 Environmental Conditions

The EUT was evaluated within the temperature, humidity and pressure range of the EUT as specified by the standard. The laboratory shall have an ambient temperature range of 15°C to 35°C, relative humidity range of 30% to 60% and atmospheric pressure range of 86 kPa to 106 kPa.

Ambient Temperature	22.3 °C
Relative Humidity	53.8 %
Atmospheric Pressure	972.2 mbar

2.3.6 Test Results

Test Summary: EUT was set to transmit mode as per sections 1.4.2 / 1.4.3.

Test Results: Pass

See data below for detailed results.

**Table 2.3.6-1: RF Output Power**

Frequency [MHz]	Average Output Power (dBm)	E.I.R.P (dBm)	Data Rate (kbps)	Modulation Format
903.2	17.18	20.18	2400	OFDM
914	18.72	21.72	2400	OFDM
926	17.98	20.98	2400	OFDM



2.4 6dB / 99% Bandwidth

2.4.1 Specification Reference

FCC Sections: 15.247(a)(2)
ISED Canada: RSS-247 5.2(a), RSS-GEN 6.7

2.4.2 Equipment Under Test and Modification State

As shown in §1.4 with modification state “0”, as noted in §1.6.

2.4.3 Date of Test

02/06/2023

2.4.4 Test Method

The 6dB bandwidth was measured in accordance with the ANSI C63.10 Section 11.8. The Resolution Bandwidth (RBW) of the spectrum analyzer was set to 100 kHz. The Video Bandwidth (VBW) was set to ≥ 3 times the RBW. The trace was set to max hold with a peak detector active. The marker-delta function of the spectrum analyzer was utilized to determine the 6 dB bandwidth of the emission.

The occupied bandwidth measurement function of the spectrum analyzer was used to measure the 99% bandwidth. The span of the analyzer was set to capture all products of the modulation process, including the emission sidebands. The resolution bandwidth was set to 1% to 5% of the occupied bandwidth. The video bandwidth was set to 3 times the resolution bandwidth. A peak detector was used.

2.4.5 Environmental Conditions

The EUT was evaluated within the temperature, humidity and pressure range of the EUT as specified by the standard. The laboratory shall have an ambient temperature range of 15°C to 35°C, relative humidity range of 30% to 60% and atmospheric pressure range of 86 kPa to 106 kPa.

Ambient Temperature	22.3 °C
Relative Humidity	53.8 %
Atmospheric Pressure	972.2 mbar

2.4.6 Test Results

Test Summary: EUT was set to transmit mode.

Test Results: Pass

See data below for detailed results.

Table 2.4.6-1: 6dB / 99% Bandwidth

Frequency [MHz]	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Data Rate (kbps)	Modulation Format
903.2	1.130	1.127	2400	OFDM
914	1.127	1.122	2400	OFDM
926	1.113	1.121	2400	OFDM

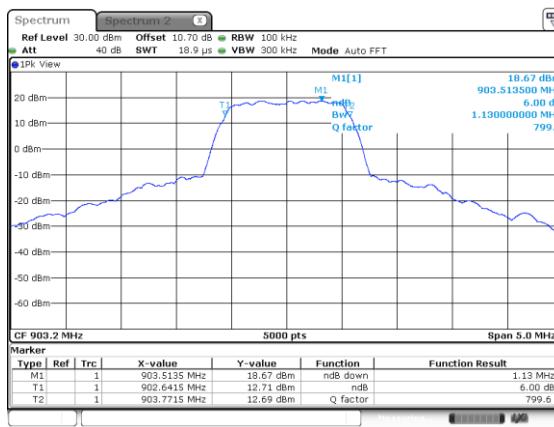


Figure 2.4.6-1: Mode 1 – 6 dB BW – LCH

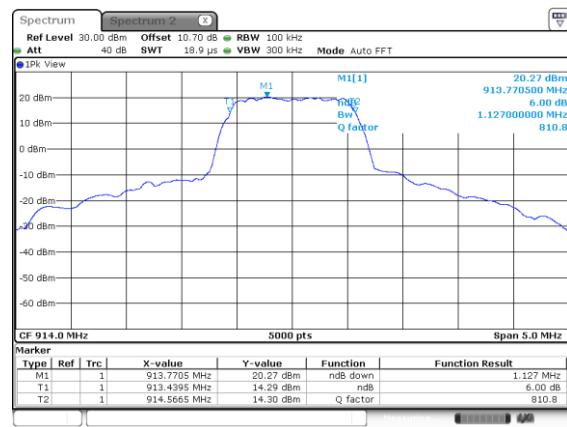


Figure 2.4.6-2: Mode 1 – 6 dB BW – MCH

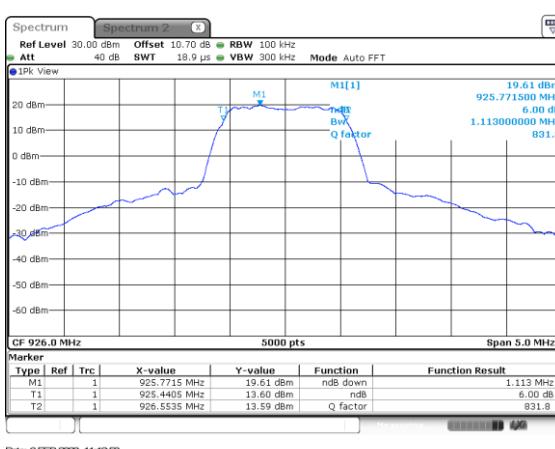


Figure 2.4.6-3: Mode 1 – 6 dB BW – HCH



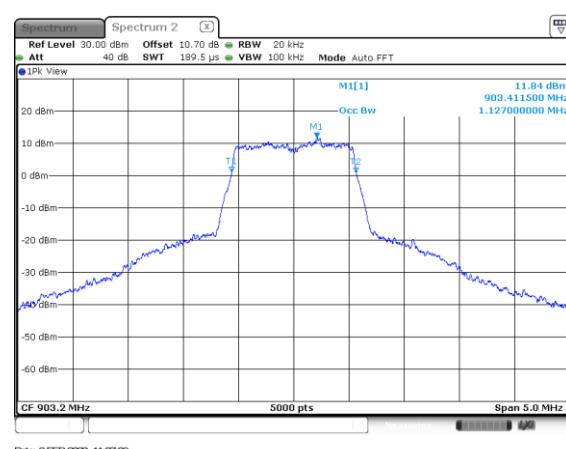


Figure 2.4.6-4: Mode 1 – 99% OBW – LCH

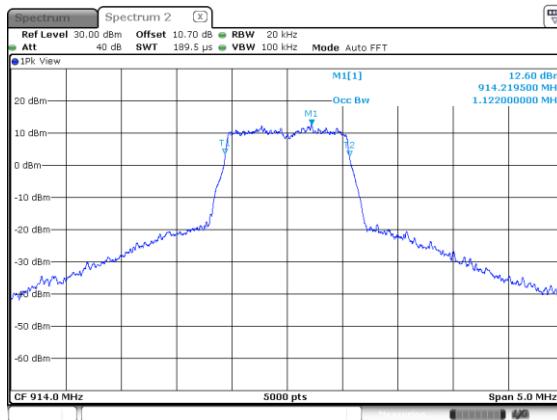

Date: 6 FEB 2023 11:10:41

Figure 2.4.6-5: Mode 1 – 99% OBW – MCH

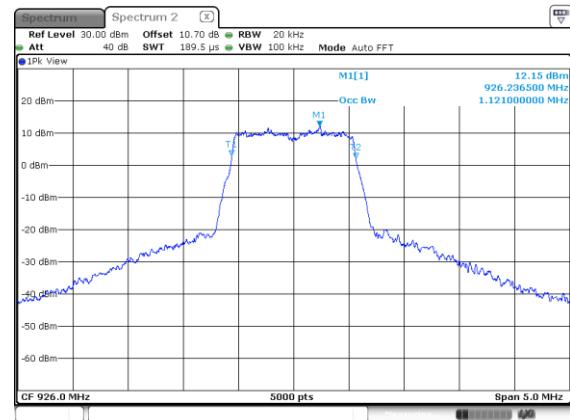

Date: 6 FEB 2023 11:15:14

Figure 2.4.6-6: Mode 1 – 99% OBW – HCH



2.5 Maximum Power Spectral Density in the Fundamental Emission

2.5.1 Specification Reference

FCC Sections: 15.247(e)
ISED Canada: RSS-247 5.2(b)

2.5.2 Equipment Under Test and Modification State

As shown in §1.4 with modification state "0", as noted in §1.6.

2.5.3 Date of Test

02/28/2023

2.5.4 Test Method

The power spectral density was measured in accordance with the ANSI 63.10 Subclause 11.10.3 Method AVGPSD-1. The RF output of the equipment under test was directly connected to the input of the spectrum analyzer applying suitable attenuation. The Resolution Bandwidth (RBW) of the spectrum analyzer was set to 3 kHz. The Video Bandwidth (VBW) was set to 10 kHz. Span was set to 1.5 times the OBW. The RMS average detector is used, with the trace averaging mode set to 100 traces. The marker is placed on the highest peak of the resulting trace.

2.5.5 Environmental Conditions

The EUT was evaluated within the temperature, humidity and pressure range of the EUT as specified by the standard. The laboratory shall have an ambient temperature range of 15°C to 35°C, relative humidity range of 30% to 60% and atmospheric pressure range of 86 kPa to 106 kPa.

Ambient Temperature	22.3 °C
Relative Humidity	53.8 %
Atmospheric Pressure	972.2 mbar

2.5.6 Test Results

Test Summary: EUT was set to transmit mode as per sections 1.4.2 / 1.4.3.

Test Results: Pass

See data below for detailed results.

Table 2.5.6-1: RF Power Spectral Density

Frequency [MHz]	Average PSD (dBm)	Data rate (Kbps)	Modulation Format
903.2	-4.52	2400	OFDM
914	-2.73	2400	OFDM
926	-3.72	2400	OFDM

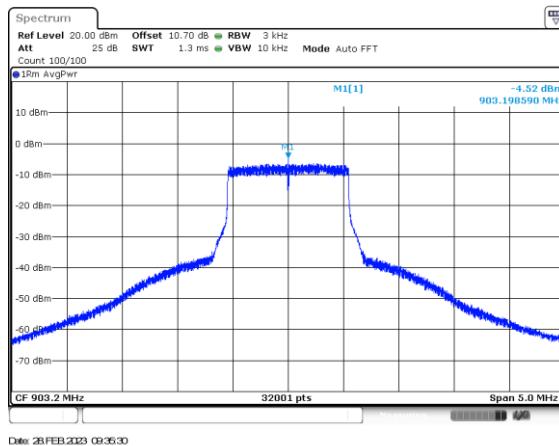


Figure 2.5.6-1: Mode 1 – PSD – LCH

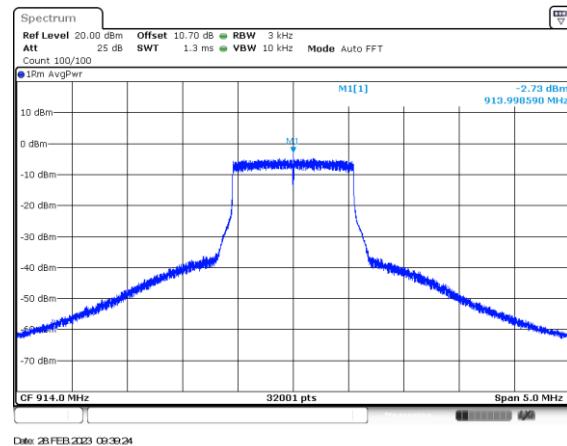


Figure 2.5.6-2: Mode 1 – PSD – MCH

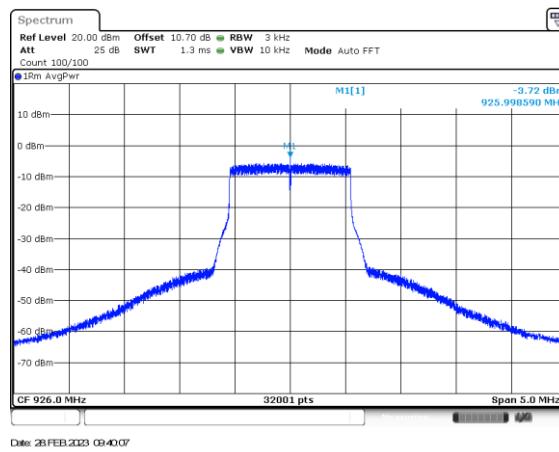


Figure 2.5.6-3: Mode 1 – PSD – HCH



2.6 Band-Edge Compliance of RF Conducted Emissions

2.6.1 Specification Reference

FCC Sections: 15.247(d)
ISED Canada: RSS-247 5.5

2.6.2 Equipment Under Test and Modification State

As shown in §1.4 with modification state "0", as noted in §1.6.

2.6.3 Date of Test

02/06/2023

2.6.4 Test Method

The RF output port of the EUT was directly connected to the input of the spectrum analyzer with suitable attenuation. The EUT was investigated at the lowest and highest channel available to determine band-edge compliance. For each measurement, the spectrum analyzer's RBW was set to 100kHz and the VBW was set to 300kHz.

If maximum conducted (average) output power was used to determine compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).

2.6.5 Environmental Conditions

The EUT was evaluated within the temperature, humidity and pressure range of the EUT as specified by the standard. The laboratory shall have an ambient temperature range of 15°C to 35°C, relative humidity range of 30% to 60% and atmospheric pressure range of 86 kPa to 106 kPa.

Ambient Temperature	22.3 °C
Relative Humidity	53.8 %
Atmospheric Pressure	972.2 mbar

2.6.6 Test Results

Test Summary: EUT was set to transmit mode as per sections 1.4.2 / 1.4.3.

Test Results: Pass

See data below for detailed results.



Figure 2.6.6-1: Lower Band edge – Mode 1

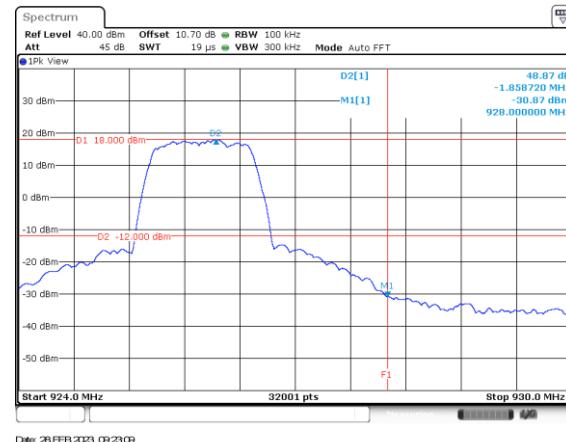


Figure 2.6.6-2: Upper Band edge – Mode 1



2.7 RF Conducted Spurious Emissions

2.7.1 Specification Reference

FCC Sections: 15.247(d)
ISED Canada: RSS-247 5.5

2.7.2 Equipment Under Test and Modification State

As shown in §1.4 with modification state "0", as noted in §1.6.

2.7.3 Date of Test

02/06/2023

2.7.4 Test Method

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The EUT was investigated for conducted spurious emissions from 30MHz to 10 GHz, 10 times the highest fundamental frequency. Measurements were made at the low, center, and high channels of the EUT. For each measurement, the spectrum analyzer's RBW was set to 100kHz. A peak detector function was used with the trace set to max hold.

If maximum conducted (average) output power was used to determine compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).

2.7.5 Environmental Conditions

The EUT was evaluated within the temperature, humidity and pressure range of the EUT as specified by the standard. The laboratory shall have an ambient temperature range of 15°C to 35°C, relative humidity range of 30% to 60% and atmospheric pressure range of 86 kPa to 106 kPa.




Ambient Temperature	22.3 °C
Relative Humidity	53.8 %
Atmospheric Pressure	972.2 mbar

2.7.6 Test Results

Test Summary: EUT was set to transmit mode as per sections 1.4.2 / 1.4.3.

Test Results: Pass

See data below for detailed results.

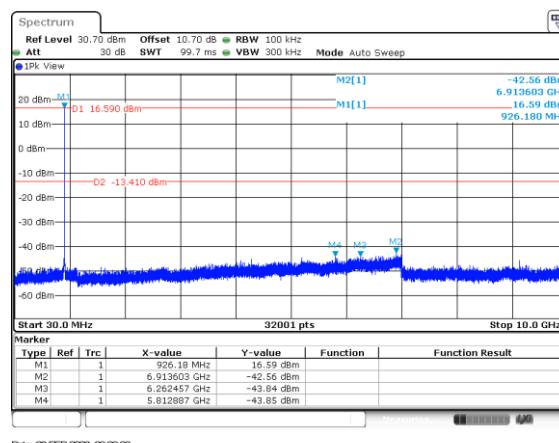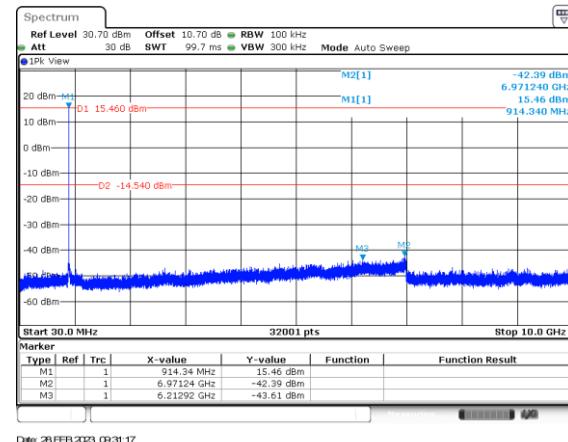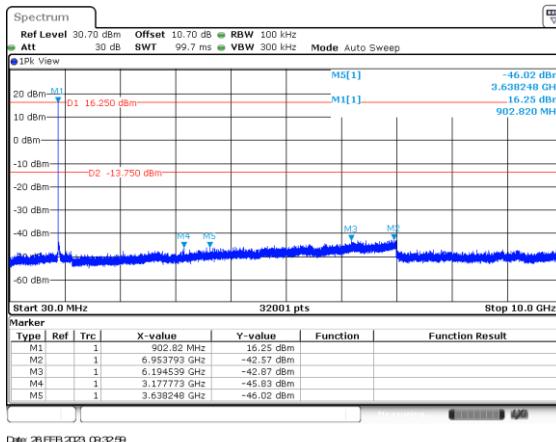



2.8 Radiated Spurious Emissions into Restricted Frequency Bands

2.8.1 Specification Reference

FCC Sections: 15.205, 15.209.
ISED Canada: RSS – Gen 8.9/8.10

2.8.2 Equipment Under Test and Modification State

As shown in §1.4 with modification state “0”, as noted in §1.6.

2.8.3 Date of Test

02/07/2023 to 02/09/2023

2.8.4 Test Method

Radiated emissions tests were made over the frequency range of 9 kHz to 10 GHz, 10 times the highest fundamental frequency of 900 MHz. Each emission found to be in a restricted band as defined by section 15.205, including any emission at the operational band-edge, was compared to the radiated emission limits as defined in Section 15.209.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 150 kHz, quasi-peak measurements were made using a resolution bandwidth RBW of 300 Hz and a video bandwidth VBW of 1 kHz and frequencies between 150 kHz and 30MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 10 kHz and a video bandwidth VBW of 30 kHz. For frequencies between 30 MHz and 1000 MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 100 kHz and a video bandwidth VBW of 300 kHz. For frequencies above 1000 MHz, peak and average measurements were made with RBW of 1 MHz and VBW of 3 MHz.

2.8.5 Environmental Conditions

The EUT was evaluated within the temperature, humidity and pressure range of the EUT as specified by the standard. The laboratory shall have an ambient temperature range of 15°C to 35°C, relative humidity range of 30% to 60% and atmospheric pressure range of 86 kPa to 106 kPa.

Ambient Temperature	22.3 °C
Relative Humidity	53.8 %
Atmospheric Pressure	972.2 mbar



2.8.6 Test Results

Test Summary: EUT was set to transmit mode as per sections 1.4.2 / 1.4.3.

Test Results: Pass

See data below for detailed results.

Table 2.8.6-1: Radiated Spurious Emissions Tabulated Data

Frequency	Peak Value	QP/Avg Value	Peak Limit	QP/Avg Limit	Peak Margin	QP/Avg Margin	Polarity	Peak Limit Results	QP/Avg Limit Results
MHz	dB μ V/m	dB μ V/m	dB μ V/m	dB μ V/m	dB	dB	H/V	Pass/Fail	Pass/Fail
LCH – 903.2 MHz									
118.243	----	36.021	----	43.5	----	-7.48	H	----	PASS
133.109	----	32.25	----	43.5	----	-11.25	H	----	PASS
162.644	----	34.294	----	43.5	----	-9.21	H	----	PASS
118.267	----	39.541	----	43.5	----	-3.96	V	----	PASS
133.109	----	39.193	----	43.5	----	-4.31	V	----	PASS
162.621	----	41.357	----	43.5	----	-2.14	V	----	PASS
2709.8	46.164	31.134	74	54	-27.84	-22.87	H	PASS	PASS
3612.575	47.014	32.8	74	54	-26.99	-21.2	H	PASS	PASS
2709.825	45.482	31.469	74	54	-28.52	-22.53	V	PASS	PASS
3612.875	48.072	33.061	74	54	-25.93	-20.94	V	PASS	PASS
MCH – 914 MHz									
118.418	----	35.674	----	43.5	----	-7.83	H	----	PASS
133.114	----	30.915	----	43.5	----	-12.59	H	----	PASS
162.699	----	34.258	----	43.5	----	-9.24	H	----	PASS
118.37	----	38.722	----	43.5	----	-4.78	V	----	PASS
133.114	----	39.168	----	43.5	----	-4.33	V	----	PASS
162.746	----	41.574	----	43.5	----	-1.93	V	----	PASS
162.524	----	28.664	----	43.5	----	-14.84	V	----	PASS
2741.75	45.555	31.133	74	54	-28.45	-22.87	H	PASS	PASS
3655.975	48.421	33.357	74	54	-25.58	-20.64	H	PASS	PASS
2742.175	46.696	31.348	74	54	-27.3	-22.65	V	PASS	PASS
3655.8	48.28	32.904	74	54	-25.72	-21.1	V	PASS	PASS
HCH – 926 MHz									
118.389	----	33.963	----	43.5	----	-9.54	H	----	PASS
133.234	----	30.794	----	43.5	----	-12.71	H	----	PASS
162.815	----	36.011	----	43.5	----	-7.49	H	----	PASS
118.442	----	38.467	----	43.5	----	-5.03	V	----	PASS
133.161	----	40.184	----	43.5	----	-3.32	V	----	PASS



162.72	-----	41.327	-----	43.5	-----	-2.17	V	-----	PASS
2778.2	45.99	30.975	74	54	-28.01	-23.03	H	PASS	PASS
3704.025	47.066	32.885	74	54	-26.93	-21.12	H	PASS	PASS
2777.875	46.232	31.136	74	54	-27.77	-22.86	V	PASS	PASS
3703.975	47.55	32.861	74	54	-26.45	-21.14	V	PASS	PASS

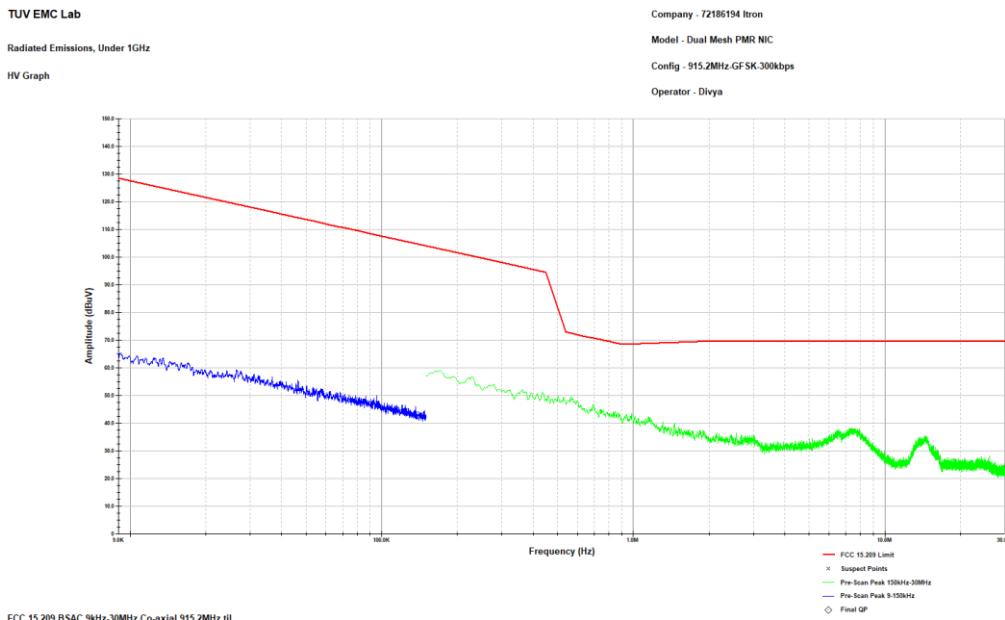


Figure 1: Reference Plot for Radiated Spurious Emissions – 9 kHz – 30 MHz – Co-Axial
Note: Emissions above the noise floor are ambient not associated with the EUT.

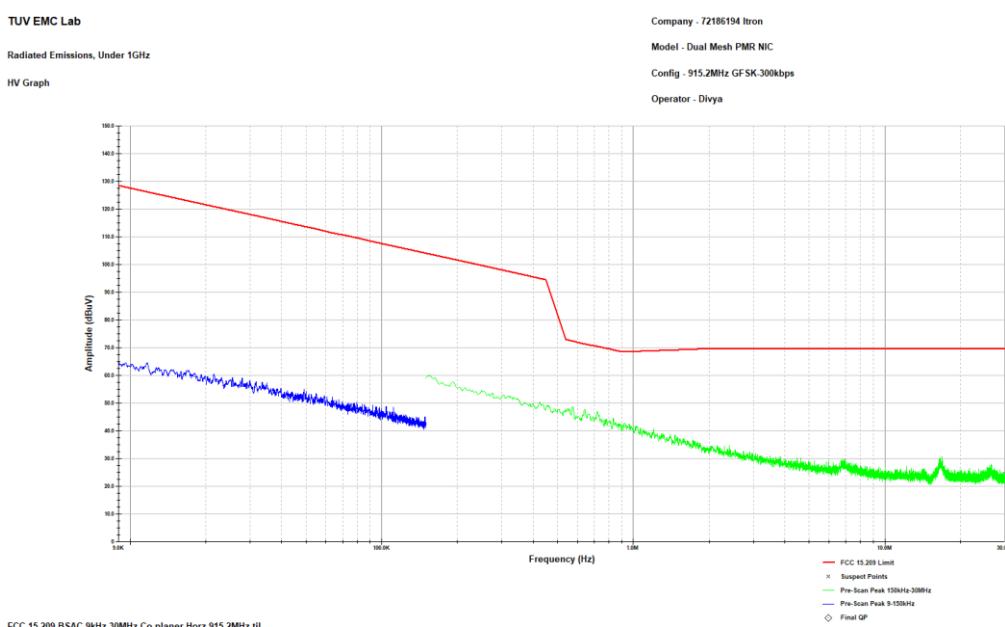


Figure 2: Reference Plot for Radiated Spurious Emissions – 9 kHz – 30 MHz – Co-Planar Horizontal

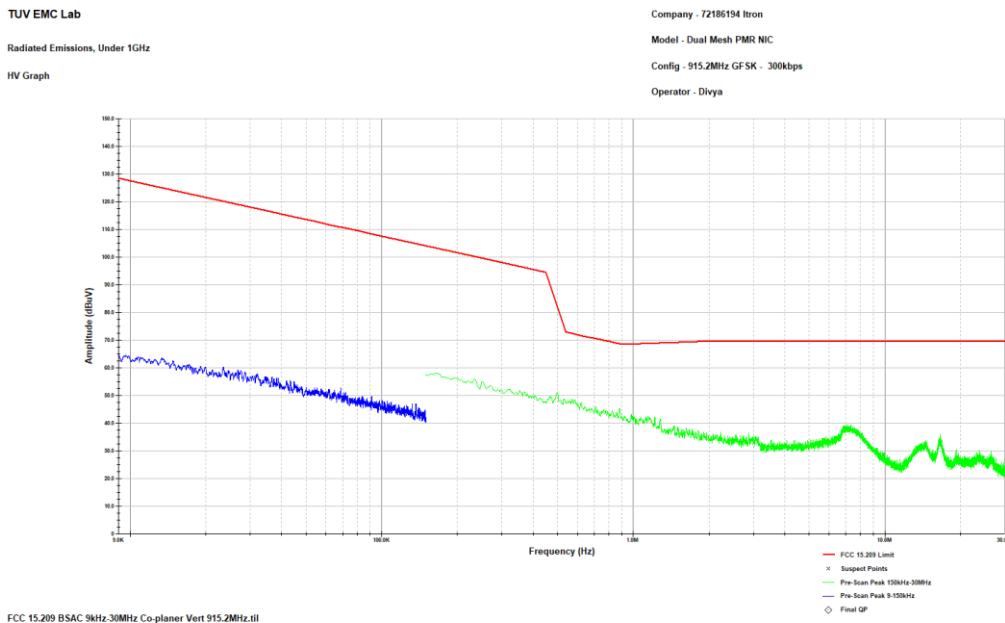


Figure 3: Reference plot for Radiated Spurious Emissions – 9 kHz – 30 MHz – Co-Planar Vertical
Note: Emissions above the noise floor are ambient not associated with the EUT.

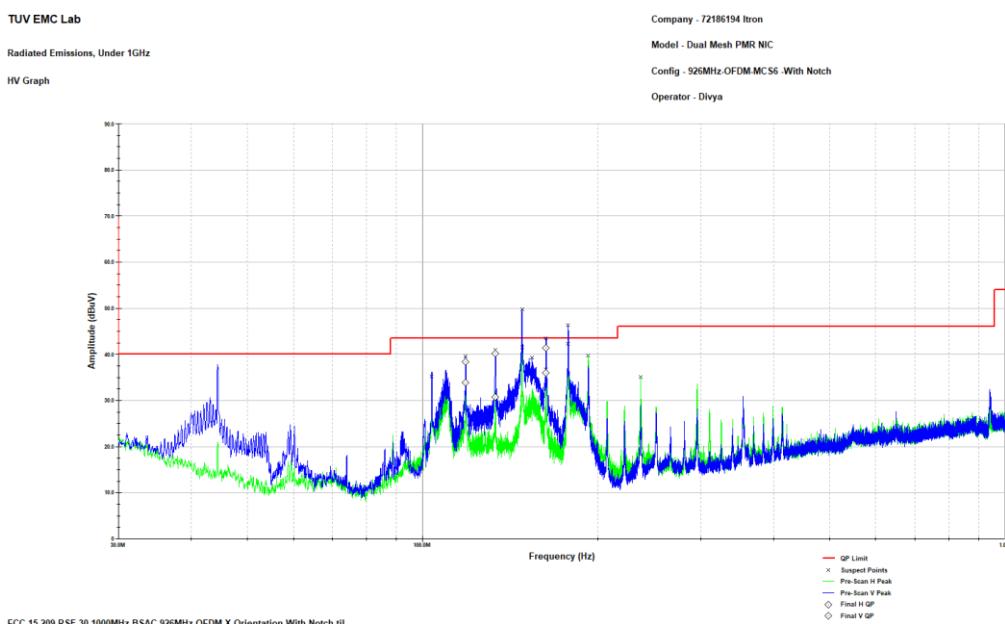


Figure 4: Reference plot for Radiated Spurious Emissions – 30 MHz – 1 GHz
Note: Emissions within restricted bands only were evaluated.

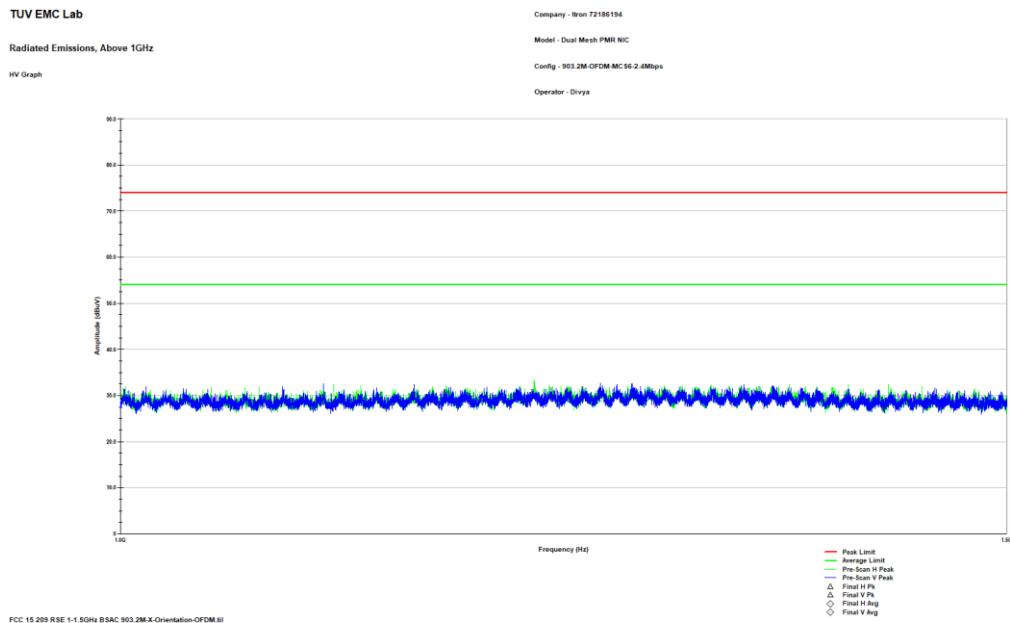


Figure 5: Reference plot for Radiated Spurious Emissions – 1 GHz – 1.5 GHz

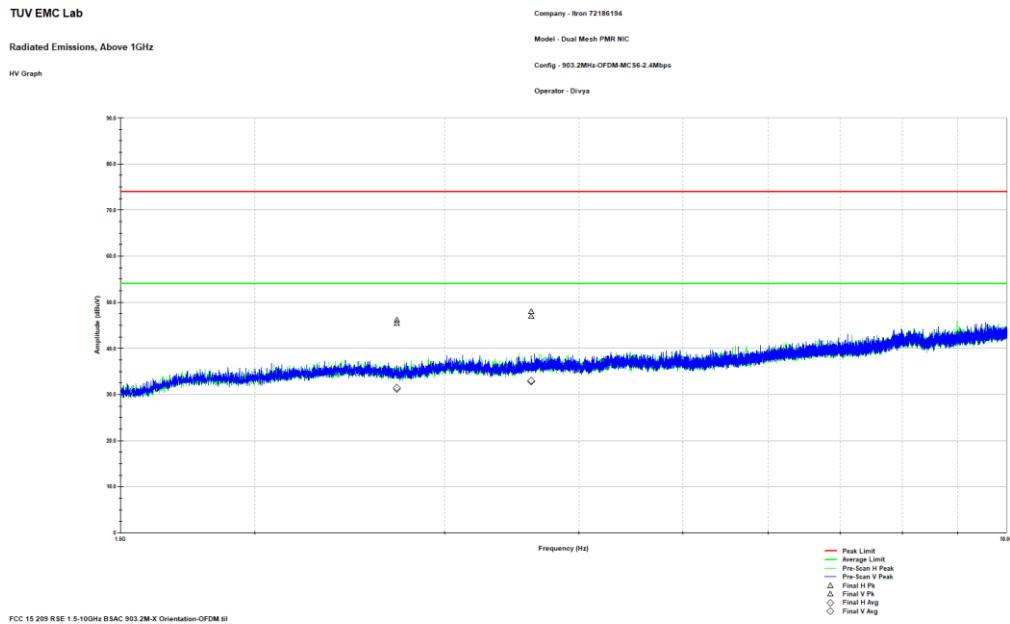


Figure 6: Reference plot for Radiated Spurious Emissions – 1.5 GHz – 10 GHz



2.9 Test Equipment Used

Table 2.9-1 –Equipment List

Asset ID	Manufacturer	Model	Equipment Type	Serial Number	Last Calibration Date	Calibration Due Date
628	EMCO	6502	Active Loop Antenna 10kHz-30MHz	9407-2877	06/08/2021	06/08/2023
853	Teseq	CBL6112D	BiLog Antenna	51616	7/15/2021	7/15/2023
884	ETS Lindgren (EMCO)	3117	DOUBLE-RIDGED GUIDE ANTENNA	240106	5/6/2021	5/6/2023
889	Com Power	PAM 103	Pre-amplifier	18020215	9/27/2022	9/27/2023
338	Hewlett Packard	8449B	High Frequency Pre-Amp	3008A01111	6/22/2021	6/22/2023
882	Rohde & Schwarz	ESW44	ESW44 EMI TEST RECEIVER	101961	7/14/2022	7/14/2023
22	Teledyne Storm Microwave	90-195-456	BSAC Cable	N/A	10/7/2022	10/7/2023
20	Teledyne Storm Microwave	R-90-195-036	BSAC Cable	N/A	7/12/2022	7/12/2023
21	Teledyne Storm Microwave	R-90-195-072	BSAC Cable	N/A	7/12/2022	7/12/2023
337	Microwave Circuits	H1G513G1	Microwave filter	282706	5/31/2022	5/31/2023
827	Rohde & Schwarz	RF Cable set	TS8997 Rack cable set	N/A	12/21/2022	12/21/2023
622	Rohde & Schwarz	FSV40 (v3.40)	FSV Signal Analyzer 10Hz to 40GHz	101338	10/05/2022	10/05/2023
267	Hewlett Packard	N1911A	Power Meter	MY45100129	7/27/2021	7/27/2023
872	HP	E7402A	EMI Receiver	US40240258	6/21/2022	6/21/2023
871	ACS	n/a	Conducted EMI Cable	871	4/1/2022	4/1/2023
3010	Rohde & Schwarz	ENV216	Two-Line V-Network	3010	6/22/2022	6/22/2023

N/A – Not Applicable

NCR – No Calibration Required

3 Diagram of Test Set-ups

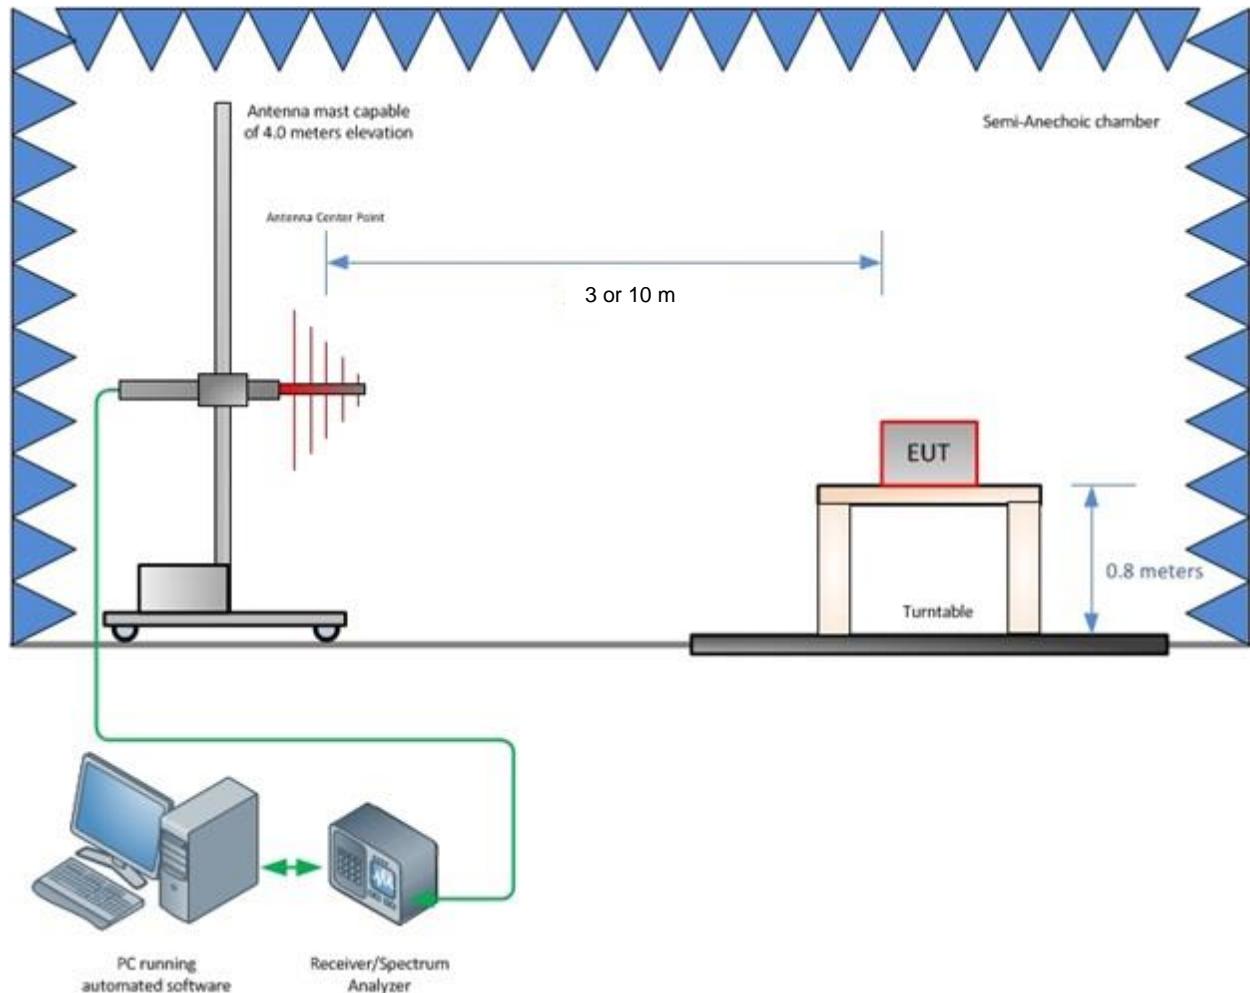


Figure 3-1 – Radiated Emissions Test Setup up to 1 GHz

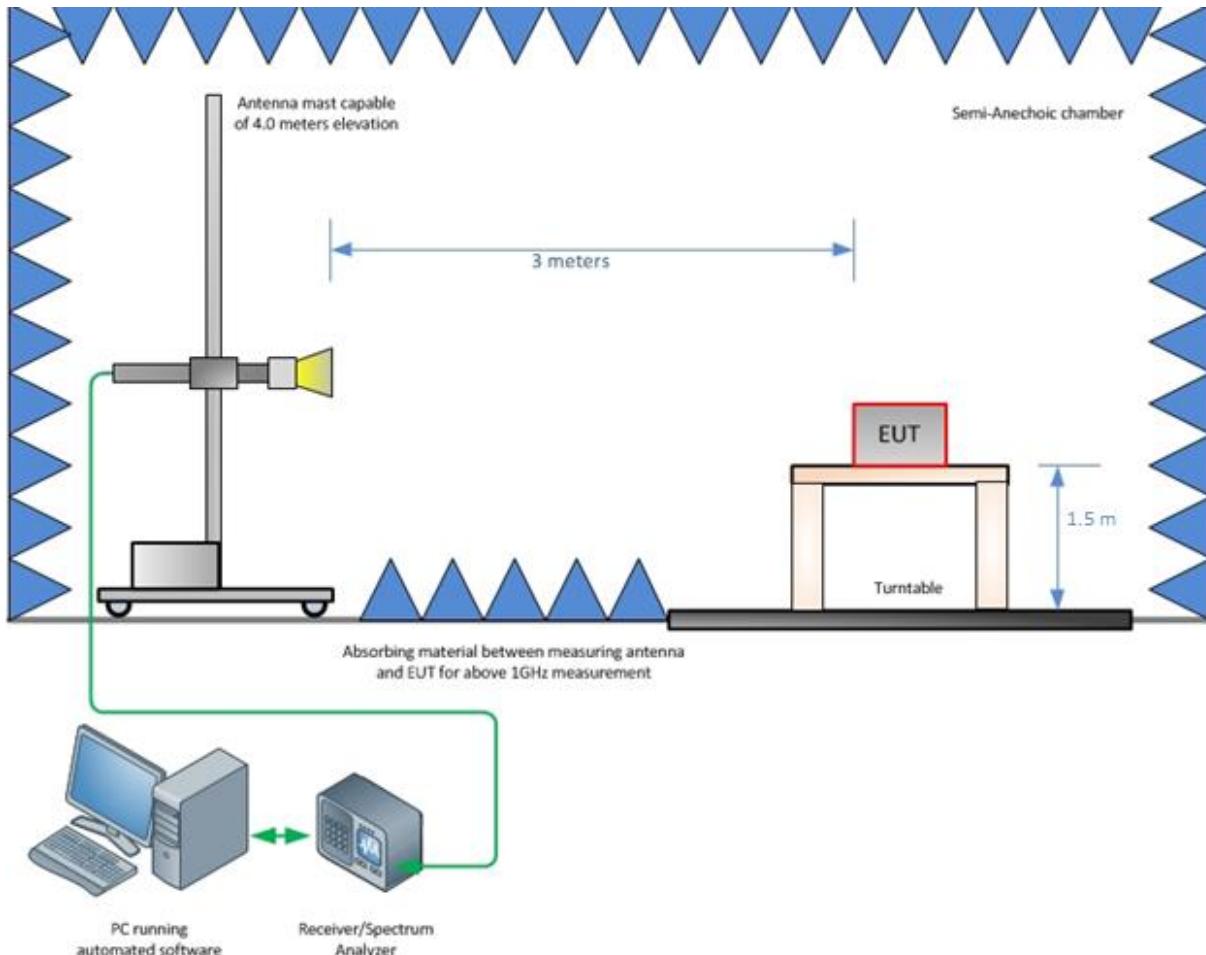


Figure 3-2 – Radiated Emissions Test Setup above 1 GHz

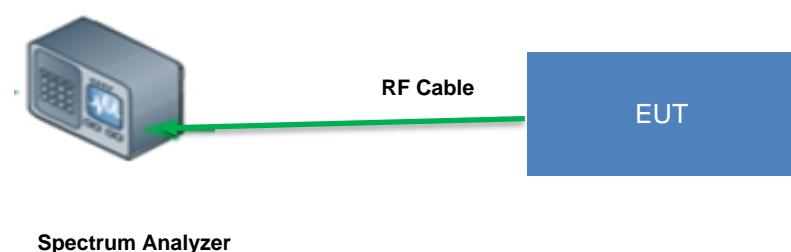


Figure 3-3 – Conducted Test Setup: Antenna Port measurement



4 Accreditation, Disclaimers and Copyright

TÜV SÜD America Inc.'s reports apply only to the specific sample tested under stated test conditions. It is the manufacturer's responsibility to assure the continued compliance of production units of this model. TÜV SÜD America, Inc. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD America, Inc.'s issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and TÜV SÜD America, Inc., extracts from the test report shall not be reproduced, except in full without TÜV SÜD America, Inc.'s written approval.

This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the federal government.

STATEMENT OF MEASUREMENT UNCERTAINTY

The expanded laboratory measurement uncertainty figures (U_{Lab}) provided below correspond to an expansion factor (coverage factor) $k = 1.96$ which provide confidence levels of 95%.

Table 4-1: Estimation of Measurement Uncertainty

Parameter	U_{Lab}
Occupied Channel Bandwidth	$\pm 0.009 \%$
RF Conducted Output Power	$\pm 0.349 \text{ dB}$
Power Spectral Density	$\pm 0.372 \text{ dB}$
Antenna Port Conducted Emissions	$\pm 1.264 \text{ dB}$
Radiated Emissions $\leq 1 \text{ GHz}$	$\pm 5.814 \text{ dB}$
Radiated Emissions $> 1 \text{ GHz}$	$\pm 4.318 \text{ dB}$
Temperature	$\pm 0.860 \text{ }^{\circ}\text{C}$
Radio Frequency	$\pm 2.832 \times 10^{-8}$
AC Power Line Conducted Emissions	$\pm 3.360 \text{ dB}$

TEST EQUIPMENT

All measurement instrumentation is traceable to the National Institute of Standards and Technology and is calibrated to meet test method standard requirements and/or manufacturer's specifications.