

Certification Test Report

**FCC ID: SK9OW1
IC: 864G-OW1**

**FCC Rule Part: 15.247
ISED Canada Radio Standards Specification: RSS-247**

ACS Report Number: 16-0295.W06.1B

**Manufacturer: Itron, Inc.
Models: OW1**

**Test Begin Date: August 10, 2016
Test End Date: October 11, 2016**

Report Issue Date: December 8, 2016



FOR THE SCOPE OF ACCREDITATION UNDER Certificate Number: AT-2021

This report must not be used by the client to claim product certification, approval, or endorsement by ANAB, NIST, or any agency of the Federal Government.

Prepared by:

**Ryan McGann
Wireless Program Manager
Advanced Compliance Solutions, Inc.**

Reviewed by:

**Thierry Jean-Charles
EMC Engineer
Advanced Compliance Solutions, Inc.**

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

This report contains 38 pages

TABLE OF CONTENTS

1	GENERAL	3
1.1	PURPOSE.....	3
1.2	PRODUCT DESCRIPTION	3
1.3	TEST METHODOLOGY AND CONSIDERATIONS	4
2	TEST FACILITIES.....	5
2.1	LOCATION	5
2.2	LABORATORY ACCREDITATIONS/RECOGNITIONS/CERTIFICATIONS	5
2.3	RADIATED EMISSIONS TEST SITE DESCRIPTION	6
2.3.1	<i>Semi-Anechoic Chamber Test Site</i>	6
2.3.2	<i>Open Area Tests Site (OATS)</i>	7
2.4	CONDUCTED EMISSIONS TEST SITE DESCRIPTION	8
3	APPLICABLE STANDARD REFERENCES.....	8
4	LIST OF TEST EQUIPMENT.....	9
5	SUPPORT EQUIPMENT.....	10
6	EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM	10
7	SUMMARY OF TESTS.....	11
7.1	ANTENNA REQUIREMENT – FCC: SECTION 15.203	11
7.2	POWER LINE CONDUCTED EMISSIONS – FCC 15.207, ISED CANADA: RSS-GEN 8.8.....	11
7.2.1	<i>Measurement Procedure</i>	11
7.2.2	<i>Measurement Results</i>	11
7.3	PEAK OUTPUT POWER - FCC 15.247(B)(2) ISED CANADA: RSS-247 5.4(1)	13
7.3.1	<i>Measurement Procedure</i>	13
7.3.2	<i>Measurement Results</i>	13
7.4	CHANNEL USAGE REQUIREMENTS	14
7.4.1	<i>Carrier Frequency Separation – FCC 15.247(a)(1) ISED Canada: RSS-247 5.1(2)</i>	14
7.4.1.1	<i>Measurement Procedure</i>	14
7.4.1.2	<i>Measurement Results</i>	15
7.4.2	<i>Number of Hopping Channels – FCC 15.247(a)(1)(i) ISED Canada: RSS-247 5.1(3)</i>	16
7.4.2.1	<i>Measurement Procedure</i>	16
7.4.2.2	<i>Measurement Results</i>	17
7.4.3	<i>Channel Dwell Time – FCC 15.247(a)(1)(i) ISED Canada: RSS-247 5.1(3)</i>	18
7.4.3.1	<i>Measurement Procedure</i>	18
7.4.4	<i>20dB / 99% Bandwidth - FCC 15.247(a)(1)(i) ISED Canada: RSS-247 5.1(3)</i>	19
7.4.4.1	<i>Measurement Procedure</i>	19
7.4.4.2	<i>Measurement Results</i>	19
7.5	BAND-EDGE COMPLIANCE AND SPURIOUS EMISSIONS	26
7.5.1	<i>Band-Edge Compliance of RF Conducted Emissions - FCC 15.247(d); IC RSS-247 5.5</i>	26
7.5.1.1	<i>Measurement Procedure</i>	26
7.5.1.2	<i>Measurement Results</i>	26
7.5.2	<i>RF Conducted Spurious Emissions - FCC 15.247(d); IC RSS-247 5.5</i>	31
7.5.2.1	<i>Measurement Procedure</i>	31
7.5.2.2	<i>Measurement Results</i>	31
7.5.3	<i>Radiated Spurious Emissions - FCC 15.205, 15.209; RSS-Gen 8.9/8.10</i>	35
7.5.3.1	<i>Measurement Procedure</i>	35
7.5.3.2	<i>Measurement Results</i>	35
7.5.3.3	<i>Sample Calculation:</i>	37
8	CONCLUSION.....	38

1 GENERAL

1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations and Innovation, Science, and Economic Development Canada's Radio Standards Specification RSS-247 Certification for modular approval.

1.2 Product description

The Itron OW1 is a communications module which includes a 902.4 MHz to 927.6 MHz transmitter. The module operates on DC voltage which is supplied by a host device.

This test report documents the compliance of the 902.4 MHz to 927.6 MHz transceiver mode of operation.

Technical Details:

Detail	Description
Frequency Range	902.4 – 927.6 MHz
Number of Channels	64
Modulation Format	FSK, OFDM, DSSS
Data Rates	FSK: 50kbps, 150kbps OFDM: 200kbps, 600kbps DSSS: 6.25kbps, 12.5kbps
Operating Voltage	24Vdc
Antenna Type(s) / Gain(s)	Monopole / 2.8dBi

Manufacturer Information:

Itron, Inc.
313 N Hwy 11
West Union, SC 29696

EUT Serial Numbers: 9110000595 (All modulations except FSK 50kbps)
9110000593 (FSK 50kbps)

Test Sample Condition: The test samples were provided in good working order with no visible defects.

1.3 Test Methodology and Considerations

All modes of operation, including all available data rates, were evaluated for each mode. The data presented in this report represents the worst case where applicable. A single test sample was not capable of supporting all modulation formats in test mode, therefore multiple samples were used to evaluate the compliance of all available modulation formats.

For radiated emissions the EUT was evaluated in three orthogonal orientations for each modulation. The worst case orientation was the Y-orientation for the FSK modulation and Z-orientation for the OFDM and DSSS modulations. See test setup photos for more information. All data rates were evaluated for worst case operation for each modulation format. The worst case data rates evaluated were FSK 50kbps, OFDM 600kbps, and DSSS 12.5kbps.

For AC power line conducted emissions the EUT was evaluated with a commercially available wall wart power supply.

For RF conducted emissions, the EUT was modified with a temporary u.fl connector for coupling to the measurement equipment.

Software power settings during test:

- FSK Modulation: -2
- OFDM Modulation: +4
- DSSS Modulation: +2

2 TEST FACILITIES

2.1 Location

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions
5015 B.U. Bowman Drive
Buford, GA 30518
Phone: (770) 831-8048
Fax: (770) 831-8598

2.2 Laboratory Accreditations/Recognitions/Certifications

ACS is accredited to ISO/IEC 17025 by the ANSI-ASQ National Accreditation Board/ANAB accreditation program, and has been issued certificate number AT-2021 in recognition of this accreditation. Unless otherwise specified, all tests methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

The Semi-Anechoic Chamber Test Site, Open Area Test Site (OATS) and Conducted Emissions Site have been fully described, submitted to, and accepted by the FCC, Innovation, Science, and Economic Development Canada and the Japanese Voluntary Control Council for Interference by information technology equipment.

FCC Registration Number: 391271

Innovation, Science, and Economic Development Canada Lab Code: IC 4175A

VCCI Member Number: 1831

- VCCI OATS Registration Number R-1526
- VCCI Conducted Emissions Site Registration Number: C-1608

2.3 Radiated Emissions Test Site Description

2.3.1 Semi-Anechoic Chamber Test Site

The Semi-Anechoic Chamber Test Site consists of a 20' x 30' x 18' shielded enclosure. The chamber is lined with Toyo Ferrite Grid Absorber, model number FFG-1000. The ferrite tile grid is 101 x 101 x 19mm thick and weighs approximately 550 grams. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber.

The turntable is 150cm in diameter and is located 160cm from the back wall of the chamber. The chamber is grounded via 1 – 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is all steel, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Behind the turntable is a 3' x 6' x 4' deep shielded pit used for support equipment if necessary. The pit is equipped with 1 – 4" PVC chases from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3-1 below:

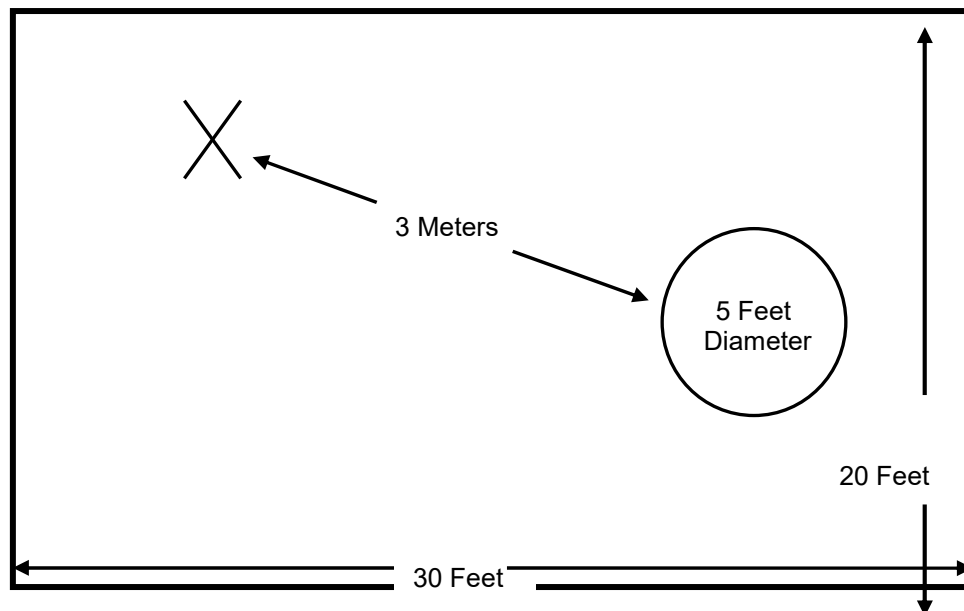


Figure 2.3-1: Semi-Anechoic Chamber Test Site

2.3.2 Open Area Tests Site (OATS)

The open area test site consists of a 40' x 66' concrete pad covered with a perforated electro-plated galvanized sheet metal. The perforations in the sheet metal are 1/8" holes that are staggered every 3/16". The individual sheets are placed to overlap each other by 1/4" and are riveted together to provide a continuous seam. Rivets are spaced every 3" in a 3 x 20 meter perimeter around the antenna mast and EUT area. Rivets in the remaining area are spaced as necessary to properly secure the ground plane and maintain the electrical continuity.

The entire ground plane extends 12' beyond the turntable edge and 16' beyond the antenna mast when set to a 10 meter measurement distance. The ground plane is grounded via 4 – 8' copper ground rods, each installed at a corner of the ground plane and bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is an all aluminum 10' flush mounted table installed in an all aluminum frame. The table is remotely operated from inside the control room located 40' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Adjacent to the turntable is a 7' x 7' square and 4' deep concrete pit used for support equipment if necessary. The pit is equipped with 5 – 4" PVC chases from the pit to the control room that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit. The pit is covered with 2 sheets of 1/4" diamond style re-enforced steel sheets. The sheets are painted to match the perforated steel ground plane; however the underside edges have been masked off to maintain the electrical continuity of the ground plane. All reflecting objects are located outside of the ellipse defined in ANSI C63.10.

A diagram of the Open Area Test Site is shown in Figure 2.3-2 below:

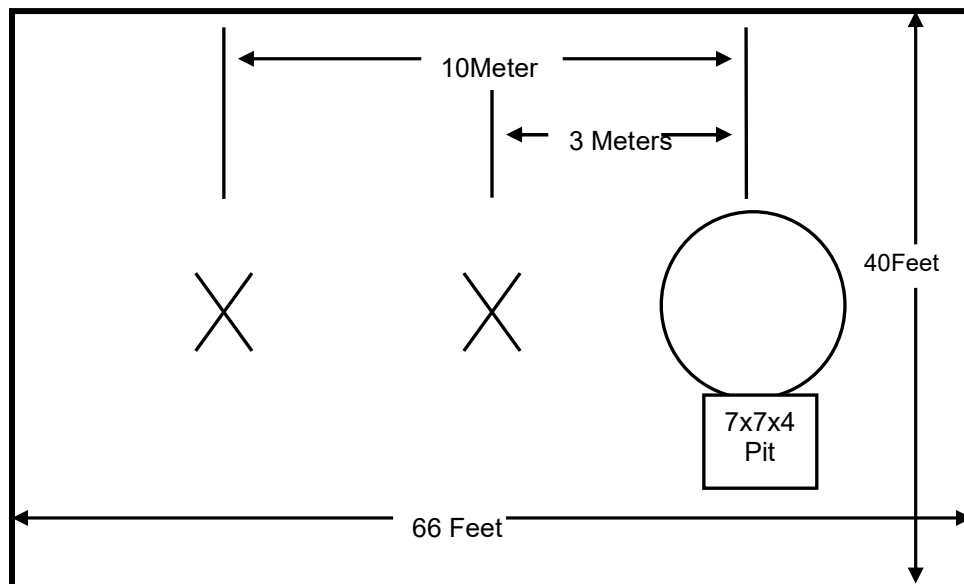


Figure 2.3-2: Open Area Test Site

2.4 Conducted Emissions Test Site Description

The AC mains conducted EMI site is located in the main EMC lab. It consists of an 8' x 8' solid aluminum horizontal ground reference plane (GRP) bonded every 3" to an 8' X 8' vertical ground plane.

The site is of sufficient size to test table top and floor standing equipment in accordance with section 6 of ANSI C63.10.

A diagram of the room is shown below in figure 2.4-1:

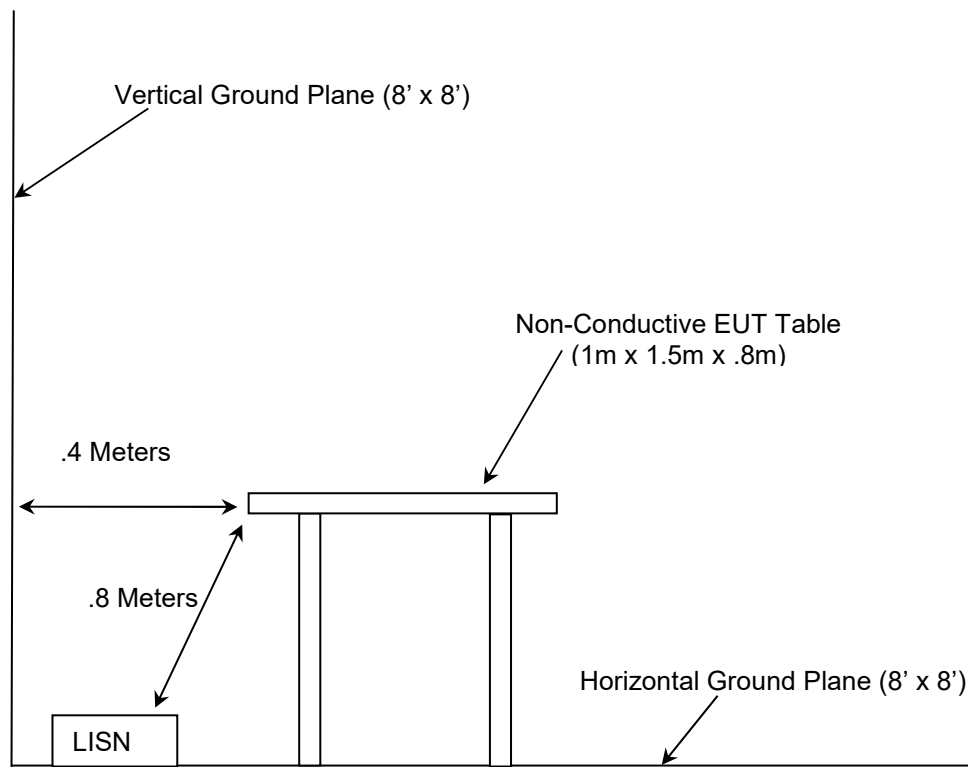


Figure 2.4-1: AC Mains Conducted EMI Site

3 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ❖ ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2016
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2016
- ❖ ISED Canada Radio Standards Specification: RSS-247 – Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and License-Exempt Local Area Network (LE-LAN) Devices, Issue 1, May 2015
- ❖ ISED Canada Radio Standards Specification: RSS-GEN – General Requirements and Information for the Certification of Radiocommunication Equipment, Issue 4, Nov 2014.

4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

Table 4-1: Test Equipment

AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
30	Spectrum Technologies	DRH-0118	Antennas	970102	4/30/2015	4/30/2017
40	EMCO	3104	Antennas	3211	2/10/2015	2/10/2017
73	Agilent	8447D	Amplifiers	2727A05624	7/21/2016	7/21/2017
167	ACS	Hammer EMI Cable S	Cable Set	167	10/20/2015	10/20/2016
267	Agilent	N1911A	Meters	MY45100129	8/24/2015	8/24/2017
268	Agilent	N1911A	Meters	MY45100129	8/24/2015	8/24/2017
324	ACS	Belden	Cables	8214	5/2/2016	5/2/2017
331	Microwave Circuits	H1G513G1	Filters	31417	5/13/2016	5/13/2017
338	Hewlett Packard	8449B	Amplifiers	3008A01111	8/21/2015	8/21/2017
340	Aeroflex/Weinschel	AS-20	Attenuators	7136	7/12/2016	7/12/2017
412	Electro Metrics	LPA-25	Antennas	1241	8/8/2016	8/8/2018
422	Florida RF	SMS-200AW-72.0-SMR	Cables	805	10/30/2015	10/30/2016
616	Florida RF Cables	SMRE-200W-12.0-SMRE	Cables	N/A	9/3/2015	9/3/2016
622	Rohde & Schwarz	FSV40	Analyzers	101338	7/15/2016	7/15/2018
676	Florida RF Labs	SMS-290AW-480.0-SMS	Cables	MFR2Y194	9/3/2015	9/3/2016
676	Florida RF Labs	SMS-290AW-480.0-SMS	Cables	MFR2Y194	9/2/2016	9/2/2017
3010	Rohde & Schwarz	ENV216	LISN	3010	7/11/2016	7/11/2017
RE112	Rohde & Schwarz	ESIB26	Receiver	836119/012	7/13/2016	7/13/2017
RE619	Rhode & Schwarz	ESU26	Spectrum Analyzers	1302.6005K26 Ser. 100190	11/5/2014	1/5/2017

NCR = No Calibration Required

NOTE: All test equipment was used only during active calibration cycles as reported above.

5 SUPPORT EQUIPMENT

Table 5-1: Support Equipment

Item	Equipment Type	Manufacturer	Model/Part Number	Serial Number
1	DC Power Supply	TRIAD	WSU120-1000	N/A

6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

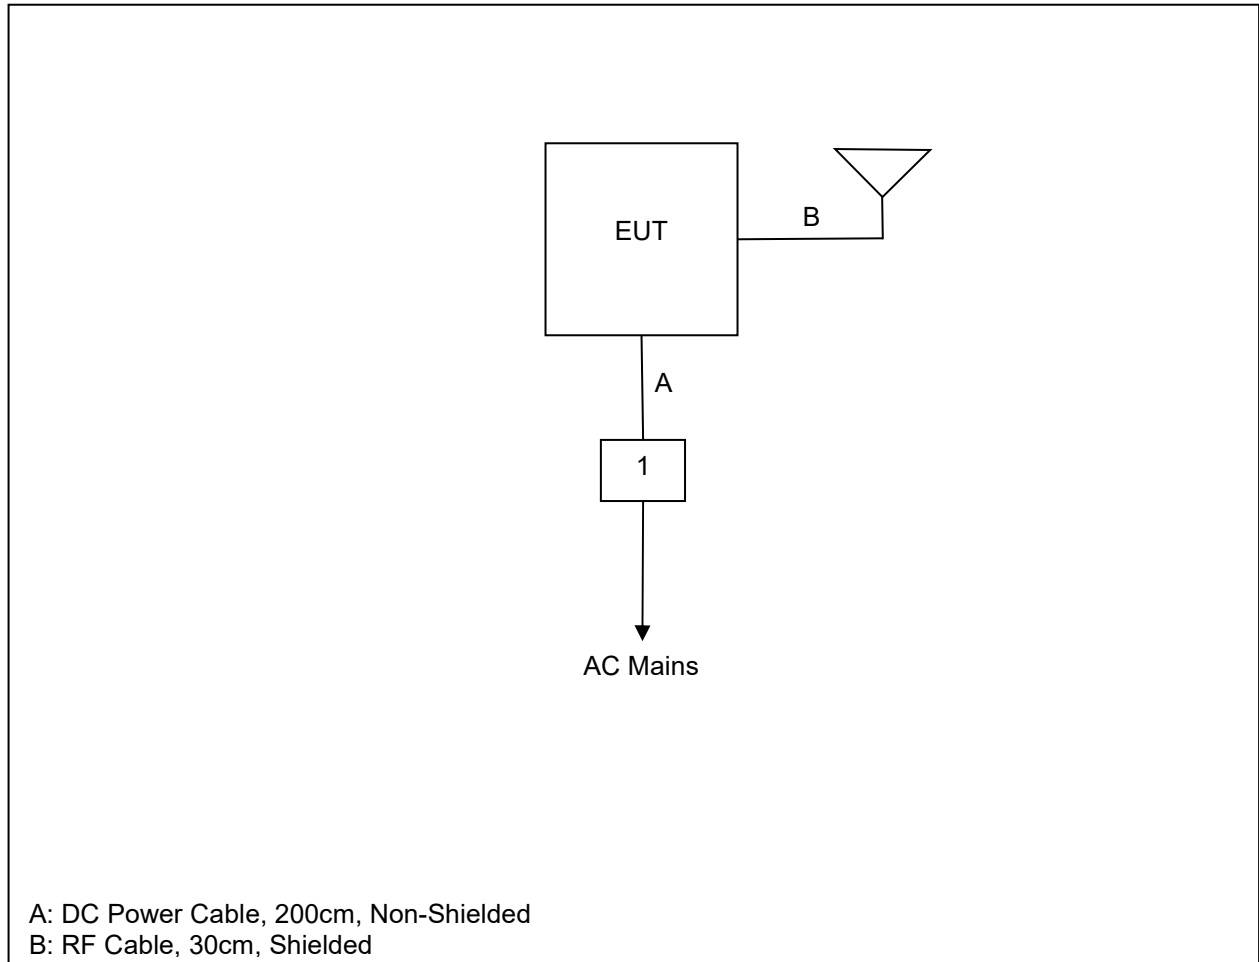


Figure 6-1: Test Setup Block Diagram

7 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

7.1 Antenna Requirement – FCC: Section 15.203

The OW1 utilizes a monopole antenna connected to the module via a cable using specialized connectors, therefore satisfying the requirements of Section 15.203. The antenna gain is 2.8dBi.

7.2 Power Line Conducted Emissions – FCC 15.207, ISED Canada: RSS-Gen 8.8

7.2.1 Measurement Procedure

ANSI C63.10 was the guiding document for this evaluation. Conducted emissions were performed from 150kHz to 30MHz with the spectrum analyzer's resolution bandwidth set to 9kHz and the video bandwidth set to 30kHz. The calculation for the conducted emissions is as follows:

$$\text{Corrected Reading} = \text{Analyzer Reading} + \text{LISN Loss} + \text{Cable Loss}$$

$$\text{Margin} = \text{Applicable Limit} - \text{Corrected Reading}$$

7.2.2 Measurement Results

Table 7.2.2-1: Conducted EMI Results Line 1

Frequency (MHz)	Corrected Reading		Limit (dBuV)	Margin (dB)	Line	Correction (dB)
	Quasi-Peak (dBuV)	Average (dBuV)				
0.156904	---	28.93	55.59	26.66	L1	9.7
0.156904	41.79	---	65.60	23.81	L1	9.7
0.417134	---	31.96	47.38	15.42	L1	9.7
0.417134	40.98	---	57.40	16.42	L1	9.7
0.894690	---	17.49	46.00	28.51	L1	9.7
0.894690	29.58	---	56.00	26.42	L1	9.7
0.921042	---	17.43	46.00	28.57	L1	9.7
0.921042	30.46	---	56.00	25.54	L1	9.7
1.236974	---	18.42	46.00	27.58	L1	9.8
1.236974	29.97	---	56.00	26.03	L1	9.8
2.327555	---	15.45	46.00	30.55	L1	9.8
2.327555	27.36	---	56.00	28.64	L1	9.8

Table 7.2.2-2: Conducted EMI Results Line 2

Frequency (MHz)	Corrected Reading		Limit (dBuV)	Margin (dB)	Line	Correction (dB)
	Quasi-Peak (dBuV)	Average (dBuV)				
0.399298	---	21.60	47.72	26.12	N	9.7
0.399298	33.06	---	57.75	24.69	N	9.7
0.504308	---	18.43	46.00	27.57	N	9.7
0.504308	29.95	---	56.00	26.05	N	9.7
0.528657	---	22.60	46.00	23.40	N	9.7
0.528657	31.27	---	56.00	24.73	N	9.7
0.819639	---	14.58	46.00	31.42	N	9.7
0.819639	27.92	---	56.00	28.08	N	9.7
1.206313	---	18.83	46.00	27.17	N	9.8
1.206313	28.15	---	56.00	27.85	N	9.8
1.208617	---	18.89	46.00	27.11	N	9.8
1.208617	28.25	---	56.00	27.75	N	9.8

7.3 Peak Output Power - FCC 15.247(b)(2) ISED Canada: RSS-247 5.4(1)**7.3.1 Measurement Procedure**

The RF output port of the EUT was directly connected to the input of a power meter using suitable attenuation. The device employs > 50 channels at any given time therefore the power is limited to 1 Watt.

7.3.2 Measurement Results**Table 7.3.2-1: Maximum Conducted Peak Output Power**

Frequency [MHz]	Level [dBm]	Modulation Format	Data Rate [kbps]
902.4	27.57	FSK	50
915.2	29.09	FSK	50
927.6	28.51	FSK	50
902.4	25.19	FSK	150
915.2	27.52	FSK	150
927.6	27.13	FSK	150
902.4	28.39	OFDM	200
915.2	29.54	OFDM	200
927.6	29.20	OFDM	200
902.4	28.34	OFDM	600
915.2	29.50	OFDM	600
927.6	29.19	OFDM	600
902.4	27.00	DSSS	6.25
915.2	28.78	DSSS	6.25
927.6	28.46	DSSS	6.25
902.4	26.97	DSSS	12.5
915.2	28.77	DSSS	12.5
927.6	28.46	DSSS	12.5

7.4 Channel Usage Requirements

7.4.1 Carrier Frequency Separation – FCC 15.247(a)(1) ISED Canada: RSS-247 5.1(2)

7.4.1.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer using suitable attenuation. The span of the spectrum analyzer was set wide enough to capture two adjacent peaks. The RBW was set to approximately 30% of the channel spacing and adjusted as necessary to best identify the center of each channel. The VBW was set > RBW.

7.4.1.2 Measurement Results

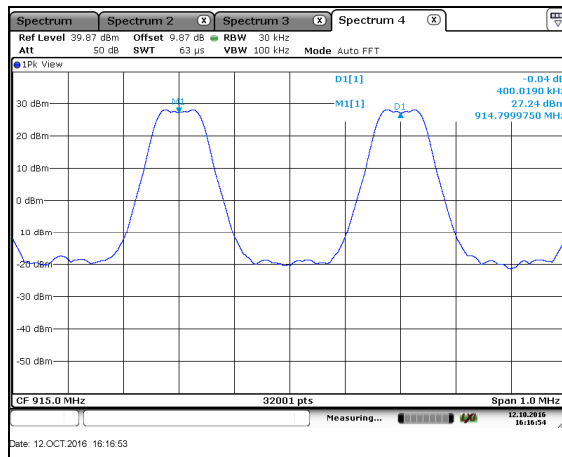


Figure 7.4.1.2-1: Freq. Separation – FSK – 50kbps

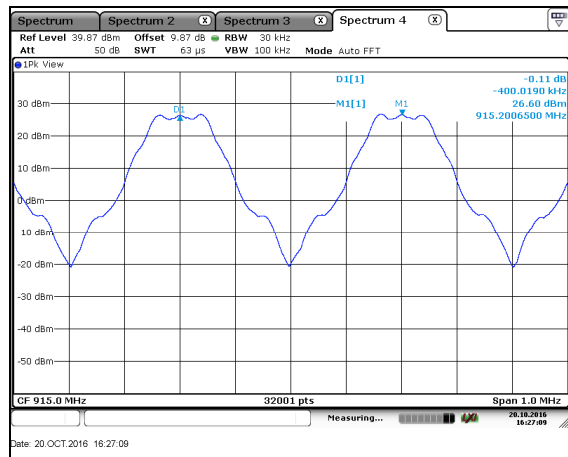


Figure 7.4.1.2-2: Freq. Separation – FSK – 150kbps

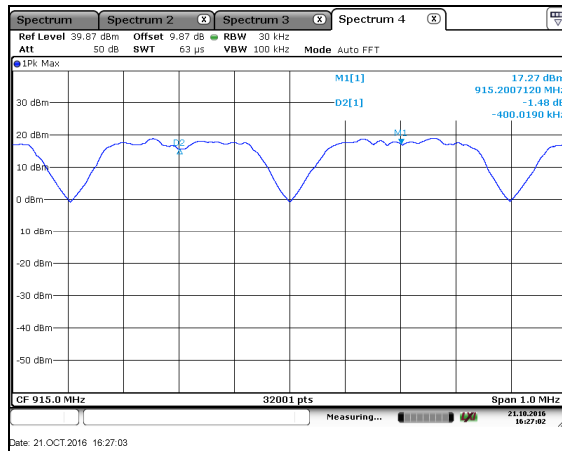


Figure 7.4.1.2-3: Freq. Separation – OFDM – 200kbps

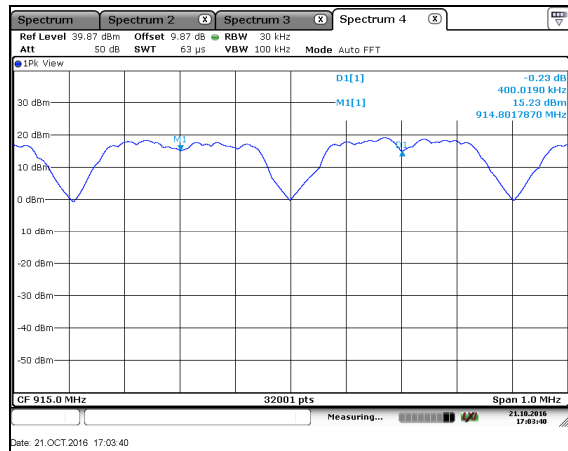


Figure 7.4.1.2-4: Freq. Separation – OFDM – 600kbps

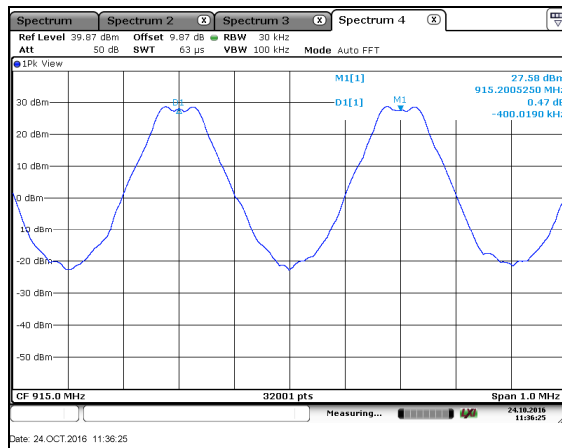


Figure 7.4.1.2-5: Freq. Separation – DSSS – 6.25kbps

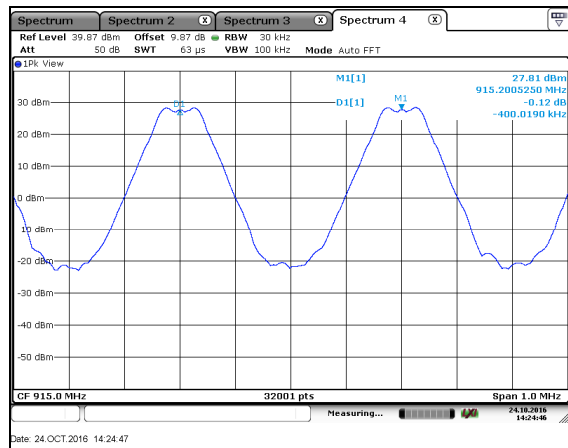


Figure 7.4.1.2-6: Freq. Separation – DSSS – 12.5kbps

7.4.2 Number of Hopping Channels – FCC 15.247(a)(1)(i) ISED Canada: RSS-247 5.1(3)**7.4.2.1 Measurement Procedure**

The RF output port of the EUT was directly connected to the input of the spectrum analyzer using suitable attenuation. The span of the spectrum analyzer was set wide enough to capture the frequency band of operation. The RBW was set to < 30% of the channel spacing and VBW set to $\geq$ RBW.

7.4.2.2 Measurement Results

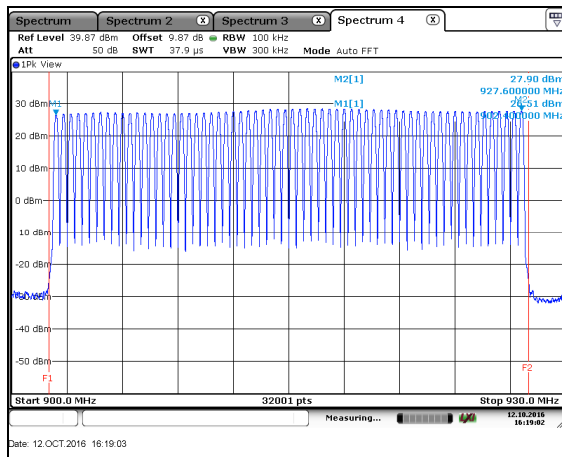


Figure 7.4.2.2-1: No. of Hopping Ch – FSK – 50kbps

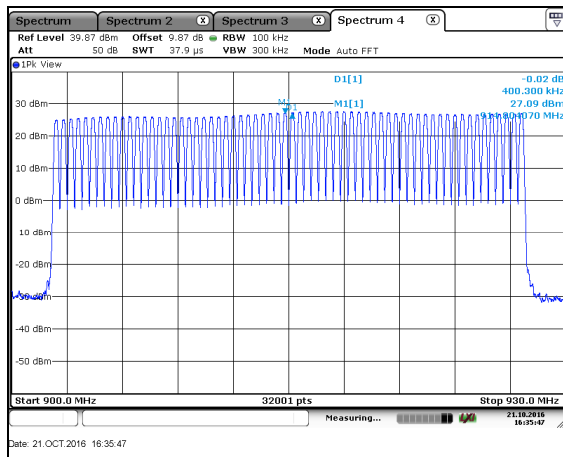


Figure 7.4.2.2-2: No. of Hopping Ch – FSK – 150kbps

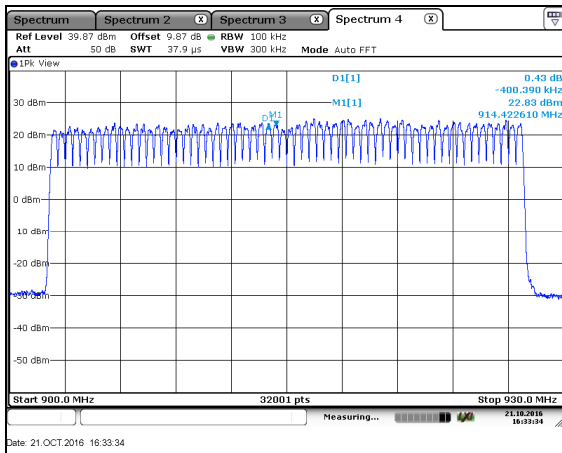


Figure 7.4.2.2-3: No. of Hopping Ch – OFDM – 200kbps

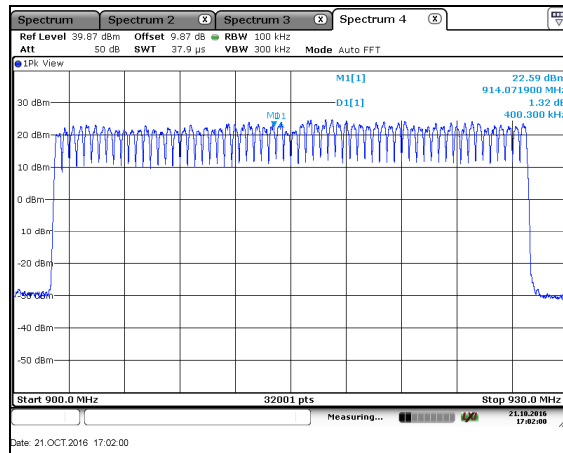


Figure 7.4.2.2-4: No. of Hopping Ch – OFDM – 600kbps

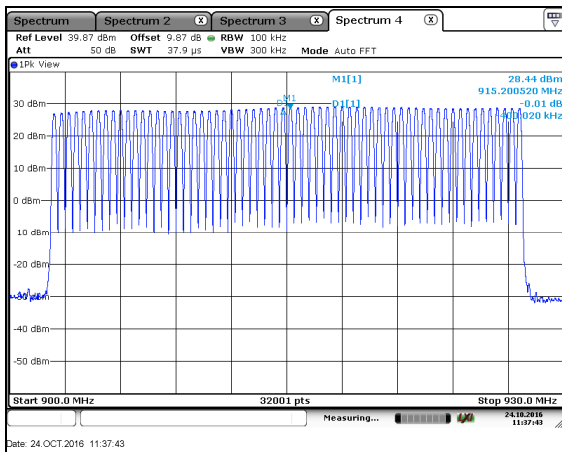


Figure 7.4.2.2-5: No. of Hopping Ch – DSSS – 6.25kbps

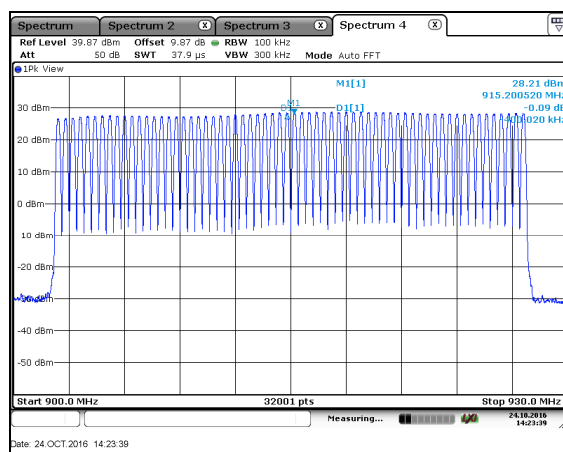


Figure 7.4.2.2-6: No. of Hopping Ch – DSSS – 12.5kbps

7.4.3 Channel Dwell Time – FCC 15.247(a)(1)(i) ISED Canada: RSS-247 5.1(3)

7.4.3.1 Measurement Procedure

The EUT was not capable of producing a worst case channel dwell time. A detailed analysis of the channel dwell time is available in the Theory of Operations accompanying this report.

7.4.4 20dB / 99% Bandwidth - FCC 15.247(a)(1)(i) ISCED Canada: RSS-247 5.1(3)**7.4.4.1 Measurement Procedure**

The RF output port of the EUT was directly connected to the input of the spectrum analyzer using suitable attenuation. The span of the spectrum analyzer display was set between two times and five times the occupied bandwidth (OBW) of the emission. The RBW of the spectrum analyzer was set to approximately 1 % to 5 % of the OBW. The trace was set to max hold with a peak detector active. The marker delta and ndB down measurement functions of the analyzer were utilized to determine the 20 dB bandwidth of the emission.

The occupied bandwidth measurement function of the spectrum analyzer was used to measure the 99% bandwidth. The span of the analyzer was set to capture all products of the modulation process, including the emission sidebands. The resolution bandwidth was set to 1% to 5% of the occupied bandwidth. The video bandwidth was set to 3 times the resolution bandwidth. A peak detector was used.

7.4.4.2 Measurement Results**Table 7.4.4.2-1: 20dB / 99% Bandwidth**

Frequency [MHz]	20dB Bandwidth [kHz]	99% Bandwidth [kHz]	Modulation Format	Data Rate [kbps]
902.4	91.29	86.30	FSK	50
915.2	91.44	85.68	FSK	50
927.6	92.10	85.89	FSK	50
902.4	177.60	153.62	FSK	150
915.2	177.62	154.93	FSK	150
927.6	176.84	154.45	FSK	150
902.4	364.68	301.02	OFDM	200
915.2	366.86	301.99	OFDM	200
927.6	352.36	301.71	OFDM	200
902.4	357.43	300.80	OFDM	600
915.2	351.71	302.52	OFDM	600
927.6	360.21	300.68	OFDM	600
902.4	127.14	111.03	DSSS	6.25
915.2	127.43	110.45	DSSS	6.25
927.6	129.48	110.92	DSSS	6.25
902.4	129.07	112.29	DSSS	12.5
915.2	129.04	111.92	DSSS	12.5
927.6	127.72	111.57	DSSS	12.5

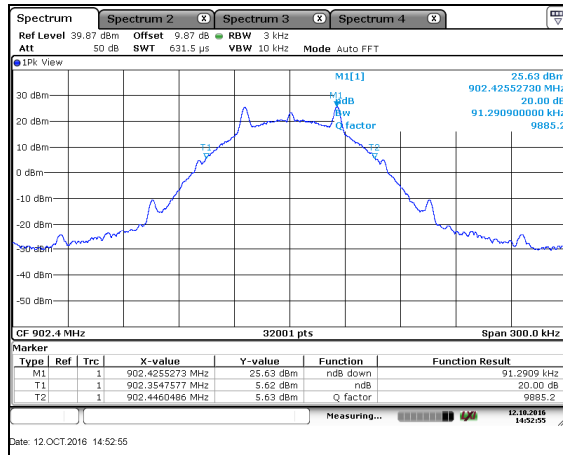


Figure 7.4.4.2-1: 20dB BW Low Ch - FSK - 50kbps

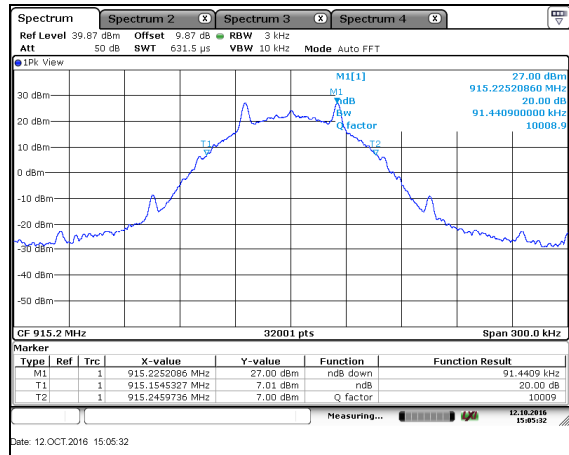


Figure 7.4.4.2-2: 20dB BW Mid Ch - FSK - 50kbps

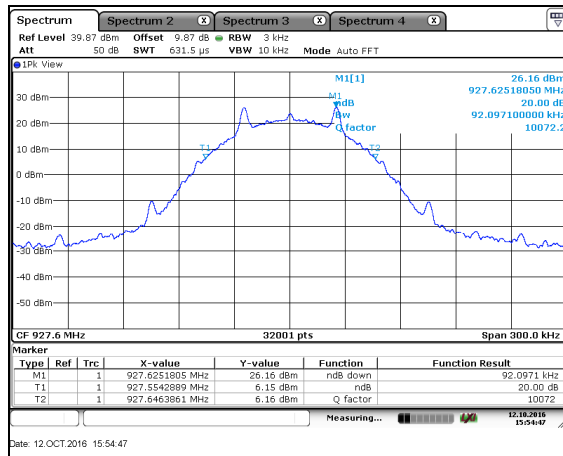


Figure 7.4.4.2-3: 20dB BW High Ch - FSK - 50kbps

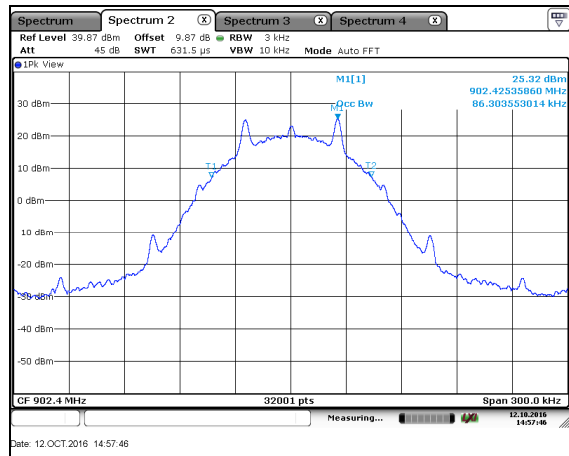


Figure 7.4.4.2-4: 99% BW Low Ch - FSK - 50kbps

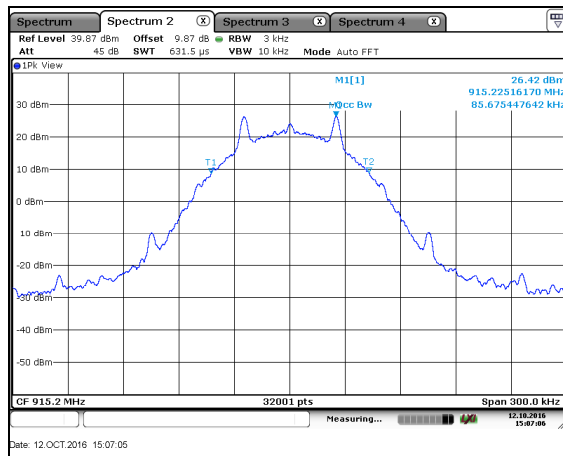


Figure 7.4.4.2-5: 99% BW Mid Ch - FSK - 50kbps

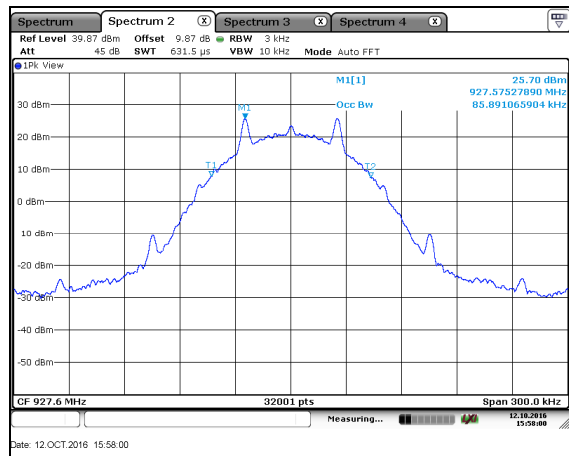


Figure 7.4.4.2-6: 99% BW High Ch - FSK - 50kbps

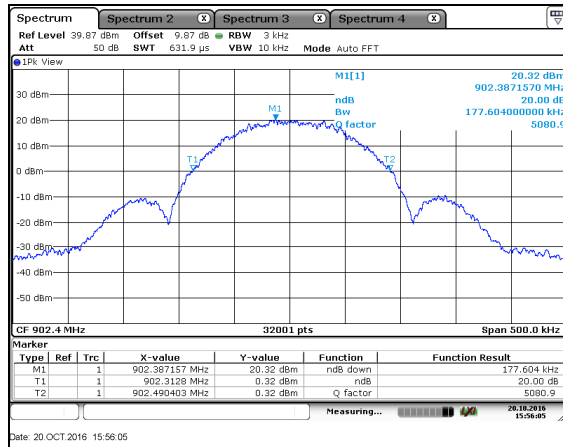


Figure 7.4.4.2-7: 20dB BW Low Ch - FSK - 150kbps

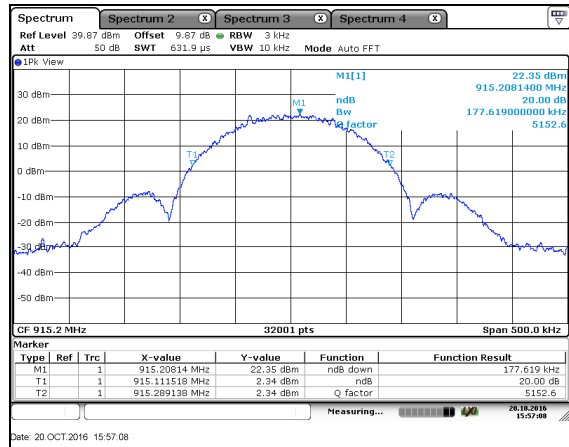


Figure 7.4.4.2-8: 20dB BW Mid Ch - FSK - 150kbps

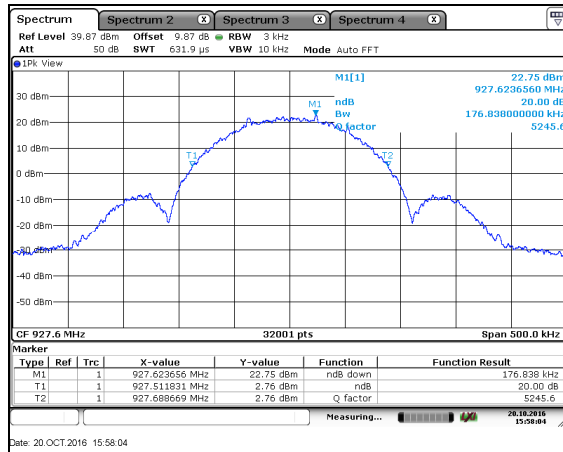


Figure 7.4.4.2-9: 20dB BW High Ch - FSK - 150kbps

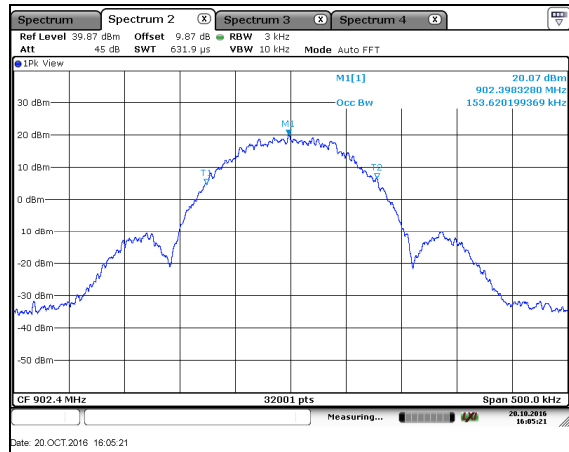


Figure 7.4.4.2-10: 99% BW Low Ch - FSK - 150kbps

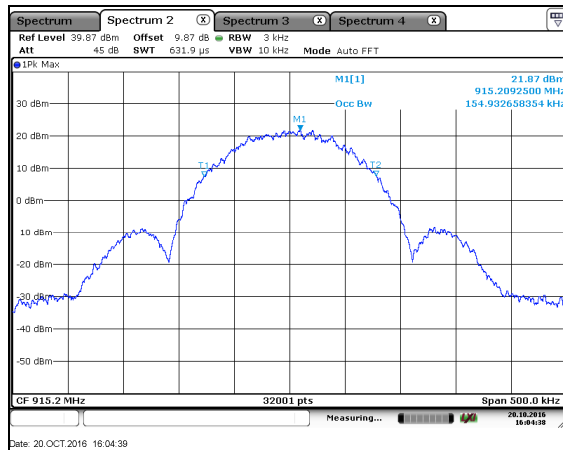


Figure 7.4.4.2-11: 99% BW Mid Ch - FSK - 150kbps

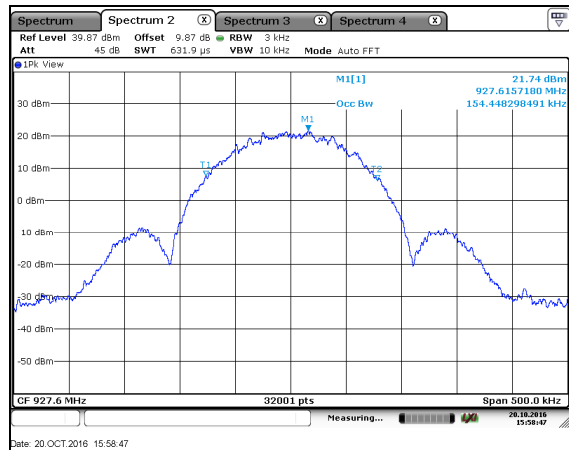


Figure 7.4.4.2-12: 99% BW High Ch - FSK - 150kbps

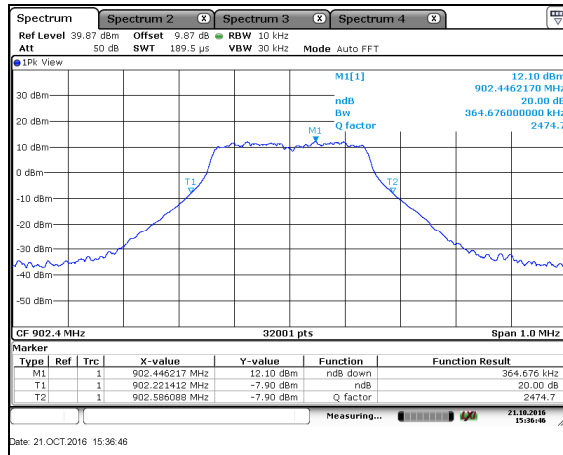


Figure 7.4.4.2-13: 20dB BW Low Ch – OFDM – 200kbps

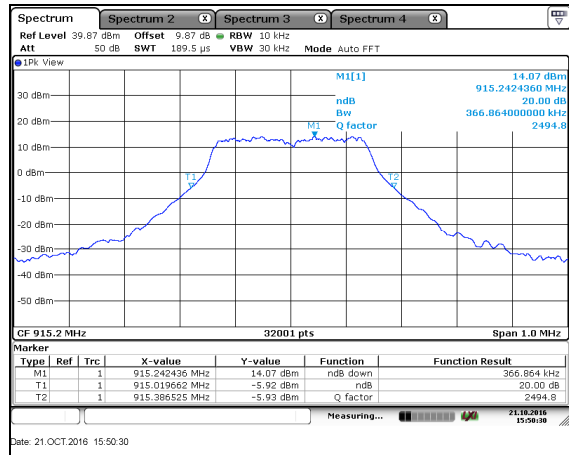


Figure 7.4.4.2-14: 20dB BW Mid Ch – OFDM – 200kbps

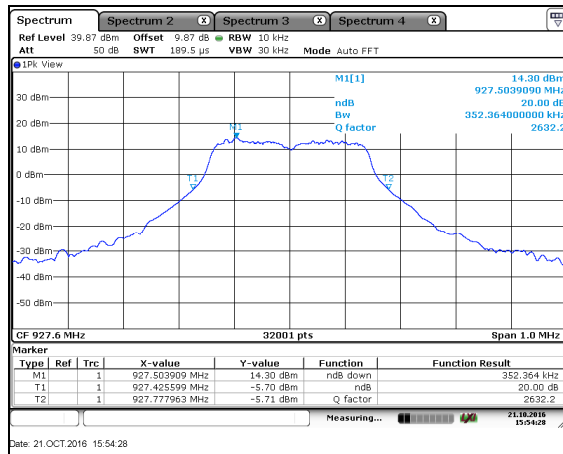


Figure 7.4.4.2-15: 20dB BW High Ch – OFDM – 200kbps

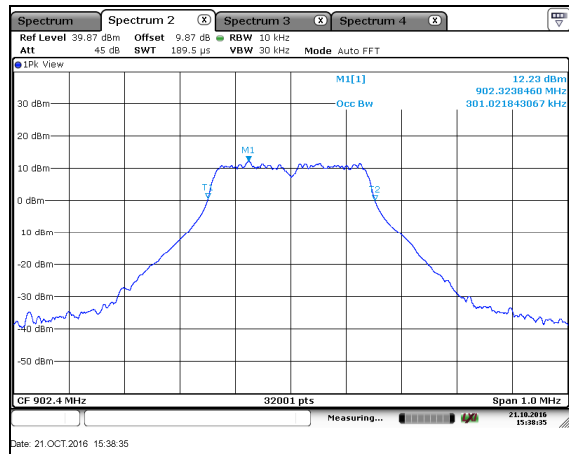


Figure 7.4.4.2-16: 99% BW Low Ch – OFDM – 200kbps

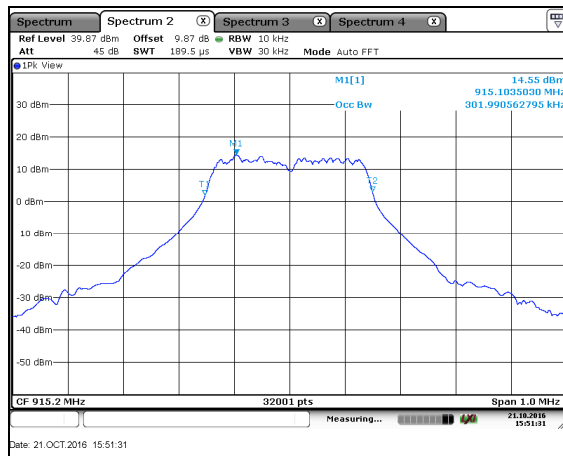


Figure 7.4.4.2-17: 99% BW Mid Ch – OFDM – 200kbps

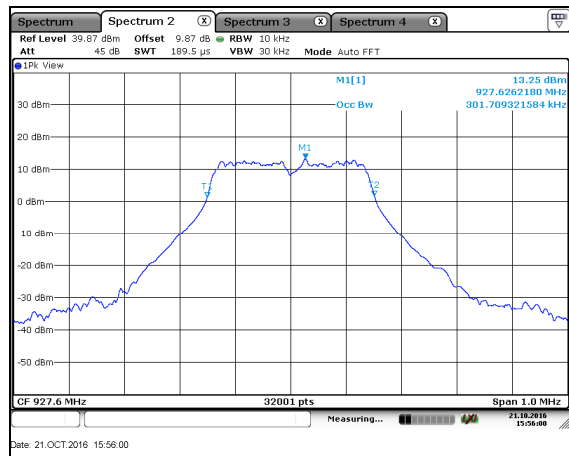


Figure 7.4.4.2-18: 99% BW High Ch – OFDM – 200kbps

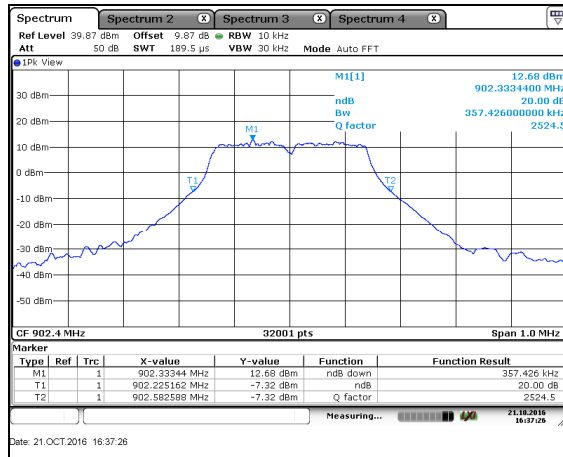


Figure 7.4.4.2-19: 20dB BW Low Ch – OFDM – 600kbps

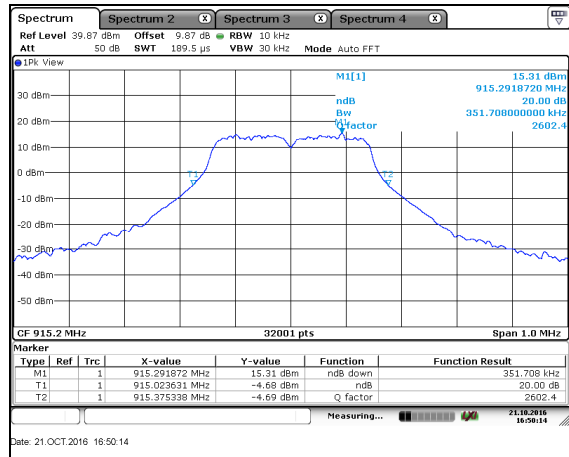


Figure 7.4.4.2-20: 20dB BW Mid Ch – OFDM – 600kbps

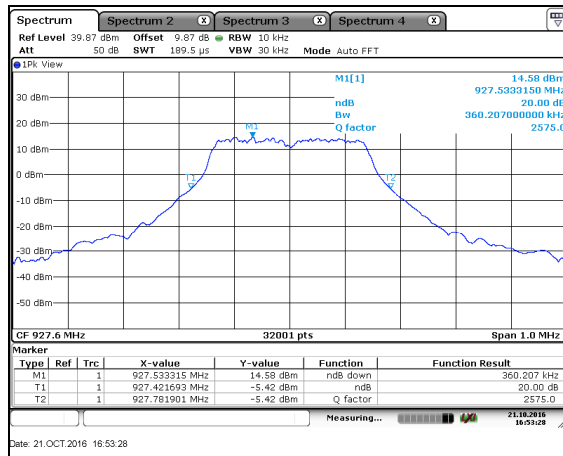


Figure 7.4.4.2-21: 20dB BW High Ch – OFDM – 600kbps

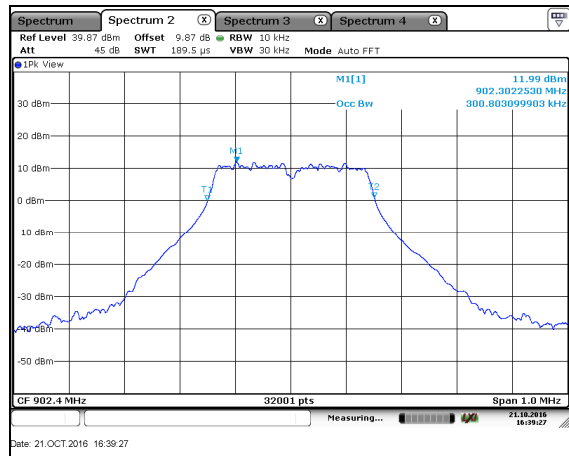


Figure 7.4.4.2-22: 99% BW Low Ch – OFDM – 600kbps

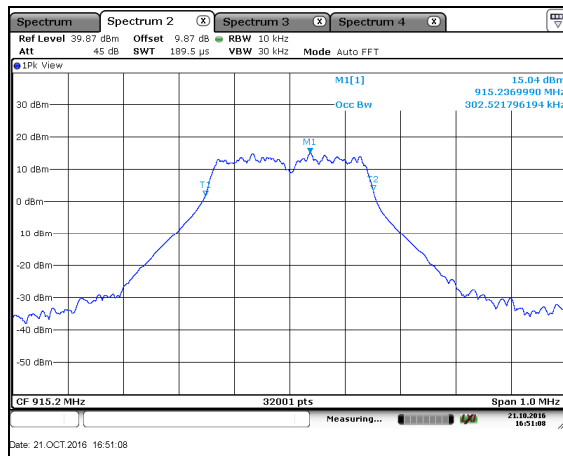


Figure 7.4.4.2-23: 99% BW Mid Ch – OFDM – 600kbps

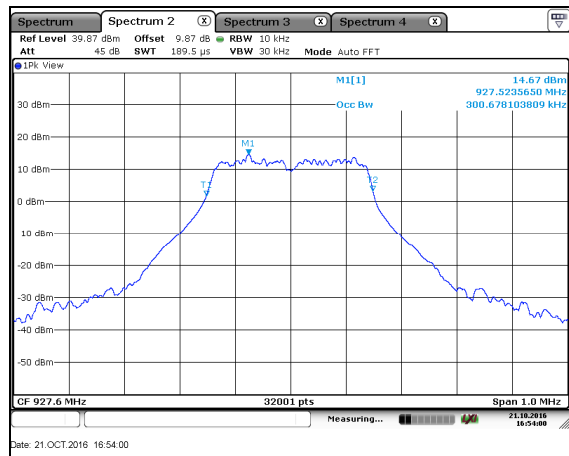


Figure 7.4.4.2-24: 99% BW High Ch – OFDM – 600kbps

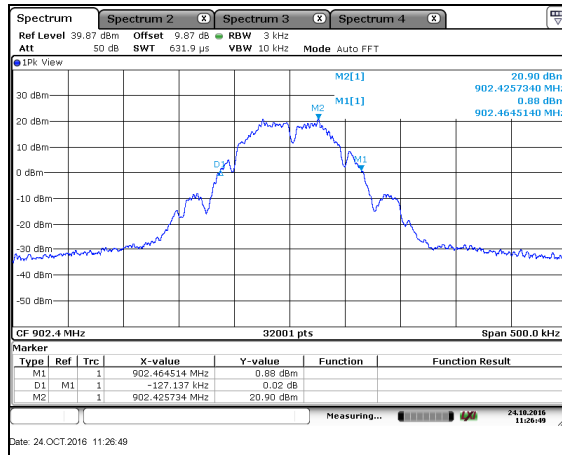


Figure 7.4.4.2-25: 20dB BW Low Ch – DSSS – 6.25kbps

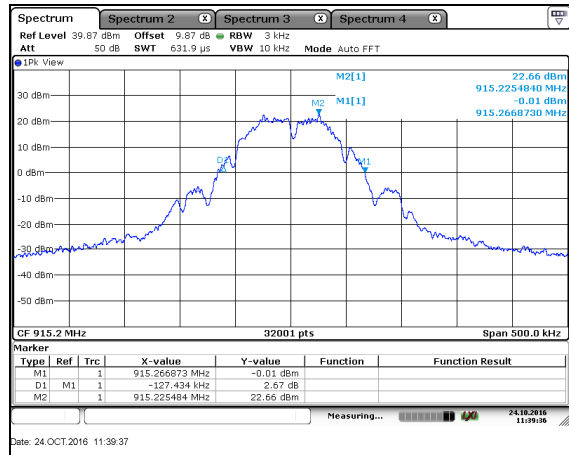


Figure 7.4.4.2-26: 20dB BW Mid Ch – DSSS – 6.25kbps

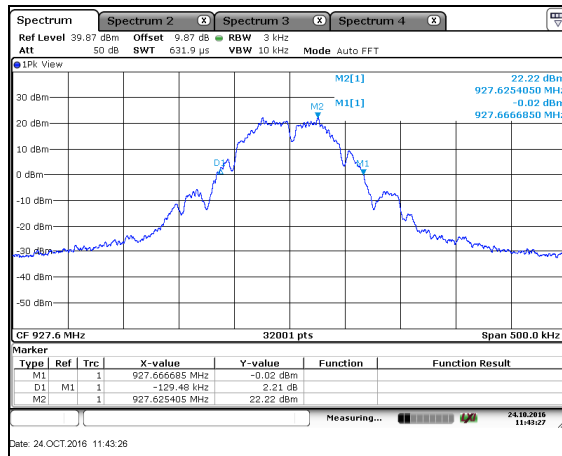


Figure 7.4.4.2-27: 20dB BW High Ch – DSSS – 6.25kbps

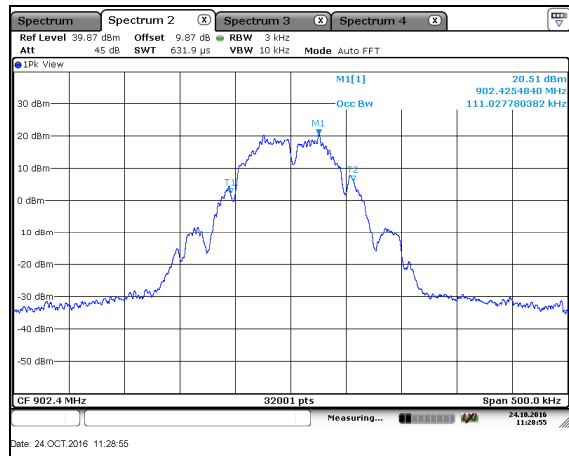


Figure 7.4.4.2-28: 99% BW Low Ch – DSSS – 6.25kbps

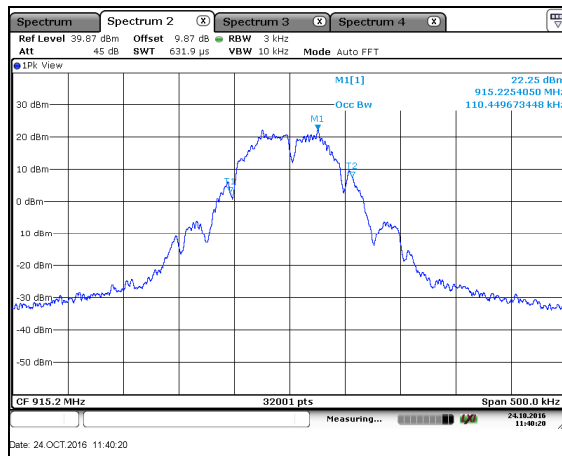


Figure 7.4.4.2-29: 99% BW Mid Ch – DSSS – 6.25kbps

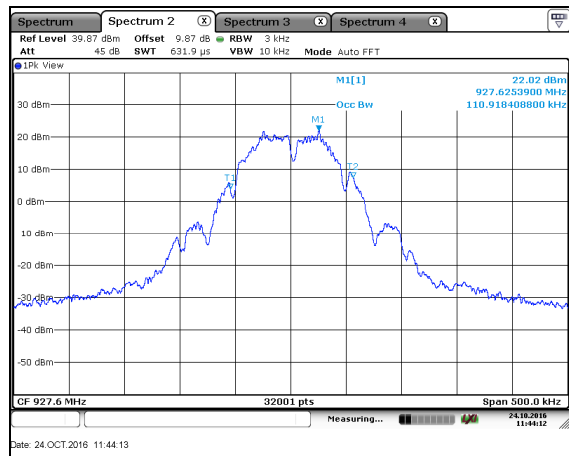


Figure 7.4.4.2-30: 99% BW High Ch – DSSS – 6.25kbps

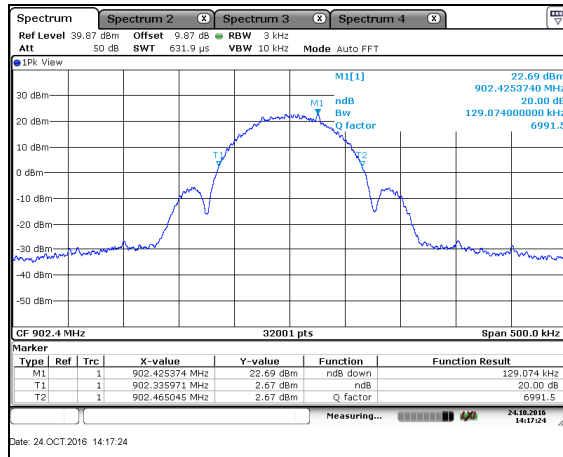


Figure 7.4.4.2-31: 20dB BW Low Ch – DSSS – 12.5kbps

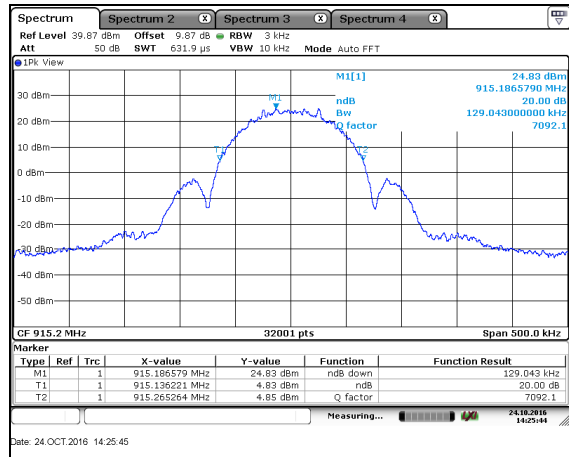


Figure 7.4.4.2-32: 20dB BW Mid Ch – DSSS – 12.5kbps

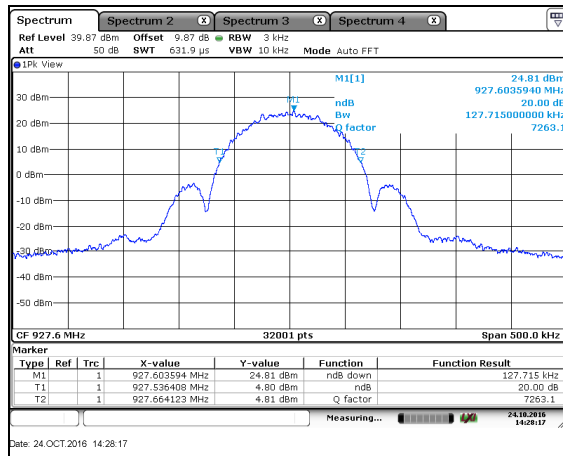


Figure 7.4.4.2-33: 20dB BW High Ch – DSSS – 12.5kbps

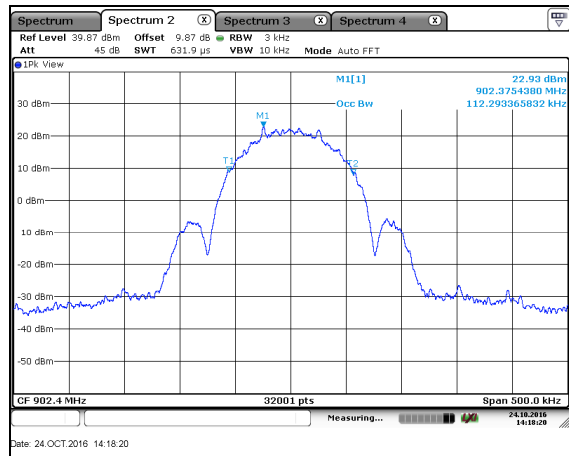


Figure 7.4.4.2-34: 99% BW Low Ch – DSSS – 12.5kbps

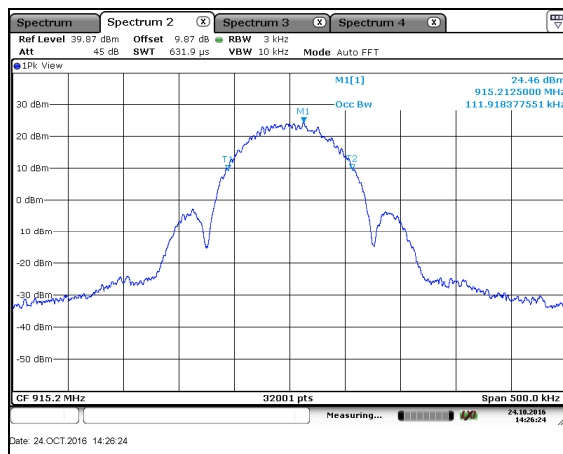


Figure 7.4.4.2-35: 99% BW Mid Ch – DSSS – 12.5kbps

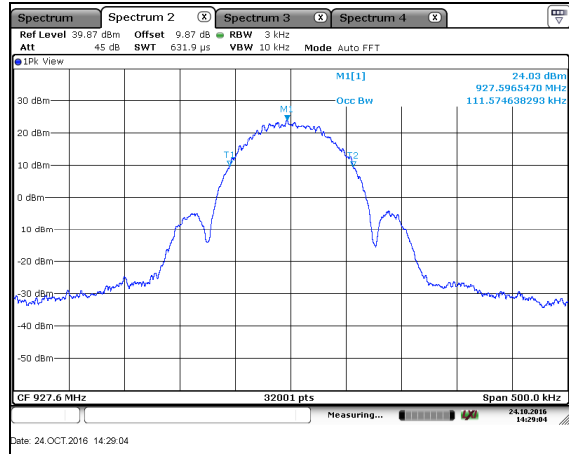


Figure 7.4.4.2-36: 99% BW High Ch – DSSS – 12.5kbps

7.5 Band-Edge Compliance and Spurious Emissions

7.5.1 Band-Edge Compliance of RF Conducted Emissions - FCC 15.247(d); ISED Canada RSS-247 5.5

7.5.1.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer using suitable attenuation. The EUT was investigated at the lowest and highest channel available to determine band-edge compliance. For each measurement the spectrum analyzer's RBW was set to 100 kHz, and the VBW was set to 300 kHz.

7.5.1.2 Measurement Results

NON-HOPPING MODE:

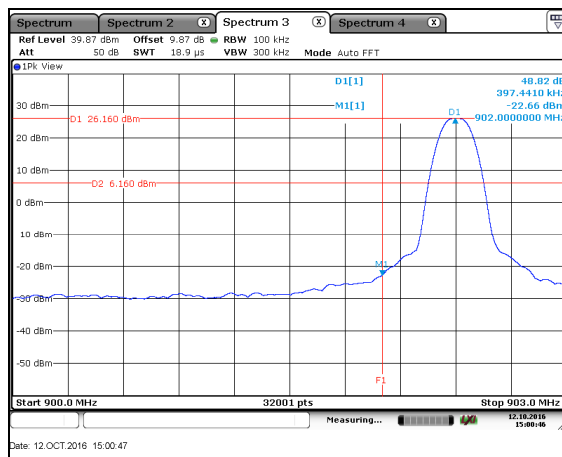


Figure 7.5.1.2-1: Lower BE – FSK – 50kbps

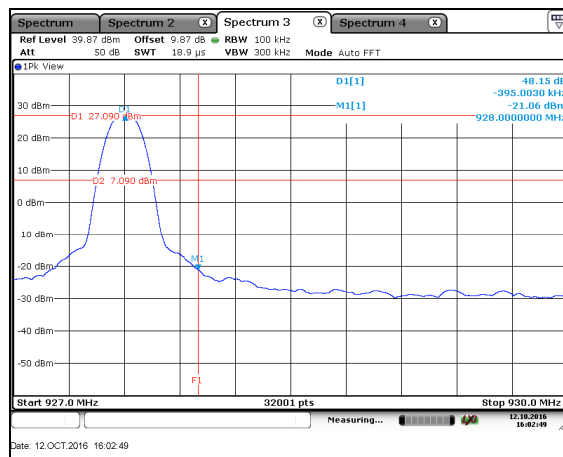


Figure 7.5.1.2-2: Upper BE – FSK – 50kbps

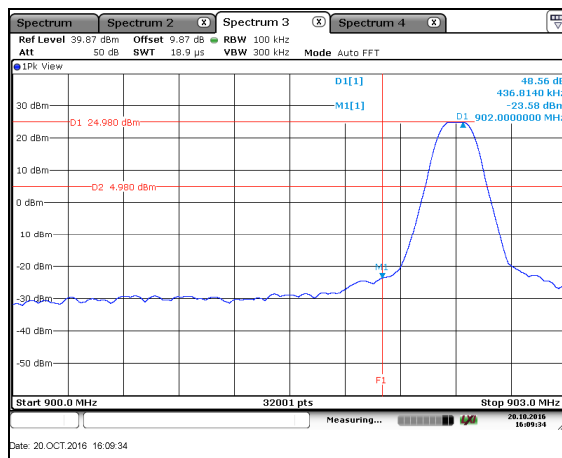


Figure 7.5.1.2-3: Lower BE – FSK – 150kbps

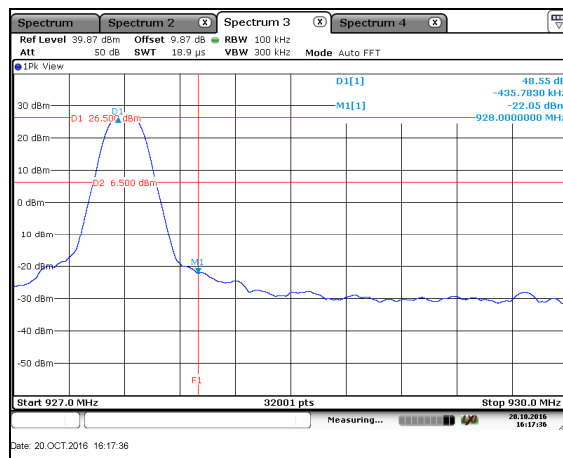
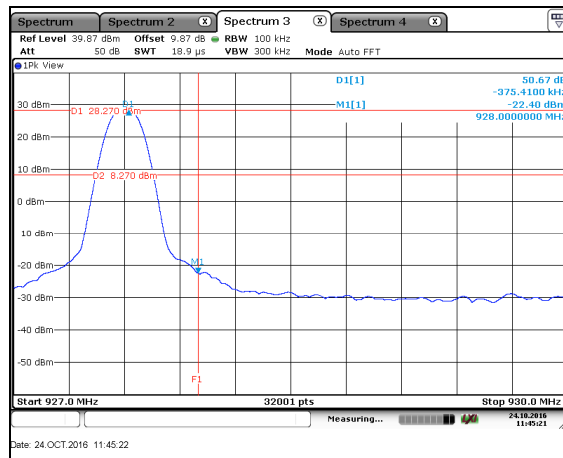
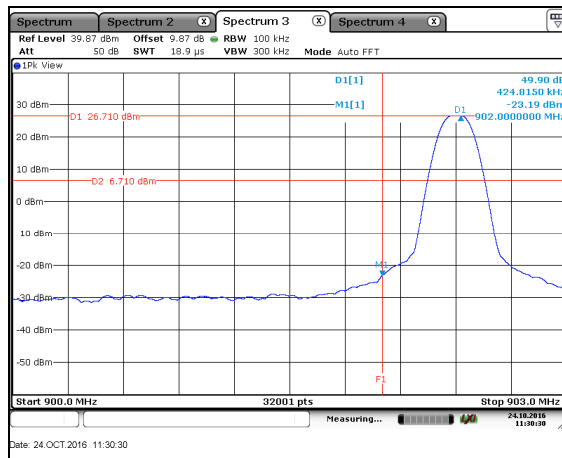
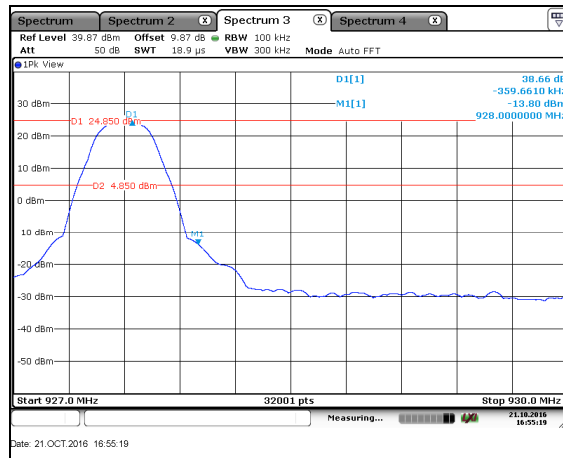
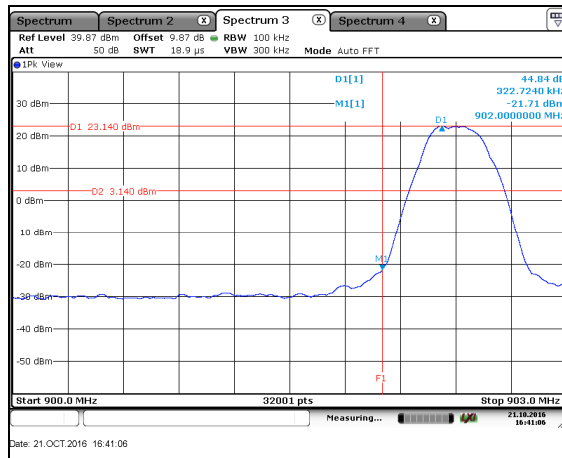
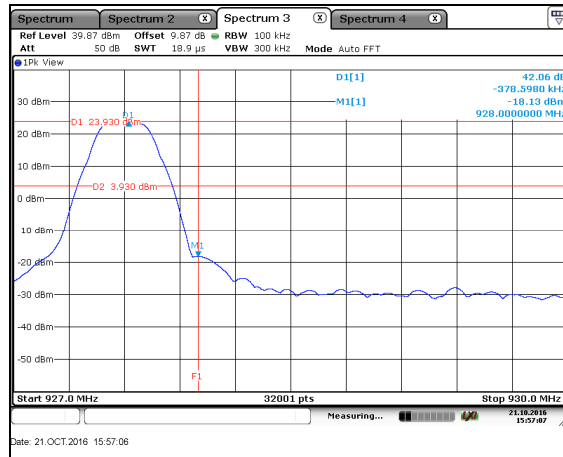
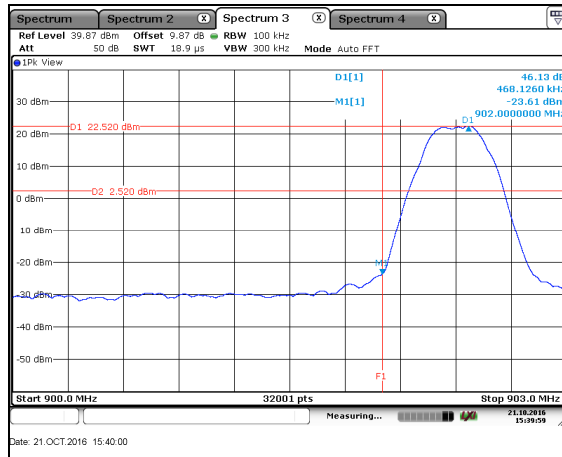


Figure 7.5.1.2-4: Upper BE – FSK – 150kbps



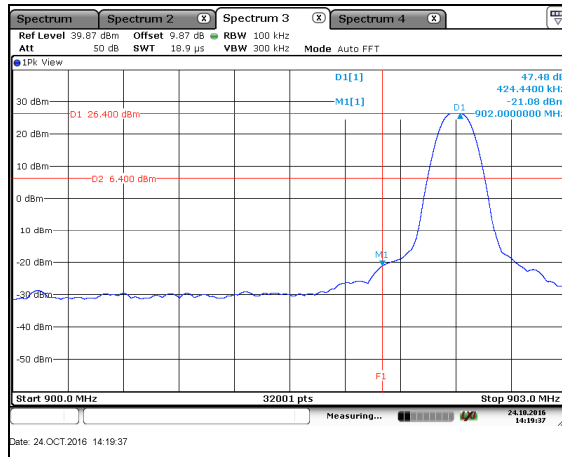


Figure 7.5.1.2-11: Lower BE – DSSS – 12.5kbps

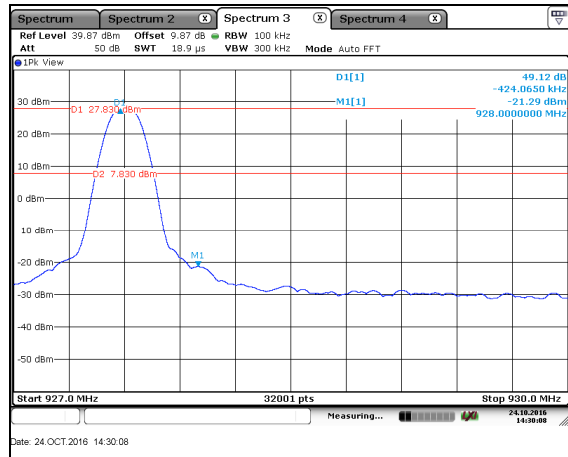


Figure 7.5.1.2-12: Upper BE – DSSS – 12.5kbps

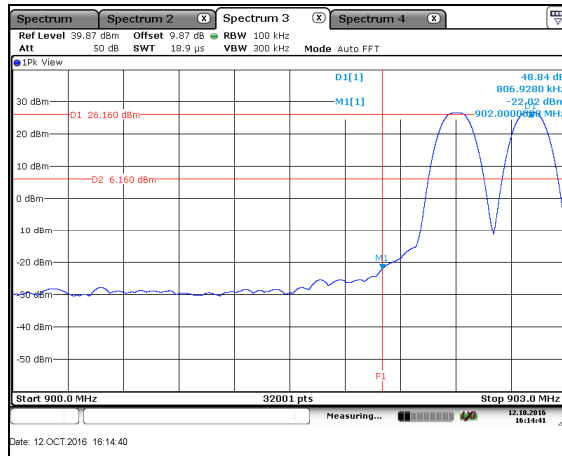
HOPPING MODE:

Figure 7.5.1.2-13: Lower BE Hop – FSK – 50kbps

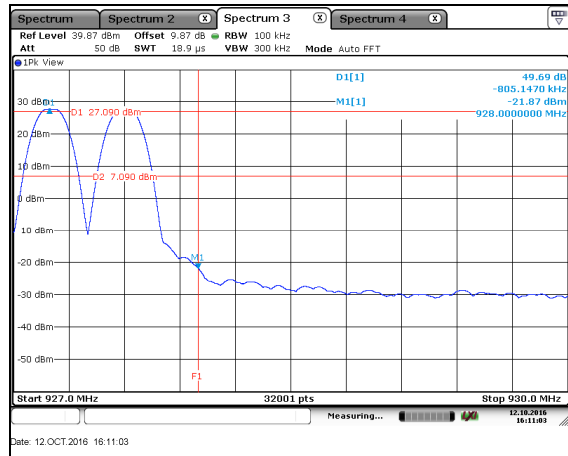


Figure 7.5.1.2-14: Upper BE Hop – FSK – 50kbps

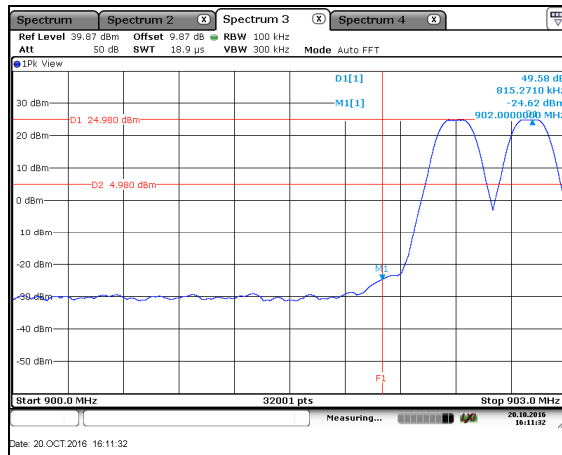


Figure 7.5.1.2-15: Lower BE Hop – FSK – 150kbps

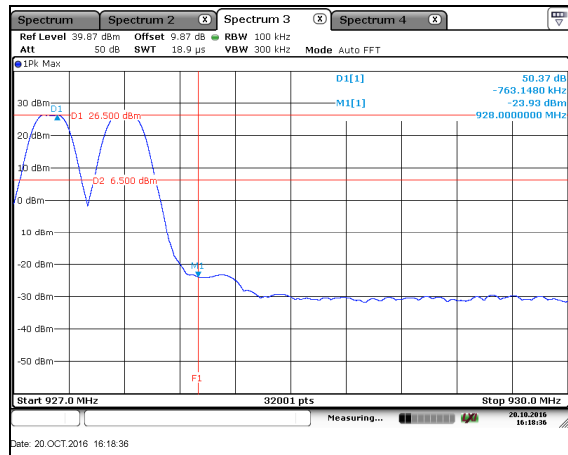
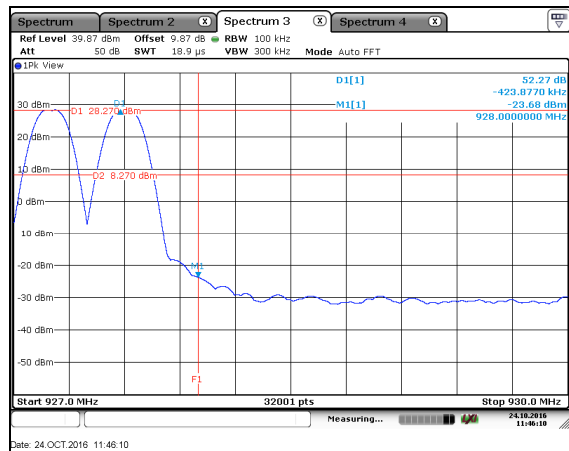
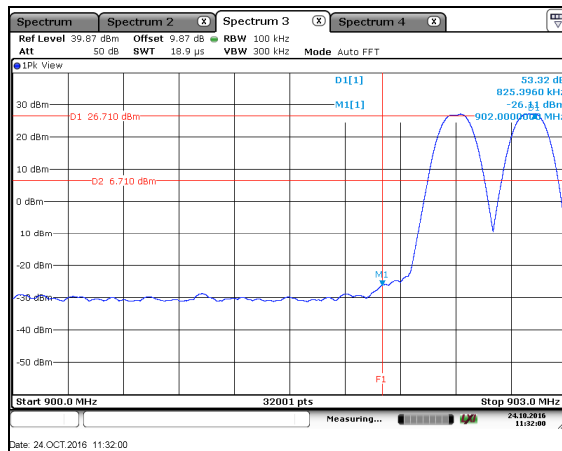
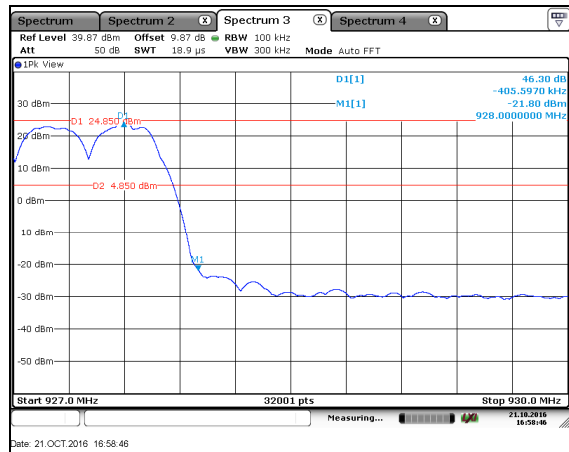
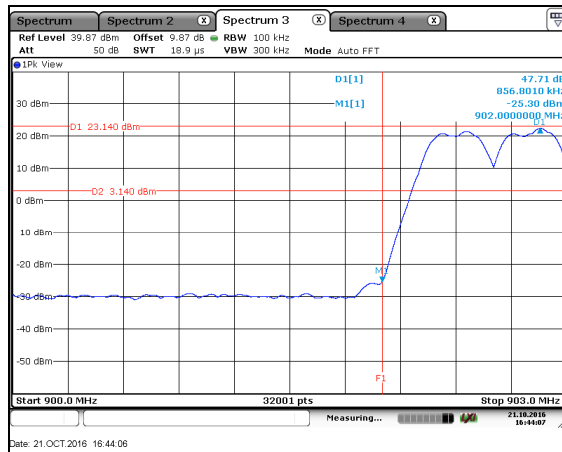
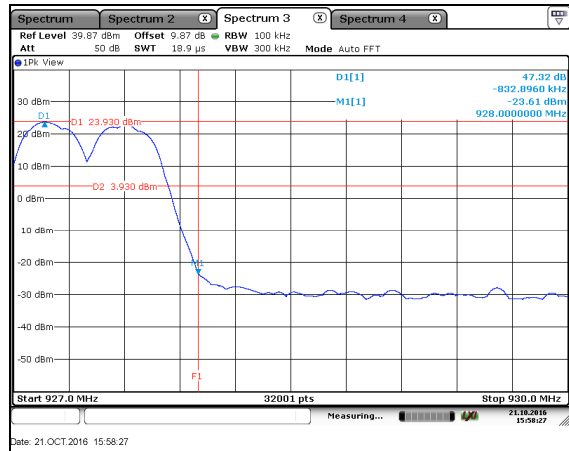
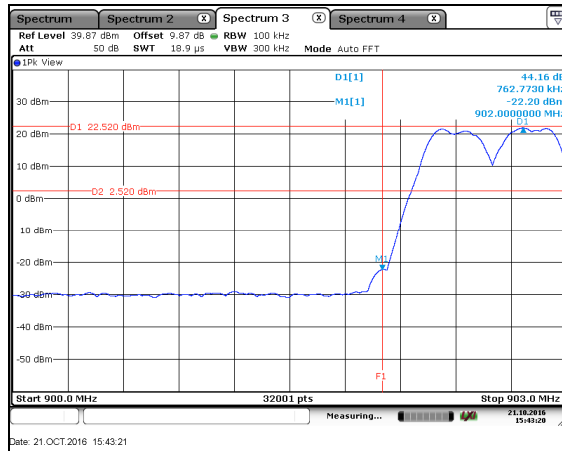


Figure 7.5.1.2-16: Upper BE Hop – FSK – 150kbps



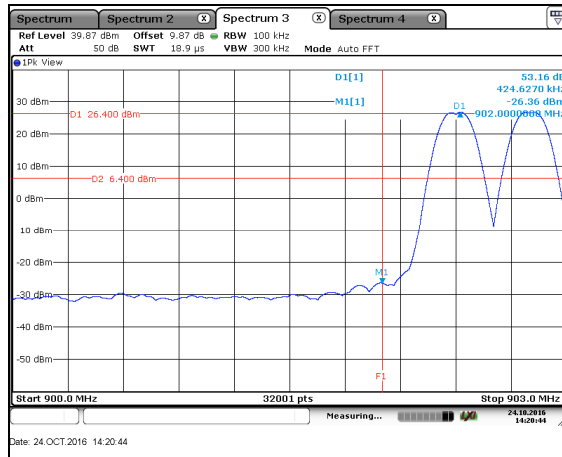


Figure 7.5.1.2-23: Lower BE Hop – DSSS – 12.5kbps

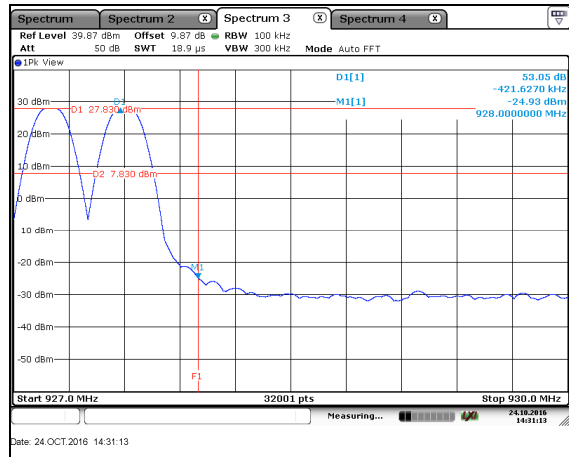


Figure 7.5.1.2-24: Upper BE Hop – DSSS – 12.5kbps

7.5.2 RF Conducted Spurious Emissions - FCC 15.247(d); ISED Canada RSS-247 5.5

7.5.2.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer using suitable attenuation. The EUT was investigated for conducted spurious emissions from 30MHz to 10GHz, 10 times the highest fundamental frequency. Measurements were made at the low, center and high channels of the EUT. For each measurement, the spectrum analyzer's RBW was set to 100kHz. A peak detector function was used with the trace set to max hold.

7.5.2.2 Measurement Results

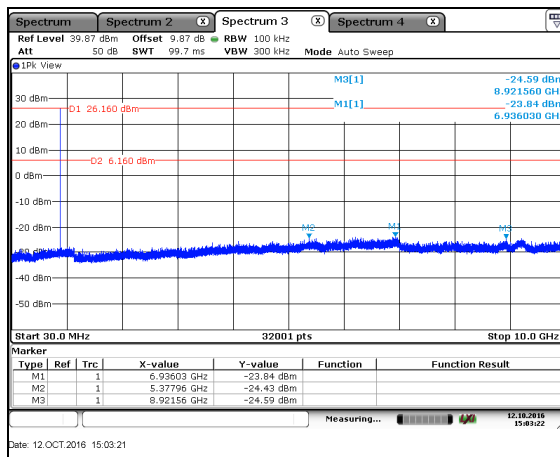


Figure 7.5.2.2-1: CE - FSK - 50kbps - LCH

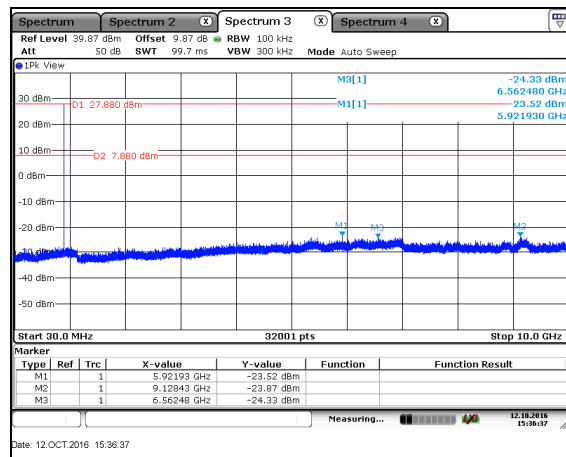


Figure 7.5.2.2-2: CE - FSK - 50kbps - MCH

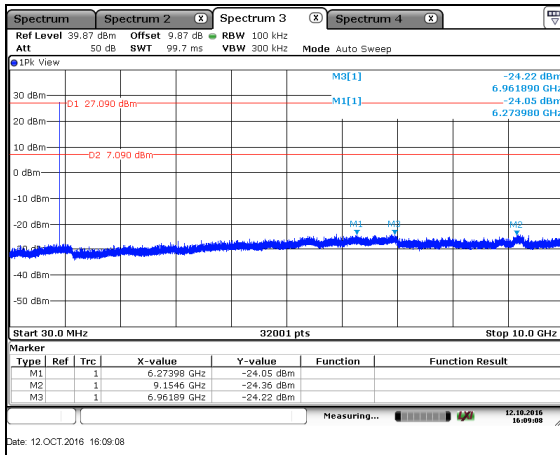


Figure 7.5.2.2-3: CE - FSK - 50kbps - HCH

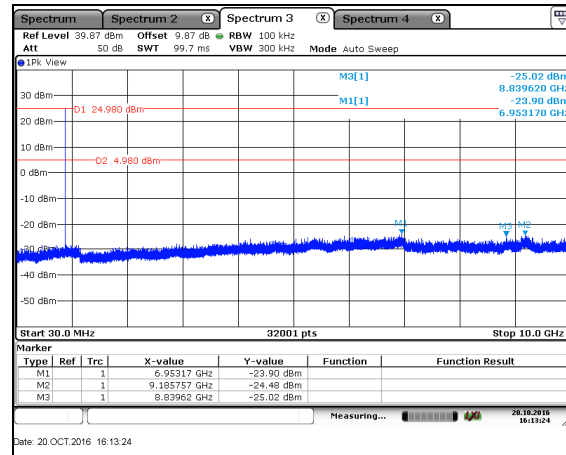


Figure 7.5.2.2-4: CE - FSK - 150kbps - LCH

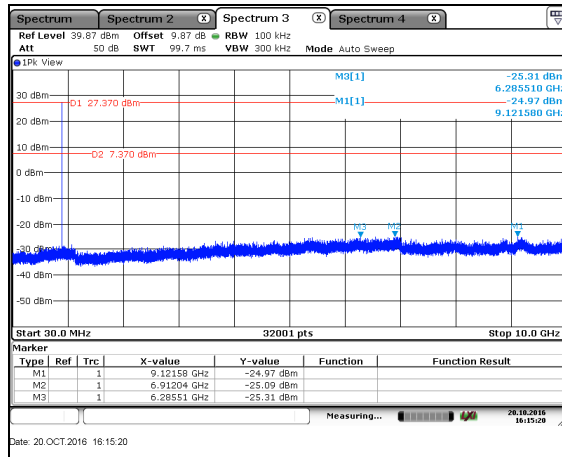


Figure 7.5.2.2-5: CE - FSK - 150kbps - MCH

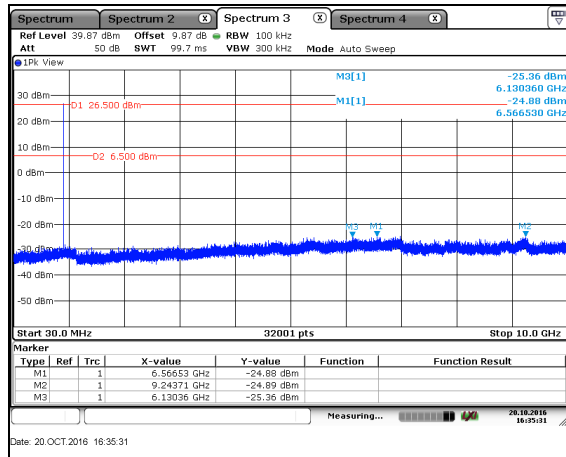


Figure 7.5.2.2-6: CE - FSK - 150kbps - HCH

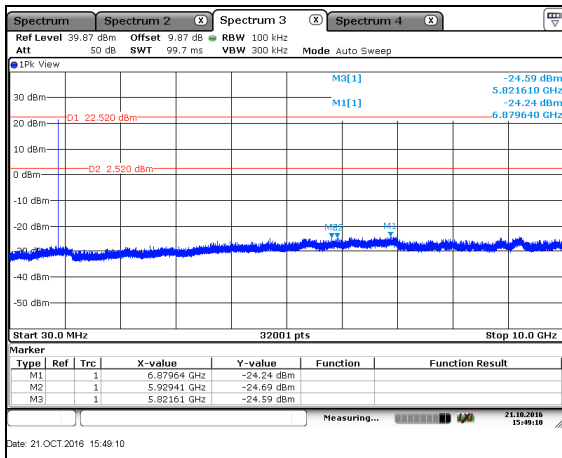


Figure 7.5.2.2-7: CE - OFDM - 200kbps - LCH

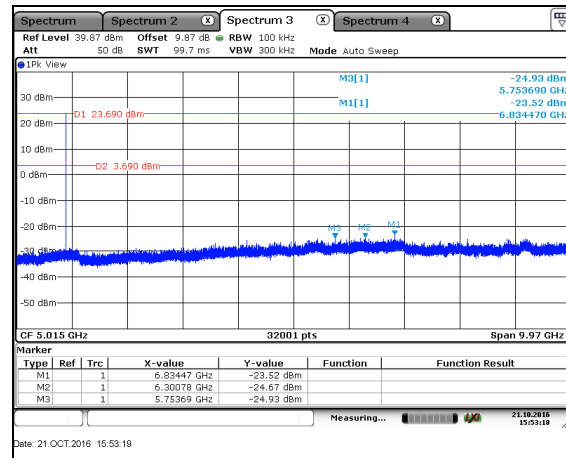


Figure 7.5.2.2-8: CE - OFDM - 200kbps - MCH

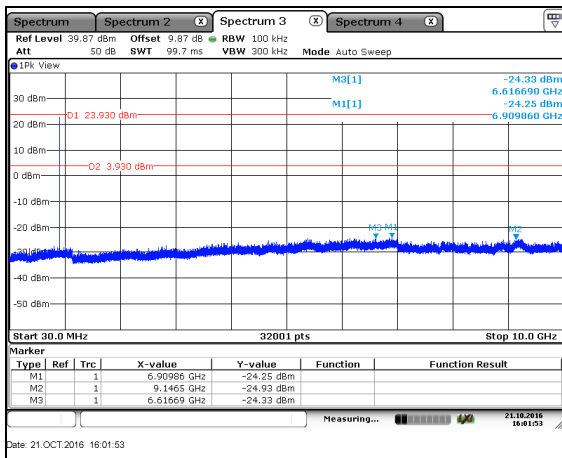


Figure 7.5.2.2-9: CE - OFDM - 200kbps - HCH

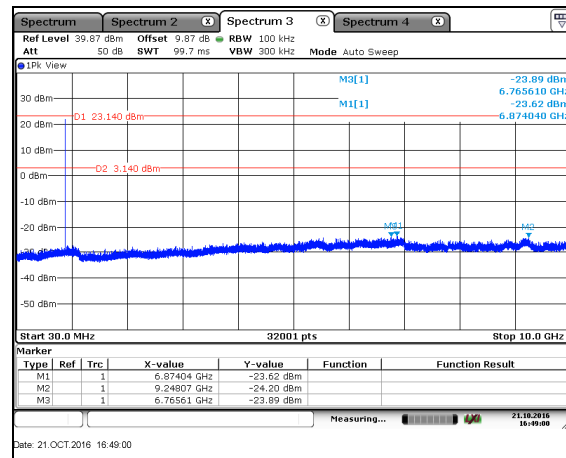


Figure 7.5.2.2-10: CE - OFDM - 600kbps - LCH

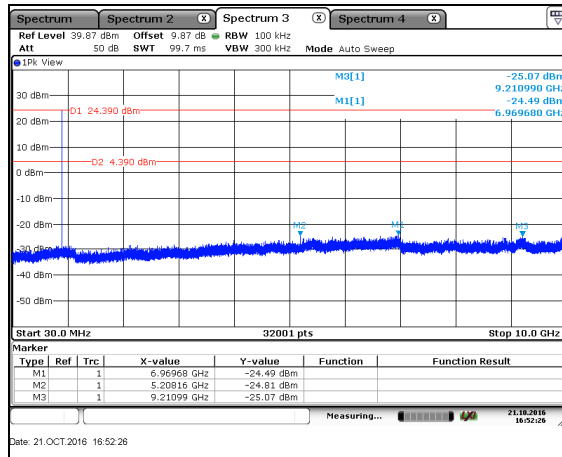


Figure 7.5.2.2-11: CE – OFDM – 600kbps – MCH

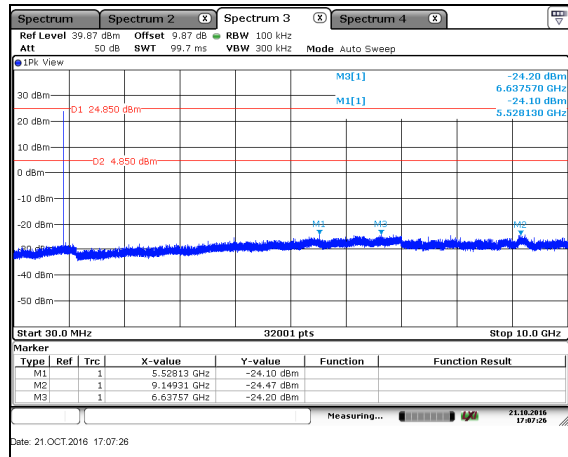


Figure 7.5.2.2-12: CE – OFDM – 600kbps – HCH

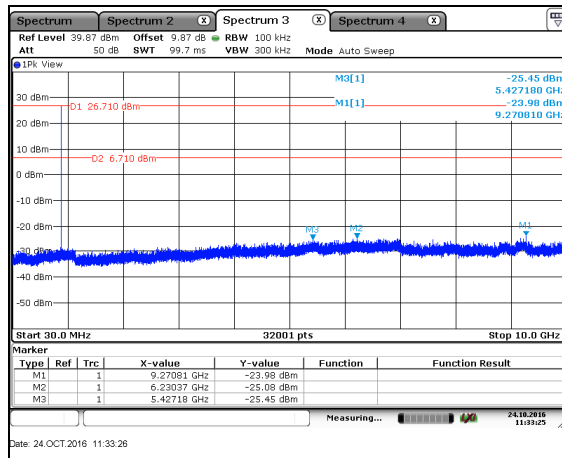


Figure 7.5.2.2-13: CE – DSSS – 6.25kbps – LCH

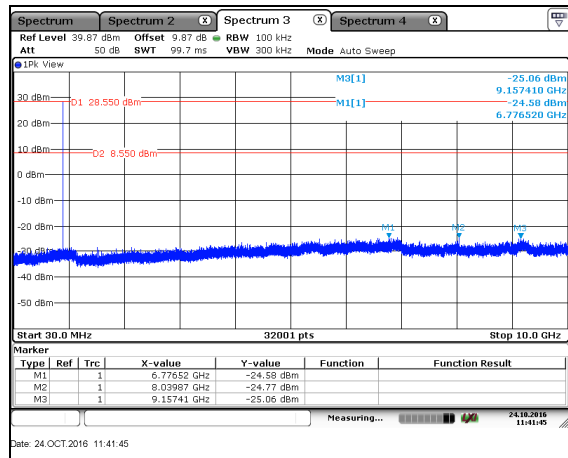


Figure 7.5.2.2-14: CE – DSSS – 6.25kbps – MCH

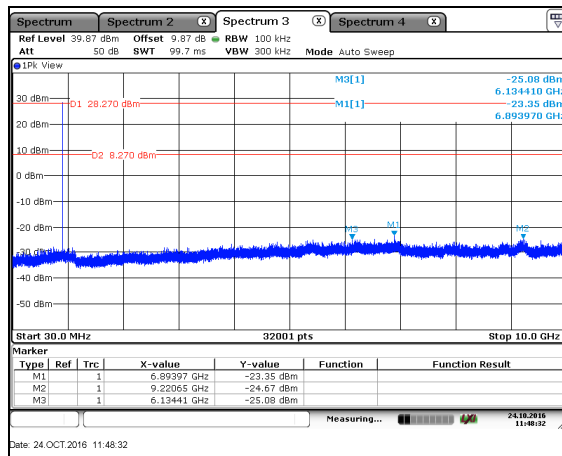


Figure 7.5.2.2-15: CE – DSSS – 6.25kbps – HCH

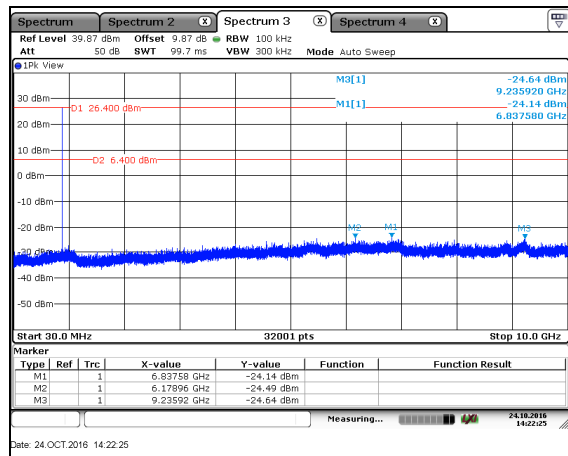


Figure 7.5.2.2-16: CE – DSSS – 12.5kbps – LCH

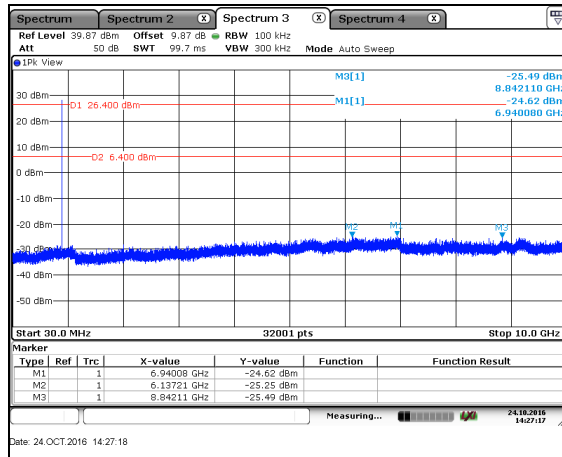


Figure 7.5.2.2-17: CE – DSSS – 12.5kbps – MCH

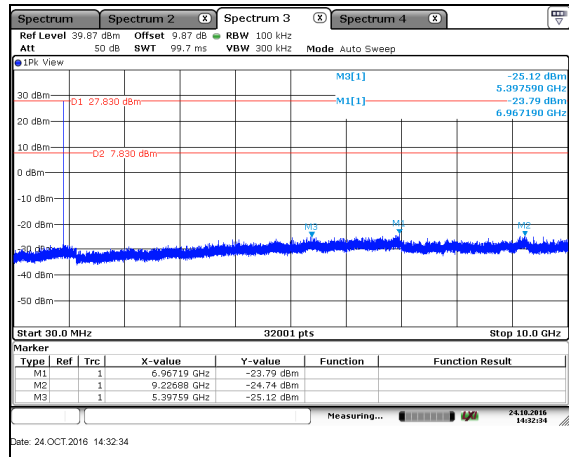


Figure 7.5.2.2-18: CE – DSSS – 12.5kbps – HCH

7.5.3 Radiated Spurious Emissions - FCC 15.205, 15.209;ISED Canada RSS-Gen 8.9/8.10

7.5.3.1 Measurement Procedure

Radiated emissions tests were made over the frequency range of 30MHz to 10GHz, 10 times the highest fundamental frequency.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 120 kHz and a video bandwidth VBW of 300 kHz. For frequencies above 1000MHz, peak and average measurements were made with RBW and VBW of 1 MHz and 3MHz respectively.

The EUT was caused to generate a continuous modulated carrier on the hopping channel.

Each emission found to be in a restricted band was compared to the applicable radiated emission limits.

7.5.3.2 Measurement Results

Table 7.5.3.2-1: Radiated Spurious Emissions Tabulated Data – FSK Modulation

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Low Channel										
2707.2	51.80	43.90	H	-4.07	47.73	39.83	74.0	54.0	26.3	14.2
2707.2	54.20	49.20	V	-4.07	50.13	45.13	74.0	54.0	23.9	8.9
3609.6	49.20	37.30	H	-1.19	48.01	36.11	74.0	54.0	26.0	17.9
3609.6	49.70	38.20	V	-1.19	48.51	37.01	74.0	54.0	25.5	17.0
4512	50.30	39.90	H	0.46	50.76	40.36	74.0	54.0	23.2	13.6
4512	51.30	43.40	V	0.46	51.76	43.86	74.0	54.0	22.2	10.1
5414.4	48.30	35.20	H	3.28	51.58	38.48	74.0	54.0	22.4	15.5
5414.4	48.90	36.80	V	3.28	52.18	40.08	74.0	54.0	21.8	13.9
8121.6	47.70	34.10	H	7.82	55.52	41.92	74.0	54.0	18.5	12.1
8121.6	47.90	34.10	V	7.82	55.72	41.92	74.0	54.0	18.3	12.1
Middle Channel										
2745.6	52.90	47.40	H	-3.96	48.94	43.44	74.0	54.0	25.1	10.6
2745.6	57.40	54.30	V	-3.96	53.44	50.34	74.0	54.0	20.6	3.7
3660.8	49.90	39.30	H	-1.00	48.90	38.30	74.0	54.0	25.1	15.7
3660.8	50.30	41.30	V	-1.00	49.30	40.30	74.0	54.0	24.7	13.7
4576	49.40	39.20	H	0.66	50.06	39.86	74.0	54.0	23.9	14.1
4576	50.80	40.70	V	0.66	51.46	41.36	74.0	54.0	22.5	12.6
7321.6	47.30	33.80	H	7.51	54.81	41.31	74.0	54.0	19.2	12.7
7321.6	47.00	33.80	V	7.51	54.51	41.31	74.0	54.0	19.5	12.7
High Channel										
2782.8	54.60	49.50	H	-3.86	50.74	45.64	74.0	54.0	23.3	8.4
2782.8	59.20	56.30	V	-3.86	55.34	52.44	74.0	54.0	18.7	1.6
3710.4	49.80	38.70	H	-0.81	48.99	37.89	74.0	54.0	25.0	16.1
3710.4	50.70	41.90	V	-0.81	49.89	41.09	74.0	54.0	24.1	12.9
4638	51.30	43.40	H	0.85	52.15	44.25	74.0	54.0	21.8	9.7
4638	51.90	45.10	V	0.85	52.75	45.95	74.0	54.0	21.2	8.0
7420.8	47.50	33.90	H	7.60	55.10	41.50	74.0	54.0	18.9	12.5
7420.8	47.60	33.90	V	7.60	55.20	41.50	74.0	54.0	18.8	12.5

Table 7.5.3.2-2: Radiated Spurious Emissions Tabulated Data – OFDM Modulation

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Low Channel										
2707.2	55.20	39.90	H	-4.07	51.13	35.83	74.0	54.0	22.9	18.2
2707.2	52.80	37.10	V	-4.07	48.73	33.03	74.0	54.0	25.3	21.0
3609.6	48.70	34.50	H	-1.19	47.51	33.31	74.0	54.0	26.5	20.7
3609.6	48.20	34.50	V	-1.19	47.01	33.31	74.0	54.0	27.0	20.7
Middle Channel										
2745.6	63.50	44.50	H	-3.96	59.54	40.54	74.0	54.0	14.5	13.5
2745.6	57.30	40.70	V	-3.96	53.34	36.74	74.0	54.0	20.7	17.3
3660.8	51.20	36.00	H	-1.00	50.20	35.00	74.0	54.0	23.8	19.0
3660.8	49.40	35.30	V	-1.00	48.40	34.30	74.0	54.0	25.6	19.7
4576	56.90	36.40	H	0.66	57.56	37.06	74.0	54.0	16.4	16.9
4576	54.60	36.50	V	0.66	55.26	37.16	74.0	54.0	18.7	16.8
High Channel										
2782.8	68.10	46.90	H	-3.86	64.24	43.04	74.0	54.0	9.8	11.0
2782.8	60.30	40.10	V	-3.86	56.44	36.24	74.0	54.0	17.6	17.8
3710.4	50.90	36.00	H	-0.81	50.09	35.19	74.0	54.0	23.9	18.8
3710.4	49.90	35.50	V	-0.81	49.09	34.69	74.0	54.0	24.9	19.3
4638	53.50	35.70	H	0.85	54.35	36.55	74.0	54.0	19.6	17.4
4638	52.60	34.90	V	0.85	53.45	35.75	74.0	54.0	20.5	18.2

Table 7.5.3.2-3: Radiated Spurious Emissions Tabulated Data – DSSS Modulation

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Low Channel										
2707.2	55.00	50.60	H	-4.07	50.93	46.53	74.0	54.0	23.1	7.5
2707.2	52.20	45.20	V	-4.07	48.13	41.13	74.0	54.0	25.9	12.9
3609.6	51.00	41.90	H	-1.19	49.81	40.71	74.0	54.0	24.2	13.3
3609.6	50.30	39.90	V	-1.19	49.11	38.71	74.0	54.0	24.9	15.3
4512	50.70	40.20	H	0.46	51.16	40.66	74.0	54.0	22.8	13.3
4512	49.90	38.80	V	0.46	50.36	39.26	74.0	54.0	23.6	14.7
Middle Channel										
2745.6	57.00	52.90	H	-3.96	53.04	48.94	74.0	54.0	21.0	5.1
2745.6	54.90	49.90	V	-3.96	50.94	45.94	74.0	54.0	23.1	8.1
3660.8	52.50	45.70	H	-1.00	51.50	44.70	74.0	54.0	22.5	9.3
3660.8	52.00	45.00	V	-1.00	51.00	44.00	74.0	54.0	23.0	10.0
4576	53.60	47.40	H	0.66	54.26	48.06	74.0	54.0	19.7	5.9
4576	52.00	43.80	V	0.66	52.66	44.46	74.0	54.0	21.3	9.5
8236.8	48.80	36.00	H	7.98	56.78	43.98	74.0	54.0	17.2	10.0
8236.8	48.30	35.90	V	7.98	56.28	43.88	74.0	54.0	17.7	10.1
High Channel										
2782.8	58.60	55.30	H	-3.86	54.74	51.44	74.0	54.0	19.3	2.6
2782.8	52.90	46.80	V	-3.86	49.04	42.94	74.0	54.0	25.0	11.1
3710.4	52.70	45.10	H	-0.81	51.89	44.29	74.0	54.0	22.1	9.7
3710.4	51.30	43.20	V	-0.81	50.49	42.39	74.0	54.0	23.5	11.6
4638	51.00	42.50	H	0.85	51.85	43.35	74.0	54.0	22.1	10.6
4638	49.30	39.30	V	0.85	50.15	40.15	74.0	54.0	23.8	13.8

7.5.3.3 Sample Calculation:

$$R_C = R_U + CF_T$$

Where:

CF_T	=	Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)
R_U	=	Uncorrected Reading
R_C	=	Corrected Level
AF	=	Antenna Factor
CA	=	Cable Attenuation
AG	=	Amplifier Gain
DC	=	Duty Cycle Correction Factor

Example Calculation: Peak – FSK Modulation

Corrected Level: $51.80 - 4.07 = 47.73\text{dBuV/m}$

Margin: $74\text{dBuV/m} - 47.73\text{dBuV/m} = 26.3\text{dB}$

Example Calculation: Average – FSK Modulation

Corrected Level: $43.90 - 4.07 - 0 = 39.83\text{dBuV}$

Margin: $54\text{dBuV} - 39.83\text{dBuV} = 14.2\text{dB}$

8 CONCLUSION

In the opinion of ACS, Inc. the OW1, manufactured by Itron, Inc. meets the requirements of FCC Part 15 subpart C and Innovation, Science, and Economic Development Canada's Radio Standards Specification RSS-247.

END REPORT