



Certification Test Report

**FCC ID: SK9SNIC1
IC: 864G-SNIC1**

**FCC Rule Part: 15.247
ISED Canada Radio Standards Specification: RSS-247**

Report Number: AT72124916-3C1

**Manufacturer: Itron, Inc.
Model: SNIC1**

**Test Begin Date: March 1, 2017
Test End Date: April 10, 2017**

Report Issue Date: July 11, 2017



FOR THE SCOPE OF ACCREDITATION UNDER Certificate Number: AT-2021

This report must not be used by the client to claim product certification, approval, or endorsement by ANAB, NIST, or any agency of the Federal Government.

Prepared by:

**Ryan McGann
Senior Engineer
TÜV SÜD America Inc.**

Reviewed by:

**Thierry Jean-Charles
EMC Engineer
TÜV SÜD America Inc.**

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of TÜV SÜD America Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

This report contains 36 pages

TABLE OF CONTENTS

1	GENERAL	3
1.1	PURPOSE.....	3
1.2	PRODUCT DESCRIPTION.....	3
1.3	TEST METHODOLOGY AND CONSIDERATIONS	4
2	TEST FACILITIES.....	5
2.1	LOCATION	5
2.2	LABORATORY ACCREDITATIONS/RECOGNITIONS/CERTIFICATIONS	5
2.3	RADIATED EMISSIONS TEST SITE DESCRIPTION	6
2.3.1	<i>Semi-Anechoic Chamber Test Site.....</i>	<i>6</i>
2.3.2	<i>Open Area Tests Site (OATS)</i>	<i>7</i>
2.4	CONDUCTED EMISSIONS TEST SITE DESCRIPTION	8
3	APPLICABLE STANDARD REFERENCES.....	8
4	LIST OF TEST EQUIPMENT.....	9
5	SUPPORT EQUIPMENT.....	10
6	EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM	11
7	SUMMARY OF TESTS.....	12
7.1	ANTENNA REQUIREMENT – FCC: SECTION 15.203	12
7.2	POWER LINE CONDUCTED EMISSIONS – FCC: SECTION 15.207; ISED CANADA: RSS-GEN 8.8.....	12
7.2.1	<i>Measurement Procedure.....</i>	<i>12</i>
7.2.2	<i>Measurement Results</i>	<i>12</i>
7.3	6 DB / 99 % BANDWIDTH – FCC: SECTION 15.247(A)(2); ISED CANADA: RSS-247 5.2(A).....	14
7.3.1	<i>Measurement Procedure.....</i>	<i>14</i>
7.3.2	<i>Measurement Results</i>	<i>14</i>
7.4	FUNDAMENTAL EMISSION OUTPUT POWER – FCC: SECTION 15.247(B)(3); ISED CANADA: RSS-247 5.4(D).....	19
7.4.1	<i>Measurement Procedure.....</i>	<i>19</i>
7.4.2	<i>Measurement Results</i>	<i>19</i>
7.5	EMISSION LEVELS	23
7.5.1	<i>Emissions into Non-restricted Frequency Bands – FCC 15.247(d); ISED Canada: RSS-247 5.5</i>	<i>23</i>
7.5.1.1	<i>Measurement Procedure.....</i>	<i>23</i>
7.5.1.2	<i>Measurement Results</i>	<i>23</i>
7.5.2	<i>Emissions into Restricted Frequency Bands – FCC: 15.205, 15.209; ISED Canada: RSS-Gen 8.9 / 8.10</i>	<i>27</i>
7.5.2.1	<i>Measurement Procedure.....</i>	<i>27</i>
7.5.2.2	<i>Measurement Results</i>	<i>27</i>
7.5.2.3	<i>Sample Calculation:</i>	<i>28</i>
7.6	MAXIMUM POWER SPECTRAL DENSITY IN THE FUNDAMENTAL EMISSION – FCC 15.247(E) ISED CANADA: RSS-247 5.2(B).....	29
7.6.1	<i>Measurement Procedure.....</i>	<i>29</i>
7.6.2	<i>Measurement Results</i>	<i>29</i>
7.7	DUTY CYCLE.....	33
7.7.1	<i>Measurement Procedure.....</i>	<i>33</i>
7.7.2	<i>Measurement Results</i>	<i>33</i>
8	ESTIMATION OF MEASUREMENT UNCERTAINTY	35
9	CONCLUSION	36

1 GENERAL

1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations and Innovation, Science, and Economic Development Canada's Radio Standards Specification RSS-247 Certification for modular approval.

1.2 Product Description

The Itron Smart Network Interface Card (model: SNIC1) module is built on Itron's IPv6 OpenWay platform, and includes the Adaptive Communications Technology (ACT). It can process, analyze, communicate and react in real-time. Adaptive communications enable devices to interact with each other while dynamically switching between Radio Frequency (RF) and Power Line Carrier (PLC) to ensure the fastest and most reliable communications path. The communication module utilizes 900 MHz radio frequency (RF), power line carrier (carrier current system) and 2.4 GHz Wi-Fi operation bands.

This test report documents the compliance of the WiFi transceiver mode of operation.

Technical Information:

Detail	Description
Frequency Range	2412 – 2462 MHz
Number of Channels	802.11b/g/n (HT 20): 11 802.11n (HT 40): 9
Modulation Format	802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11g/n (HT 20/40): OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rates	802.11b: 1 – 11 Mbps 802.11g: 6 – 54 Mbps 802.11n (HT 20): 6.5 – 72 Mbps 802.11n (HT 40): 13.5 – 150 Mbps
Number of Inputs/Outputs	1T1R
Operating Voltage	24 Vdc
Antenna Type / Gain	Micro Strip Patch Antenna / 3 dBi

Manufacturer Information:

Itron, Inc.
313 N Hwy 11
West Union, SC 29696

Test Sample Serial Number: Radiated Emissions: #1
Power Line Conducted Emissions: #2
RF Conducted Emissions: #5

Test Sample Condition: The test samples were provided in good working order with no visible defects.

1.3 Test Methodology and Considerations

All modes of operation, including all data rates, were evaluated and the data presented in this report represents the worst case where applicable. The worst-case data rate for 802.11b mode was 5.5 MBPS. The worst-case data rate for 802.11g mode was 12 MBPS. The worst-case data rate for 802.11n (HT 20) mode was MCS4. The worst-case data rate for 802.11n (HT 40) mode was MCS0.

For radiated emissions, the EUT was evaluated in three orthogonal orientations. The worst-case orientation was X-orientation. See test setup photos for more information.

For AC power line conducted emissions the EUT was evaluated with a typical host power supply.

For RF Conducted Emissions, the EUT was modified with a temporary SMA connector to facilitate connection to the test equipment.

Radiated inter-modulation testing was performed for all combinations of simultaneous transmission and found to comply.

Power setting during test – 802.11b:	15
Power setting during test – 802.11g:	12
Power setting during test – 802.11n (HT 20):	12
Power setting during test – 802.11n (HT 40):	8

2 TEST FACILITIES

2.1 Location

The radiated and conducted emissions test sites are located at the following address:

TÜV SÜD America, Inc.
5015 B.U. Bowman Drive
Buford, GA 30518
Phone: (770) 831-8048
Fax: (770) 831-8598

2.2 Laboratory Accreditations/Recognitions/Certifications

TÜV SÜD America, Inc. is accredited to ISO/IEC 17025 by the ANSI-ASQ National Accreditation Board/ANAB accreditation program, and has been issued certificate number AT-2021 in recognition of this accreditation. Unless otherwise specified, all tests methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

The Semi-Anechoic Chamber Test Site, Open Area Test Site (OATS) and Conducted Emissions Site have been fully described, submitted to, and accepted by the FCC, ISED Canada and the Japanese Voluntary Control Council for Interference by information technology equipment.

FCC Registration Number: 391271

ISED Canada Lab Code: IC 4175A

VCCI Member Number: 1831

- VCCI OATS Registration Number R-1526
- VCCI Conducted Emissions Site Registration Number: C-1608

2.3 Radiated Emissions Test Site Description

2.3.1 Semi-Anechoic Chamber Test Site

The Semi-Anechoic Chamber Test Site consists of a 20' x 30' x 18' shielded enclosure. The chamber is lined with Toyo Ferrite Grid Absorber, model number FFG-1000. The ferrite tile grid is 101 x 101 x 19mm thick and weighs approximately 550 grams. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber.

The turntable is 150cm in diameter and is located 160cm from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is all steel, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Behind the turntable is a 3' x 6' x 4' deep shielded pit used for support equipment if necessary. The pit is equipped with 1 - 4" PVC chases from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3-1 below:

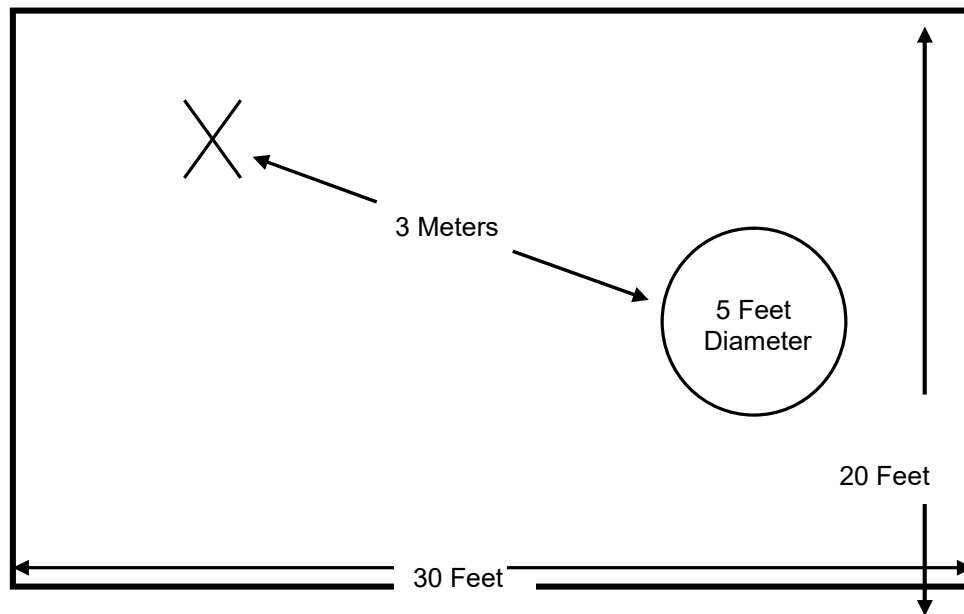


Figure 2.3-1: Semi-Anechoic Chamber Test Site

2.3.2 Open Area Tests Site (OATS)

The open area test site consists of a 40' x 66' concrete pad covered with a perforated electro-plated galvanized sheet metal. The perforations in the sheet metal are 1/8" holes that are staggered every 3/16". The individual sheets are placed to overlap each other by 1/4" and are riveted together to provide a continuous seam. Rivets are spaced every 3" in a 3 x 20 meter perimeter around the antenna mast and EUT area. Rivets in the remaining area are spaced as necessary to properly secure the ground plane and maintain the electrical continuity.

The entire ground plane extends 12' beyond the turntable edge and 16' beyond the antenna mast when set to a 10 meter measurement distance. The ground plane is grounded via 4 - 8' copper ground rods, each installed at a corner of the ground plane and bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is an all aluminum 10' flush mounted table installed in an all aluminum frame. The table is remotely operated from inside the control room located 40' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Adjacent to the turntable is a 7' x 7' square and 4' deep concrete pit used for support equipment if necessary. The pit is equipped with 5 - 4" PVC chases from the pit to the control room that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit. The pit is covered with 2 sheets of 1/4" diamond style re-enforced steel sheets. The sheets are painted to match the perforated steel ground plane; however the underside edges have been masked off to maintain the electrical continuity of the ground plane. All reflecting objects are located outside of the ellipse defined in ANSI C63.4.

A diagram of the Open Area Test Site is shown in Figure 2.3-2 below:

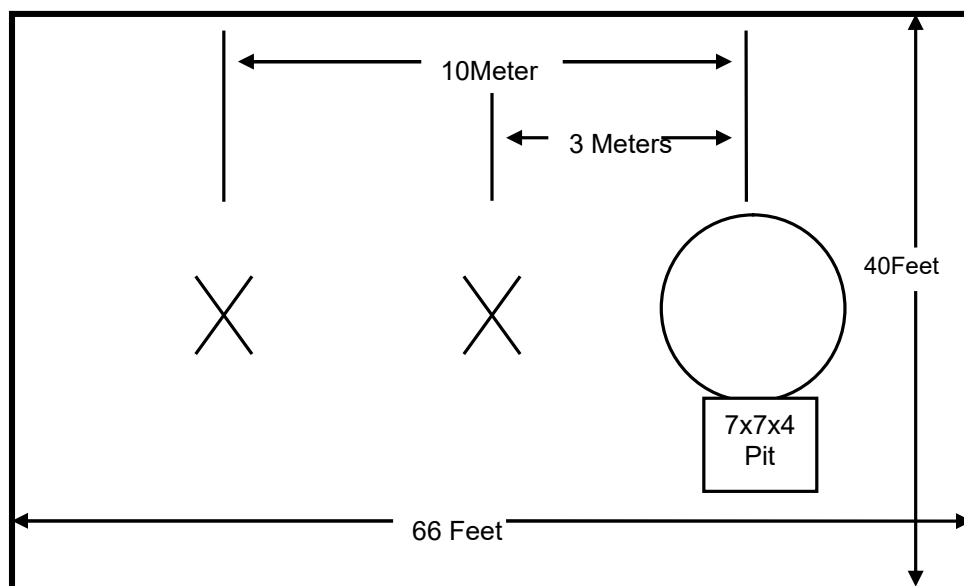


Figure 2.3-2: Open Area Test Site

2.4 Conducted Emissions Test Site Description

The AC mains conducted EMI site is located in the main EMC lab. It consists of an 8' x 8' solid aluminum horizontal ground reference plane (GRP) bonded every 3" to an 8' X 8' vertical ground plane.

The site is of sufficient size to test table top and floor standing equipment in accordance with ANSI C63.10.

A diagram of the room is shown below in figure 2.4-1:

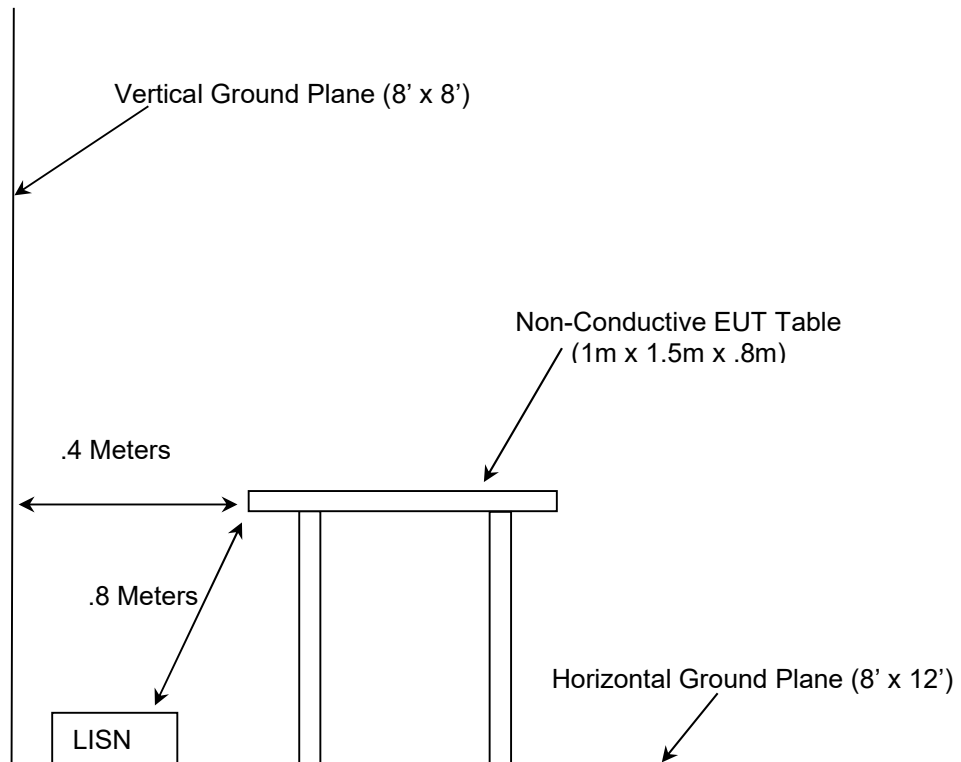


Figure 2.4-1: AC Mains Conducted EMI Site

3 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ❖ ANSI C63.4-2014: American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
- ❖ ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2017
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2017
- ❖ FCC KDB 558074 D01 DTS Meas Guidance v04 - Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247, April 5, 2017
- ❖ ISED Canada Radio Standards Specification: RSS-247 – Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices, Issue 2, Feb 2017.
- ❖ ISED Canada Radio Standards Specification: RSS-GEN – General Requirements for Compliance of Radio Apparatus, Issue 4, Nov 2014.

4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

Table 4-1: Test Equipment

AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
30	Spectrum Technologies	DRH-0118	Antennas	970102	4/30/2015	4/30/2017
40	EMCO	3104	Antennas	3211	6/8/2016	6/8/2018
73	Agilent	8447D	Amplifiers	2727A05624	7/21/2016	7/21/2017
167	ACS	Cable Set	Cable Set	167	9/30/2016	9/30/2017
267	Agilent	N1911A	Meters	MY45100129	8/24/2015	8/24/2017
268	Agilent	N1921A	Sensors	MY45240184	8/13/2015	8/13/2017
324	ACS	Belden	Cables	8214	5/2/2016	5/2/2017
334	Rohde&Schwarz	3160-09	Antennas	49404	11/4/2010	NCR
335	Suhner Sucoflex	SF-102A	Cables	882/2A	7/12/2016	7/12/2017
338	Hewlett Packard	8449B	Amplifiers	3008A01111	8/21/2015	8/21/2017
340	Aeroflex/Weinschel	AS-20	Attenuators	7136	7/12/2016	7/12/2017
345	Suhner Sucoflex	102A	Cables	1077/2A	7/12/2016	7/12/2017
412	Electro Metrics	LPA-25	Antennas	1241	8/8/2016	8/8/2018
422	Florida RF	SMR	Cables	805	10/27/2016	10/27/2017
432	Microwave Circuits	H3G020G4	Filters	264066	5/13/2016	5/13/2017
616	Florida RF Cables	SMRE	Cables	N/A	9/2/2016	9/2/2017
622	Rohde & Schwarz	FSV40	Analyzers	101338	7/15/2016	7/15/2018
676	Florida RF Labs	480.0-SMS	Cables	MFR2Y194	11/4/2016	11/4/2017
3010	Rohde & Schwarz	ENV216	LISN	3010	7/11/2016	7/11/2017
RE135	Rohde & Schwarz	FSP30	Spectrum Analyzers	835618/031	10/31/2016	10/31/2017
RE619	Rohde & Schwarz	ESU26	Spectrum Analyzers	1302.6005K26 Ser. 100190	11/5/2014	4/5/2017

NCR = No Calibration Required

NOTE: All test equipment was used only during active calibration cycles.

5 SUPPORT EQUIPMENT**Table 5-1: Support Equipment – Radiated Emissions**

Item	Equipment Type	Manufacturer	Model/Part Number	Serial Number
1	Power Supply	Itron, Inc.	574294-BRD7	9370057241

Table 5-2: Cable Description – Radiated Emissions

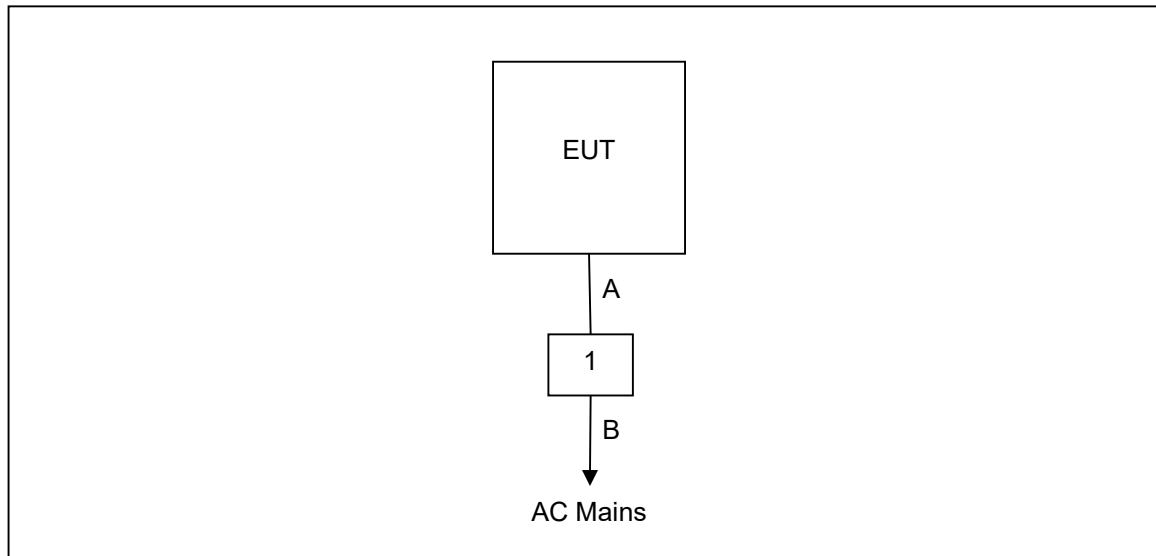
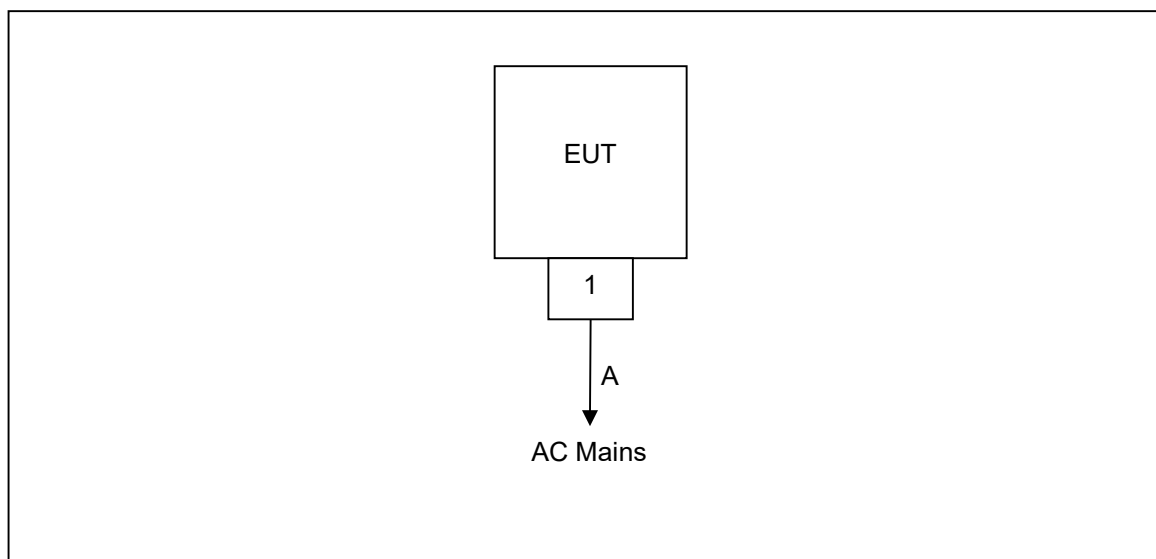
Cable	Cable Type	Length	Shield	Termination
A	DC Power Cable (Twisted)	1.9 m	No	EUT to Power Supply
B	AC Power Cable	1.75 m	No	Power Supply to AC Mains

Table 5-3: Support Equipment – Power Line Conducted Emissions

Item	Equipment Type	Manufacturer	Model/Part Number	Serial Number
1	Power Supply	Itron, Inc.	574294-BRD7	9370057263

Table 5-4: Cable Description – Power Line Conducted Emissions

Cable	Cable Type	Length	Shield	Termination
A	AC Power Cable	1.75 m	No	Power Supply to AC Mains

6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM**Figure 6-1: Test Setup Block Diagram – Radiated Emissions****Figure 6-2: Test Setup Block Diagram – Power Line Conducted Emissions**

7 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

7.1 Antenna Requirement – FCC: Section 15.203

The EUT utilizes a micro strip patch antenna. The antenna is integral to the device and cannot be removed or replaced by the end user. The gain of the antenna is 3 dBi.

7.2 Power Line Conducted Emissions – FCC: Section 15.207; ISED Canada: RSS-Gen 8.8

7.2.1 Measurement Procedure

Conducted emissions were performed from 150 kHz to 30 MHz with the spectrum analyzer's resolution bandwidth set to 9 kHz and the video bandwidth set to 30 kHz. The calculation for the conducted emissions is as follows:

Corrected Reading = Analyzer Reading + LISN Loss + Cable Loss

Margin = Applicable Limit - Corrected Reading

7.2.2 Measurement Results

Performed by: Christopher O'Steen

Table 7.2.2-1: Conducted EMI Results – Line 1

Frequency (MHz)	Corrected Reading		Limit (dBuV)	Margin (dB)	Line	Correction (dB)
	Quasi-Peak (dBuV)	Average (dBuV)				
0.490375	---	37.34	46.16	8.82	L1	9.7
0.490375	44.08	---	56.16	12.08	L1	9.7
0.984375	---	21.34	46.00	24.66	L1	9.7
0.984375	34.38	---	56.00	21.62	L1	9.7
1.374375	---	22.24	46.00	23.76	L1	9.8
1.374375	33.51	---	56.00	22.49	L1	9.8
1.553375	---	20.63	46.00	25.37	L1	9.8
1.553375	33.08	---	56.00	22.92	L1	9.8
1.560250	---	22.07	46.00	23.93	L1	9.8
1.560250	33.20	---	56.00	22.80	L1	9.8
1.655500	---	20.80	46.00	25.20	L1	9.8
1.655500	32.93	---	56.00	23.07	L1	9.8

Table 7.2.2-2: Conducted EMI Results – Line 2

Frequency (MHz)	Corrected Reading		Limit (dBuV)	Margin (dB)	Line	Correction (dB)
	Quasi-Peak (dBuV)	Average (dBuV)				
0.493875	---	37.07	46.10	9.03	N	9.7
0.493875	43.91	---	56.10	12.19	N	9.7
4.296834	---	18.64	46.00	27.36	N	9.9
4.296834	36.05	---	56.00	19.95	N	9.9
4.343333	---	17.05	46.00	28.95	N	9.9
4.343333	36.05	---	56.00	19.95	N	9.9
4.476500	---	17.12	46.00	28.88	N	9.9
4.476500	36.50	---	56.00	19.50	N	9.9
4.591166	---	19.11	46.00	26.89	N	9.9
4.591166	36.40	---	56.00	19.60	N	9.9
4.670666	---	16.67	46.00	29.33	N	9.9
4.670666	35.80	---	56.00	20.20	N	9.9

7.3 6 dB / 99 % Bandwidth – FCC: Section 15.247(a)(2); ISED Canada: RSS-247 5.2(a)

7.3.1 Measurement Procedure

The 6 dB bandwidth was measured in accordance with the FCC KDB 558074 D01 DTS Meas Guidance. The Resolution Bandwidth (RBW) of the spectrum analyzer was set to 100 kHz. The Video Bandwidth (VBW) was set to ≥ 3 times the RBW. The trace was set to max hold with a peak detector active. The marker-delta function of the spectrum analyzer was utilized to determine the 6 dB bandwidth of the emission.

The occupied bandwidth measurement function of the spectrum analyzer was used to measure the 99 % bandwidth. The span of the analyzer was set to capture all products of the modulation process, including the emission sidebands. The resolution bandwidth was set from 1 % to 5 % of the occupied bandwidth and the video bandwidth set to at least 3 times the resolution bandwidth. A peak detector was used.

7.3.2 Measurement Results

Performed by: Ryan McGann

Table 7.3.2-1: 6 dB / 99 % Bandwidth – 802.11b

Frequency [MHz]	6 dB Bandwidth [MHz]	99 % Bandwidth [MHz]
2412	8.399	12.256
2437	8.223	12.268
2462	8.258	12.254

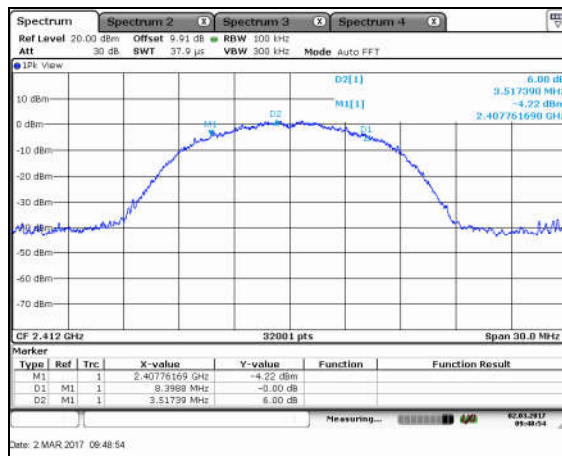


Figure 7.3.2-1: 6dB BW – 802.11b – LCH

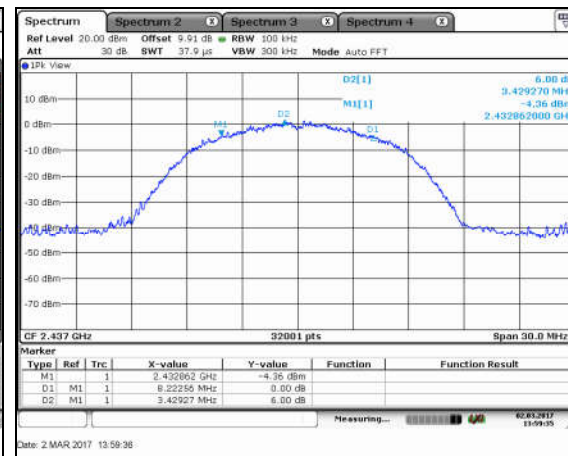


Figure 7.3.2-2: 6dB BW – 802.11b – MCH

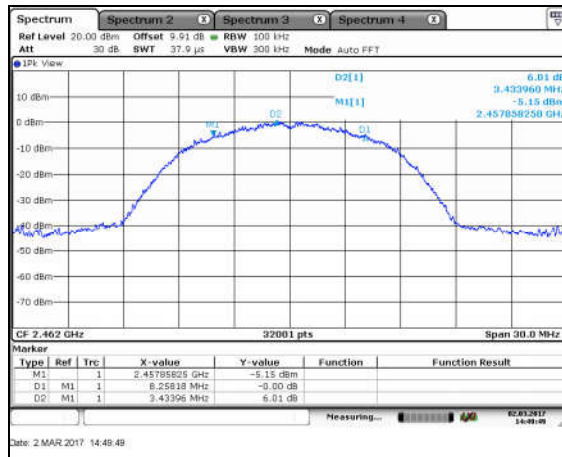


Figure 7.3.2-3: 6dB BW – 802.11b – HCH

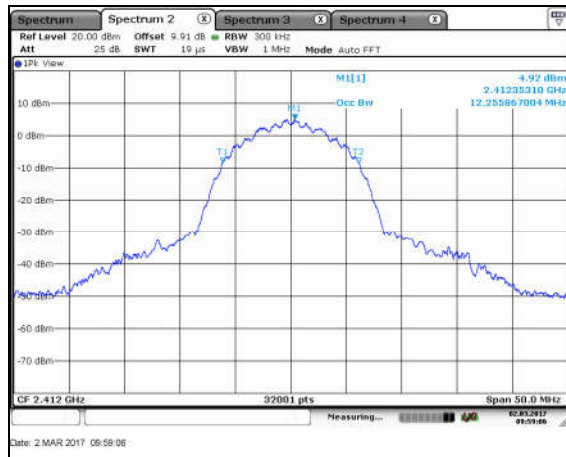


Figure 7.3.2-4: 99% OBW – 802.11b – LCH

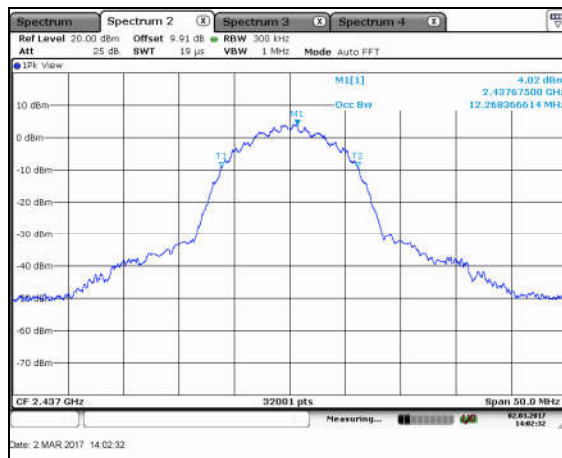


Figure 7.3.2-5: 99% OBW – 802.11b – MCH

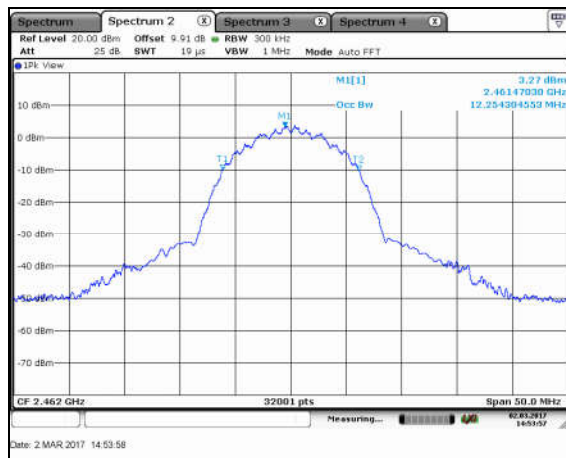


Figure 7.3.2-6: 99% OBW – 802.11b – HCH

Table 7.3.2-2: 6 dB / 99 % Bandwidth – 802.11g

Frequency [MHz]	6 dB Bandwidth [MHz]	99 % Bandwidth [MHz]
2412	15.399	16.489
2437	15.357	16.531
2462	15.360	16.490

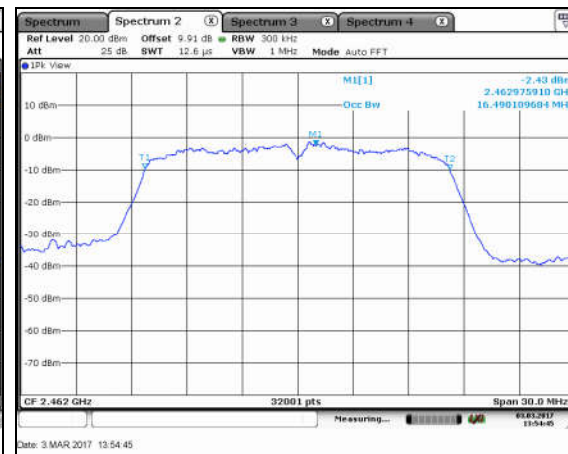
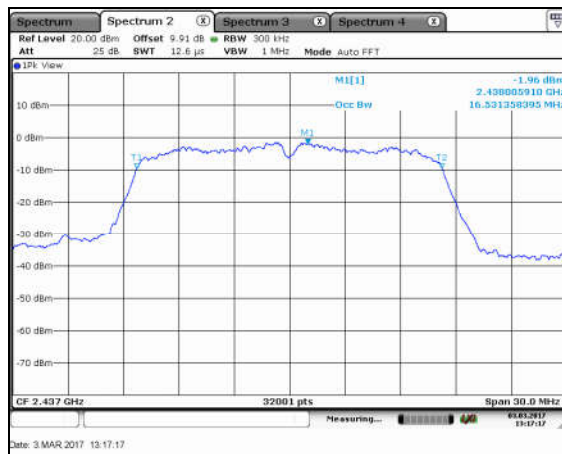
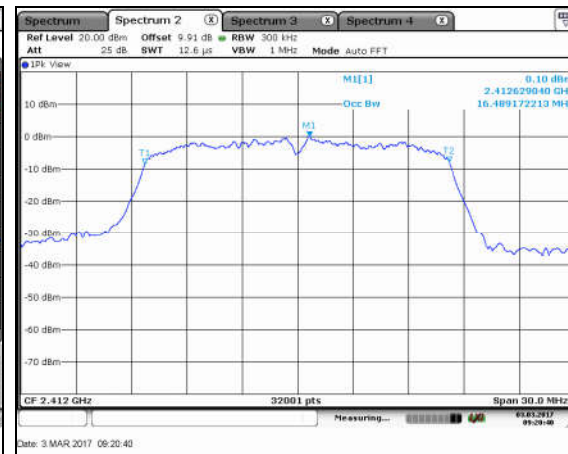
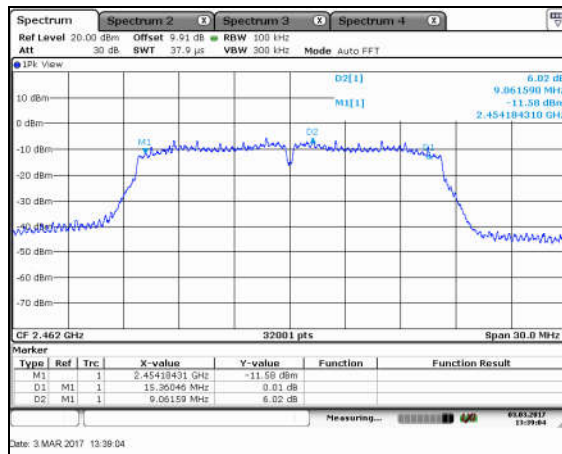
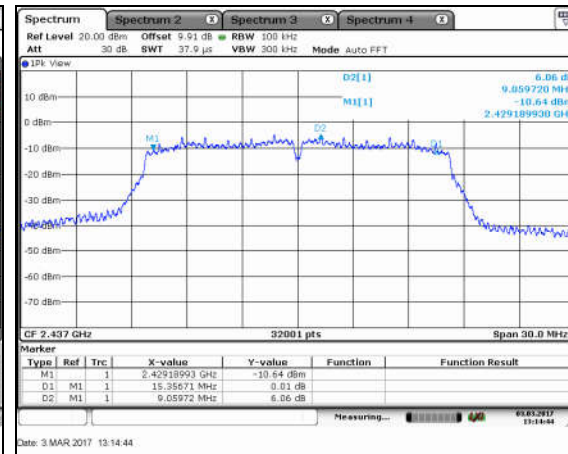
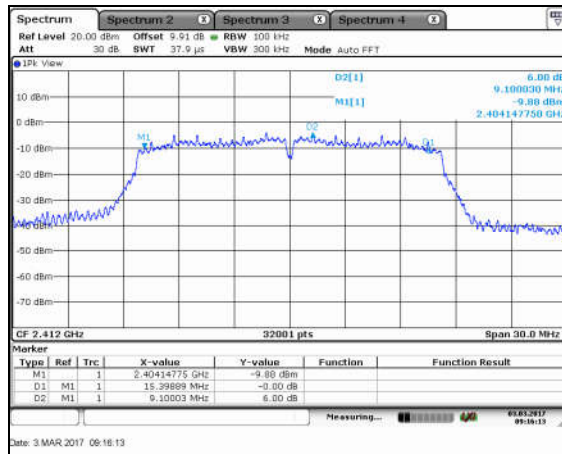


Table 7.3.2-3: 6 dB / 99 % Bandwidth – 802.11n (HT 20)

Frequency [MHz]	6 dB Bandwidth [MHz]	99 % Bandwidth [MHz]
2412	17.615	17.569
2437	17.611	17.585
2462	17.571	17.572

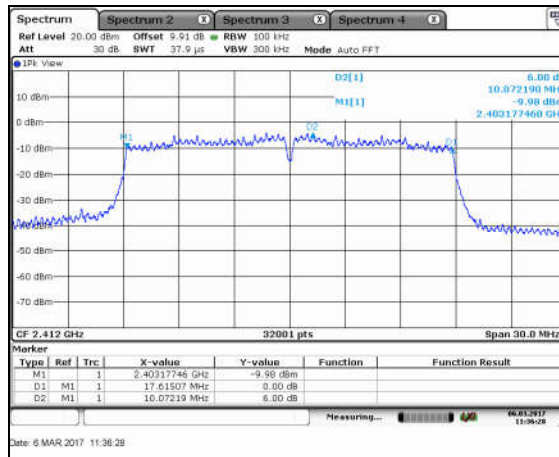


Figure 7.3.2-13: 6dB BW – 802.11n20 – LCH

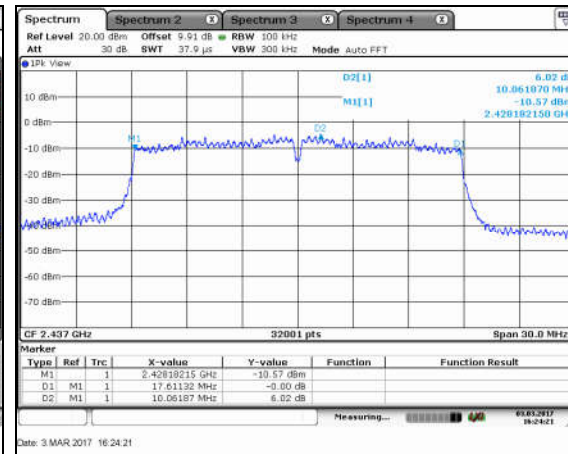


Figure 7.3.2-14: 6dB BW – 802.11n20 – MCH

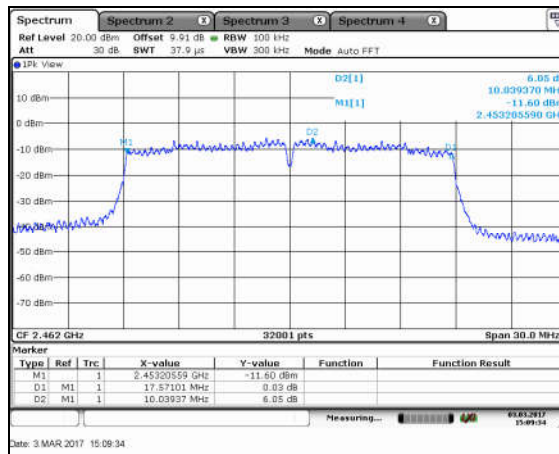


Figure 7.3.2-15: 6dB BW – 802.11n20 – HCH

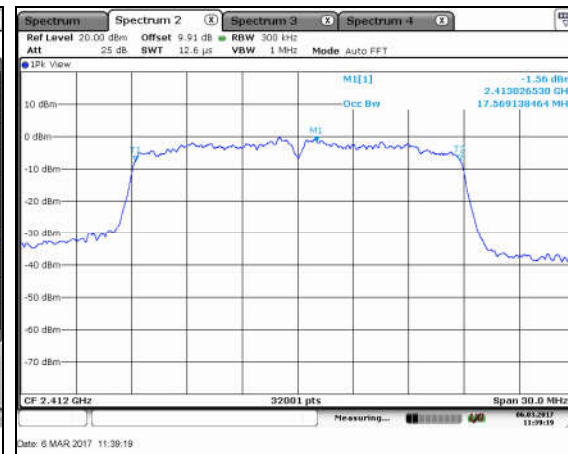


Figure 7.3.2-16: 99% OBW – 802.11n20 – LCH

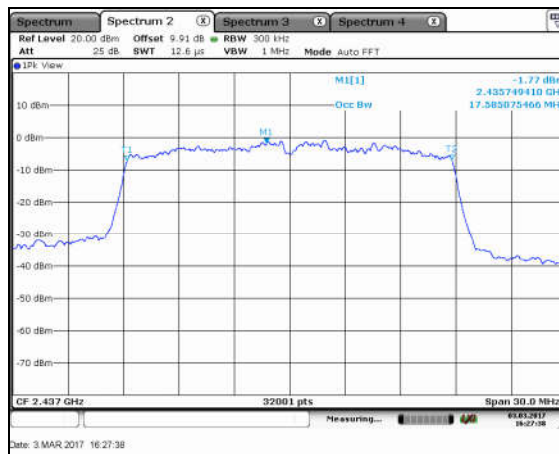


Figure 7.3.2-17: 99% OBW – 802.11n20 – MCH







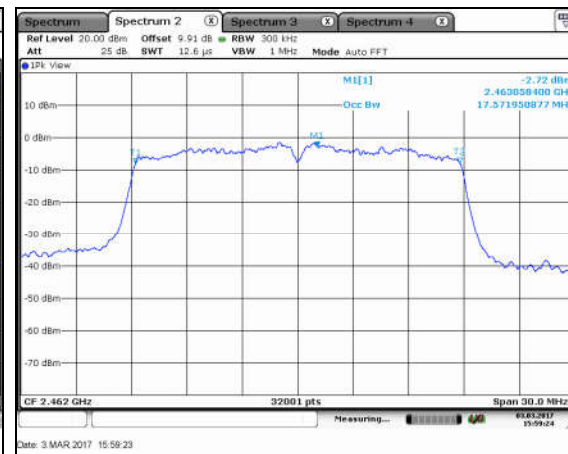


Figure 7.3.2-18: 99% OBW – 802.11n20 – HCH

Table 7.3.2-4: 6 dB / 99 % Bandwidth – 802.11n (HT 40)

Frequency [MHz]	6 dB Bandwidth [MHz]	99 % Bandwidth [MHz]
2422	35.102	36.508
2437	35.093	36.436
2452	35.093	36.546

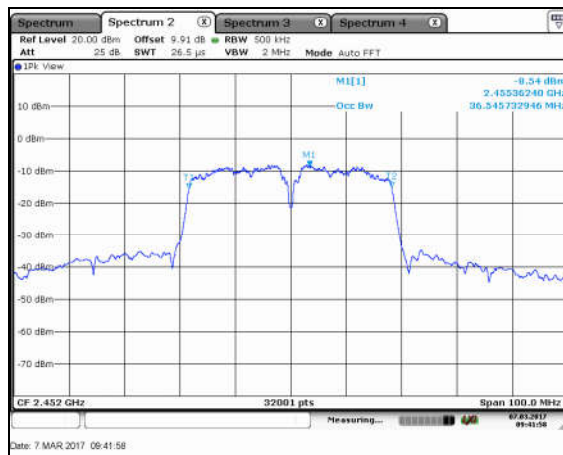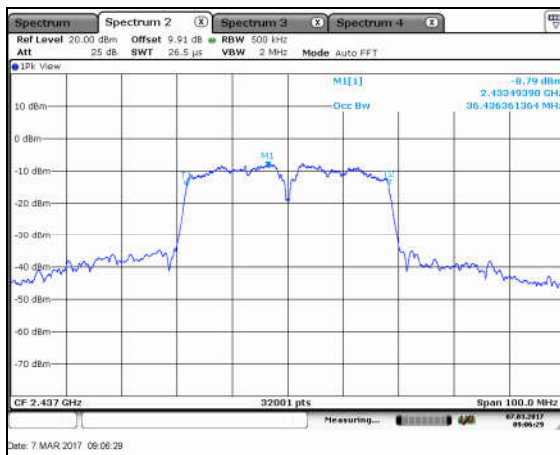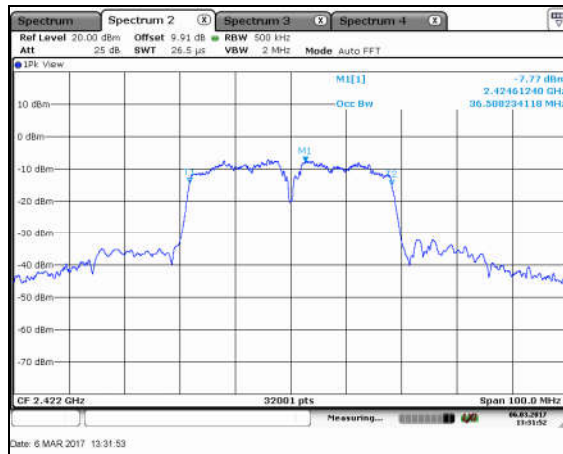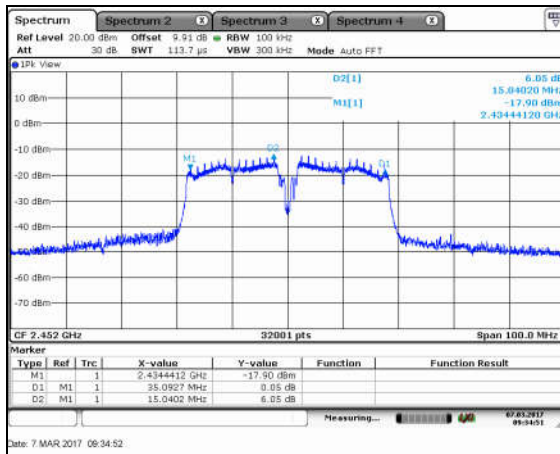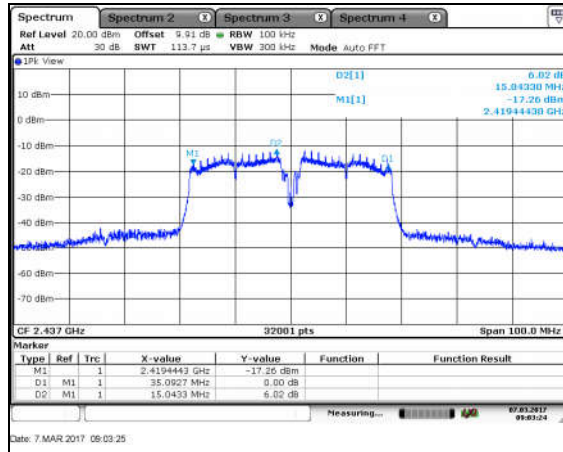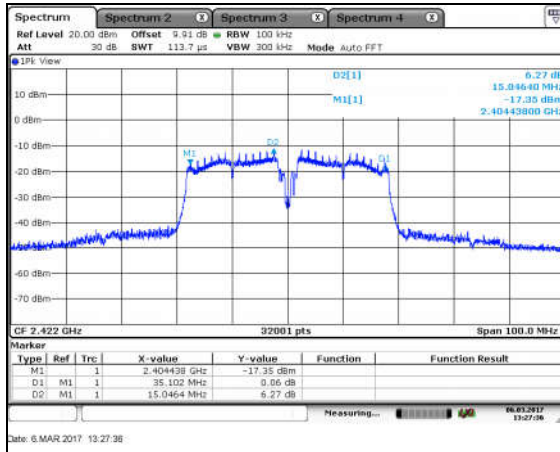

7.4 Fundamental Emission Output Power – FCC: Section 15.247(b)(3); ISED Canada: RSS-247 5.4(d)

7.4.1 Measurement Procedure

The maximum conducted output power was measured in accordance with FCC KDB 558074 D01 DTS Meas Guidance utilizing the AVGSA-2 procedure. The RF output of the equipment under test was directly connected to the input of the spectrum analyzer applying suitable attenuation. Justification for the Duty Cycle Correction Factor used is provided in Section 7.7 of this report.

7.4.2 Measurement Results

Performed by: Ryan McGann

Table 7.4.2-1: Maximum Peak Conducted Output Power – 802.11b

Frequency [MHz]	Level [dBm]	Duty Cycle Correction Factor [dB]	Corrected Level [dBm]
2412	10.95	0.0827	11.0327
2437	10.59	0.0827	10.6727
2462	10.06	0.0827	10.1427

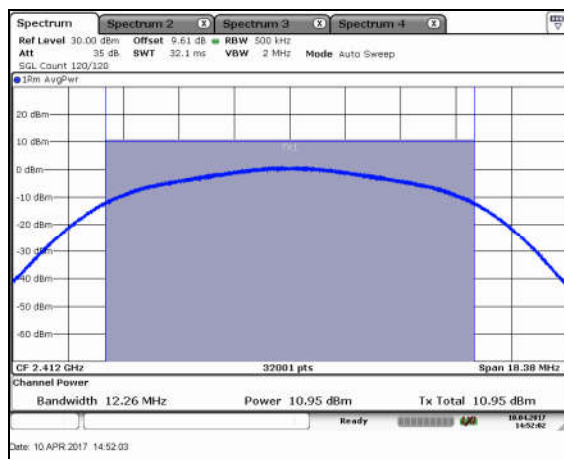


Figure 7.4.2-1: Output Power – 802.11b – LCH

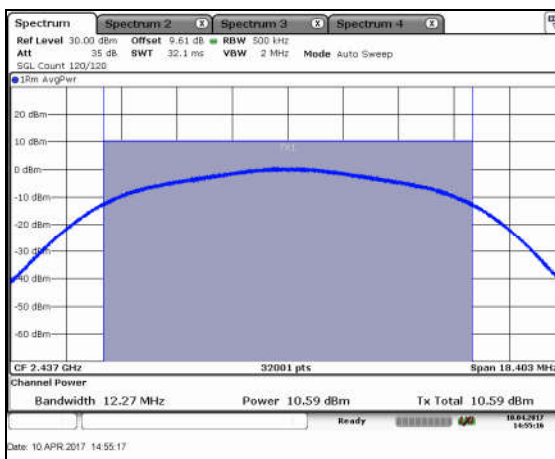


Figure 7.4.2-2: Output Power – 802.11b – MCH

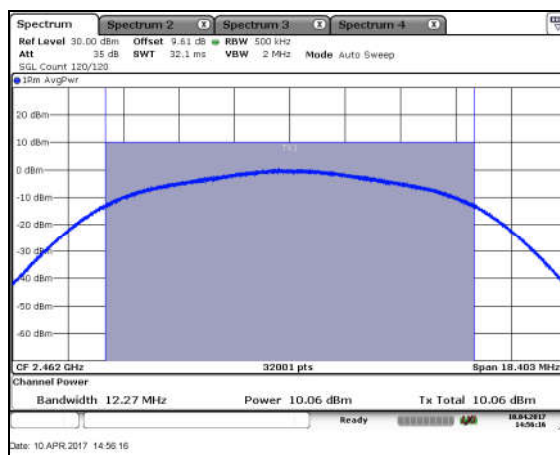


Figure 7.4.2-3: Output Power – 802.11b – HCH

Table 7.4.2-2: Maximum Peak Conducted Output Power – 802.11g

Frequency [MHz]	Level [dBm]	Duty Cycle Correction Factor [dB]	Corrected Level [dBm]
2412	8.03	0.1964	8.2264
2437	7.55	0.1964	7.7464
2462	7.04	0.1964	7.2364

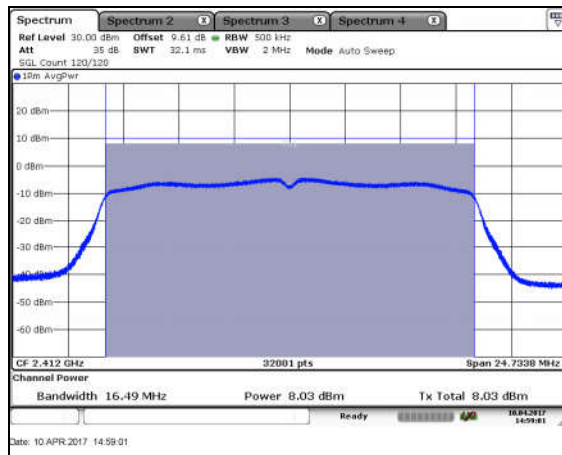


Figure 7.4.2-4: Output Power – 802.11g – LCH

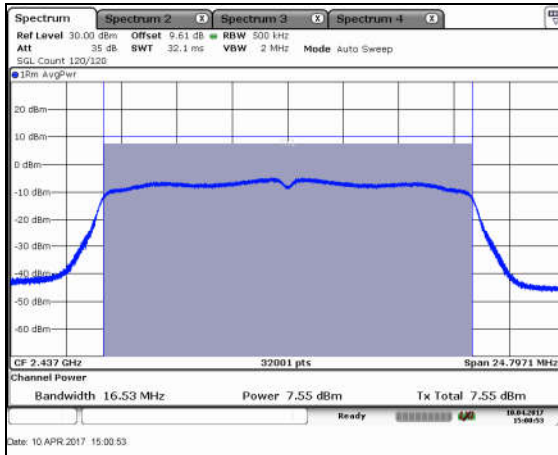


Figure 7.4.2-5: Output Power – 802.11g – MCH

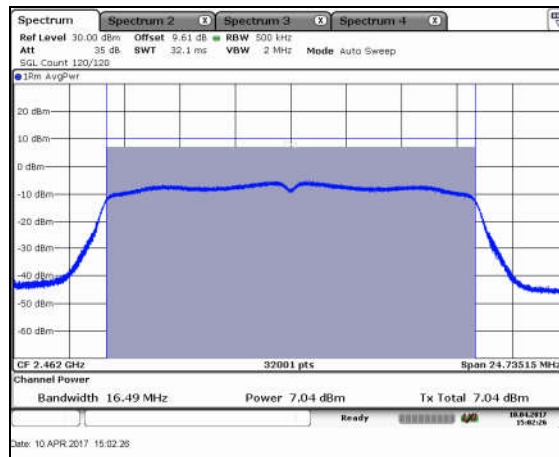


Figure 7.4.2-6: Output Power – 802.11g – HCH

Table 7.4.2-3: Maximum Peak Conducted Output Power – 802.11n (HT 20)

Frequency [MHz]	Level [dBm]	Duty Cycle Correction Factor [dB]	Corrected Level [dBm]
2412	7.54	0.5641	8.1041
2437	7.08	0.5641	7.6441
2462	6.60	0.5641	7.1641

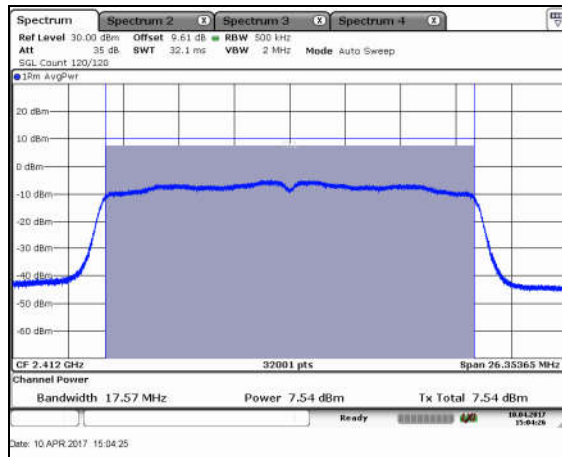


Figure 7.4.2-7: Output Power – 802.11n20 – LCH

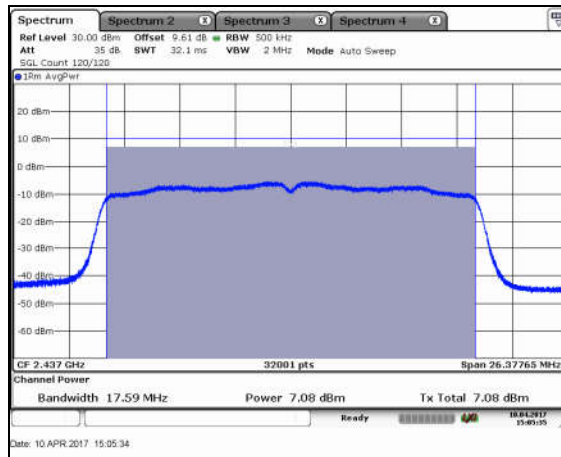


Figure 7.4.2-8: Output Power – 802.11n20 – MCH

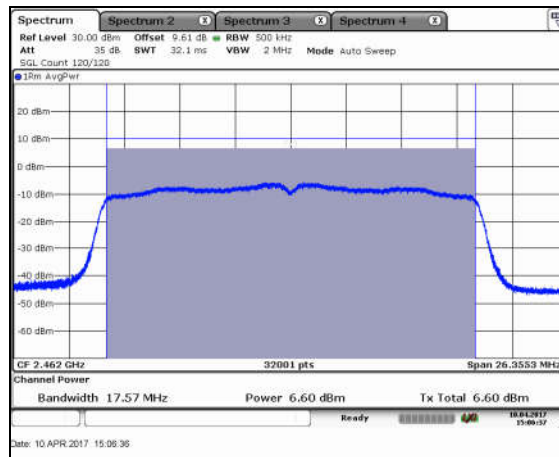


Figure 7.4.2-9: Output Power – 802.11n20 – HCH

Table 7.4.2-4: Maximum Peak Conducted Output Power – 802.11n (HT 40)

Frequency [MHz]	Level [dBm]	Duty Cycle Correction Factor [dB]	Corrected Level [dBm]
2422	3.21	0.0997	3.3097
2437	2.98	0.0997	3.0797
2452	2.51	0.0997	2.6097

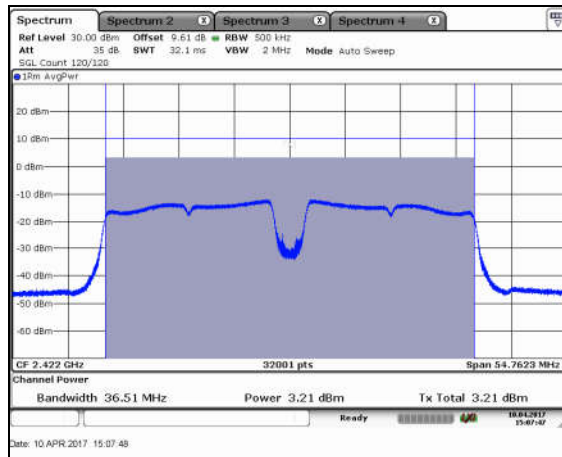


Figure 7.4.2-10: Output Power – 802.11n40 – LCH

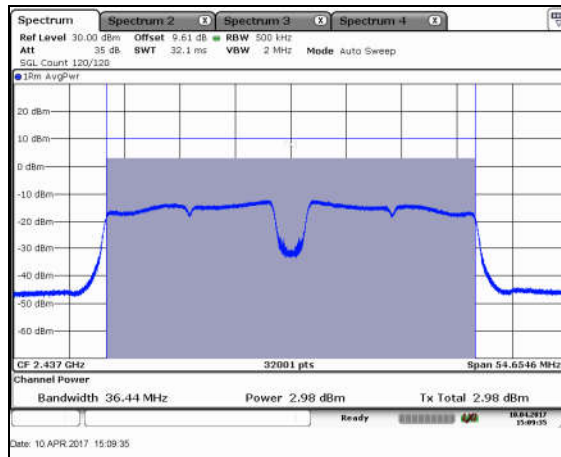


Figure 7.4.2-11: Output Power – 802.11n40 – MCH

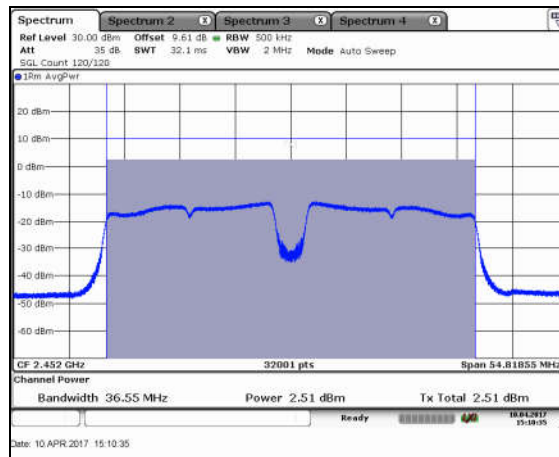


Figure 7.4.2-12: Output Power – 802.11n40 – HCH

7.5 Emission Levels

7.5.1 Emissions into Non-restricted Frequency Bands – FCC 15.247(d); ISCED Canada: RSS-247 5.5

7.5.1.1 Measurement Procedure

The unwanted emissions into non-restricted bands were measured conducted in accordance with FCC KDB 558074 D01 DTS Meas Guidance. The RF output of the equipment under test was directly connected to the input of the spectrum analyzer applying suitable attenuation. The Resolution Bandwidth (RBW) of the spectrum analyzer was set to 100 kHz. The Video Bandwidth (VBW) was set to ≥ 300 kHz. Span was set to 1.5 times the DTS bandwidth. The trace was set to max hold with a peak detector active. The resulting spectrum analyzer peak level was used to determine the reference level with respect to the 30 dBc limit. The spectrum span was then adjusted for the measurement of spurious emissions from 30 MHz to 25 GHz, 10 times the highest fundamental frequency.

Band-edge compliance was determined using the conducted marker-delta method in which the radio frequency power that is produced by the EUT is at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of desired power.

7.5.1.2 Measurement Results

Performed by: Ryan McGann

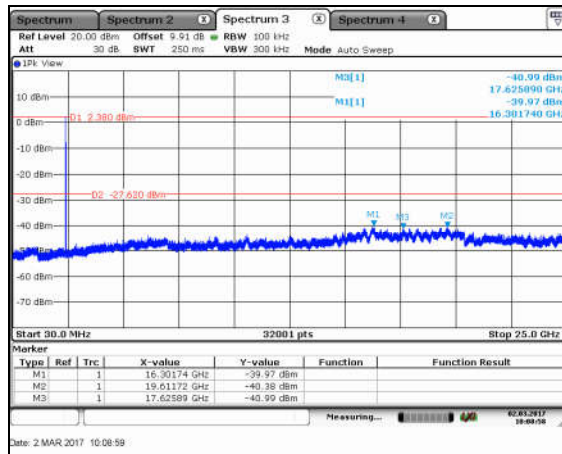


Figure 7.5.1.2-1: 802.11b – LCH – 30MHz–25GHz

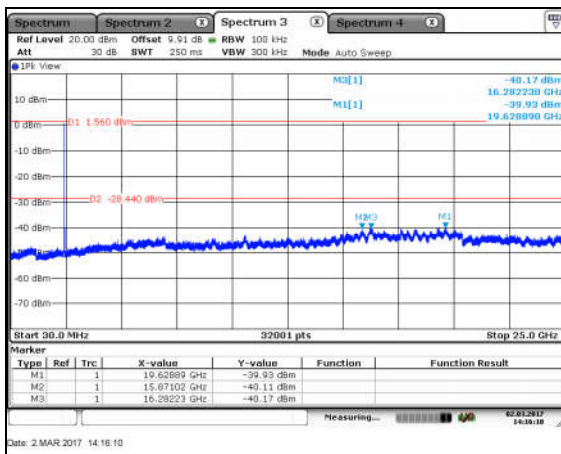


Figure 7.5.1.2-2: 802.11b – MCH – 30MHz–25GHz

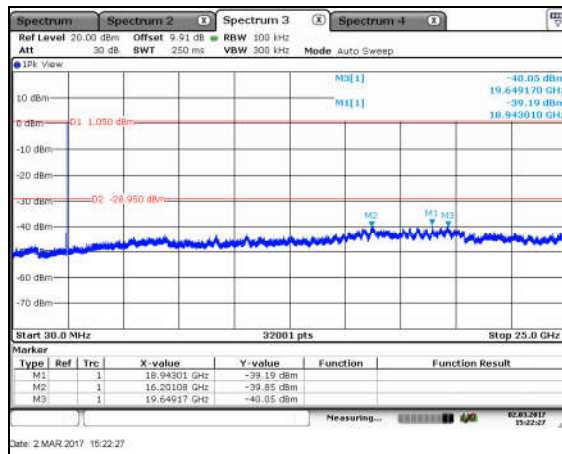


Figure 7.5.1.2-3: 802.11b – HCH – 30MHz–25GHz

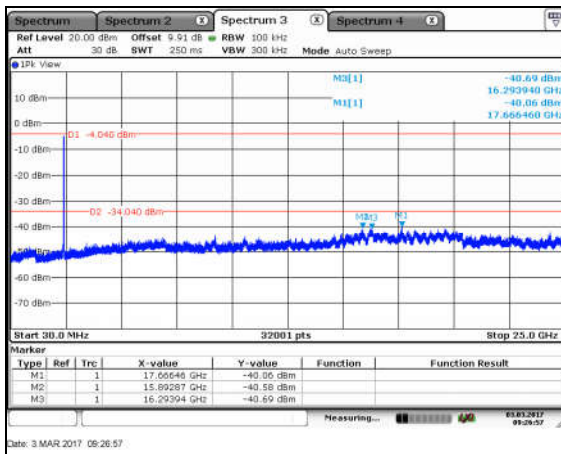


Figure 7.5.1.2-4: 802.11g – LCH – 30MHz–25GHz

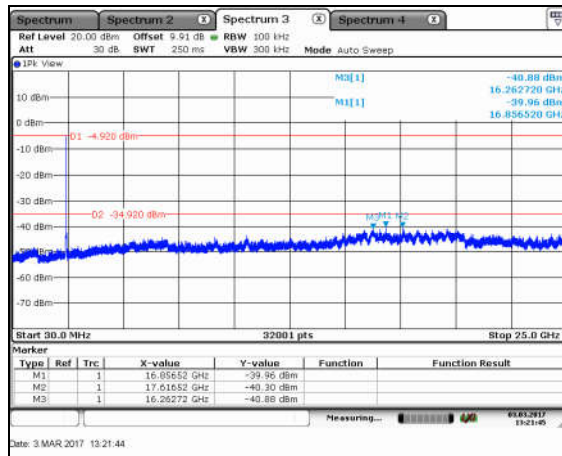


Figure 7.5.1.2-5: 802.11g – MCH – 30MHz–25GHz

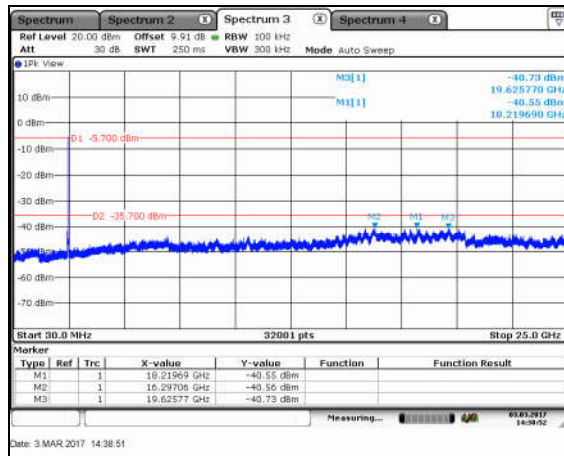


Figure 7.5.1.2-6: 802.11g – HCH – 30MHz–25GHz

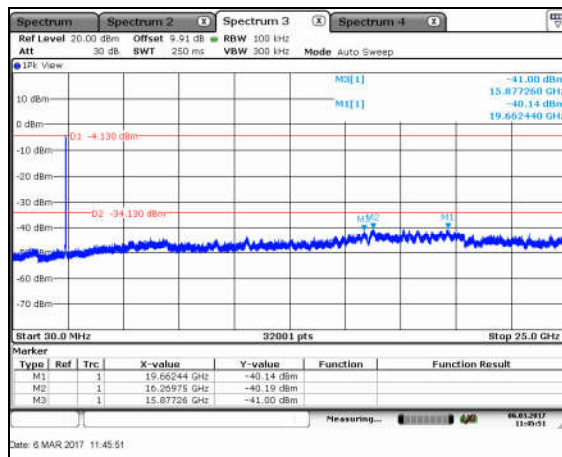


Figure 7.5.1.2-7: 802.11n20 – LCH – 30MHz–25GHz

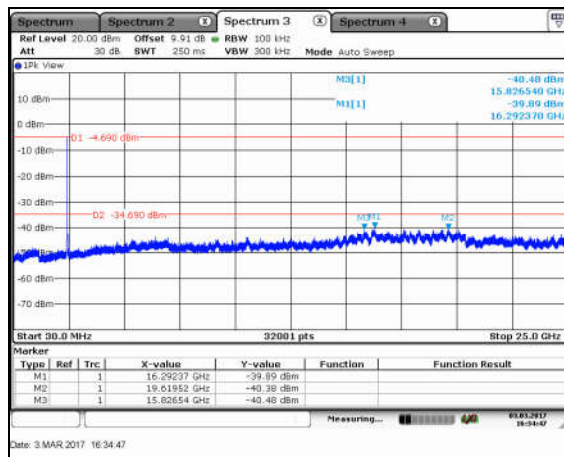


Figure 7.5.1.2-8: 802.11n20 – MCH – 30MHz–25GHz

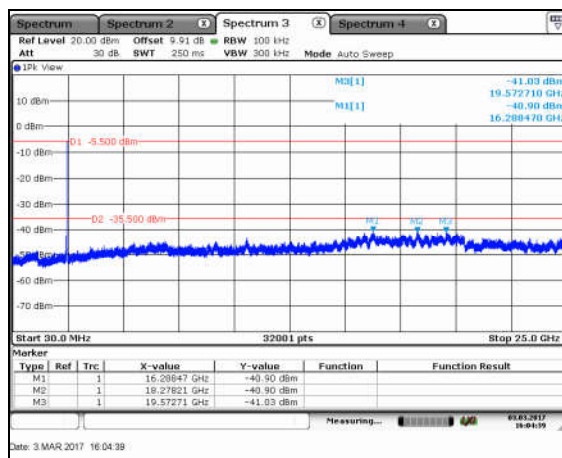


Figure 7.5.1.2-9: 802.11n20 – HCH – 30MHz–25GHz

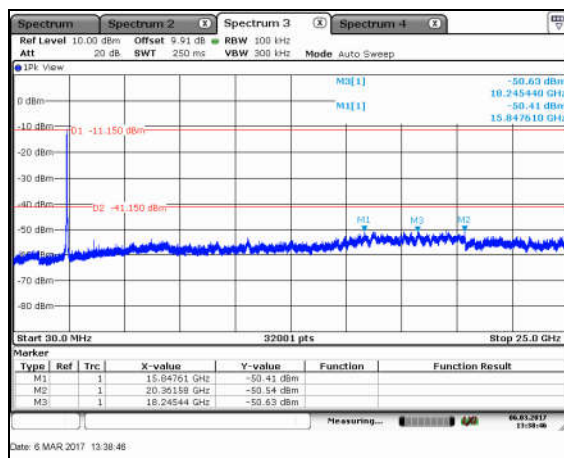


Figure 7.5.1.2-10: 802.11n40 – LCH – 30MHz–25GHz

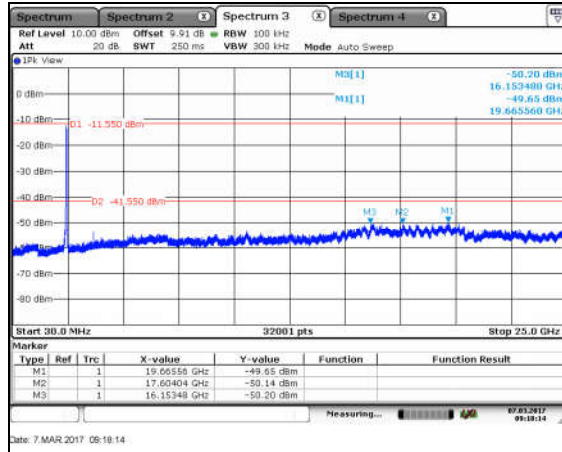


Figure 7.5.1.2-11: 802.11n40 – MCH – 30MHz–25GHz

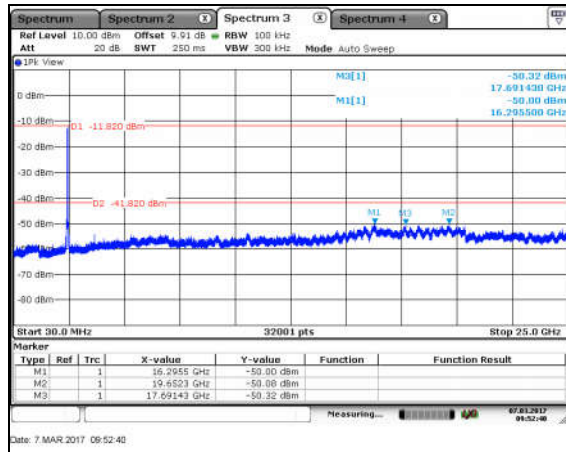


Figure 7.5.1.2-12: 802.11n40 – HCH – 30MHz–25GHz

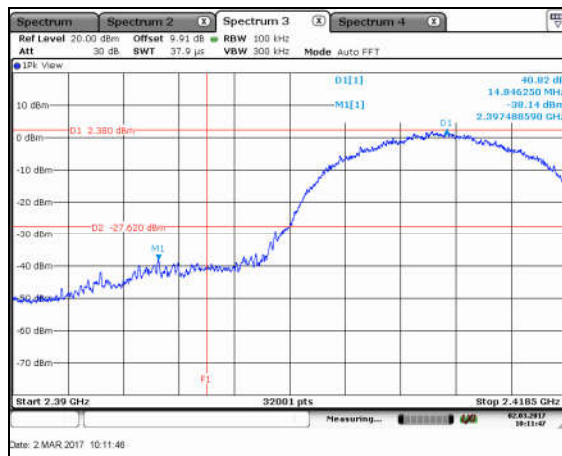


Figure 7.5.1.2-13: 802.11b – Lower Band-edge

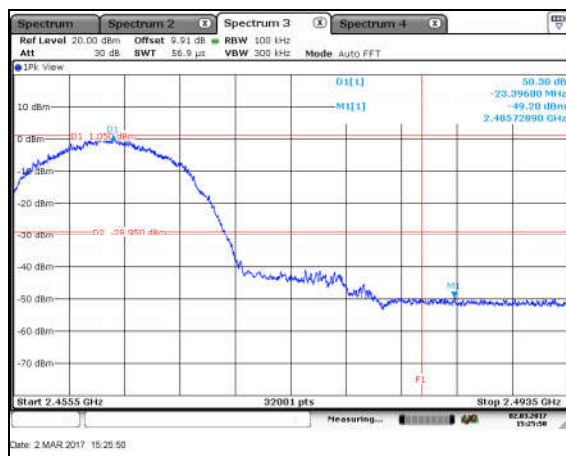


Figure 7.5.1.2-14: 802.11b – Upper Band-edge

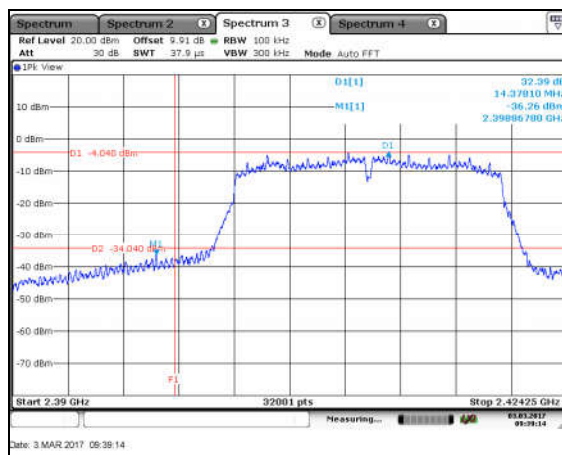


Figure 7.5.1.2-15: 802.11g – Lower Band-edge





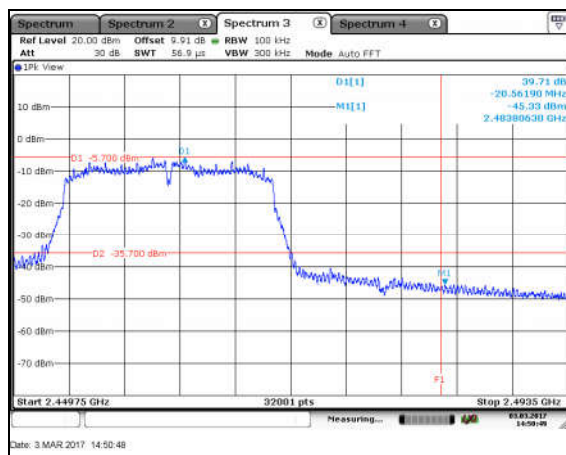


Figure 7.5.1.2-16: 802.11g – Upper Band-edge

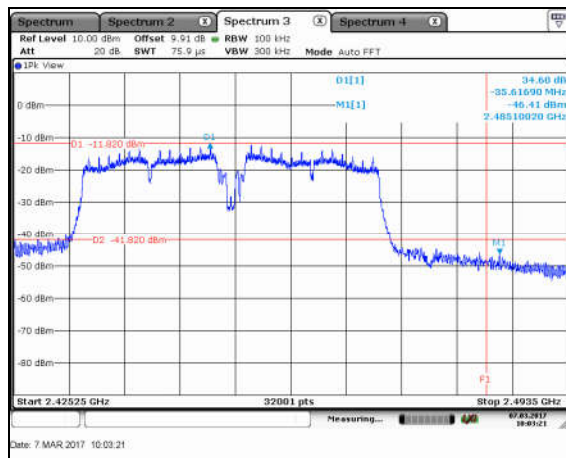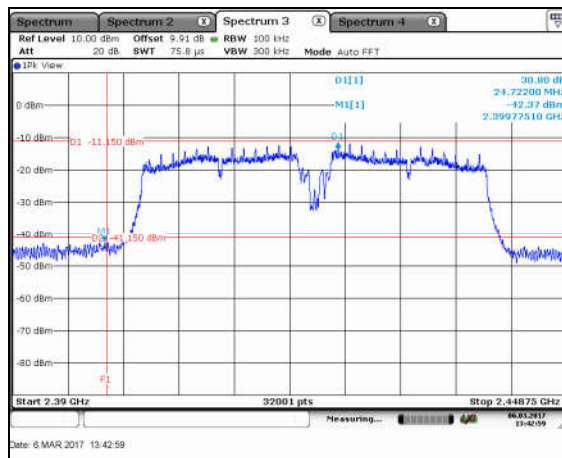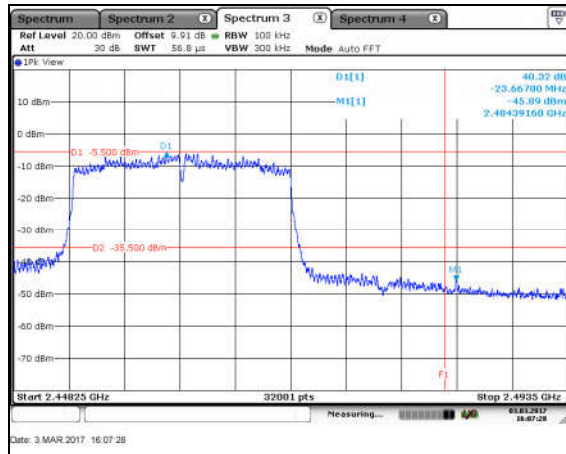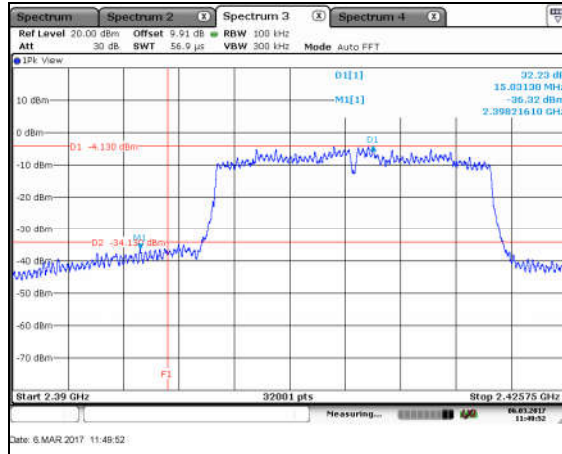

7.5.2 Emissions into Restricted Frequency Bands – FCC: 15.205, 15.209; ISED Canada: RSS-Gen 8.9 / 8.10

7.5.2.1 Measurement Procedure

The unwanted emissions into restricted bands were measured radiated over the frequency range of 30 MHz to 25 GHz, 10 times the highest fundamental frequency.

The EUT was rotated through 360° and the receive antenna height was varied from 1 meter to 4 meters so that the maximum radiated emissions level would be detected. For frequencies below 1000 MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 120 kHz and a video bandwidth VBW of 300 kHz. For frequencies above 1000 MHz, peak and average measurements were made with RBW and VBW of 1 MHz and 3 MHz respectively.

Each emission found to be in a restricted band as defined by section 15.205, including any emission at the operational band-edge, was compared to the radiated emission limits as defined in section 15.209.

7.5.2.2 Measurement Results

Performed by: Ryan McGann

Radiated spurious emissions found in the band of 30 MHz to 25 GHz are reported in the Tables 7.5.2.2-1 to 7.5.2.2-4 below.

Table 7.5.2.2-1: Radiated Spurious Emissions Tabulated Data – 802.11b

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
2412 MHz										
2390	55.68	46.36	H	-5.40	50.28	40.96	74.0	54.0	23.7	13.0
2390	67.64	56.09	V	-5.40	62.24	50.69	74.0	54.0	11.8	3.3
4824	53.22	50.14	H	1.87	55.09	52.01	74.0	54.0	18.9	2.0
4824	49.34	41.47	V	1.87	51.21	43.34	74.0	54.0	22.8	10.7
2437 MHz										
4874	50.16	44.97	H	2.02	52.18	46.99	74.0	54.0	21.8	7.0
4874	46.84	38.58	V	2.02	48.86	40.60	74.0	54.0	25.1	13.4
2462 MHz										
2483.5	51.27	42.76	H	-4.94	46.33	37.82	74.0	54.0	27.7	16.2
2483.5	64.07	50.29	V	-4.94	59.13	45.35	74.0	54.0	14.9	8.7
4924	50.46	44.70	H	2.18	52.64	46.88	74.0	54.0	21.4	7.1
4924	47.04	38.14	V	2.18	49.22	40.32	74.0	54.0	24.8	13.7
7386	49.35	42.86	H	7.79	57.14	50.65	74.0	54.0	16.9	3.3

Table 7.5.2.2-2: Radiated Spurious Emissions Tabulated Data – 802.11g

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
2412 MHz										
2390	63.62	52.8	H	-5.40	58.22	47.40	74.0	54.0	15.8	6.6
2390	73.29	56.07	V	-5.40	67.89	50.67	74.0	54.0	6.1	3.3
4824	46.95	36.27	H	1.87	48.82	38.14	74.0	54.0	25.2	15.9
4824	44.65	34.54	V	1.87	46.52	36.41	74.0	54.0	27.5	17.6
2437 MHz										
All emissions were attenuated below the noise floor of the measurement instrumentation.										
2462 MHz										
2483.5	63.45	45.07	H	-4.94	58.51	40.13	74.0	54.0	15.5	13.9
2483.5	69.14	50.97	V	-4.94	64.20	46.03	74.0	54.0	9.8	8.0

Table 7.5.2.2-3: Radiated Spurious Emissions Tabulated Data – 802.11n (HT 20)

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
2412 MHz										
2390	60.46	48.66	H	-5.40	55.06	43.26	74.0	54.0	18.9	10.7
2390	71.62	58.00	V	-5.40	66.22	52.60	74.0	54.0	7.8	1.4
2437 MHz										
All emissions were attenuated below the noise floor of the measurement instrumentation.										
2462 MHz										
2483.5	61.75	45.55	H	-4.94	56.81	40.61	74.0	54.0	17.2	13.4
2483.5	72.18	56.81	V	-4.94	67.24	51.87	74.0	54.0	6.8	2.1

Table 7.5.2.2-4: Radiated Spurious Emissions Tabulated Data – 802.11n (HT 40)

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
2422 MHz										
2390	61.91	46.60	H	-5.40	56.51	41.20	74.0	54.0	17.5	12.8
2390	72.79	57.95	V	-5.40	67.39	52.55	74.0	54.0	6.6	1.4
2437 MHz										
All emissions were attenuated below the noise floor of the measurement instrumentation.										
2452 MHz										
2483.5	60.41	42.23	H	-4.94	55.47	37.29	74.0	54.0	18.5	16.7
2483.5	72.36	52.70	V	-4.94	67.42	47.76	74.0	54.0	6.6	6.2
4904	49.18	36.66	H	2.12	51.30	38.78	74.0	54.0	22.7	15.2
4904	49.32	35.86	V	2.12	51.44	37.98	74.0	54.0	22.6	16.0

7.5.2.3 Sample Calculation:

$$R_C = R_U + CF_T$$

Where:

- CF_T = Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)
 R_U = Uncorrected Reading
 R_C = Corrected Level
 AF = Antenna Factor
 CA = Cable Attenuation
 AG = Amplifier Gain
 DC = Duty Cycle Correction Factor

Example Calculation: Peak – 802.11bCorrected Level: $55.68 - 5.40 = 50.28\text{dBuV/m}$ Margin: $74\text{dBuV/m} - 50.28\text{dBuV/m} = 23.7\text{dB}$ **Example Calculation: Average – 802.11b**Corrected Level: $46.36 - 5.40 - 0 = 40.96\text{dBuV}$ Margin: $54\text{dBuV} - 40.96\text{dBuV} = 13.0\text{dB}$

7.6 Maximum Power Spectral Density in the Fundamental Emission – FCC 15.247(e) ISED Canada: RSS-247 5.2(b)

7.6.1 Measurement Procedure

The power spectral density was measured in accordance with the FCC KDB 558074 D01 DTS Meas Guidance utilizing the PKPSD (peak PSD) method as a worst case. The RF output of the equipment under test was directly connected to the input of the spectrum analyzer applying suitable attenuation. The Resolution Bandwidth (RBW) of the spectrum analyzer was set to 3 kHz. The Video Bandwidth (VBW) was set to 10 kHz. Span was set to 1.5 times the DTS bandwidth. The trace was set to max hold with a peak detector active.

7.6.2 Measurement Results

Performed by: Ryan McGann

Table 7.6.2-1: Power Spectral Density – 802.11b

Frequency [MHz]	PSD Level [dBm]
2412	-12.11
2437	-12.86
2462	-13.58

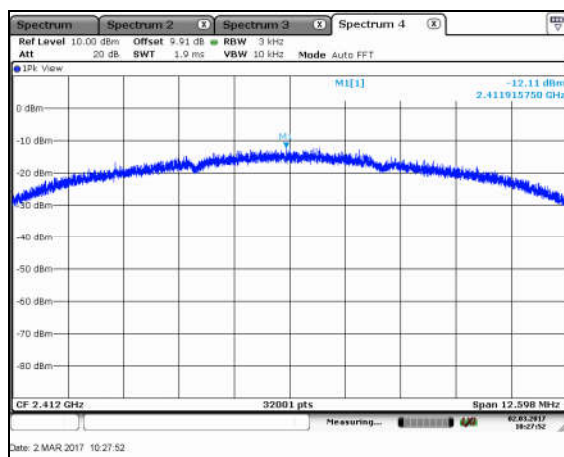


Figure 7.6.2-1: PSD – 802.11b - LCH

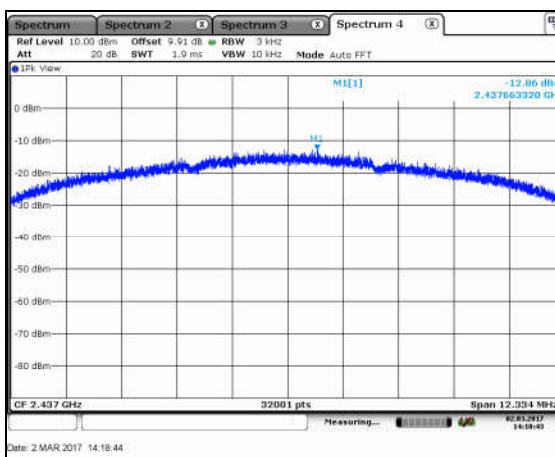


Figure 7.6.2-2: PSD – 802.11b – MCH

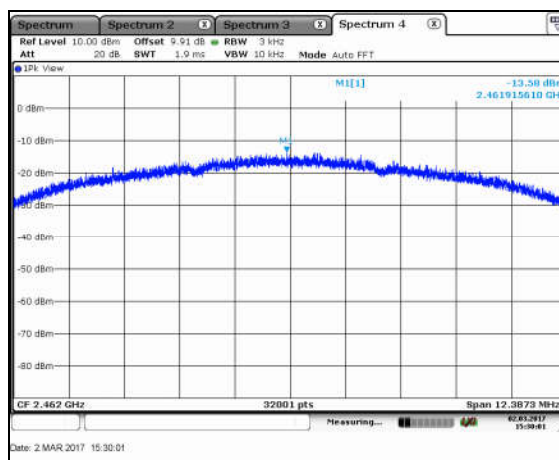


Figure 7.6.2-3: PSD – 802.11b – HCH

Table 7.6.2-2: Power Spectral Density – 802.11g

Frequency [MHz]	PSD Level [dBm]
2412	-15.30
2437	-16.32
2462	-17.21

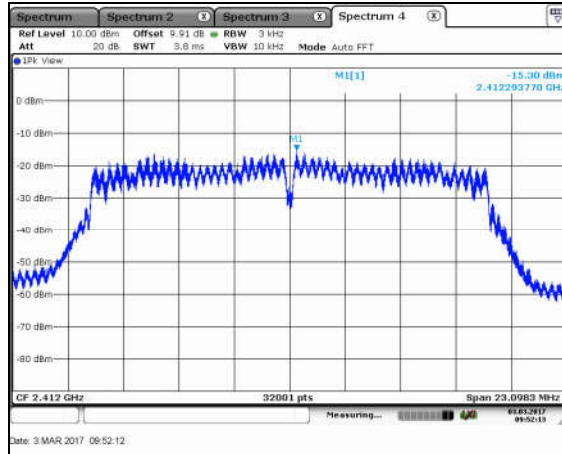


Figure 7.6.2-4: PSD – 802.11g - LCH

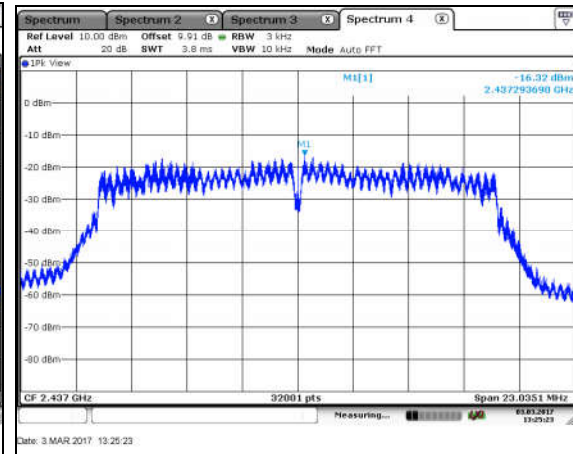


Figure 7.6.2-5: PSD – 802.11g – MCH

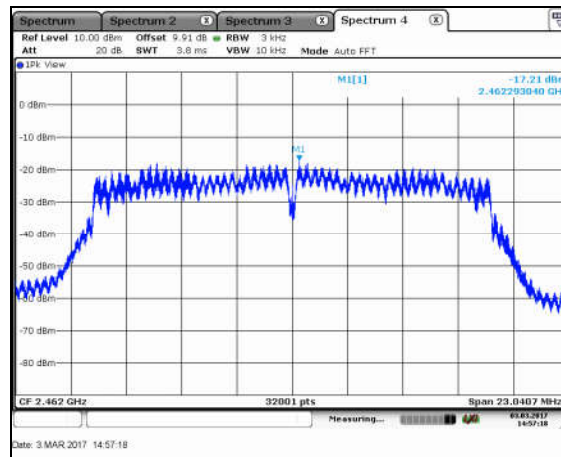


Figure 7.6.2-6: PSD – 802.11g – HCH

Table 7.6.2-3: Power Spectral Density – 802.11n (HT 20)

Frequency [MHz]	PSD Level [dBm]
2412	-17.14
2437	-17.55
2462	-18.23

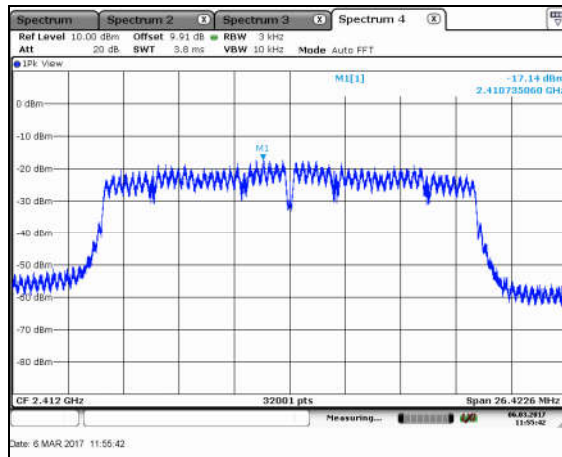


Figure 7.6.2-7: PSD – 802.11n20 - LCH

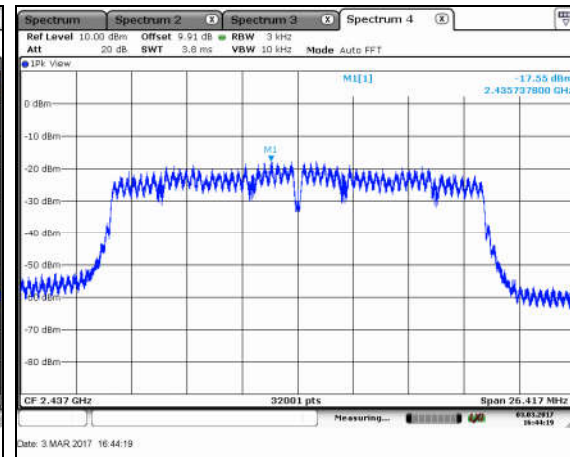


Figure 7.6.2-8: PSD – 802.11n20 – MCH




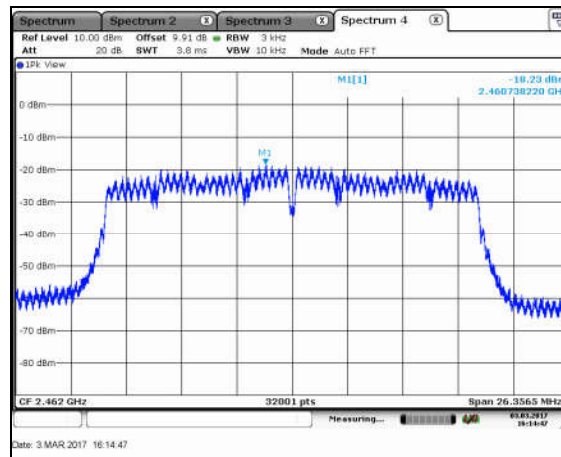


Figure 7.6.2-9: PSD – 802.11n20 – HCH

Table 7.6.2-4: Power Spectral Density – 802.11n (HT 40)

Frequency [MHz]	PSD Level [dBm]
2422	-24.17
2437	-24.78
2452	-24.96

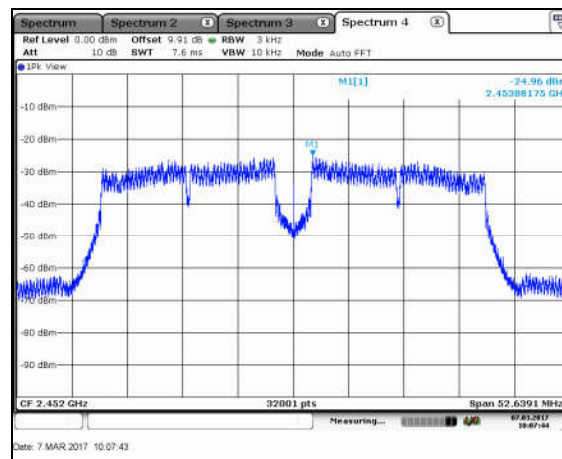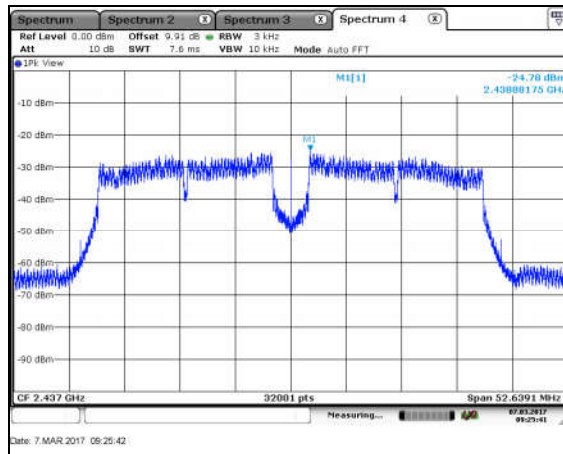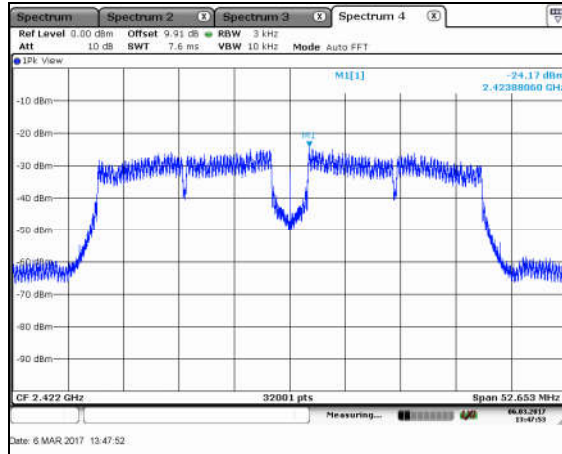

7.7 Duty Cycle**7.7.1 Measurement Procedure**

The duty cycle was measured in accordance with the FCC KDB 558074 D01 DTS Meas Guidance Section 6.0 Duty cycle, transmission duration and maximum power control level. The unit was connected directly to the input of the spectrum analyzer via suitable attenuation. The RBW and VBW were set to 28 MHz and the number of sweep points across duration T was set to exceed 100.

7.7.2 Measurement Results

Performed by: Ryan McGann

The results for all the modes of operation are provided below.

Table 7.7.2-1 Duty Cycle Correction Factor

Mode	Time On [ms]	Period [ms]	Duty Cycle [%]	Correction Factor [dB]
802.11b	2.3177	2.3622	98.12	0.0827
802.11g	1.0439	1.0922	95.58	0.1964
802.11n (HT 20)	0.3519	0.4007	87.82	0.5641
802.11n (HT 40)	2.0798	2.1281	97.73	0.0997

Note: The correction factor was calculated as $10 \cdot \log(\text{Period} / \text{Time ON})$

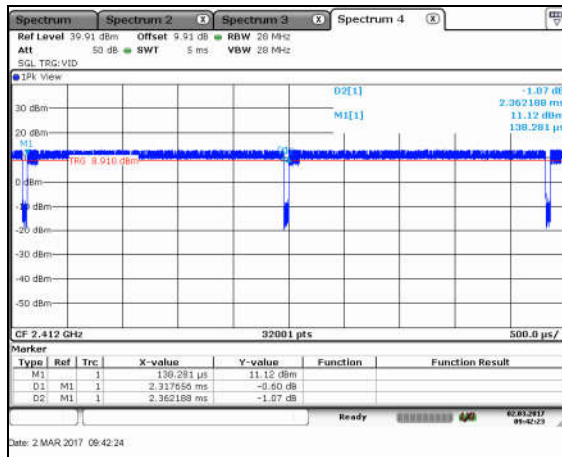


Figure 7.7.2-1: Duty Cycle 802.11b

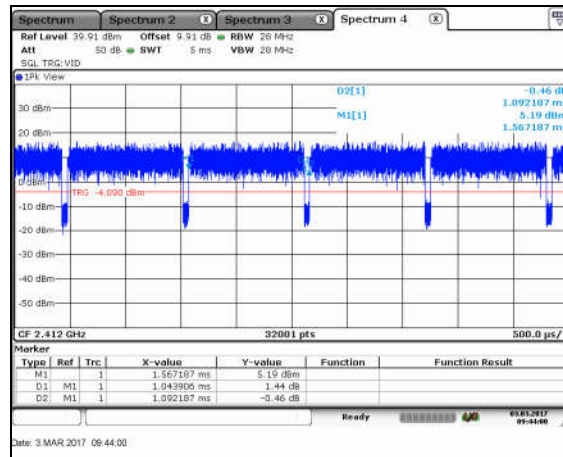


Figure 7.7.2-2: Duty Cycle 802.11g

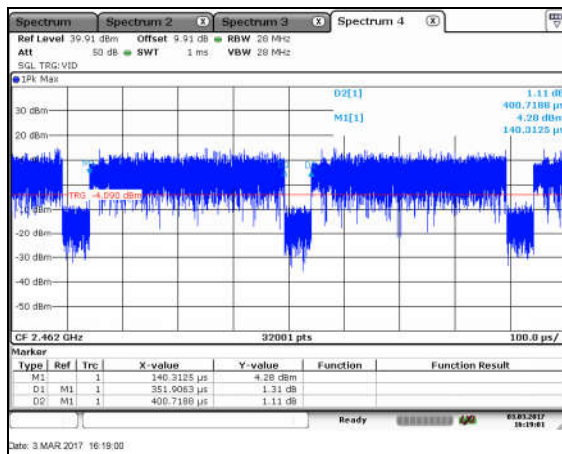


Figure 7.7.2-3: Duty Cycle 802.11n (HT 20)

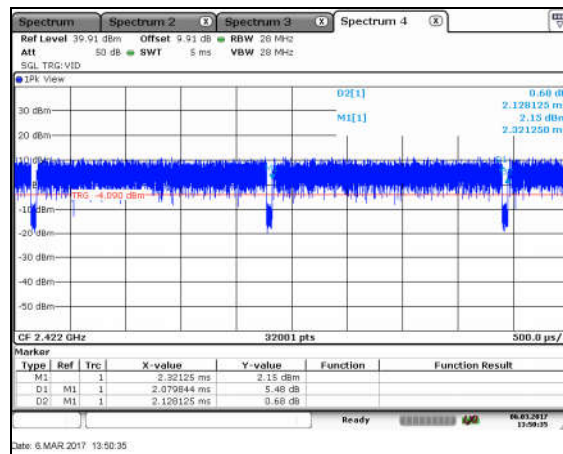


Figure 7.7.2-4: Duty Cycle 802.11n (HT 40)

8 ESTIMATION OF MEASUREMENT UNCERTAINTY

The expanded laboratory measurement uncertainty figures (U_{Lab}) provided below correspond to an expansion factor (coverage factor) $k = 1.96$ which provide confidence levels of 95%.

Parameter	U_{lab}
Occupied Channel Bandwidth	$\pm 0.009 \%$
RF Conducted Output Power	$\pm 0.349 \text{ dB}$
Power Spectral Density	$\pm 0.372 \text{ dB}$
Antenna Port Conducted Emissions	$\pm 1.264 \text{ dB}$
Radiated Emissions $\leq 1 \text{ GHz}$	$\pm 5.814 \text{ dB}$
Radiated Emissions $> 1 \text{ GHz}$	$\pm 4.318 \text{ dB}$
Temperature	$\pm 0.860 \text{ }^{\circ}\text{C}$
Radio Frequency	$\pm 2.832 \times 10^{-8}$
AC Power Line Conducted Emissions	$\pm 3.360 \text{ dB}$

9 CONCLUSION

In the opinion of TÜV SÜD America, Inc. the SNIC1, manufactured by Itron, Inc. meets the requirements of FCC Part 15 subpart C and Innovation, Science, and Economic Development Canada's Radio Standards Specification RSS-247 for the tests documented in this test report.

END REPORT