

FCC TEST REPORT

FCC ID : SKPCYK-900S
Applicant : Shenzhen Bol-Link Electronic Co., Ltd
Address : 6/F Bldg.6, HuaFeng Industrial Zone, Fuyong Town, Baoan, Shenzhen, Guangdong, China 518103
Manufacturer : The same as above
Address : The same as above
Equipment Under Test (EUT) :
Product Name : Bluetooth keyboard
Model No. : CYK-901, CYK-902, CYK-903, CYK-904, CYK-905, CYK-906, CYK-907
Standards : FCC CFR47 Part 15 Section 15.247:2010
Date of Test : February 27~March 12, 2013
Date of Issue : March 15, 2013

Test Result : **PASS**

Remark:

* The sample described above has been tested to be in compliance with the requirements of ANSI C63.4:2003. The test results have been reviewed and comply with the rules listed above and found to meet their essential requirements.

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.

The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Testing location: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel: +86-755-83551033

Fax: +86-755-83552400

Compiled by:

Approved by:

Zero Zhou

Zero Zhou / Project Engineer



Philo Zhong / Manager

2 Test Summary

Test Items	Test Requirement	Result
Spurious Radiated Emissions	15.205(a) 15.209 15.247(d)	PASS
Band edge Emissions	15.247(d)	PASS
Spurious RF Conducted Emissions from out of band	15.247(d)	PASS
Duty Cycle	15.35	PASS
Conducted Emissions	15.207	N/A
20dB Bandwidth	15.215c 15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	2
3 CONTENTS	3
4 GENERAL INFORMATION	5
4.1 GENERAL DESCRIPTION OF E.U.T.	5
4.2 DETAILS OF E.U.T.	5
4.3 TEST FACILITY	5
4.4 TEST LOCATION	5
5 EQUIPMENT USED DURING TEST	6
5.1 EQUIPMENTS LIST	6
5.2 MEASUREMENT UNCERTAINTY	6
5.3 TEST EQUIPMENT CALIBRATION	6
6 CONDUCTED EMISSION	7
7 SPURIOUS RADIATED EMISSIONS	8
7.1 EUT OPERATION :	8
7.2 TEST SETUP	9
7.3 SPECTRUM ANALYZER SETUP	10
7.4 TEST PROCEDURE	11
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	11
7.6 SUMMARY OF TEST RESULTS	12
8 SPURIOUS RF CONDUCTED EMISSIONS FROM OUT OF BAND	22
8.1 TEST PROCEDURE	22
8.2 TEST RESULT	22
9 DUTY CYCLE	32
9.1 TEST PROCEDURE	32
9.2 TEST RESULT	32
10 BAND EDGE MEASUREMENT	34
10.1 TEST PROCEDURE	34
10.2 TEST RESULT:	35
11 20 DB BANDWIDTH MEASUREMENT	39
11.1 TEST PROCEDURE:	39
11.2 TEST RESULT:	39
12 MAXIMUM PEAK OUTPUT POWER	45
12.1 TEST PROCEDURE:	45
12.2 TEST RESULT:	45
13 HOPPING CHANNEL SEPARATION	51
13.1 TEST PROCEDURE:	51
13.2 TEST RESULT:	51
14 NUMBER OF HOPPING FREQUENCY	57
14.1 TEST PROCEDURE:	57
14.2 TEST RESULT:	57
15 DWELL TIME	59

15.1	TEST PROCEDURE:	59
15.2	TEST RESULT:.....	59
16	ANTENNA REQUIREMENT	75
17	RF EXPOSURE	76
17.1	REQUIMENTS:	76
17.2	THE PROCEDURES / LIMIT	76
17.3	MPE CALCULATION METHOD.....	77
18	PHOTOGRAPHS – TEST SETUP	78
18.1	RADIATED EMISSIONS.....	78
19	PHOTOGRAPHS - CONSTRUCTIONAL DETAILS	80
19.1	EUT – EXTERNAL VIEW	80
19.2	EUT – INTERNAL VIEW	83
19.3	EUT-RF MODULE VIEW.....	85

4 General Information

4.1 General Description of E.U.T.

Product Name	: Bluetooth keyboard
Model No.	: CYK-901, CYK-902, CYK-903, CYK-904, CYK-905, CYK-906, CYK-907
Model Description	: Only appearance is different, the other circuit principle and PCB layout are all the same. CYK-901 is the tested sample.
Operation Frequency	: 2402MHz ~ 2480MHz, 79 channels in total, separated by 1MHz
Type of Modulation	: GFSK, Pi/4DQPSK, 8DPSK
Oscillator	: Crystal 24MHz
Antenna installation	: PCB Printed Antenna

4.2 Details of E.U.T.

Technical Data : DC 2*1.5V AAA Batteries

4.3 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A**

Waltek Services(Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration 7760A, July 12, 2012.

- **FCC – Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, May 26, 2011.

4.4 Test Location

All the tests were performed at:

Waltek Services(Shenzhen) Co., Ltd. at 1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District, Shenzhen, China

5 Equipment Used during Test

5.1 Equipments List

3m Semi-anechoic Chamber for Radiation Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer	Agilent	E7405A	MY45114943	Aug. 13,2012	Aug. 13,2013
2.	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Aug. 13,2012	Aug. 13,2013
3.	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Aug. 13,2012	Aug. 13,2013
4.	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Aug. 13,2012	Aug. 13,2013
5.	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	399	Aug. 13,2012	Aug. 13,2013
6.	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Feb .23,2012	Feb .23,2013
7.	Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-148	Aug. 13,2012	Aug. 13,2013
8.	10m Coaxial Cable with N- plug	SCHWARZBECK	AK 9515 H	-	Aug. 13,2012	Aug. 13,2013
9.	10m 50 Ohm Coaxial Cable with N-plug	Top	TYPE16(13M)	-	Aug. 13,2012	Aug. 13,2013

5.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
Bandwidth	$\pm 1.5 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Temperature	± 1 °C
DC Source	$\pm 0.05\%$
Radiated Emissions test	± 5.03 dB (Bilog antenna 30M~1000MHz)
	± 4.74 dB (Horn antenna 1000M~25000MHz)
Conducted Spurious Emissions test	± 0.5 dB (9KHz~1000MHz)
	± 1 dB(1000M~26500MHz)

5.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

6 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.4:2003
Frequency Range:	150kHz to 30MHz
Class:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit
Test Results:	N/A
Remark:	This device powered by battery,this test is not applicable.

7 Spurious Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: DA 00-705

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

7.1 EUT Operation :

Operating Environment:

Temperature: 25.5 °C


Humidity: 51 % RH

Atmospheric Pressure: 1012 mbar


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4: 2003.


The test setup for emission measurement below 30MHz.

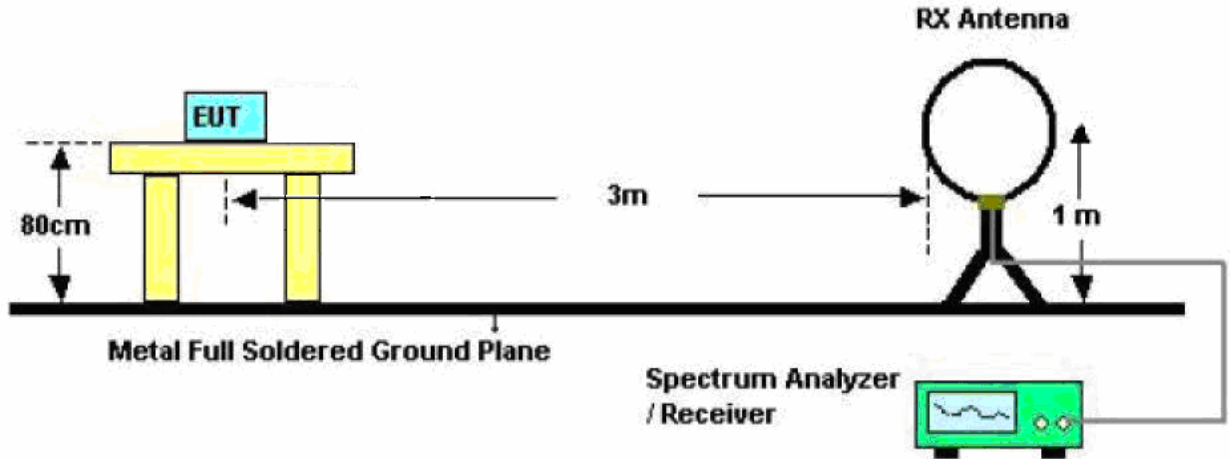

The test setup for emission measurement from 30 MHz to 1 GHz.

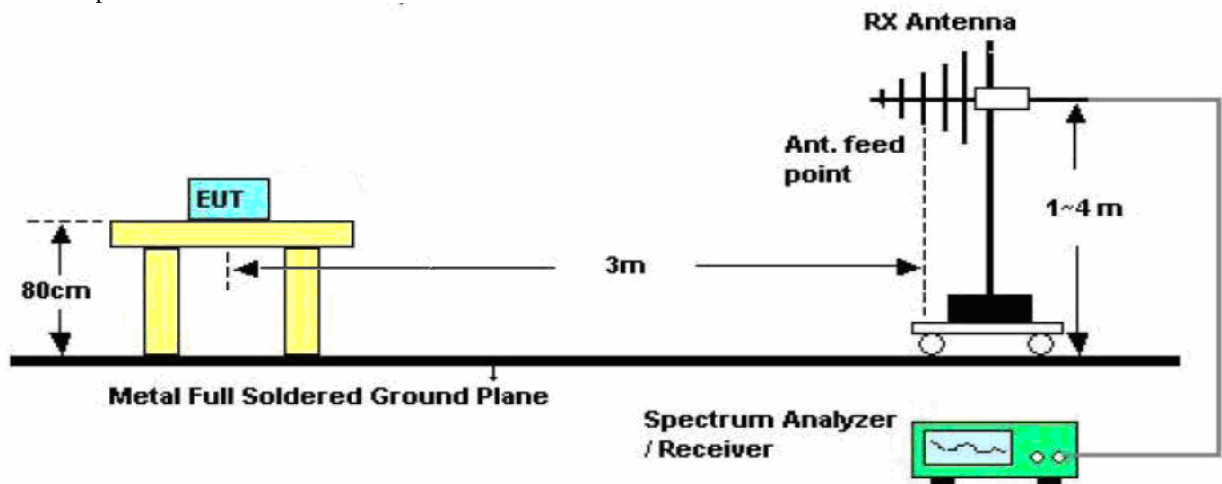

The test setup for emission measurement above 1 GHz.

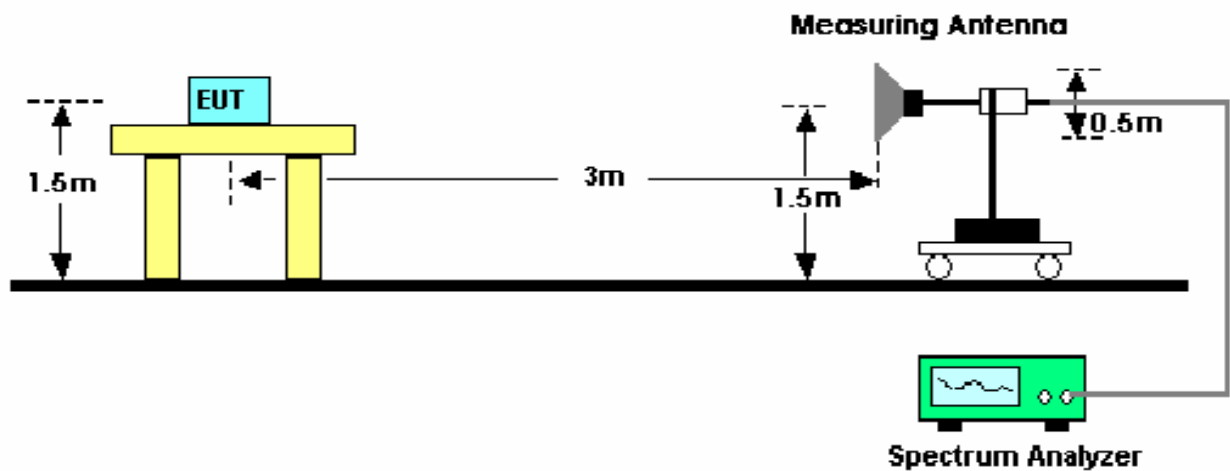

7.3 Spectrum Analyzer Setup

According to FCC Part15 Rules, the system was tested 24MHz to 25000MHz.

Below 30MHz

Sweep SpeedAuto
IF Bandwidth10KHz
Video Bandwidth10KHz
Resolution Bandwidth10KHz

30MHz ~ 1GHz

Sweep SpeedAuto
IF Bandwidth120 KHz
Video Bandwidth100KHz
Quasi-Peak Adapter Bandwidth120 KHz
Quasi-Peak Adapter ModeNormal
Resolution Bandwidth100KHz

Above 1GHz

Sweep SpeedAuto
IF Bandwidth120 KHz
Video Bandwidth3MHz
Quasi-Peak Adapter Bandwidth120 KHz
Quasi-Peak Adapter ModeNormal
Resolution Bandwidth1MHz

7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

7.6 Summary of Test Results


Test Frequency :Below 30MHz

All emissions were more than 20 dB below the limit and therefore not reported


Test Frequency : 30MHz ~ 1000MHz

Test Mode: BT Normal linking

Antenna polarization: Vertical

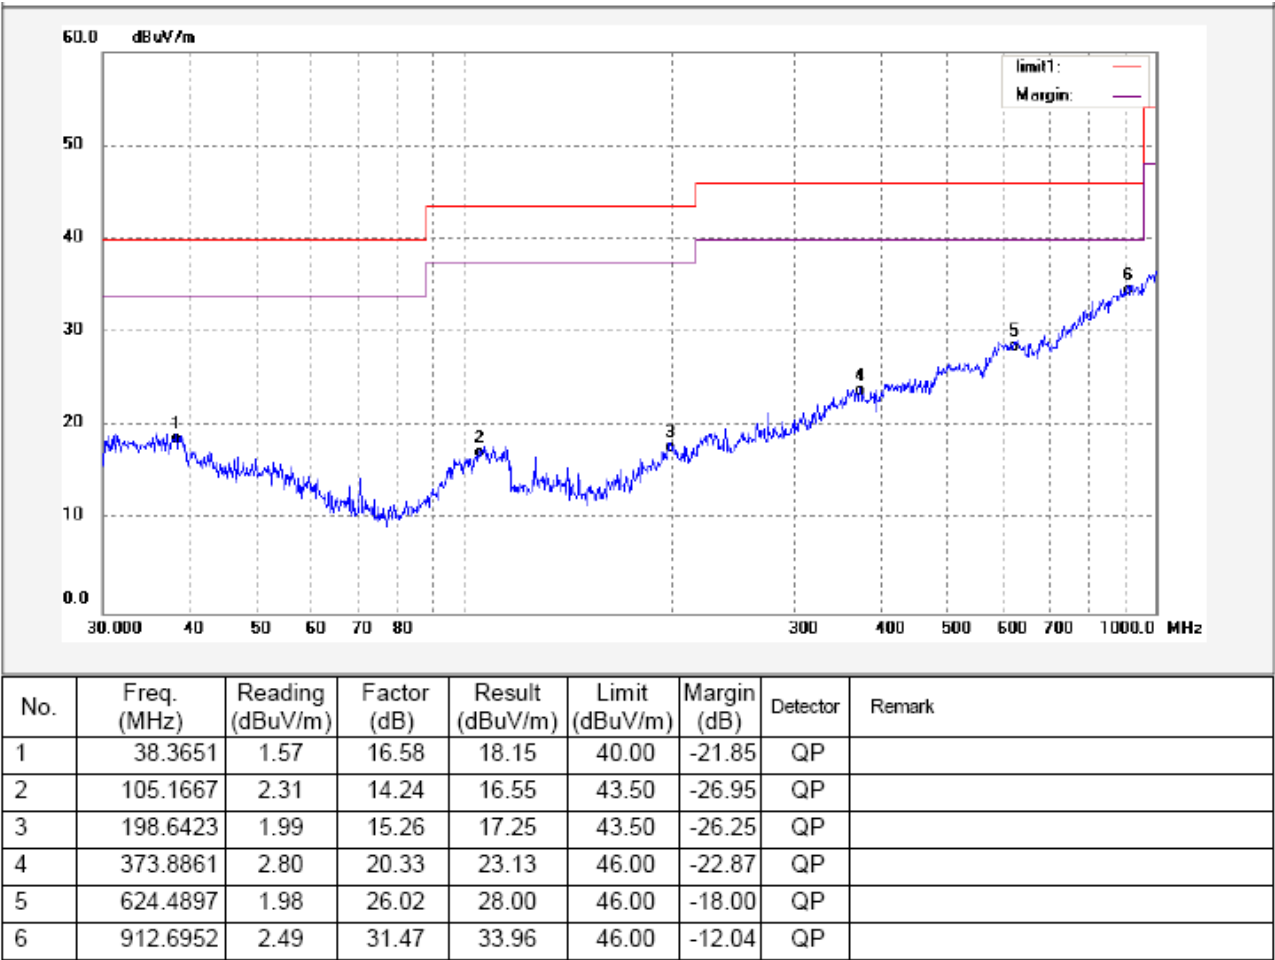

Antenna polarization: Horizontal

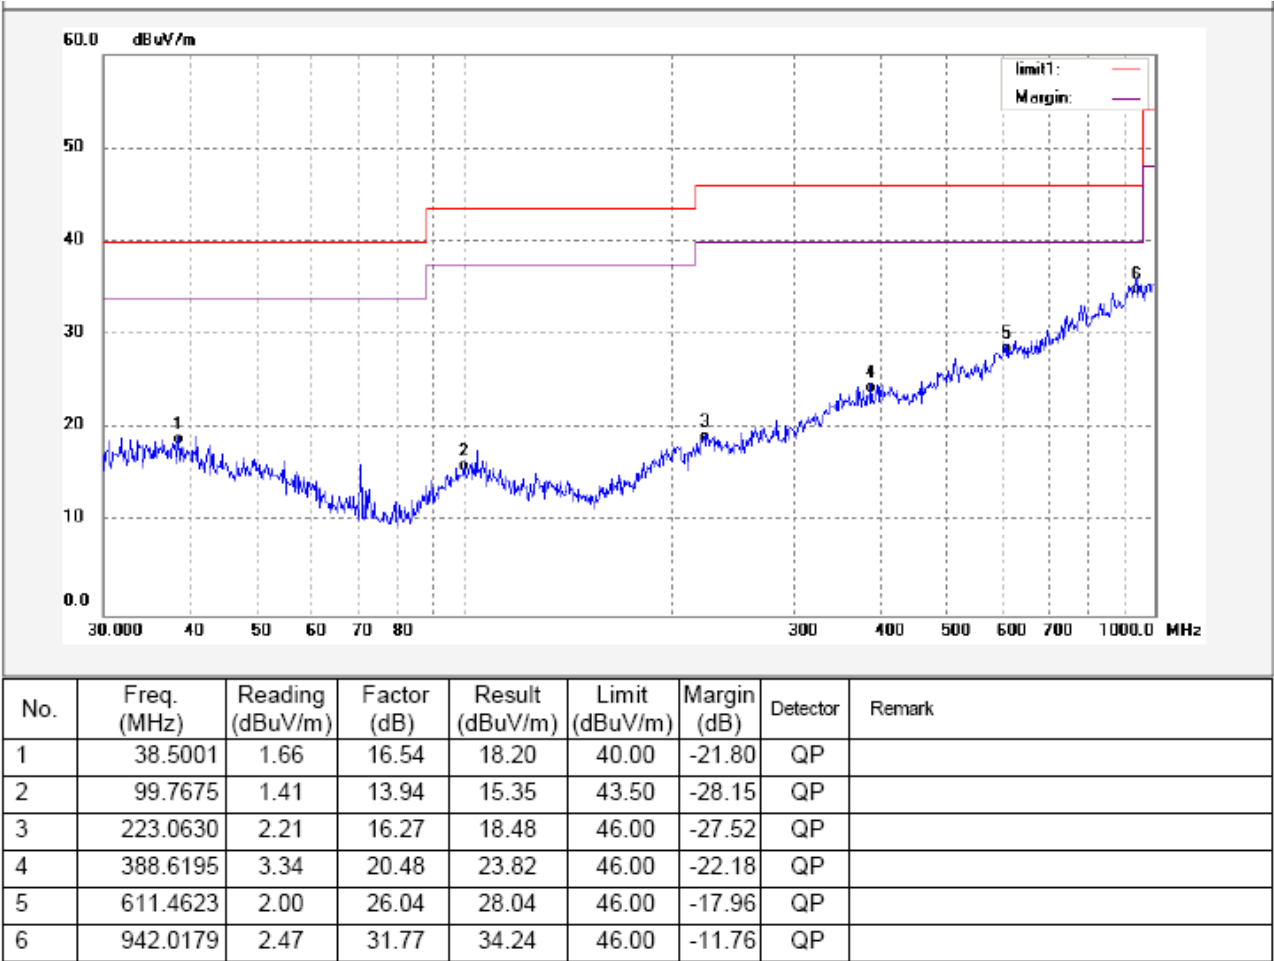


Test Frequency: 1GHz ~ 18GHz

All the modulation modes were tested, the data of the worst mode (GFSK) were recorded in the following pages.

$AV = \text{Peak} + 20\text{Log}_{10}(\text{duty cycle}) = \text{PK} + (-3) = \text{PK} - 3$ [refer to section 9 for more detail]

Test mode: transmitting at lower channel


Antenna polarization: Vertical

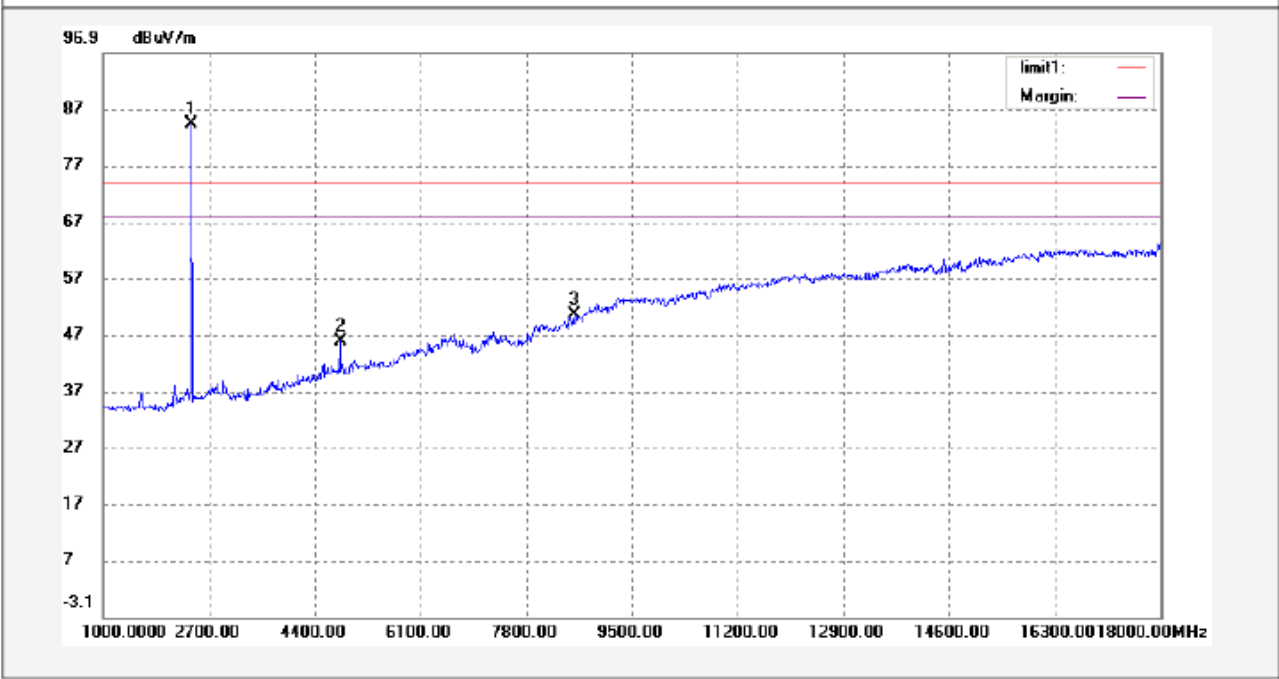

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2402.000	93.67	-9.28	84.39	74.00	10.39	peak	
2	4808.000	48.90	-3.16	45.74	74.00	-28.26	peak	
3	8582.000	44.64	5.90	50.54	74.00	-23.46	peak	


No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2402.000	-3	76.39	54.00	27.39	AV	
2	4808.000	-3	37.74	54.00	-11.26	AV	
3	8582.000	-3	42.54	54.00	-6.46	AV	

Antenna polarization: Horizontal

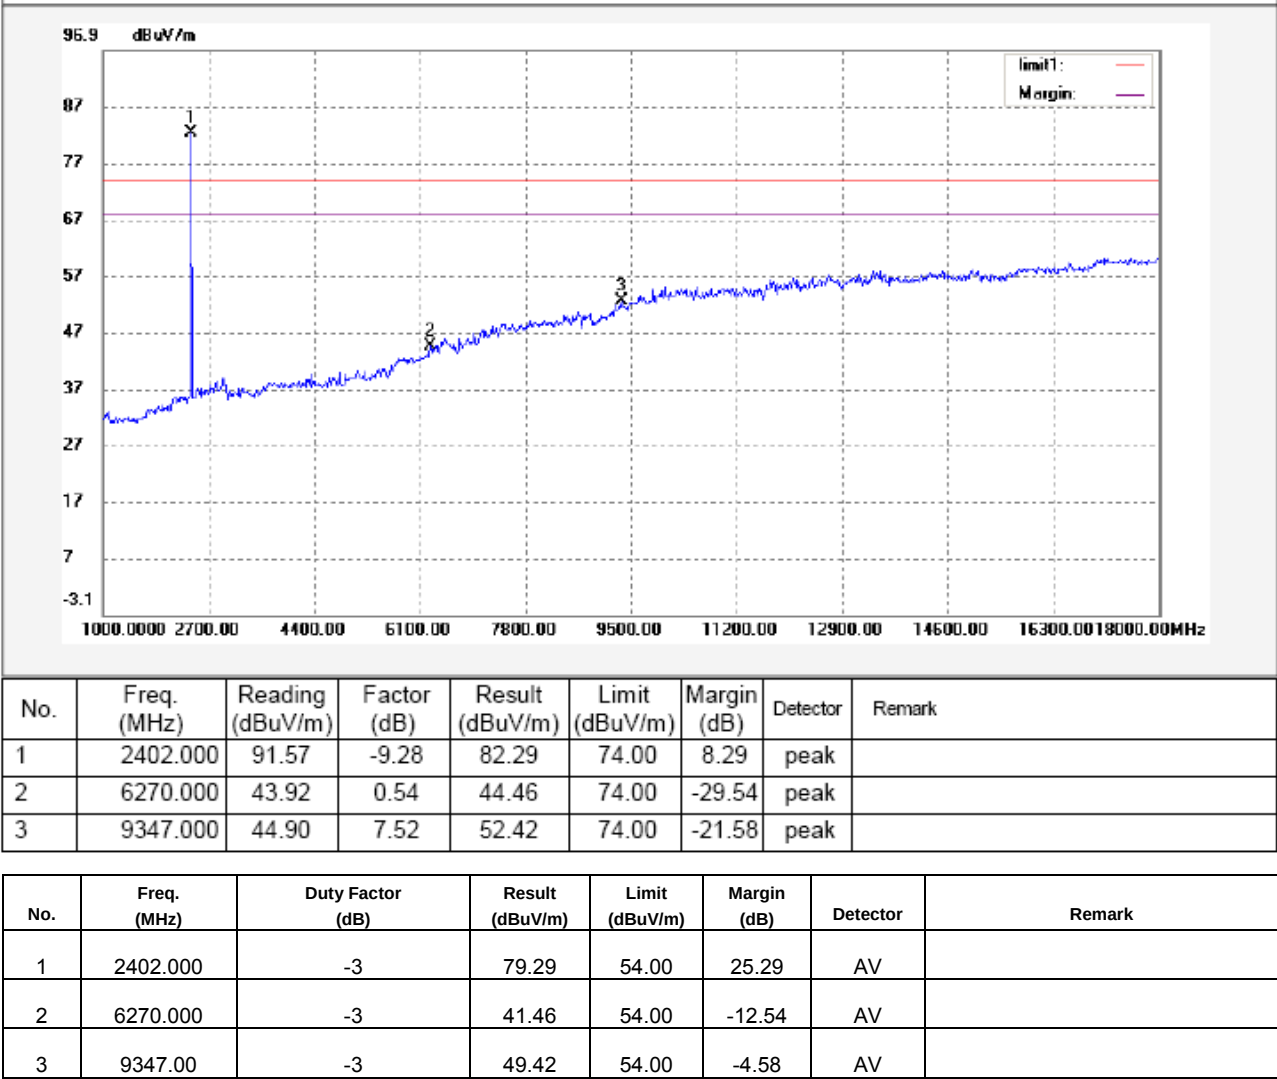


Test mode: transmitting at middle channel

Antenna polarization: Vertical

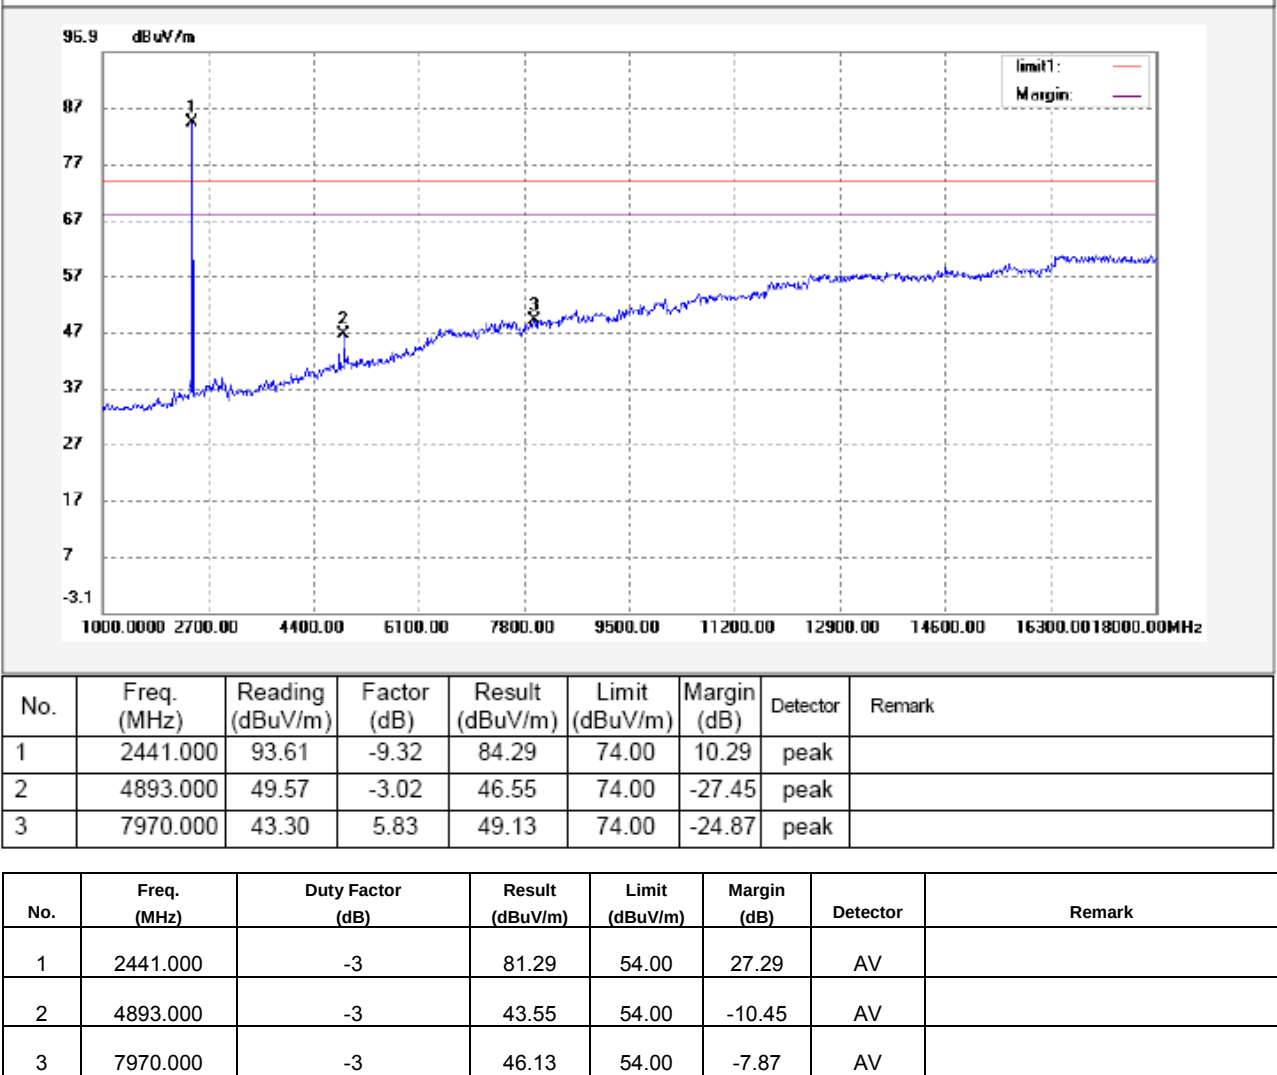

Antenna polarization: Horizontal

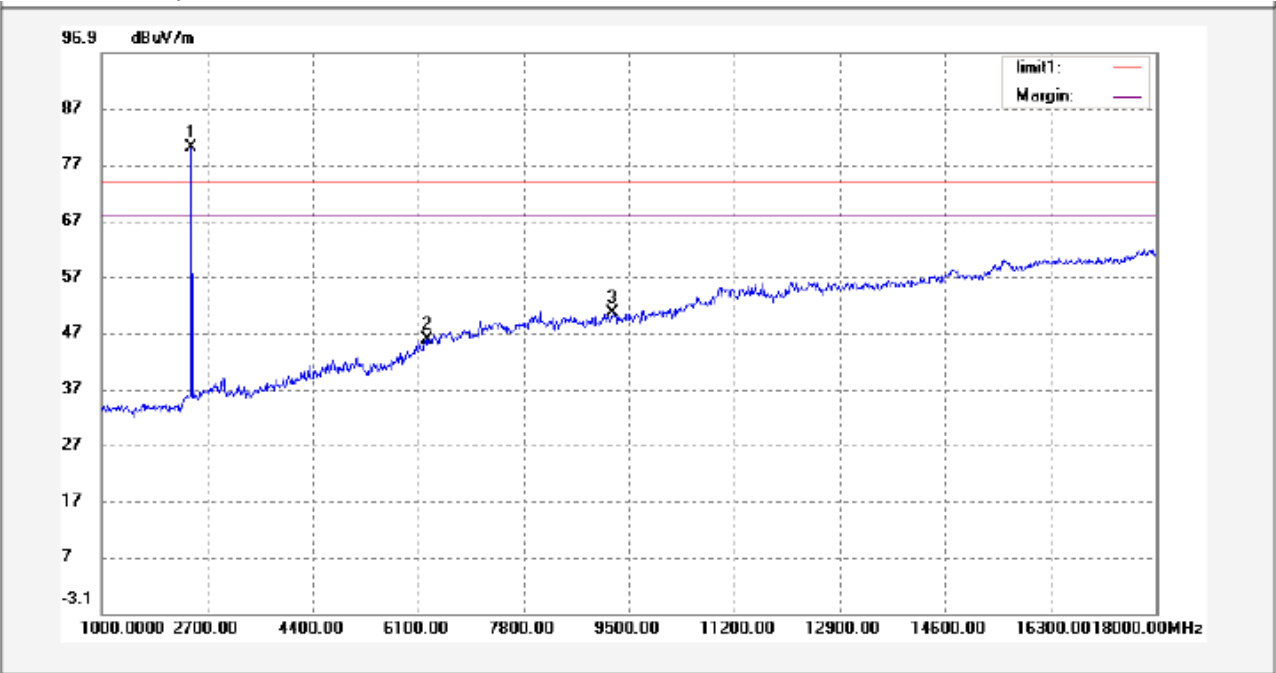


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2441.000	89.33	-9.32	80.01	74.00	6.01	peak	
2	6236.000	45.44	0.36	45.80	74.00	-28.20	peak	
3	9228.000	43.32	7.33	50.65	74.00	-23.35	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2441.000	-3	77.01	54.00	23.01	AV	
2	6236.000	-3	42.80	54.00	-11.2	AV	
3	9228.000	-3	47.65	54.00	-6.35	AV	


Test mode: transmitting at upper channel

Antenna polarization: Vertical

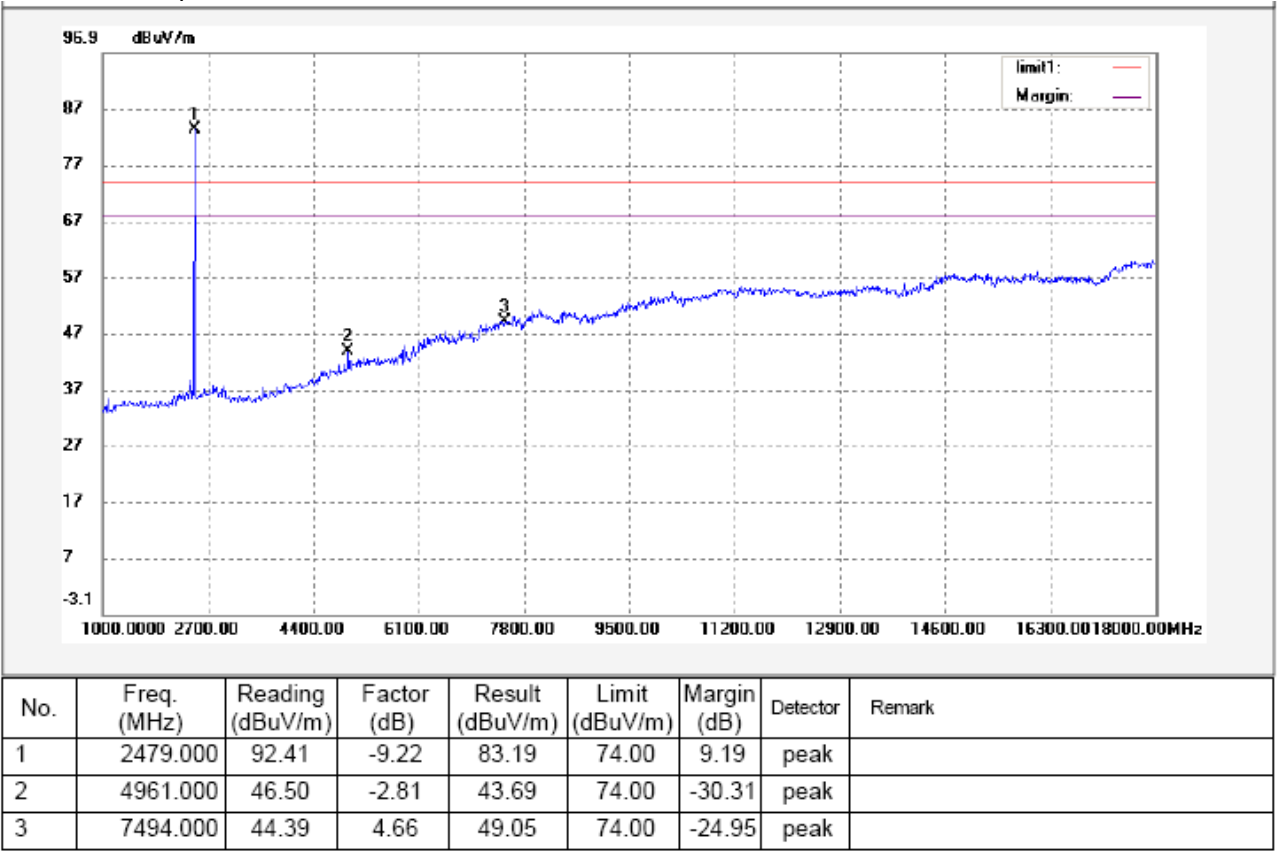

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2479.000	-3	80.19	54.00	26.19	AV	
2	4961.000	-3	40.69	54.00	-13.31	AV	
3	7494.000	-3	46.05	54.00	-7.95	AV	

Antenna polarization: Horizontal

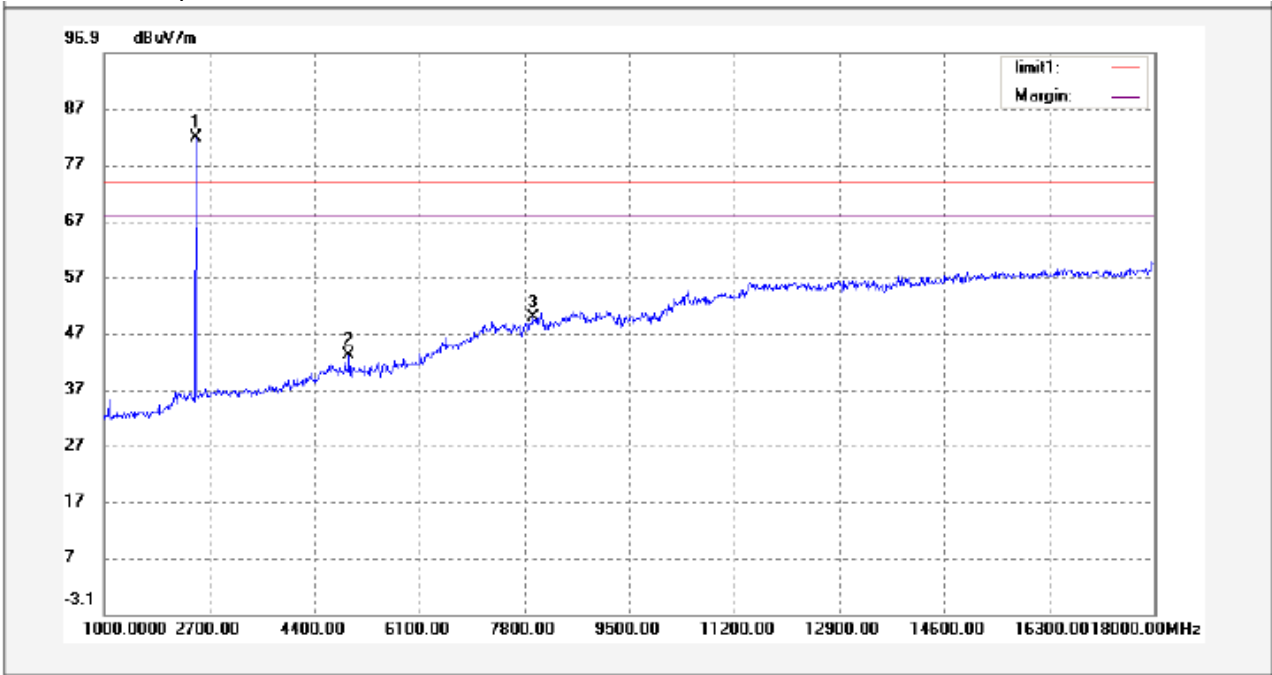


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2479.000	90.98	-9.22	81.76	74.00	7.76	peak	
2	4961.000	45.92	-2.81	43.11	74.00	-30.89	peak	
3	7936.000	43.97	5.70	49.67	74.00	-24.33	peak	


No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2479.000	-3	78.76	54.00	24.76	AV	
2	2483.000	-3	40.11	54.00	-13.89	AV	
3	2500.000	-3	46.67	54.00	-7.33	AV	

Test mode: receiving whole band

Antenna polarization: Vertical

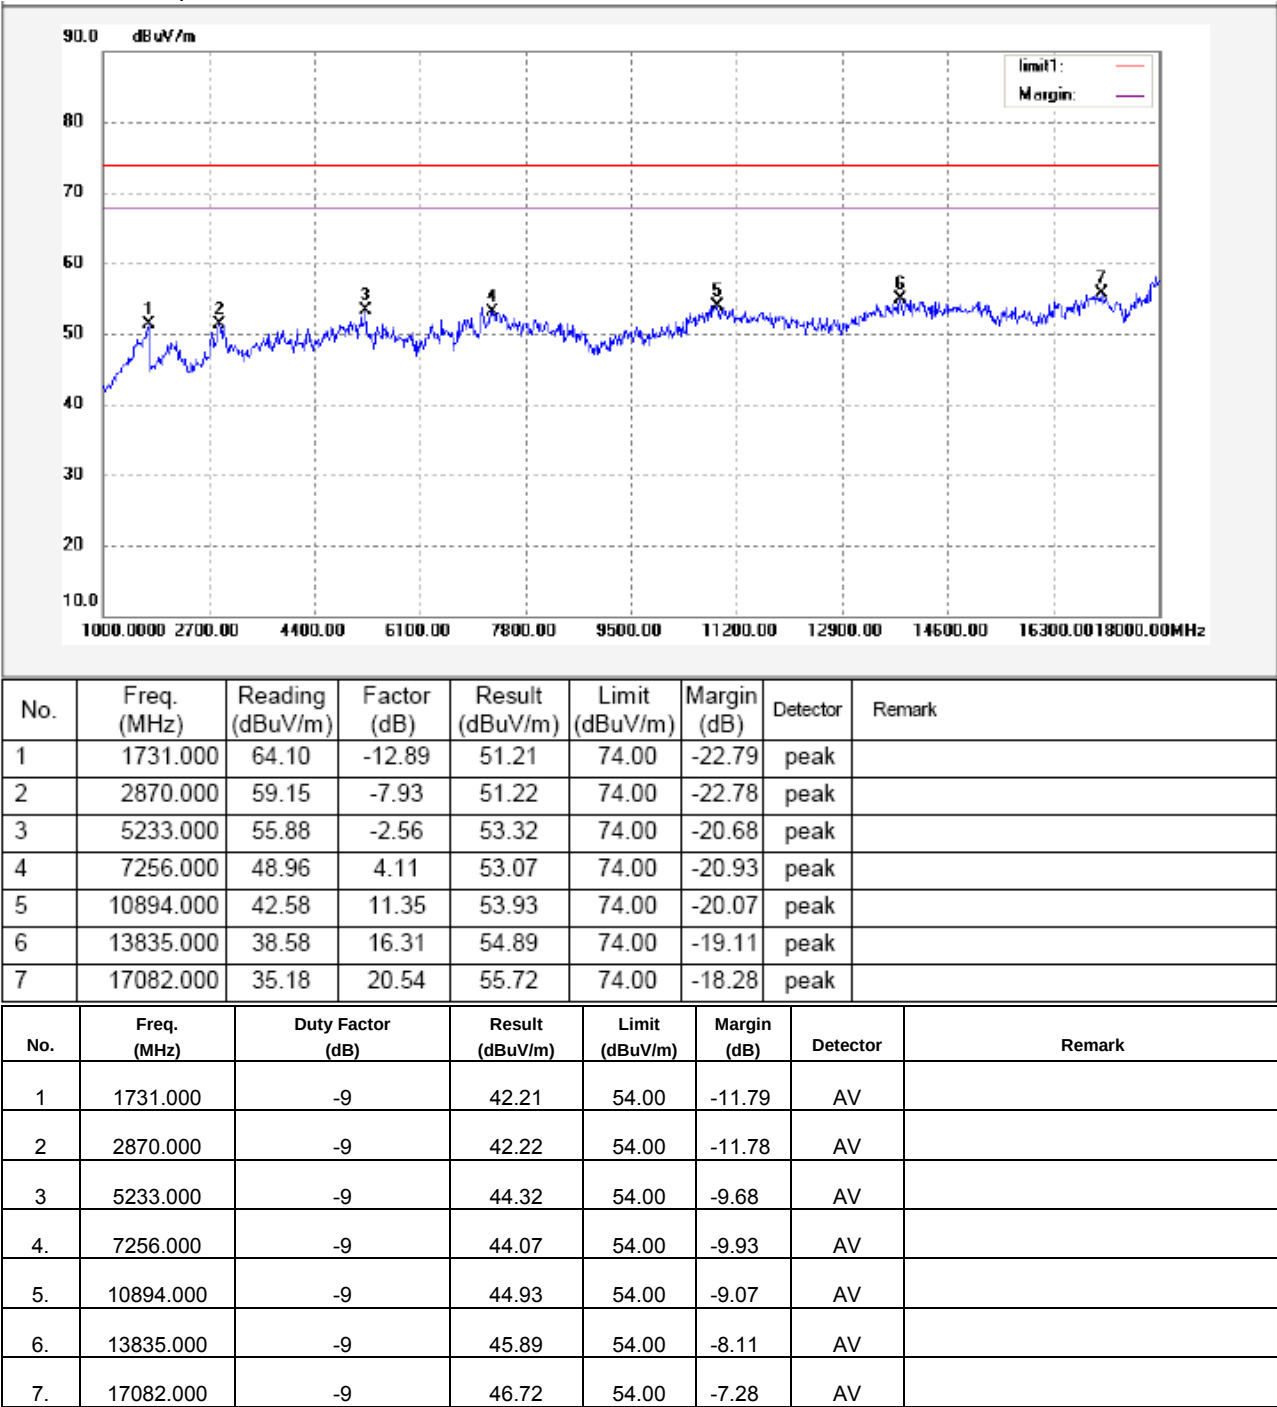

Antenna polarization: Horizontal

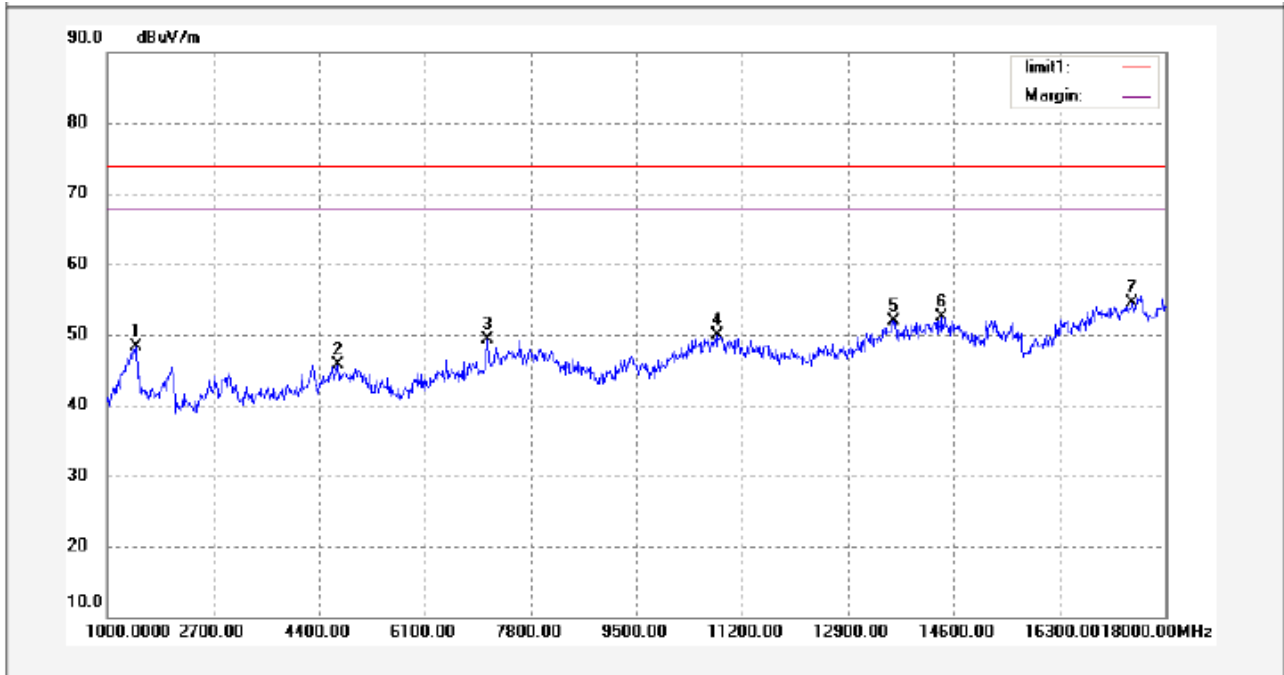

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1459.000	61.19	-12.94	48.25	74.00	-25.75	peak	
2	4706.000	49.24	-3.46	45.78	74.00	-28.22	peak	
3	7103.000	45.83	3.44	49.27	74.00	-24.73	peak	
4	10809.000	38.91	11.02	49.93	74.00	-24.07	peak	
5	13631.000	36.22	15.63	51.85	74.00	-22.15	peak	
6	14396.000	34.15	18.38	52.53	74.00	-21.47	peak	
7	17473.000	31.71	22.70	54.41	74.00	-19.59	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1459.000	-9	39.25	54.00	-14.75	AV	
2	4706.000	-9	36.78	54.00	-17.22	AV	
3	7103.000	-9	40.27	54.00	-13.73	AV	
4	10809.000	-9	40.93	54.00	-13.07	AV	
5	13631.000	-9	42.85	54.00	-11.15	AV	
6	14396.000	-9	43.53	54.00	-10.47	AV	
7	17473.000	-9	45.41	54.00	-8.59	AV	

Test Frequency :Above 18GHz

All emissions were more than 20 dB below the limit and therefore not reported

8 Spurious RF Conducted Emissions from out of band

Test Requirement: FCC Part 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Method: DA 00-705

Test Status: TX mode

8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set to span from the lowest frequency generated in the device up to and including the tenth harmonic of the highest fundamental frequency.
3. Set RBW = 100kHz and VBW = 300kHz.Sweep =auto.
4. mark the worst point and record.

8.2 Test Result



Test Frequency: Below 30MHz

Remark: For emissions below 30MHz,no emission higher than background level, so the data does not show in the report.



Test Frequency: 30MHz ~ 25GHz

Test result plots shown as follows:



Modulation:GFSK
Lower Channel

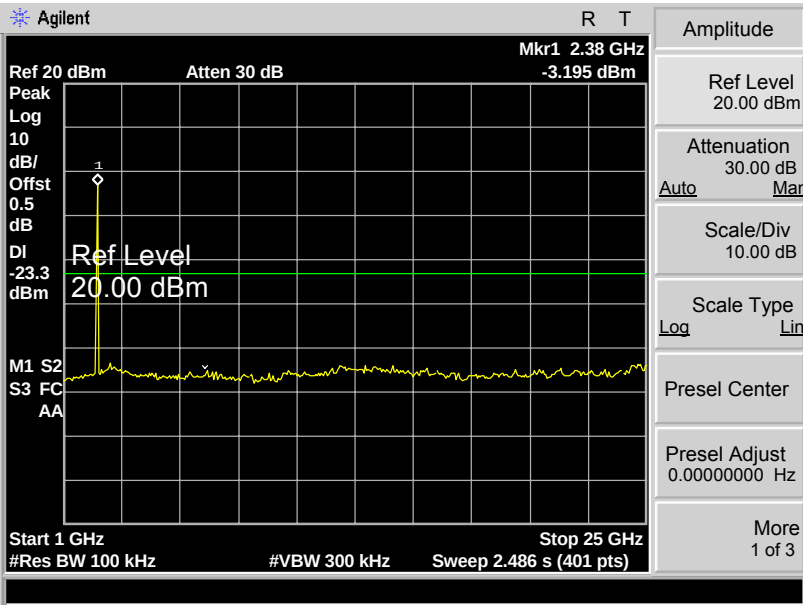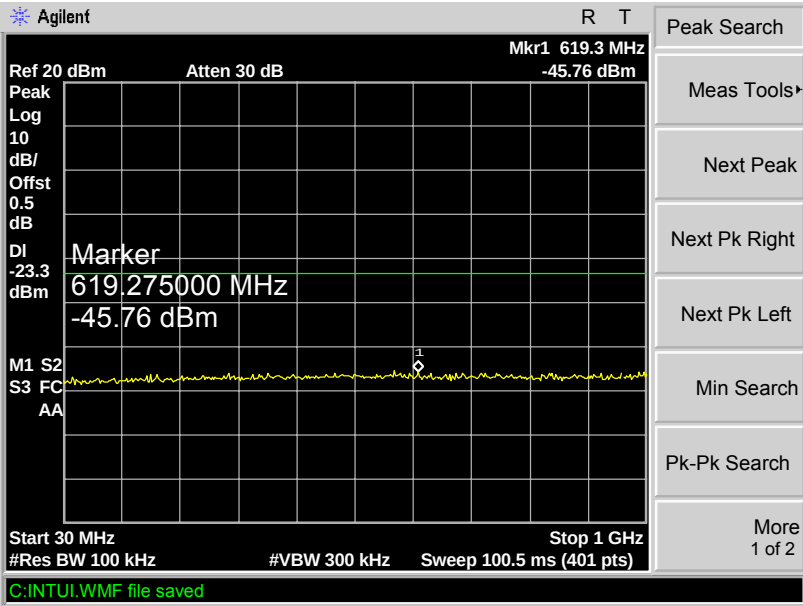

Middle Channel

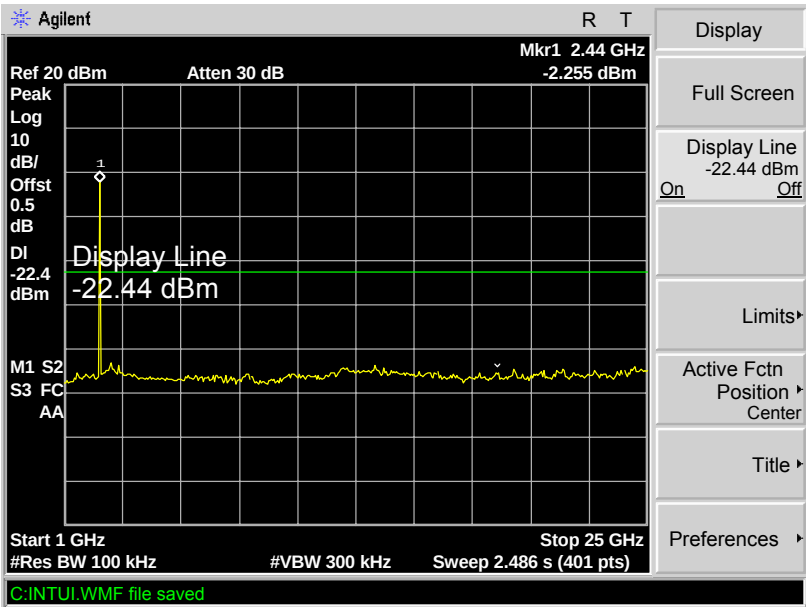
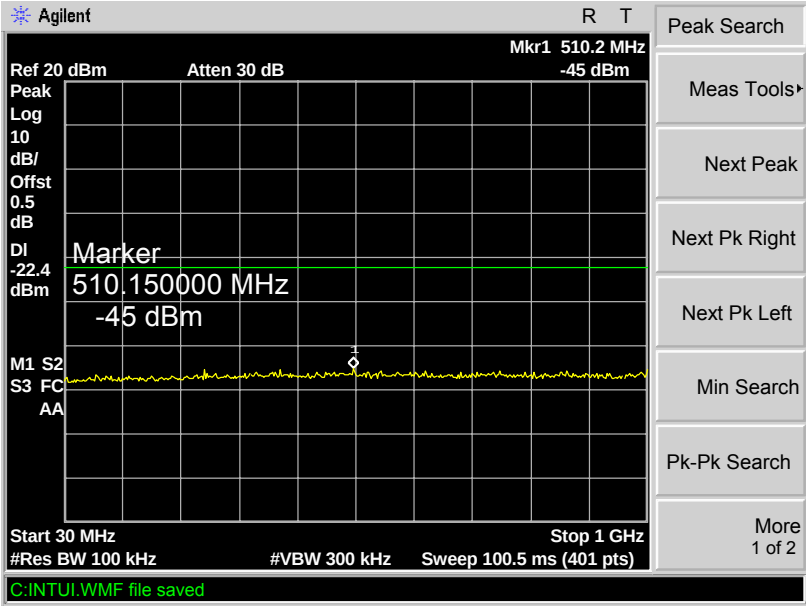




Upper Channel

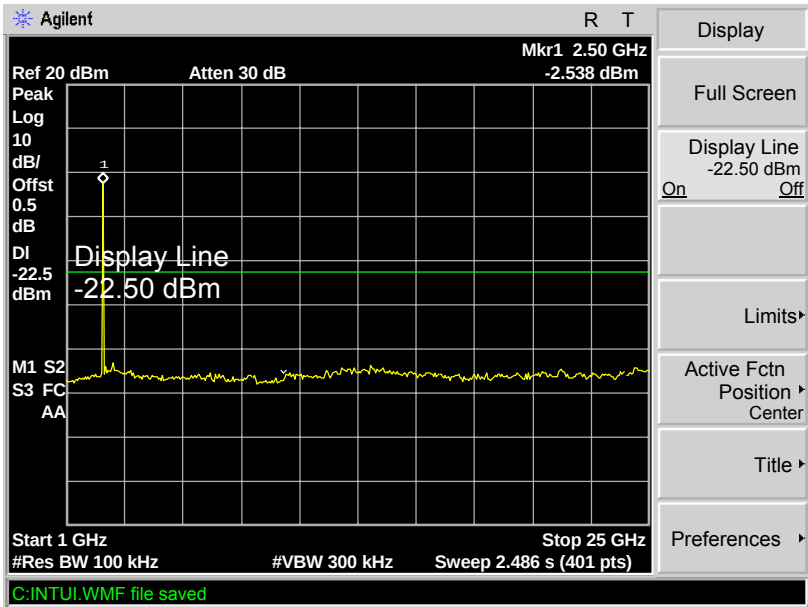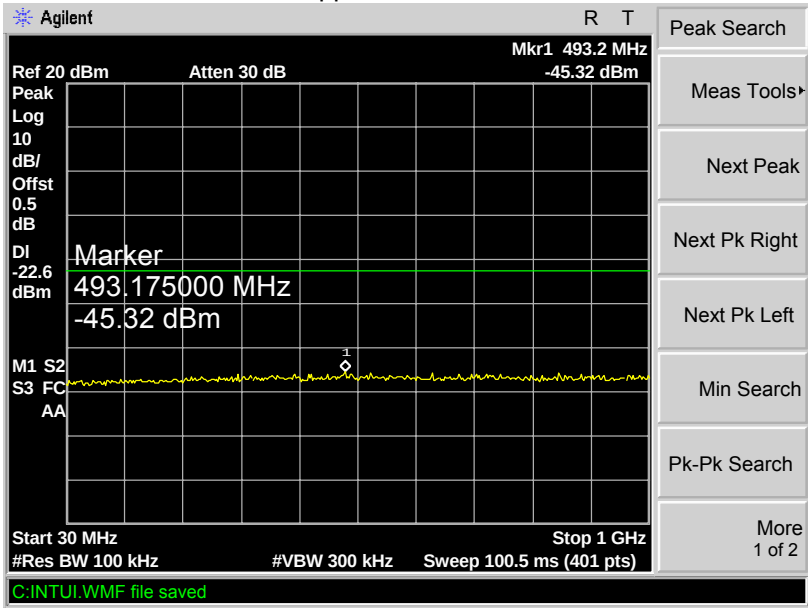



Modulation: Pi/4DQPSK

Lower Channel

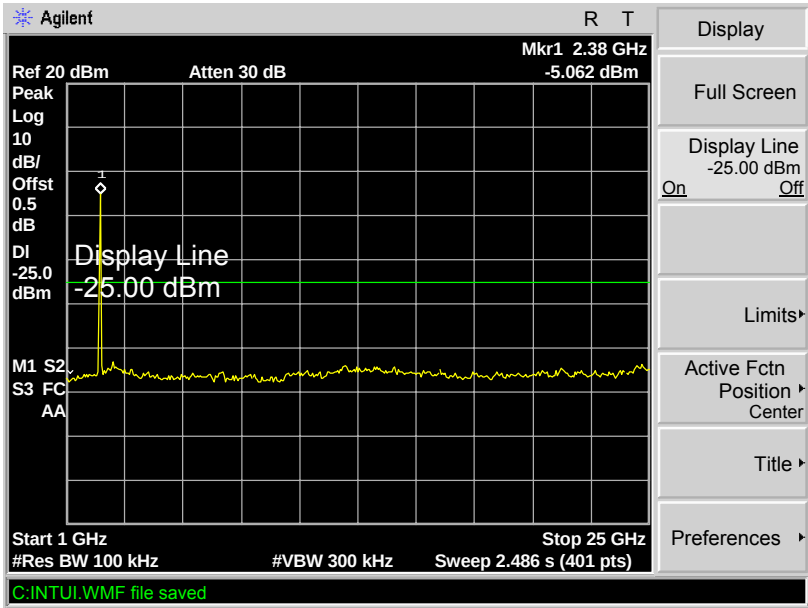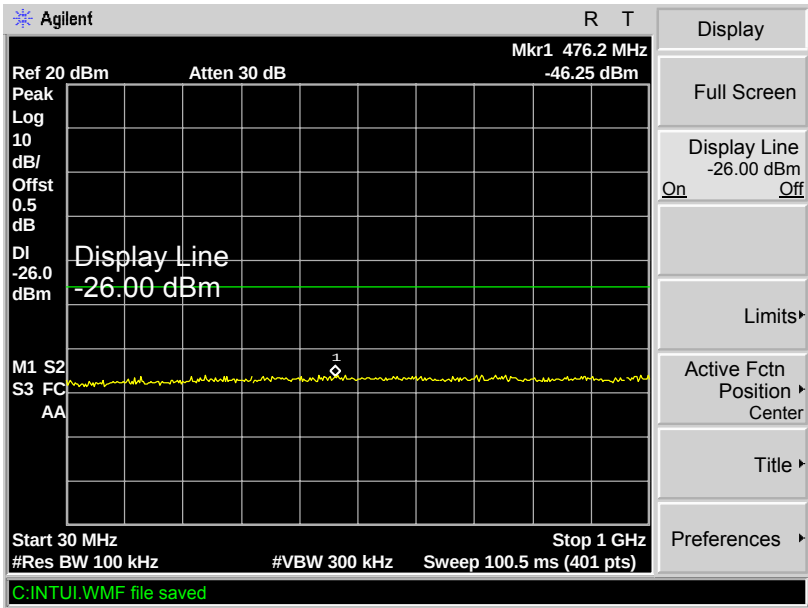

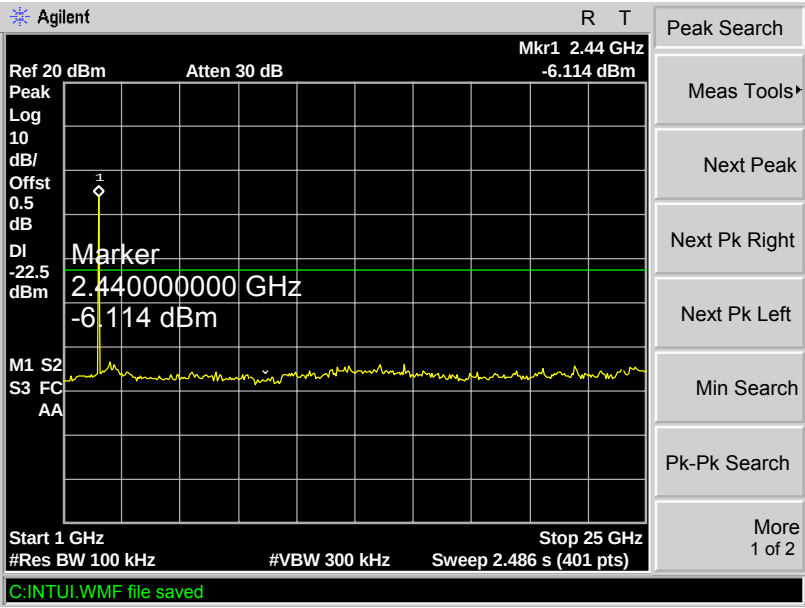
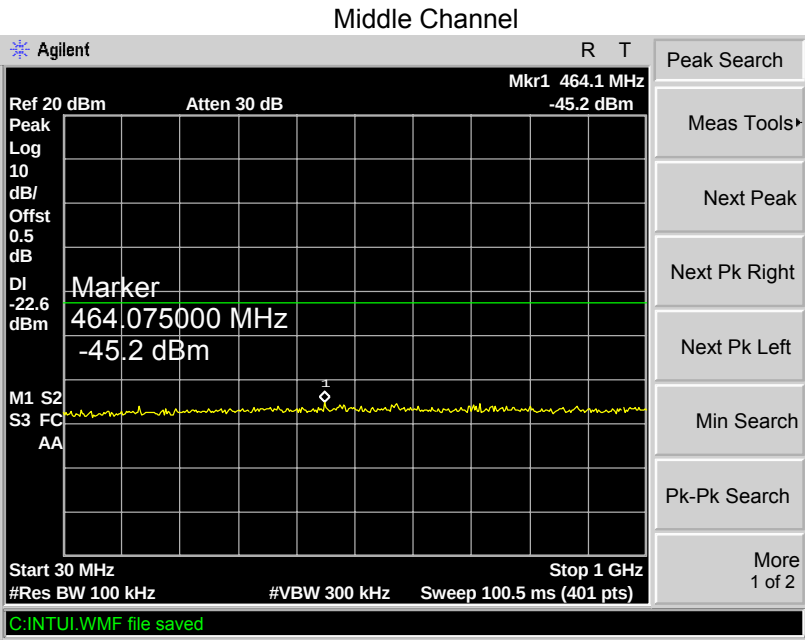




Upper Channel

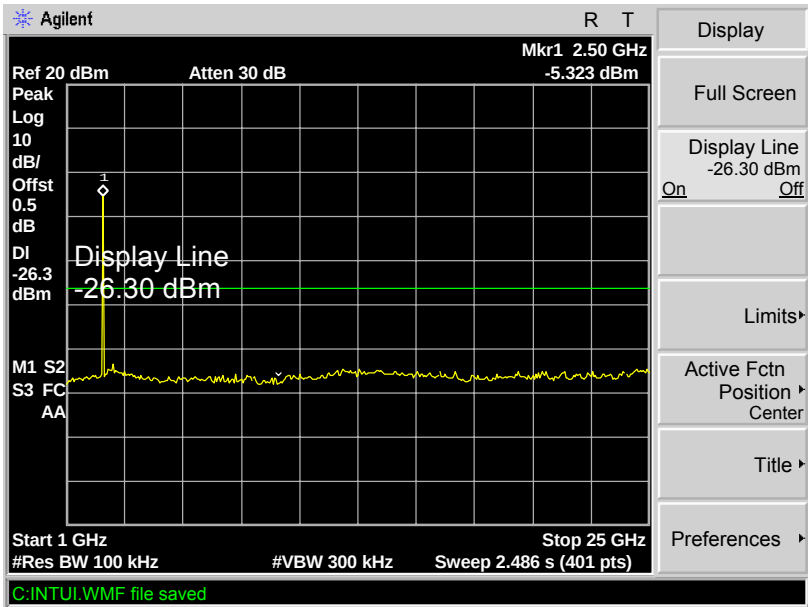
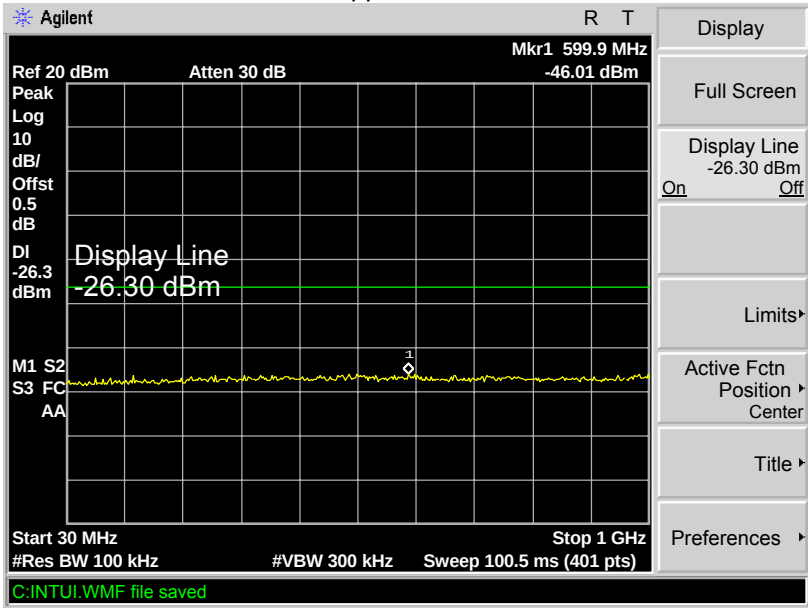


Modulation: 8DPSK

Lower Channel

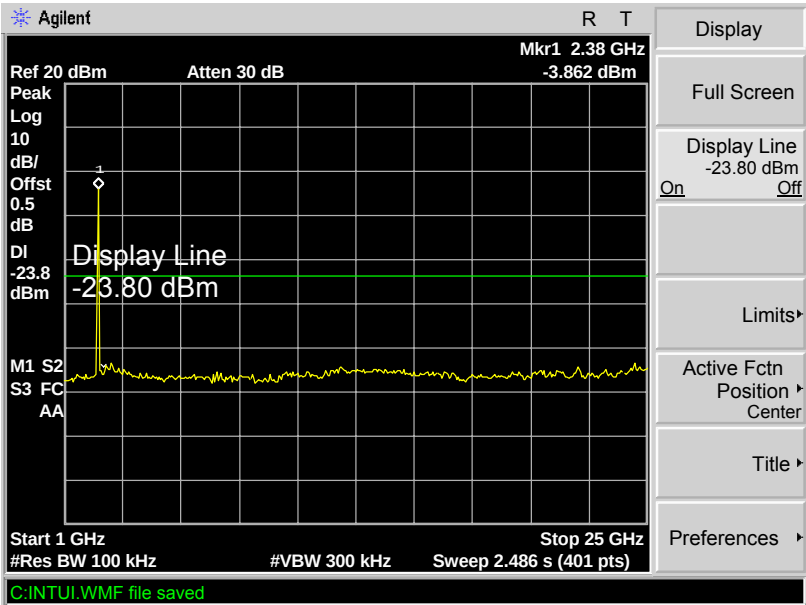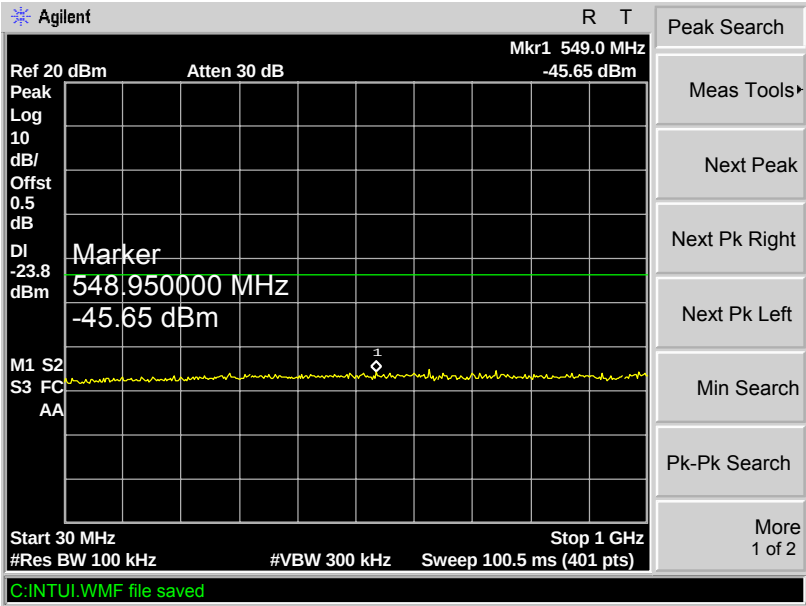

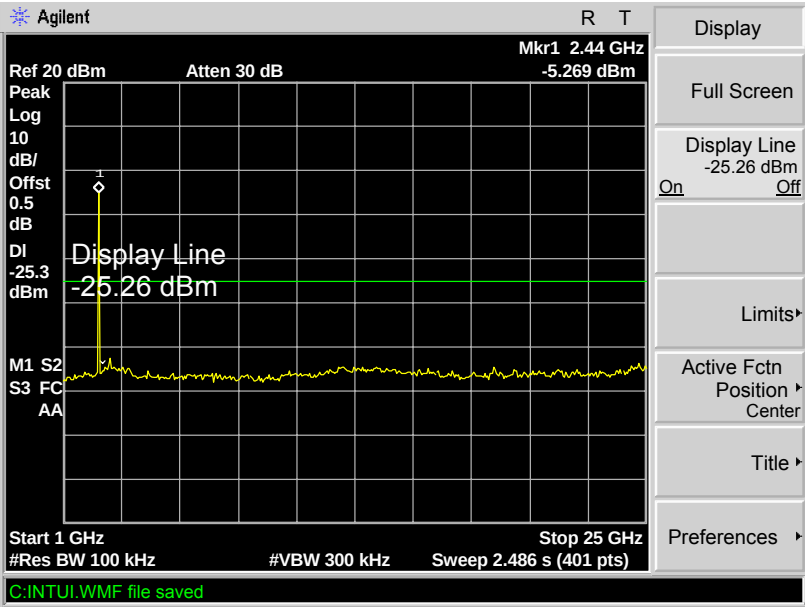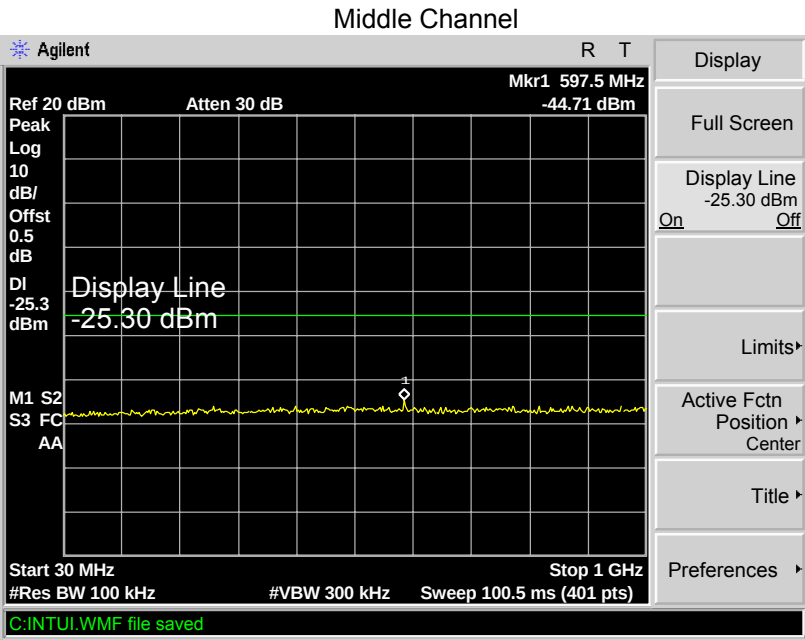

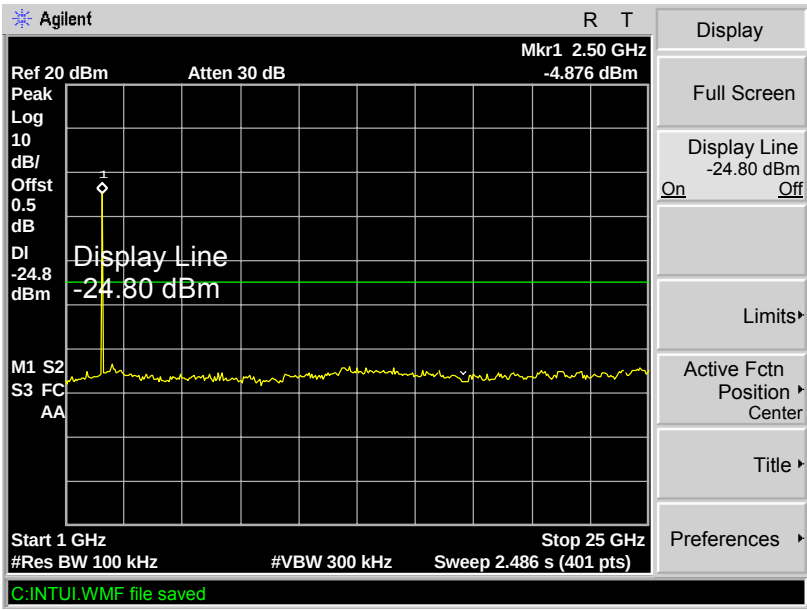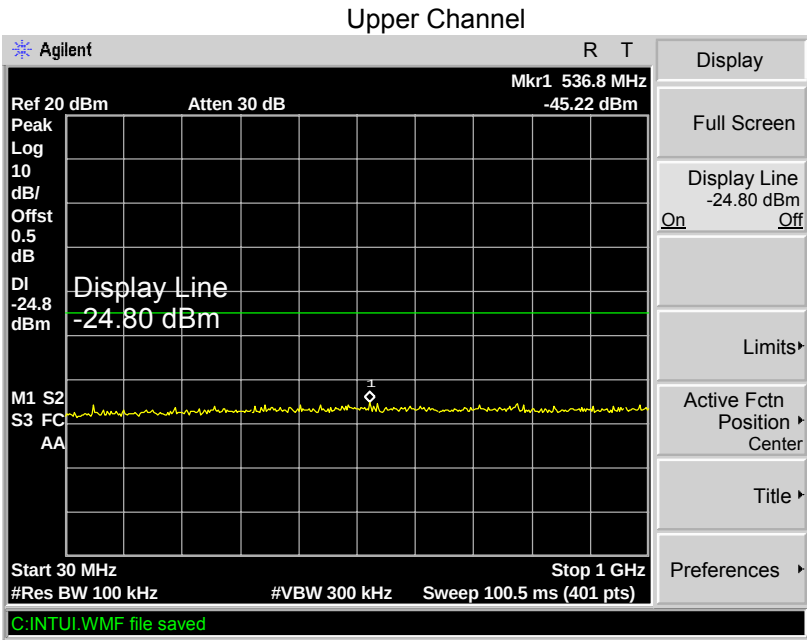

9 Duty Cycle


Test Requirement: FCC Part 15.35
Test Mothed: ANSI C63.4:2003
Test Status: TX mode.

9.1 Test Procedure


1. The EUT was placed on a turntable which is 0.8m above ground plane
2. Set EUT as normal wrking mode
3. Set SPA center frequency = fundamental frequency, RBW = 1 MHz, VBW = 1 MHz, Span = 0 Hz, Adjacent sweep time.

9.2 Test Result

(a) transmission period is 2.54ms

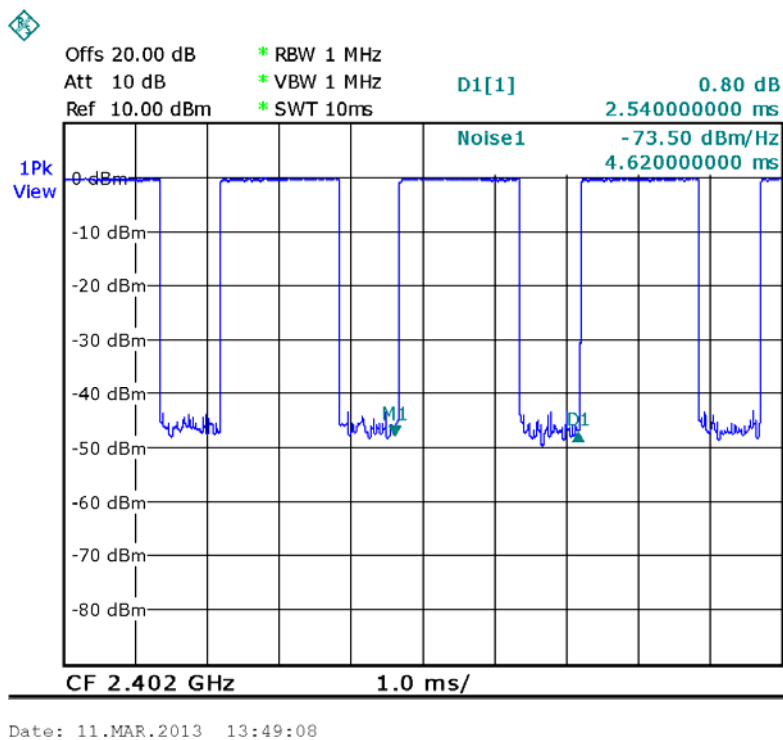

(b)Single pulse time is 1.76ms

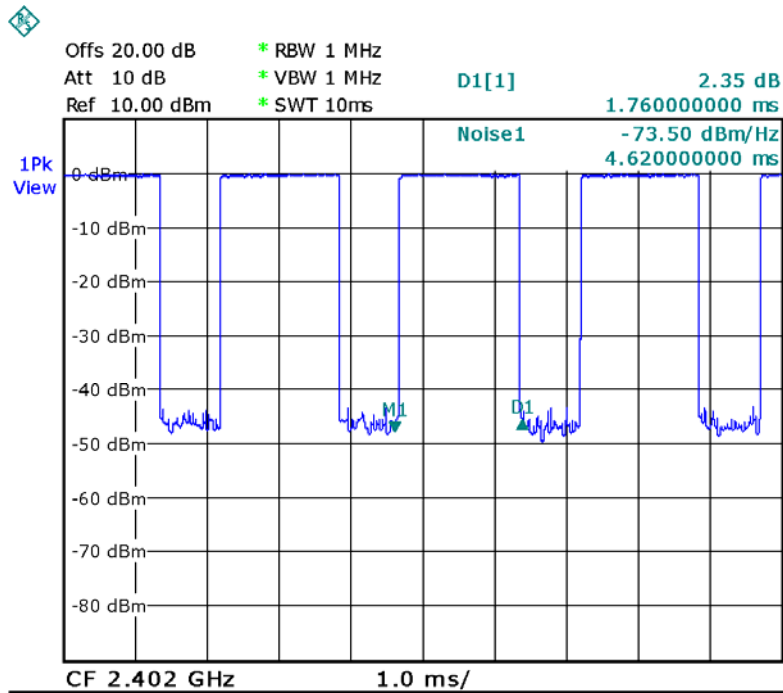

Date: 11.MAR.2013 13:48:34

The EUT is auto. operation for transmitter, it is declared by the manufacturer as a duty cycle ratio of less than 100%.

The EUT's work time : T_{on} = pulse time = 1.76 ms

The EUT's work period : $T = T_{ON} + T_{OFF}$ = transmission period = 2.54 ms

The EUT's duty cycle : $D = T_{on} / T = 1.76 / 2.54 * 100\% = 69.3\%$

Duty Cycle Correction Factor(dB) = $20 * \log_{10}(\text{Duty Cycle}) = 20 * \log_{10}(69.3\%)$

= -3dB

10 Band Edge Measurement


Test Requirement:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	DA 00-705
Limit:	40.0 dBuV/m between 30MHz & 88MHz; 43.5 dBuV/m between 88MHz & 216MHz; 46.0 dBuV/m between 216MHz & 960MHz; 54.0 dBuV/m above 960MHz. 74.0 dBuV/m for peak above 1GHz 54.0 dBuV/m for AVG above 1GHz

10.1 Test Procedure


1. The EUT was placed on a turntable which is 0.8m above ground plane
2. Measurement Distance is 3m
3. Detector:
 - For Peak value:
RBW = 1 MHz for $f \geq 1$ GHz
VBW $\geq$ RBW; Sweep = auto
Detector function = peak
Trace = max hold
 - For AVG value:
RBW = 1 MHz for $f \geq 1$ GHz
VBW = 10Hz; Sweep = auto
Detector function = AVG
Trace = max hold

10.2 Test Result:

Lower Channel – Peak, Vertical

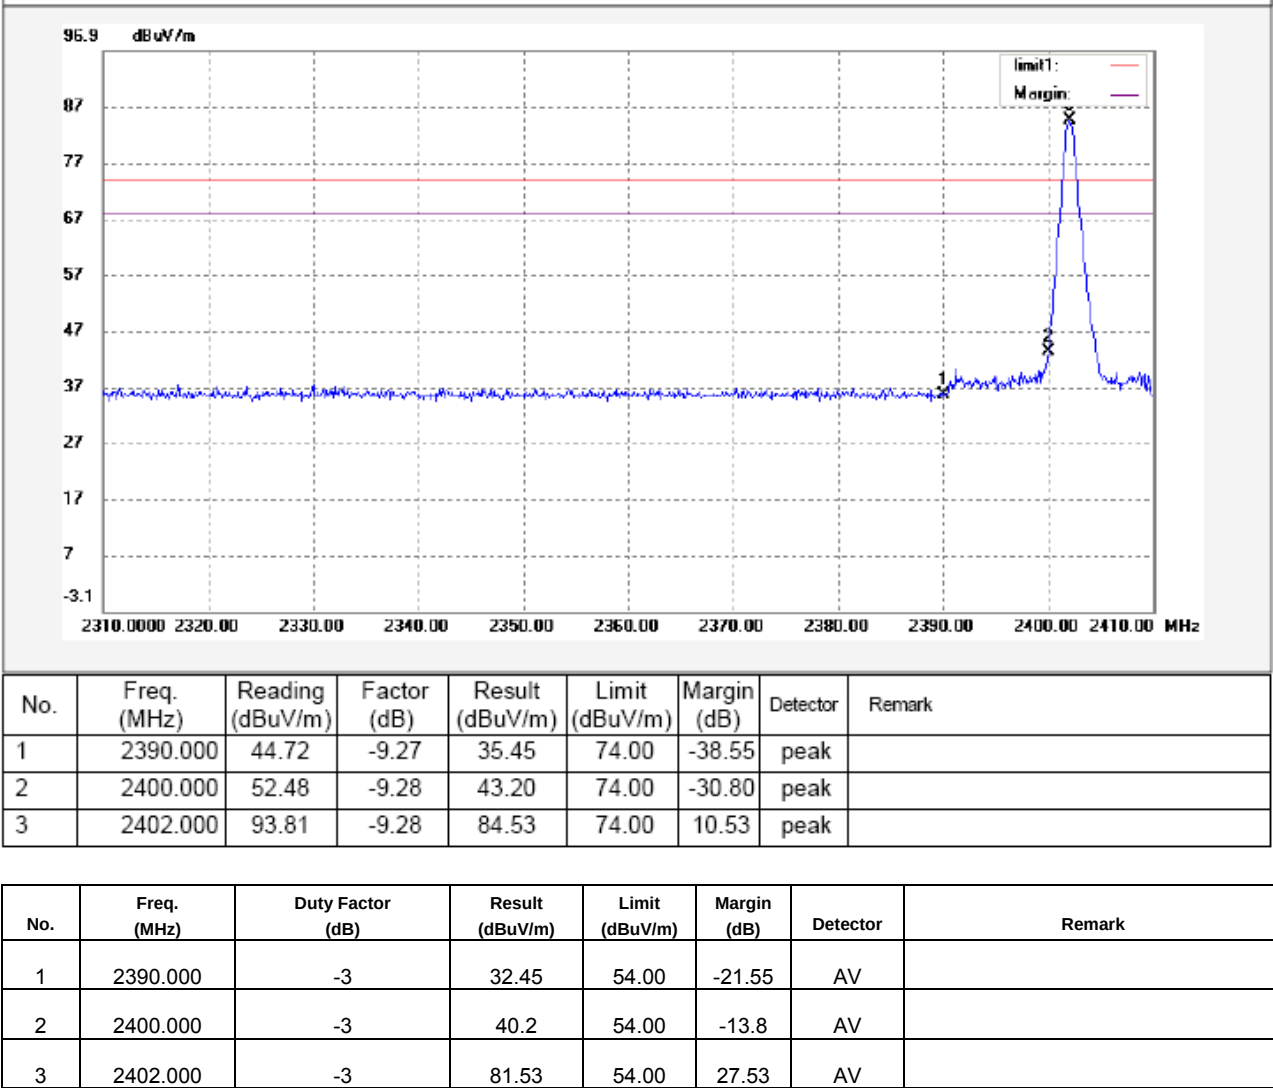


Lower Channel – Peak, Horizontal

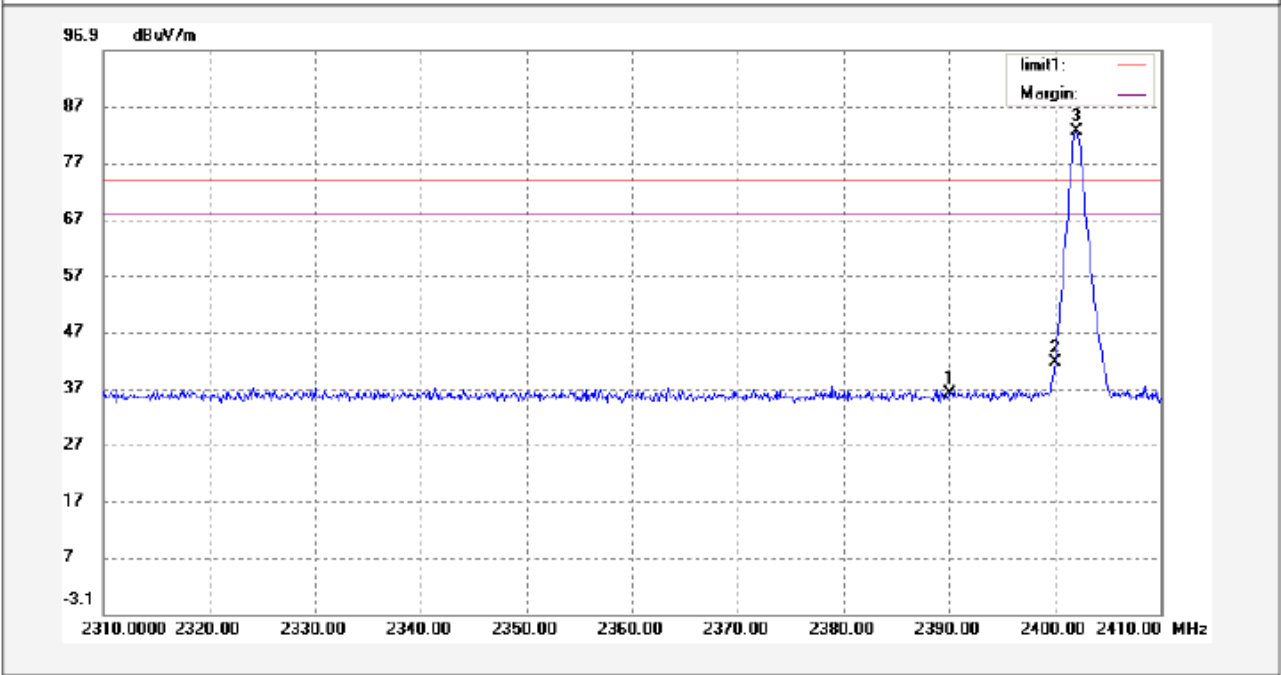

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2390.000	45.19	-9.27	35.92	74.00	-38.08	peak	
2	2400.000	50.78	-9.28	41.50	74.00	-32.50	peak	
3	2402.000	91.91	-9.28	82.63	74.00	8.63	peak	


No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2390.000	-3	32.92	54.00	-21.08	AV	
2	2400.000	-3	38.50	54.00	-15.5	AV	
3	2402.000	-3	79.63	54.00	25.63	AV	

Upper Channel – Peak, Vertical

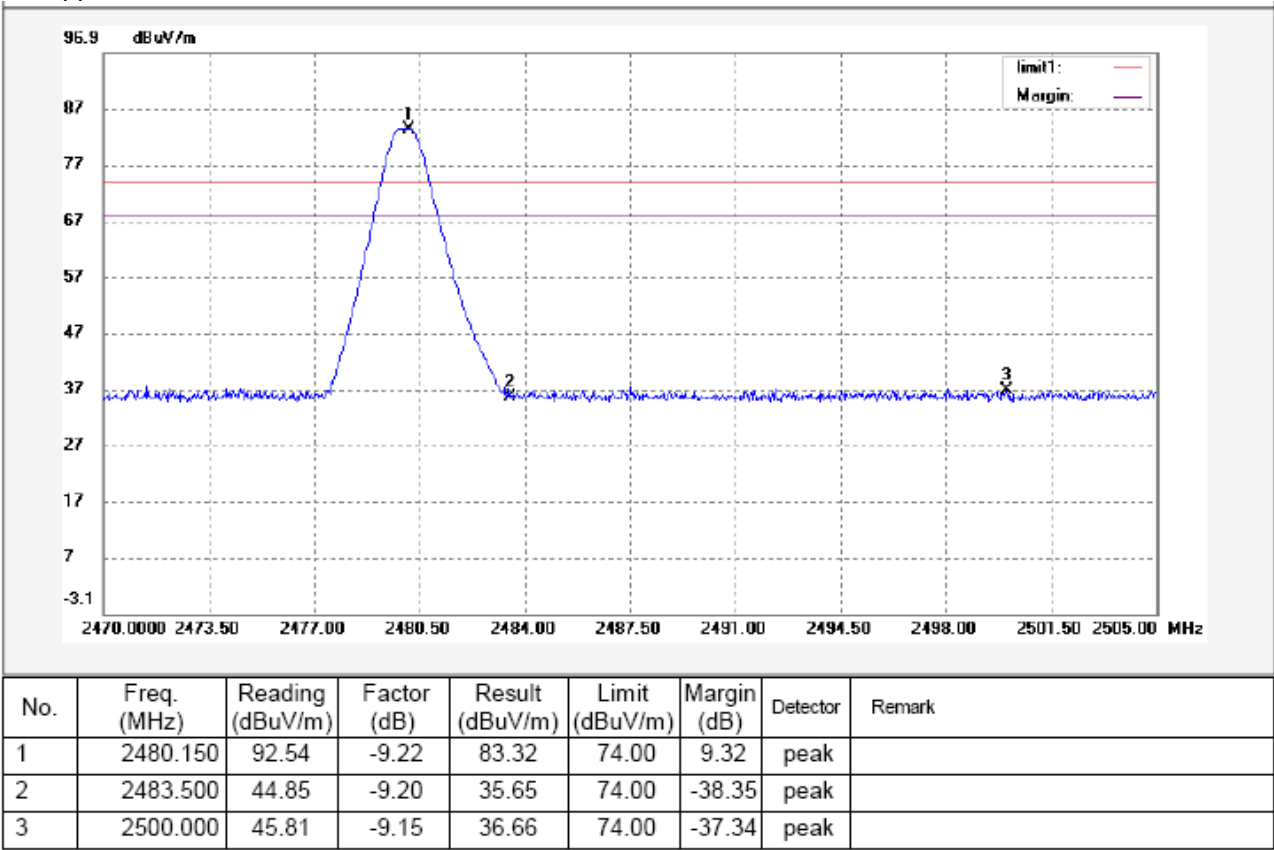

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2480.150	-3	80.32	54.00	26.32	AV	
2	2483.500	-3	32.65	54.00	-21.35	AV	
3	2500.00	-3	33.66	54.00	-20.34	AV	

Upper Channel – Peak, Horizontal

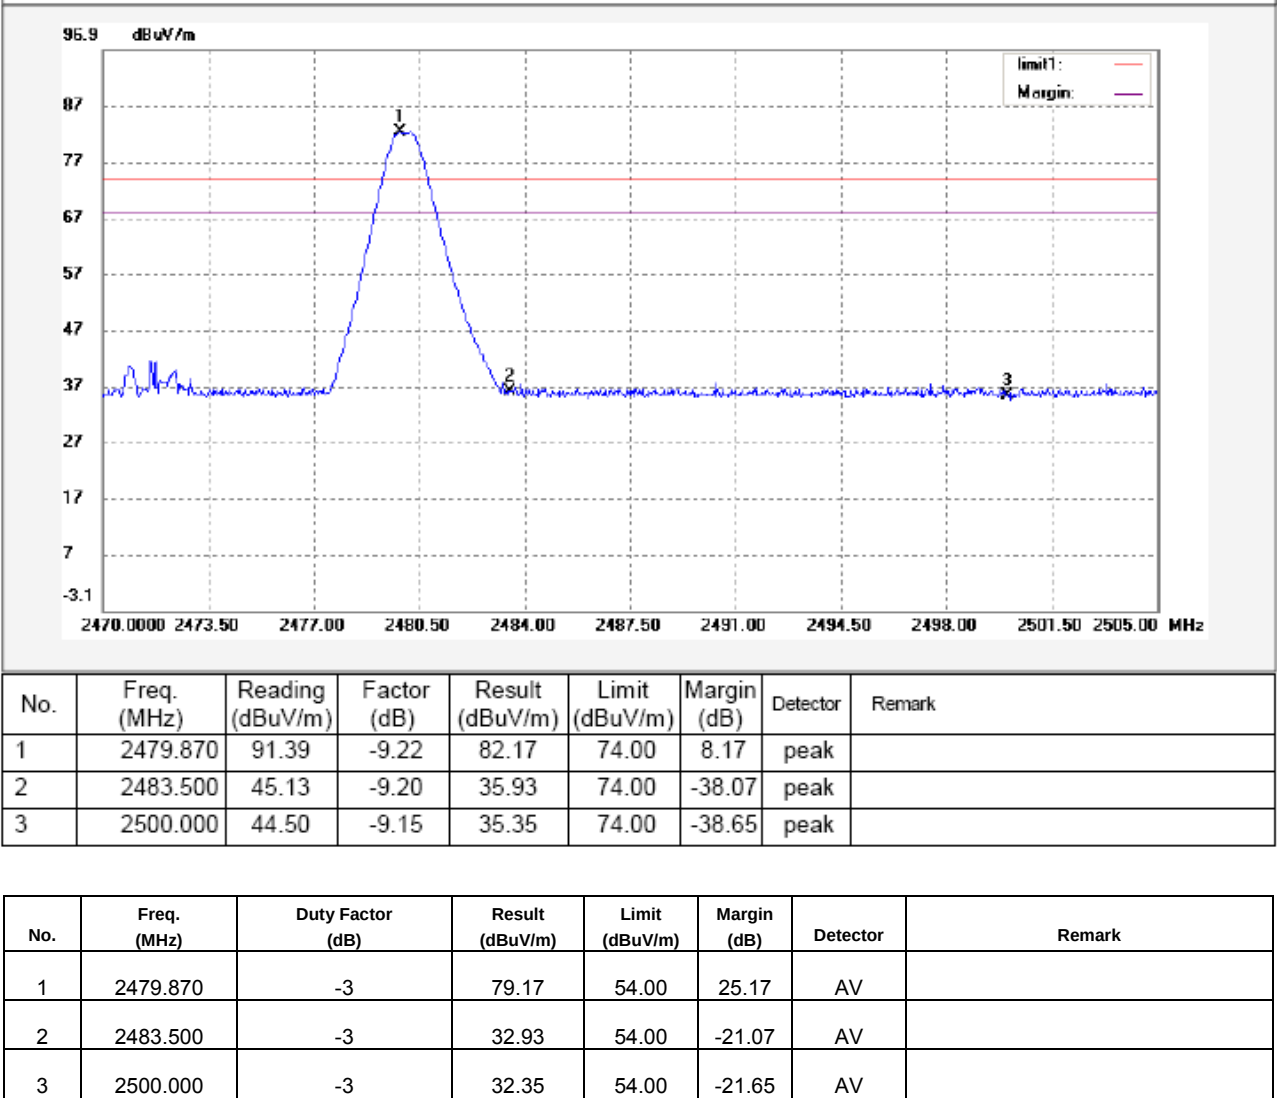

11 20 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: DA 00-705

Test Mode: Test in fixing operating frequency at low, Middle, high channel.

11.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz


11.2 Test Result:

Modulation	Test Channel	Bandwidth(MHz)
GFSK	Lower	1.178
	Middle	1.156
	Upper	1.148
Pi/4DQPSK	Lower	1.178
	Middle	1.166
	Upper	1.158
8DPSK	Lower	1.178
	Middle	1.166
	Upper	1.158

Test result plot as follows:


Modulation:GFSK

Lower Channel

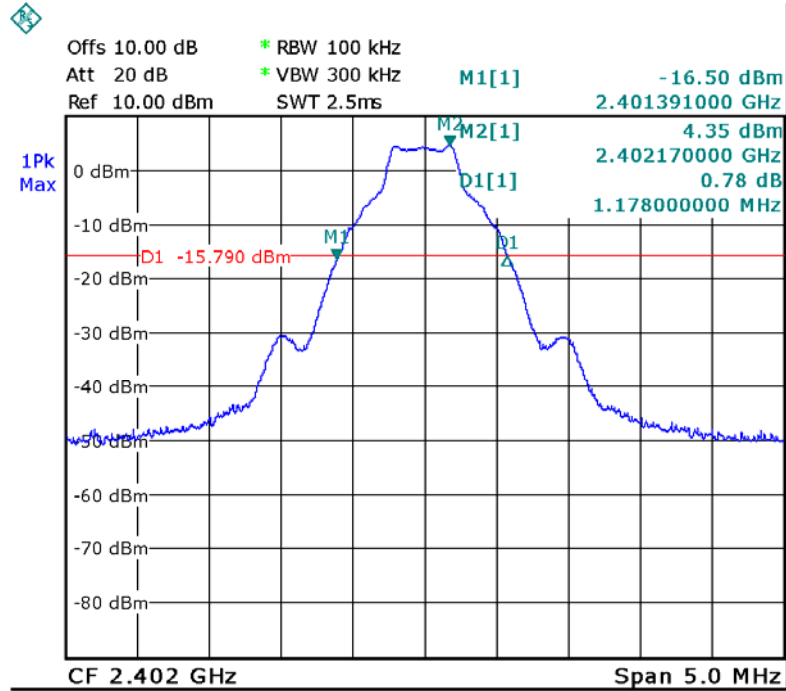


Date: 12.MAR.2013 10:53:50

Middle Channel

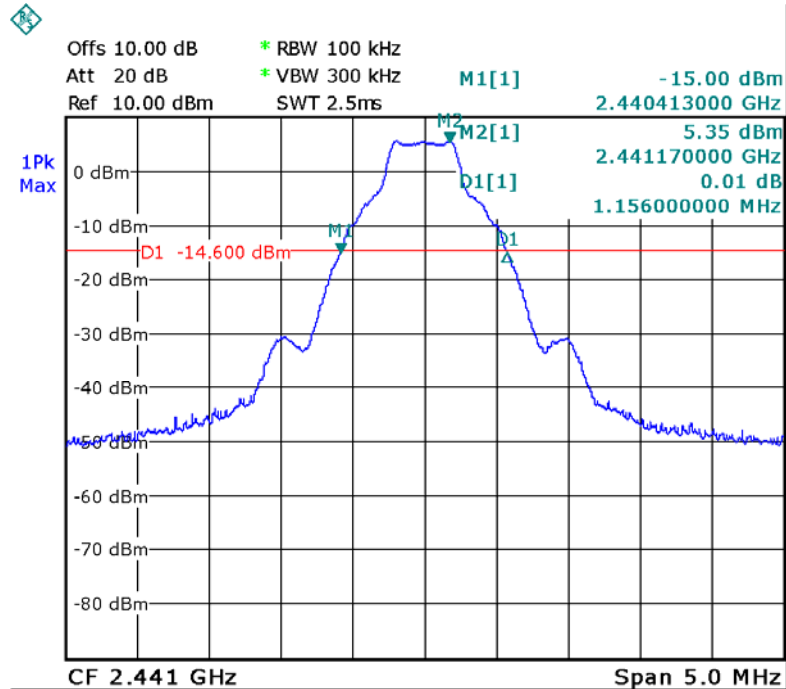


Date: 12.MAR.2013 10:49:14

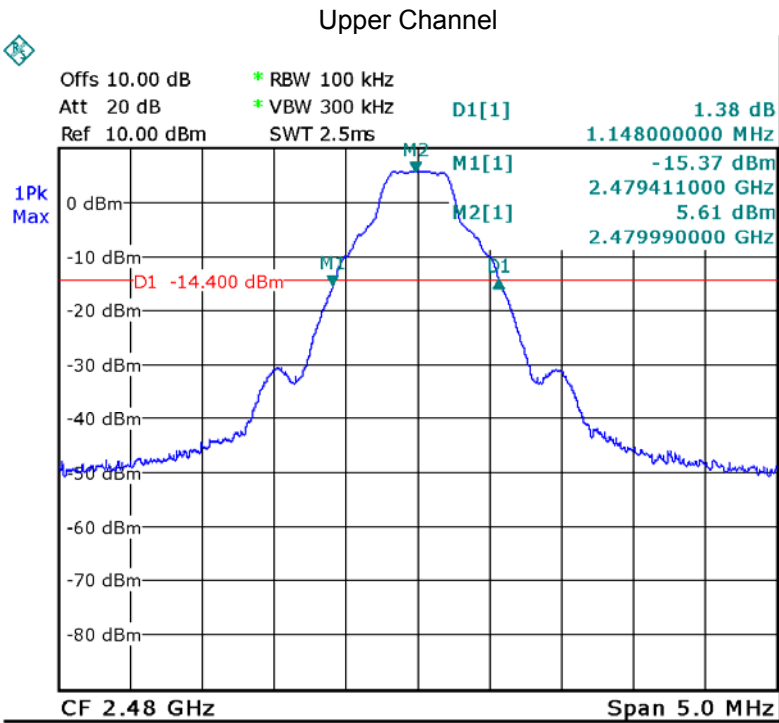


Date: 12.MAR.2013 11:05:12

Modulation: Pi/4DQPSK

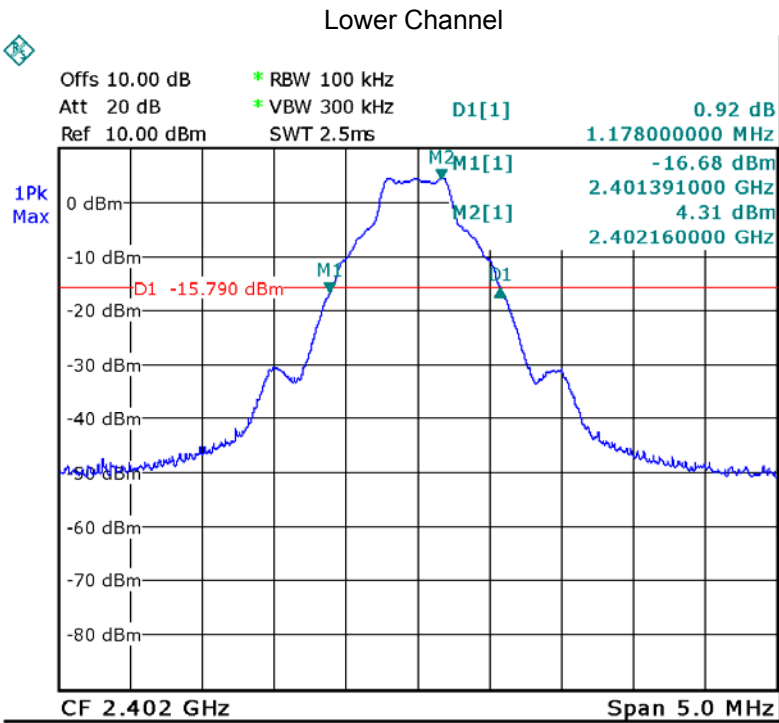


Date: 12.MAR.2013 10:55:53

Middle Channel

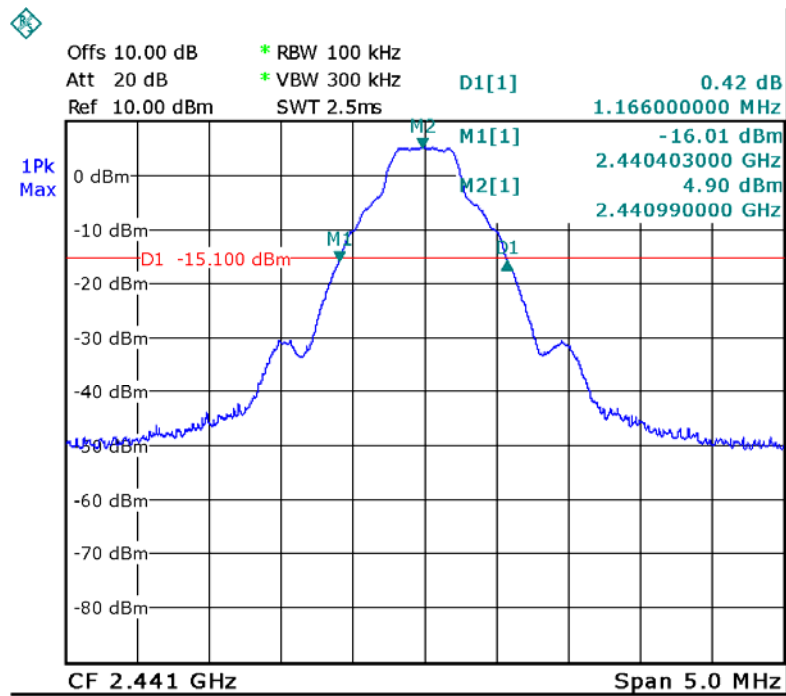

Date: 12.MAR.2013 10:47:11


Upper Channel

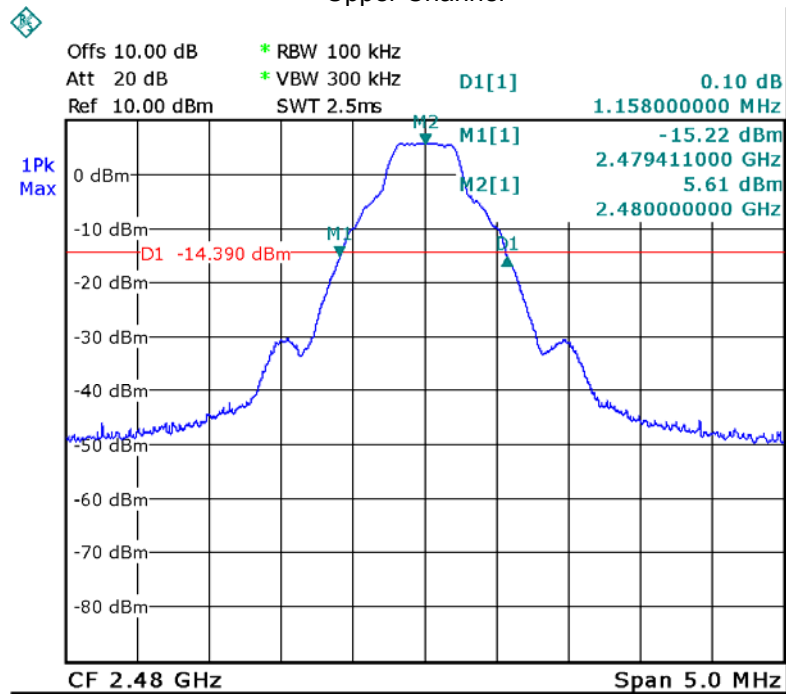

Date: 12.MAR.2013 11:06:37


Modulation: 8DPSK

Lower Channel

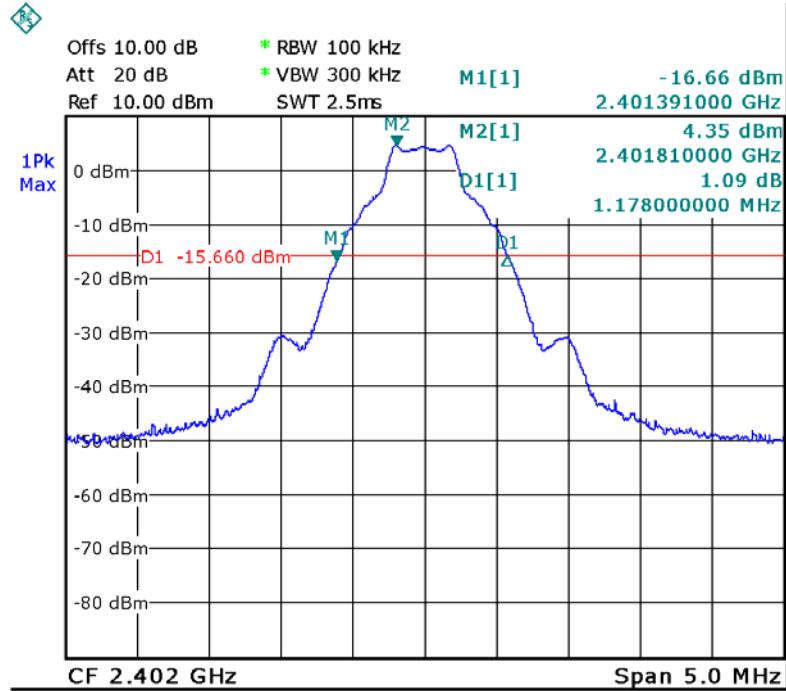


Date: 12.MAR.2013 10:57:28

Middle Channel

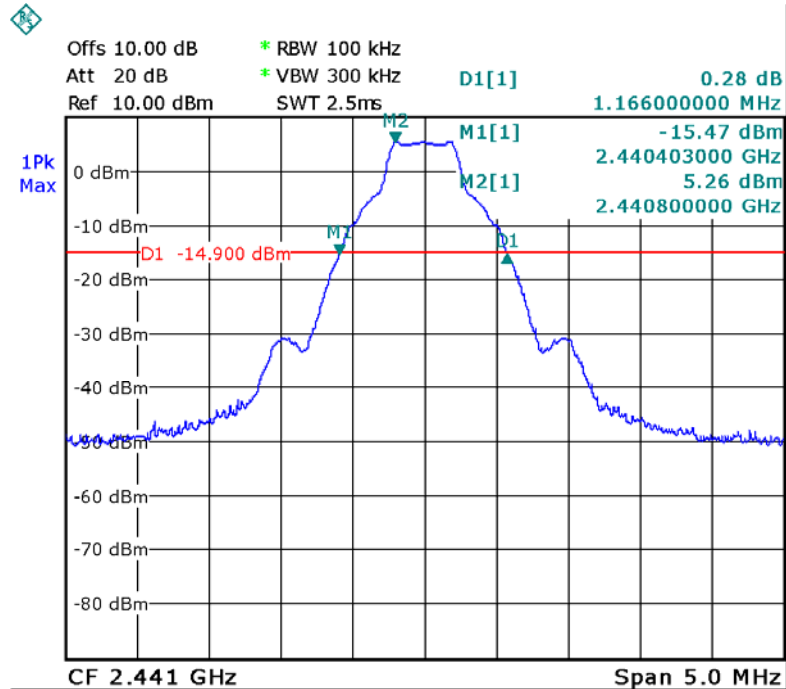

Date: 12.MAR.2013 10:51:05

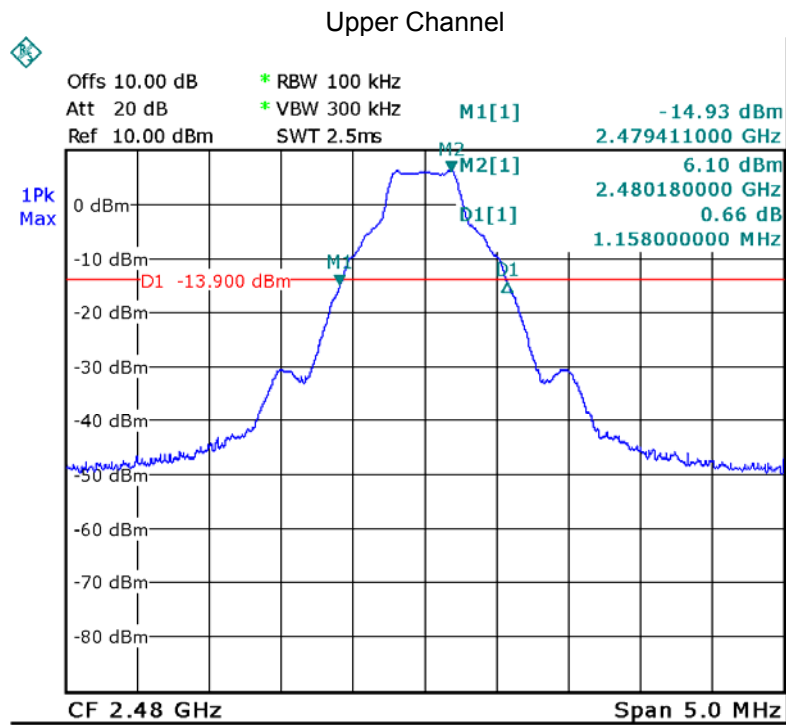

Date: 12.MAR.2013 13:06:34

12 Maximum Peak Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. Refer to the result "Number of Hopping Frequency" of this document. The 1watts (30 dBm) limit applies.
Test mode:	Test in fixing frequency transmitting mode.



12.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1 MHz. VBW = 3 MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

12.2 Test Result:

Modulation	Test Channel	Output Power (dBm)	Limit (dBm)
GFSK	Lower	4.54	30
	Middle	5.40	30
	Upper	6.18	30
Pi/4DQPSK	Lower	4.42	30
	Middle	5.46	30
	Upper	6.18	30
8DPSK	Lower	4.38	30
	Middle	5.51	30
	Upper	6.18	30


Test result plot as follows:

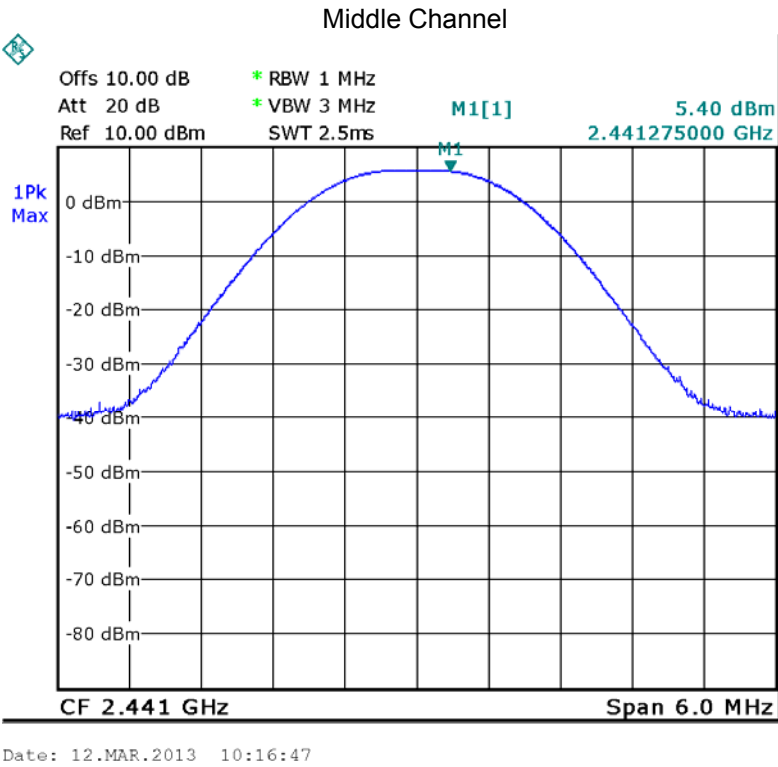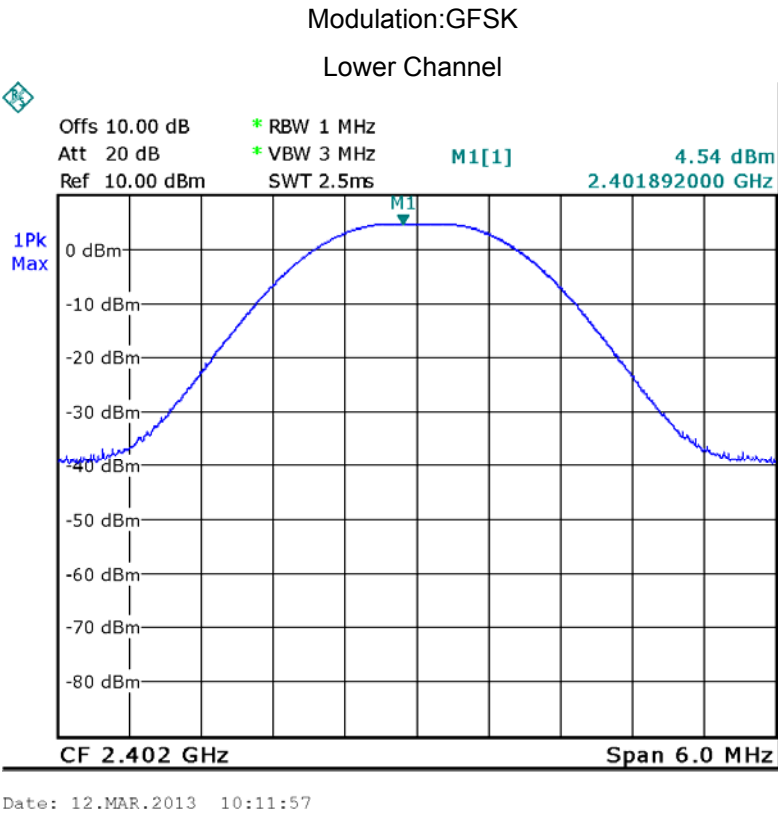


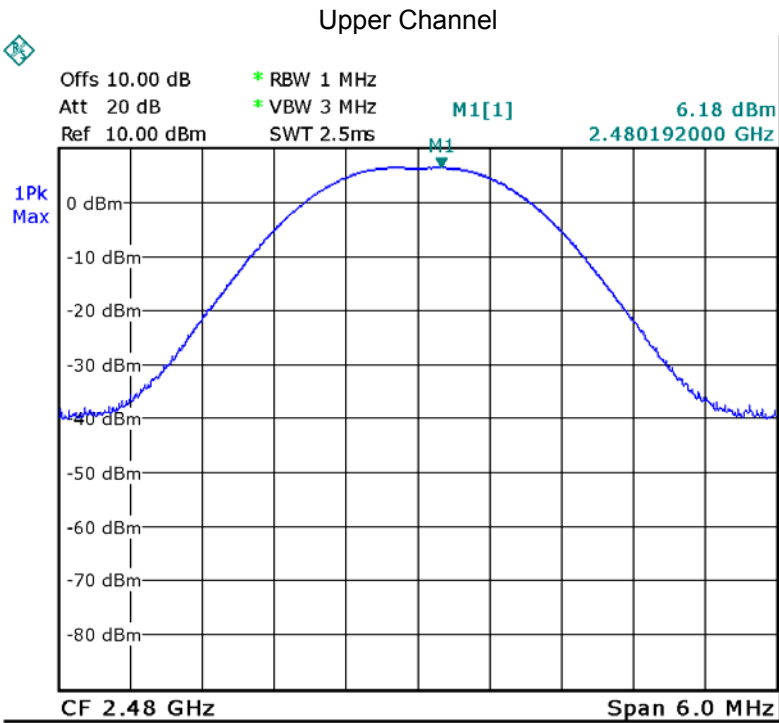


Date: 12.MAR.2013 10:19:32

Modulation: Pi/4DQPSK

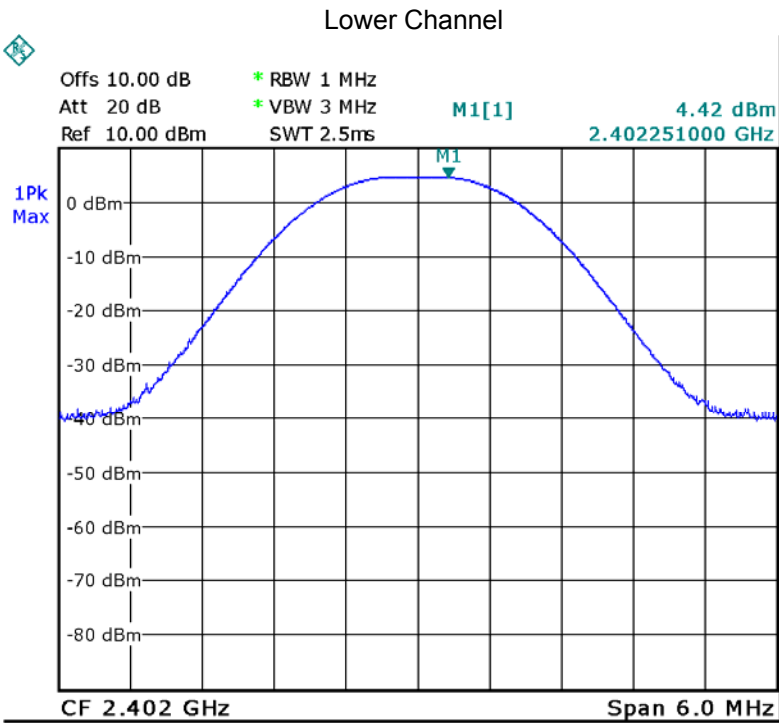


Date: 12.MAR.2013 10:36:15

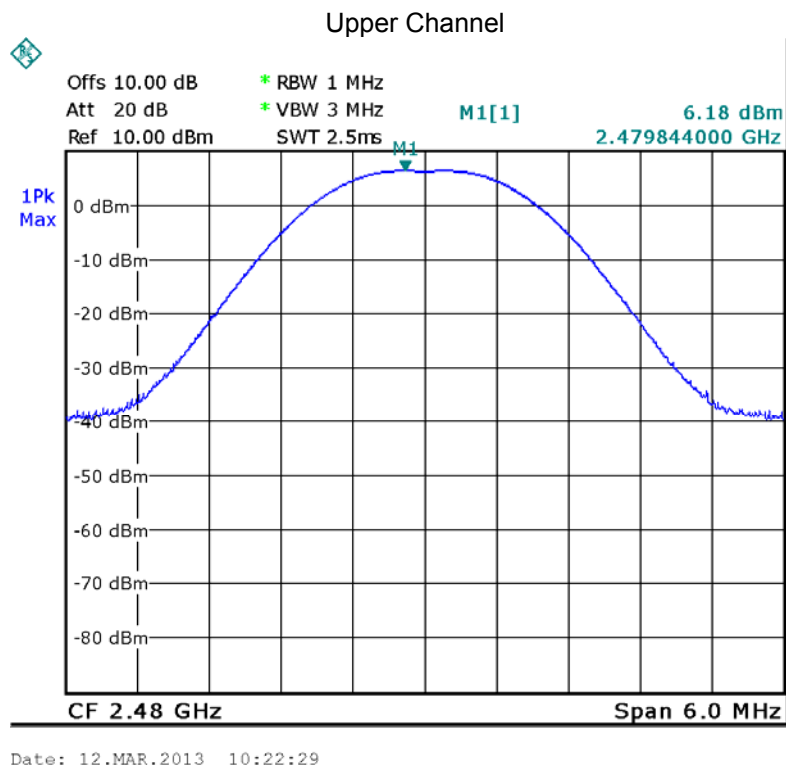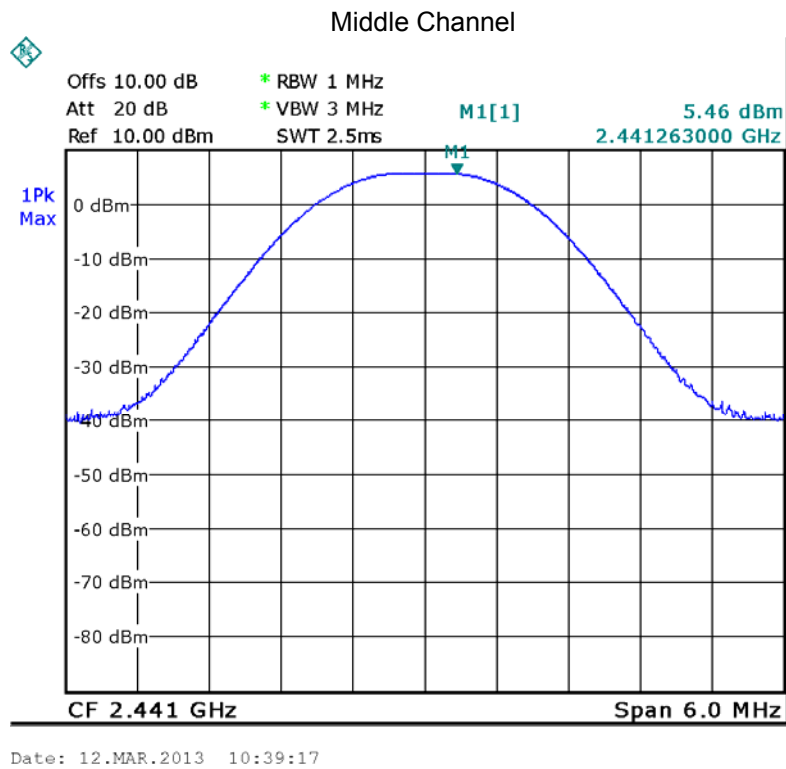


Modulation: 8DPSK

Lower Channel

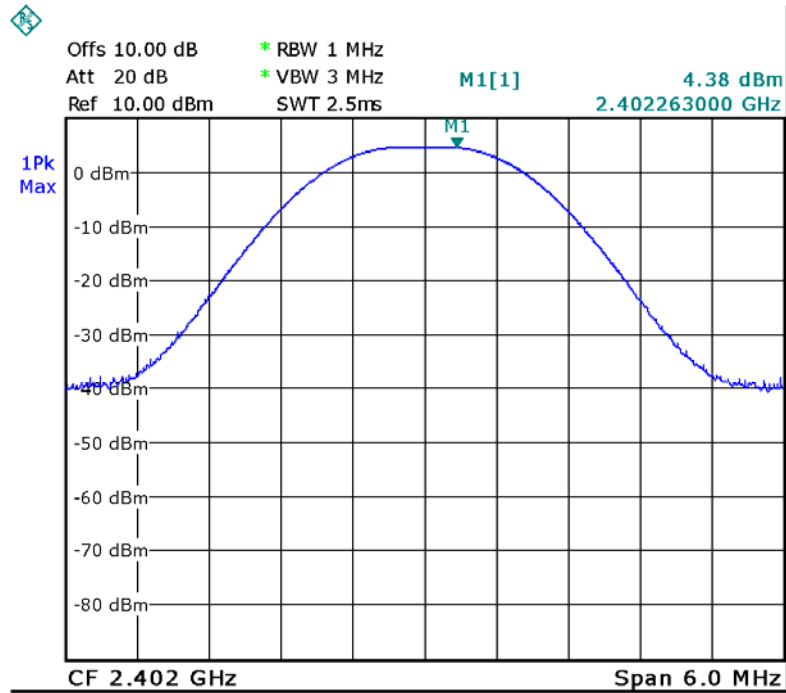


Date: 12.MAR.2013 10:37:10

Middle Channel

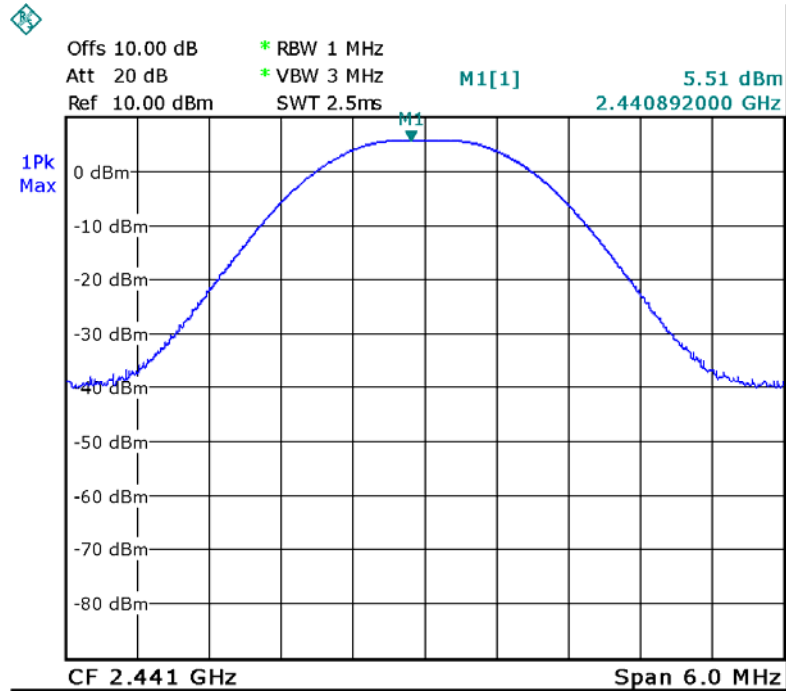

Date: 12.MAR.2013 10:39:58

Upper Channel

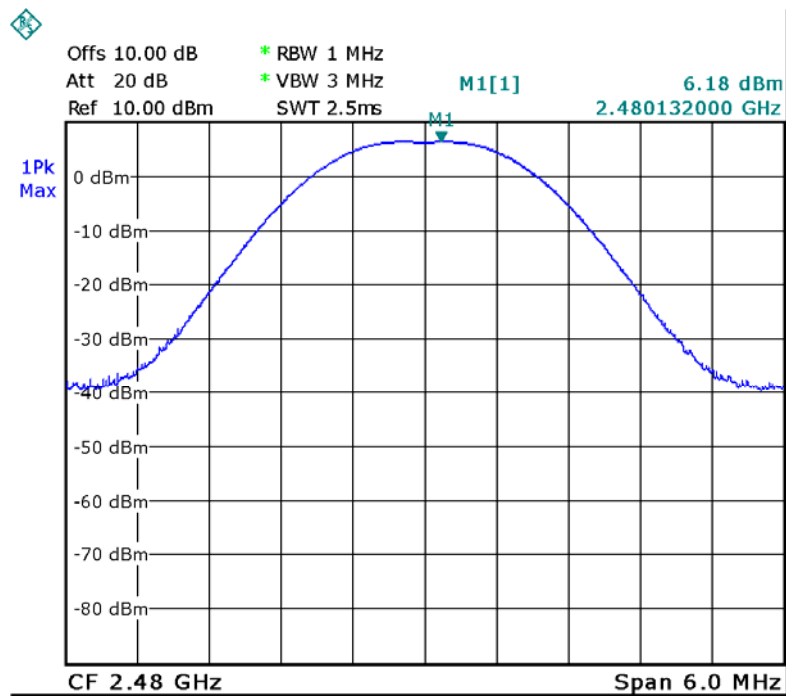

Date: 12.MAR.2013 10:23:24

13 Hopping Channel Separation

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: DA 00-705

Test Limit: Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 1W.

Test Mode: Test in hopping transmitting operating mode.



13.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100KHz. VBW = 300KHz , Span = 5MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section
Submit this plot.


13.2 Test Result:

Modulation	Test Channel	Separation (MHz)
GFSK	Lower	-1.008
	Middle	1.018
	Upper	-1.018
Pi/4DQPSK	Lower	-1.008
	Middle	1.008
	Upper	-1.008
8DPSK	Lower	1.008
	Middle	-1.008
	Upper	-1.008

Test result plot as follows:

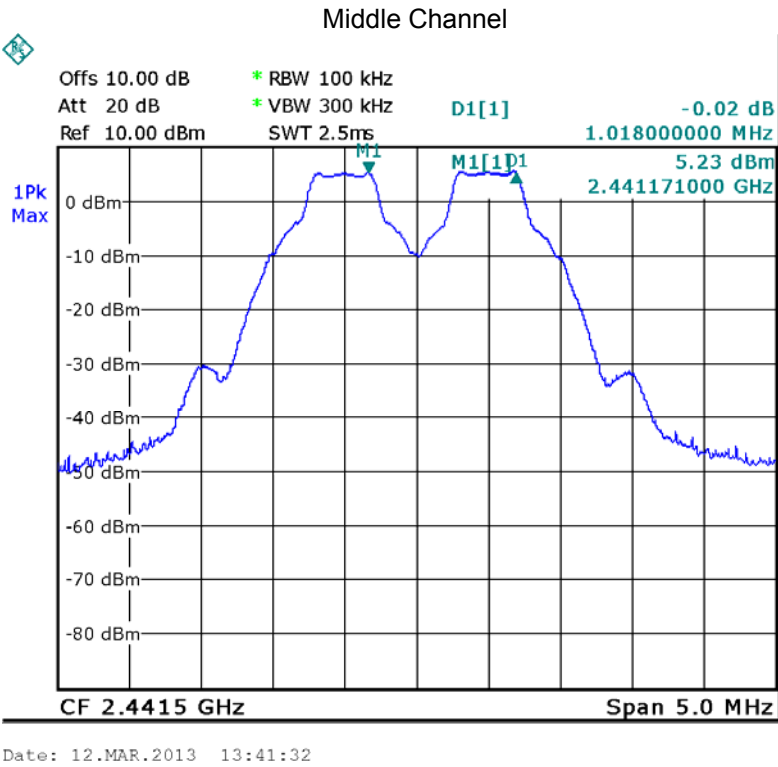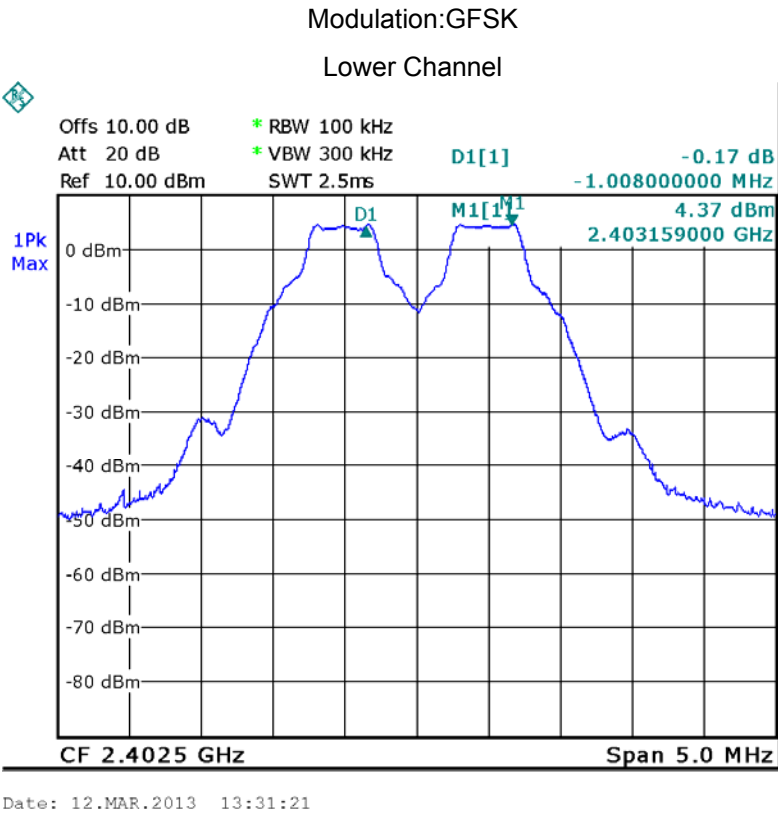


Upper Channel

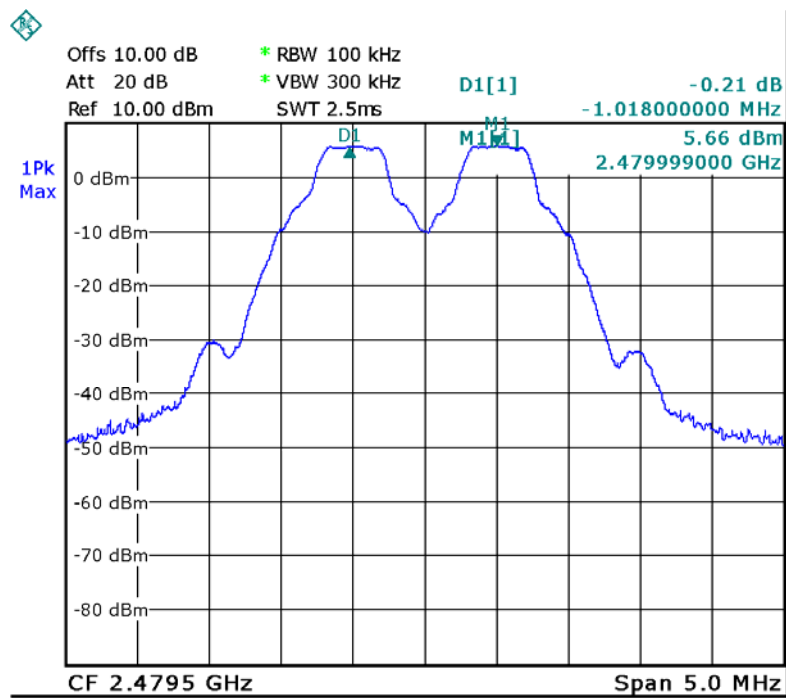



Date: 12.MAR.2013 13:12:48

Modulation: Pi/4DQPSK

Lower Channel

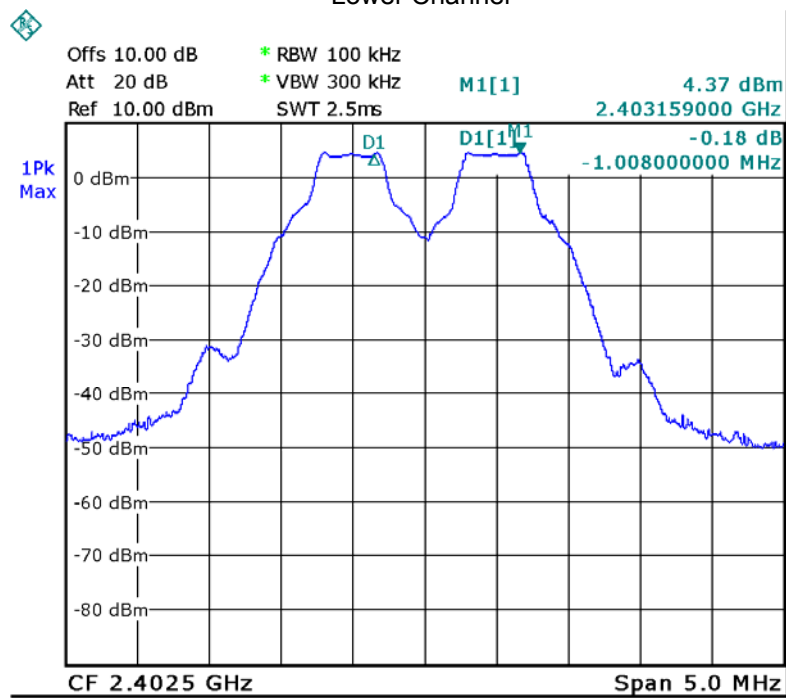


Date: 12.MAR.2013 13:32:36

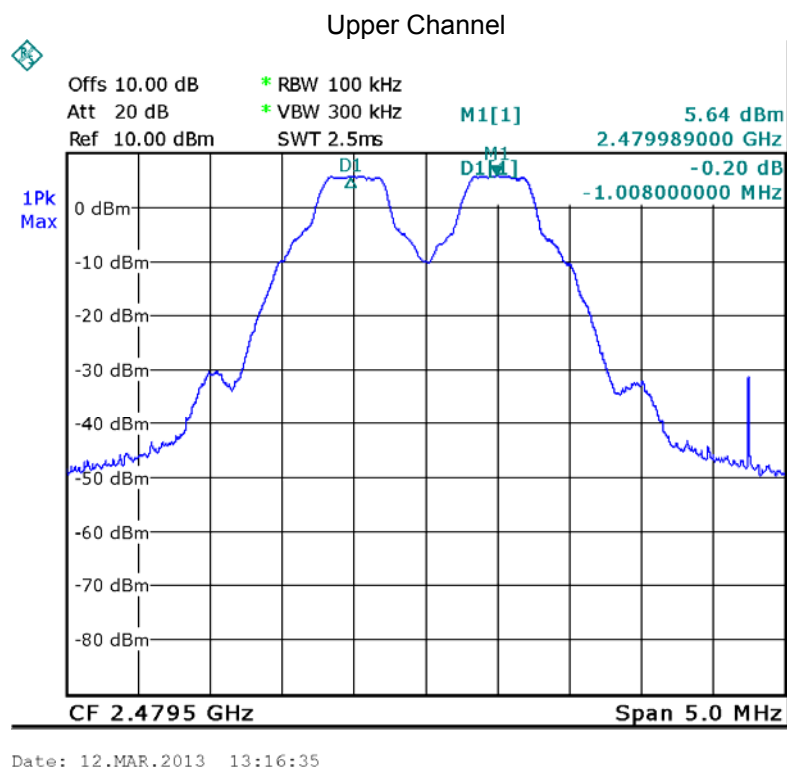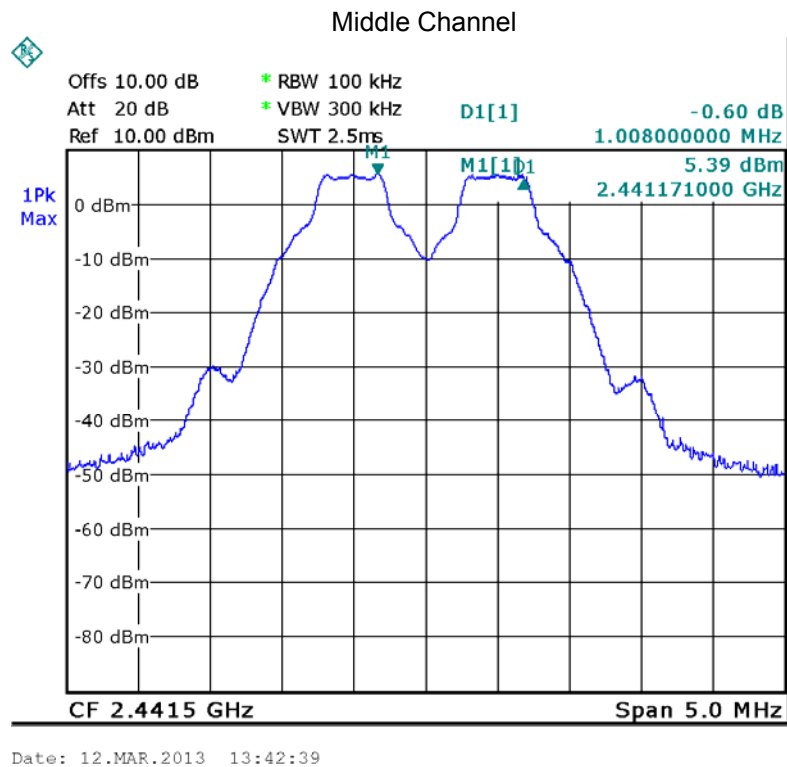


Modulation: 8DPSK

Lower Channel

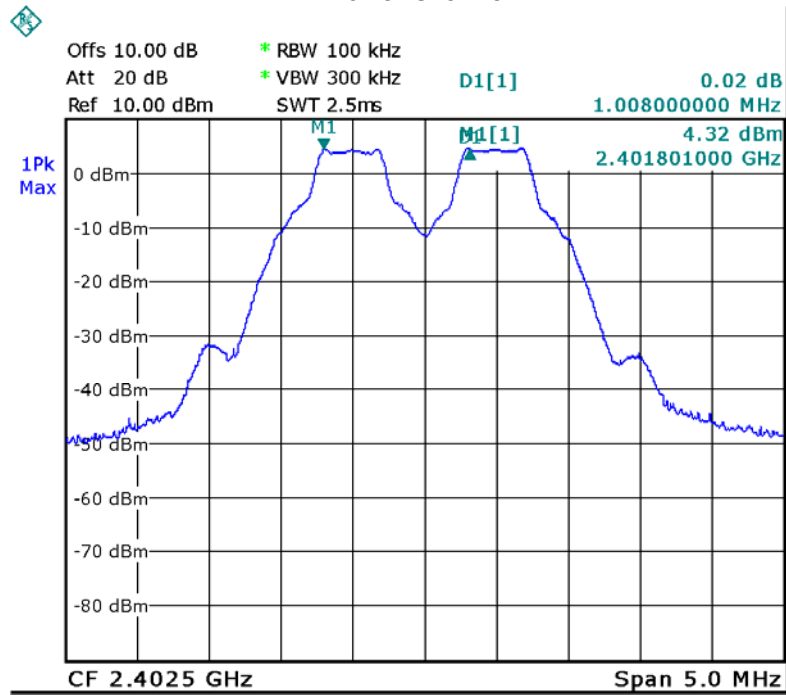


Date: 12.MAR.2013 13:37:29

Middle Channel

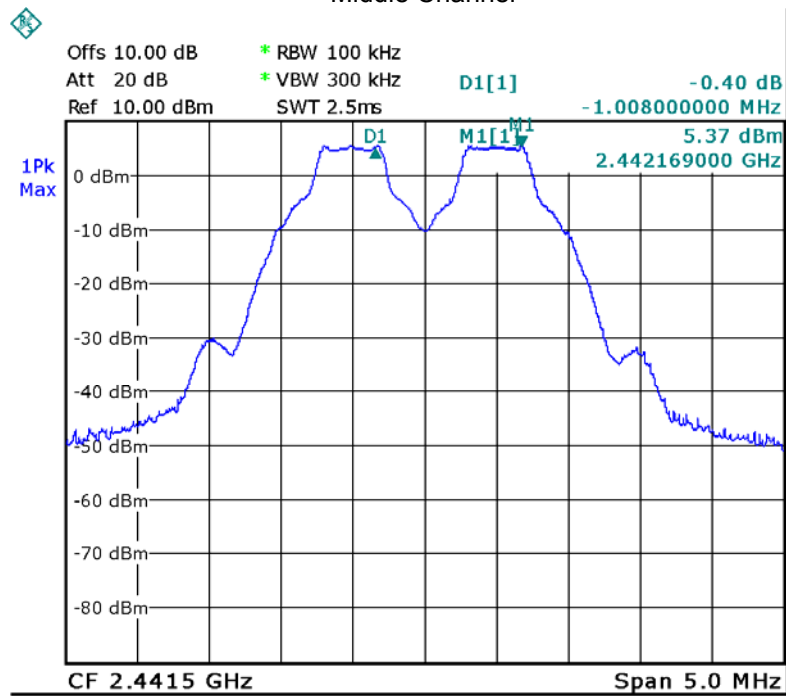

Date: 12.MAR.2013 13:43:56

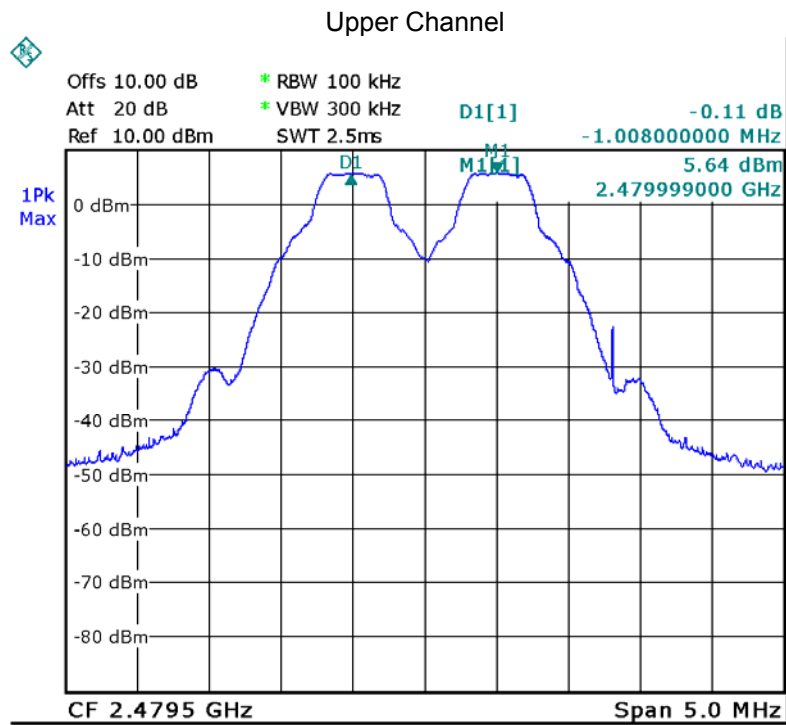

Date: 12.MAR.2013 13:17:37

14 Number of Hopping Frequency

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Mode:	Test in hopping transmitting operating mode.


14.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Centre Frequency = 2.441GHz, Span = 86MHz. Sweep=auto;

14.2 Test Result:


Total Channels are 79 Channels.

Modulation: GFSK

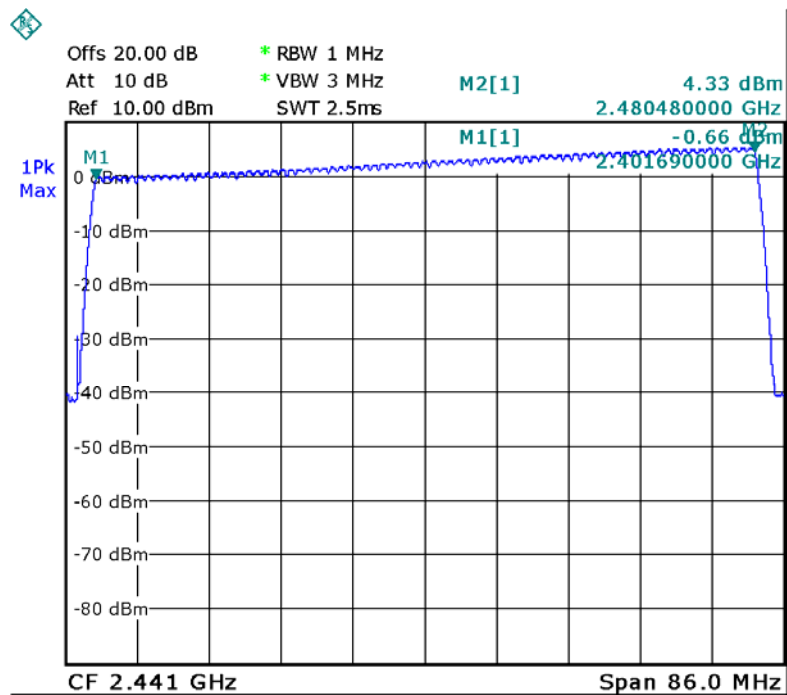


Date: 11.MAR.2013 11:07:31

Modulation: Pi/4DQPSK

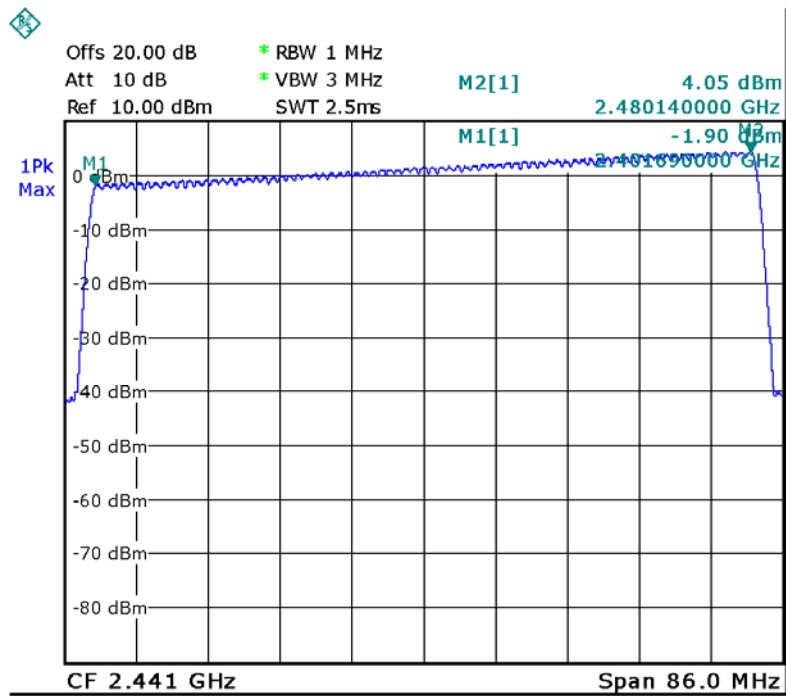

Date: 11.MAR.2013 11:06:00

Modulation: 8DPSK

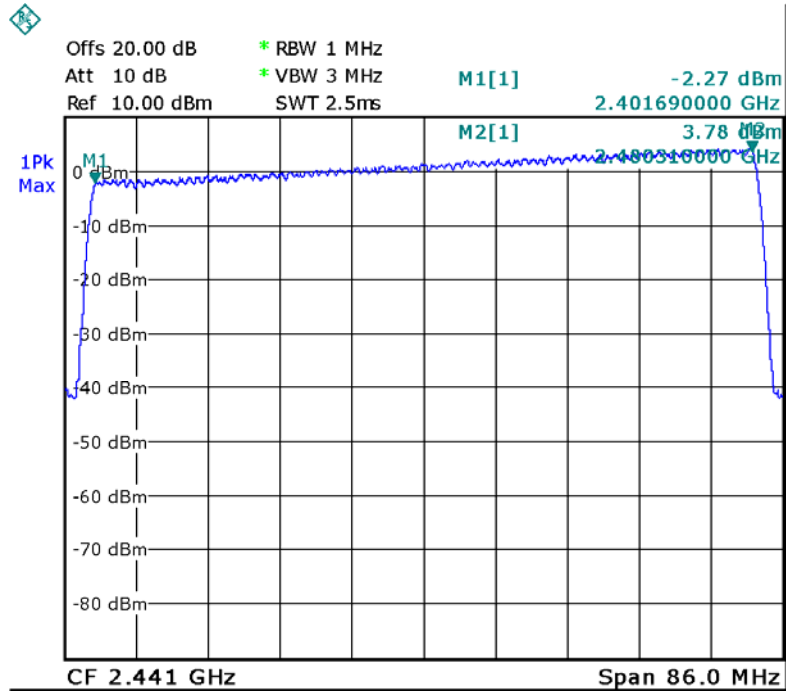

Date: 11.MAR.2013 11:06:40

15 Dwell Time

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Mode:	Test in hopping transmitting operating mode.

15.1 Test Procedure:

- 1.Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2.Set spectrum analyzer span = 0. centered on a hopping channel;
- 3.Set RBW = 1MHz and VBW = 3MHz.Sweep = as necessary to capture the entire dwell time per hopping channel.
- 4.Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

15.2 Test Result:

Dwell time = Pulse wide x (Hopping rate / Number of channels) x Period

The test period: $T = 0.4(s) * 79 = 31.6 (s)$



DH5 Packet permit maximum $1600 / 79 / 6$ hops per second in each channel (5 time slots RX, 1 time slot TX).


DH3 Packet permit maximum $1600 / 79 / 4$ hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum $1600 / 79 / 2$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:


Data Packet	Dwell Time(s)
DH1	$1600/79/2*31.6*(MkrDelta)/1000$
DH3	$1600/79/4*31.6*(MkrDelta)/1000$
DH5	$1600/79/6*31.6*(MkrDelta)/1000$
Remark	Mkr Delta is single pulse time.

Modulation	Frequency	Data Packet	Mkr Delta(ms)	Dwell Time(s)	Limits(s)
GFSK	Lower channel	DH1	0.44	0.141	0.400
	Middle channel		0.44	0.141	0.400
	Upper channel		0.44	0.141	0.400
	Lower channel	DH3	1.70	0.272	0.400
	Middle channel		1.70	0.272	0.400
	Upper channel		1.74	0.278	0.400
	Lower channel	DH5	3.02	0.322	0.400
	Middle channel		3.04	0.324	0.400
	Upper channel		2.98	0.318	0.400
Pi/4DQPSK	Lower channel	DH1	0.46	0.147	0.400
	Middle channel		0.50	0.160	0.400
	Upper channel		0.46	0.147	0.400
	Lower channel	DH3	1.76	0.282	0.400
	Middle channel		1.74	0.278	0.400
	Upper channel		1.70	0.272	0.400
	Lower channel	DH5	2.96	0.316	0.400
	Middle channel		2.98	0.318	0.400
	Upper channel		2.98	0.318	0.400
8DPSK	Lower channel	DH1	0.46	0.147	0.400
	Middle channel		0.48	0.154	0.400
	Upper channel		0.50	0.160	0.400
	Lower channel	DH3	1.82	0.291	0.400
	Middle channel		1.72	0.275	0.400
	Upper channel		1.72	0.275	0.400
	Lower channel	DH5	2.96	0.316	0.400
	Middle channel		2.96	0.316	0.400
	Upper channel		2.98	0.318	0.400

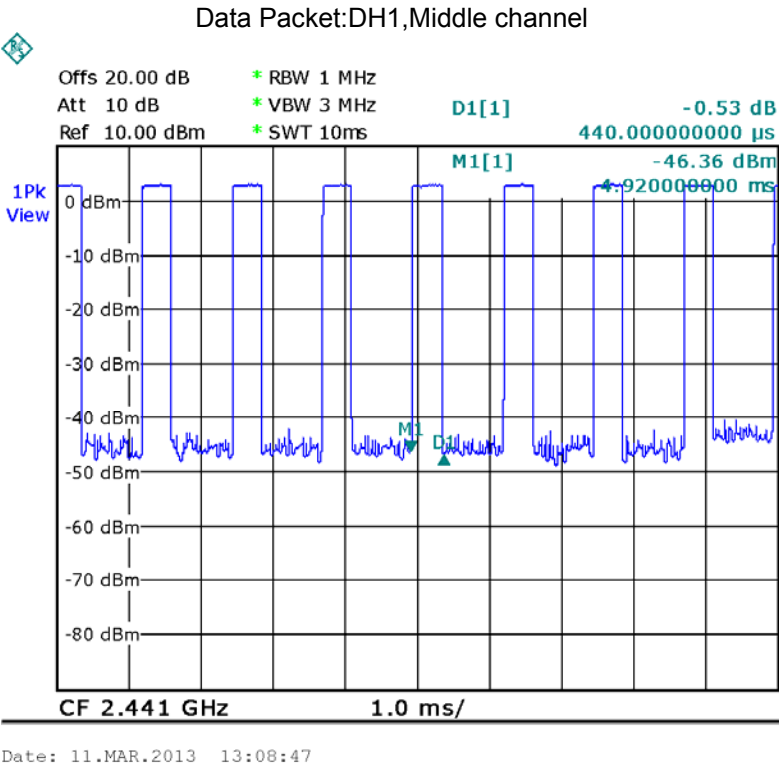
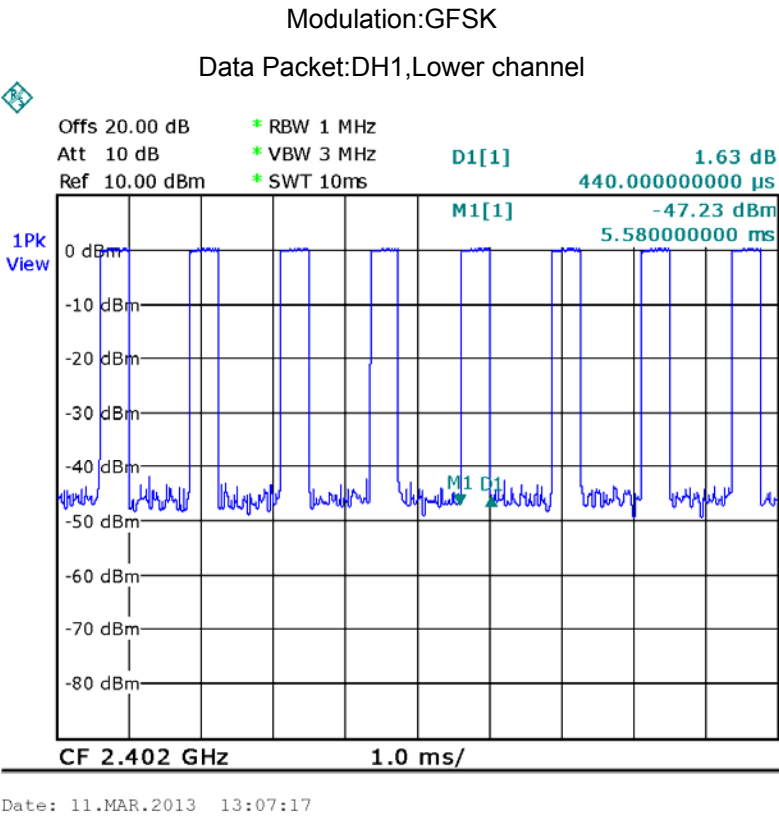



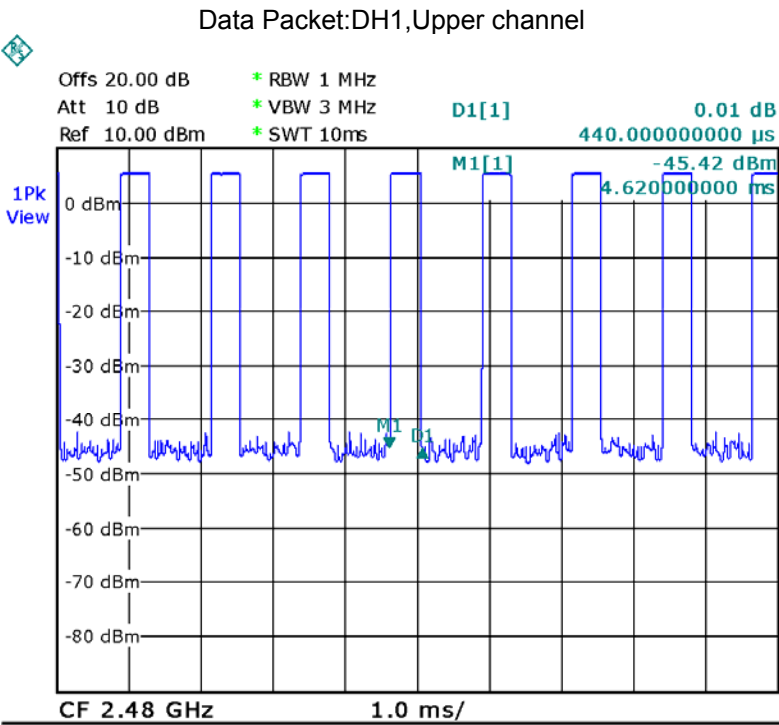




Date: 11.MAR.2013 13:09:45


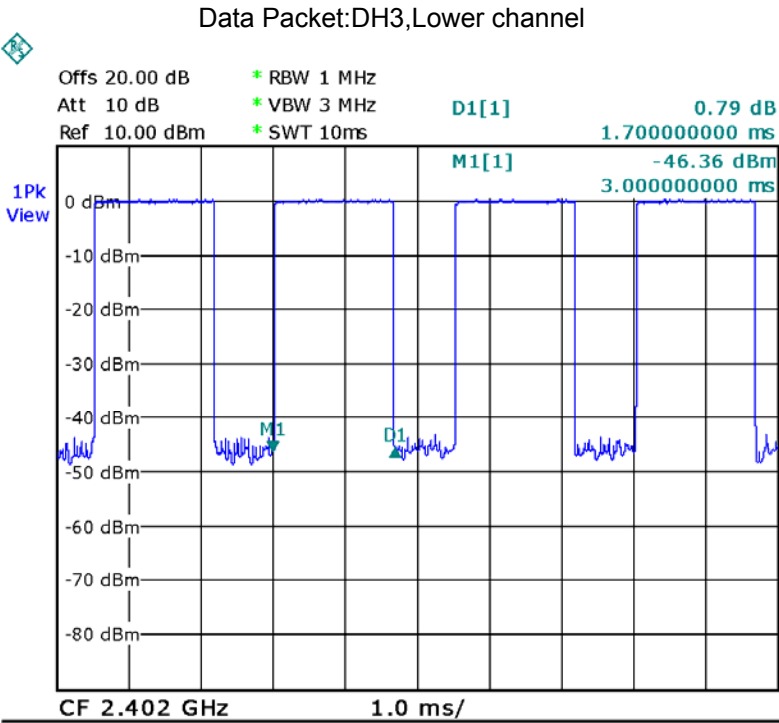




Date: 11.MAR.2013 13:13:11

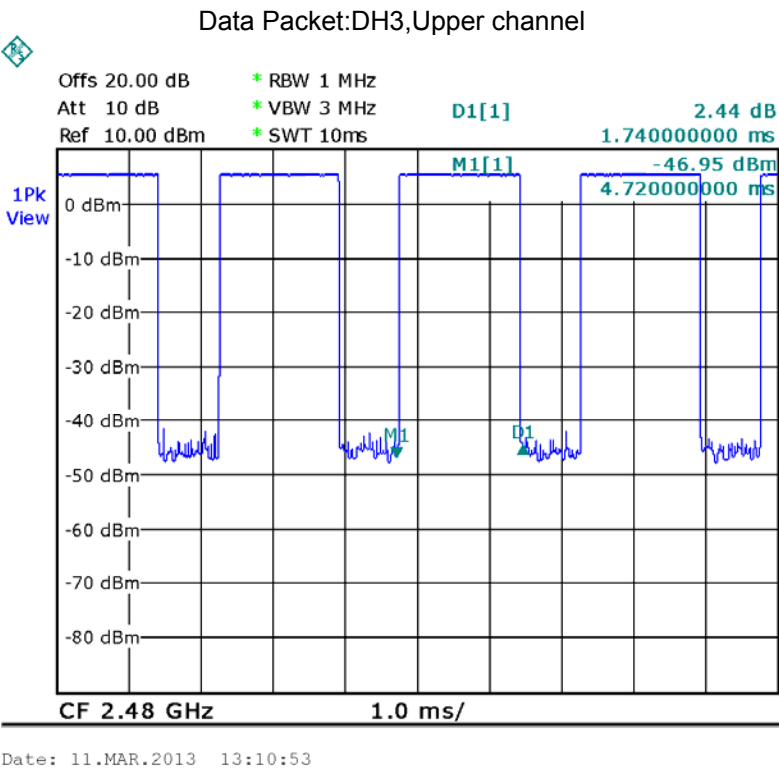
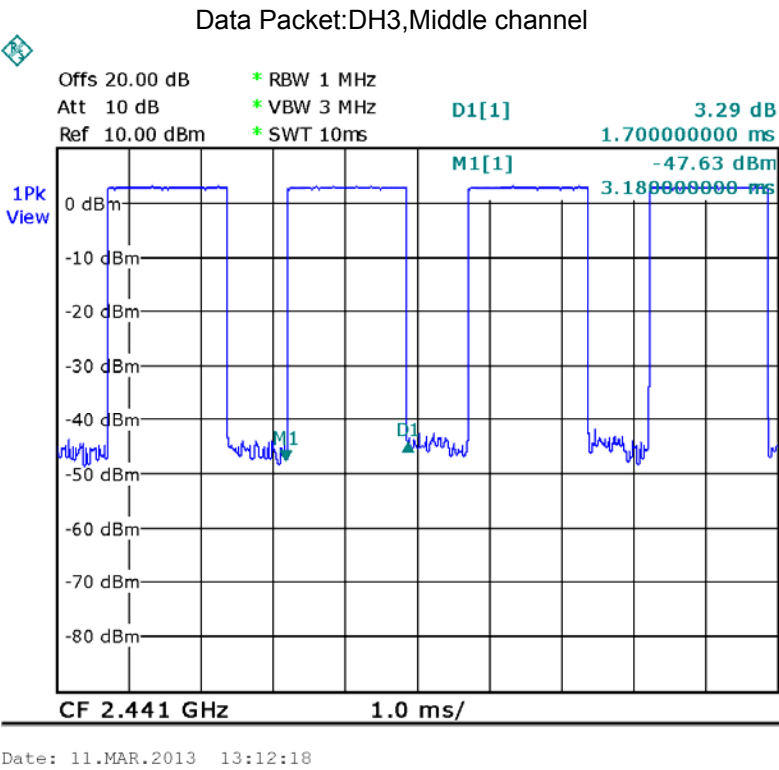


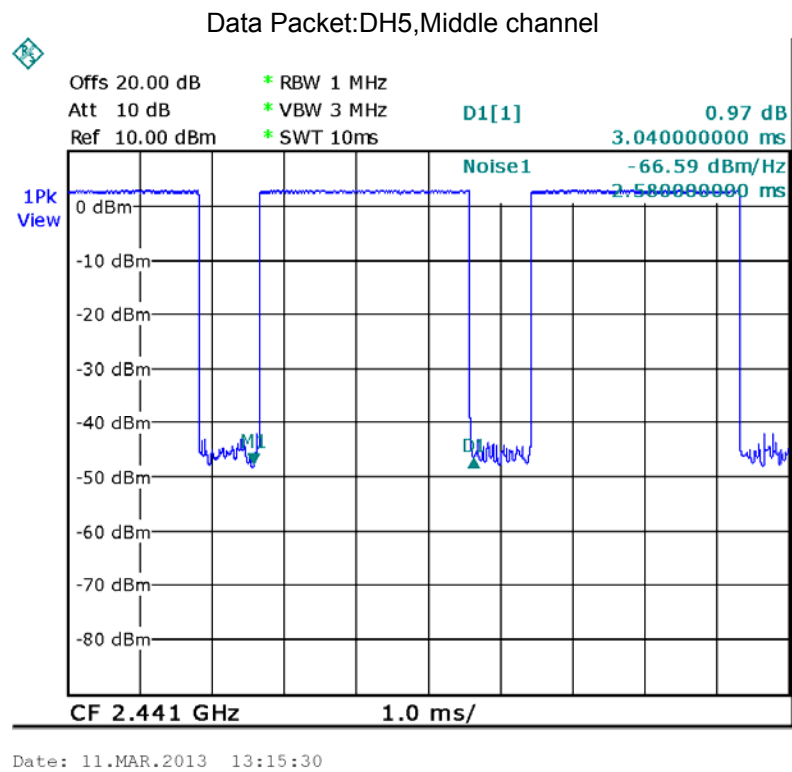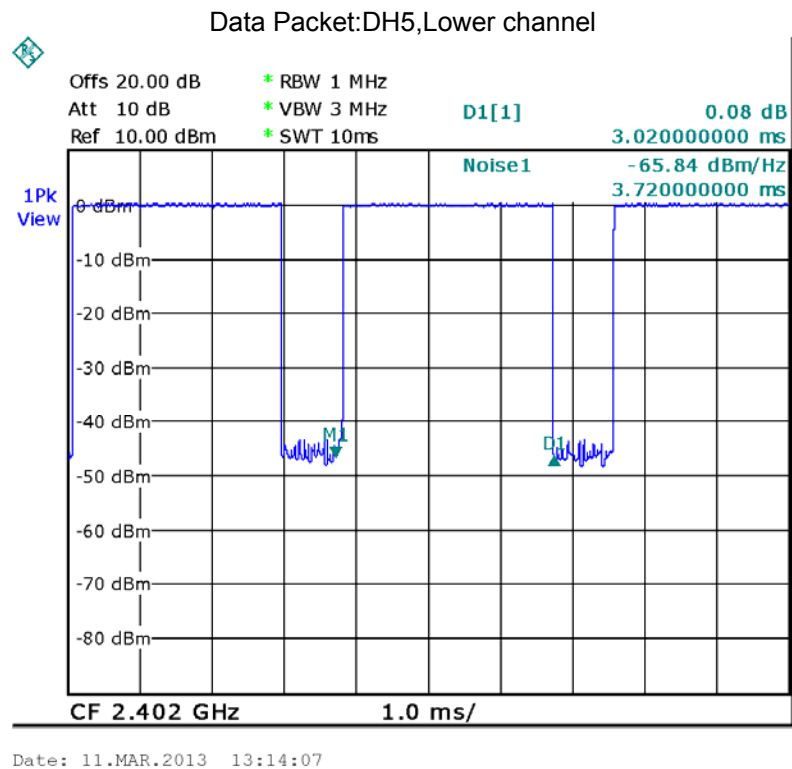


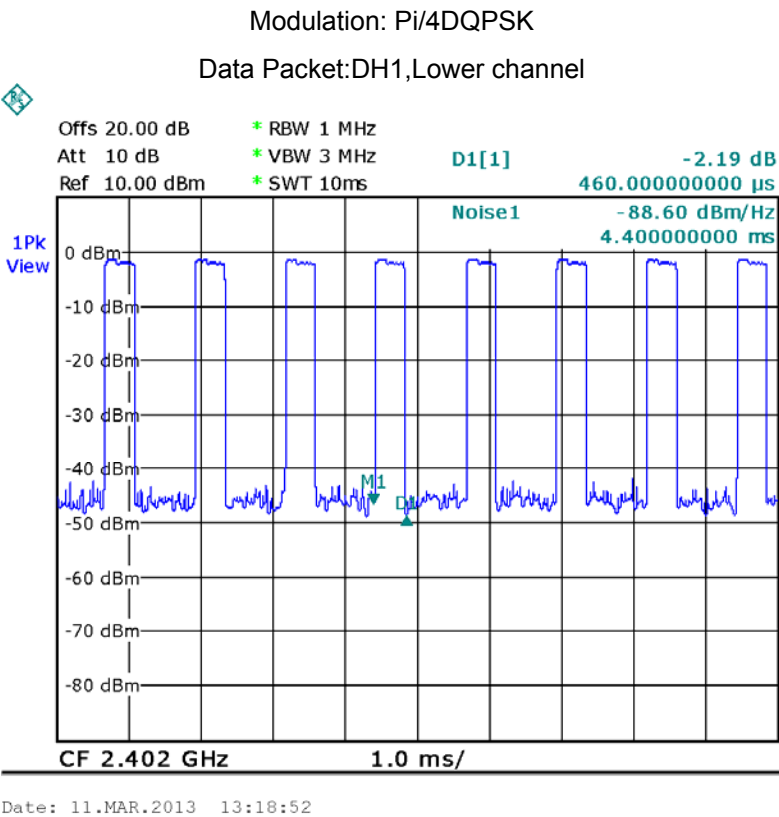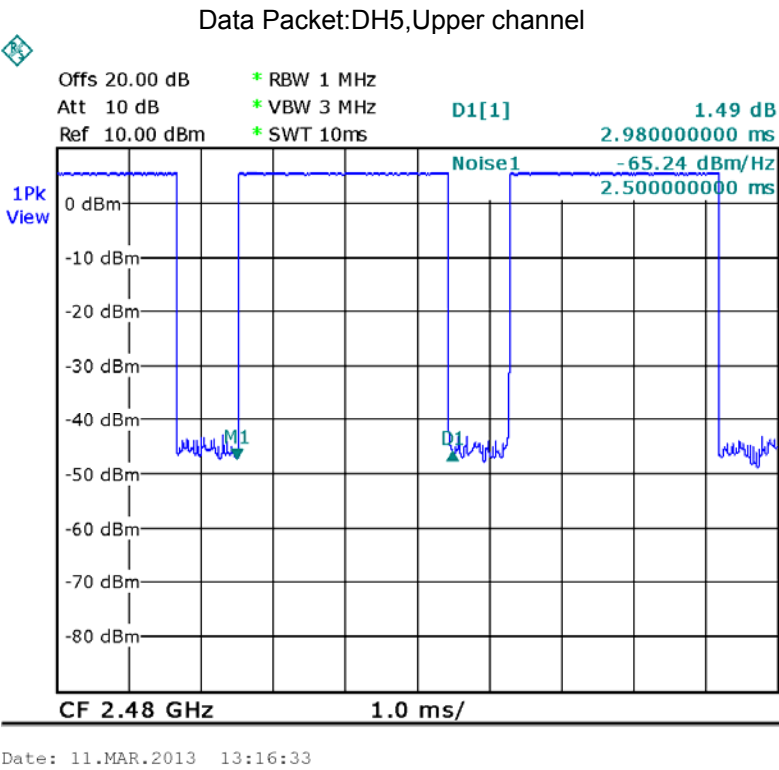

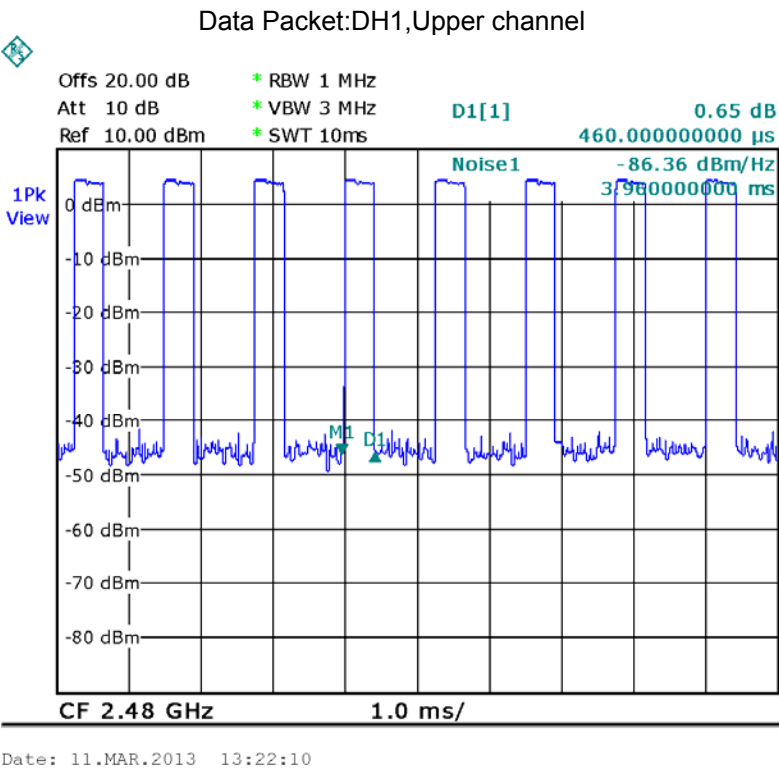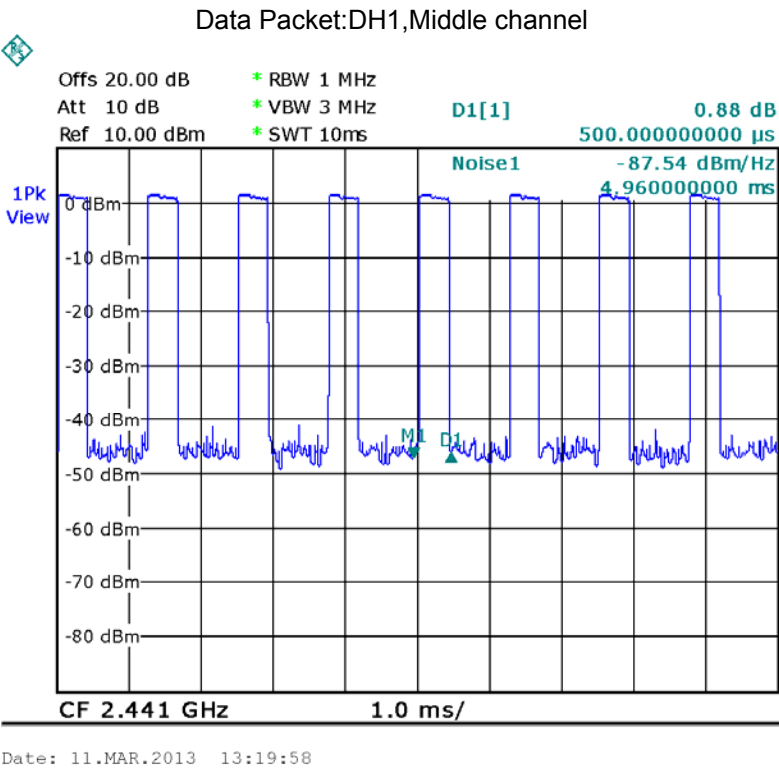


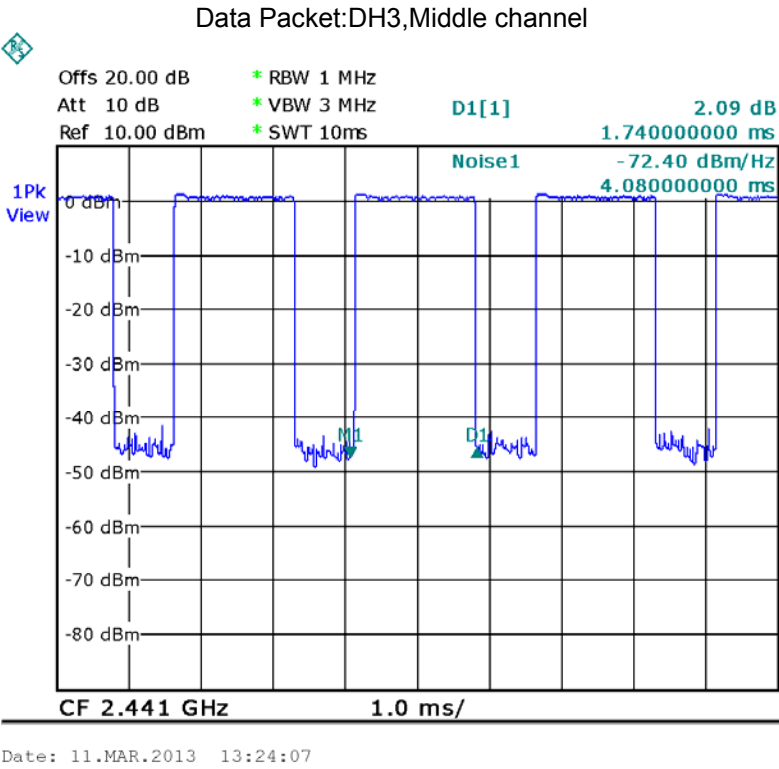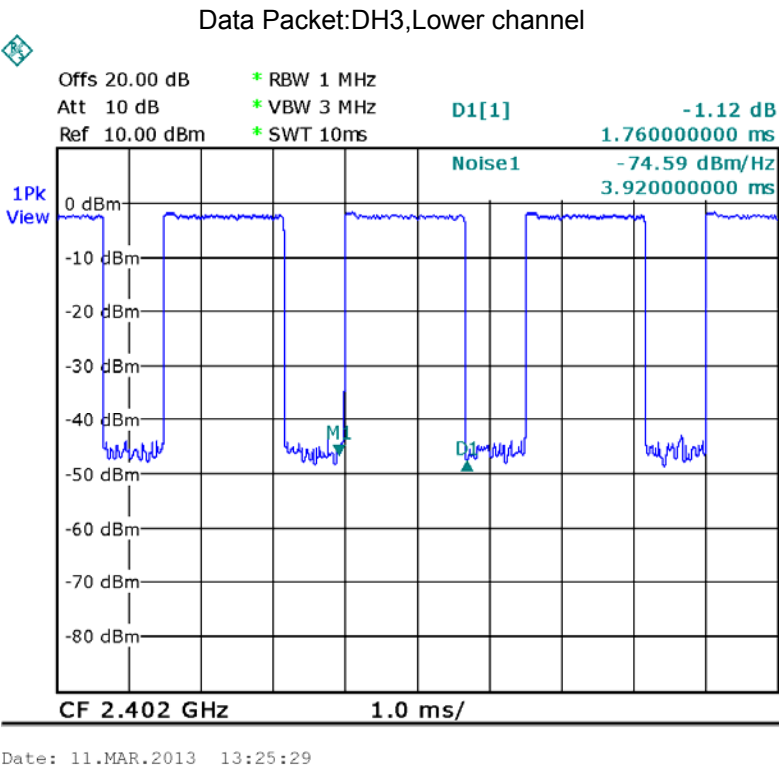

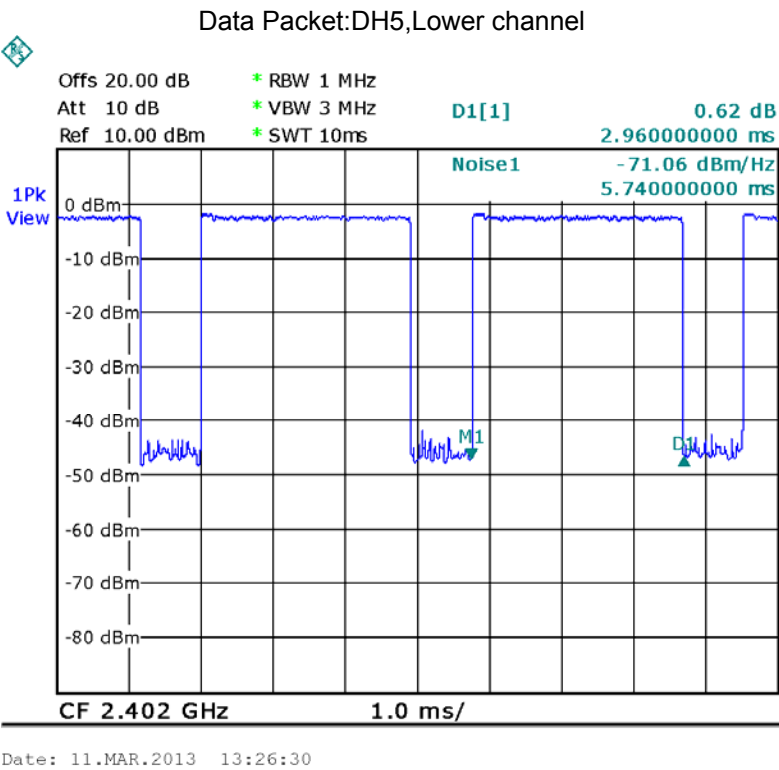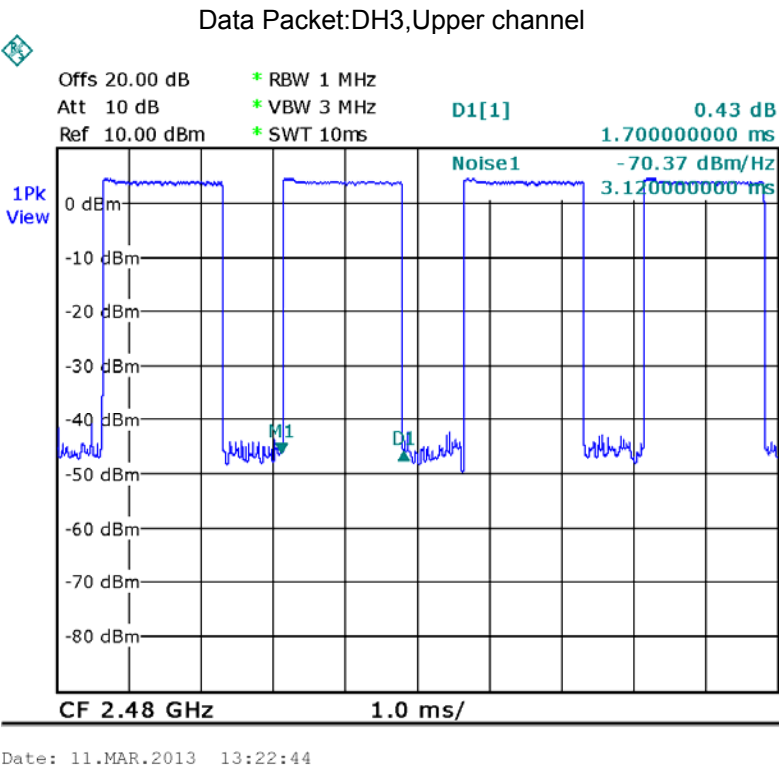


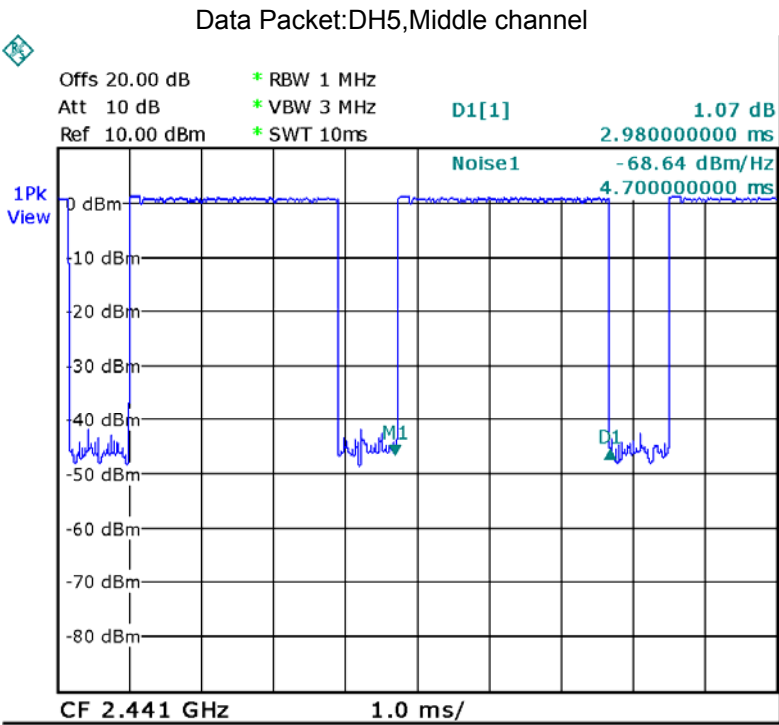


Date: 11.MAR.2013 13:27:36

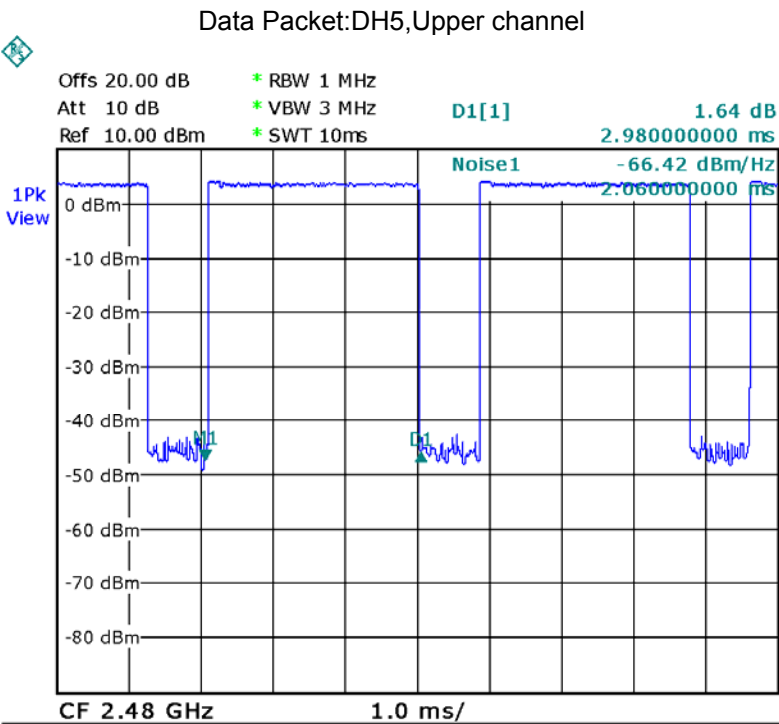



Date: 11.MAR.2013 13:28:38


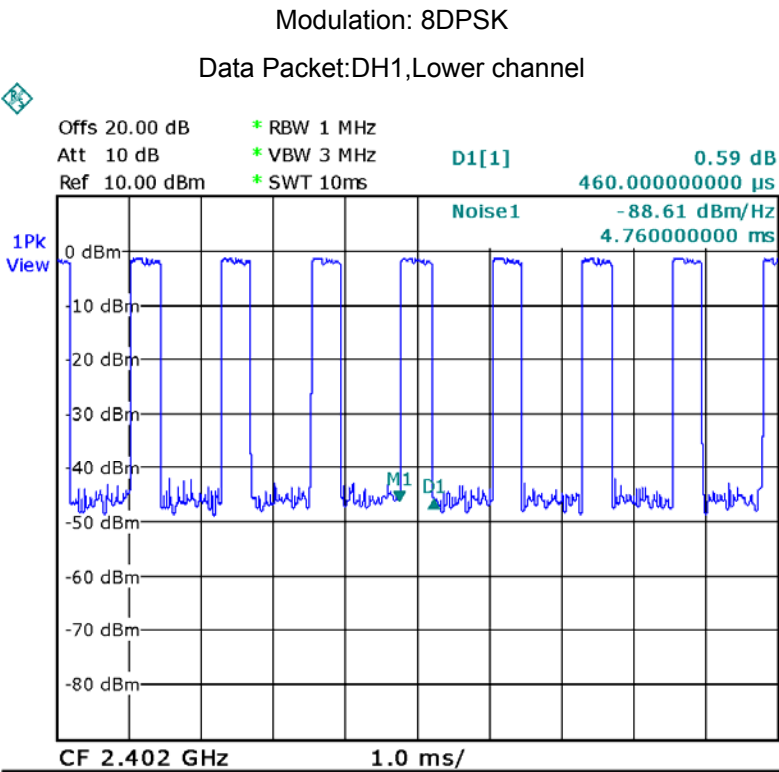




Date: 11.MAR.2013 13:30:15

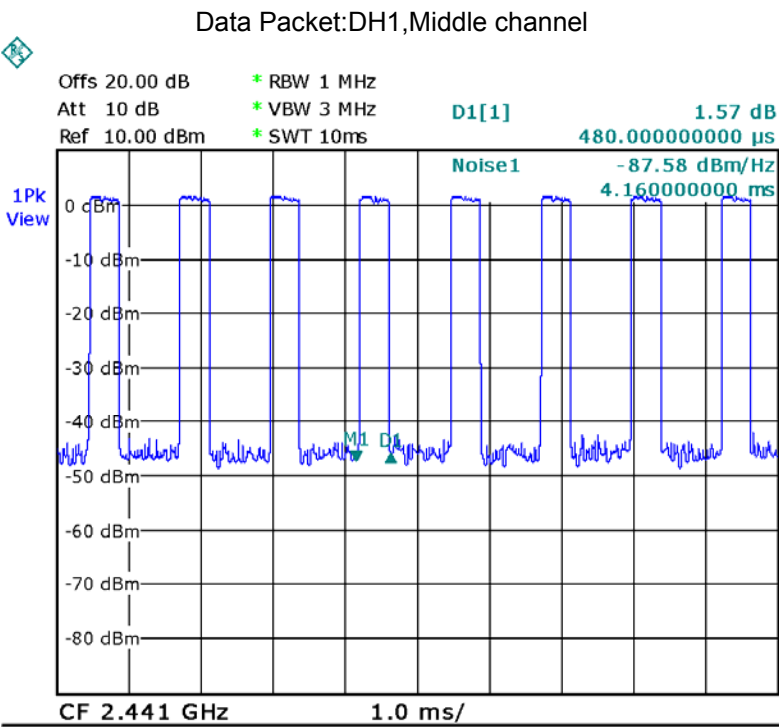


Date: 11.MAR.2013 13:32:21

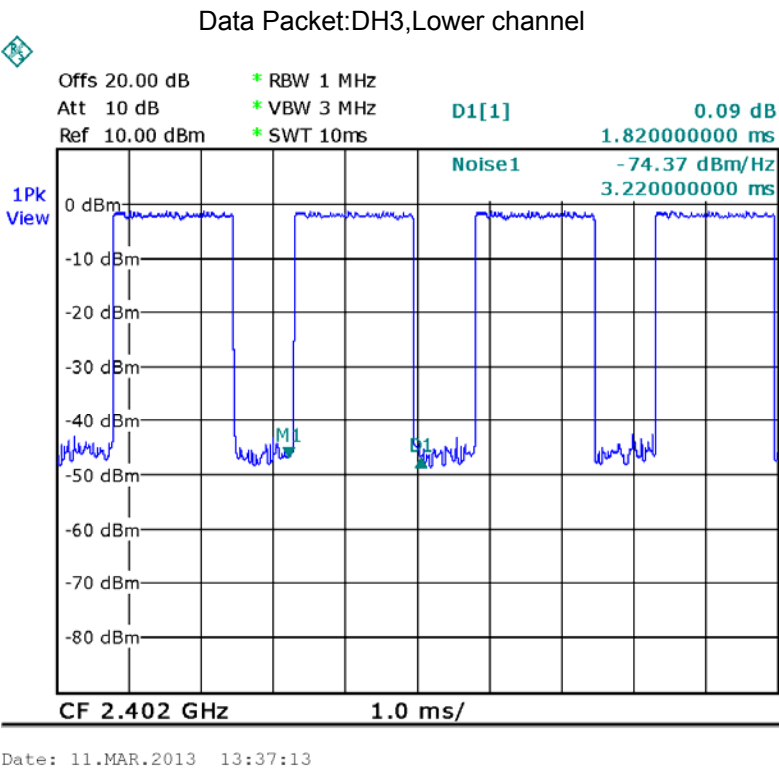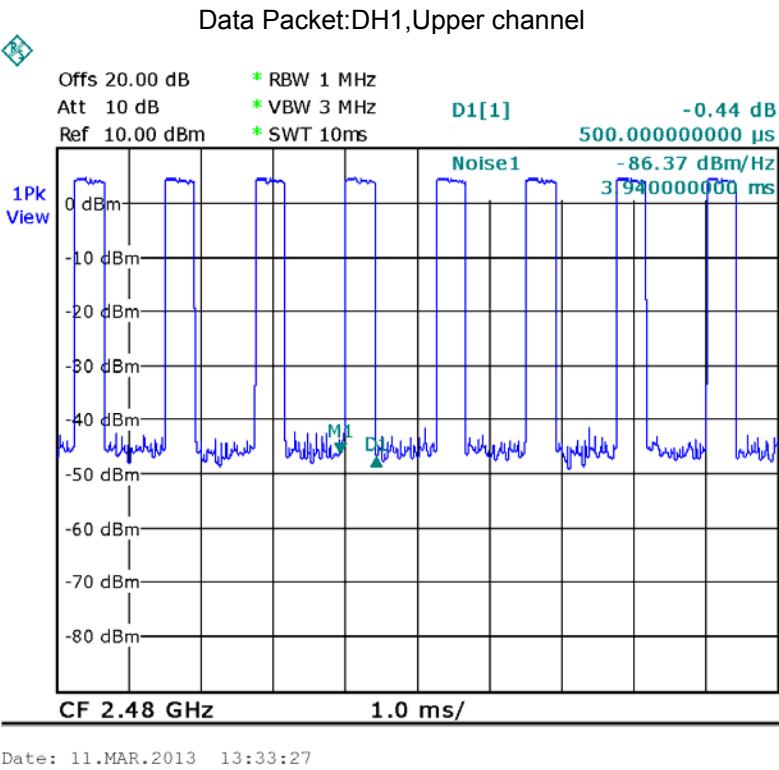

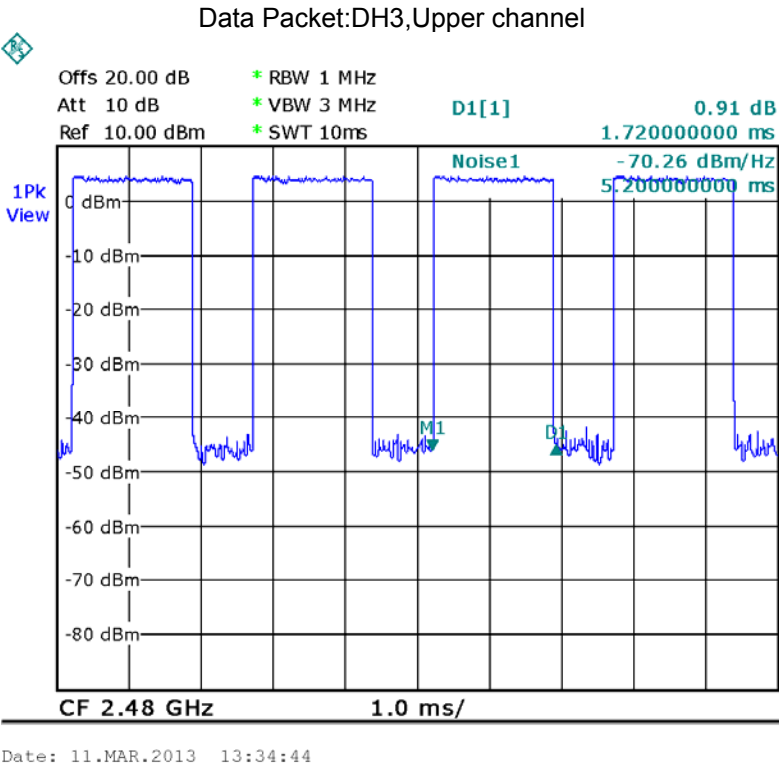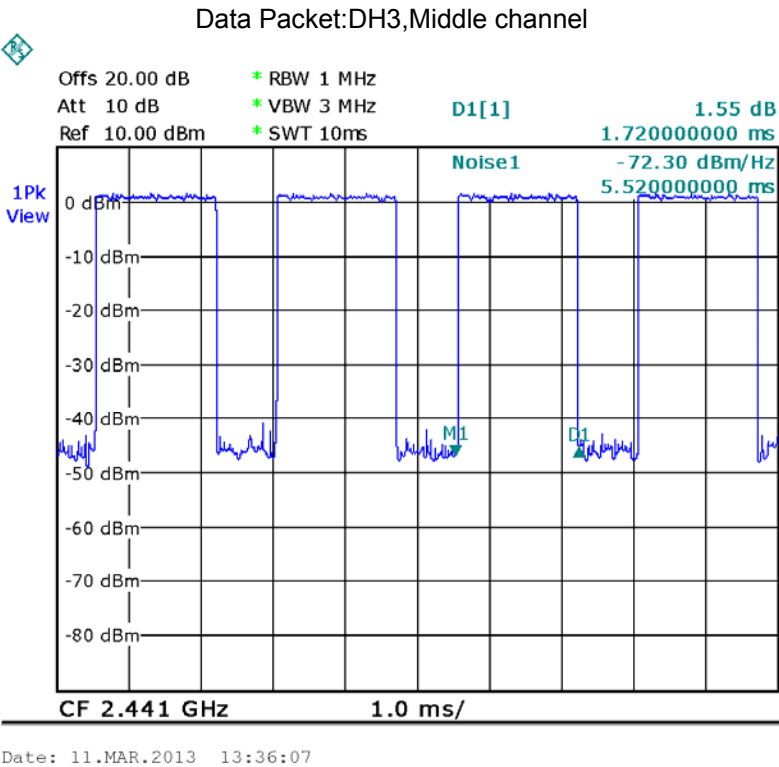

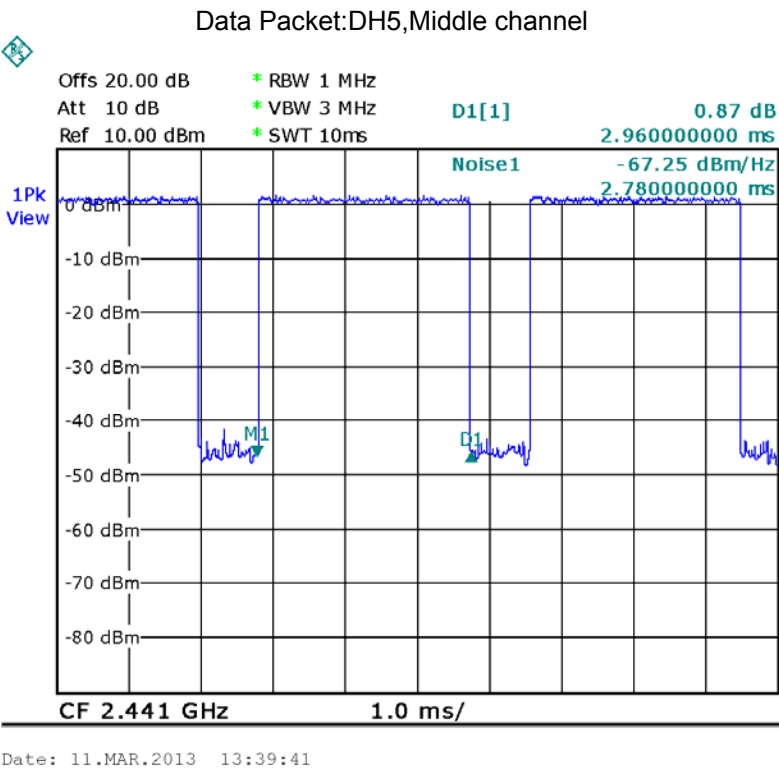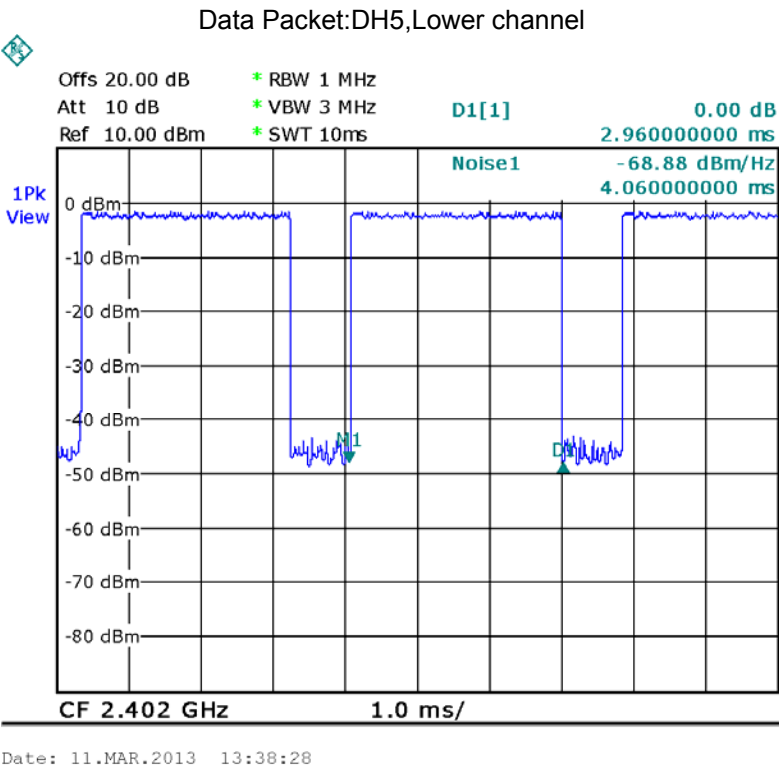

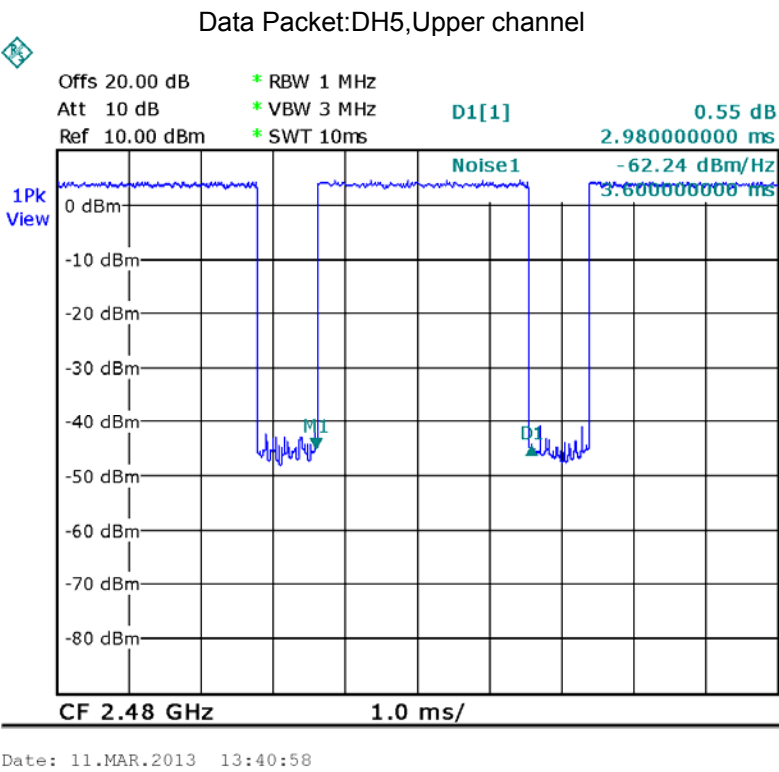

16 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has a PCB printed antenna, fulfill the requirement of this section.

17 RF Exposure

Test Requirement: FCC Part 1.1307

Test Mode: The EUT work in test mode(Tx).

17.1 Requirements:

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

17.2 The procedures / limit

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

17.3 MPE Calculation Method

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Peak RF output power (W)

G = EUT Antenna numeric gain (numeric) ,Gain_{numeric}=10^(dBi/10)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained

Modulation	Antenna Gain (dBi)	Antenna Gain (numeric)	Max. Output Power (dBm)	Peak Output Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)
GFSK	0	1	6.18	4.15	0.0008	1
Pi/4DQPSK	0	1	6.18	4.15	0.0008	1
8DPSK	0	1	6.18	4.15	0.0008	1

18 Photographs – Test Setup

18.1 Radiated Emissions

Below 30MHz



From 30-1000MHz





Above 1GHz





19 Photographs - Constructional Details

19.1 EUT – External View




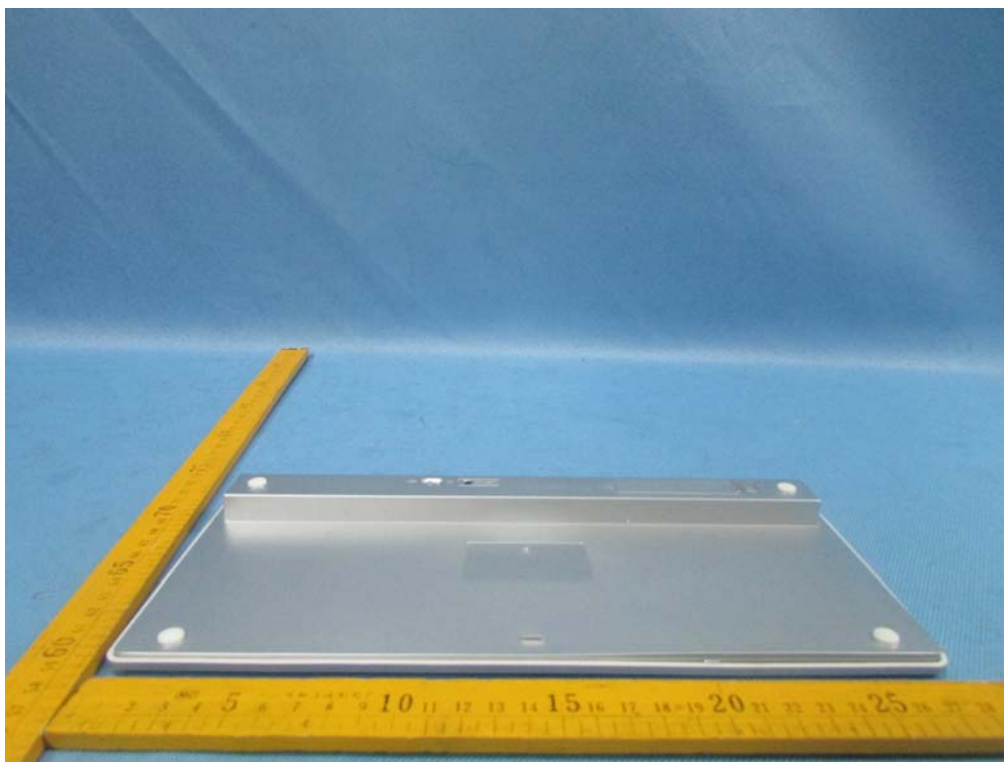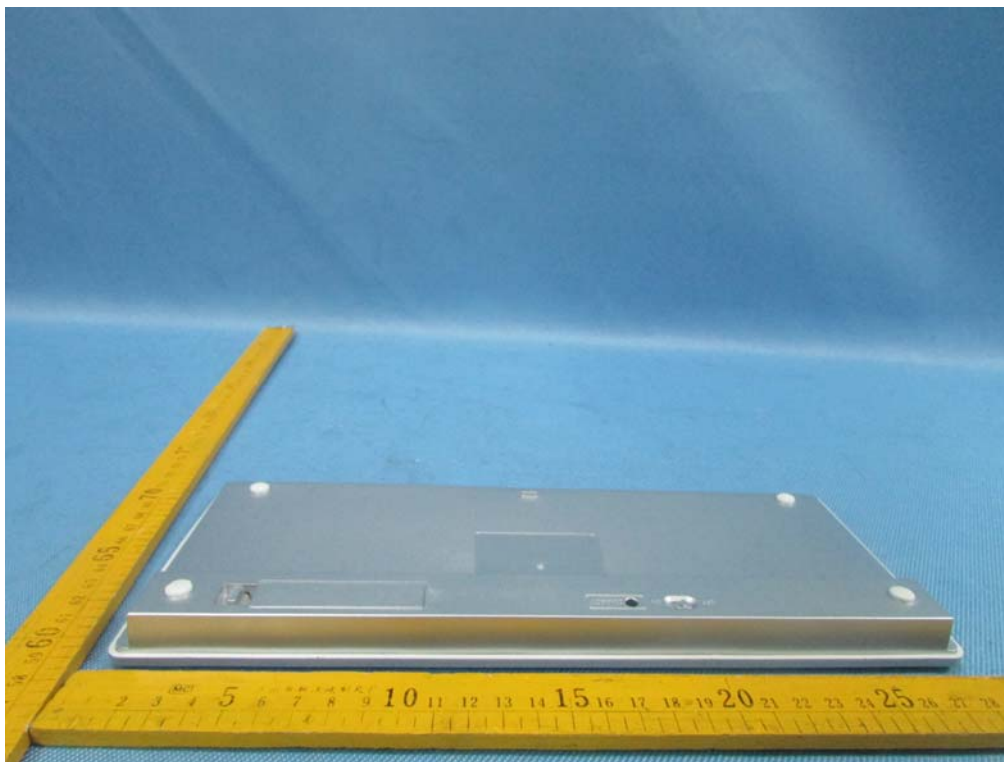


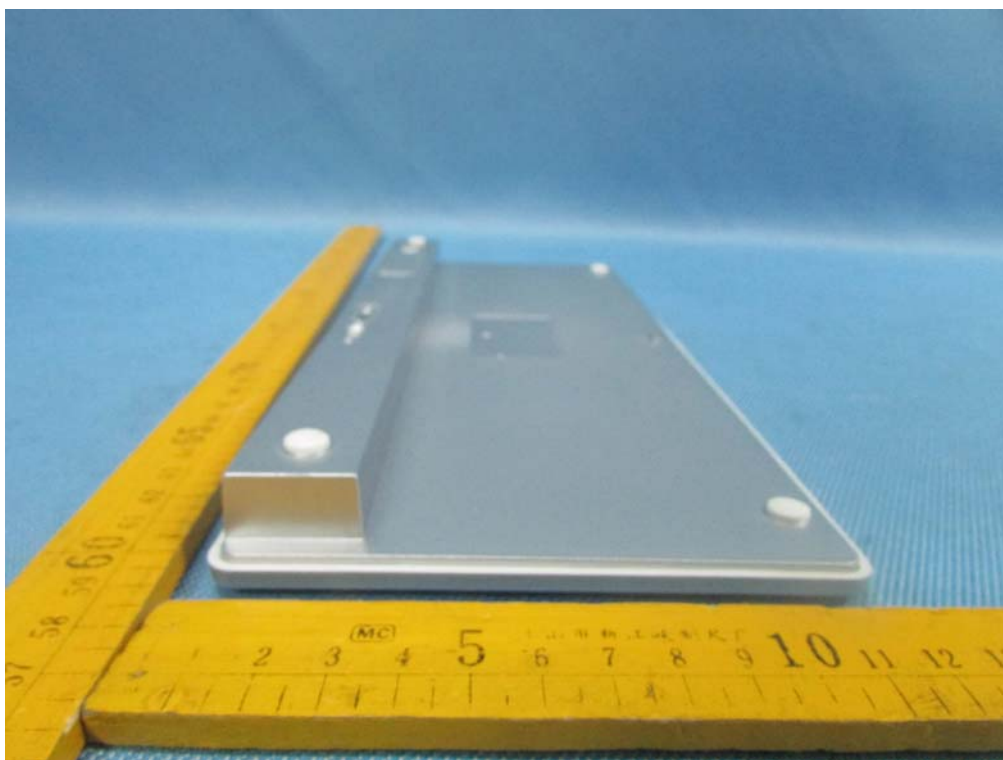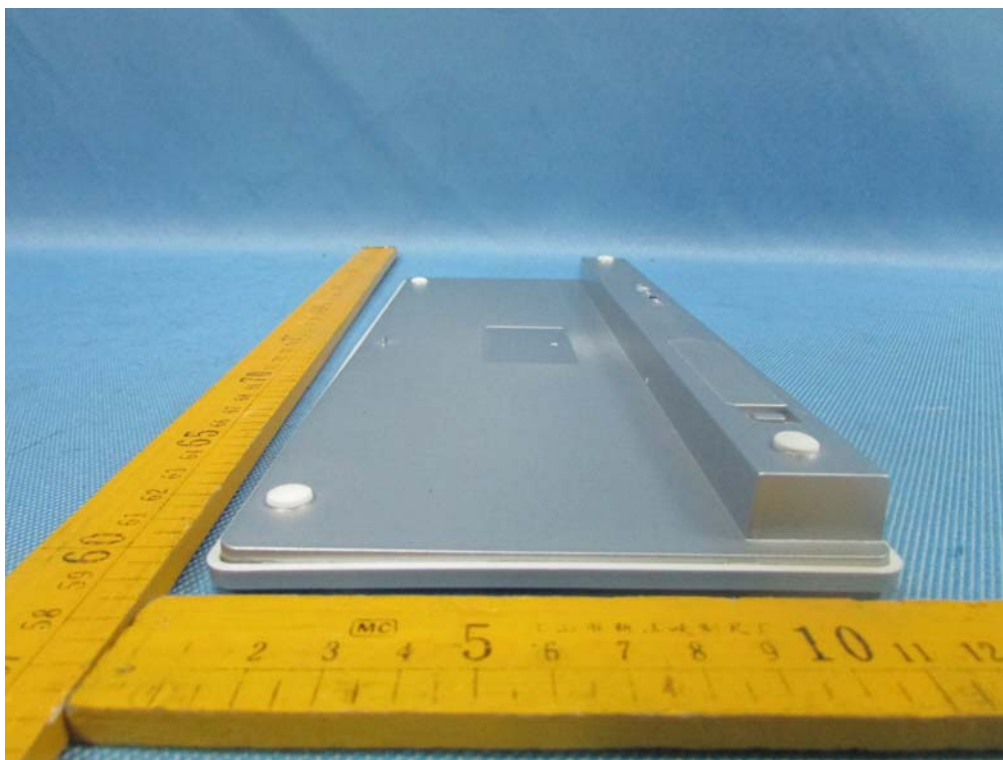


19.2 EUT – Internal View

Battery Placement

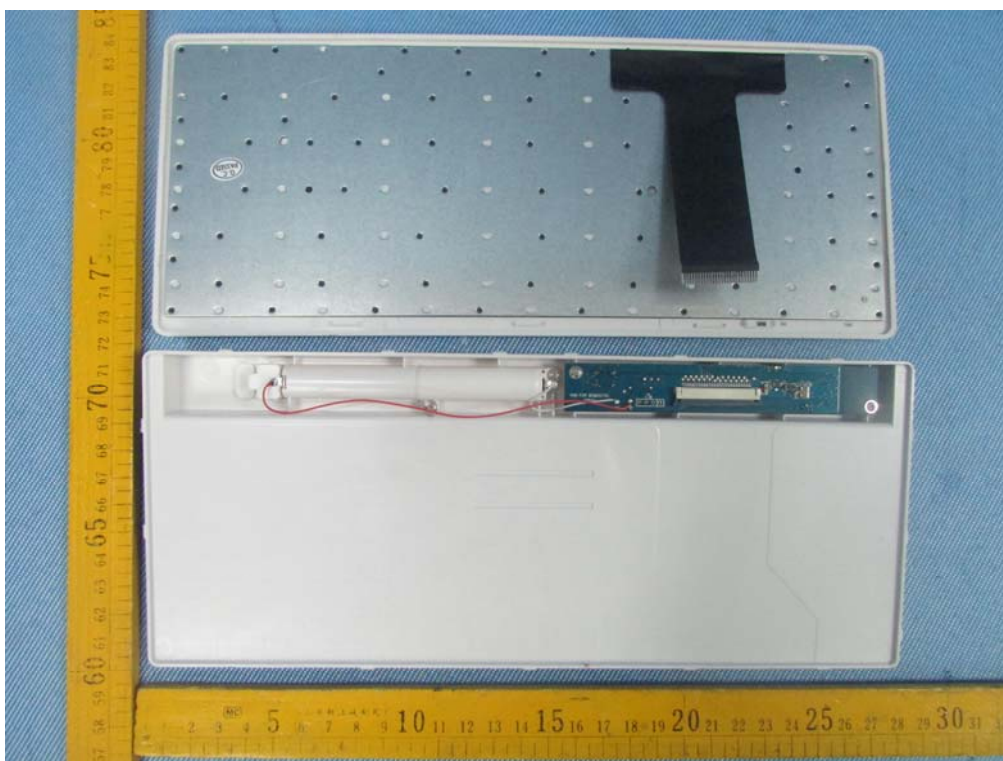

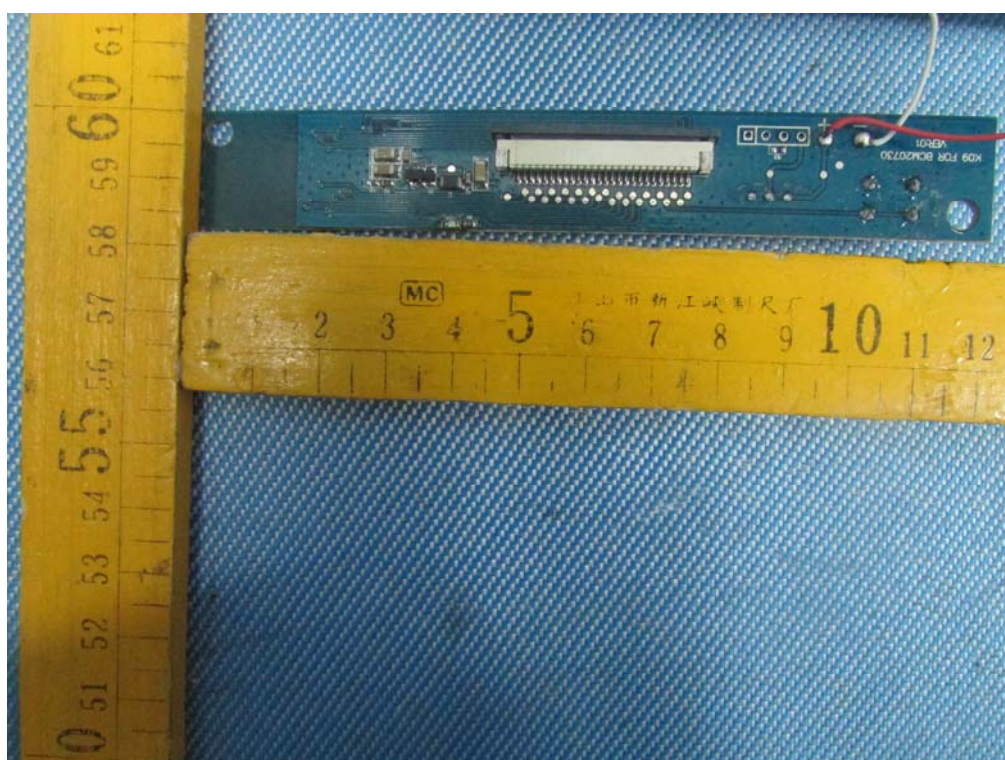

19.3 EUT-RF Module View

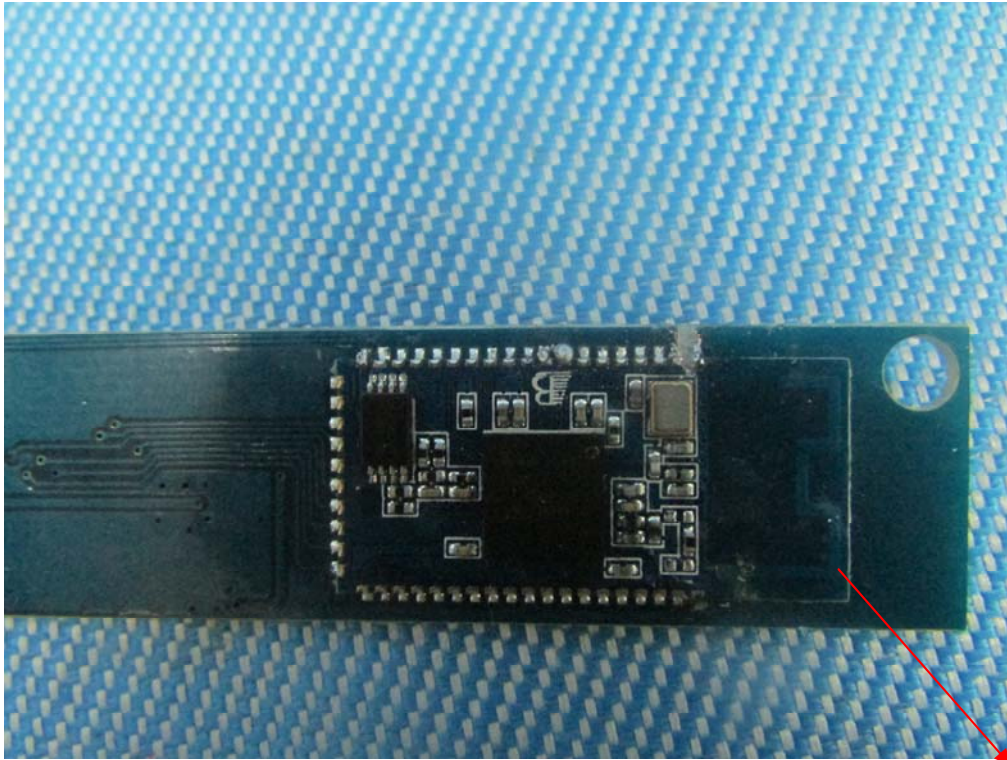

PCB printed ANT.

=End of test report=